


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

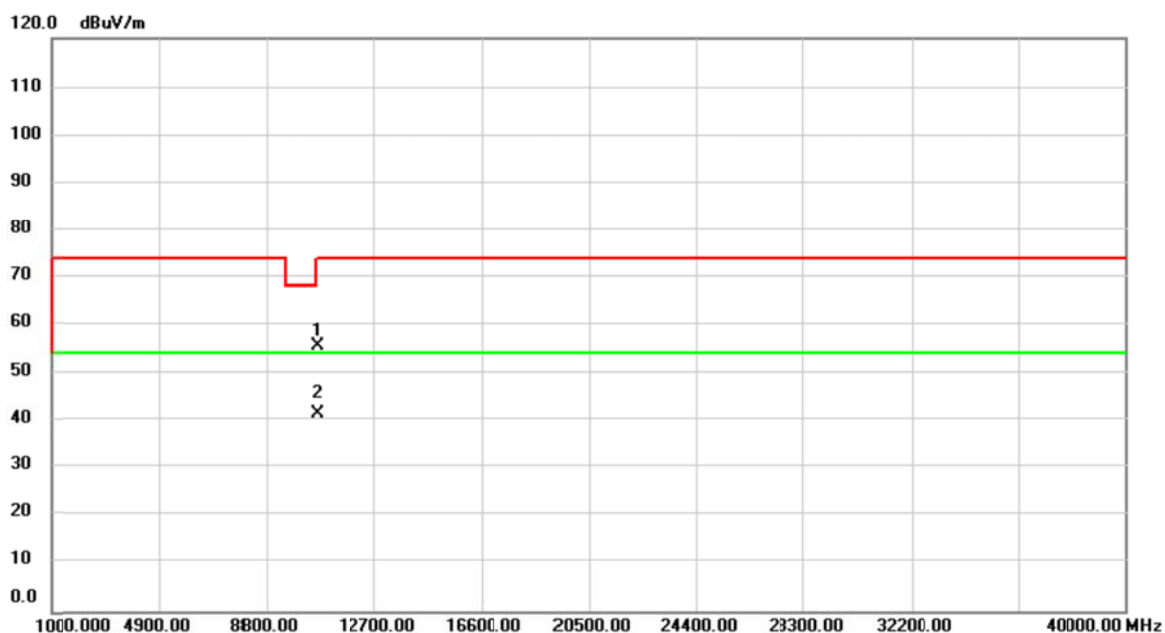

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	52.33	3.45	55.78	74.00	-18.22	peak	
2	*	10620.00	38.24	3.45	41.69	54.00	-12.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

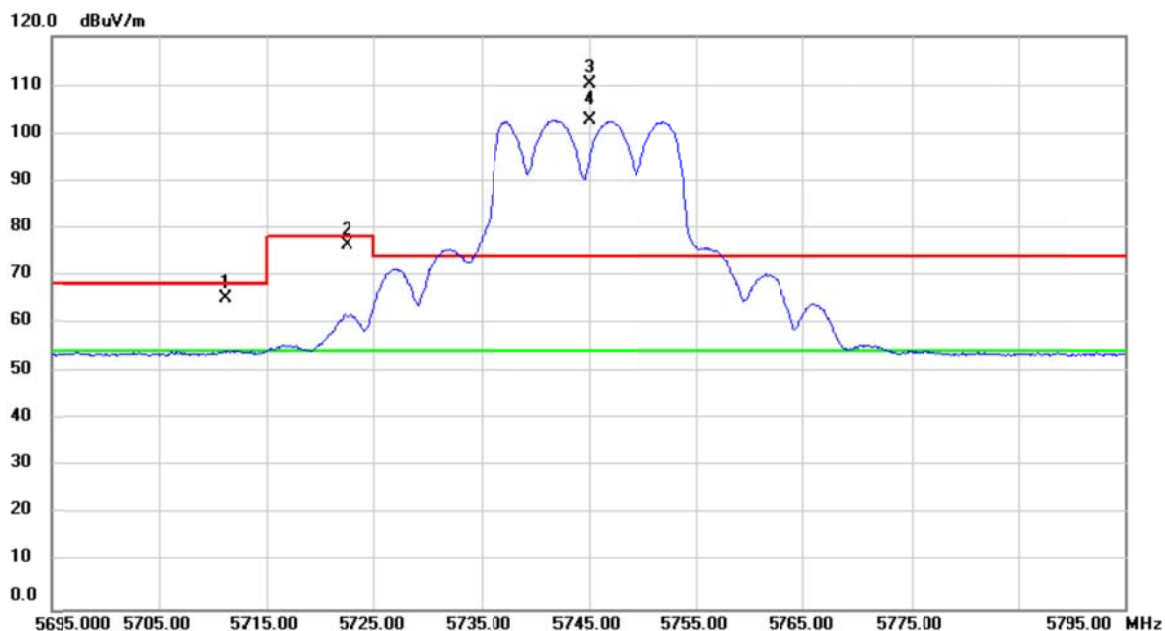

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5711.400	25.71	39.49	65.20	68.20	-3.00	peak	
2		5722.480	36.91	39.51	76.42	78.20	-1.78	peak	
3	X	5745.000	70.78	39.58	110.36	74.00	36.36	peak	No Limit
4	*	5745.000	63.25	39.58	102.83	54.00	48.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

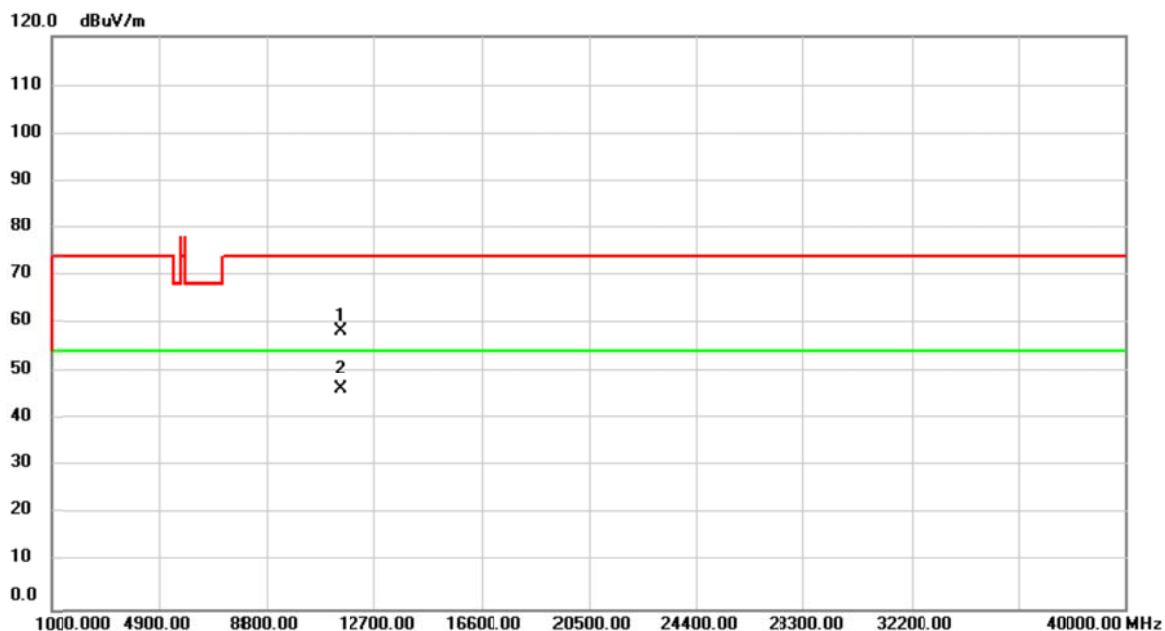

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	53.14	5.23	58.37	74.00	-15.63	peak	
2	*	11490.00	41.08	5.23	46.31	54.00	-7.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

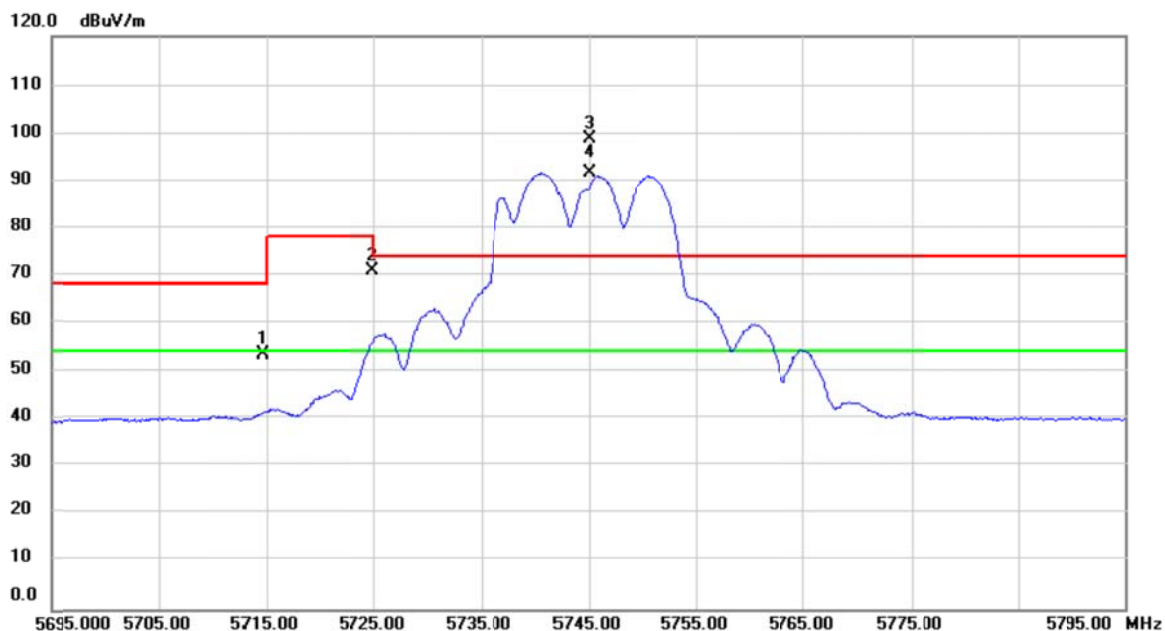

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5714.660	14.09	39.49	53.58	68.20	-14.62	peak	
2		5724.910	31.42	39.52	70.94	78.20	-7.26	peak	
3	X	5745.000	59.37	39.58	98.95	74.00	24.95	peak	No Limit
4	*	5745.000	51.93	39.58	91.51	54.00	37.51	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

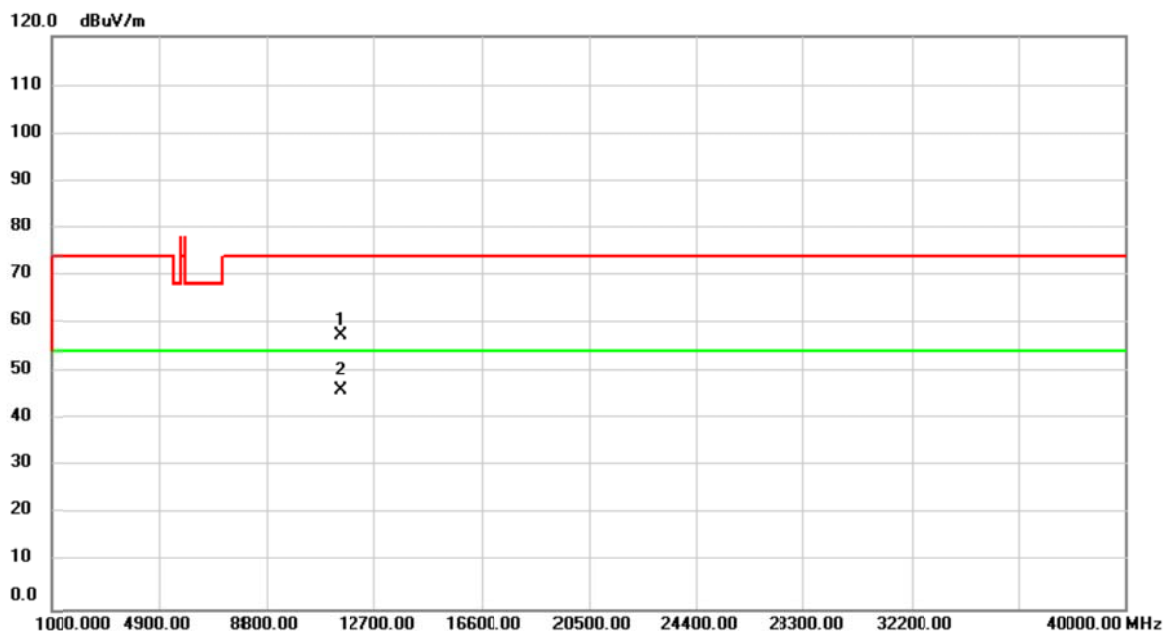

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.13	5.23	57.36	74.00	-16.64	peak	
2	*	11490.00	40.75	5.23	45.98	54.00	-8.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

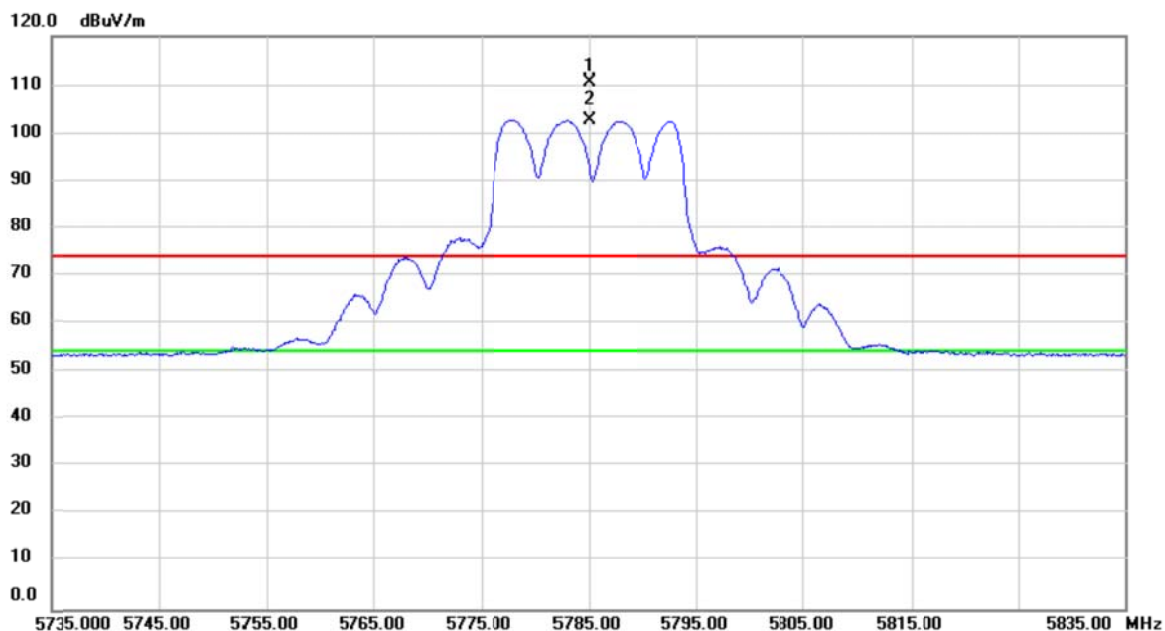

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5785.000	70.89	39.70	110.59	74.00	36.59	peak	No Limit
2	*	5785.000	63.02	39.70	102.72	54.00	48.72	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

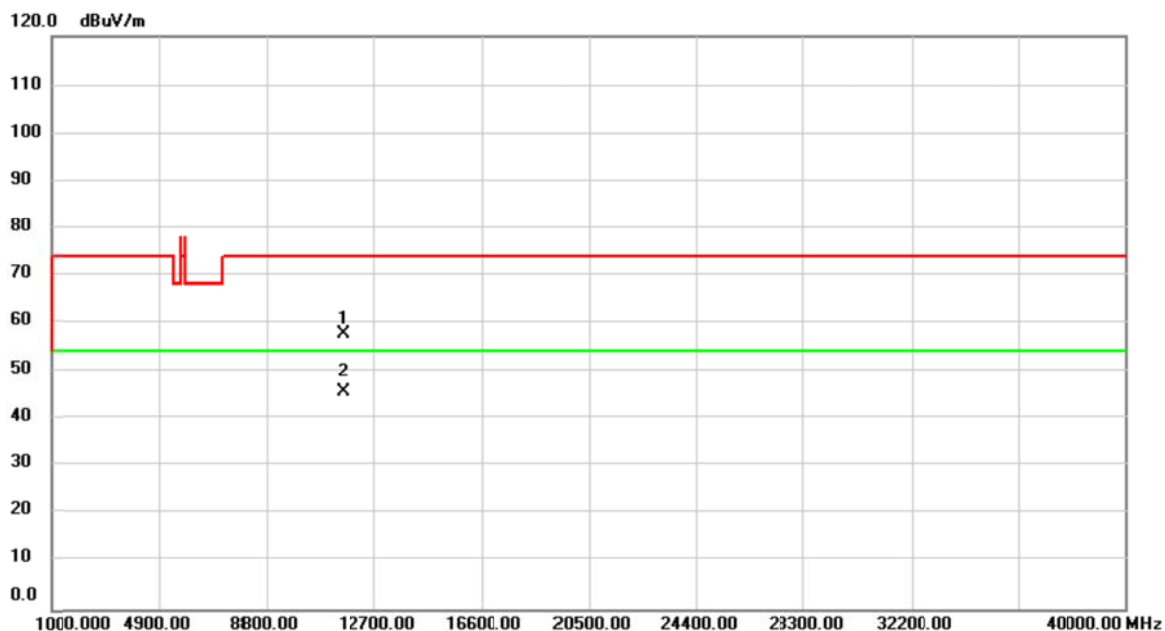

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	52.56	5.13	57.69	74.00	-16.31	peak	
2	*	11570.00	40.57	5.13	45.70	54.00	-8.30	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

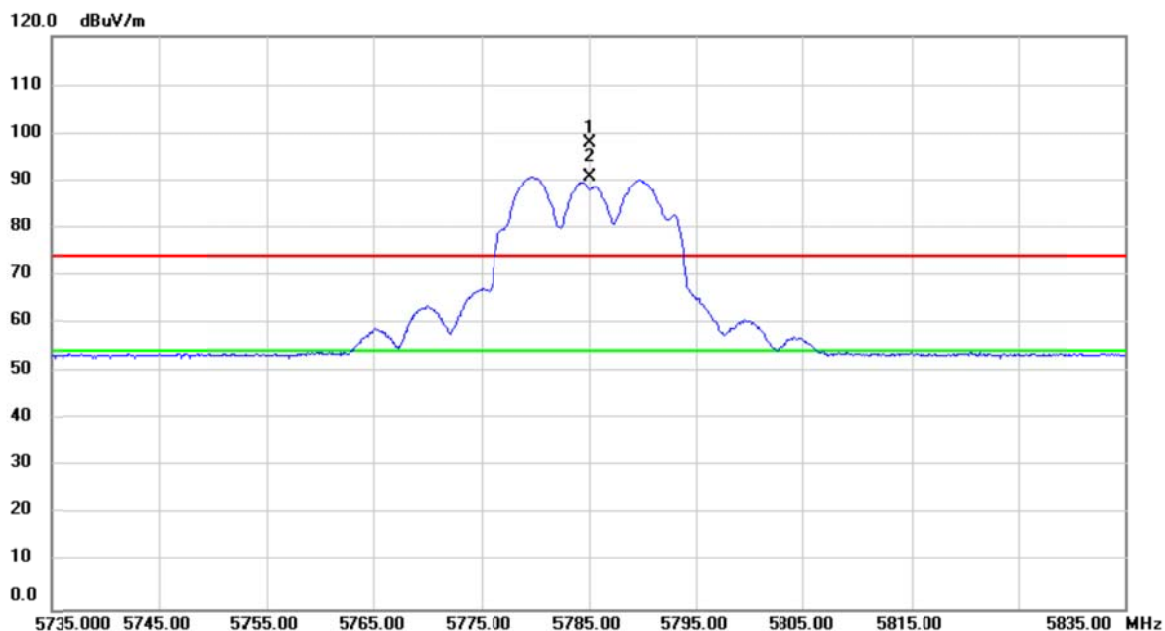

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5785.000	58.14	39.70	97.84	74.00	23.84	peak	No Limit
2	*	5785.000	51.06	39.70	90.76	54.00	36.76	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

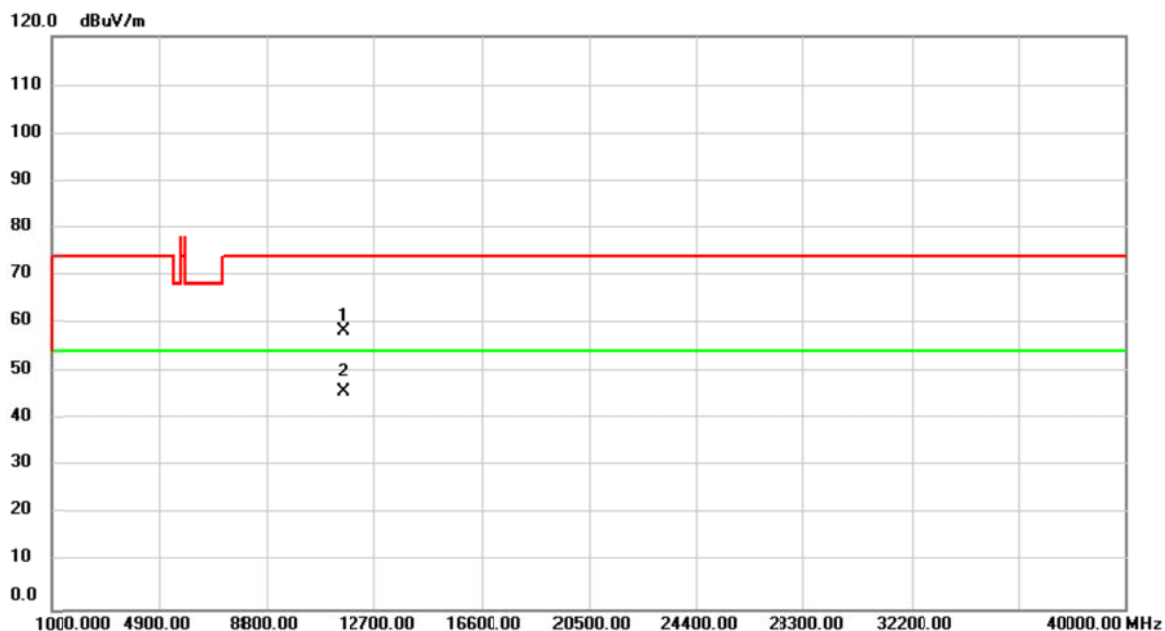

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	53.08	5.13	58.21	74.00	-15.79	peak	
2	*	11570.00	40.69	5.13	45.82	54.00	-8.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

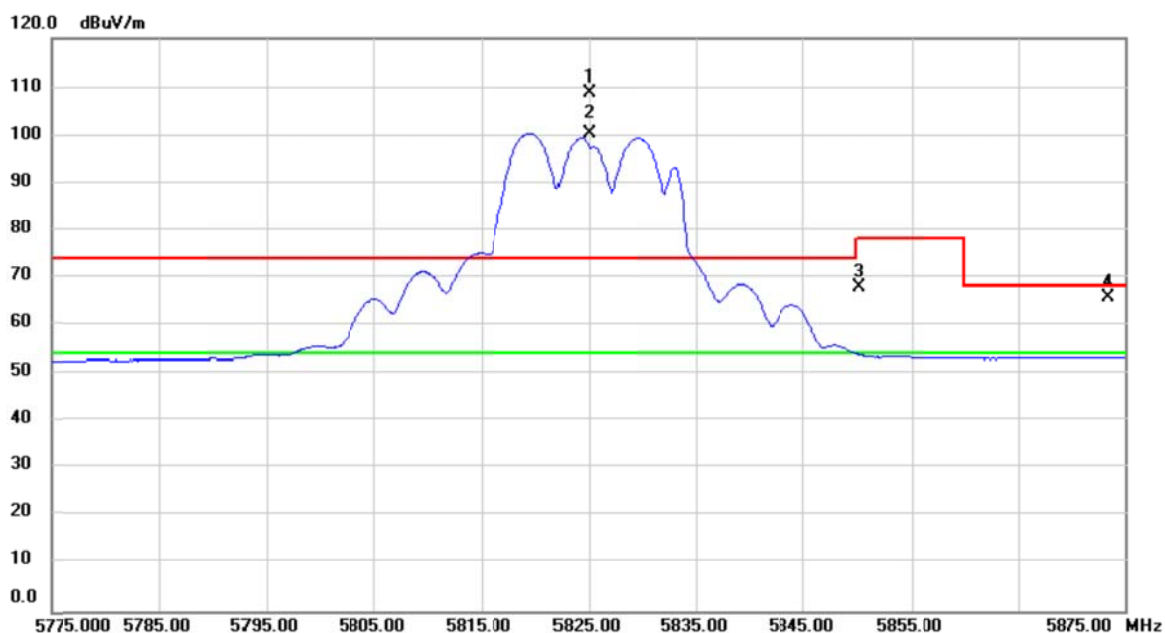

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5825.000	69.07	39.82	108.89	74.00	34.89	peak	No Limit
2	*	5825.000	60.62	39.82	100.44	54.00	46.44	AVG	No Limit
3		5850.260	28.08	39.89	67.97	78.20	-10.23	peak	
4		5873.440	25.92	39.95	65.87	68.20	-2.33	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

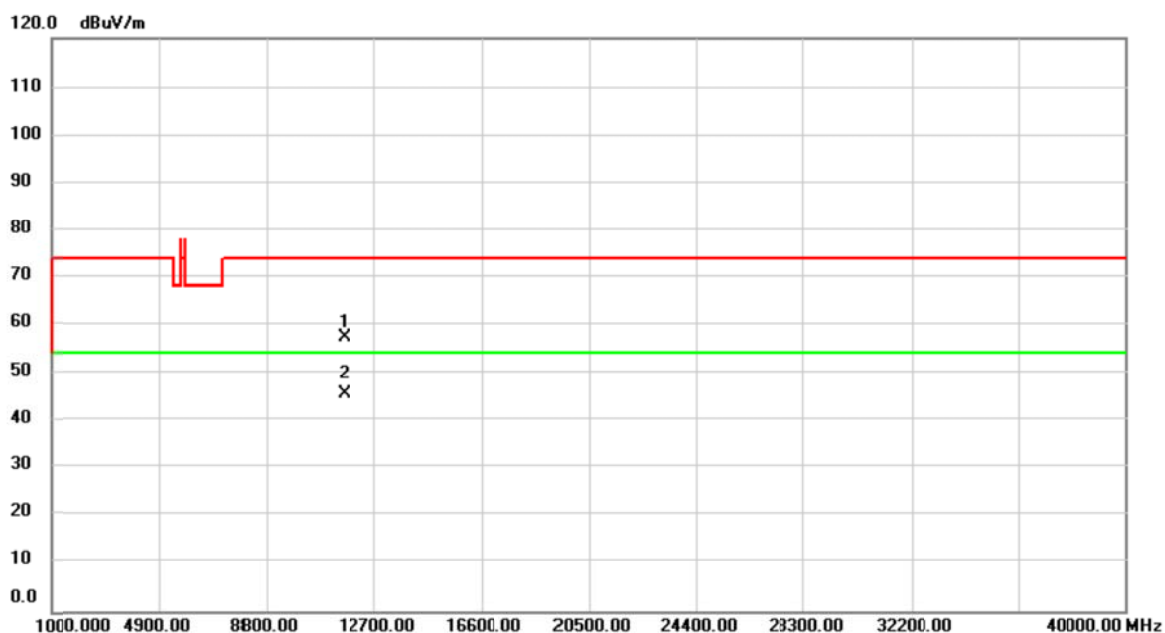

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.39	4.99	57.38	74.00	-16.62	peak	
2	*	11650.00	40.74	4.99	45.73	54.00	-8.27	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

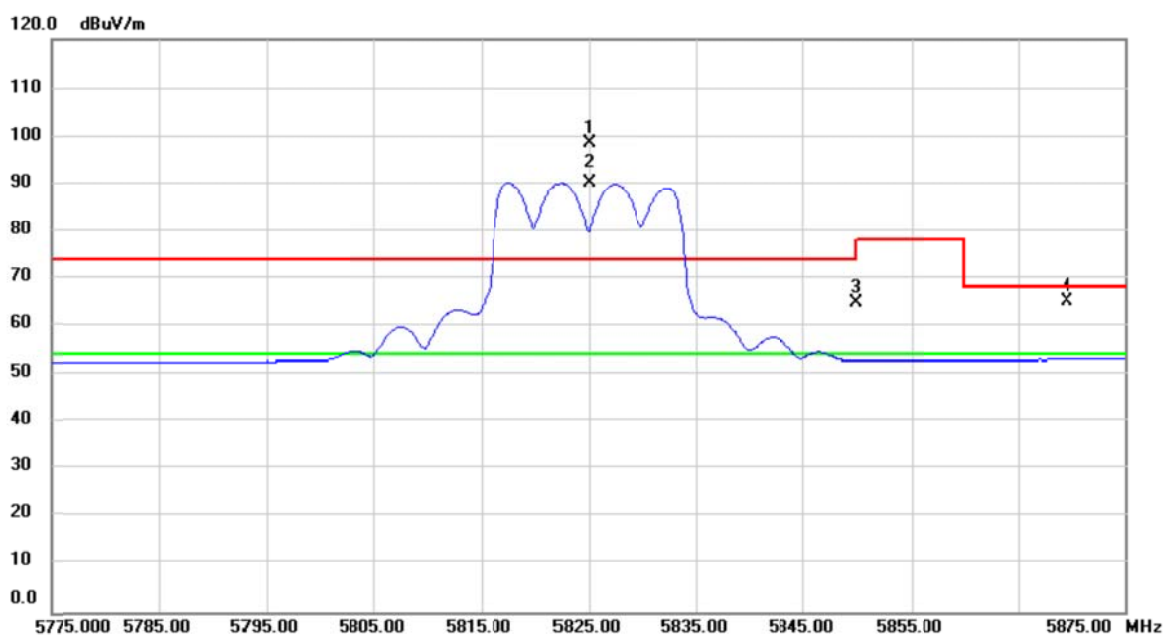

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5825.000	58.71	39.82	98.53	74.00	24.53	peak	No Limit
2	*	5825.000	50.27	39.82	90.09	54.00	36.09	AVG	No Limit
3		5850.040	25.11	39.89	65.00	78.20	-13.20	peak	
4		5869.540	25.30	39.94	65.24	68.20	-2.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

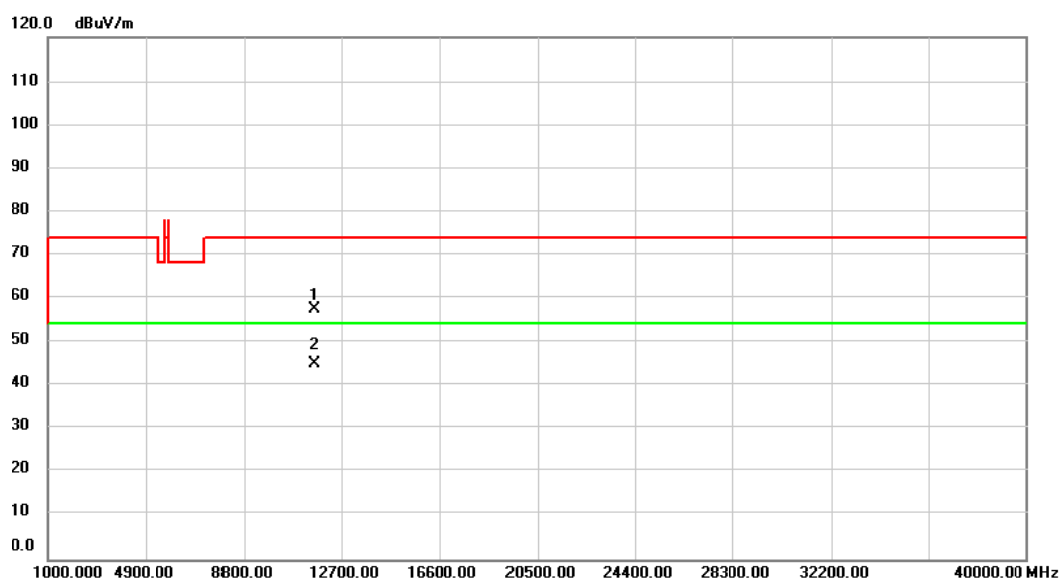

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.00	52.41	4.99	57.40	74.00	-16.60	peak	
2 *	11650.00	40.18	4.99	45.17	54.00	-8.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

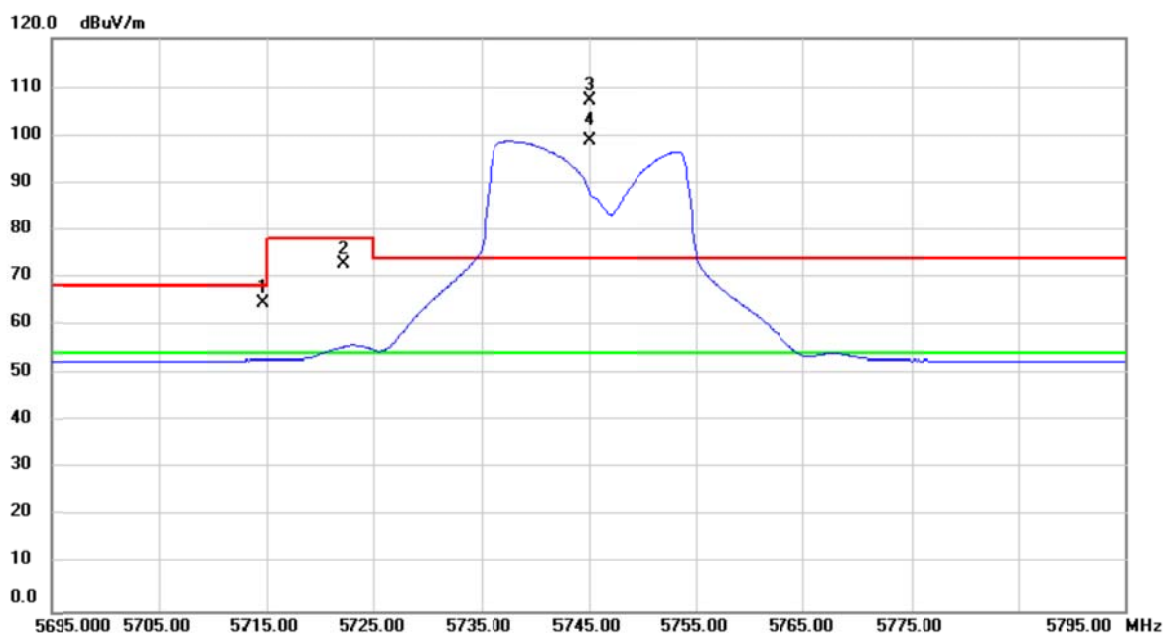

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5714.700	25.07	39.49	64.56	68.20	-3.64	peak	
2		5722.100	33.26	39.51	72.77	78.20	-5.43	peak	
3	X	5745.000	67.64	39.58	107.22	74.00	33.22	peak	No Limit
4	*	5745.000	59.15	39.58	98.73	54.00	44.73	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

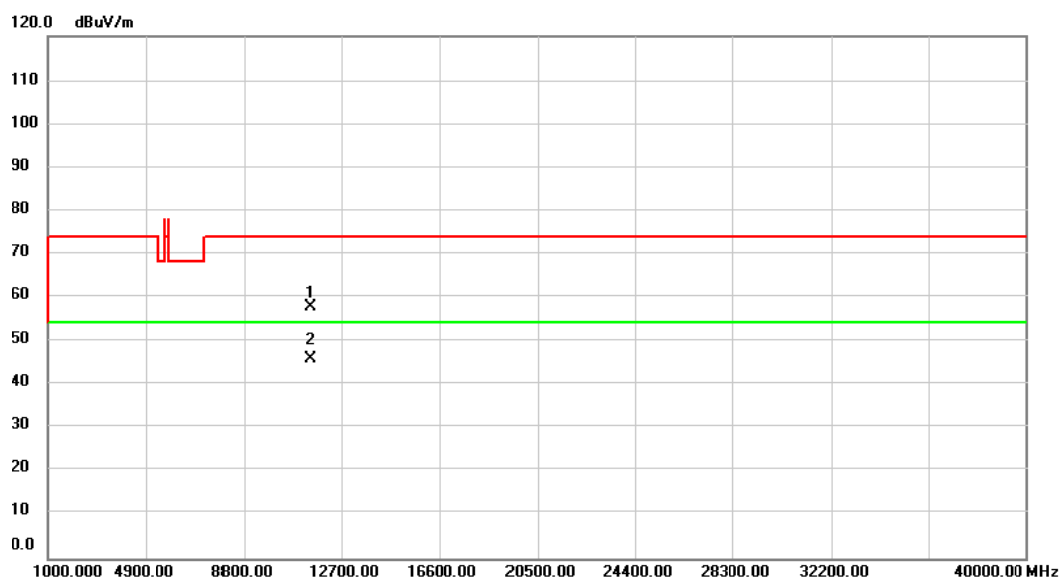

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.66	5.23	57.89	74.00	-16.11	peak	
2	*	11490.00	40.72	5.23	45.95	54.00	-8.05	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

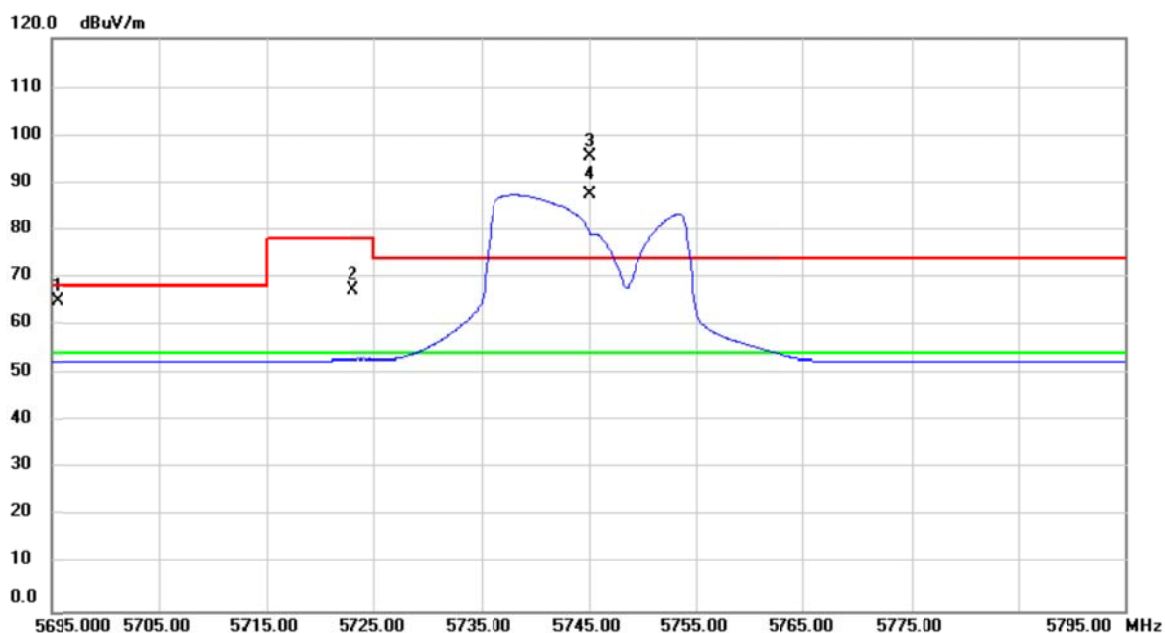

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5695.540	25.47	39.43	64.90	68.20	-3.30	peak	
2		5723.000	27.94	39.51	67.45	78.20	-10.75	peak	
3	X	5745.000	55.87	39.58	95.45	74.00	21.45	peak	No Limit
4	*	5745.000	47.75	39.58	87.33	54.00	33.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

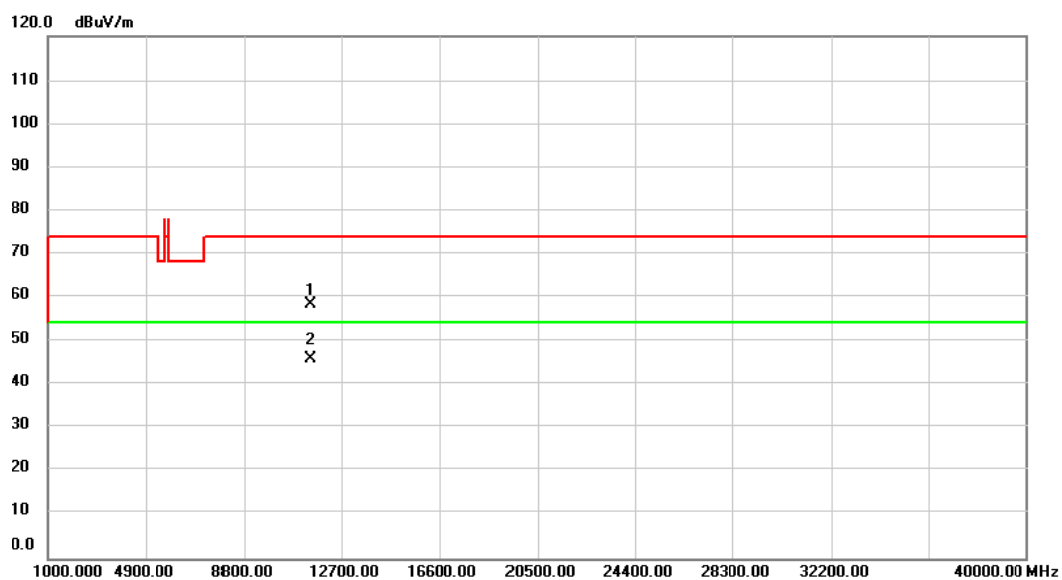

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	53.05	5.23	58.28	74.00	-15.72	peak	
2	*	11490.00	40.76	5.23	45.99	54.00	-8.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

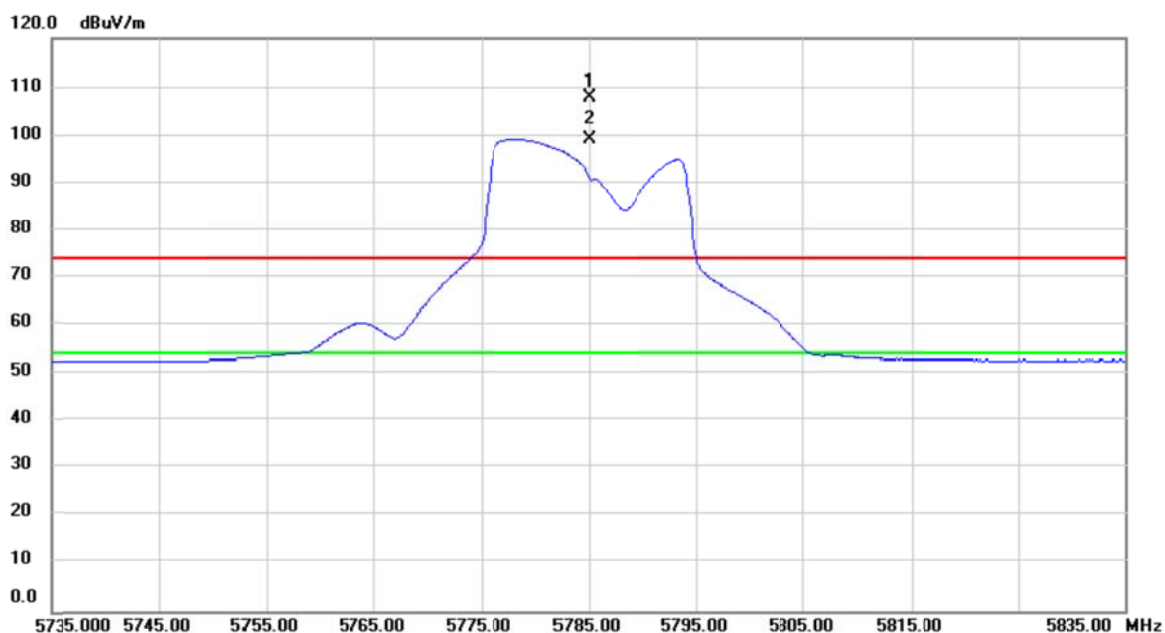

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5785.000	68.18	39.70	107.88	74.00	33.88	peak	No Limit
2	*	5785.000	59.43	39.70	99.13	54.00	45.13	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

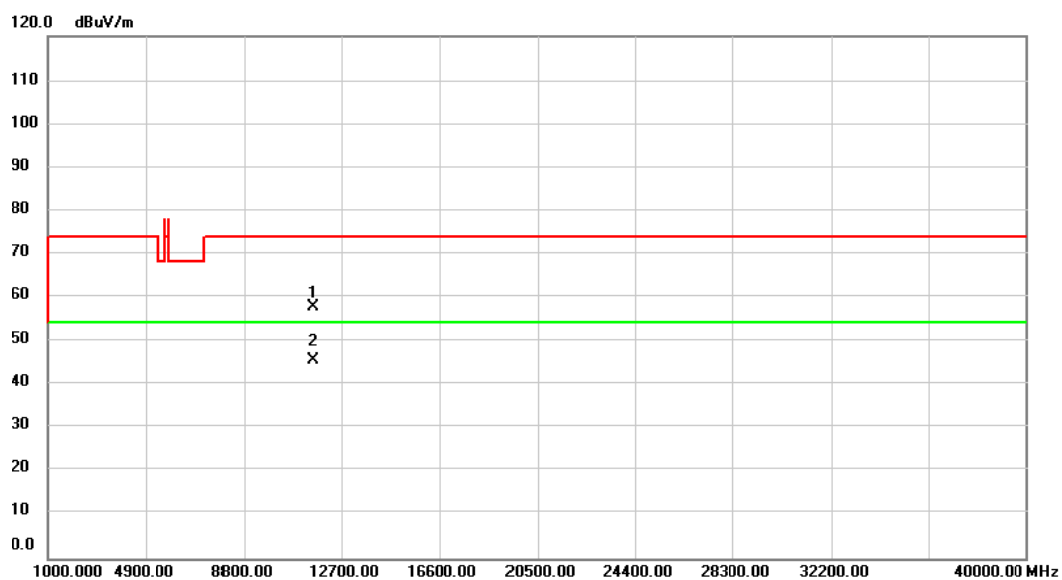

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.00	52.73	5.13	57.86	74.00	-16.14	peak	
2 *	11570.00	40.71	5.13	45.84	54.00	-8.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

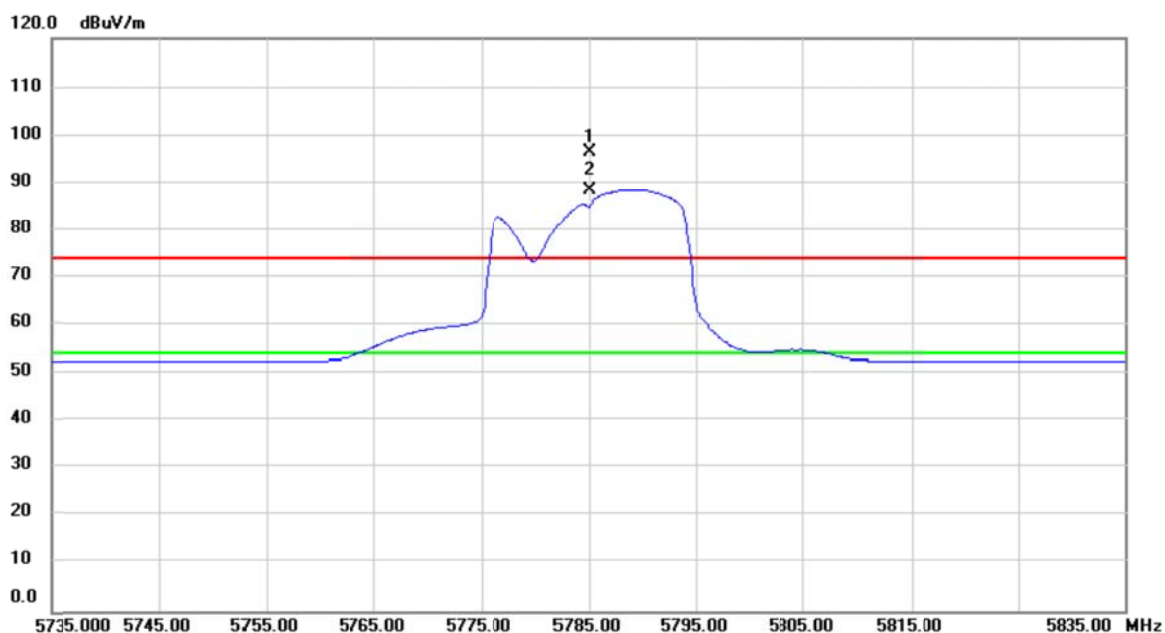

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5785.000	56.89	39.70	96.59	74.00	22.59	peak	No Limit
2	*	5785.000	48.78	39.70	88.48	54.00	34.48	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

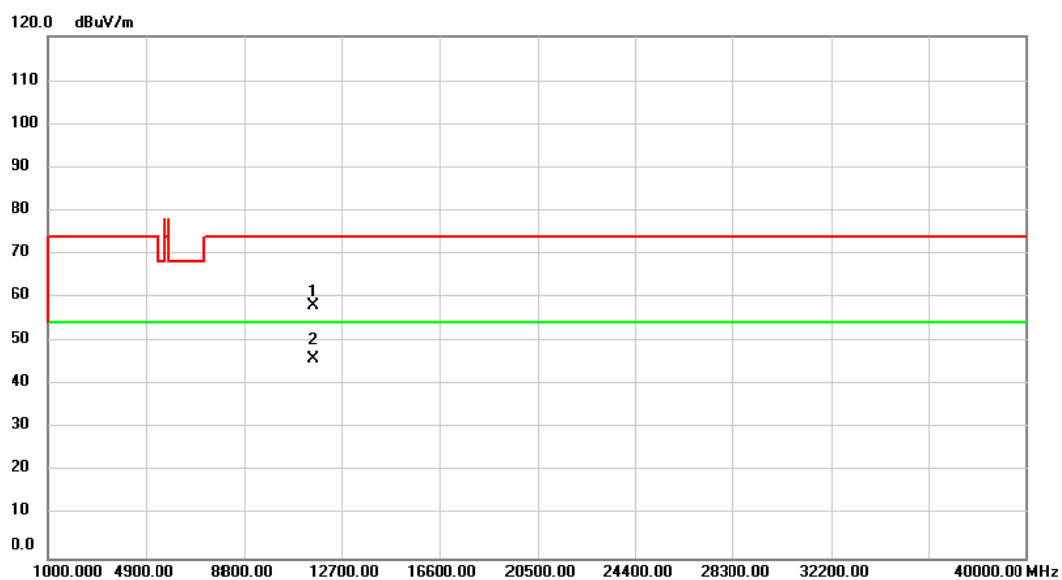

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.03	5.13	58.16	74.00	-15.84	peak	
2	*	11570.00	40.85	5.13	45.98	54.00	-8.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

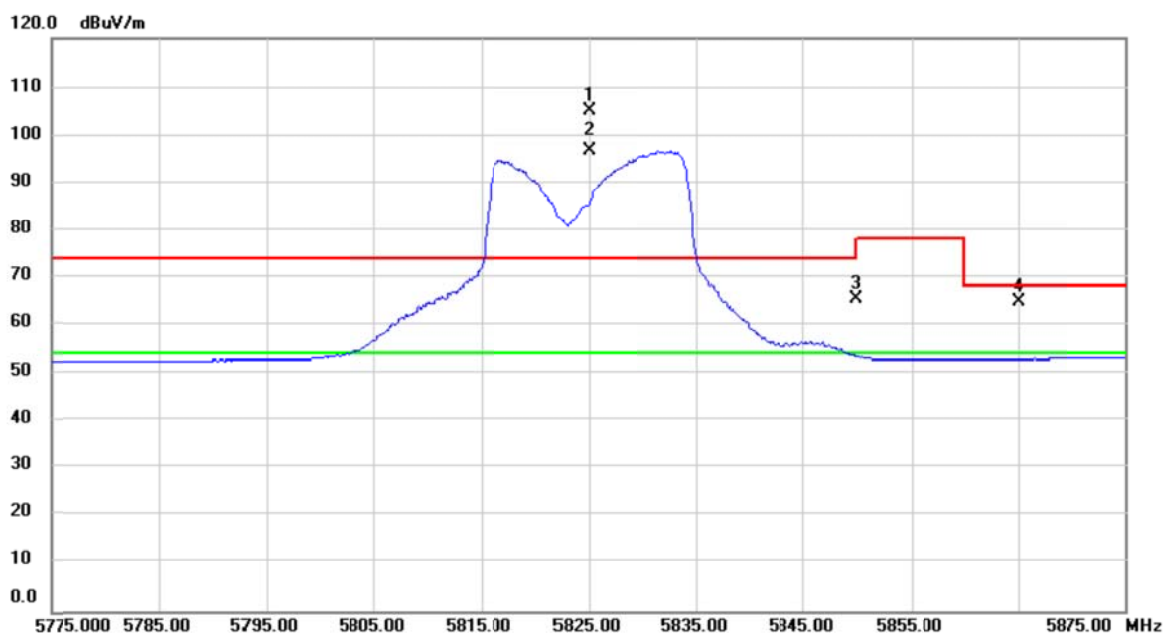

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5825.000	65.23	39.82	105.05	74.00	31.05	peak	No Limit
2	*	5825.000	56.85	39.82	96.67	54.00	42.67	AVG	No Limit
3		5850.060	25.78	39.89	65.67	78.20	-12.53	peak	
4		5865.100	24.91	39.93	64.84	68.20	-3.36	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

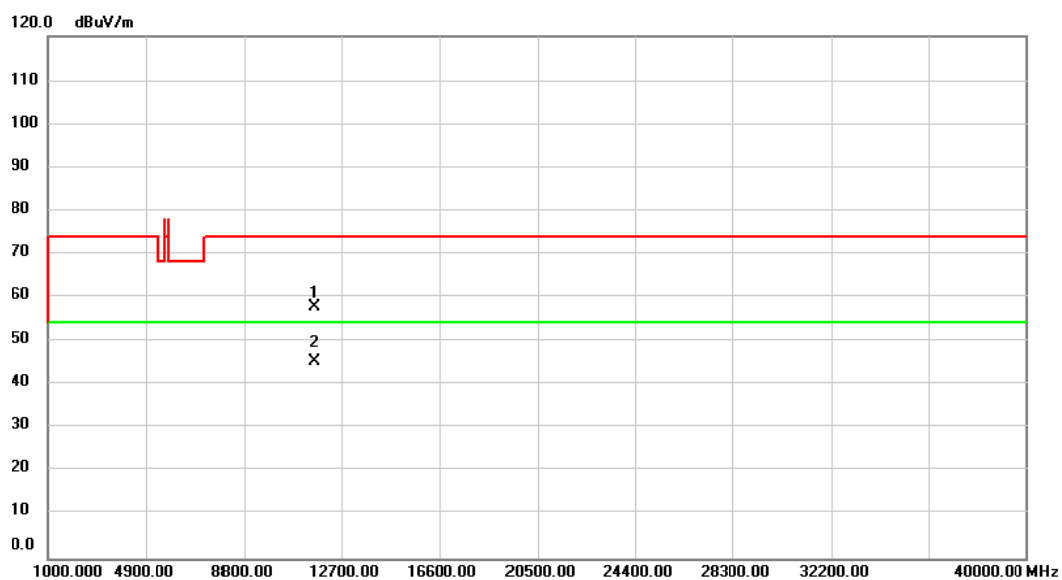

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.79	4.99	57.78	74.00	-16.22	peak	
2	*	11650.00	40.46	4.99	45.45	54.00	-8.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

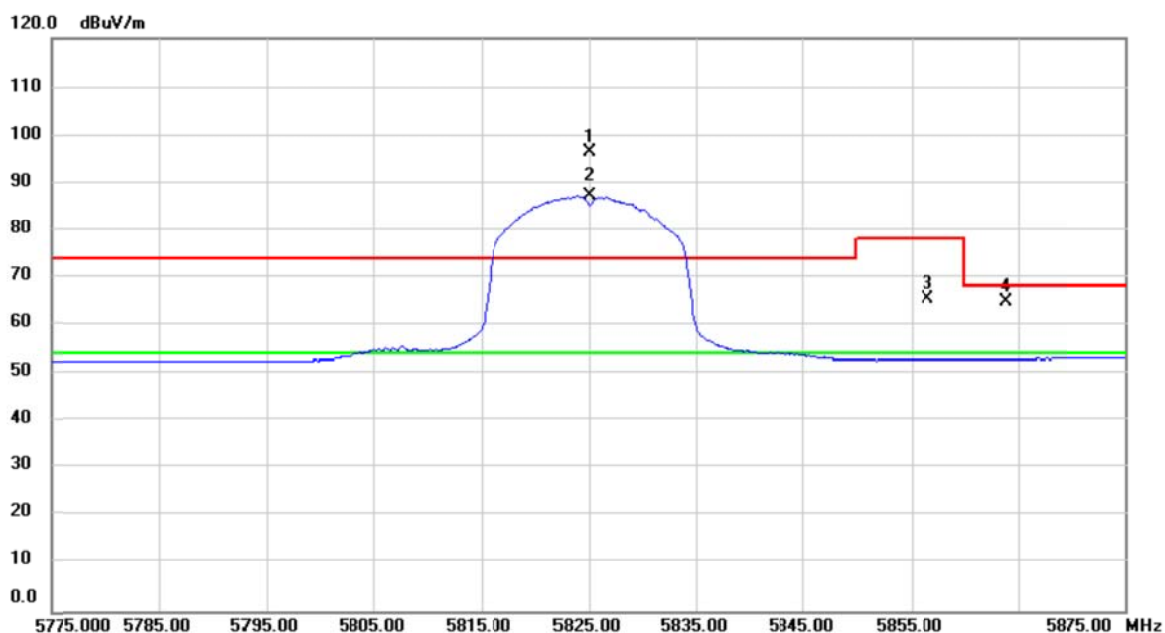

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5825.000	56.54	39.82	96.36	74.00	22.36	peak	No Limit
2	*	5825.000	47.36	39.82	87.18	54.00	33.18	AVG	No Limit
3		5856.570	25.69	39.90	65.59	78.20	-12.61	peak	
4		5863.855	25.16	39.93	65.09	68.20	-3.11	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

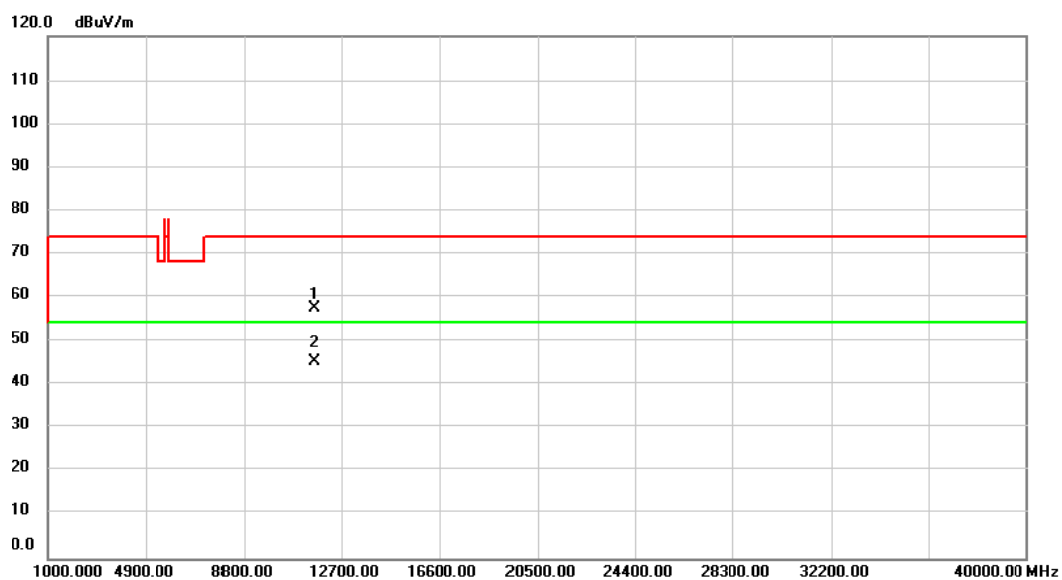

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.48	4.99	57.47	74.00	-16.53	peak	
2	*	11650.00	40.59	4.99	45.58	54.00	-8.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

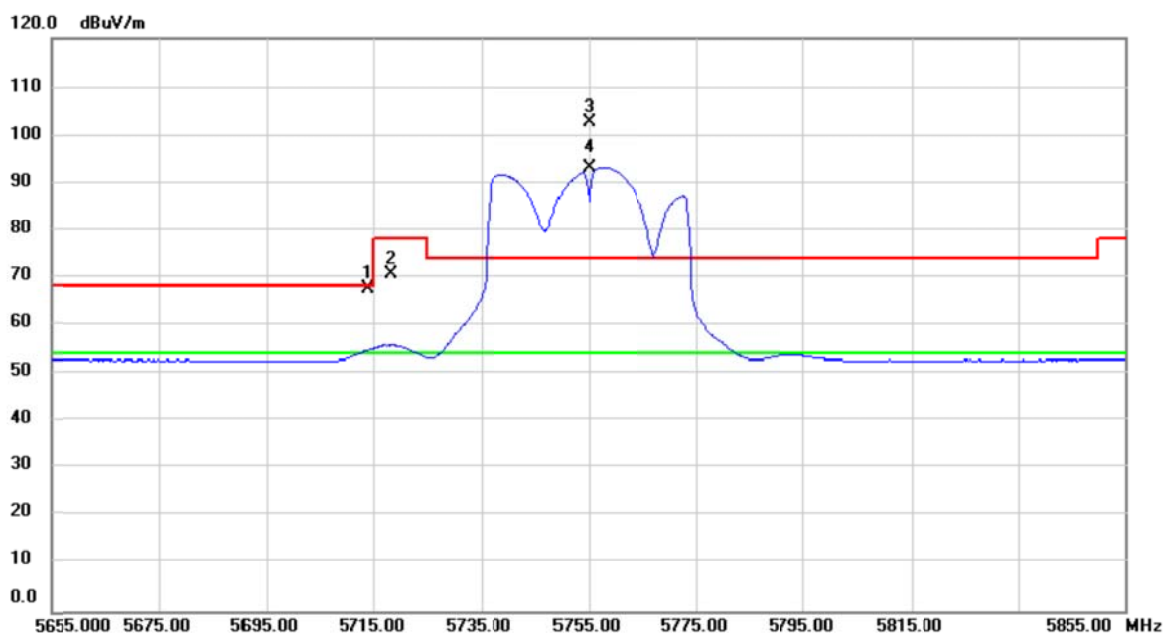

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5714.000	28.17	39.49	67.66	68.20	-0.54	peak	
2		5718.270	31.12	39.51	70.63	78.20	-7.57	peak	
3	X	5755.000	63.25	39.61	102.86	74.00	28.86	peak	No Limit
4	*	5755.000	53.64	39.61	93.25	54.00	39.25	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

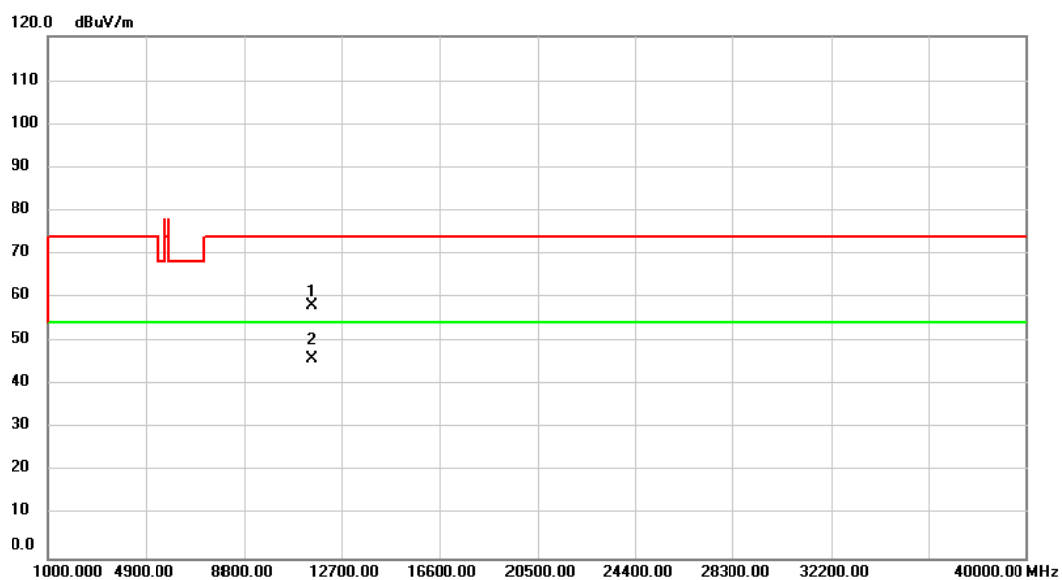

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	52.87	5.23	58.10	74.00	-15.90	peak	
2	*	11510.00	40.83	5.23	46.06	54.00	-7.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

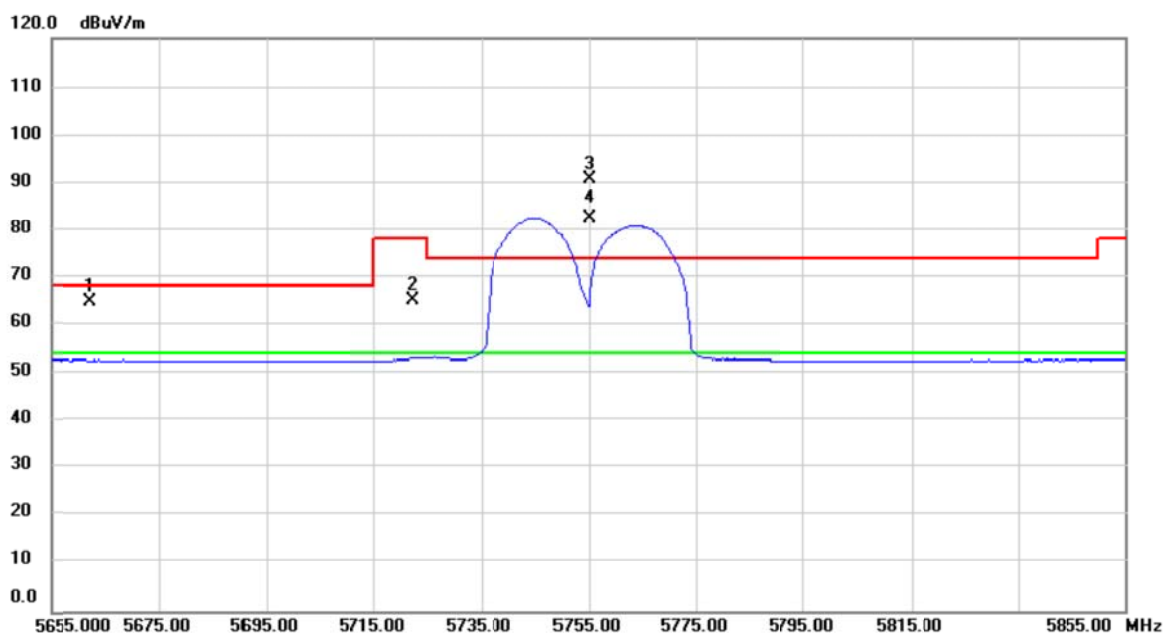

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5662.260	25.51	39.34	64.85	68.20	-3.35	peak	
2		5722.450	25.69	39.51	65.20	78.20	-13.00	peak	
3	X	5755.000	51.27	39.61	90.88	74.00	16.88	peak	No Limit
4	*	5755.000	42.79	39.61	82.40	54.00	28.40	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

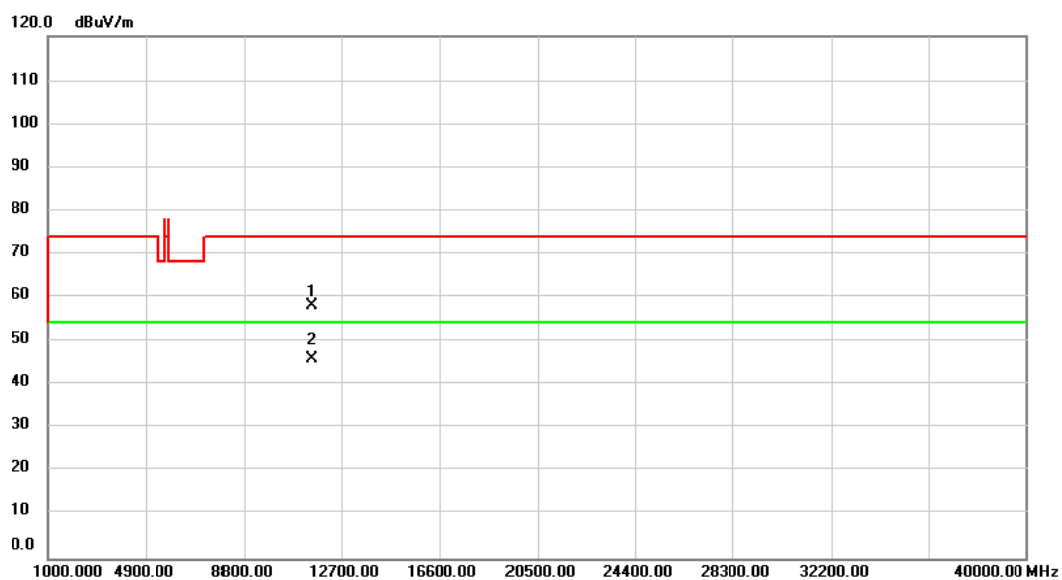

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.00	52.88	5.23	58.11	74.00	-15.89	peak	
2 *	11510.00	40.82	5.23	46.05	54.00	-7.95	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

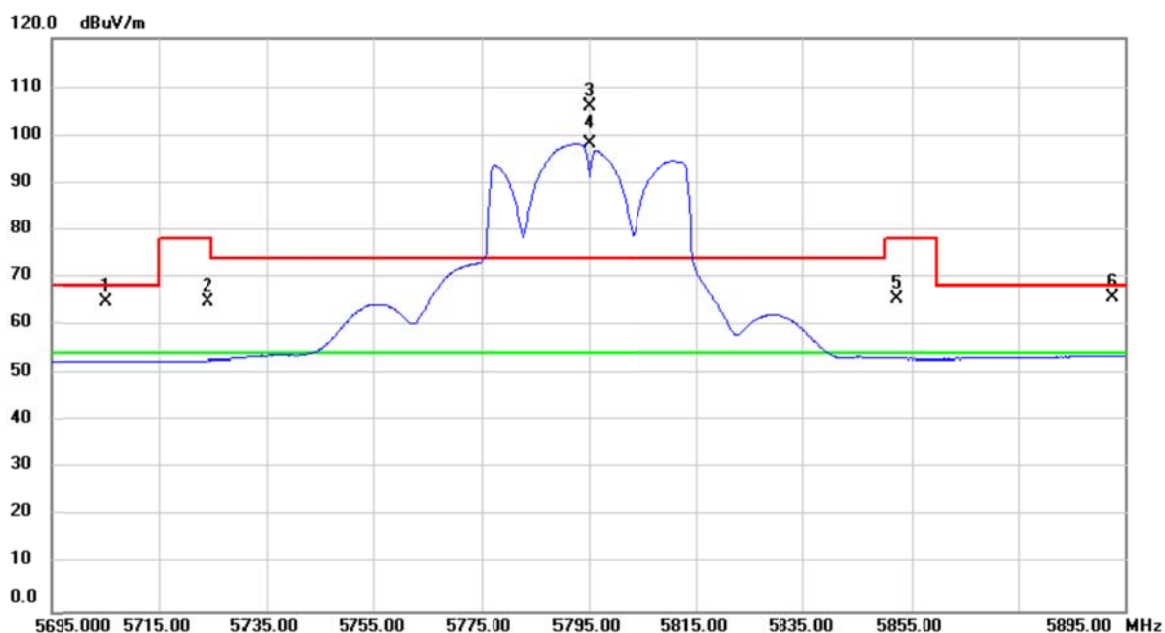

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5705.300	25.52	39.47	64.99	68.20	-3.21	peak	
2		5724.230	25.44	39.52	64.96	78.20	-13.24	peak	
3	X	5795.000	66.31	39.72	106.03	74.00	32.03	peak	No Limit
4	*	5795.000	58.51	39.72	98.23	54.00	44.23	AVG	No Limit
5		5852.180	25.71	39.89	65.60	78.20	-12.60	peak	
6		5892.725	25.74	40.01	65.75	68.20	-2.45	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

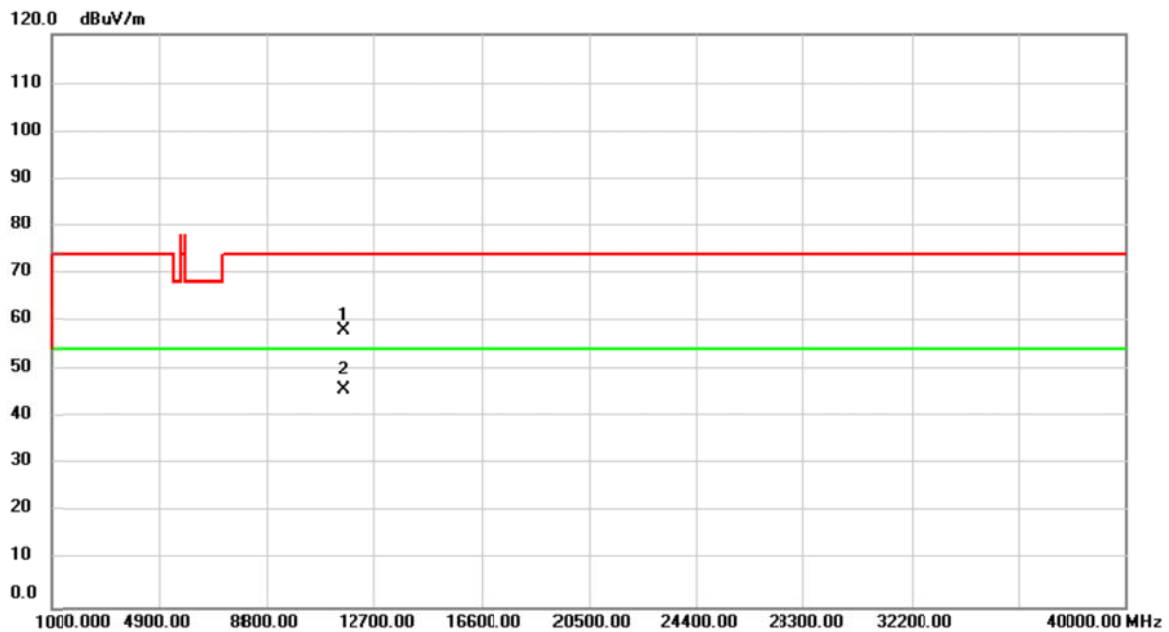

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	53.04	5.10	58.14	74.00	-15.86	peak	
2	*	11590.00	40.66	5.10	45.76	54.00	-8.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

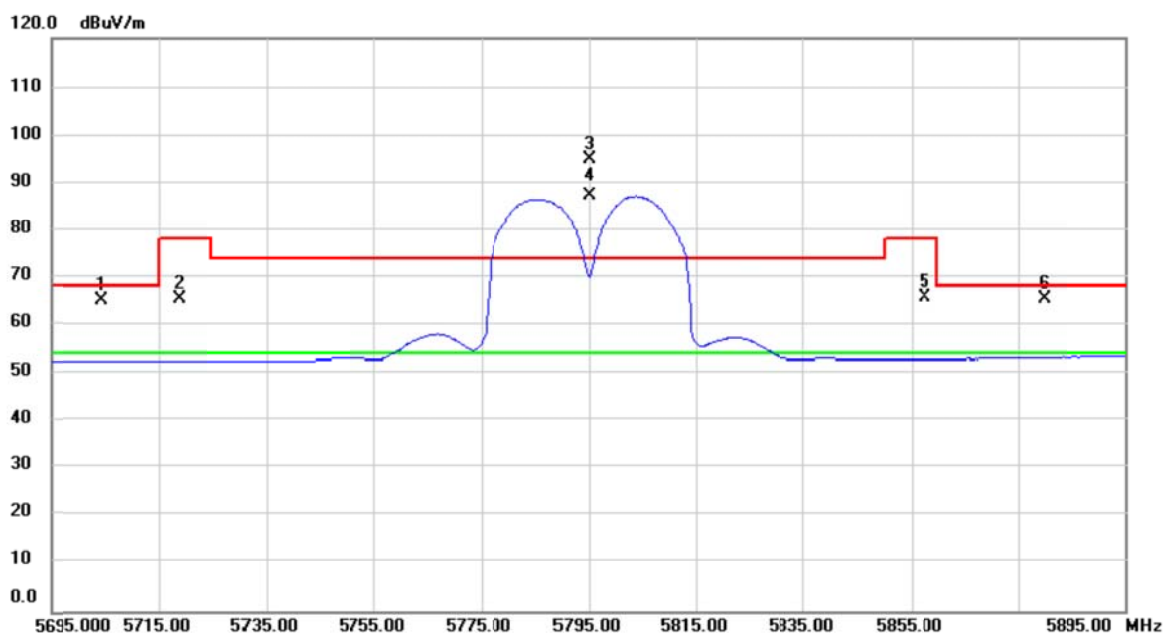

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5704.340	25.65	39.47	65.12	68.20	-3.08	peak	
2		5718.930	26.18	39.51	65.69	78.20	-12.51	peak	
3	X	5795.000	55.37	39.72	95.09	74.00	21.09	peak	No Limit
4	*	5795.000	47.29	39.72	87.01	54.00	33.01	AVG	No Limit
5		5857.440	25.83	39.91	65.74	78.20	-12.46	peak	
6		5880.055	25.64	39.97	65.61	68.20	-2.59	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

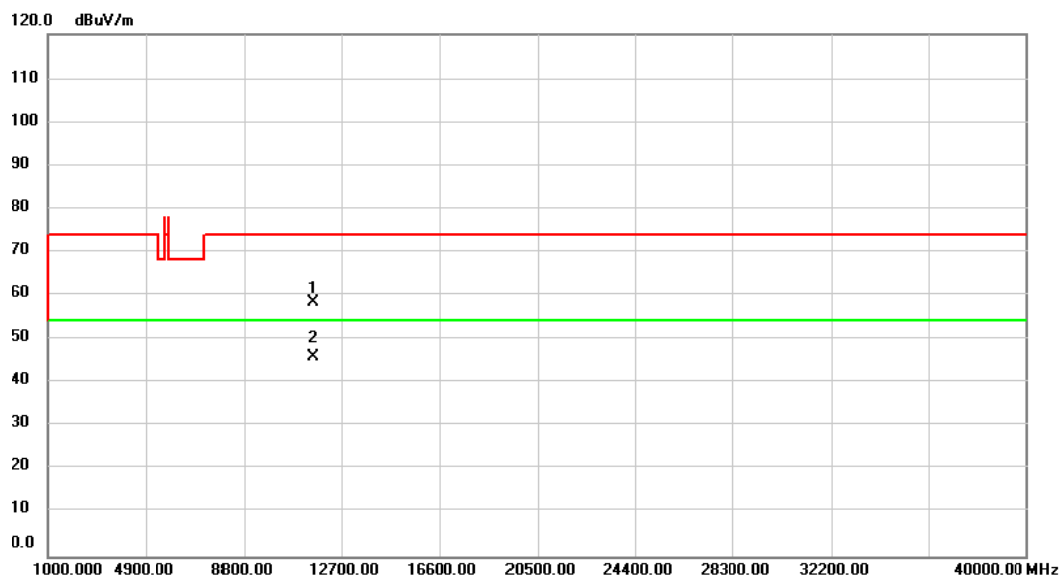

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.00	53.30	5.10	58.40	74.00	-15.60	peak	
2 *	11590.00	40.87	5.10	45.97	54.00	-8.03	AVG	

TX A Mode_DUTY CYCLE

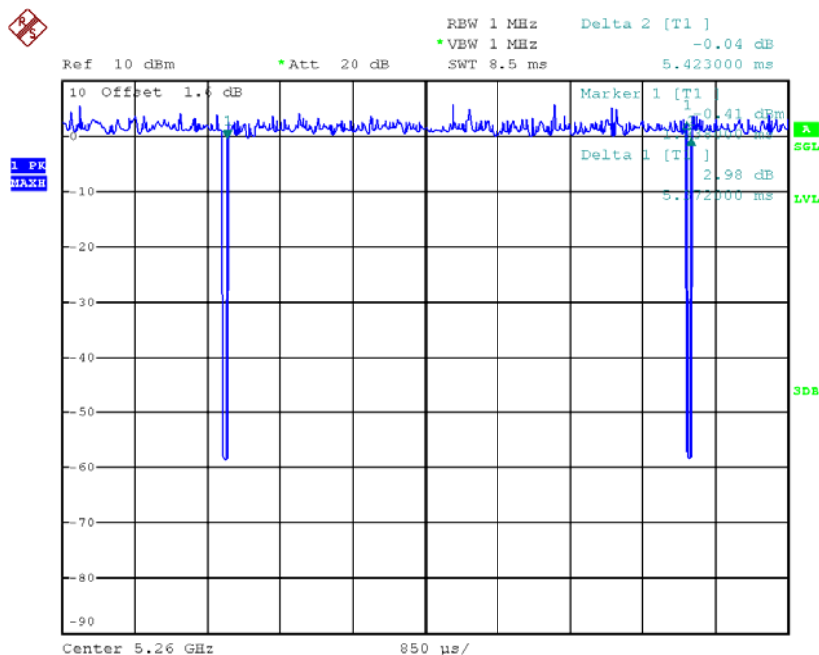

Date: 21.JUN.2016 15:41:06

Duty cycle: 5180 MHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 5.372 msec

T_{Total} : 5.423 msec


Duty cycle: 99.06 %

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.04

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducy factor
Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

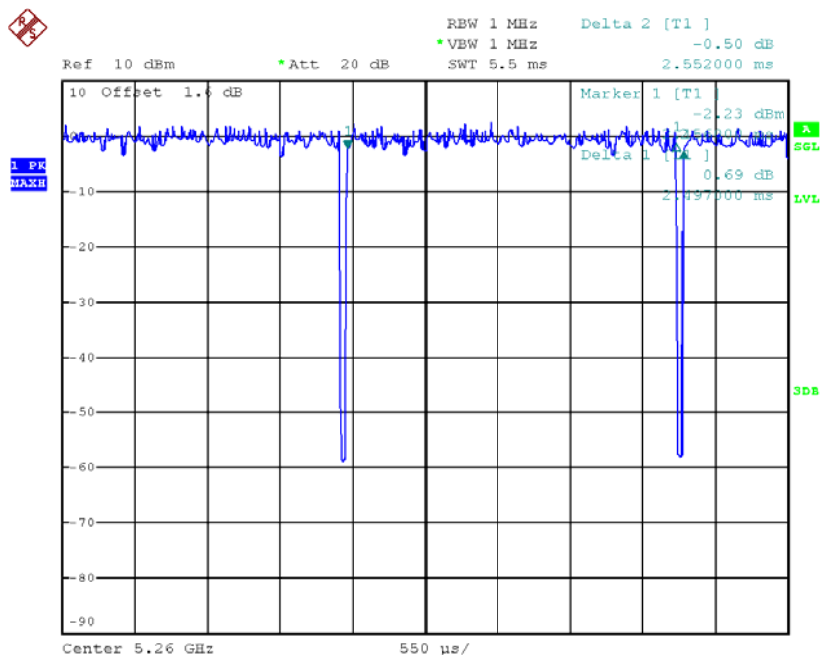

Date: 21.JUN.2016 15:47:14

Duty cycle: 5260 MHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 4.972 msec

T_{Total} : 5.027 msec


Duty cycle: 98.91 %

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.05

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducy factor
Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

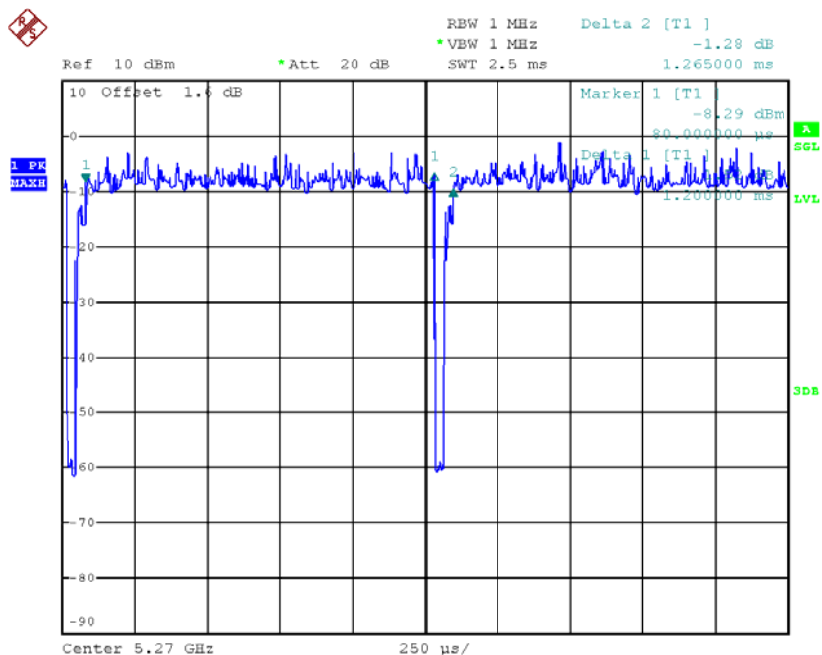

Date: 21.JUN.2016 15:55:22

Duty cycle: 5270 MHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 1.200 msec

T_{Total} : 1.265 msec

Duty cycle: 94.86 %

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.23

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.79	17.20
CH40	5200	25.45	17.20
CH48	5240	25.05	17.30

TX CH36

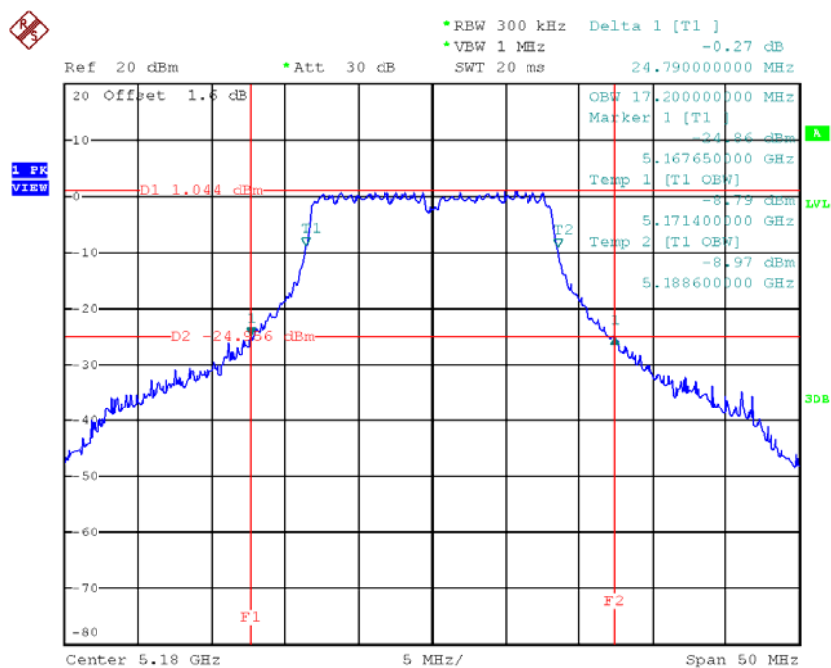


Date: 21.JUN.2016 12:45:03

TX CH40

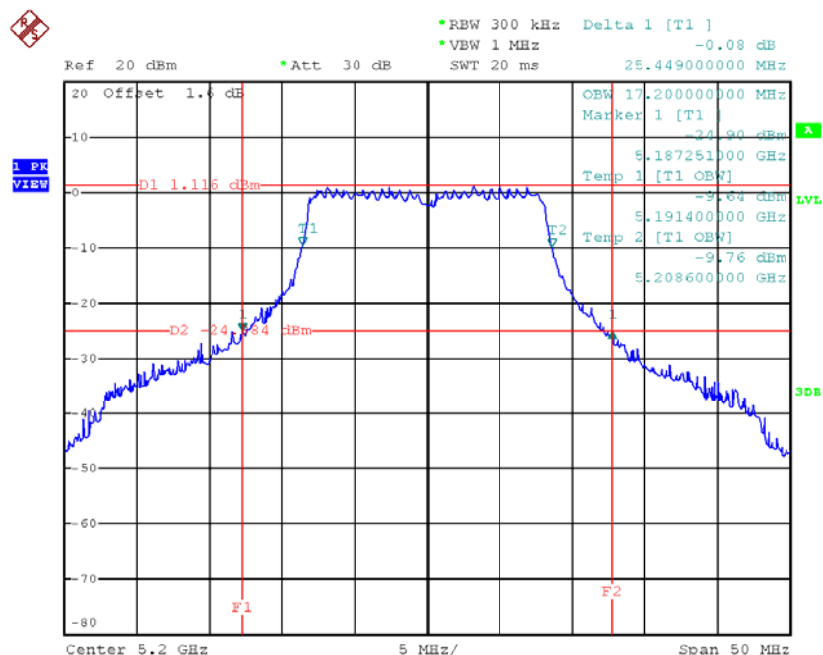

Date: 21.JUN.2016 12:47:31

TX CH48

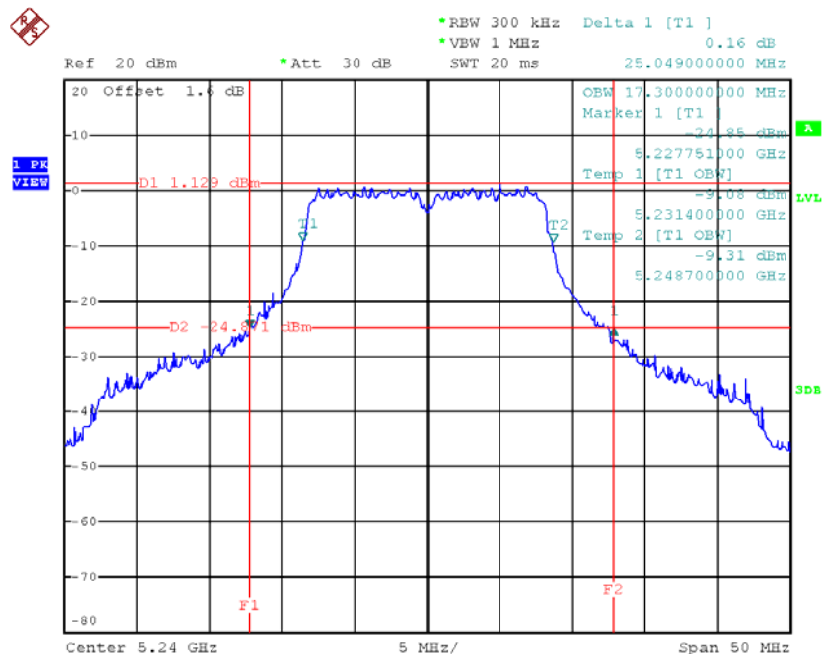


Date: 21.JUN.2016 12:48:45

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.99	17.80
CH40	5200	29.50	17.90
CH48	5240	27.45	17.80

TX CH36

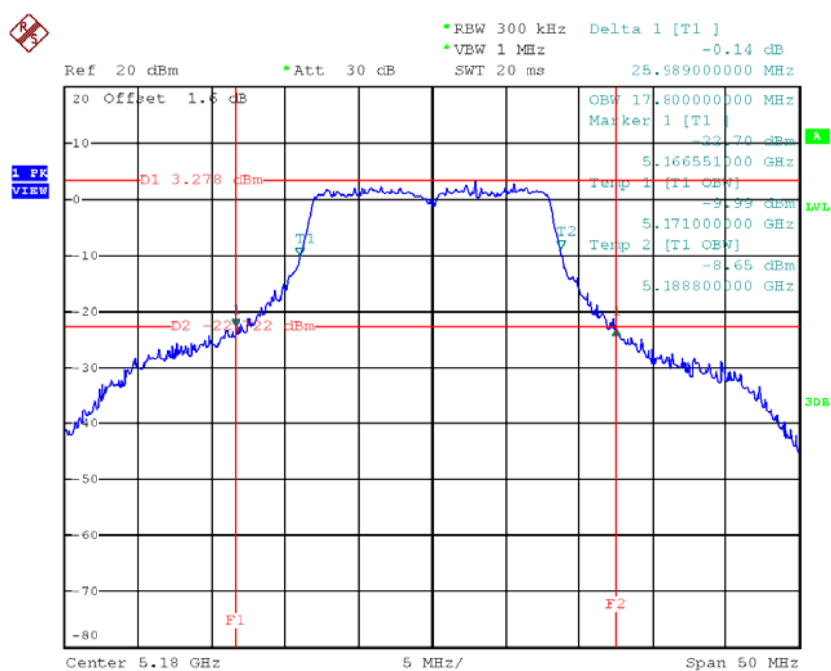


Date: 21.JUN.2016 14:06:28

TX CH40

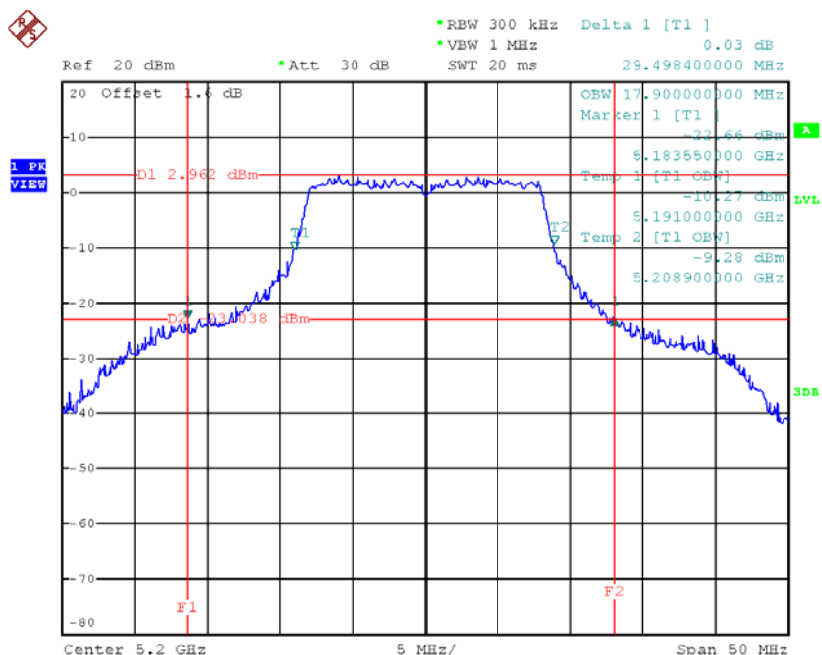

Date: 21.JUN.2016 14:08:06

TX CH48

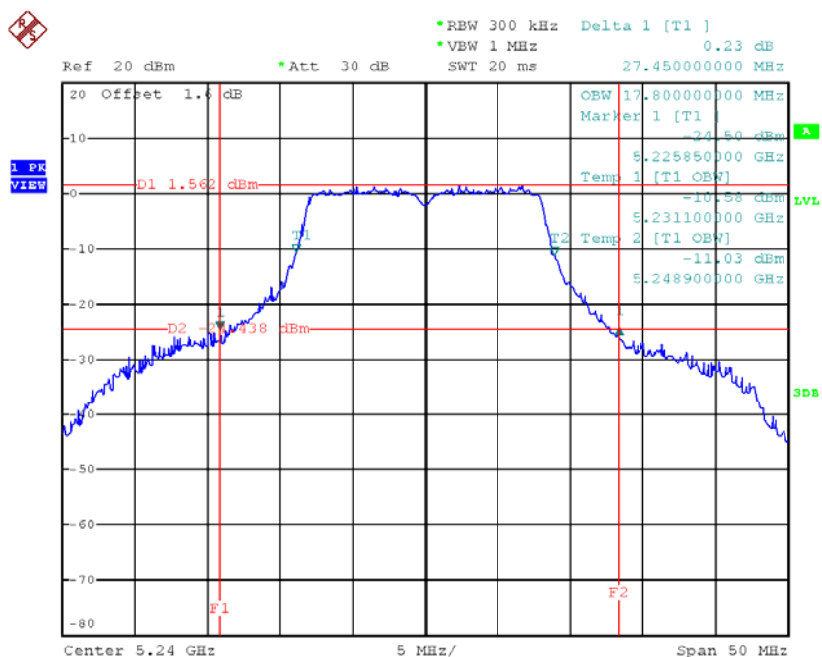


Date: 21.JUN.2016 14:09:18

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.69	18.30
CH40	5200	24.29	18.20
CH48	5240	24.39	18.30

TX CH36

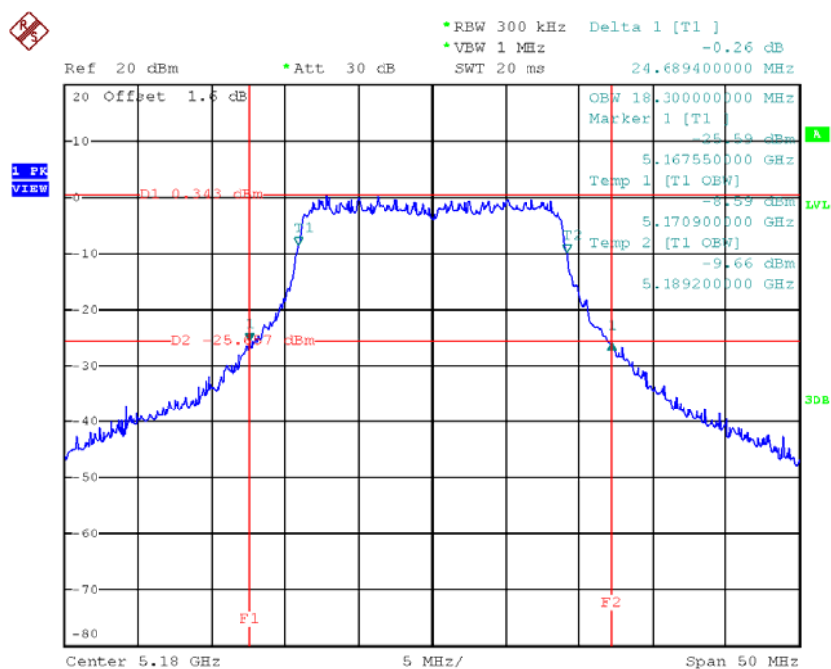


Date: 21.JUN.2016 12:50:33

TX CH40

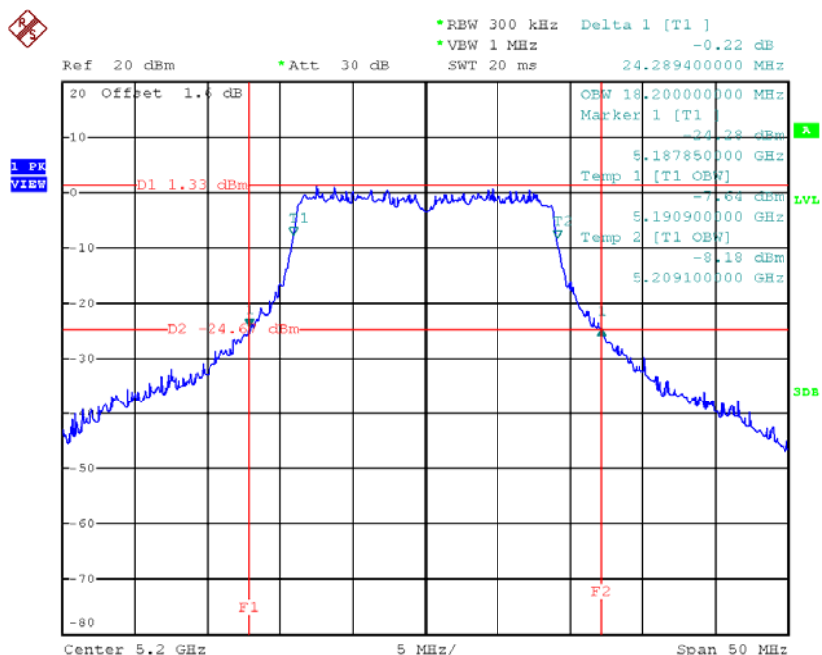

Date: 21.JUN.2016 12:54:22

TX CH48

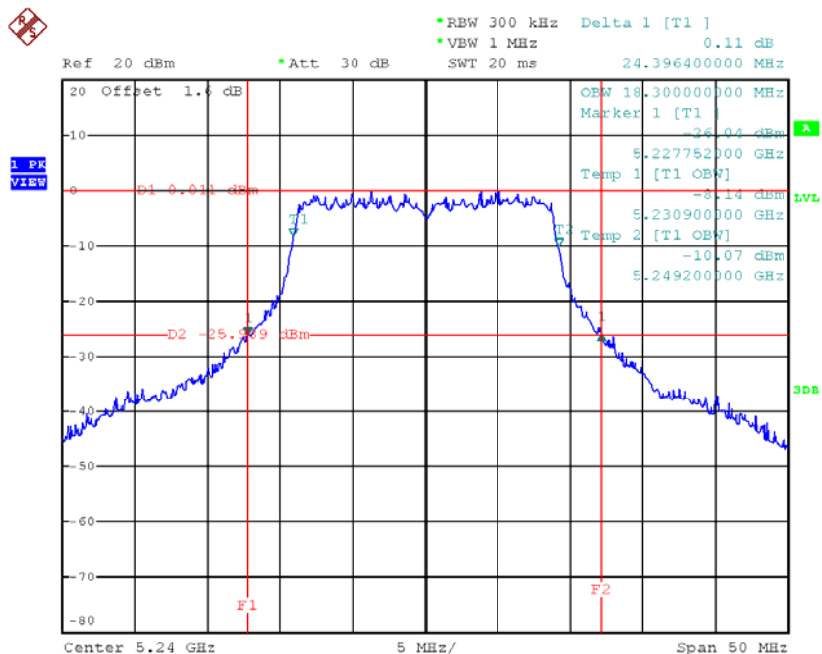


Date: 21.JUN.2016 12:55:45

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.55	18.40
CH40	5200	25.45	18.40
CH48	5240	25.30	18.40

TX CH36

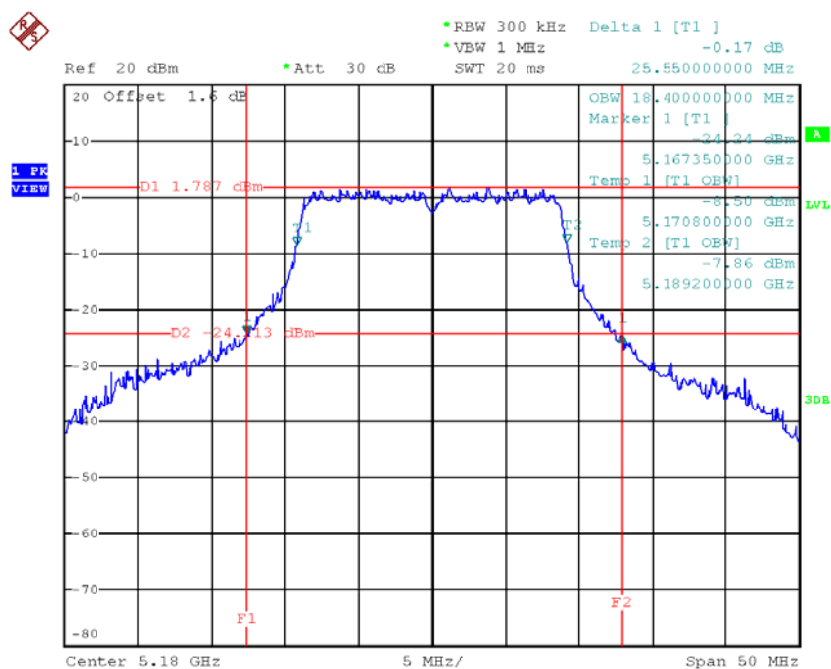


Date: 21.JUN.2016 14:11:14

TX CH40

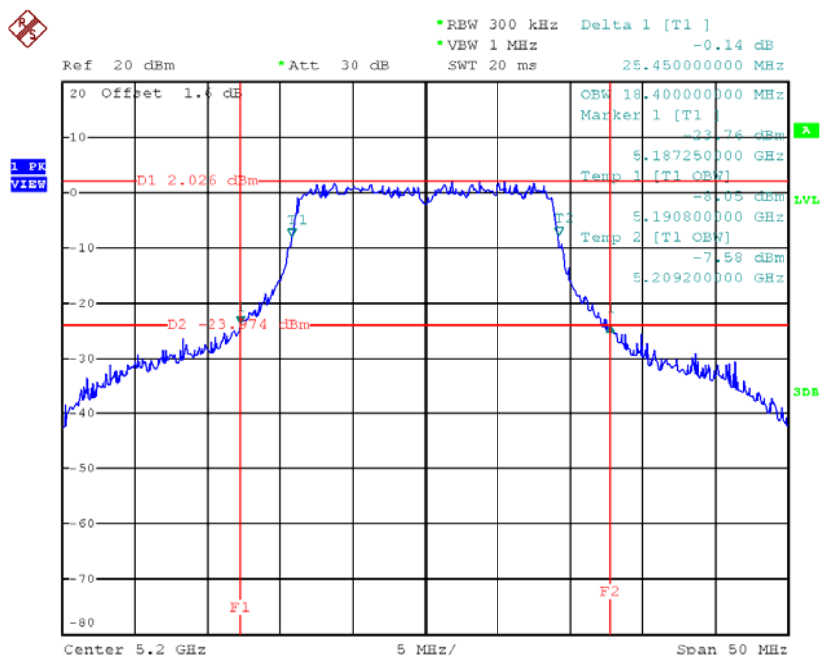

Date: 21.JUN.2016 14:12:53

TX CH48

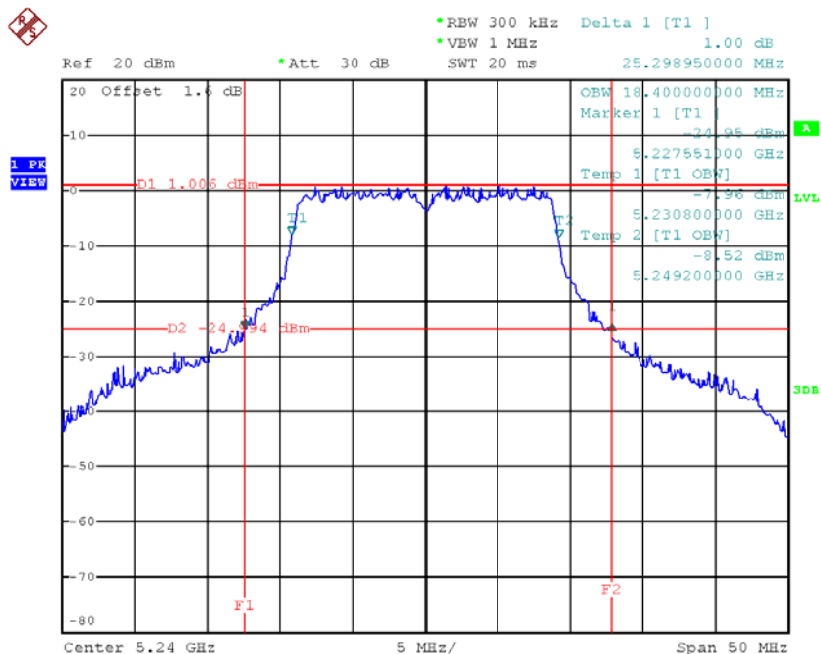


Date: 21.JUN.2016 14:14:12

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.79	36.00
CH46	5230	41.19	36.00

TX CH38

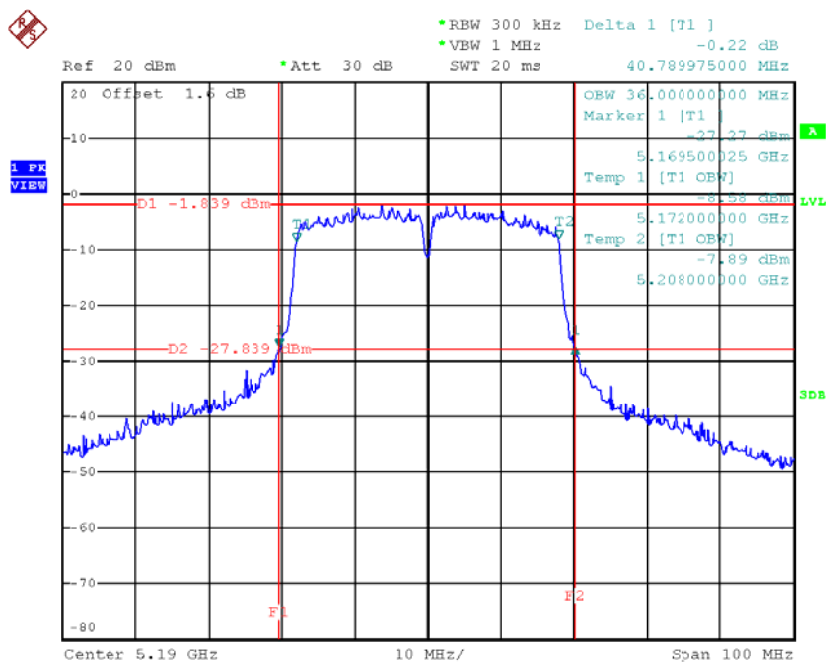

Date: 21.JUN.2016 12:57:56

TX CH46

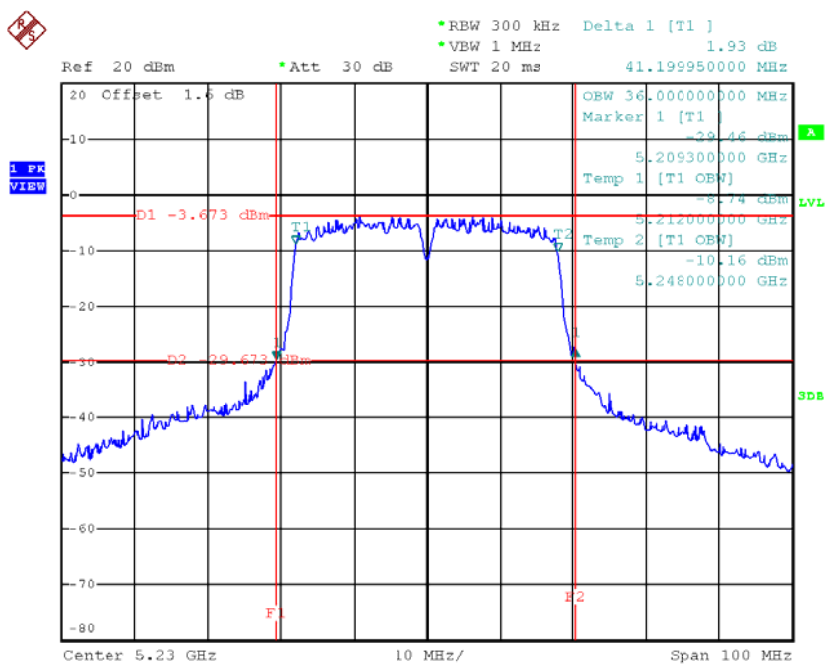


Date: 21.JUN.2016 13:00:22

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.70	36.00
CH46	5230	42.00	36.00

TX CH38

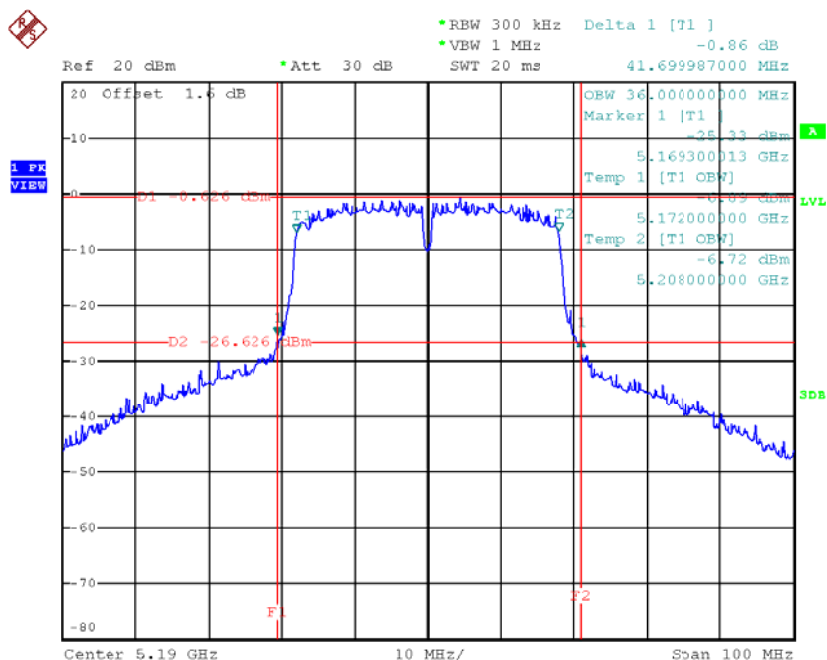

Date: 21.JUN.2016 14:16:17

TX CH46

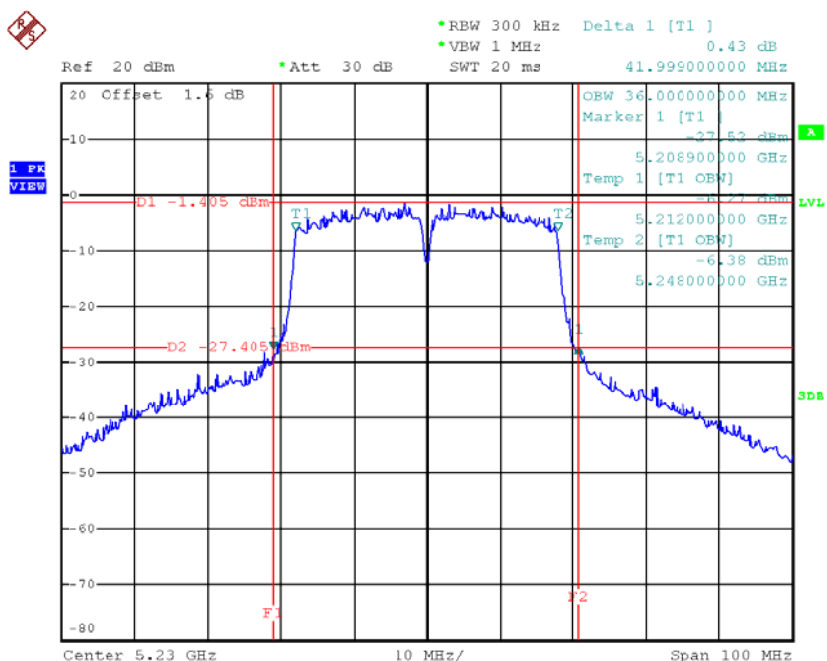


Date: 21.JUN.2016 14:18:15

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.59	17.20
CH60	5300	25.40	17.30
CH64	5320	25.49	17.40

TX CH52

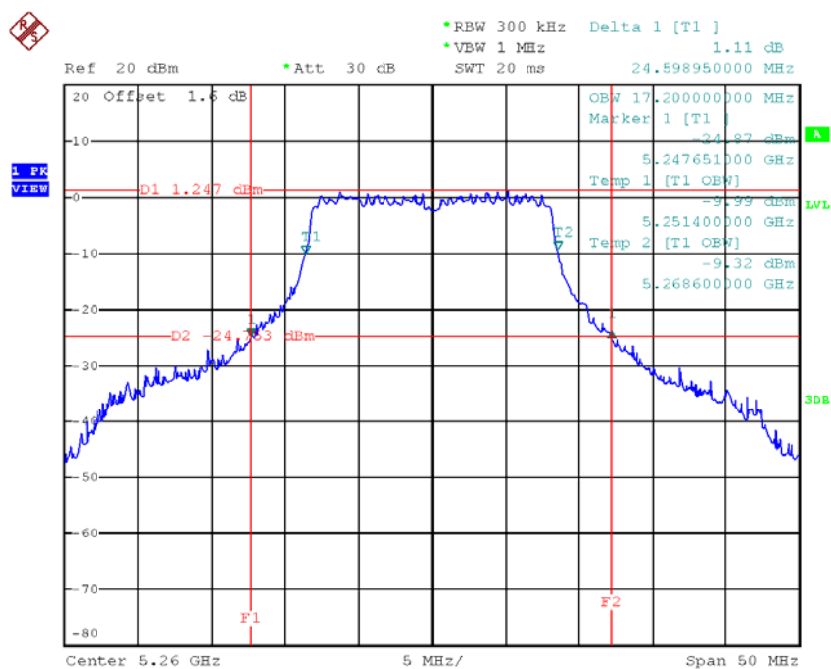


Date: 21.JUN.2016 14:30:18

TX CH60

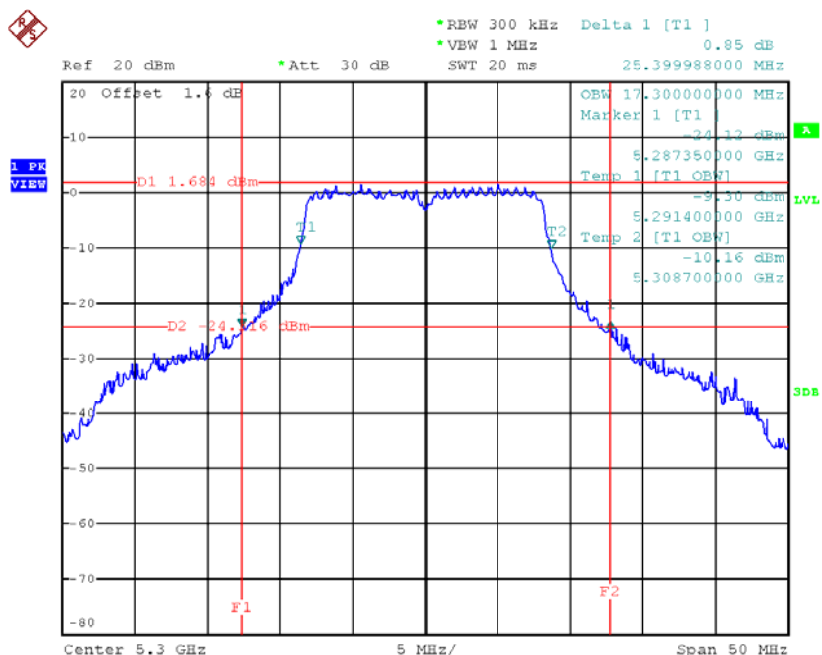

Date: 21.JUN.2016 14:32:05

TX CH64

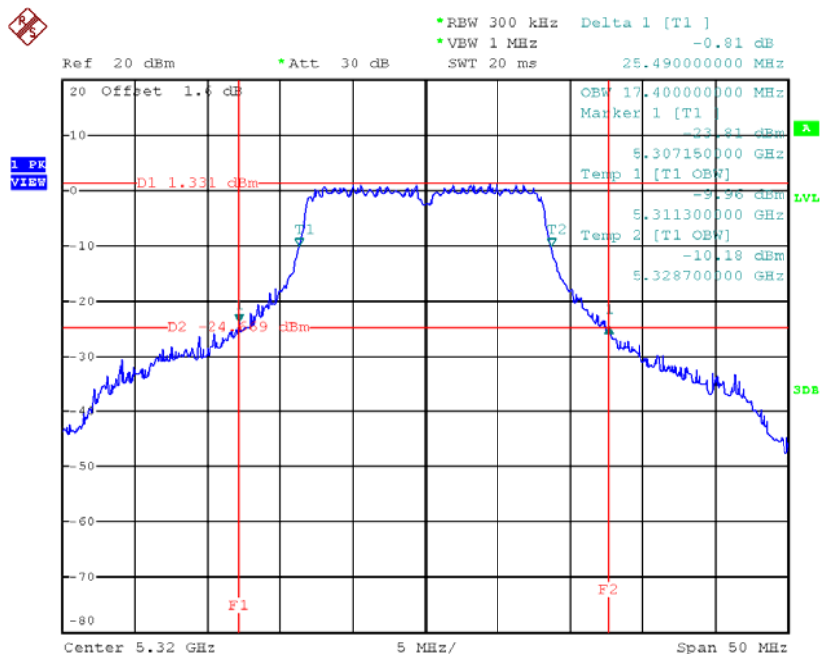


Date: 21.JUN.2016 14:33:14

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	26.60	17.80
CH60	5300	31.15	17.80
CH64	5320	30.40	17.90

TX CH52

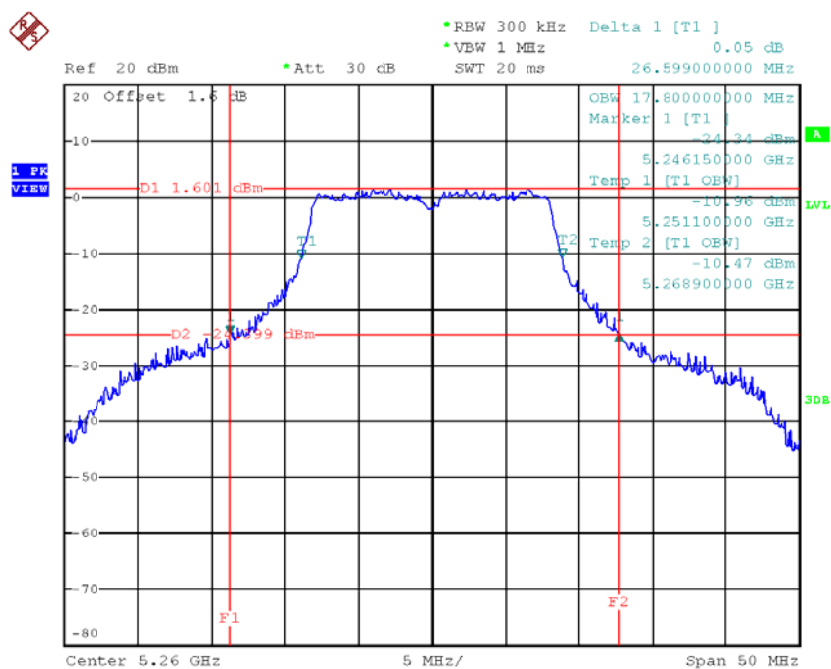


Date: 21.JUN.2016 15:40:26

TX CH60

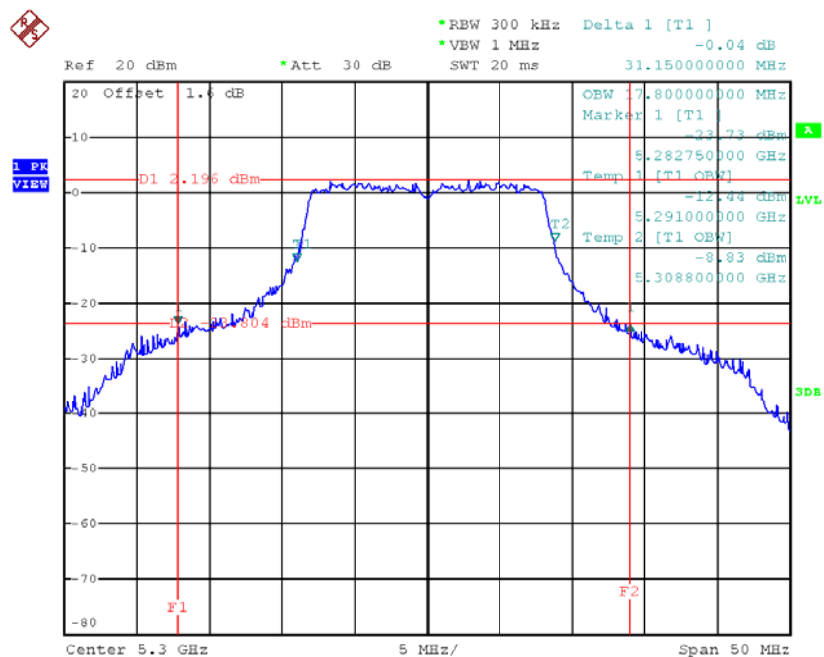

Date: 21.JUN.2016 15:44:00

TX CH64

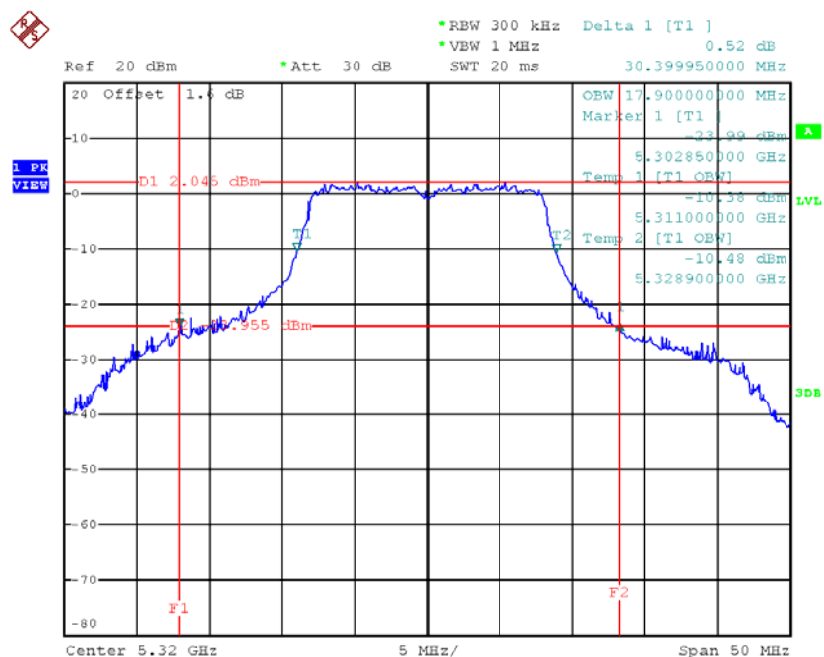


Date: 21.JUN.2016 15:45:15

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.75	18.30
CH60	5300	25.19	18.30
CH64	5320	25.25	18.30

TX CH52

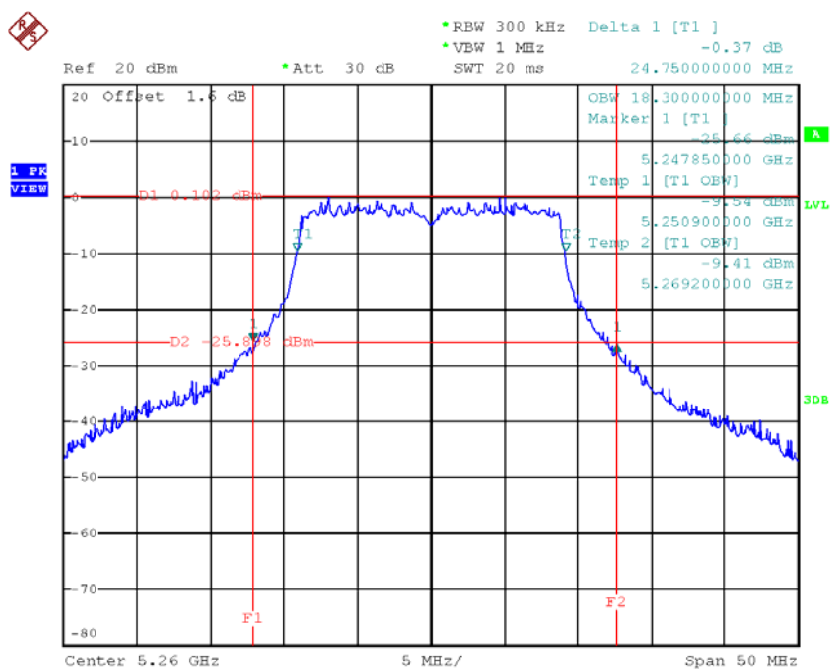


Date: 21.JUN.2016 14:34:52

TX CH60

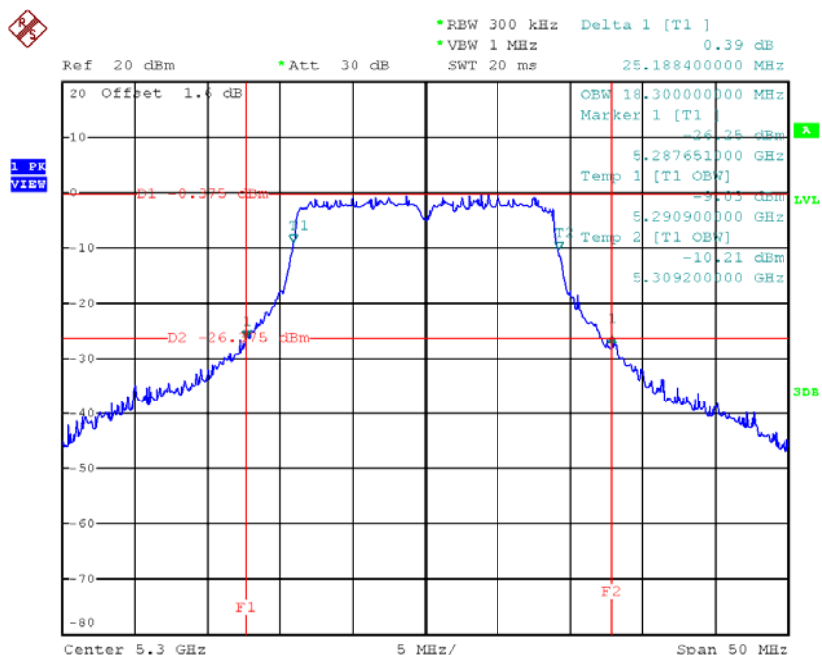

Date: 21.JUN.2016 14:36:15

TX CH64

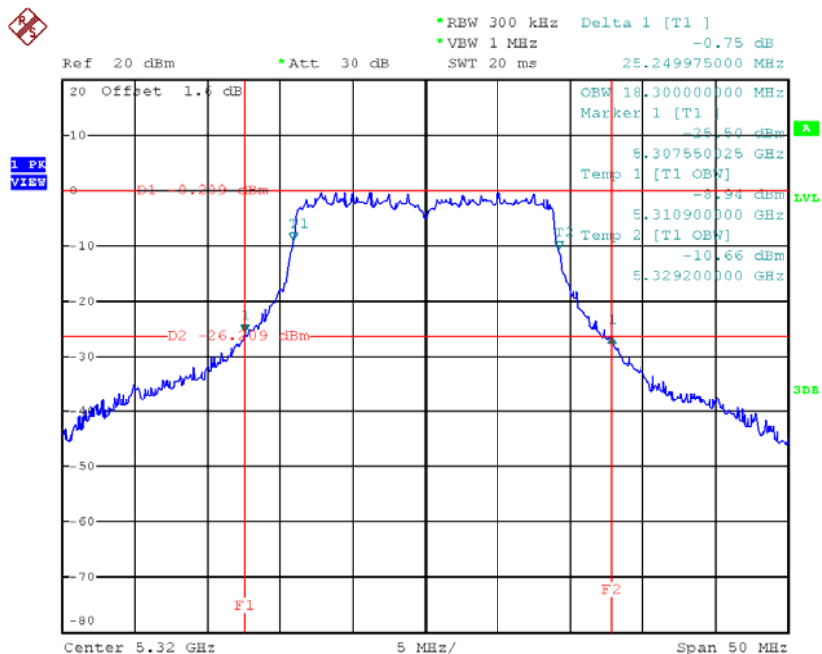


Date: 21.JUN.2016 14:37:36

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	25.80	18.40
CH60	5300	25.95	18.40
CH64	5320	25.49	18.40

TX CH52

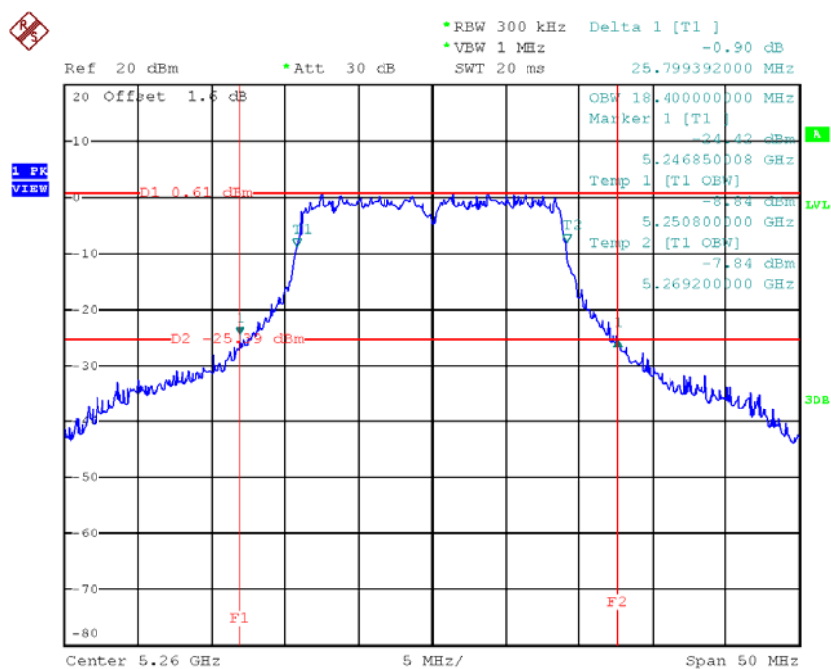


Date: 21.JUN.2016 15:47:01

TX CH60

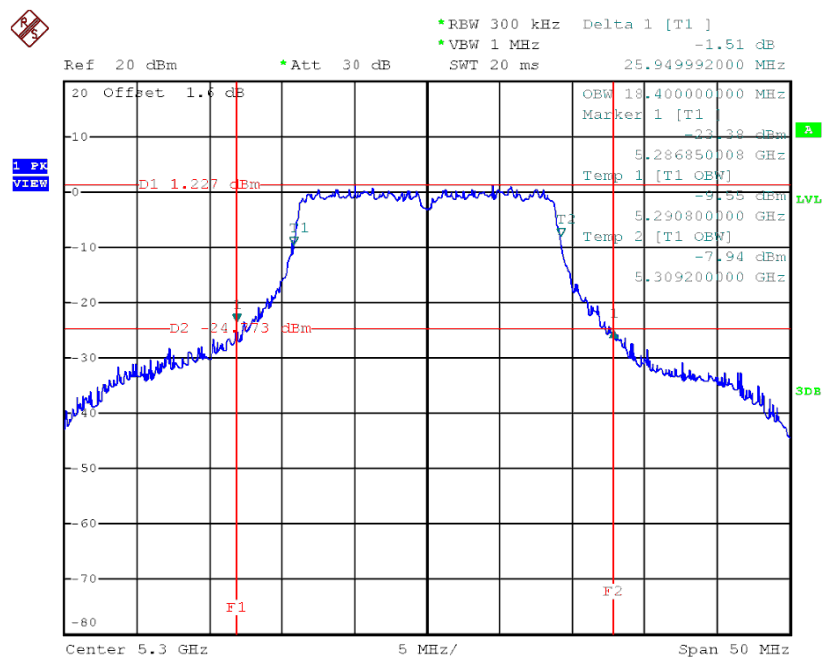

Date: 21.JUN.2016 15:51:07

TX CH64

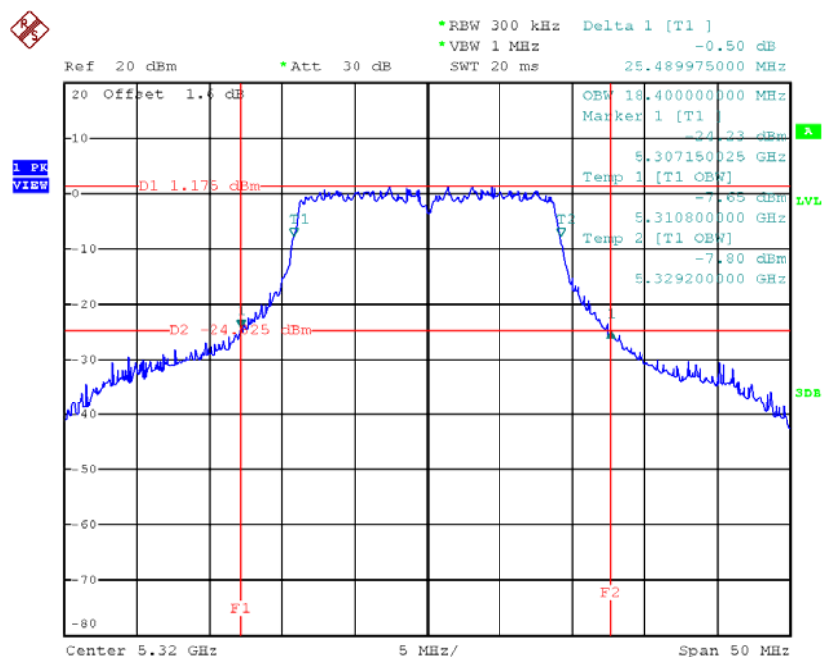


Date: 21.JUN.2016 15:52:42

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	41.20	36.00
CH62	5310	41.59	36.00

TX CH54

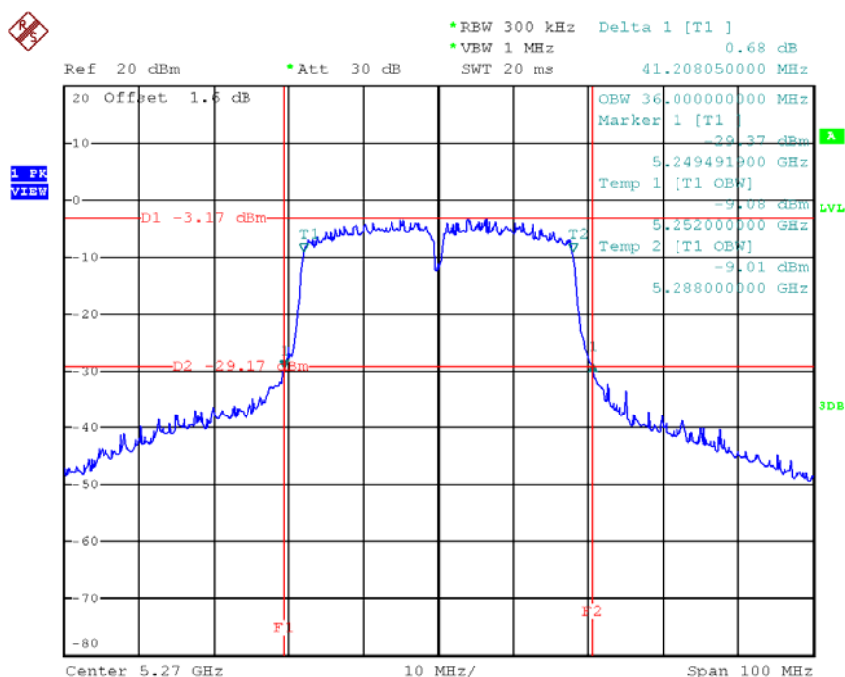

Date: 21.JUN.2016 14:39:16

TX CH62

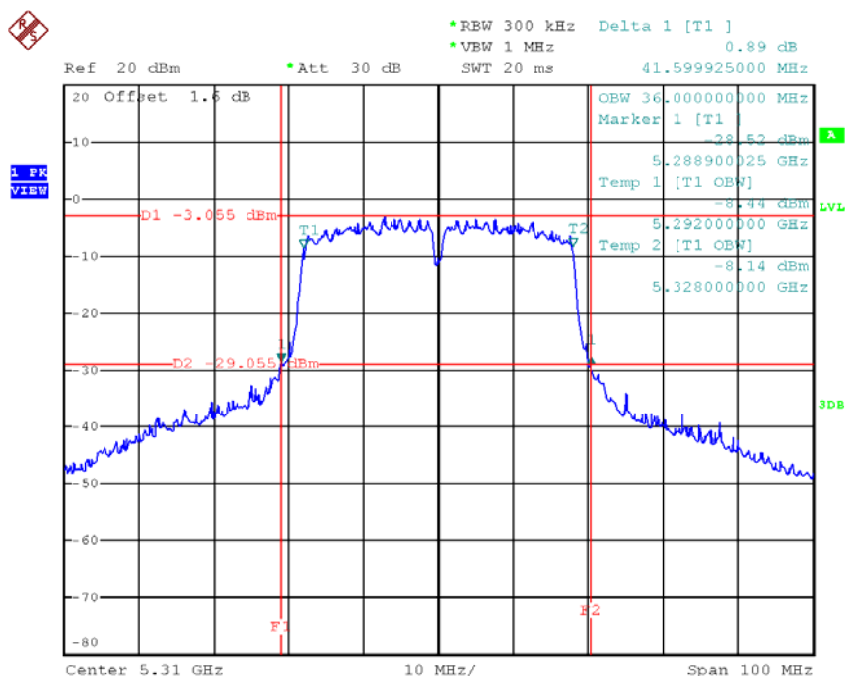


Date: 21.JUN.2016 14:41:30

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.19	36.20
CH62	5310	41.70	36.00

TX CH54

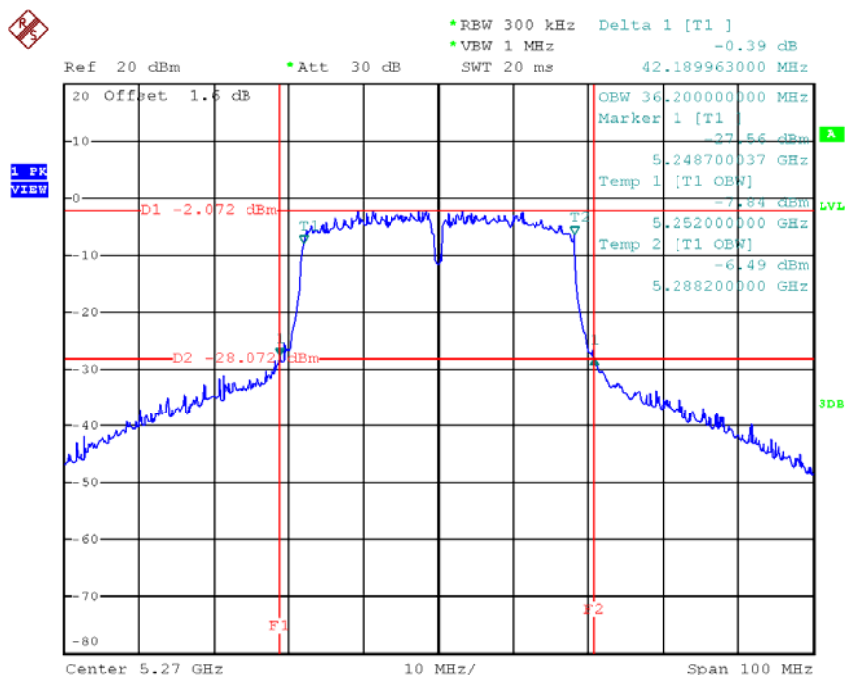

Date: 21.JUN.2016 15:54:45

TX CH62

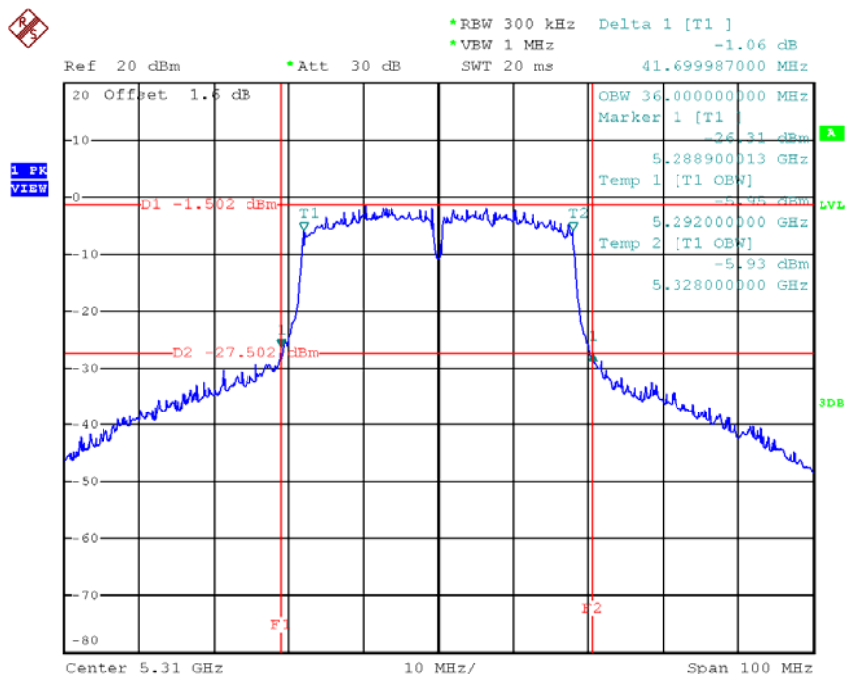


Date: 21.JUN.2016 15:56:47

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.49	16.60	>=500
CH157	5785	16.49	16.60	>=500
CH165	5825	16.35	16.60	>=500

TX CH 149

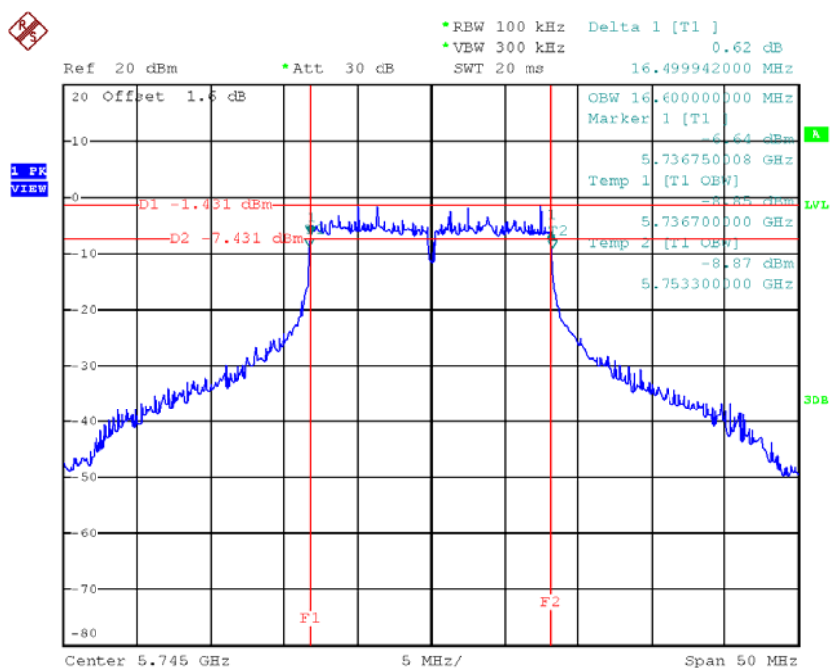


Date: 21.JUN.2016 16:04:13

TX CH 157

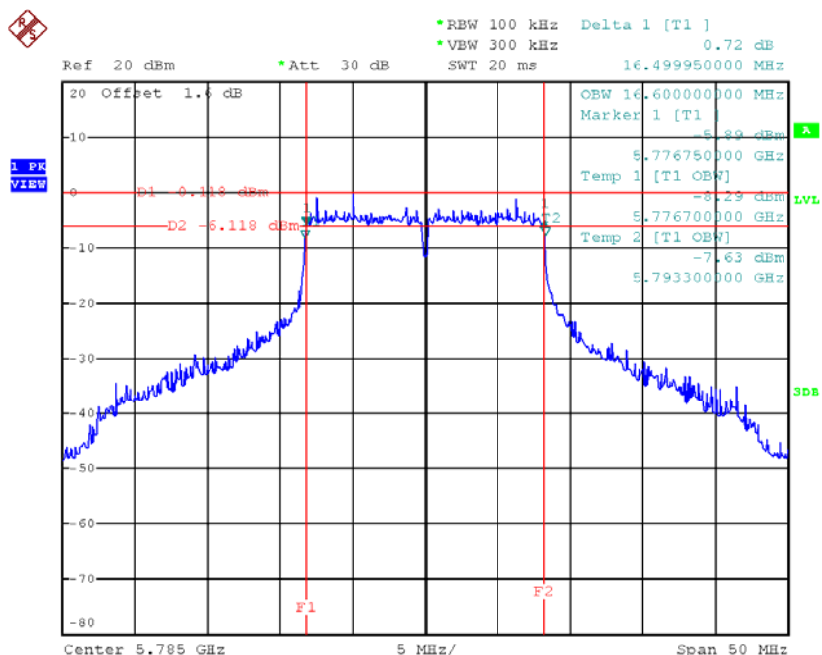

Date: 21.JUN.2016 16:05:58

TX CH 165

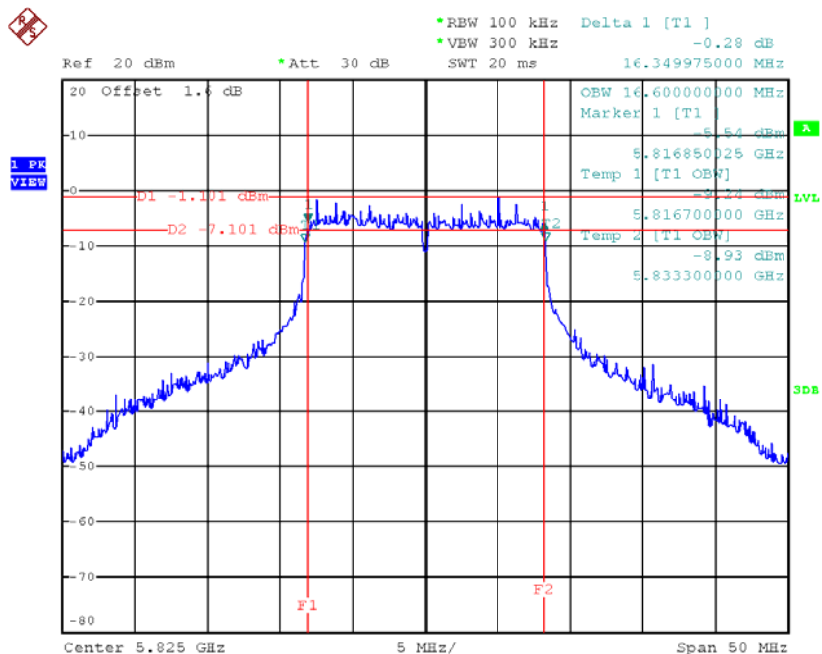


Date: 21.JUN.2016 16:07:26

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.80	>=500
CH157	5785	16.50	16.80	>=500
CH165	5825	16.50	17.10	>=500

TX CH 149

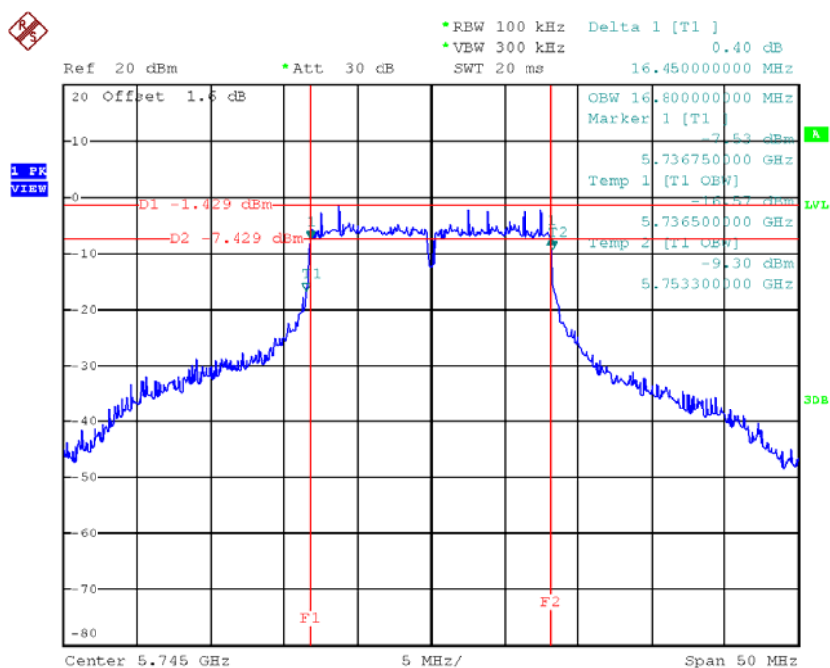


Date: 21.JUN.2016 16:28:12

TX CH 157

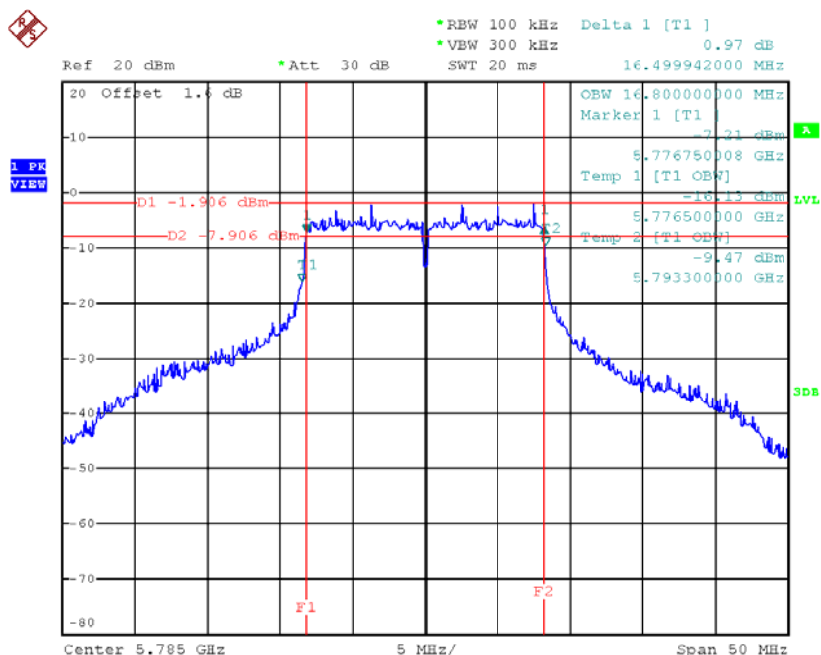

Date: 21.JUN.2016 16:30:12

TX CH 165

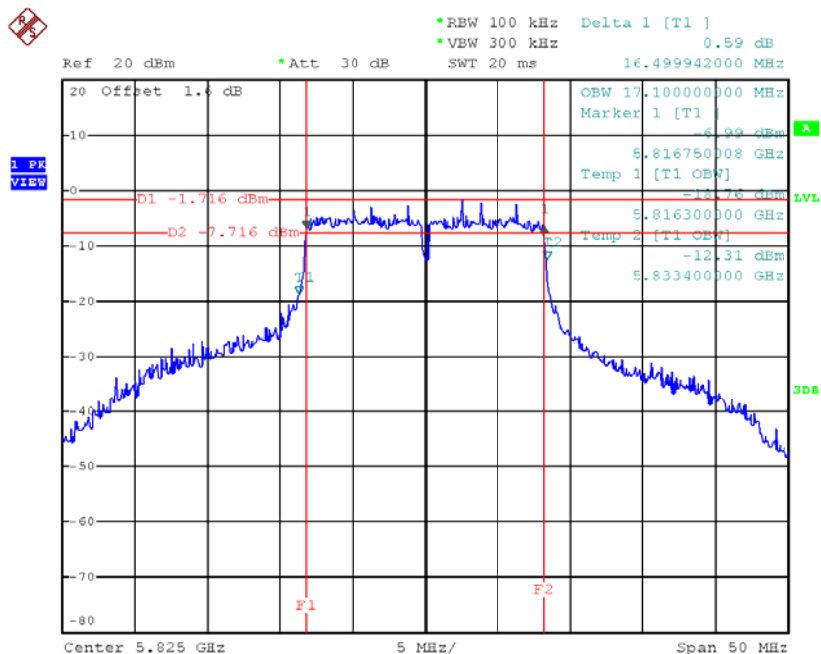


Date: 21.JUN.2016 16:31:59

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.69	17.80	>=500
CH157	5785	17.69	17.80	>=500
CH165	5825	17.74	17.80	>=500

TX CH 149

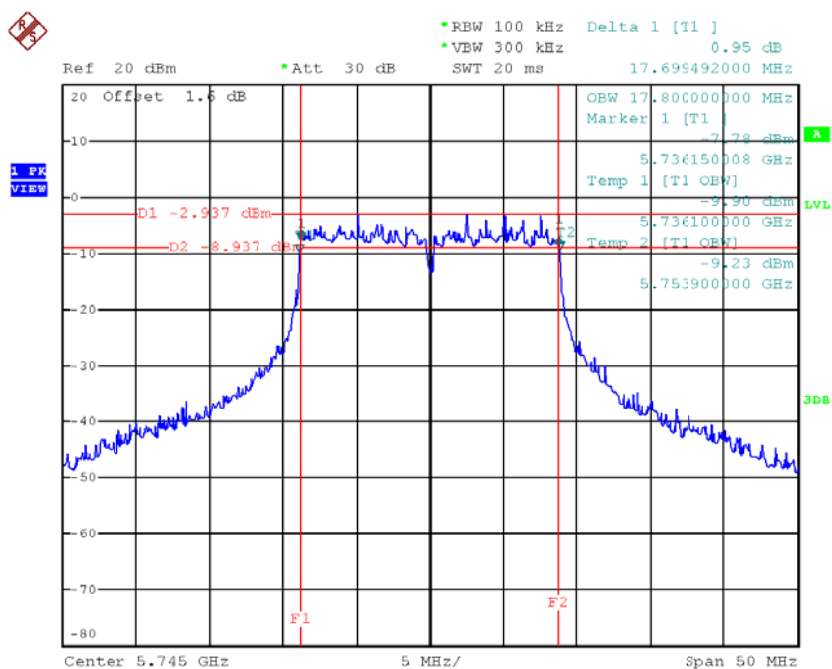


Date: 21.JUN.2016 16:09:21

TX CH 157

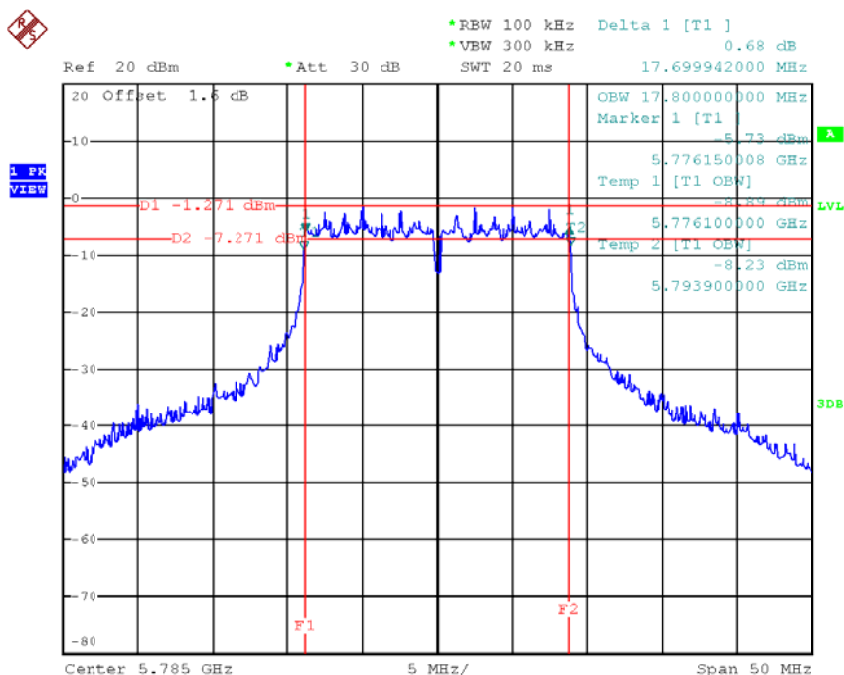

Date: 21.JUN.2016 16:11:21

TX CH 165

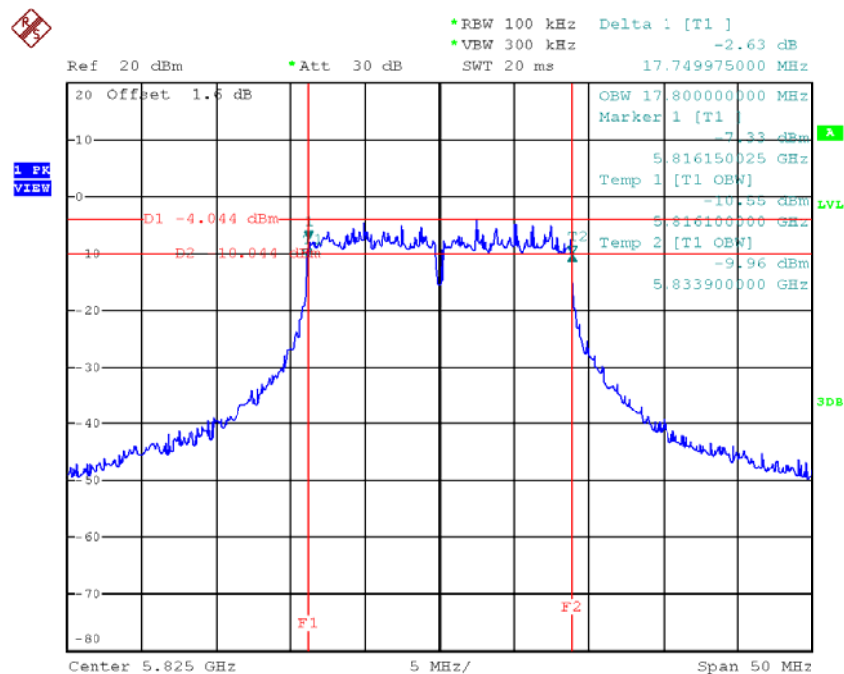


Date: 21.JUN.2016 16:15:51

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.90	17.80	>=500
CH157	5785	17.80	17.90	>=500
CH165	5825	17.75	17.80	>=500

TX CH 149

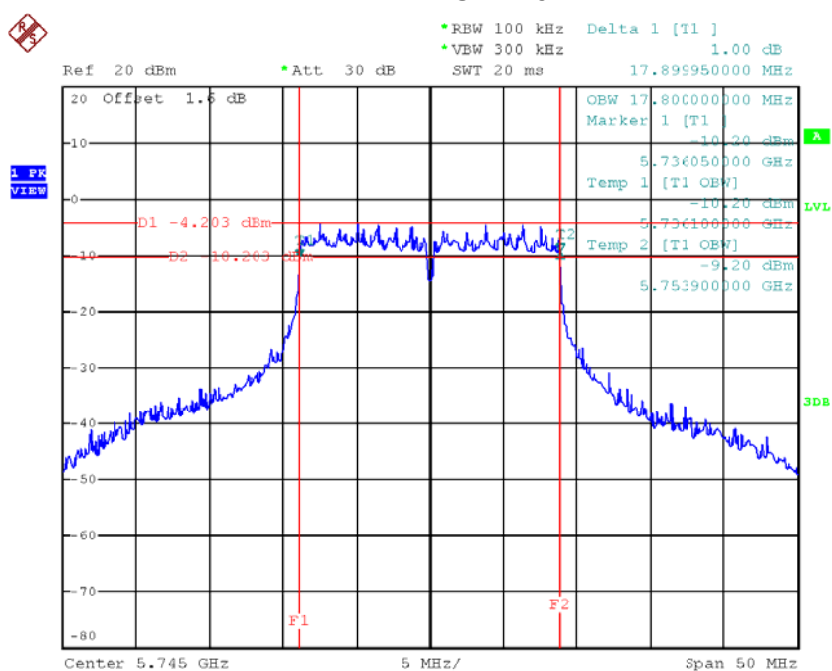


Date: 21.JUN.2016 16:33:52

TX CH 157

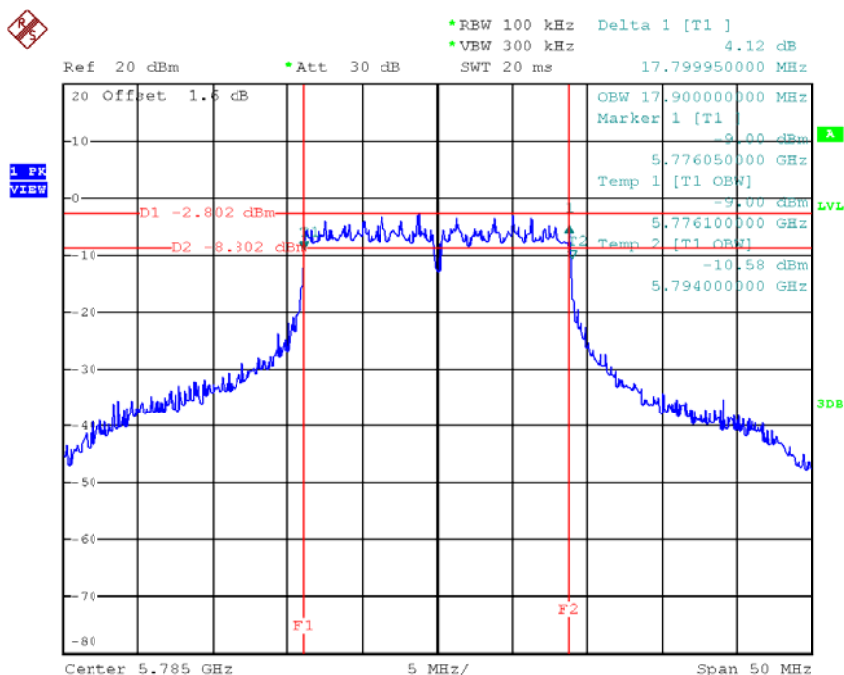

Date: 21.JUN.2016 16:35:33

TX CH 165

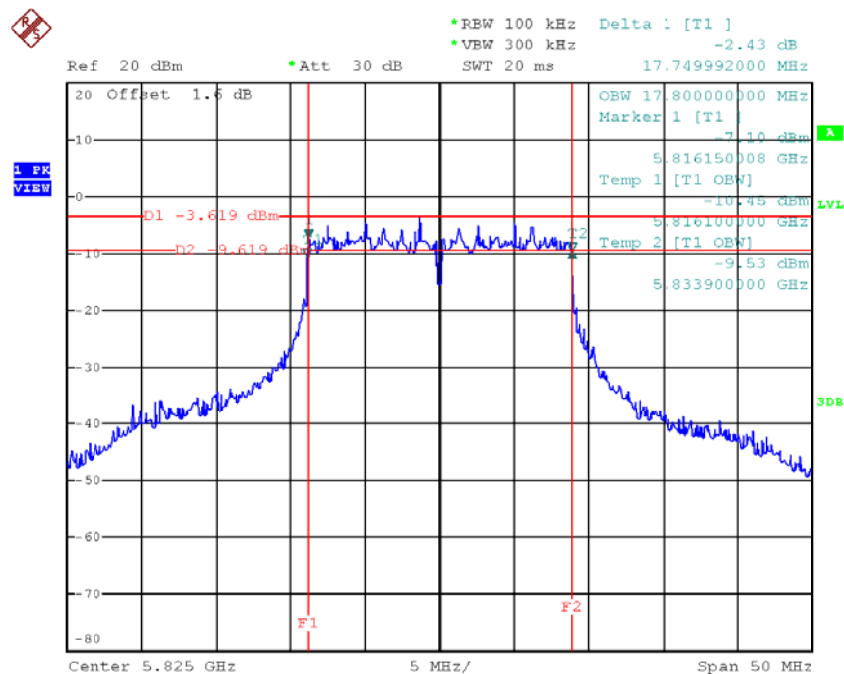


Date: 21.JUN.2016 16:49:02

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	35.62	36.00	>=500
CH159	5795	35.70	36.00	>=500

TX CH 151

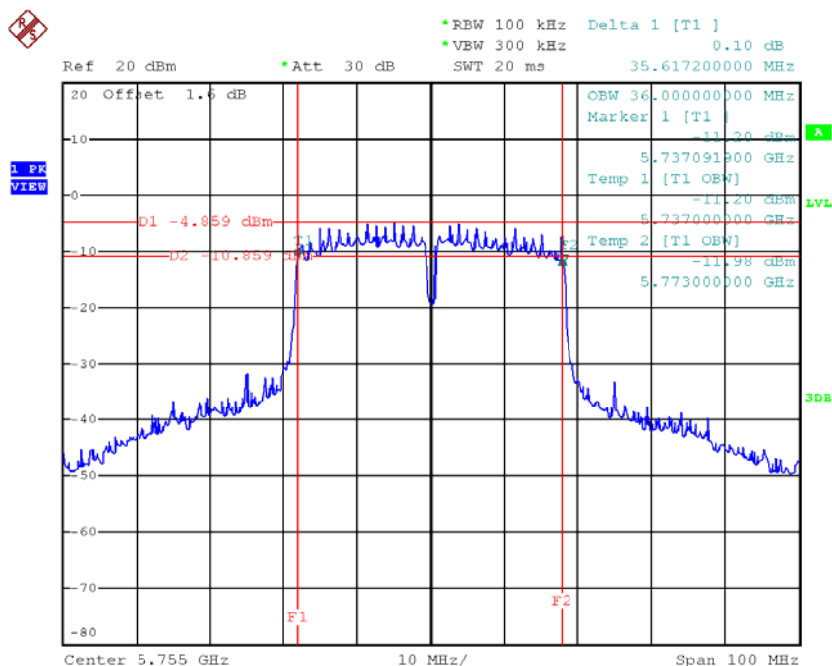

Date: 21.JUN.2016 16:19:16

TX CH 159

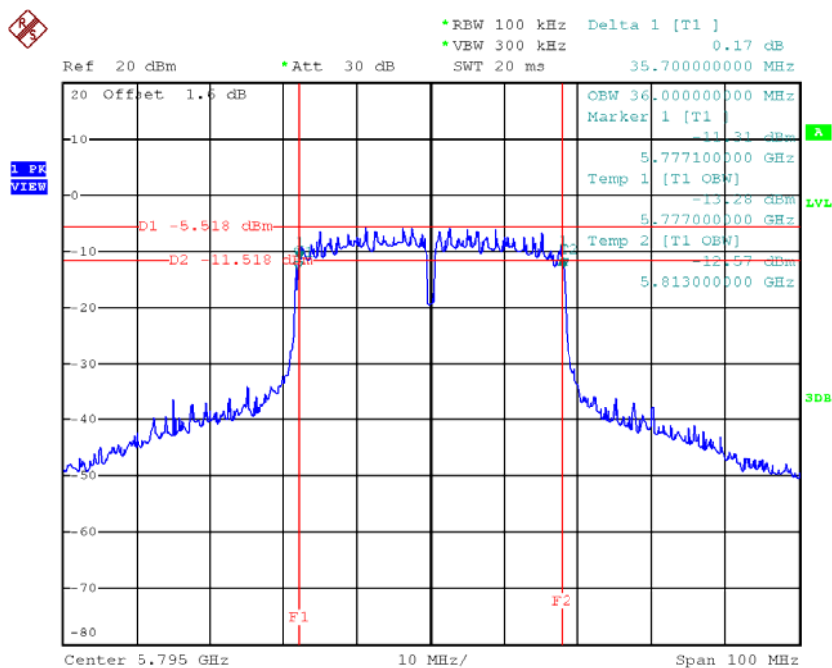


Date: 21.JUN.2016 16:23:24

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	35.80	36.20	>=500
CH159	5795	34.40	36.00	>=500

TX CH 151

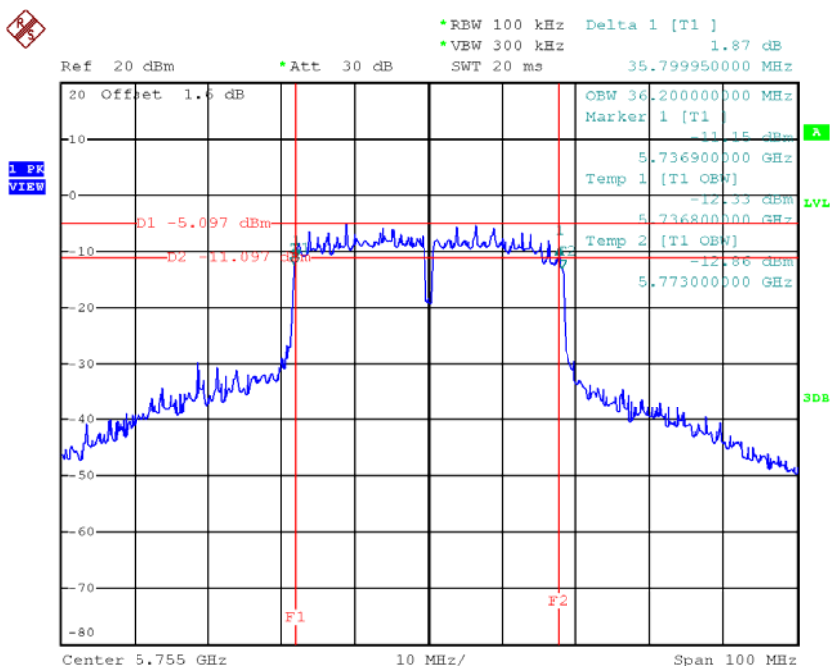

Date: 21.JUN.2016 16:51:20

TX CH 159

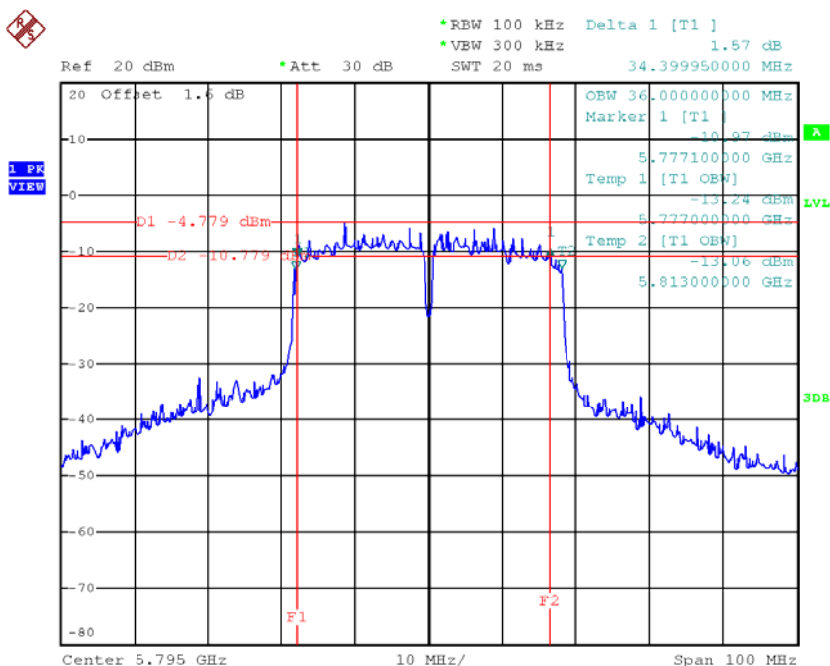

Date: 21.JUN.2016 16:54:22

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.50	0.04	10.54	21.78	0.15
CH40	5200	10.66	0.04	10.70	21.78	0.15
CH48	5240	10.61	0.04	10.65	21.78	0.15

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.38	0.04	10.42	21.78	0.15
CH40	5200	10.38	0.04	10.42	21.78	0.15
CH48	5240	10.18	0.04	10.22	21.78	0.15

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.49	21.78	0.15
CH40	5200	13.57	21.78	0.15
CH48	5240	13.45	21.78	0.15

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.81	0.05	8.86	21.78	0.15
CH40	5200	8.66	0.05	8.71	21.78	0.15
CH48	5240	8.62	0.05	8.67	21.78	0.15

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.45	0.05	8.50	21.78	0.15
CH40	5200	8.32	0.05	8.37	21.78	0.15
CH48	5240	8.21	0.05	8.26	21.78	0.15

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.69	21.78	0.15
CH40	5200	11.55	21.78	0.15
CH48	5240	11.48	21.78	0.15

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	7.24	0.23	7.47	21.78	0.15
CH46	5230	8.65	0.23	8.88	21.78	0.15

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.28	0.23	8.51	21.78	0.15
CH46	5230	8.55	0.23	8.78	21.78	0.15

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.03	21.78	0.15
CH46	5230	11.84	21.78	0.15

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.74	0.04	10.78	21.78	0.15
CH60	5300	10.51	0.04	10.55	21.78	0.15
CH64	5320	10.66	0.04	10.70	21.78	0.15

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.15	0.04	11.14	21.78	0.15
CH60	5300	10.22	0.04	10.26	21.78	0.15
CH64	5320	9.69	0.04	9.73	21.78	0.15

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.97	21.78	0.15
CH60	5300	13.42	21.78	0.15
CH64	5320	13.25	21.78	0.15

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.68	0.05	8.73	21.78	0.15
CH60	5300	8.61	0.05	8.66	21.78	0.15
CH64	5320	8.66	0.05	8.71	21.78	0.15

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.06	0.05	8.11	21.78	0.15
CH60	5300	7.89	0.05	7.94	21.78	0.15
CH64	5320	7.74	0.05	7.79	21.78	0.15

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.44	21.78	0.15
CH60	5300	11.32	21.78	0.15
CH64	5320	11.28	21.78	0.15

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.88	0.23	9.11	21.78	0.15
CH62	5310	8.65	0.23	8.88	21.78	0.15

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.48	0.23	8.71	21.78	0.15
CH62	5310	8.25	0.23	8.48	21.78	0.15

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.92	21.78	0.15
CH62	5310	11.69	21.78	0.15

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.51	0.04	10.55	27.78	0.60
CH157	5785	10.58	0.04	10.62	27.78	0.60
CH165	5825	10.28	0.04	10.32	27.78	0.60

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.89	0.04	10.93	27.78	0.60
CH157	5785	10.85	0.04	10.89	27.78	0.60
CH165	5825	10.82	0.04	10.86	27.78	0.60

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.76	27.78	0.60
CH157	5785	13.77	27.78	0.60
CH165	5825	13.61	27.78	0.60

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.26	0.05	8.31	27.78	0.60
CH157	5785	8.51	0.05	8.56	27.78	0.60
CH165	5825	7.73	0.05	7.78	27.78	0.60

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.37	0.05	8.42	27.78	0.60
CH157	5785	8.61	0.05	8.66	27.78	0.60
CH165	5825	8.75	0.05	8.80	27.78	0.60

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.37	27.78	0.60
CH157	5785	11.62	27.78	0.60
CH165	5825	11.33	27.78	0.60

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	5.17	0.23	5.40	27.78	0.60
CH159	5795	8.31	0.23	8.54	27.78	0.60

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.23	0.23	6.46	27.78	0.60
CH159	5795	8.89	0.23	9.12	27.78	0.60


Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.97	27.78	0.60
CH159	5795	11.85	27.78	0.60

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode_ANT 1

TX mode CH36

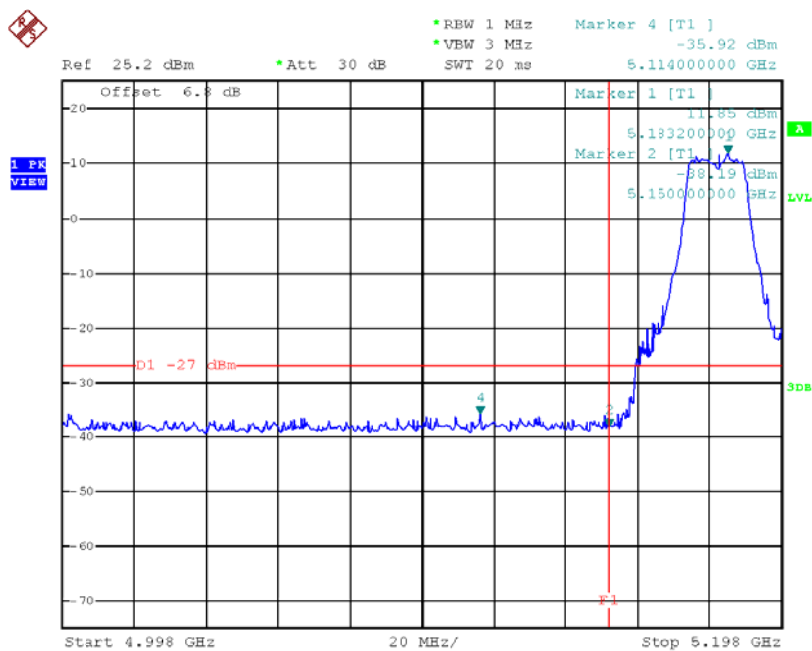

Date: 21.JUN.2016 12:45:21


TX mode CH48

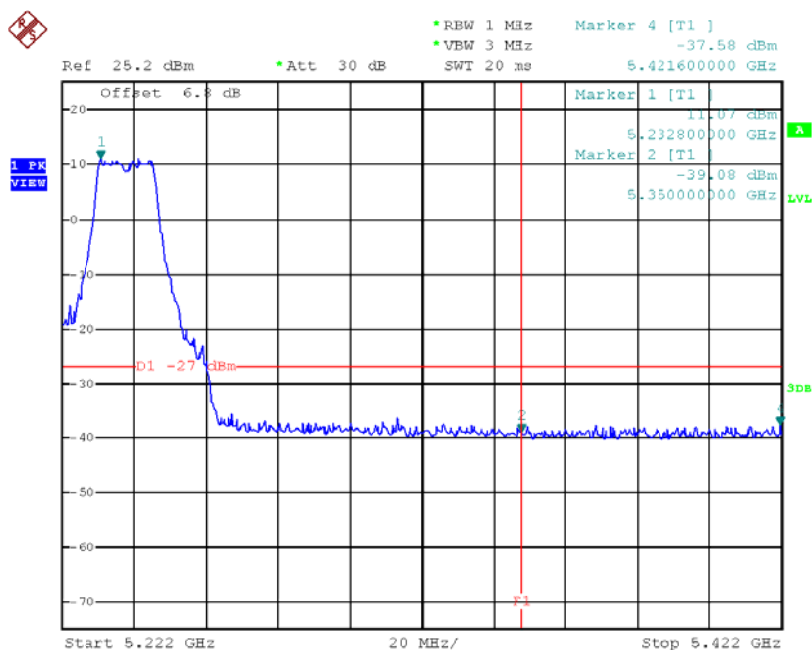

Date: 21.JUN.2016 12:49:17


Test Mode: UNII-1/TX A Mode_ANT 2

TX mode CH36

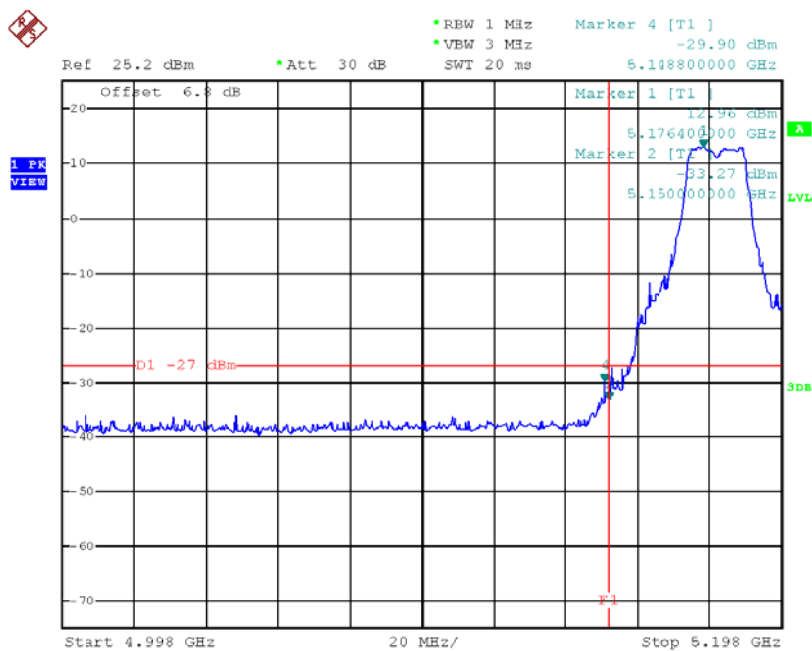

Date: 21.JUN.2016 14:06:44


TX mode CH48

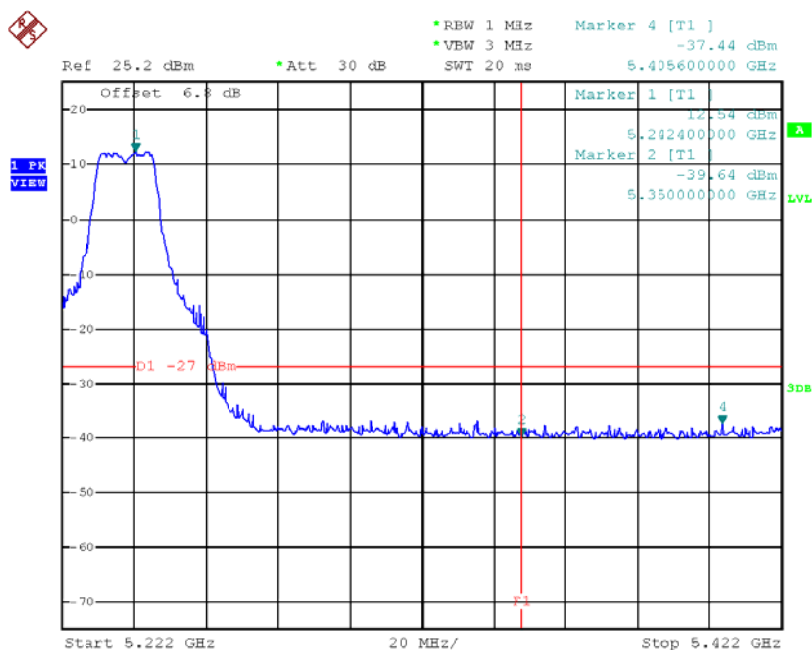

Date: 21.JUN.2016 14:09:50


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

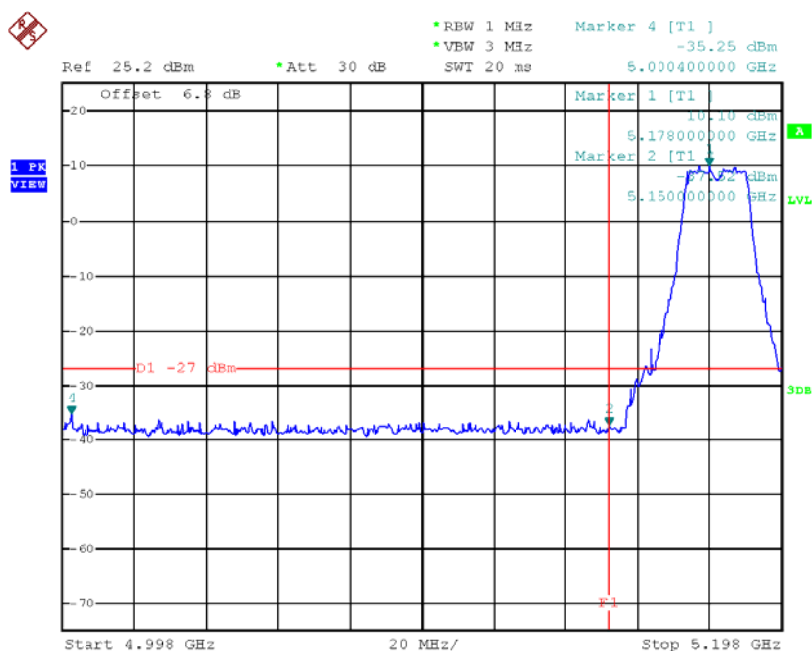

Date: 21.JUN.2016 12:51:06


TX mode CH48

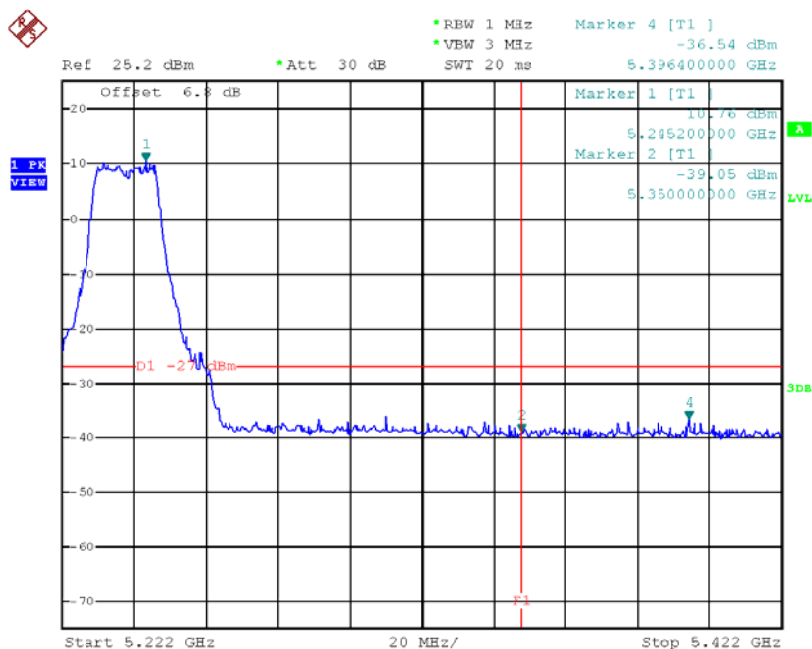

Date: 21.JUN.2016 12:56:18


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

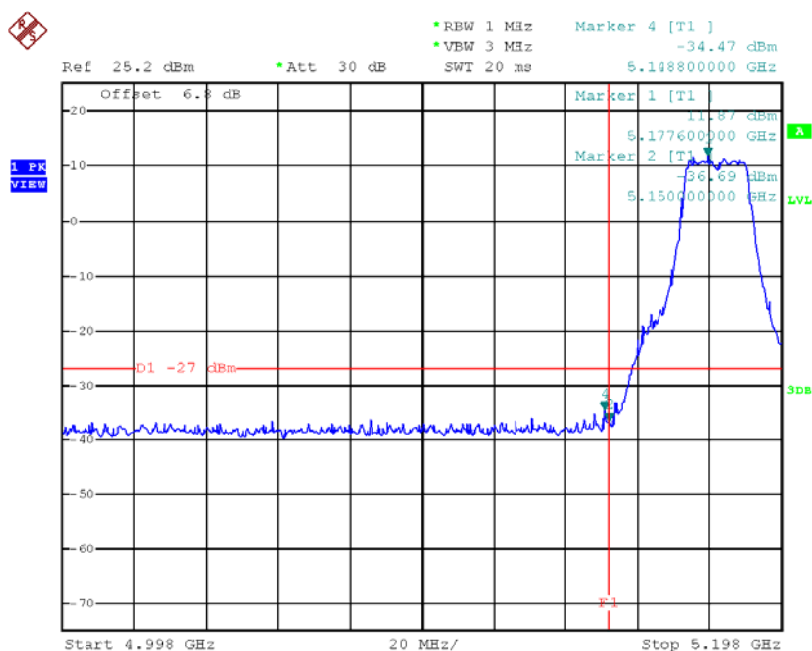

Date: 21.JUN.2016 14:11:47


TX mode CH48

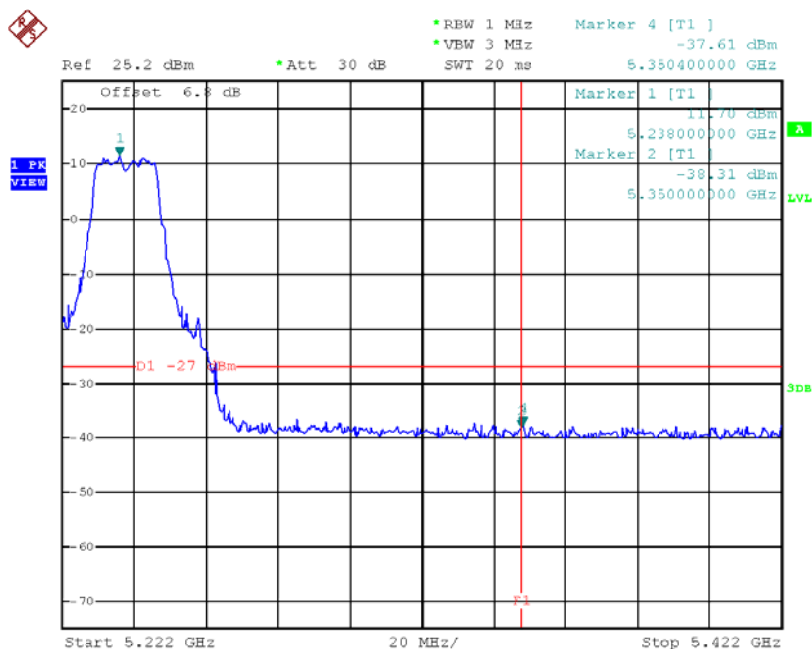

Date: 21.JUN.2016 14:14:45


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

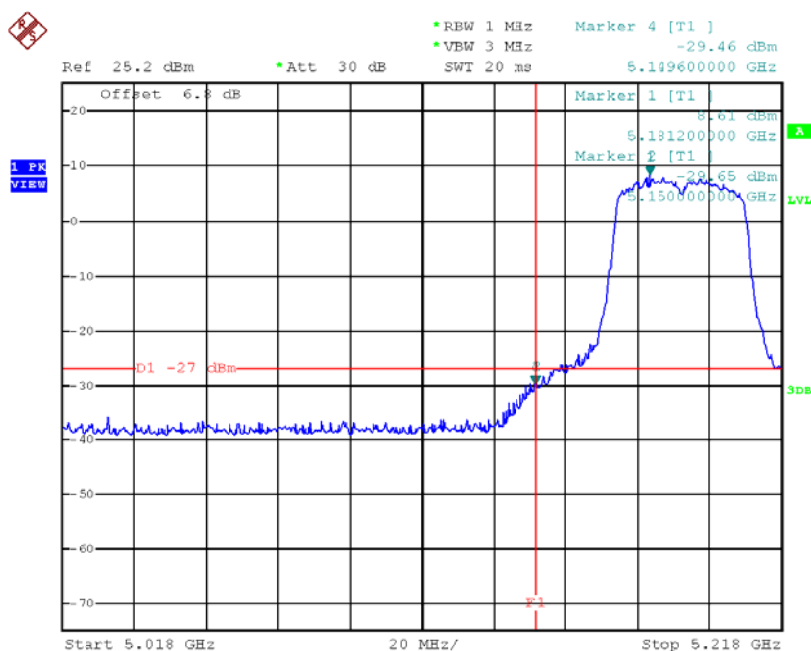

Date: 21.JUN.2016 12:58:12


TX mode CH46

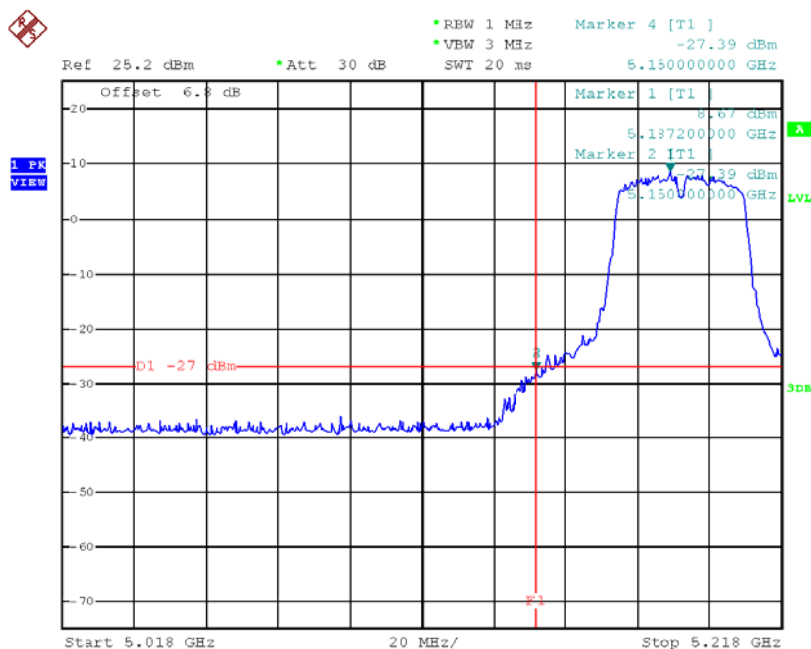

Date: 21.JUN.2016 14:20:27


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

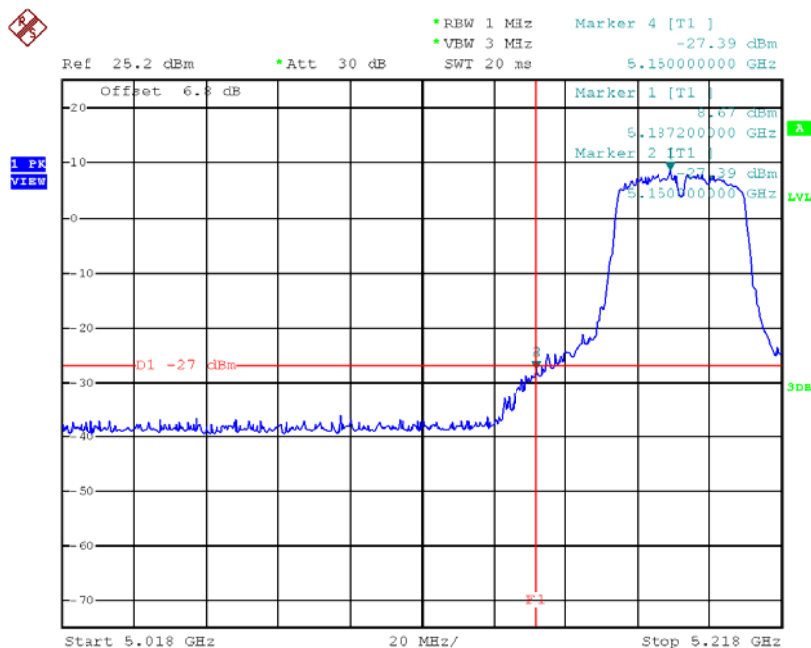

Date: 21.JUN.2016 14:20:27


TX mode CH46

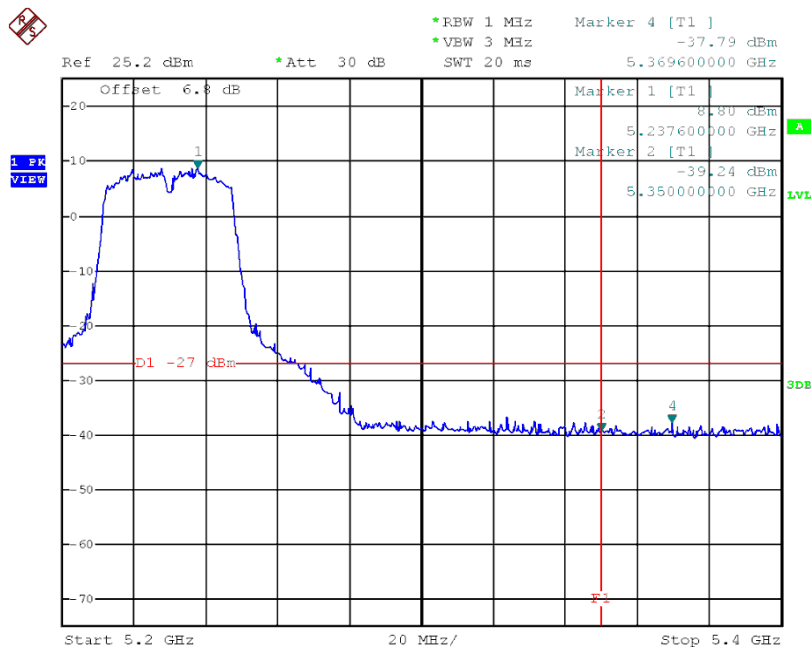

Date: 21.JUN.2016 14:18:31


Test Mode: UNII-2A/TX A Mode_ANT 1

TX mode CH52

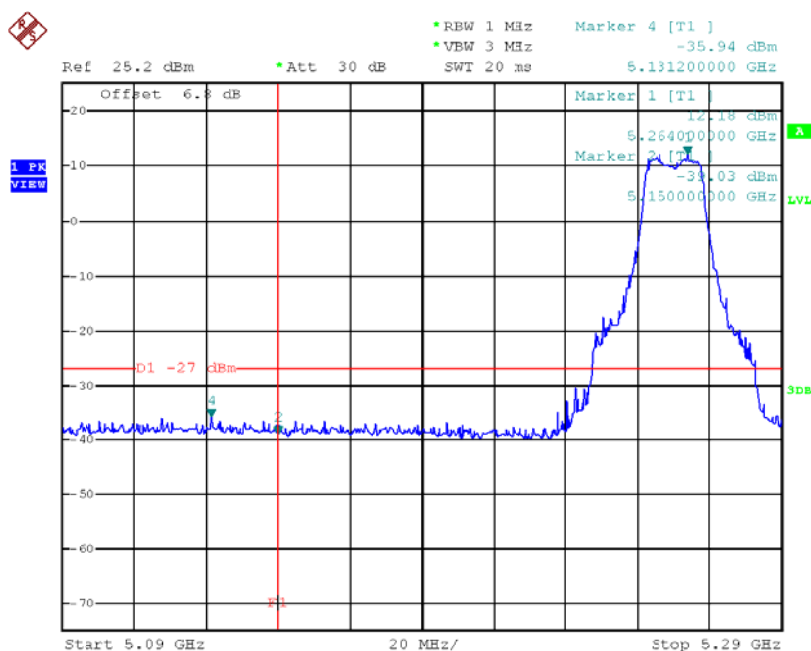

Date: 21.JUN.2016 14:30:51


TX mode CH64

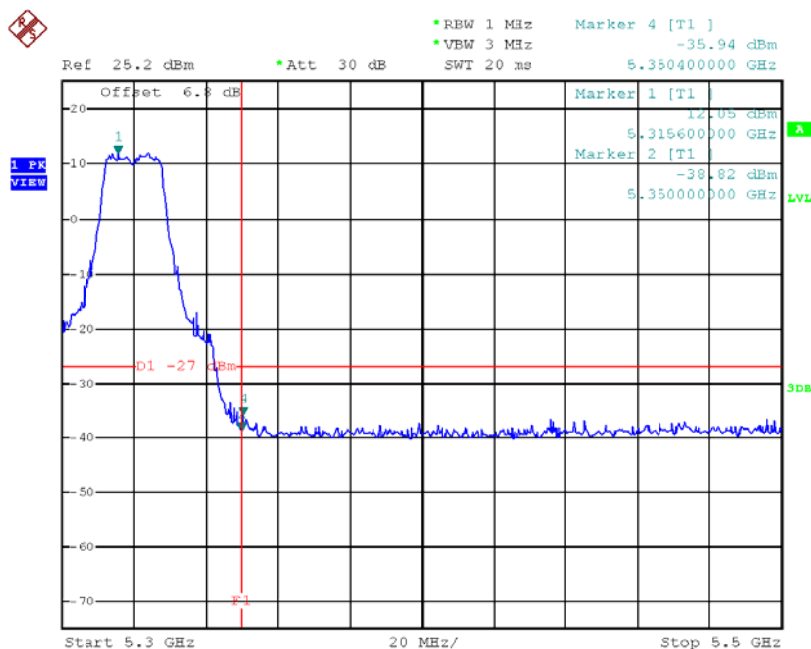

Date: 21.JUN.2016 14:33:30


Test Mode: UNII-2A/TX A Mode_ANT 2

TX mode CH52

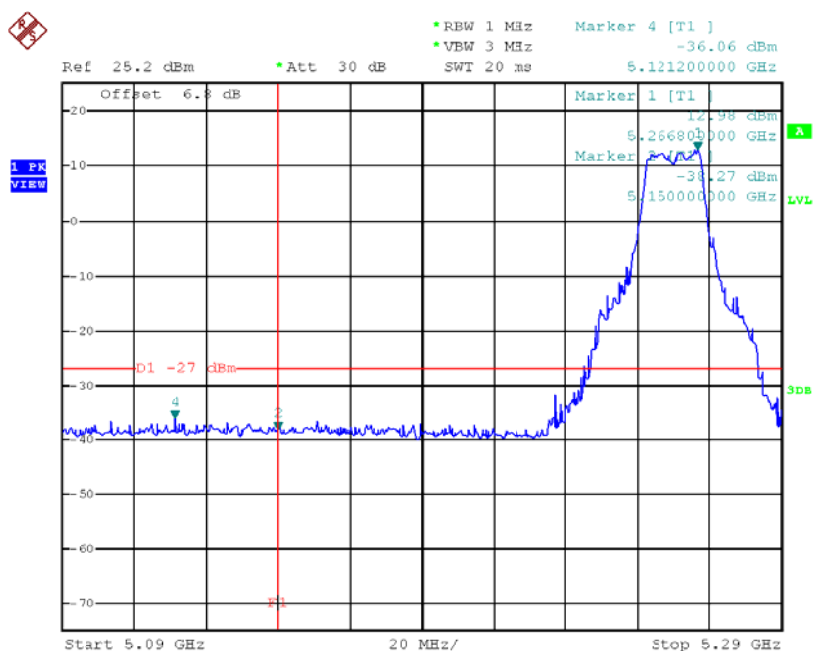

Date: 21.JUN.2016 15:41:00


TX mode CH64

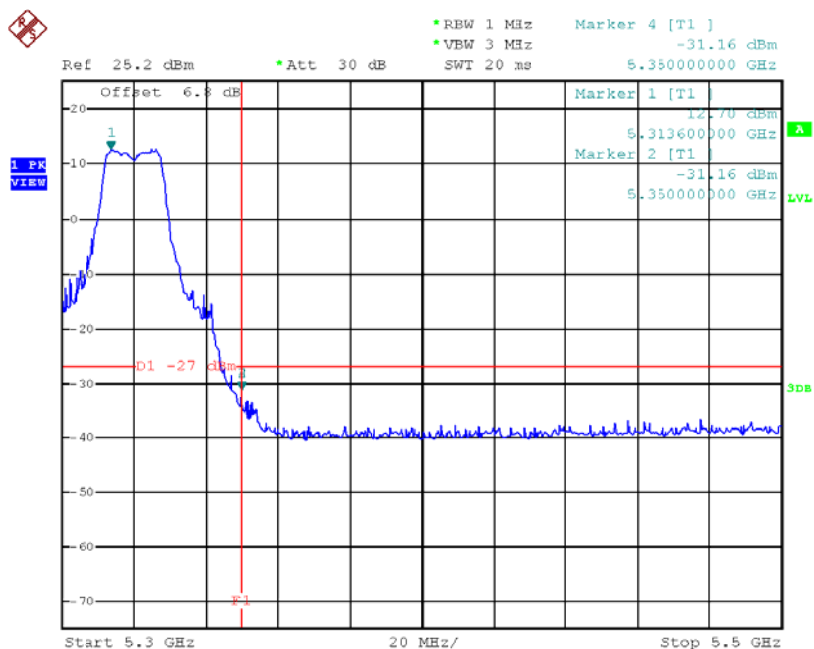

Date: 21.JUN.2016 15:45:48


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

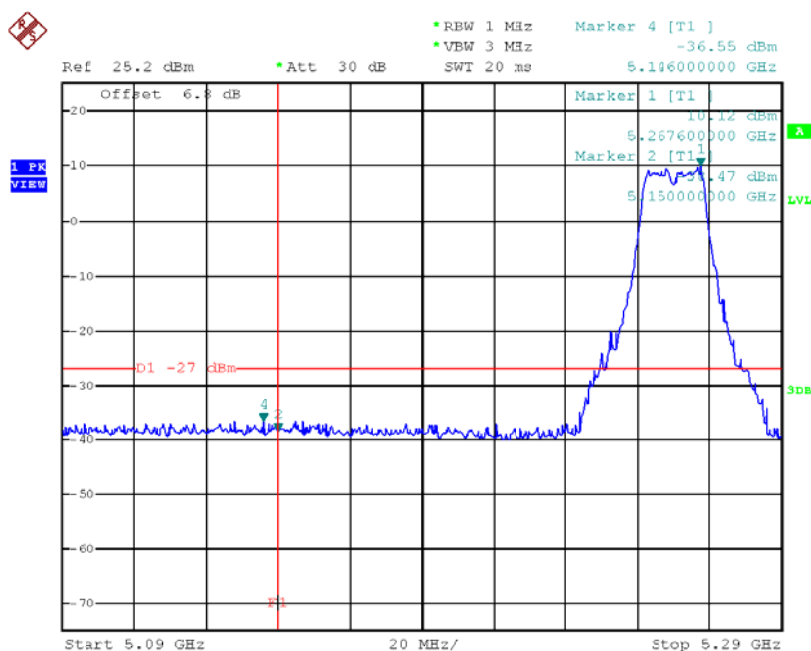

Date: 21.JUN.2016 14:35:13


TX mode CH64

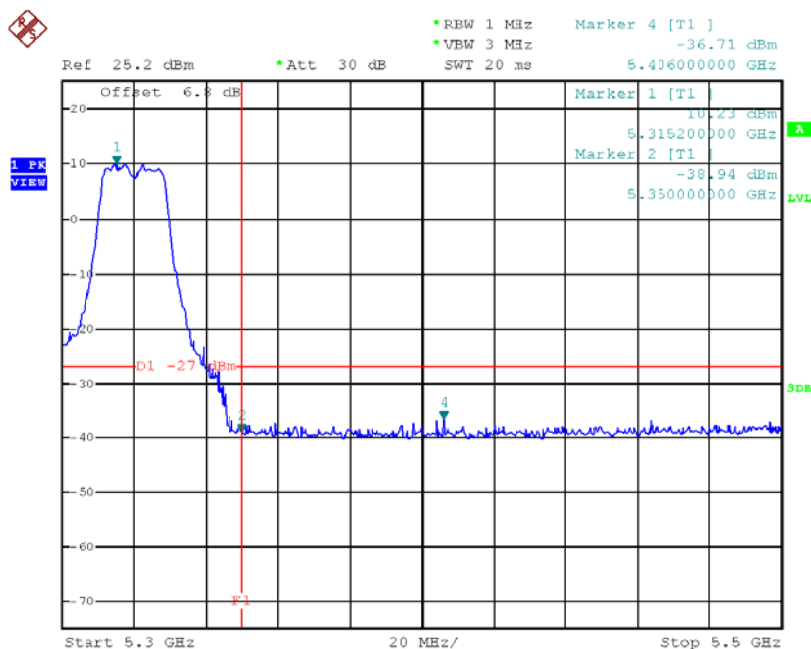

Date: 21.JUN.2016 14:37:52


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

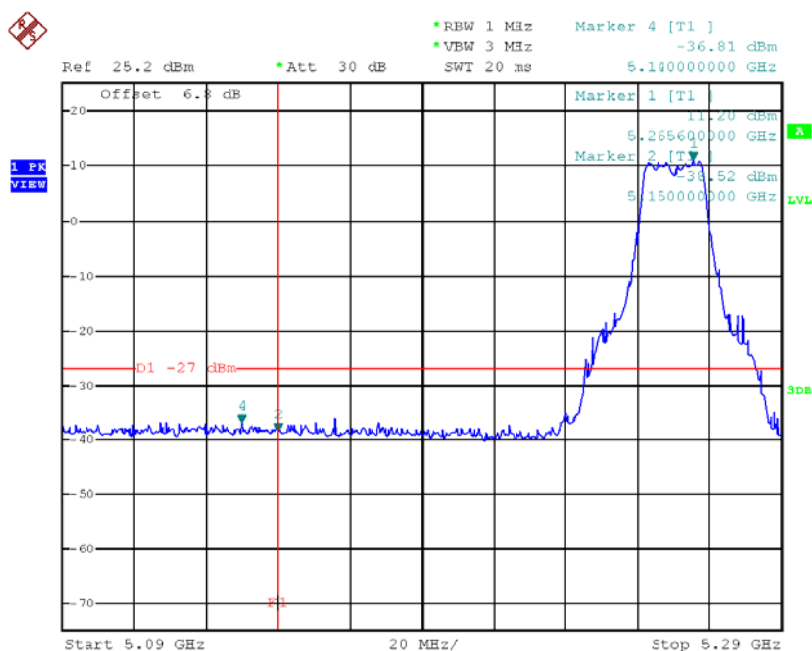

Date: 21.JUN.2016 15:47:39


TX mode CH64

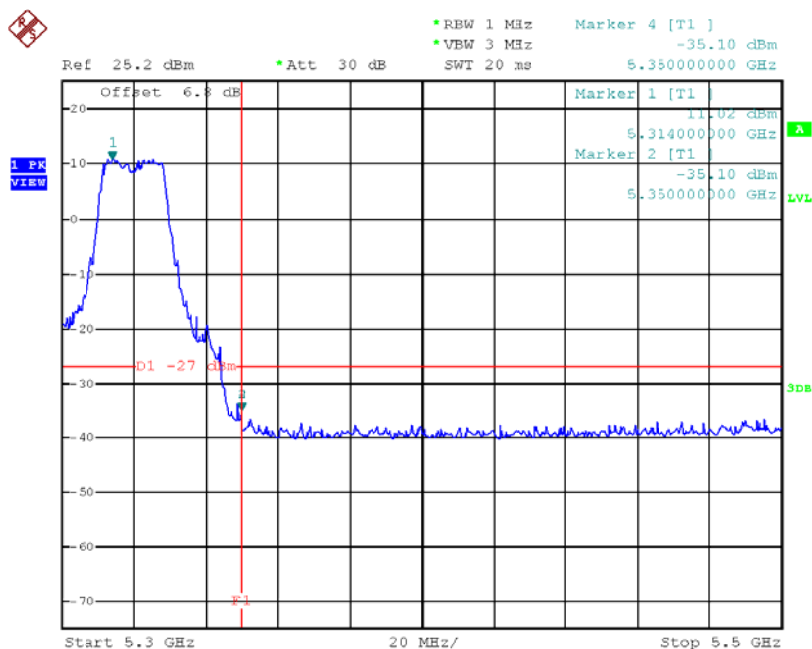

Date: 21.JUN.2016 15:53:15


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

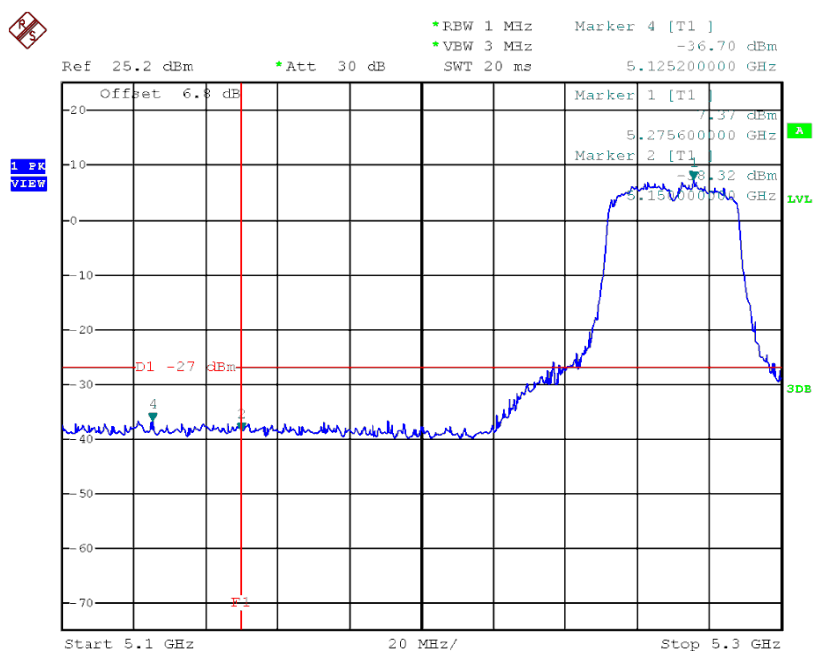

Date: 21.JUN.2016 14:39:32


TX mode CH62

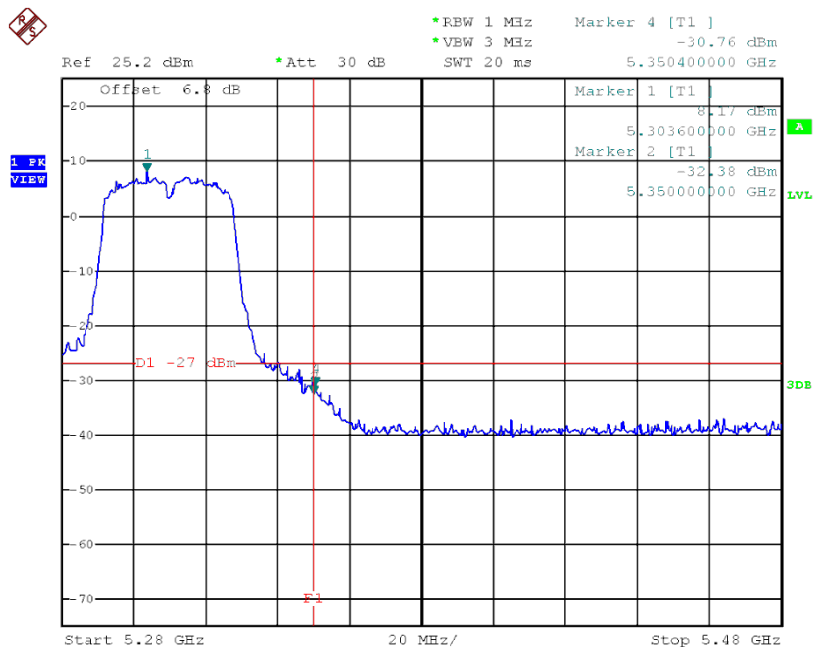

Date: 21.JUN.2016 14:41:46


Test Mode: UNII-2A/TX N40 Mode_ANT 2

TX mode CH54

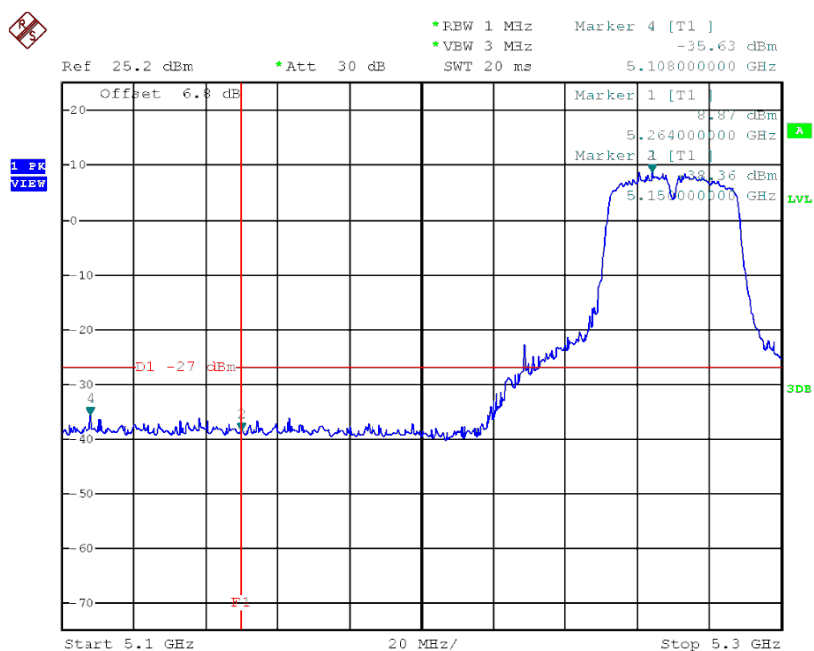

Date: 21.JUN.2016 15:55:18


TX mode CH62

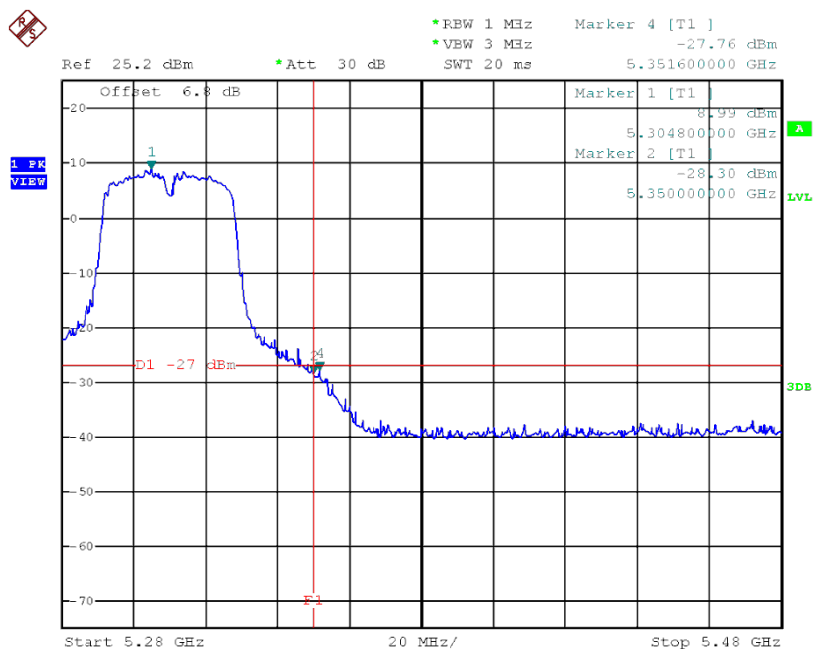

Date: 21.JUN.2016 15:57:04


Test Mode: UNII-3/TX A Mode_ANT 1

TX A Mode CH149

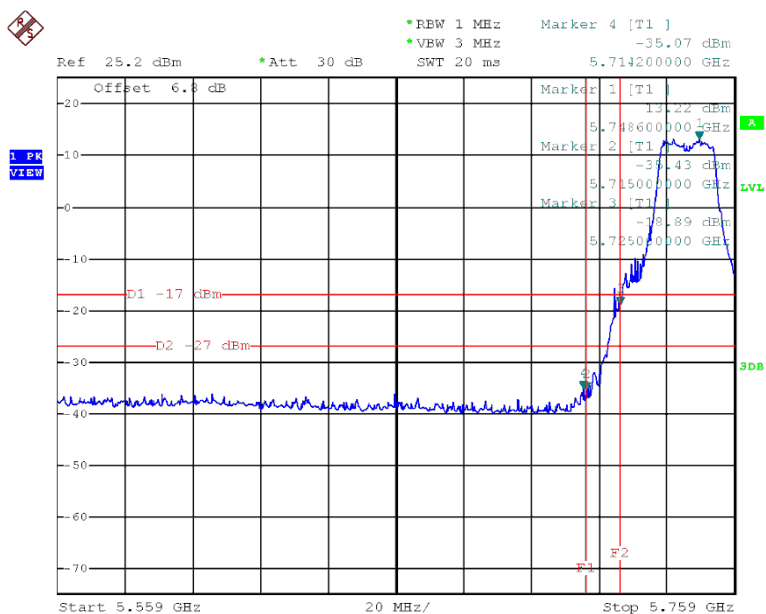

Date: 21.JUN.2016 16:04:37


TX A Mode CH165

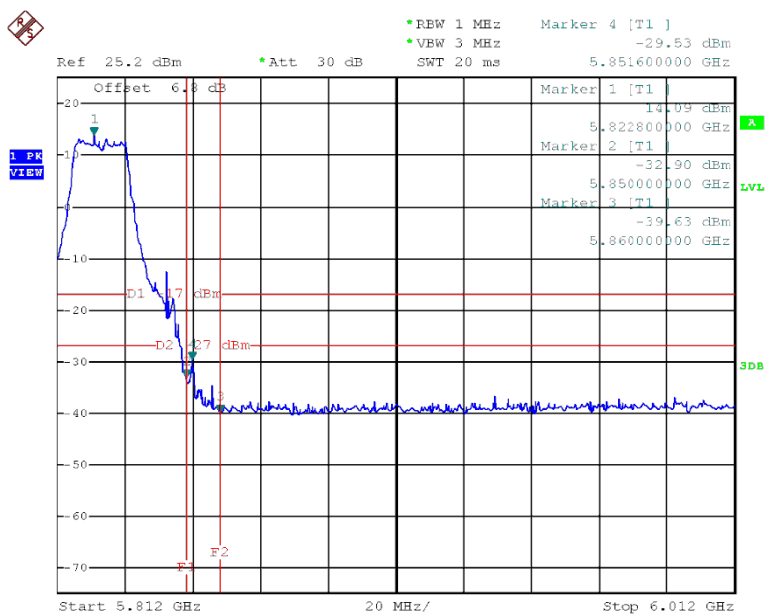

Date: 21.JUN.2016 16:07:59


Test Mode: UNII-3/TX A Mode_ANT 2

TX A Mode CH149

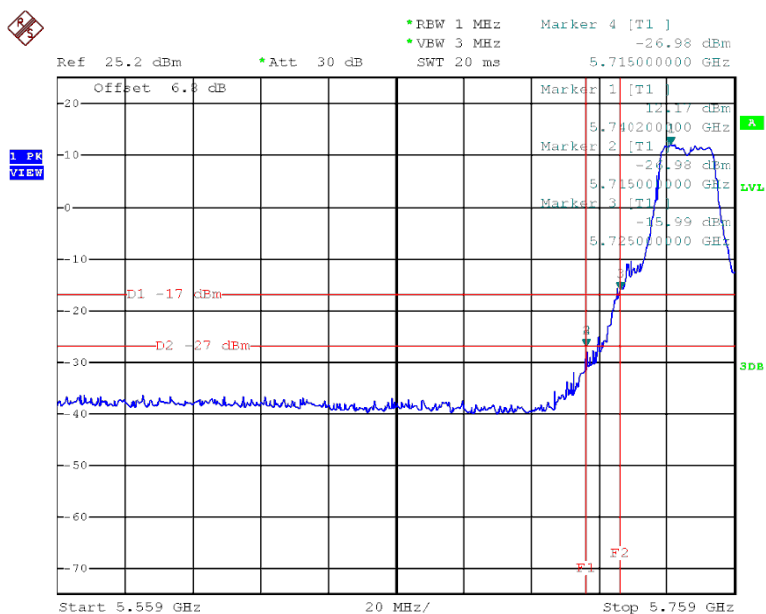

Date: 21.JUN.2016 16:28:19


TX A Mode CH165

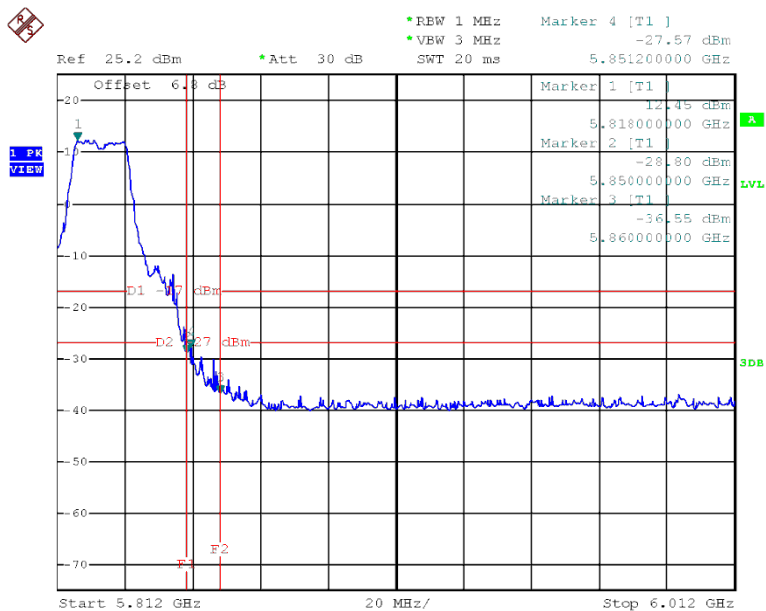

Date: 21.JUN.2016 16:32:32


Test Mode: UNII-3/TX N20 Mode_ANT 1

TX HT20 mode CH149

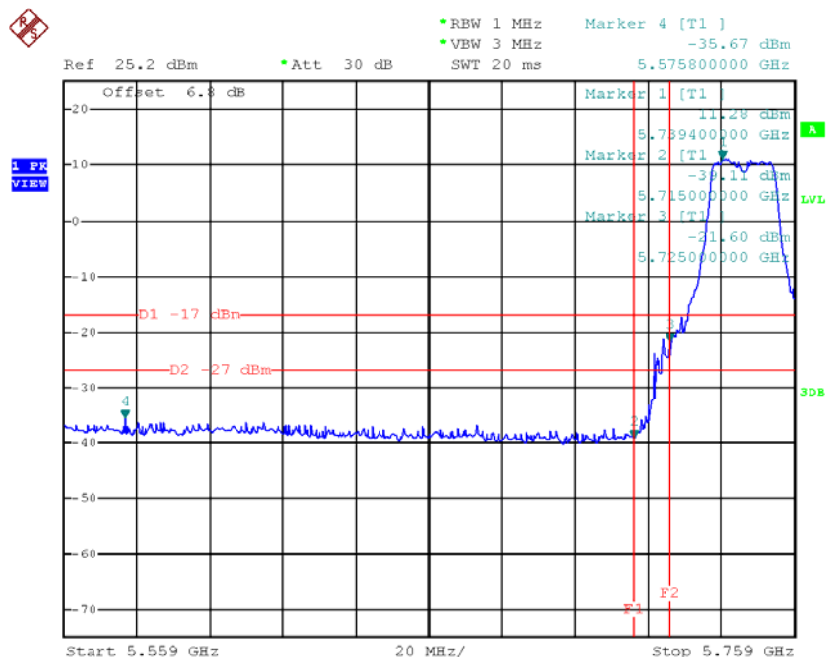

Date: 21.JUN.2016 16:10:00


TX HT20 mode CH165

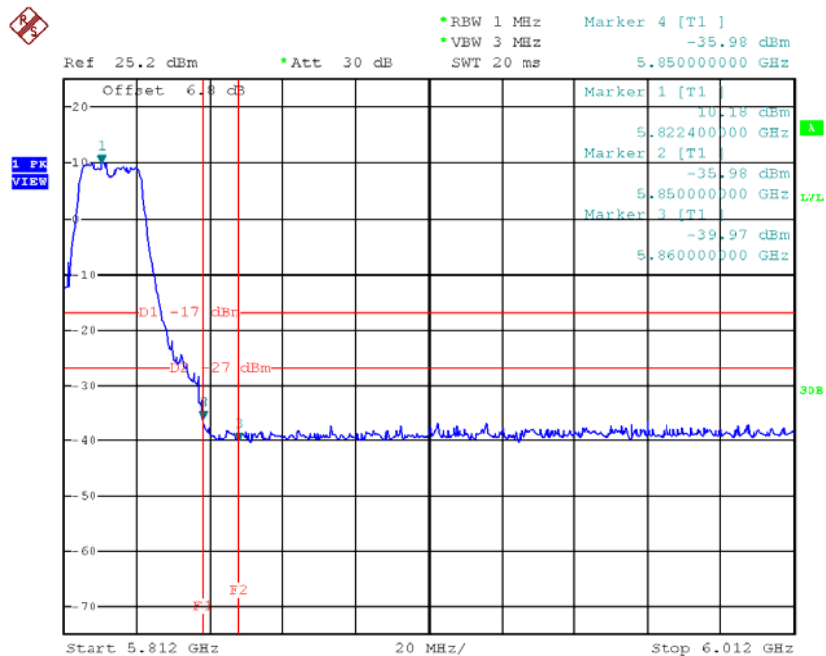

Date: 21.JUN.2016 16:16:07


Test Mode: UNII-3/TX N20 Mode_ANT 2

TX HT20 mode CH149

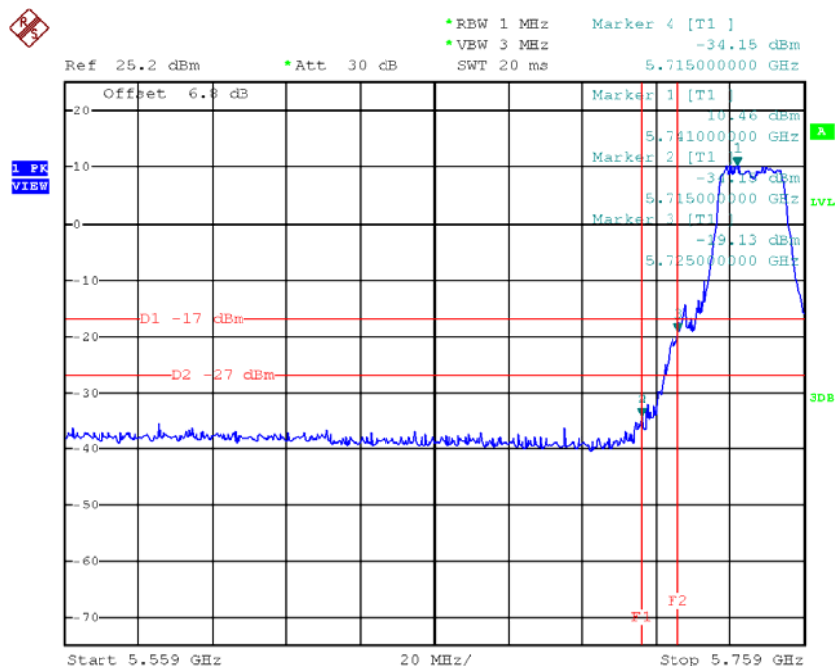

Date: 21.JUN.2016 16:34:13


TX HT20 mode CH165

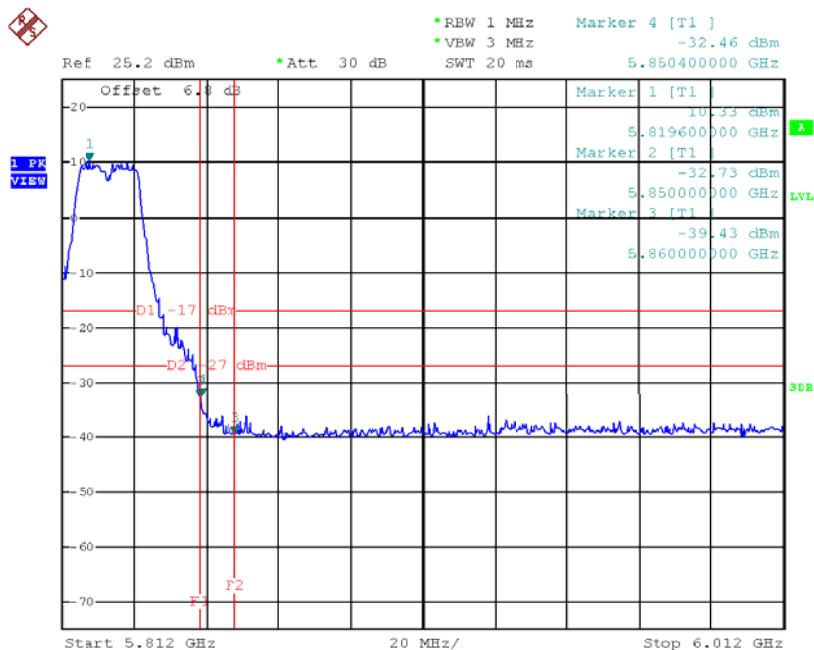

Date: 21.JUN.2016 16:49:35


Test Mode: UNII-3/TX N40 Mode_ANT 1

TX HT40 mode CH151

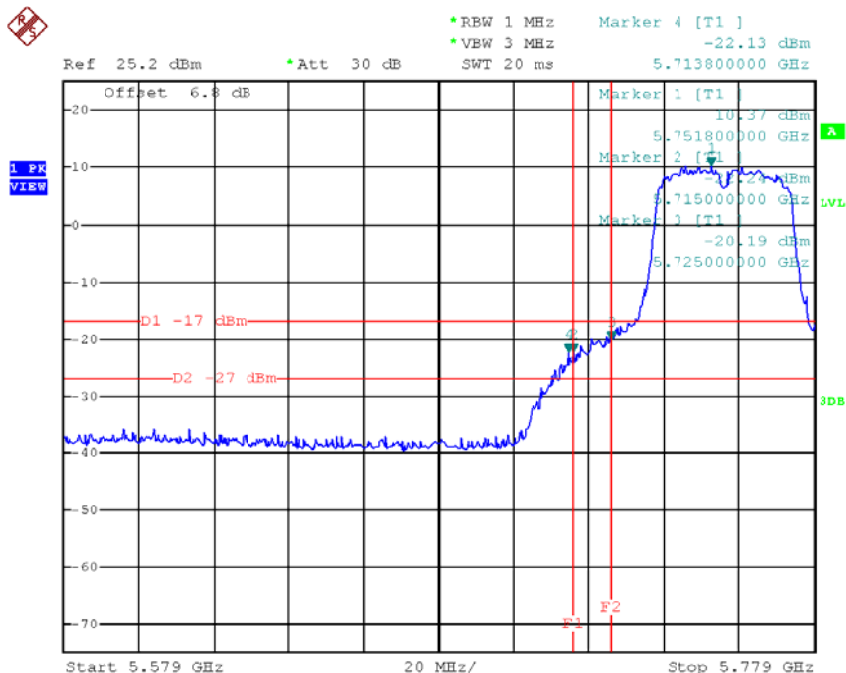

Date: 21.JUN.2016 16:19:49


HT40 mode CH159

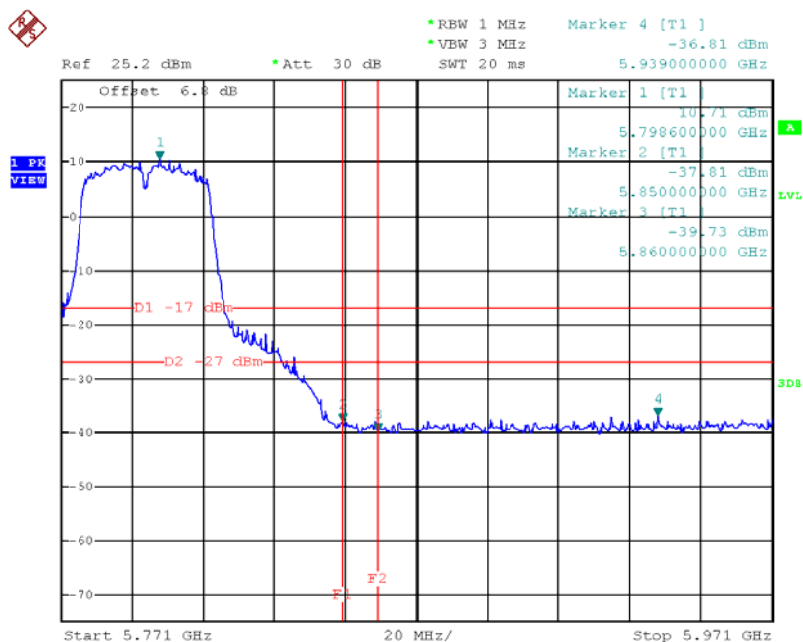

Date: 21.JUN.2016 16:23:57


Test Mode: UNII-3/TX N40 Mode_ANT 2

TX HT40 mode CH151

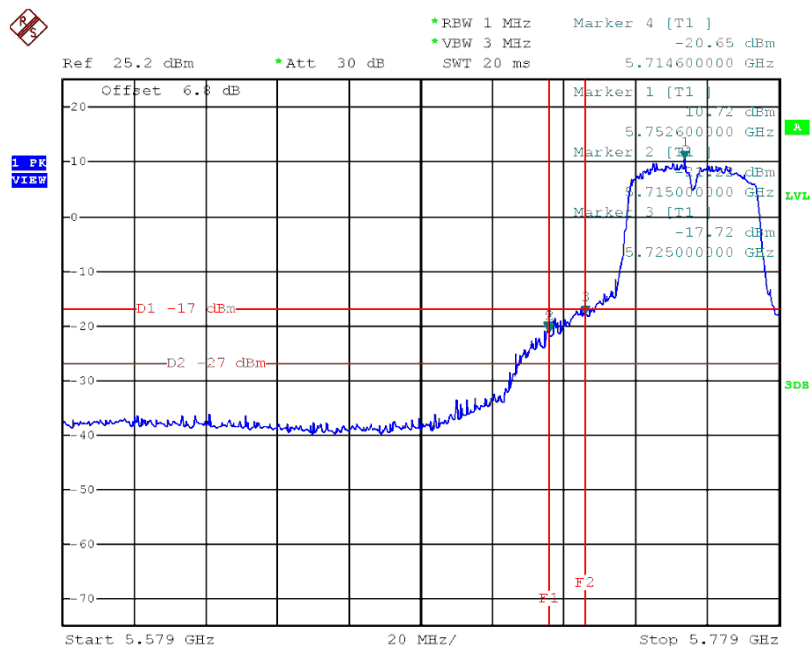

Date: 21.JUN.2016 16:51:37

HT40 mode CH159

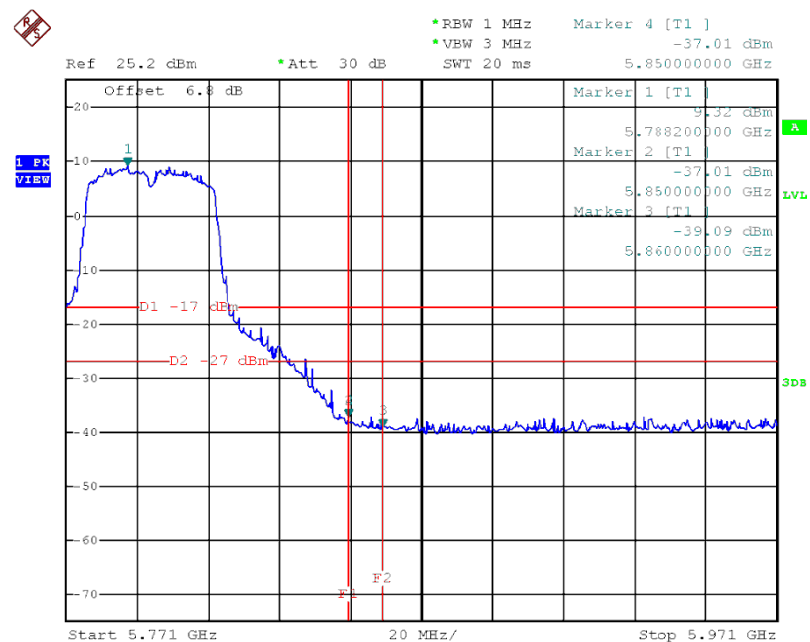


Date: 21.JUN.2016 16:54:39

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-2.84	0.04	-2.80	14.78
CH40	5200	-2.64	0.04	-2.60	14.78
CH48	5240	-3.29	0.04	-3.25	14.78

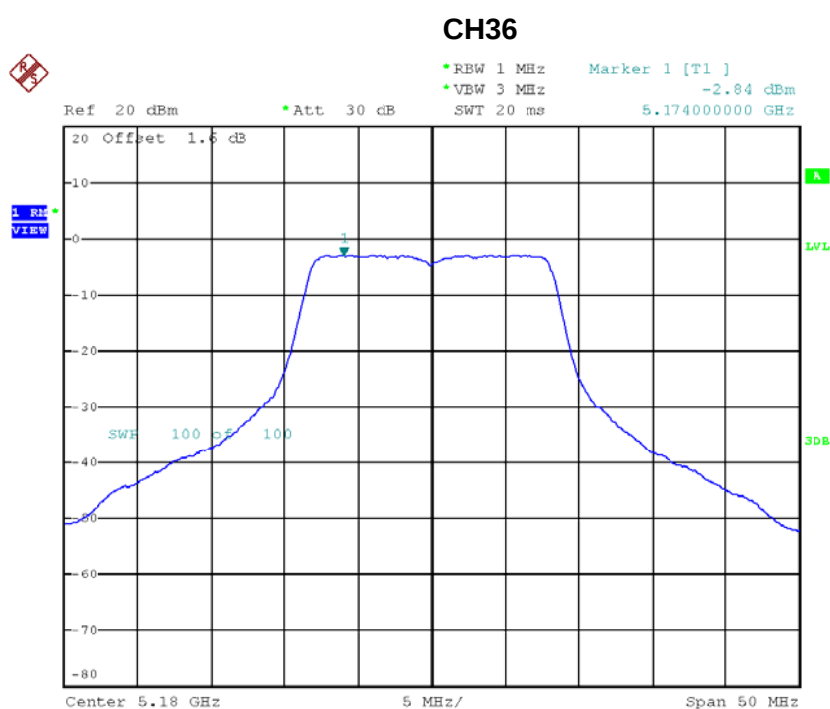


Date: 21.JUN.2016 12:45:14

CH40

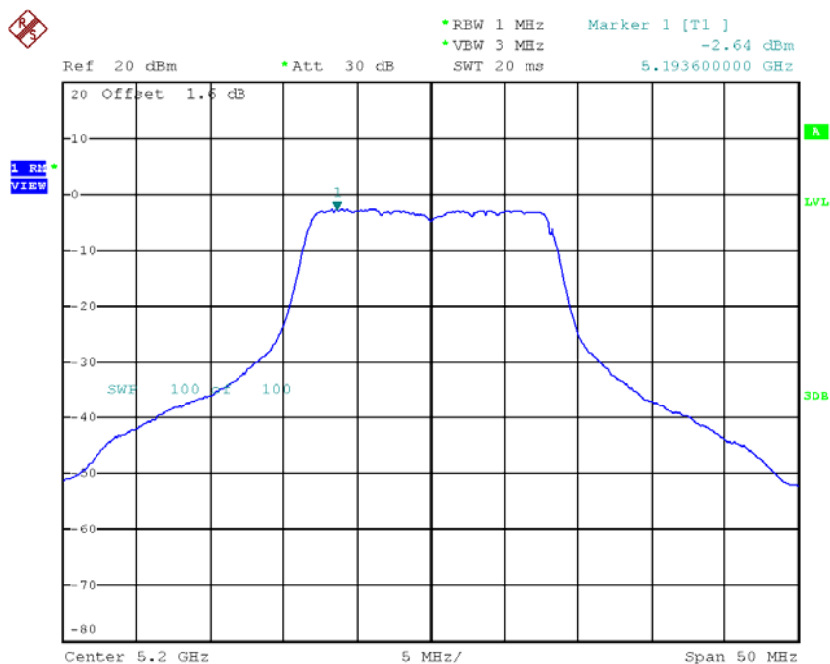

Date: 21.JUN.2016 12:47:40


CH48

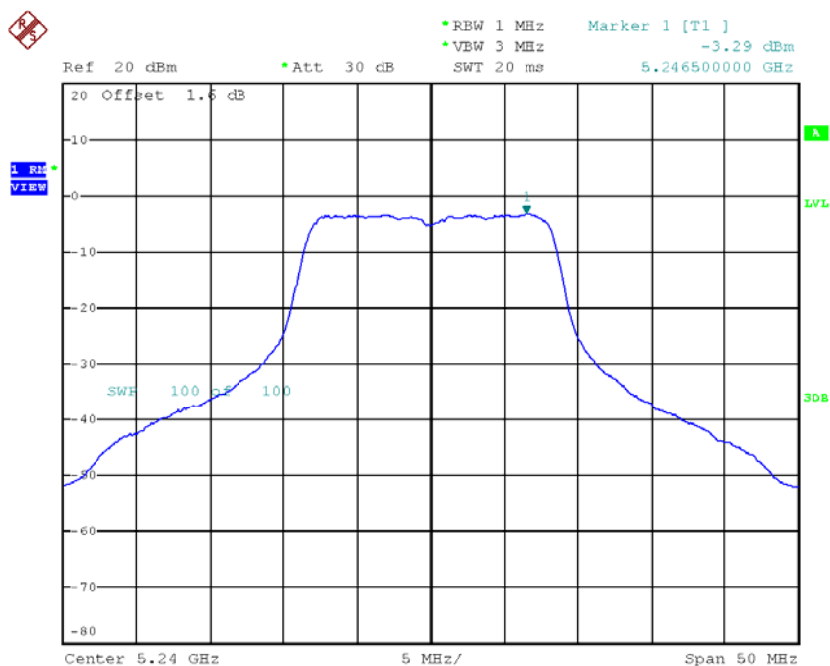

Date: 21.JUN.2016 12:48:54


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-0.41	0.04	-0.37	14.78
CH40	5200	-0.61	0.04	-0.57	14.78
CH48	5240	-1.31	0.04	-1.27	14.78

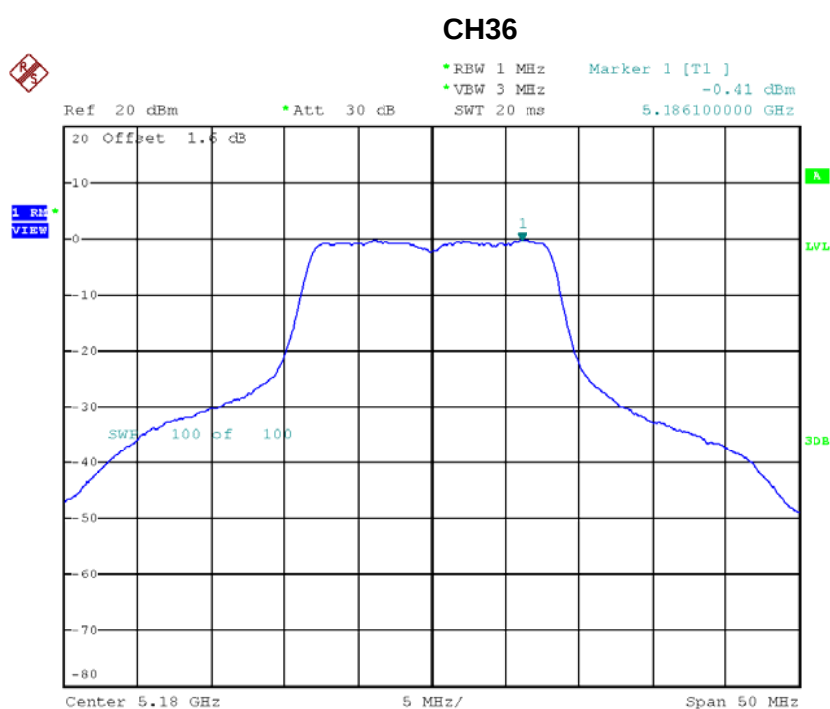


Date: 21.JUN.2016 14:06:37

CH40

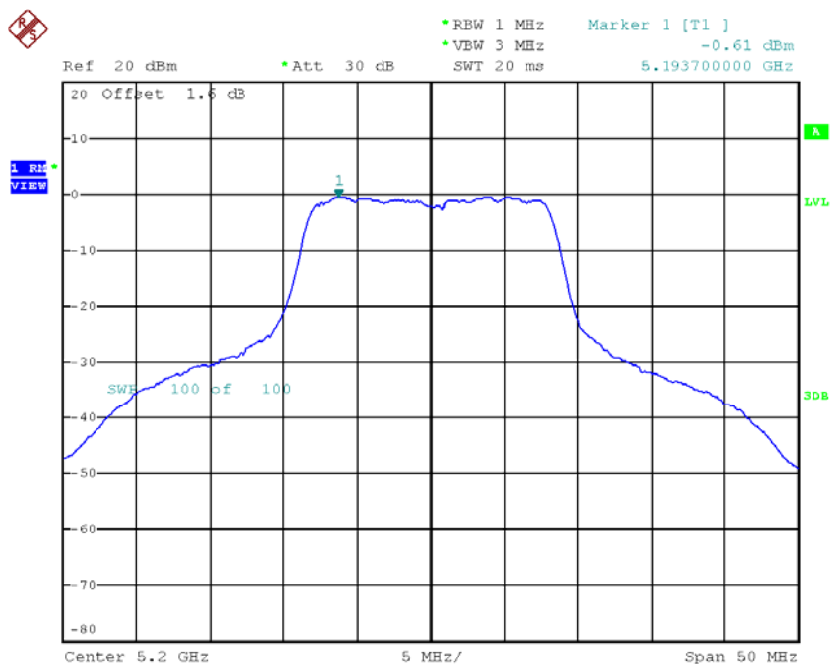

Date: 21.JUN.2016 14:08:15

CH48

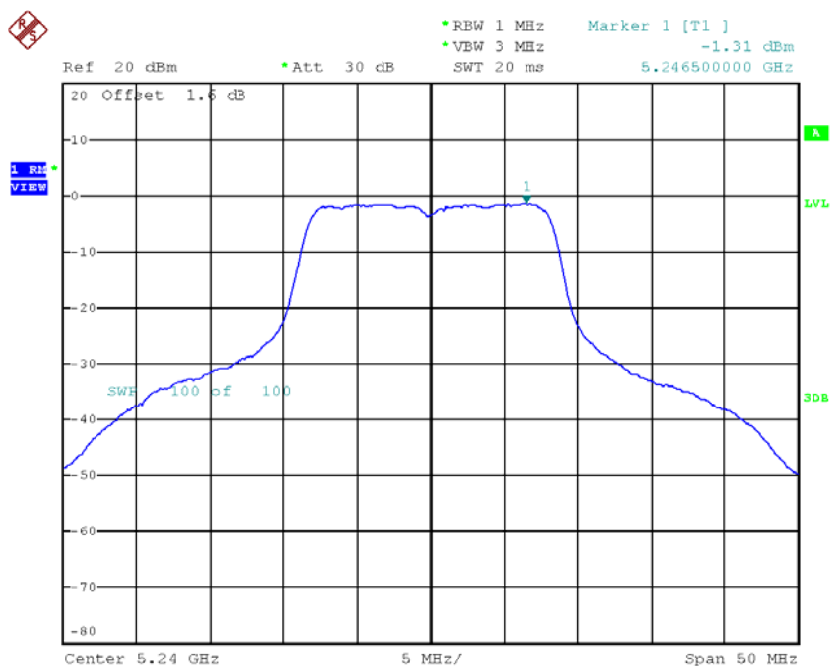


Date: 21.JUN.2016 14:09:27

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.57	14.78
CH40	5200	1.52	14.78
CH48	5240	0.84	14.78


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-4.98	0.05	-4.93	14.78
CH40	5200	-4.26	0.05	-4.21	14.78
CH48	5240	-5.16	0.05	-5.11	14.78

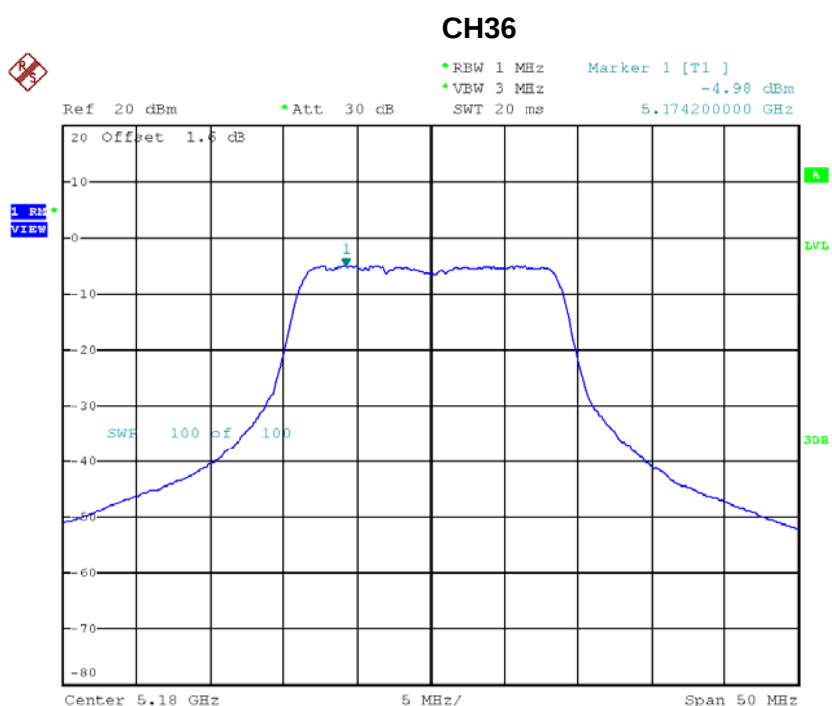


Date: 21.JUN.2016 12:50:42

CH40

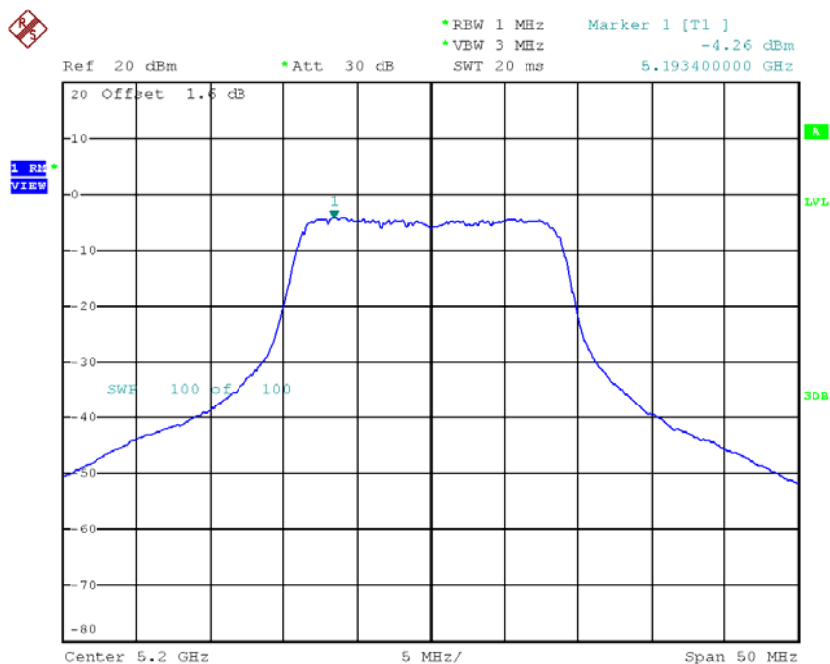

Date: 21.JUN.2016 12:54:31


CH48

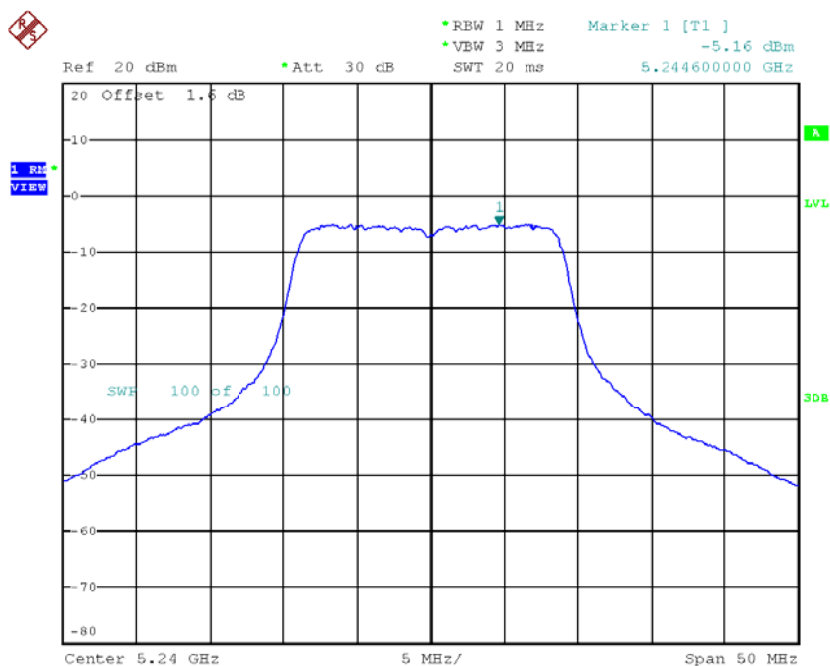

Date: 21.JUN.2016 12:55:54


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-3.00	0.05	-2.95	14.78
CH40	5200	-2.69	0.05	-2.64	14.78
CH48	5240	-3.63	0.05	-3.58	14.78

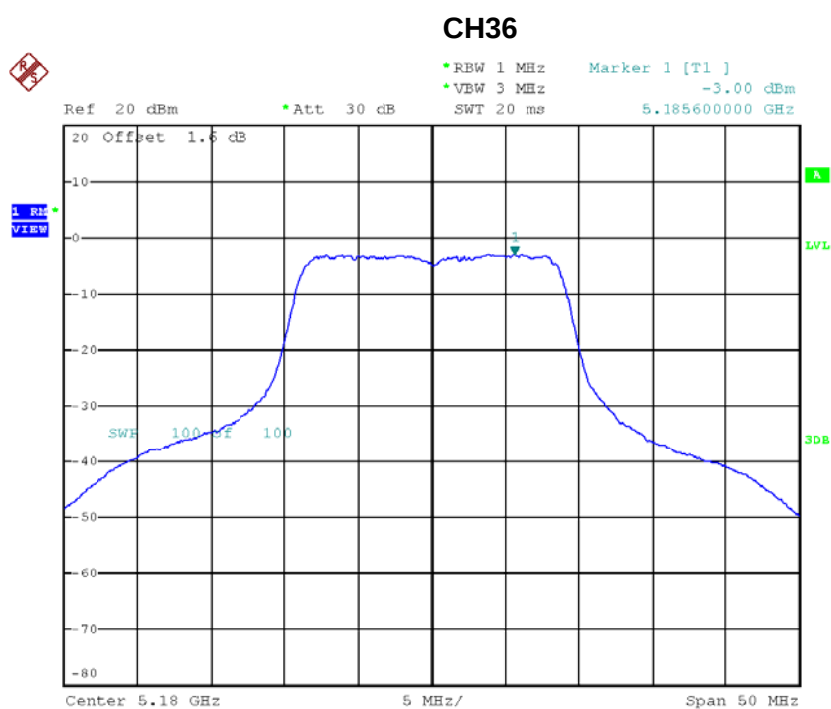


Date: 21.JUN.2016 14:11:23

CH40

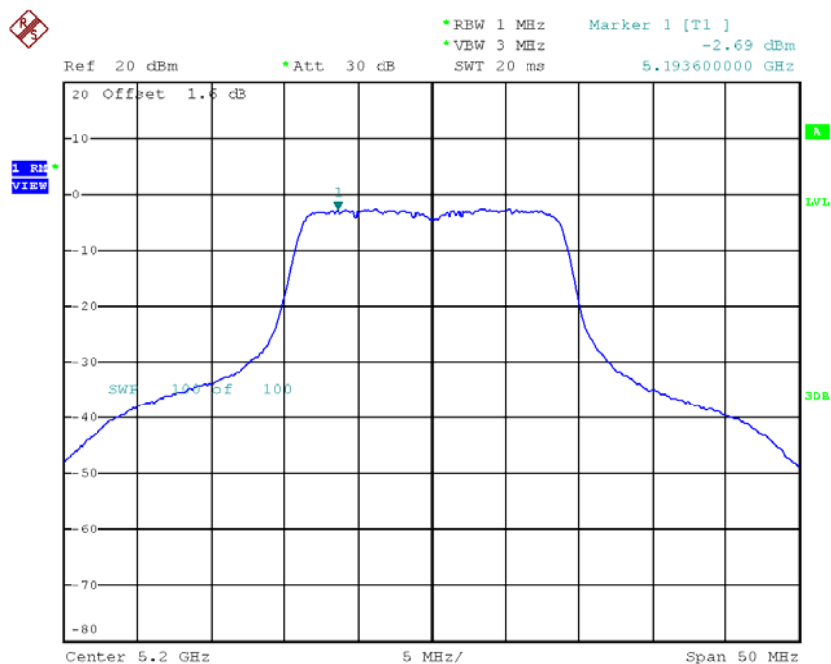

Date: 21.JUN.2016 14:13:01

CH48

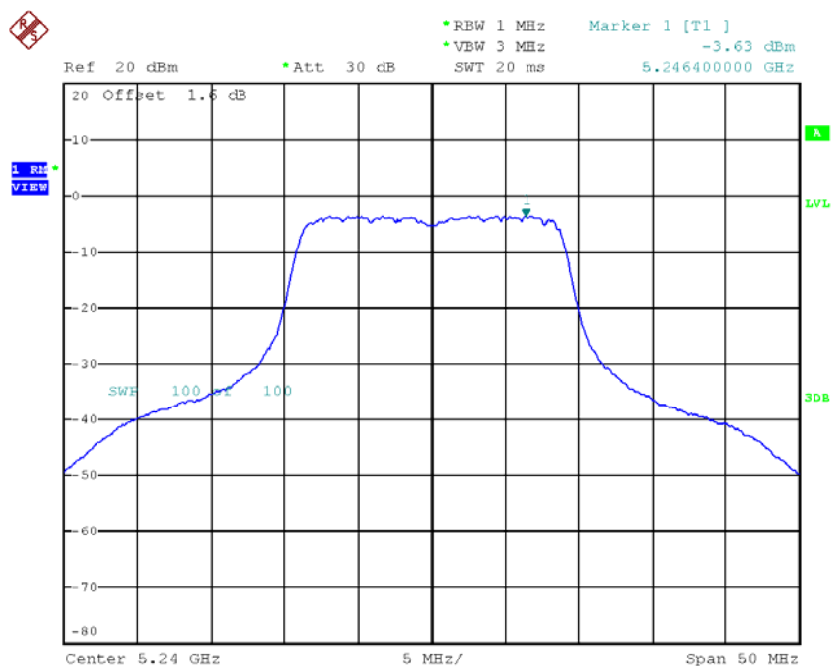

Date: 21.JUN.2016 14:14:21


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-0.82	14.78
CH40	5200	-0.35	14.78
CH48	5240	-1.27	14.78

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-6.48	0.23	-6.25	14.78
CH46	5230	-8.31	0.23	-8.08	14.78

CH38

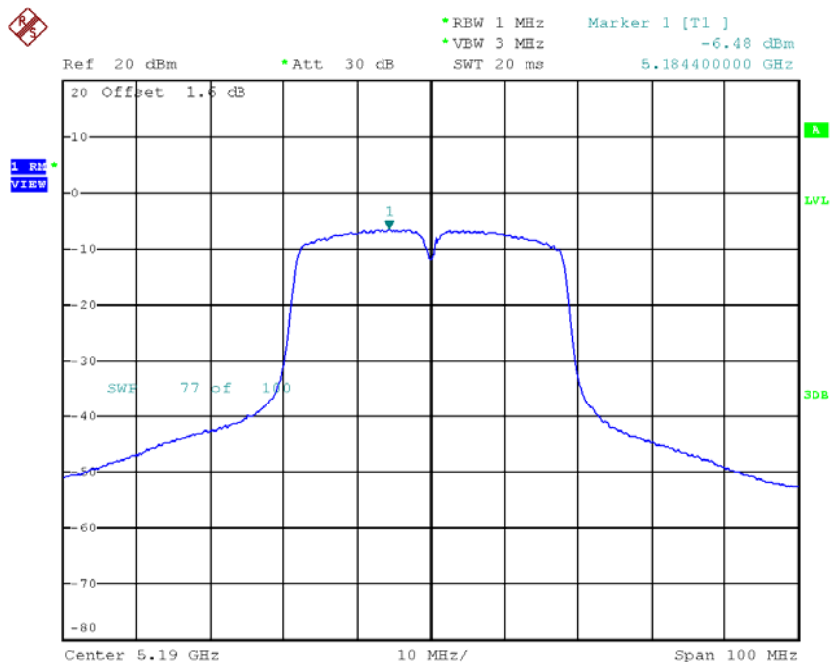

Date: 21.JUN.2016 12:58:05

CH46

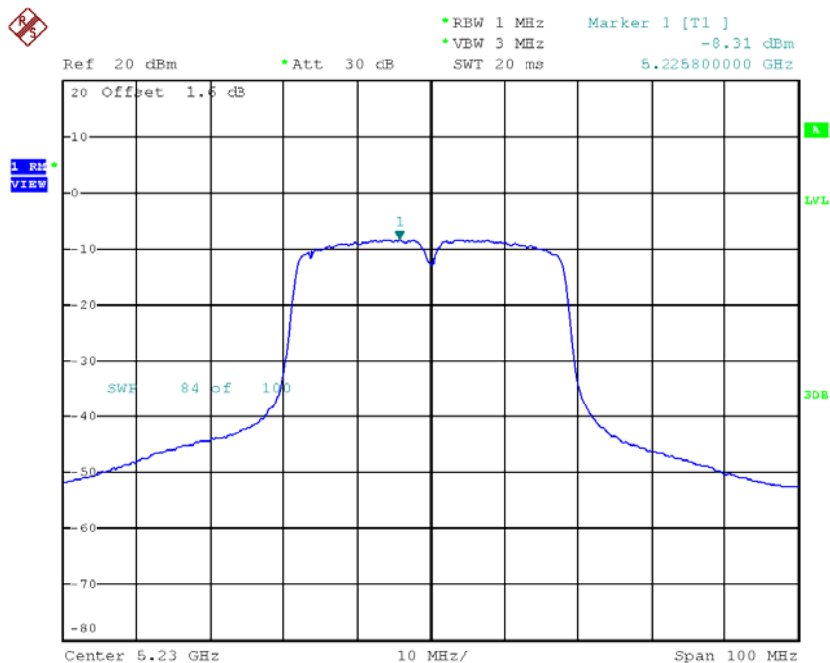


Date: 21.JUN.2016 13:00:31

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-5.27	0.23	-5.04	14.78
CH46	5230	-6.28	0.23	-6.05	14.78

CH38

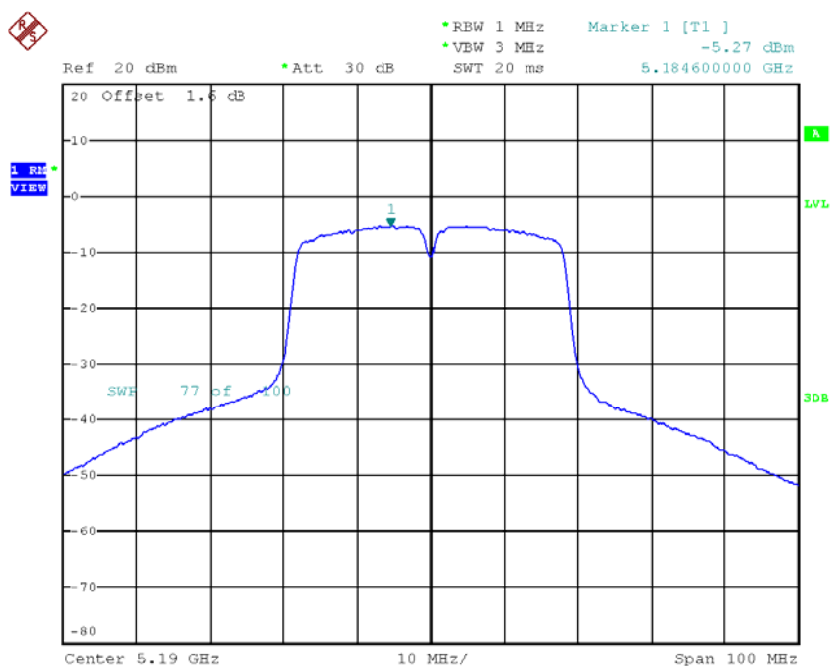

Date: 21.JUN.2016 14:16:27

CH46

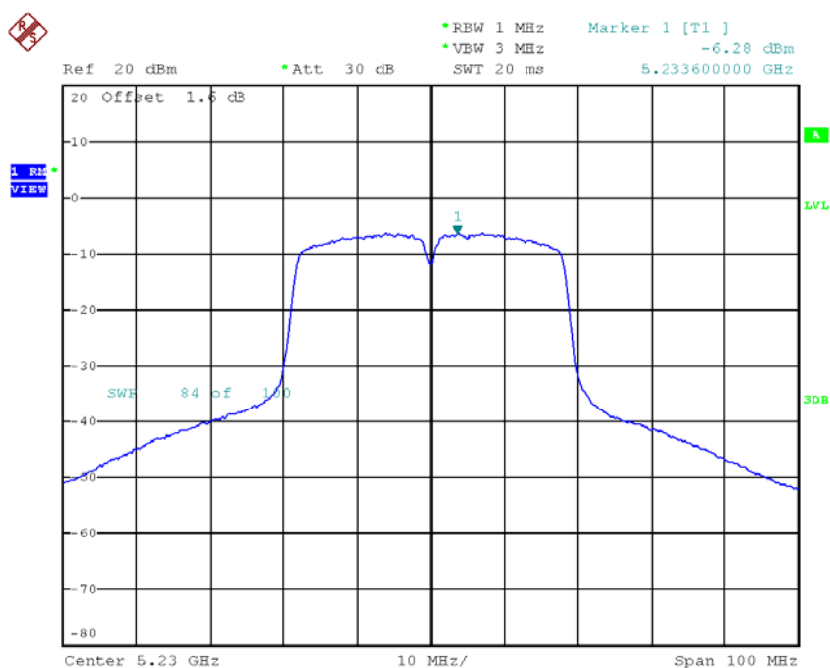


Date: 21.JUN.2016 14:18:24

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.59	14.78
CH46	5230	-3.94	14.78


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.71	0.04	-2.67	8.78
CH60	5300	-2.56	0.04	-2.52	8.78
CH64	5320	-2.71	0.04	-2.67	8.78

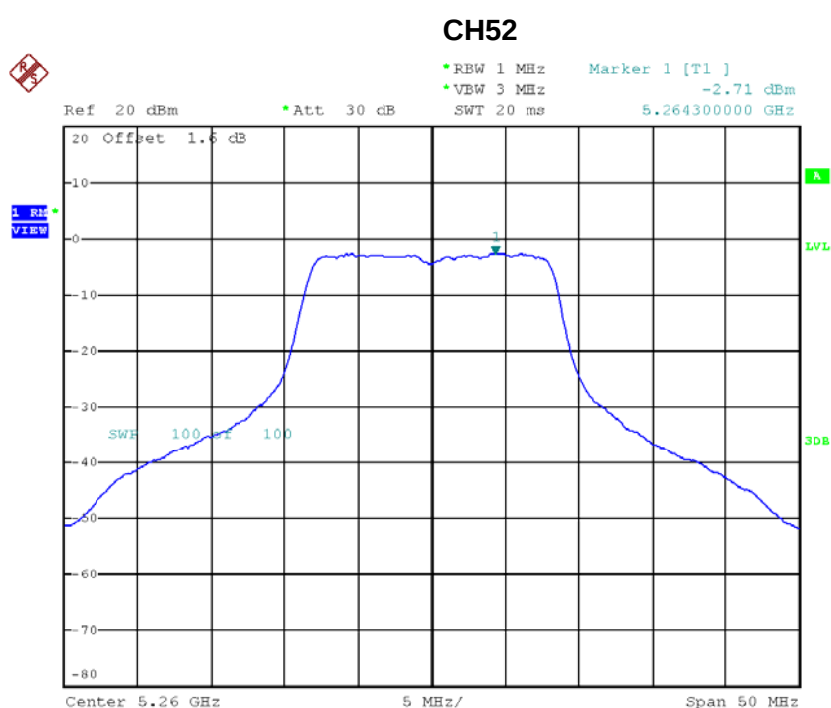


Date: 21.JUN.2016 14:30:27

CH60

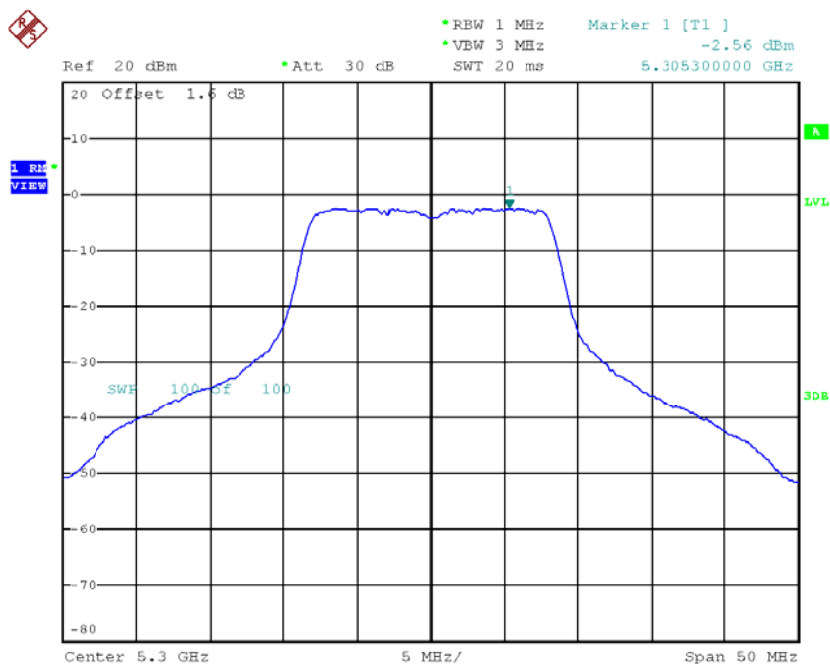

Date: 21.JUN.2016 14:32:13


CH64

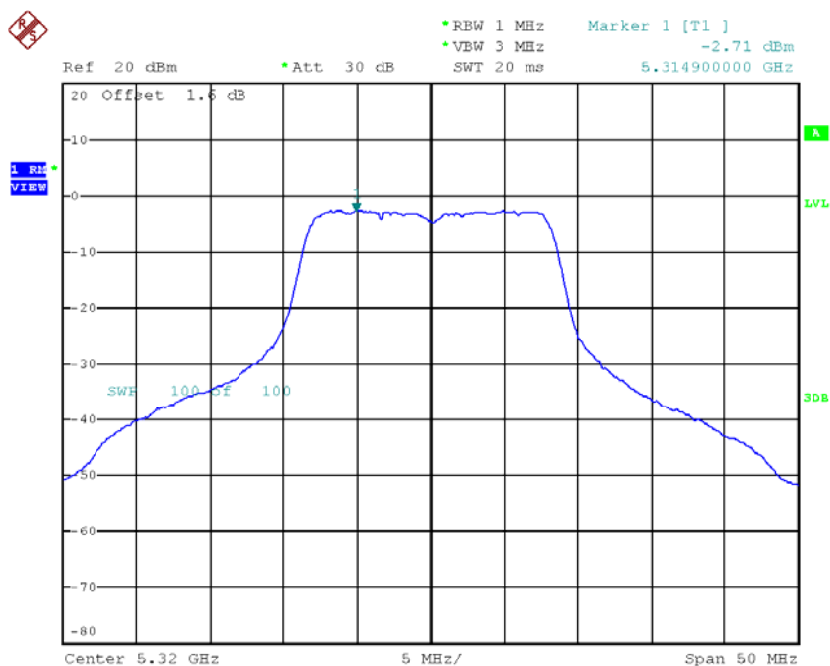

Date: 21.JUN.2016 14:33:23


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.65	0.04	-1.61	8.78
CH60	5300	-1.21	0.04	-1.17	8.78
CH64	5320	-1.31	0.04	-1.27	8.78

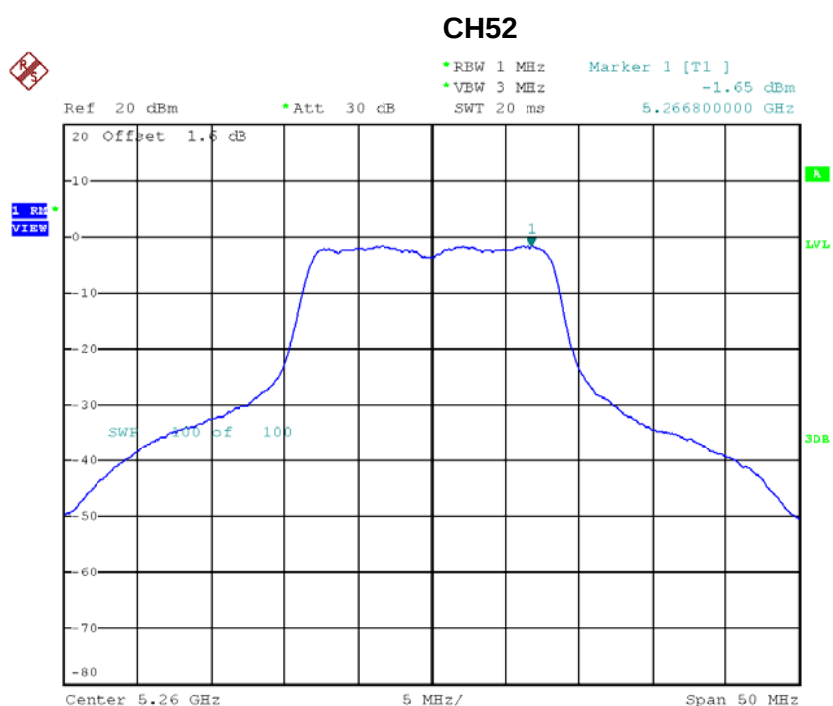


Date: 21.JUN.2016 15:40:37

CH60

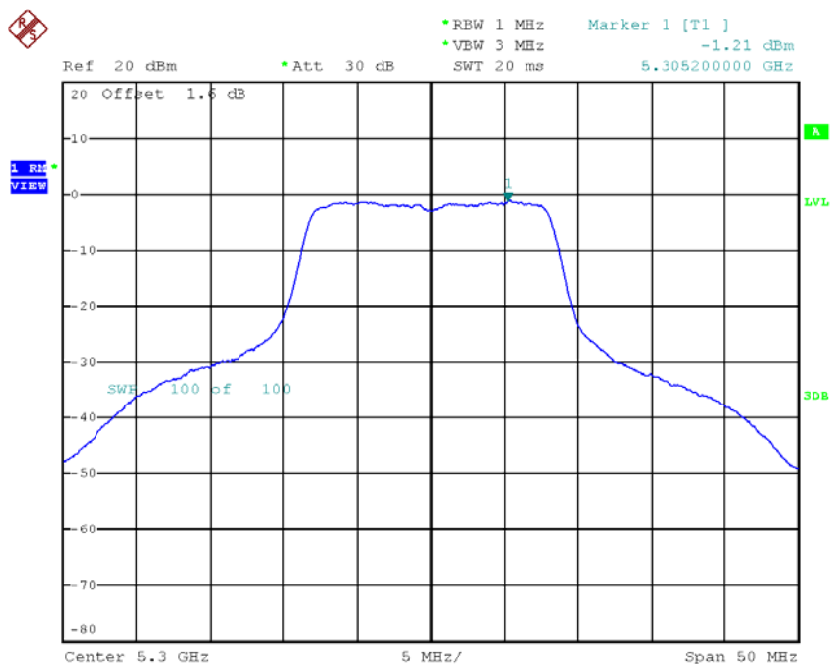

Date: 21.JUN.2016 15:44:09

CH64

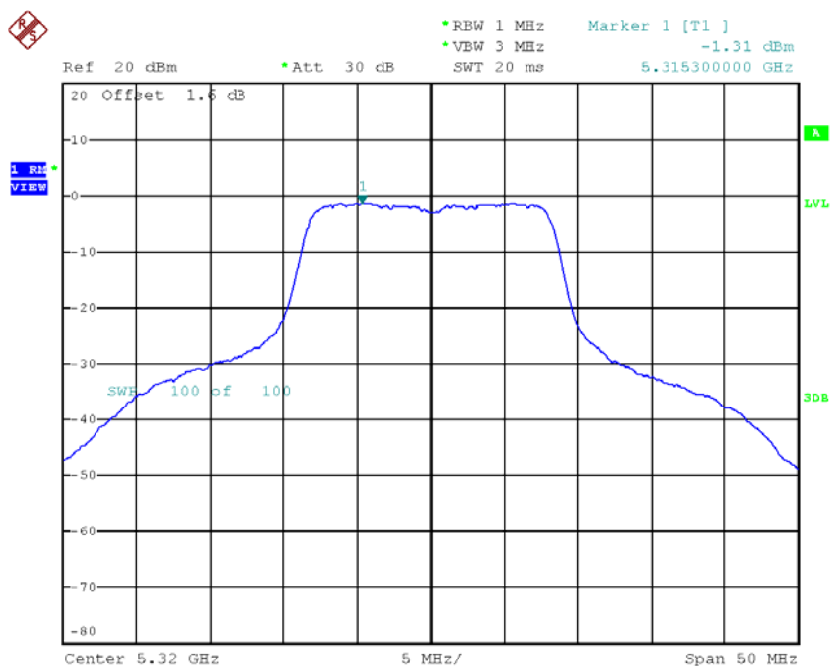


Date: 21.JUN.2016 15:45:24

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.84	8.78
CH60	5300	0.88	8.78
CH64	5320	0.84	8.78


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-5.26	0.05	-5.21	8.78
CH60	5300	-4.97	0.05	-4.92	8.78
CH64	5320	-4.99	0.05	-4.94	8.78

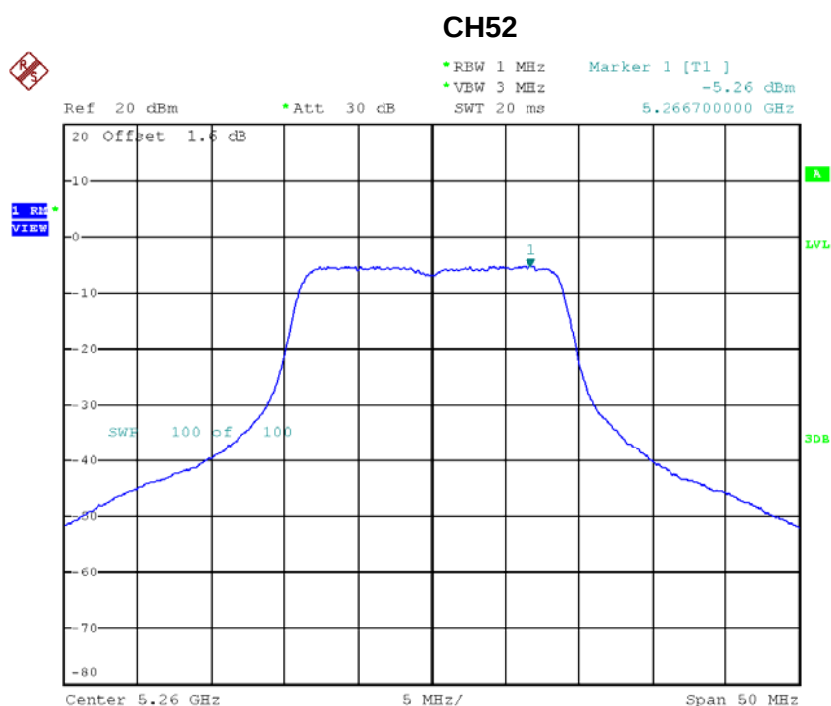


Date: 21.JUN.2016 14:35:01

CH60

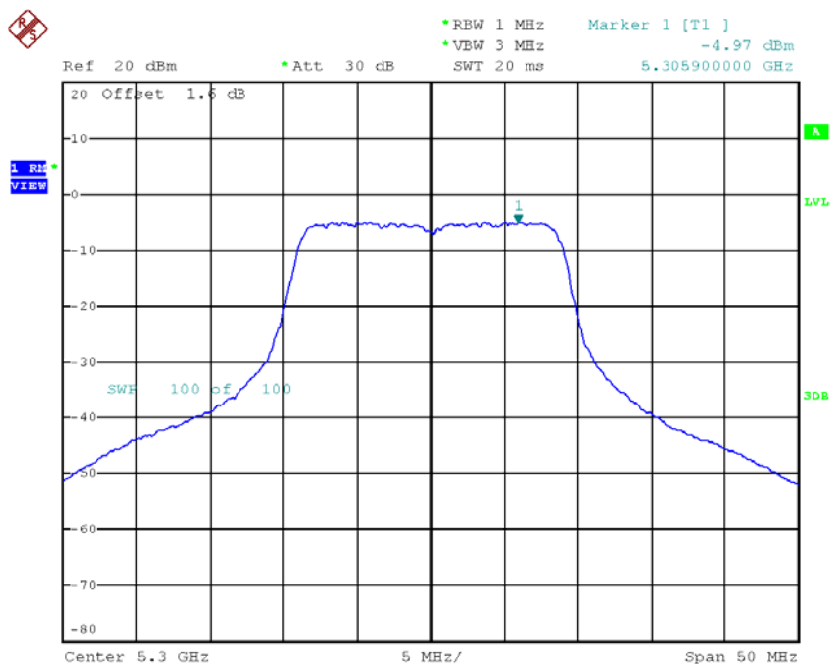

Date: 21.JUN.2016 14:36:24


CH64

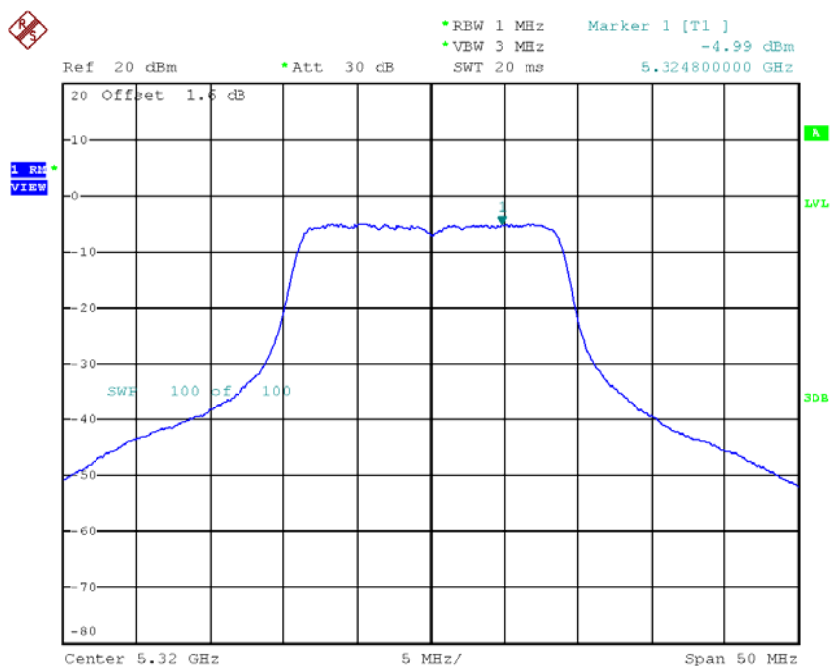

Date: 21.JUN.2016 14:37:45


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-4.08	0.05	-4.03	8.78
CH60	5300	-3.76	0.05	-3.71	8.78
CH64	5320	-3.61	0.05	-3.56	8.78

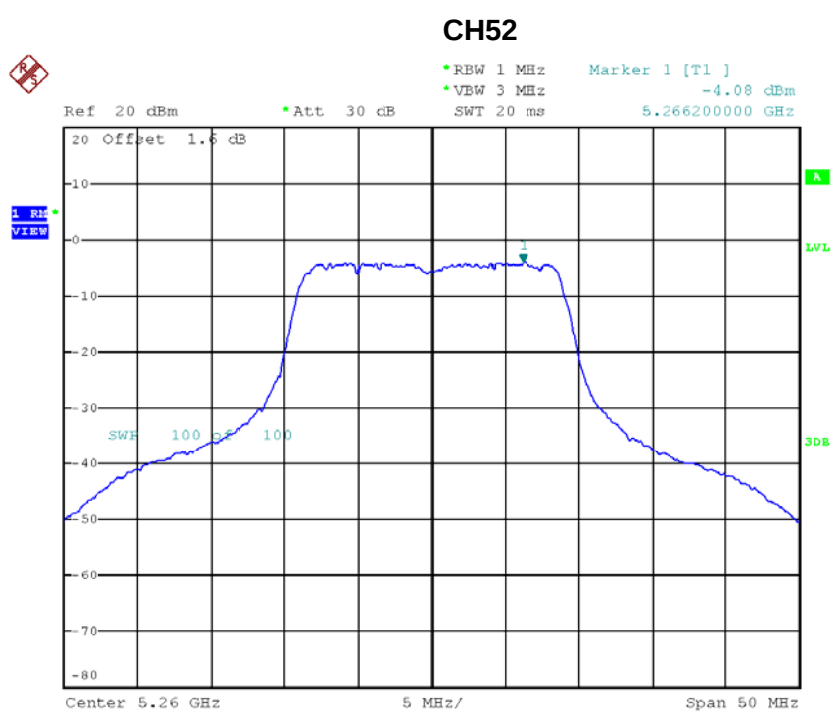


Date: 21.JUN.2016 15:47:10

CH60

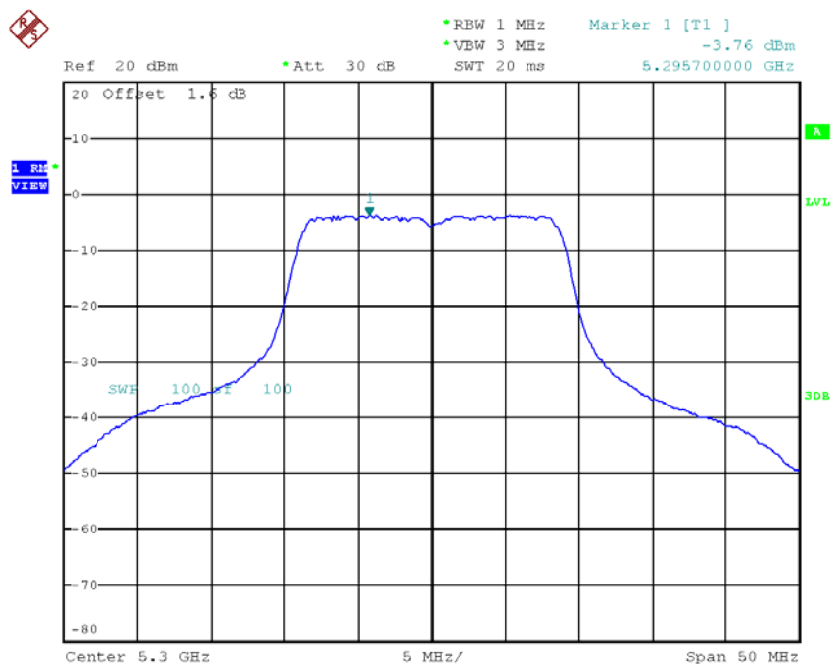

Date: 21.JUN.2016 15:51:16

CH64

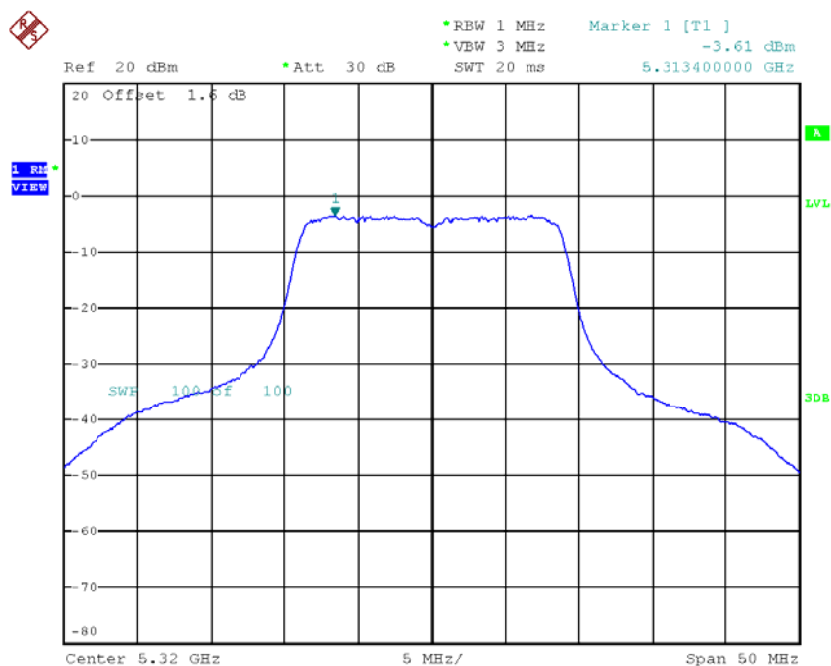

Date: 21.JUN.2016 15:52:51


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.57	8.78
CH60	5300	-1.26	8.78
CH64	5320	-1.19	8.78

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-7.88	0.23	-7.65	8.78
CH62	5310	-7.35	0.23	-7.12	8.78

CH54

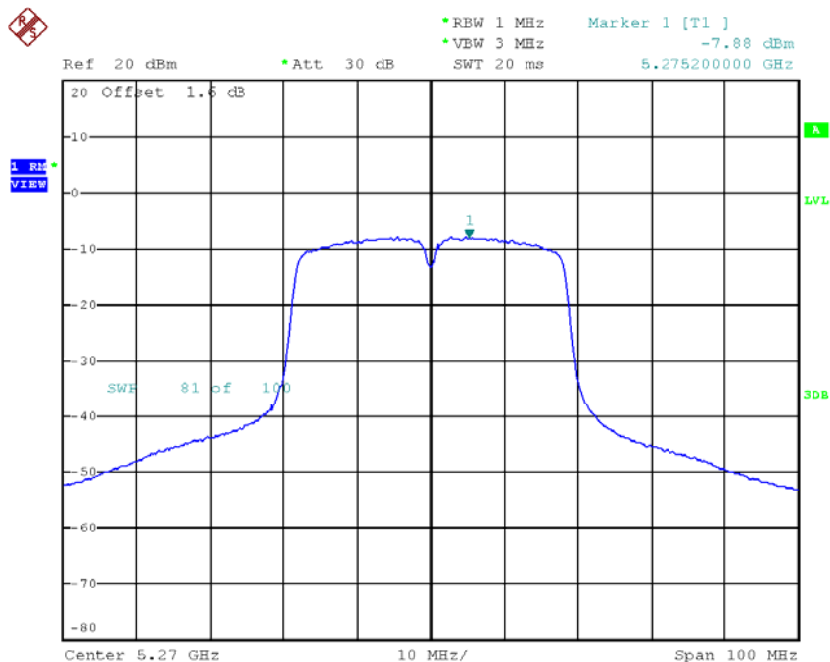

Date: 21.JUN.2016 14:39:25

CH62

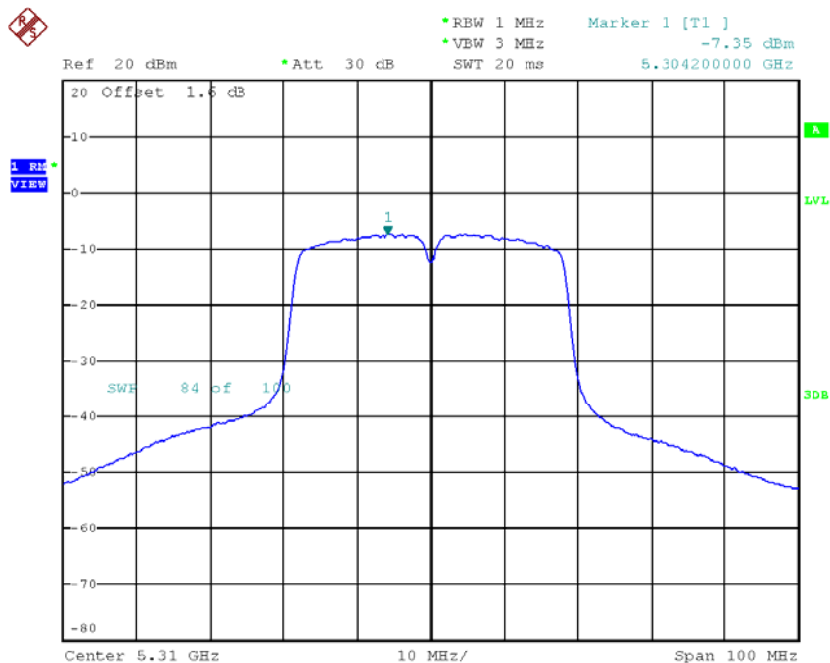


Date: 21.JUN.2016 14:41:39

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-6.32	0.23	-6.09	8.78
CH62	5310	-6.24	0.23	-6.01	8.78

CH54

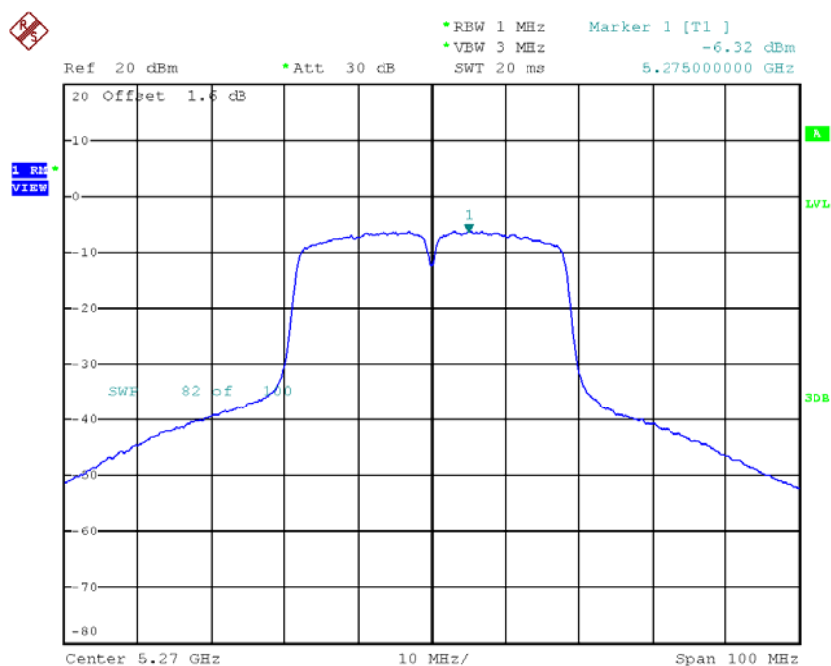

Date: 21.JUN.2016 15:54:54

CH62

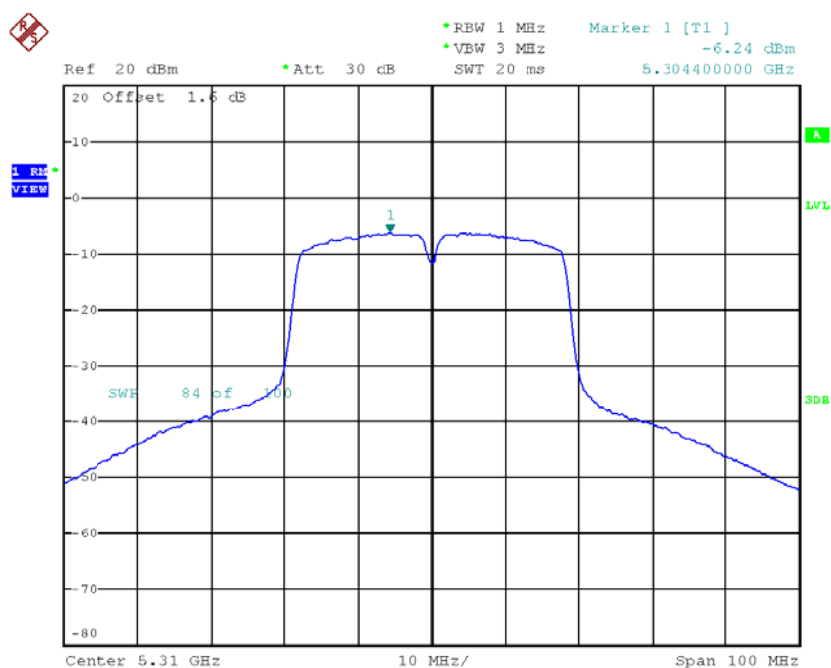

Date: 21.JUN.2016 15:56:56


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-3.79	8.78
CH62	5310	-3.52	8.78

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-4.37	0.04	-4.33	27.78
CH157	5785	-3.58	0.04	-3.54	27.78
CH165	5825	-4.25	0.04	-4.21	27.78

TX CH149

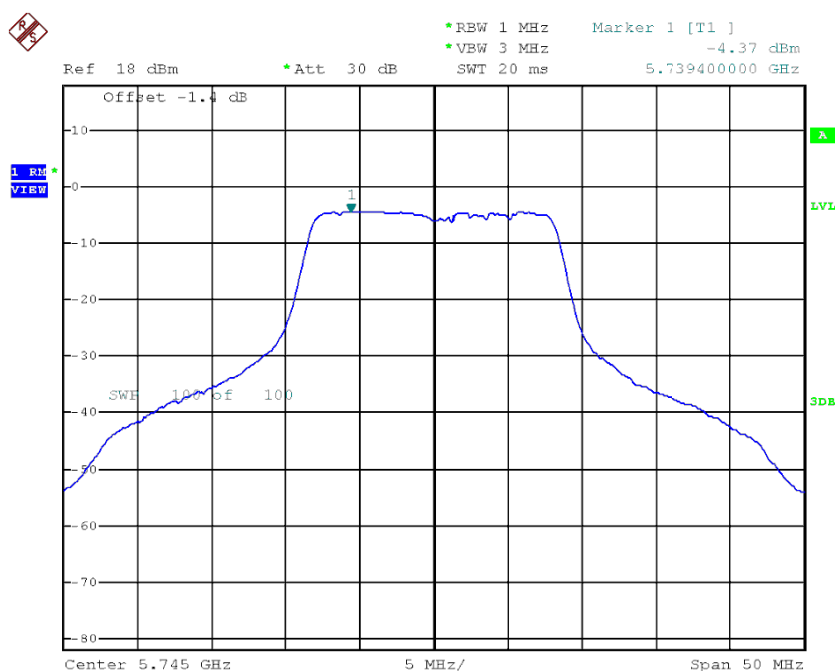


Date: 21.JUN.2016 16:03:35

TX CH157

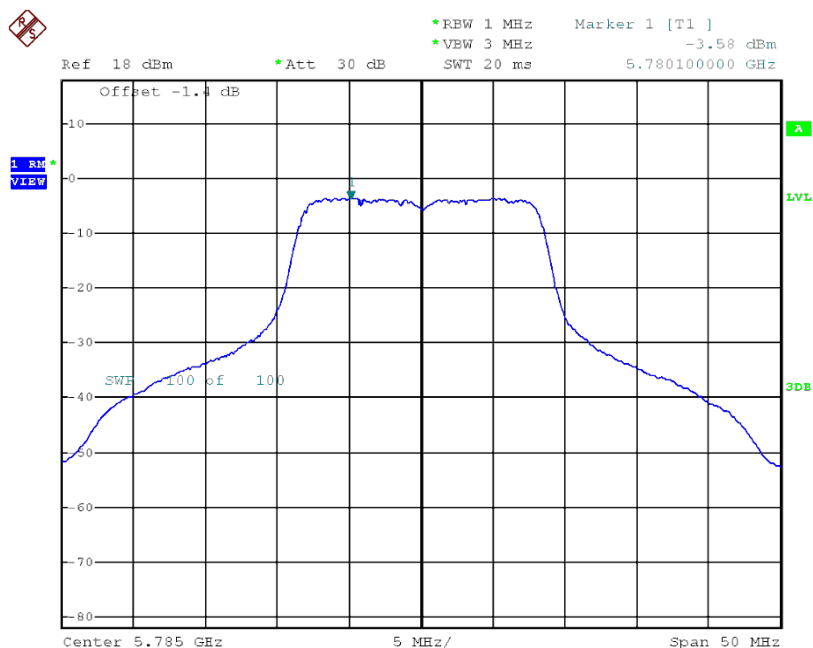

Date: 21.JUN.2016 16:06:07

TX CH165

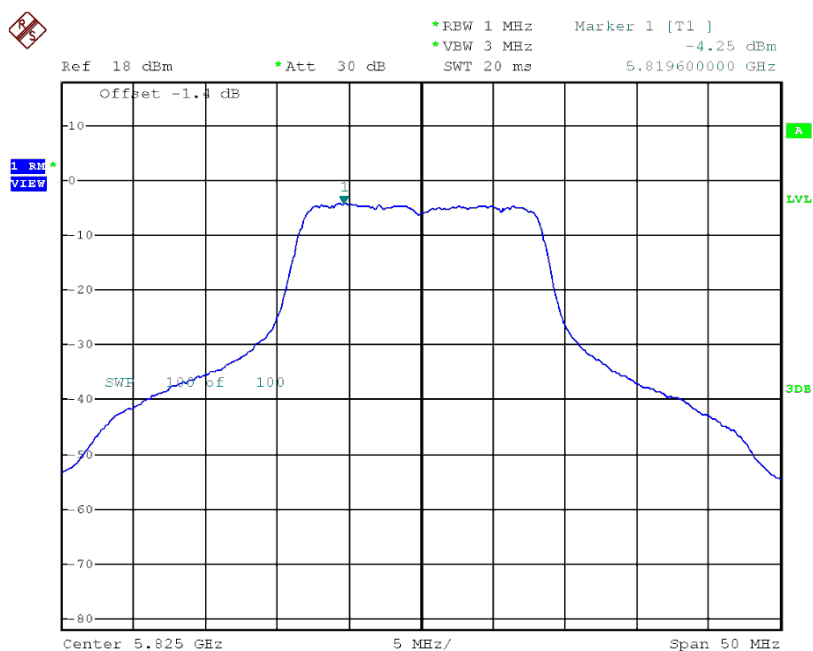


Date: 21.JUN.2016 16:07:35

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-4.81	0.04	-4.77	27.78
CH157	5785	-3.92	0.04	-3.88	27.78
CH165	5825	-4.69	0.04	-4.65	27.78

TX CH149

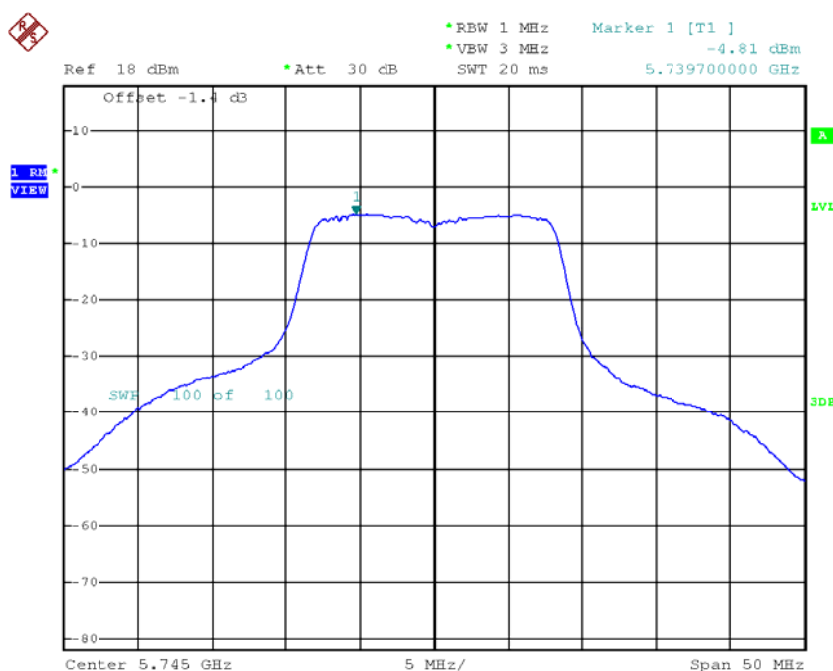


Date: 21.JUN.2016 16:27:35

TX CH157

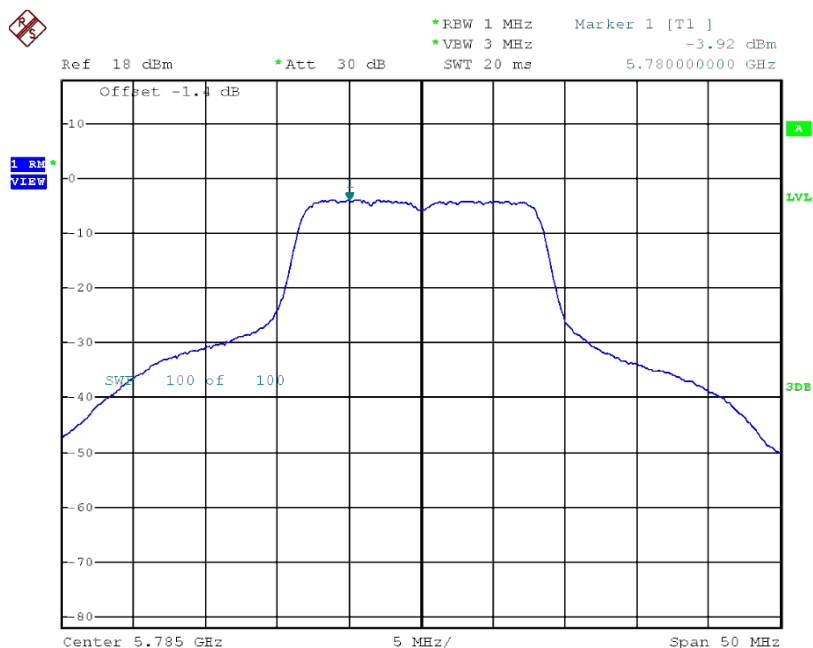

Date: 21.JUN.2016 16:30:21

TX CH165

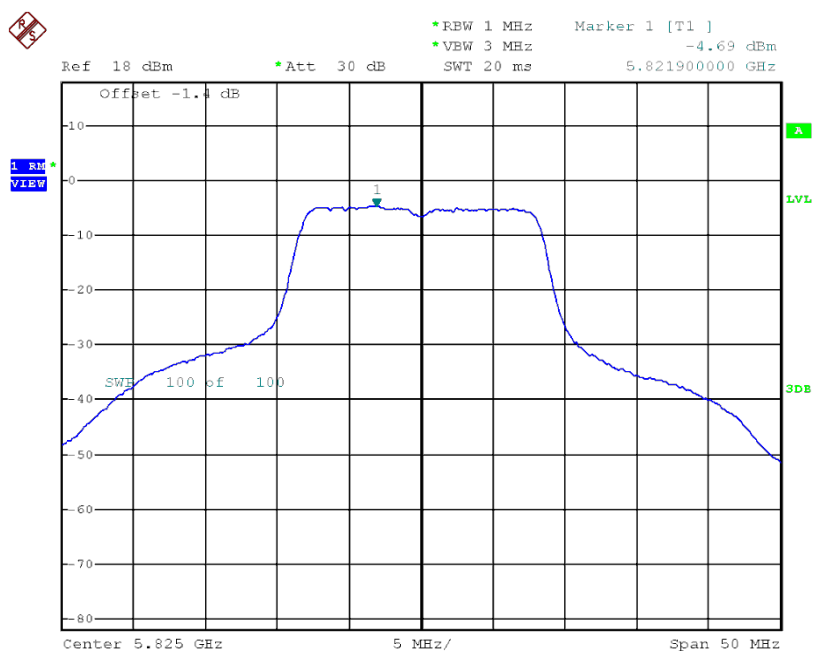

Date: 21.JUN.2016 16:32:08


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-1.53	27.78
CH157	5785	-0.70	27.78
CH165	5825	-1.41	27.78

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-6.43	0.05	-6.38	27.78
CH157	5785	-5.62	0.05	-5.57	27.78
CH165	5825	-7.43	0.05	-7.38	27.78

TX CH149

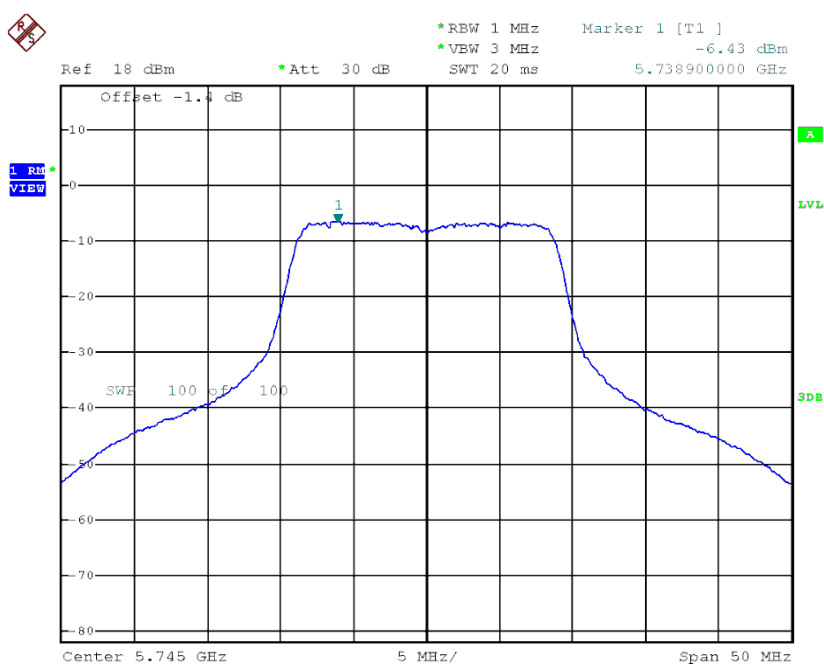


Date: 21.JUN.2016 16:09:31

TX CH157

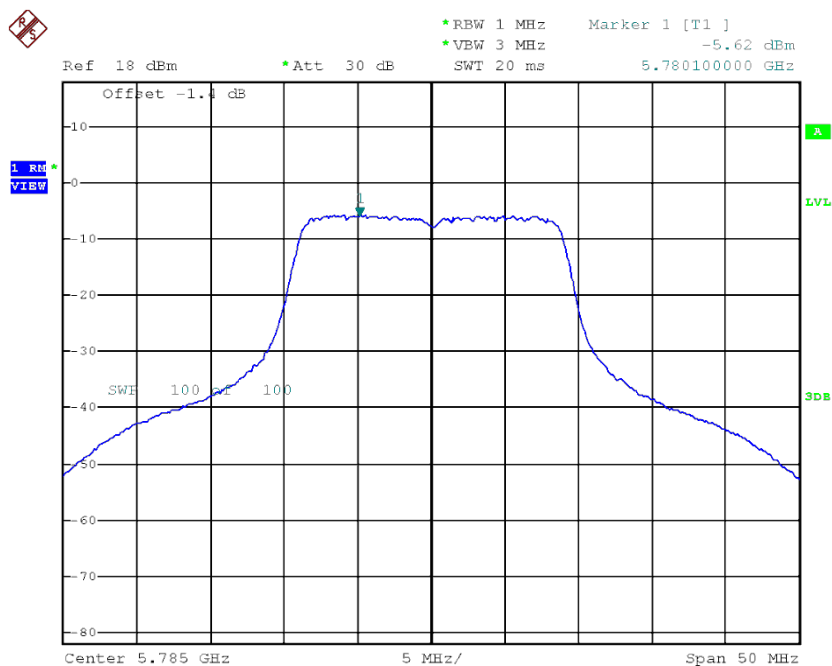

Date: 21.JUN.2016 16:11:30

TX CH165

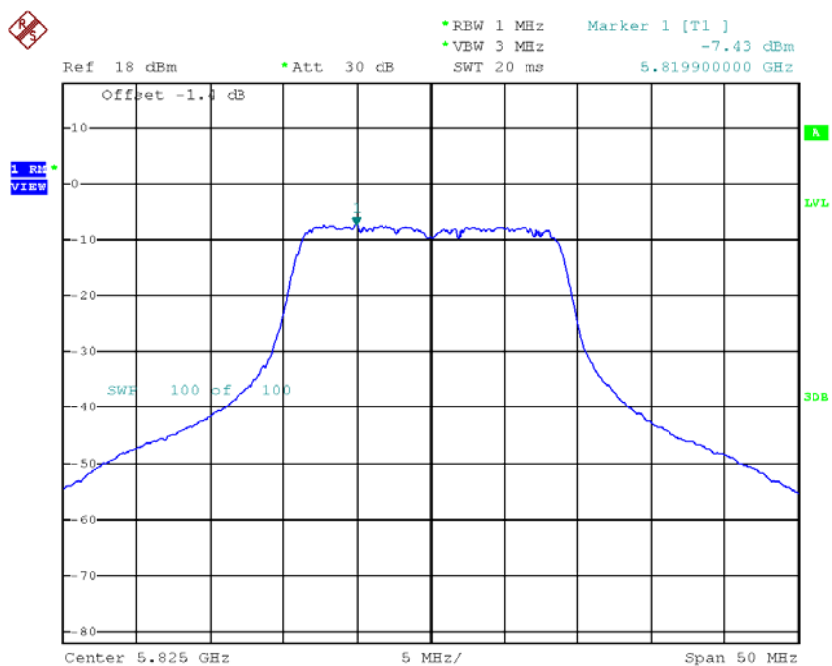


Date: 21.JUN.2016 16:16:00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-7.38	0.05	-7.33	27.78
CH157	5785	-6.15	0.05	-6.10	27.78
CH165	5825	-7.93	0.05	-7.88	27.78

TX CH149

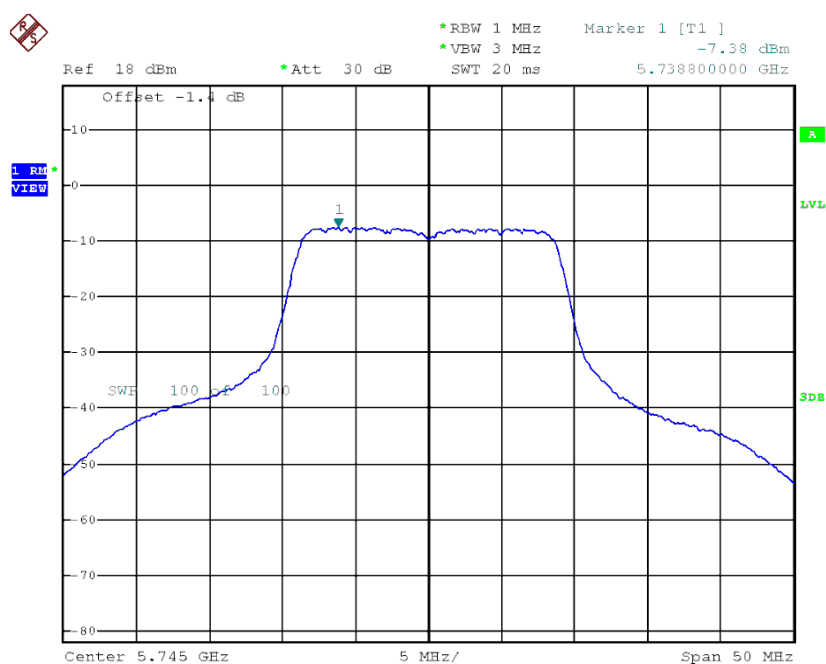


Date: 21.JUN.2016 16:34:01

TX CH157

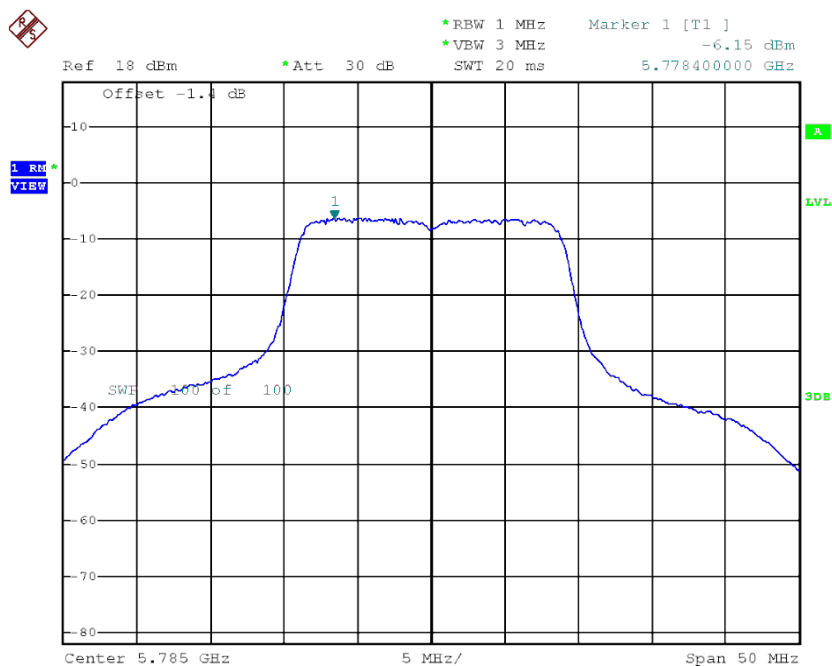

Date: 21.JUN.2016 16:35:42

TX CH165

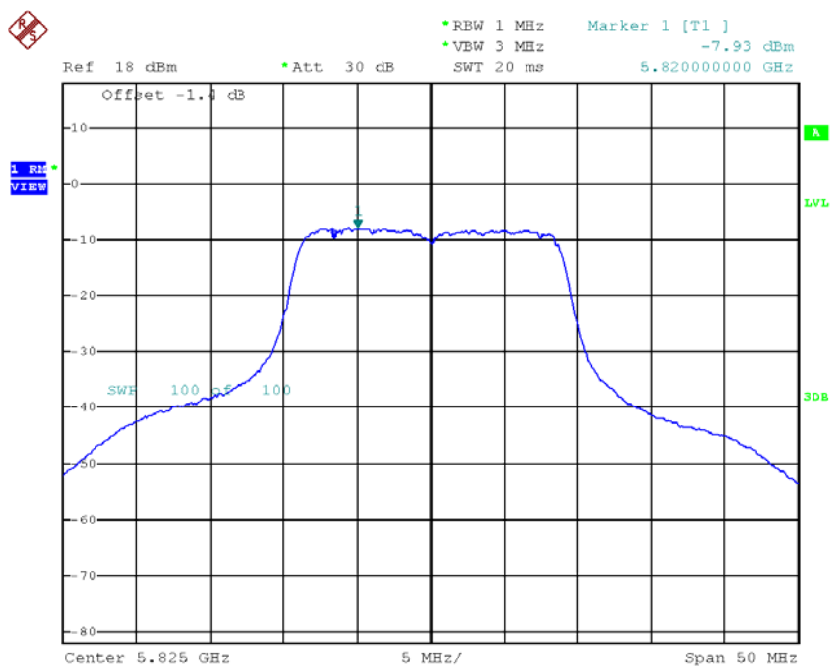

Date: 21.JUN.2016 16:49:11


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.82	27.78
CH157	5785	-2.82	27.78
CH165	5825	-4.61	27.78

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-7.86	0.23	-7.63	27.78
CH159	5795	-8.34	0.23	-8.11	27.78

TX CH151

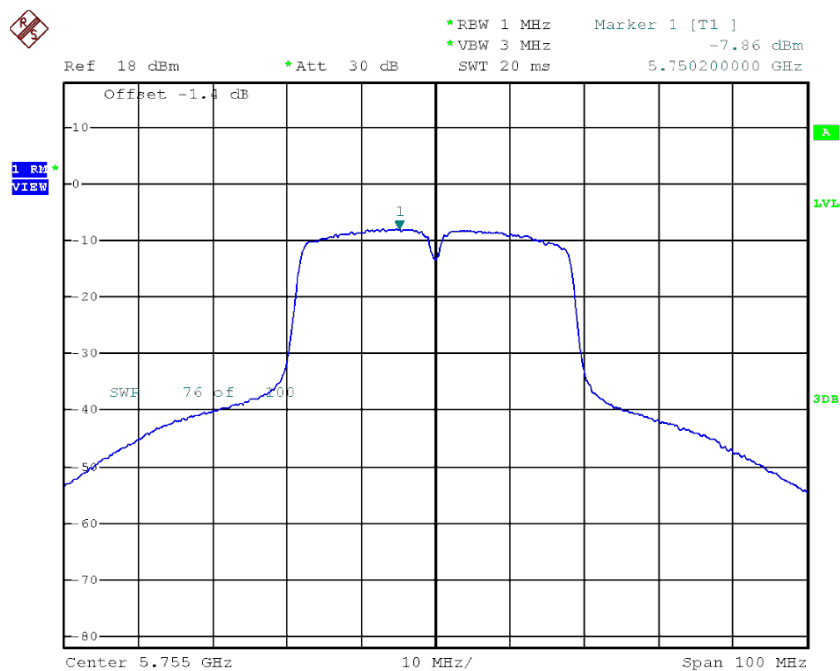

Date: 21.JUN.2016 16:19:25

TX CH159

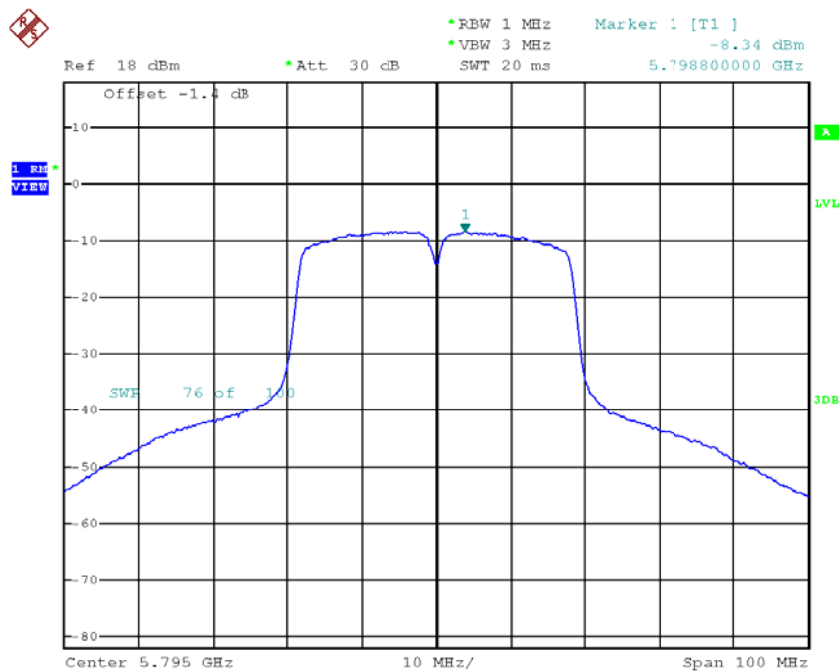


Date: 21.JUN.2016 16:23:33

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/500kHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-8.34	0.23	-8.11	27.78
CH159	5795	-8.62	0.23	-8.39	27.78

TX CH151

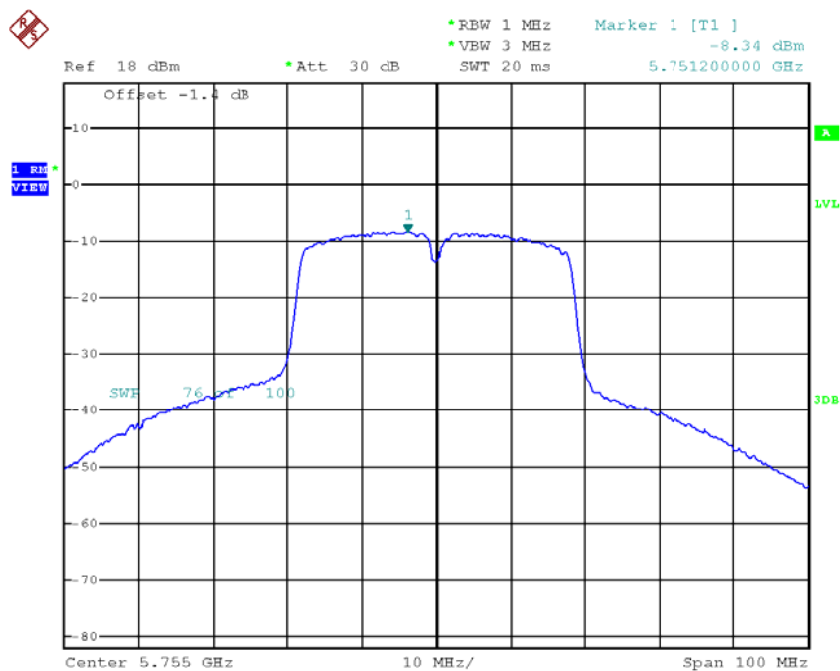

Date: 21.JUN.2016 16:51:29

TX CH159

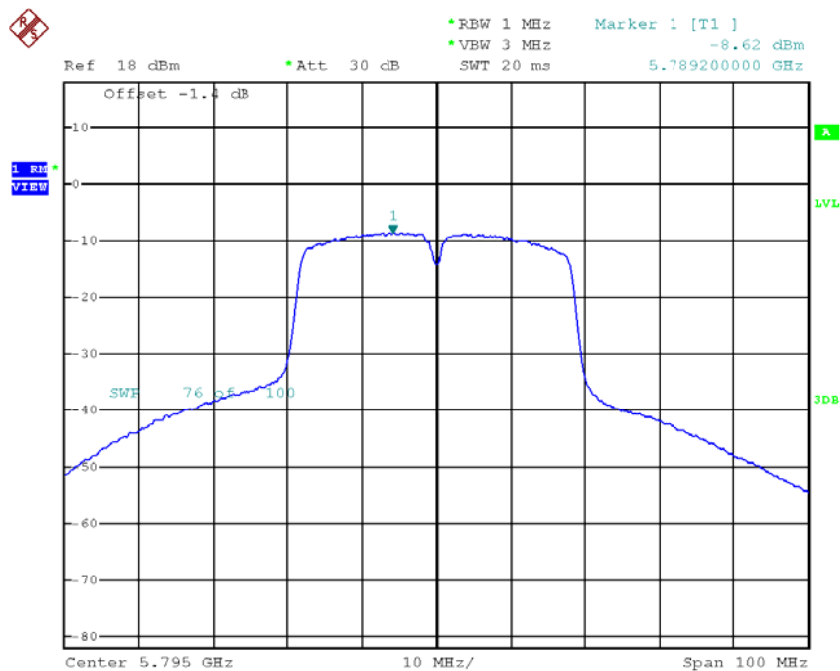

Date: 21.JUN.2016 16:54:31

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-4.85	27.78
CH159	5795	-5.24	27.78

ATTACHMENT I - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0064
120	5180.0023
108	5180.0082
Max. Deviation (MHz)	0.0082
Max. Deviation (ppm)	1.5830

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
-5	5180.0066
5	5180.0132
15	5180.0124
25	5180.0088
35	5180.0092
45	5180.0086
50	5180.0100
Max. Deviation (MHz)	0.0132
Max. Deviation (ppm)	2.5483

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0098
120	5260.0088
108	5260.0084
Max. Deviation (MHz)	0.0098
Max. Deviation (ppm)	1.8631

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-5	5260.0132
5	5260.0144
15	5260.0126
25	5260.0148
35	5260.0098
45	5260.0088
50	5260.0072
Max. Deviation (MHz)	0.0148
Max. Deviation (ppm)	2.8137

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0028
120	5745.0088
108	5745.0068
Max. Deviation (MHz)	0.0088
Max. Deviation (ppm)	1.5318

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-5	5745.0168
5	5745.0132
15	5745.0128
25	5745.0136
35	5745.0128
45	5745.0112
Max. Deviation (MHz)	0.0168
Max. Deviation (ppm)	2.9243