

FCC TEST REPORT

(PART 22)

REPORT NO.: RF130521C18

MODEL NO.: PWS-770xxxxxxxxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

FCC ID: M82-PWS-770PH

RECEIVED: Mar. 25, 2013

TESTED: Jun. 04 ~ Sep. 25, 2013

ISSUED: Sep. 26, 2013

APPLICANT: ADVANTECH CO., LTD

ADDRESS: No.1, Alley 20, Lane 26, Rueiguang Rd, Neihs District, Taipei, Taiwan 114

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 TEST SITE AND INSTRUMENTS	6
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	9
3.3 DESCRIPTION OF SUPPORT UNITS	10
3.4 TEST ITEM AND TEST CONFIGURATION	11
3.5 EUT OPERATING CONDITIONS	13
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
4 TEST TYPES AND RESULTS	14
4.1 OUTPUT POWER MEASUREMENT	14
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
4.1.2 TEST PROCEDURES	14
4.1.3 TEST SETUP	15
4.1.4 TEST RESULTS	16
4.2 FREQUENCY STABILITY MEASUREMENT	20
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	20
4.2.2 TEST PROCEDURE	20
4.2.3 TEST SETUP	20
4.2.4 TEST RESULTS	21
4.3 OCCUPIED BANDWIDTH MEASUREMENT	22
4.3.1 TEST PROCEDURES	22
4.3.2 TEST SETUP	22
4.3.3 TEST RESULTS	23
4.4 BAND EDGE MEASUREMENT	25
4.4.1 LIMITS OF BAND EDGE MEASUREMENT	25
4.4.2 TEST SETUP	25
4.4.3 TEST PROCEDURES	25
4.4.4 TEST RESULTS	26
4.5 CONDUCTED SPURIOUS EMISSIONS	28
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	28
4.5.2 TEST PROCEDURE	28
4.5.3 TEST SETUP	28
4.5.4 TEST RESULTS	29
4.6 RADIATED EMISSION MEASUREMENT	44
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	44
4.6.2 TEST PROCEDURES	44
4.6.3 DEVIATION FROM TEST STANDARD	44
4.6.4 TEST SETUP	45
4.6.5 TEST RESULTS	46
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	64
6 INFORMATION ON THE TESTING LABORATORIES	65
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	66



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130521C18	Original release	Sep. 26, 2013



A D T

1 CERTIFICATION

PRODUCT: Computer

MODEL: PWS-770xxxxxxxxxxxxxxxxxx

("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

BRAND:

ADVANTECH

APPLICANT: ADVANTECH CO., LTD

TESTED: Jun. 04 ~ Sep. 25, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC PART 22, Subpart H

The above equipment (model: PWS-770) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , **DATE** : Aug. 21, 2013
Polly Chien / Specialist

APPROVED BY : Anderson Chiu , **DATE** : Aug. 21, 2013
Anderson Chiu / Senior Engineer

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective radiated power	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.21dB at 1648.40MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

Tested date: Jun. 04 ~ Aug. 14, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2012	Dec. 24, 2013
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.3	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 22, 2013	Mar. 21, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY50266653	Oct. 08, 2012	Oct. 09, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

Tested date: Sep. 25, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 12, 2013	Sep. 11, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 23, 2013	Aug. 22, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 23, 2013	Aug. 22, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 22, 2013	Mar. 21, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY50266653	Oct. 08, 2012	Oct. 09, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Computer
MODEL NO.	PWS-770xxxxxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)
POWER SUPPLY	19Vdc (Adapter or cradle) 11.1Vdc (Battery)
MODULATION TYPE	GPRS, EDGE: GMSK WCDMA, HSDPA, HSUPA: BPSK
FREQUENCY RANGE	GPRS, EDGE: 824.2MHz ~ 848.8MHz WCDMA, HSDPA, HSUPA: 826.4MHz ~ 846.6MHz
MAX. ERP POWER	GPRS: 503.50Mw (27.02dBm) EDGE: 122.18Mw (20.87dBm) WCDMA: 41.78mW (16.21dBm)
ANTENNA TYPE	PIFA antenna with -3.79dBi gain
ANTENNA CONNECTOR	IPEX
I/O PORTS	Refer to users' manual
DATA CABLE	N/A
ACCESSORY DEVICES	Adapter, Cradle, Stylus, Battery

NOTE:


- The EUT contains the following accessories.

No.	Product	Brand	Model	Description
1	Adapter	FSP GROUP INC.	FSP065-RAB	Input: 100-240Vac, 1.5A, 50-60Hz Output: 19Vdc, 3.42A Power Line: 1.5m cable with 1 core attached on adapter
2	Battery Pack	Joules	1760001576	Rating: 11.1Vdc, 1880mA, 20.87Wh Type: Li-ion
3	Cradle 1	ADVANTECH	pws-770 cradle	Rating: 19Vdc, 3.42A
4	Cradle 2	ADVANTECH	pws-770 vehicle cradle	Rating: 18.5Vdc, 4.9A


- HW version is PCB PWS-770 MB A101-4
- SW version is Image WIN7 pro PWS-770 V1.0 ENG
- The above EUT information is declared by manufacturer and for more detailed feature description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A, B

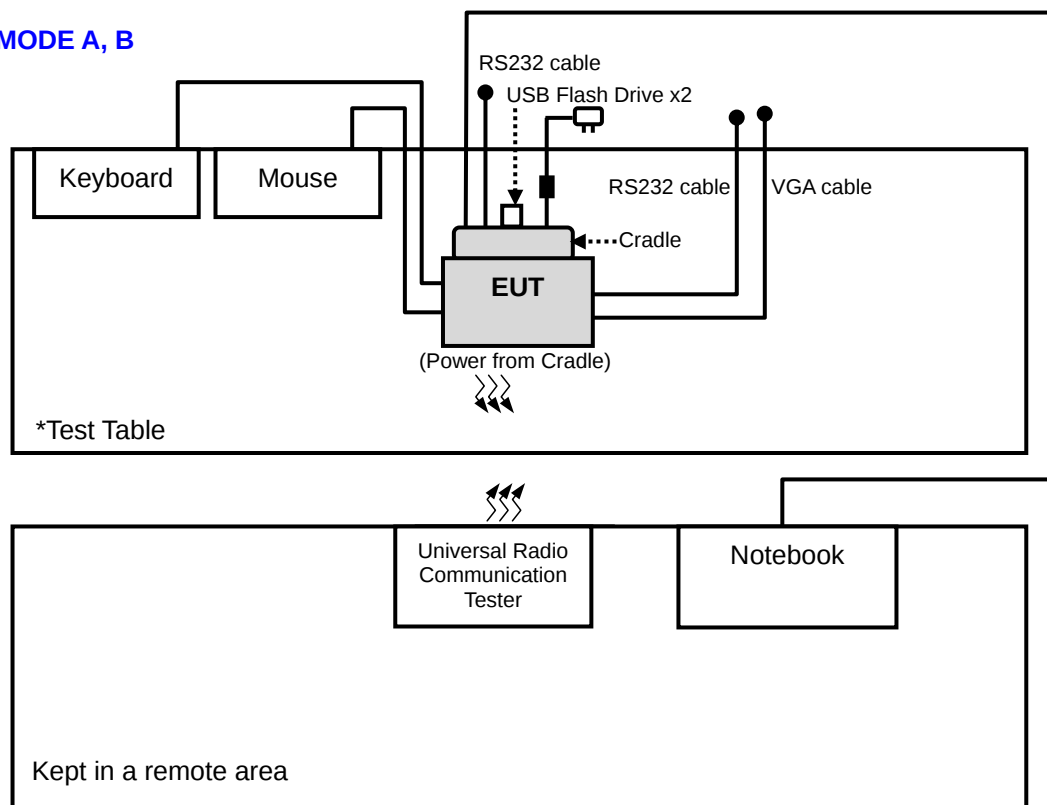

TEST MODE C

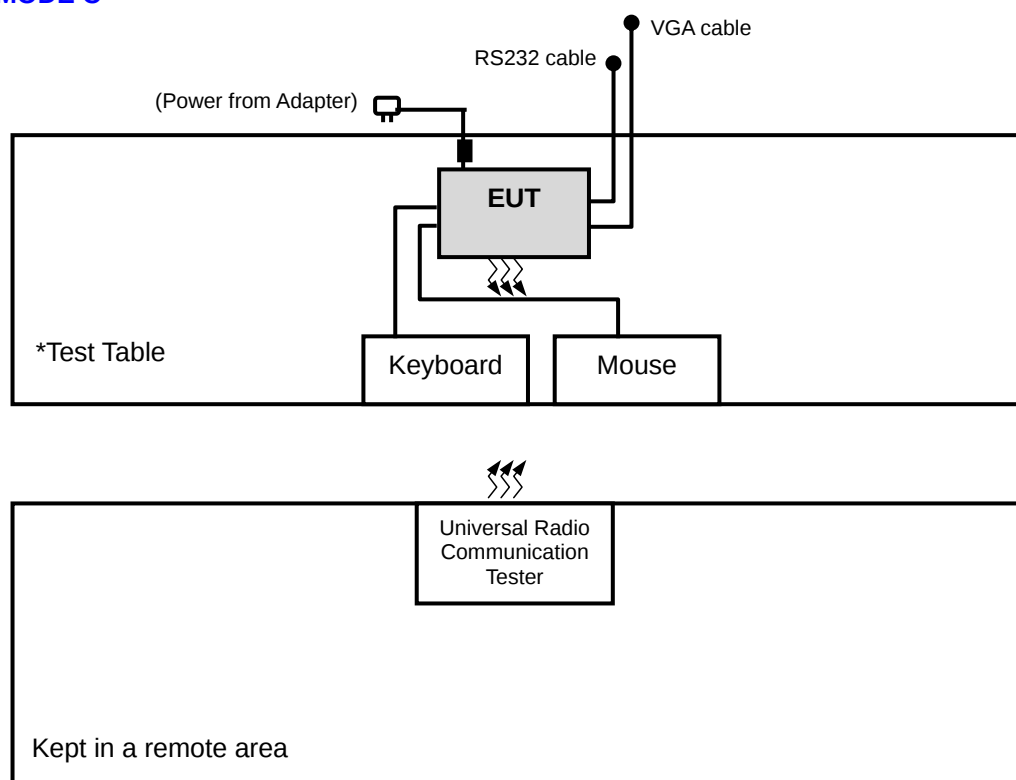



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	KEYBOARD	DELL	KB4021	CN-05V23T-71581-1AK-01Q2-A01	FCC DoC Approved
2	MOUSE	DELL	MS111-P	CN-011D3V-71581-1CJ-019E	FCC DoC Approved
3	USB FLASH DRIVE	Transcend	V85	538455 4490	NA
4	USB FLASH DRIVE	Transcend	V85	538455 4489	NA
5	NOTEBOOK	DELL	E5410	6RP2YM1	FCC DoC Approved
6	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	123112	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m foil shielded wire, USB connector, w/o core
2	1.8m foil shielded wire, USB connector, w/o core
3	NA
4	NA
5	10m RJ45cable, w/o core
6	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 5-6 acted as communication partners to transfer data.

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

Test Mode	Test Condition
A	Power from cradle 1
B	Power from cradle 2
C	Power from adapter (without cradle)

GPRS MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	128 to 251	128, 189, 251	GPRS, EDGE
B	FREQUENCY STABILITY	128 to 251	189	GPRS, EDGE
A	OCCUPIED BANDWIDTH	128 to 251	128, 189, 251	GPRS, EDGE
A	BAND EDGE	128 to 251	128, 251	GPRS, EDGE
A	CONDUCTED EMISSION	128 to 251	128, 189, 251	GPRS, EDGE
A, B, C	RADIATED EMISSION BELOW 1GHz	128 to 251	128	GPRS, EDGE
A	RADIATED EMISSION ABOVE 1GHz	128 to 251	128, 189, 251	GPRS, EDGE

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4182	WCDMA
A	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
A	BAND EDGE	4132 to 4233	4132, 4233	WCDMA, HSDPA, HSUPA
A	CONDUCTED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
A, B, C	RADIATED EMISSION BELOW 1GHz	4132 to 4233	4132	WCDMA
A	RADIATED EMISSION ABOVE 1GHz	4132 to 4233	4132, 4182, 4233	WCDMA

**A D T****TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	21deg. C, 67%RH 25deg. C, 67%RH	120Vac, 60Hz	Alan Wu
FREQUENCY STABILITY	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
OCCUPIED BANDWIDTH	26deg. C, 65%RH	120Vac, 60Hz	Match Tsui
BAND EDGE	26deg. C, 65%RH	120Vac, 60Hz	Match Tsui
CONDCUDED EMISSION	26deg. C, 65%RH	120Vac, 60Hz	Match Tsui
RADIATED EMISSION BELOW 1GHz	23deg. C, 74%RH	120Vac, 60Hz	Alan Wu
	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
RADIATED EMISSION ABOVE 1GHz	21deg. C, 67%RH 25deg. C, 67%RH	120Vac, 60Hz	Alan Wu

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with GPRS & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

EIRP / ERP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GPRS/EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}.$


4.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:

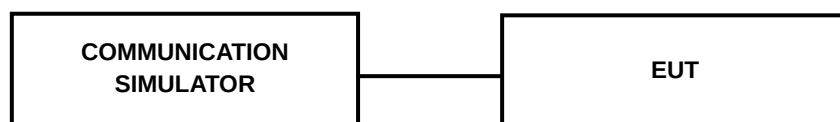

For the actual test configuration, please refer to the attached file (Test Setup Photo).

EIRP / ERP MEASUREMENT:

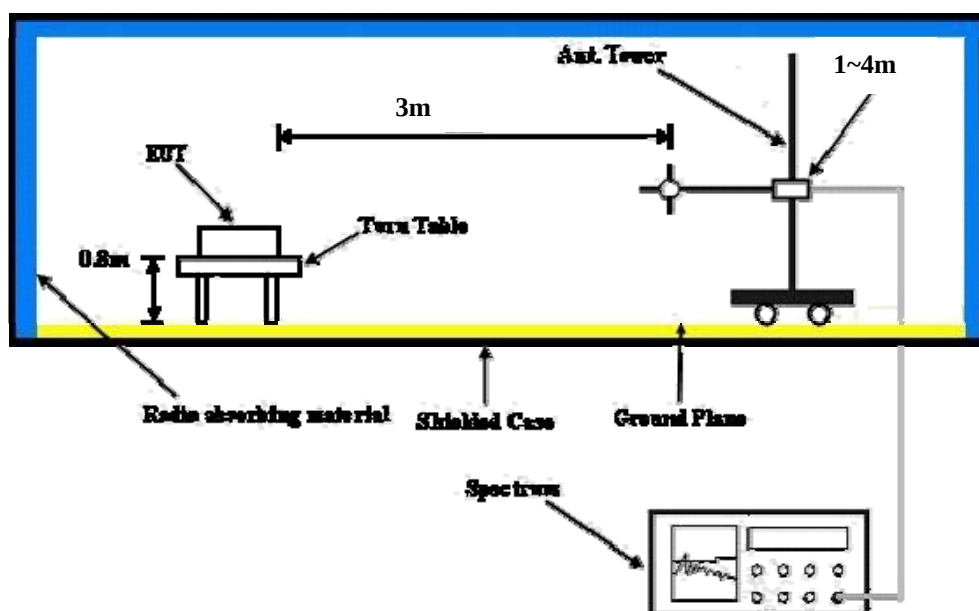

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GPRS850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GPRS 8	32.86	33.14	32.64
GPRS 10	29.34	29.62	29.12
EDGE 8	26.55	26.83	26.33
EDGE 10	23.52	23.80	23.30

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	22.26	22.35	22.27
HSDPA Subtest-1	21.26	21.35	21.27
HSDPA Subtest-2	21.33	21.42	21.34
HSDPA Subtest-3	20.83	20.92	20.84
HSDPA Subtest-4	21.32	21.41	21.33
HSUPA Subtest-1	22.18	22.27	22.19
HSUPA Subtest-2	21.13	21.22	21.14
HSUPA Subtest-3	19.98	20.07	19.99
HSUPA Subtest-4	20.43	20.52	20.44
HSUPA Subtest-5	21.07	21.16	21.08

ERP POWER (dBm)

FOR GPRS MODE:

MODE		TX channel 128					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.2	-4.20	27.01	0.01	27.02	38.45	-11.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.2	-8.81	20.50	0.01	20.51	38.45	-17.94

MODE		TX channel 189					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-3.71	26.59	0.29	26.88	38.45	-11.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-9.56	20.27	0.29	20.56	38.45	-17.89

MODE		TX channel 251					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.8	-4.12	26.08	0.51	26.59	38.45	-11.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.8	-11.06	19.70	0.51	20.21	38.45	-18.24

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR EDGE MODE:

MODE		TX channel 128					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.2	-10.35	20.86	0.01	20.87	38.45	-17.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.2	-14.94	14.37	0.01	14.38	38.45	-24.07

MODE		TX channel 189					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-9.86	20.44	0.29	20.73	38.45	-17.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-15.77	14.06	0.29	14.35	38.45	-24.10

MODE		TX channel 251					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.8	-10.25	19.95	0.51	20.46	38.45	-17.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.8	-17.09	13.67	0.51	14.18	38.45	-24.27

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA MODE:

MODE		TX channel 4132					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	826.4	-14.90	16.15	0.06	16.21	38.45	-22.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	826.4	-19.51	9.89	0.06	9.95	38.45	-28.50

MODE		TX channel 4182					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-14.53	15.77	0.29	16.06	38.45	-22.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.4	-20.51	9.32	0.29	9.61	38.45	-28.84

MODE		TX channel 4233					
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	846.6	-14.86	15.36	0.47	15.83	38.45	-22.62
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	846.6	-21.84	8.76	0.47	9.23	38.45	-29.22

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

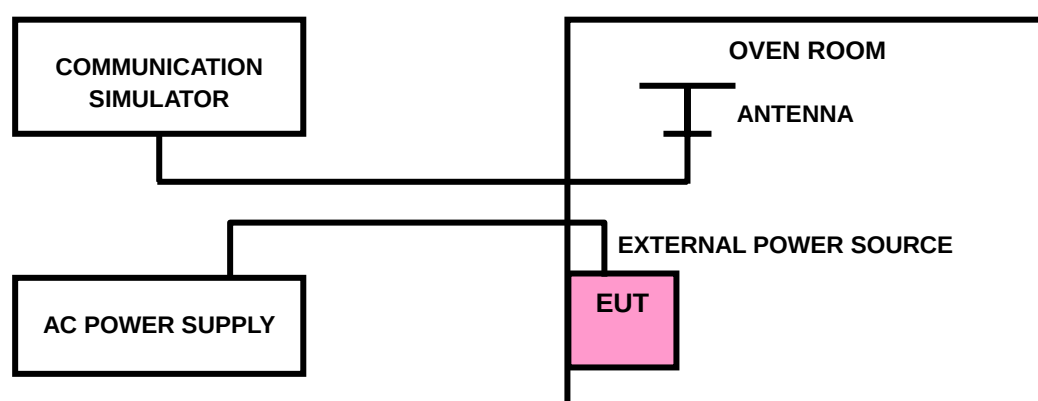

4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GPRS	EDGE	WCDMA	
132	-0.023	-0.025	-0.037	2.5
120	-0.014	-0.019	-0.025	2.5
108	-0.018	-0.023	-0.033	2.5

NOTE: The applicant defined the normal working voltage of the adapter is from 108Vac to 132Vac.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GPRS	EDGE	WCDMA	
50	-0.035	-0.042	-0.045	2.5
40	-0.037	-0.044	-0.037	2.5
30	-0.029	-0.020	-0.033	2.5
20	-0.014	-0.023	-0.025	2.5
10	-0.023	-0.031	-0.035	2.5
0	-0.033	-0.041	-0.044	2.5
-10	-0.044	-0.036	-0.054	2.5
-20	-0.054	-0.042	-0.054	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.3.2 TEST SETUP

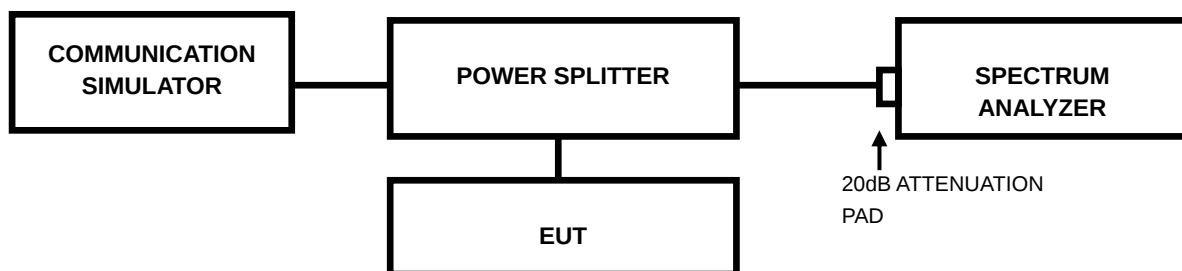

4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQ. (MHz)	99% OCCUPIED BANDWIDTH (MHz)		
		GPRS	EDGE			WCDMA	HSDPA	HSUPA
128	824.2	255.0	250.0	4132	826.4	4.12	4.12	4.15
189	836.4	255.0	250.0	4182	836.4	4.15	4.13	4.13
251	848.8	255.0	250.0	4233	846.6	4.13	4.15	4.15

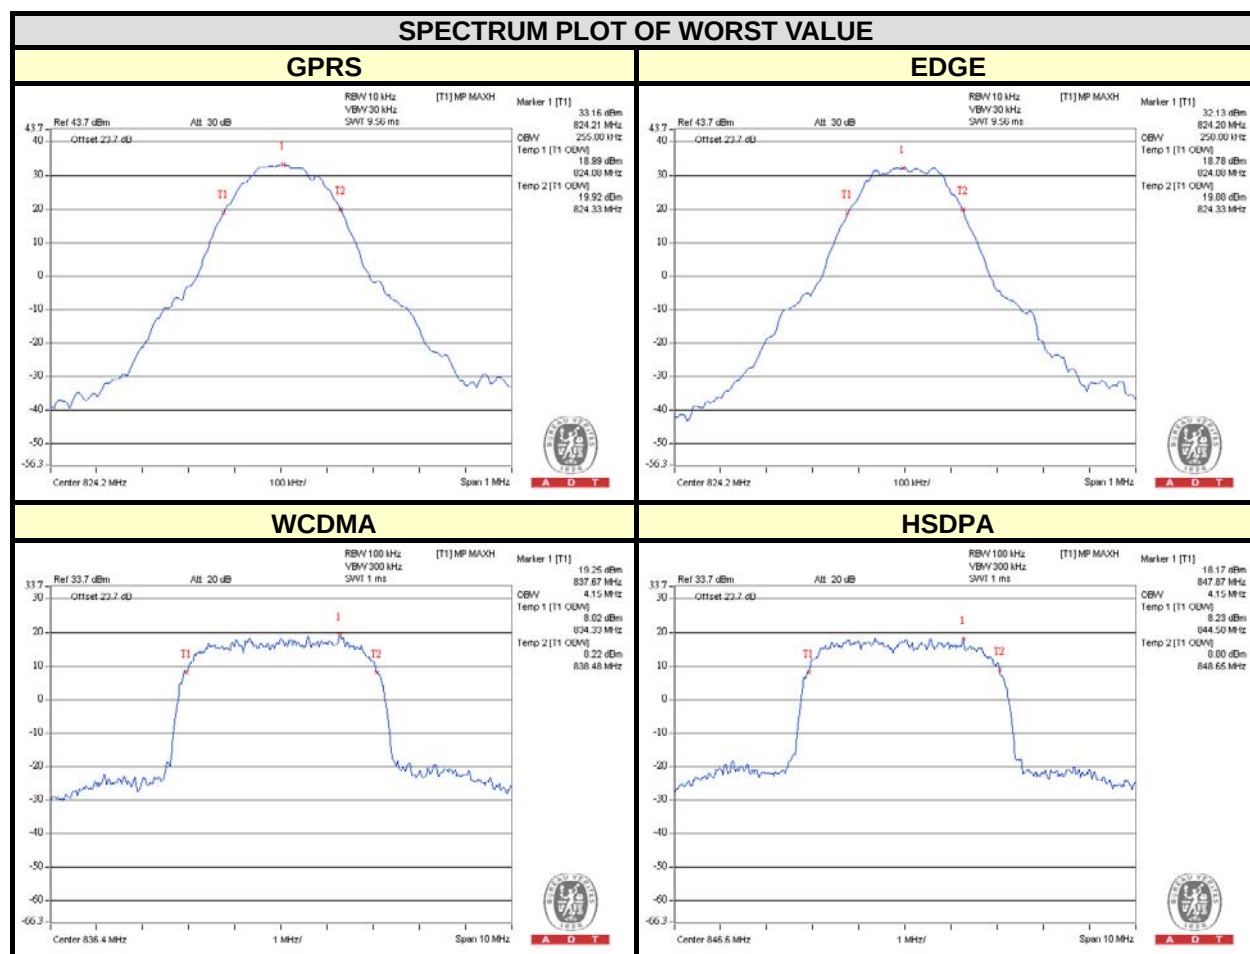

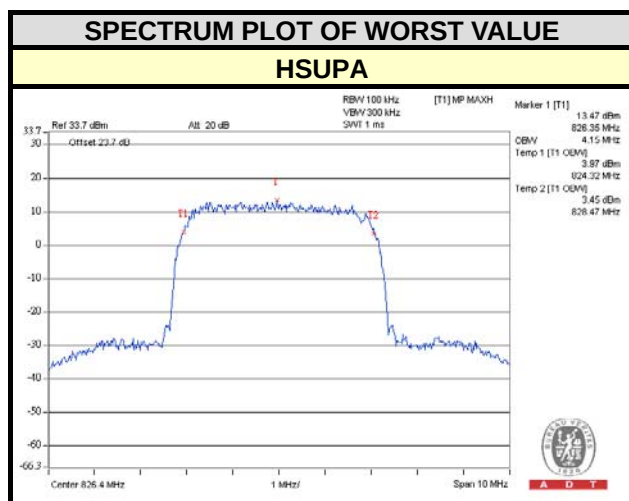


4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 TEST SETUP

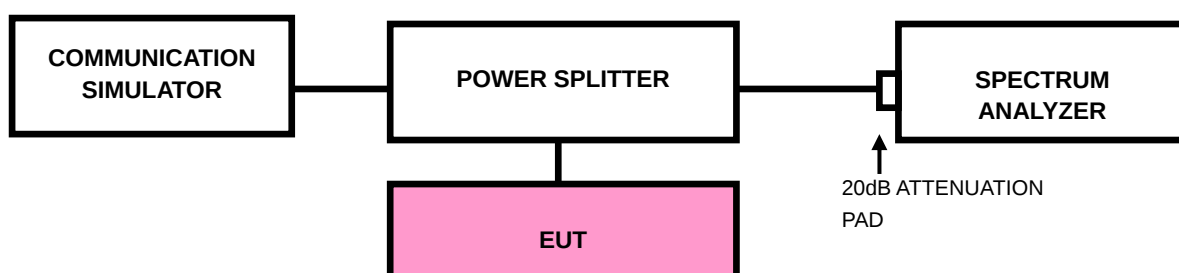


4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GPRS/ EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA/HSDPA/HSUPA).
- Record the max trace plot into the test report.


4.4.4 TEST RESULTS

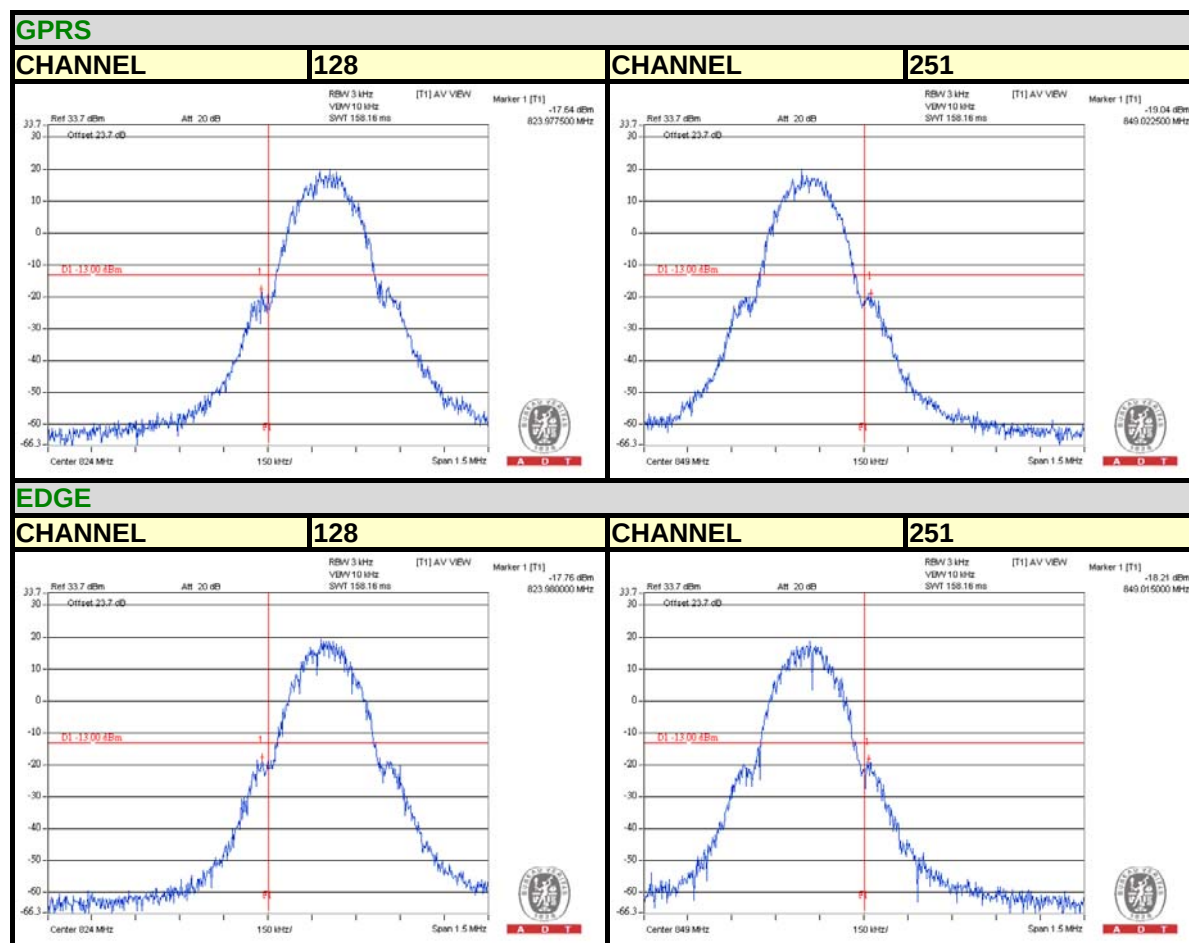


WCDMA

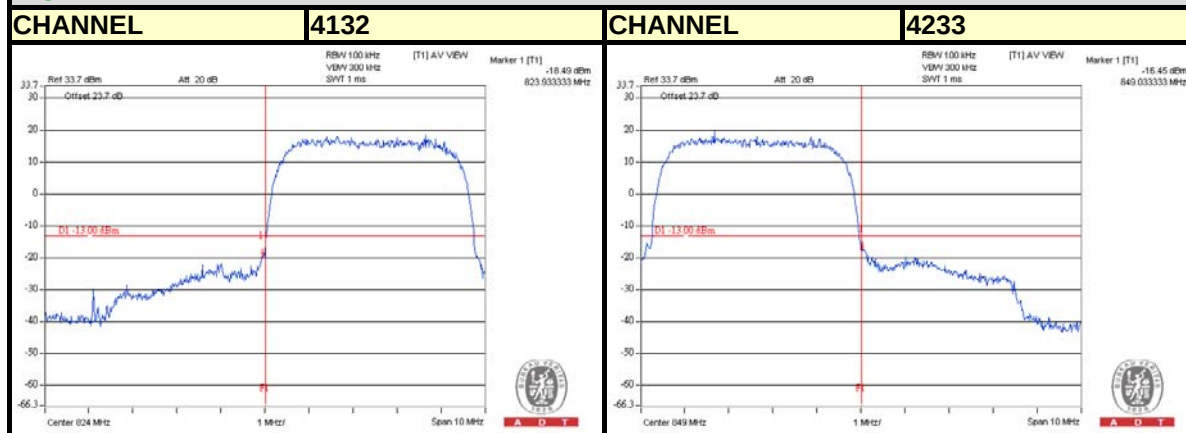

HSDPA

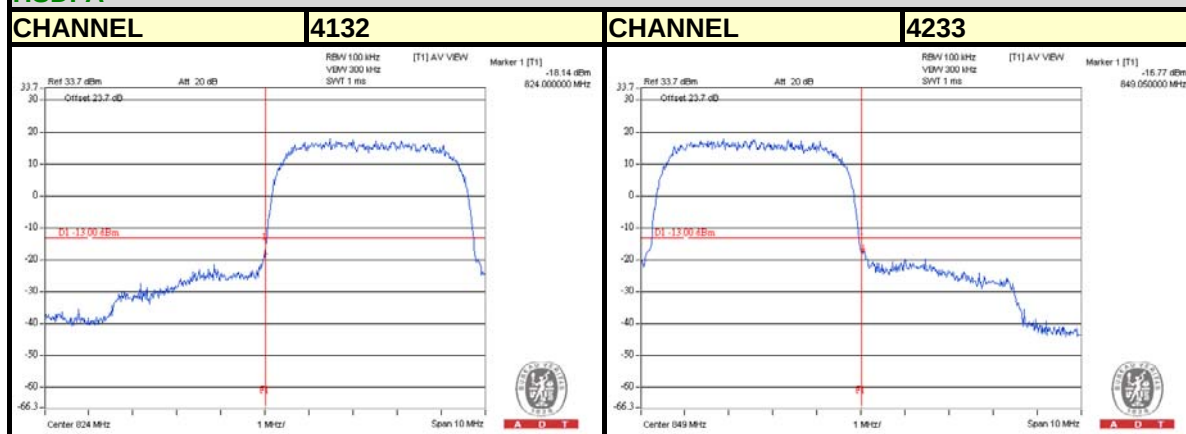

HSUPA

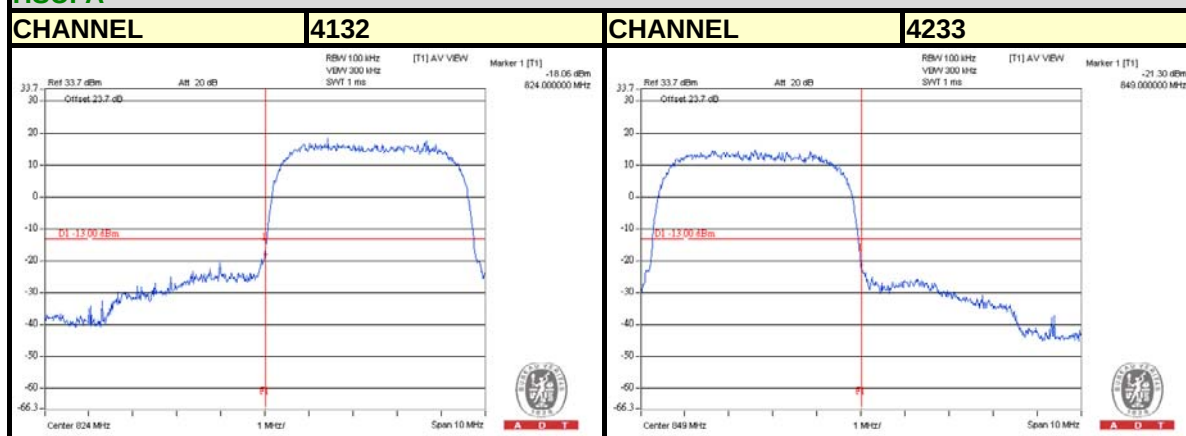

4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

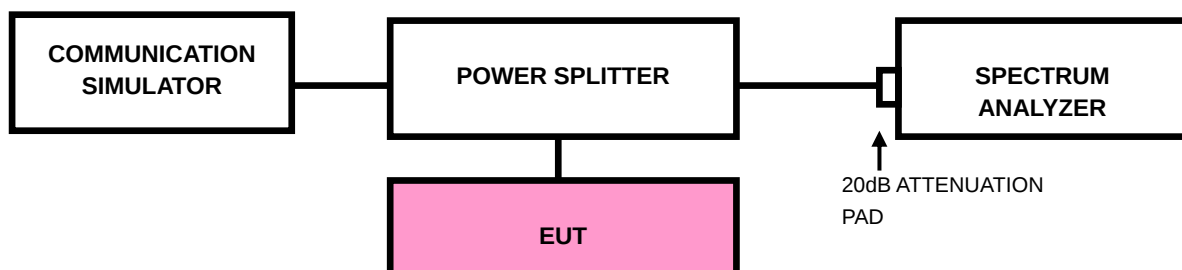


4.5.4 TEST RESULTS


GPRS

CHANNEL 128


FREQUENCY RANGE : 9kHz~1GHz

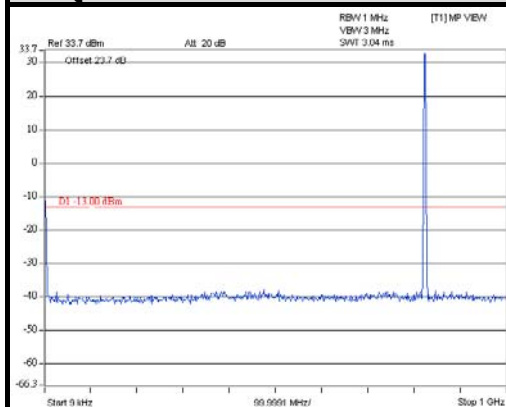


FREQUENCY RANGE : 1GHz~4GHz

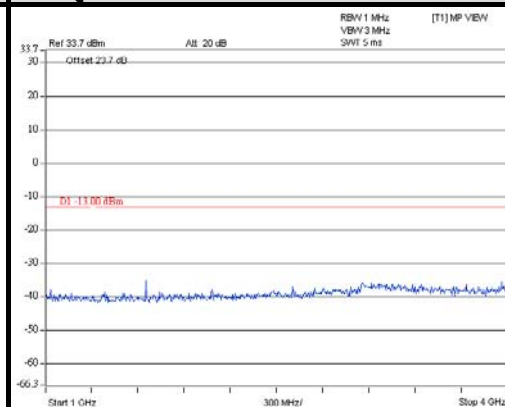

FREQUENCY RANGE : 4GHz~7GHz

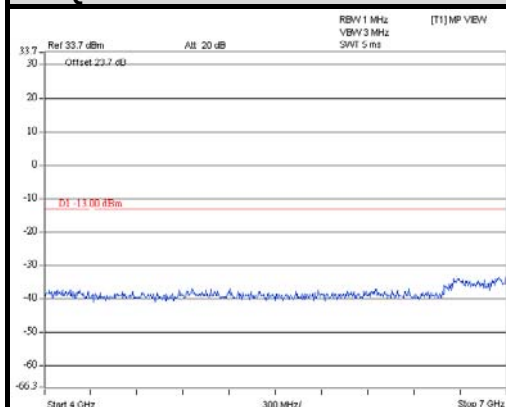


FREQUENCY RANGE : 7GHz~9GHz

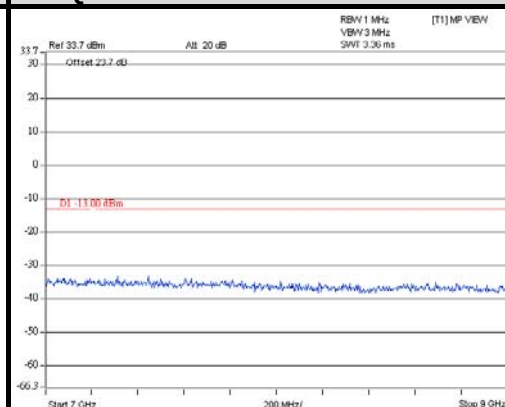


GPRS

CHANNEL 189


FREQUENCY RANGE : 9kHz~1GHz

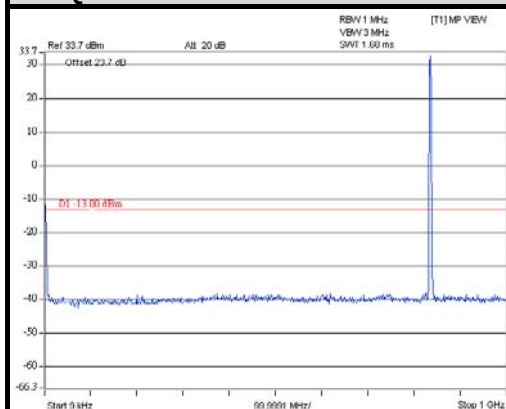


FREQUENCY RANGE : 1GHz~4GHz

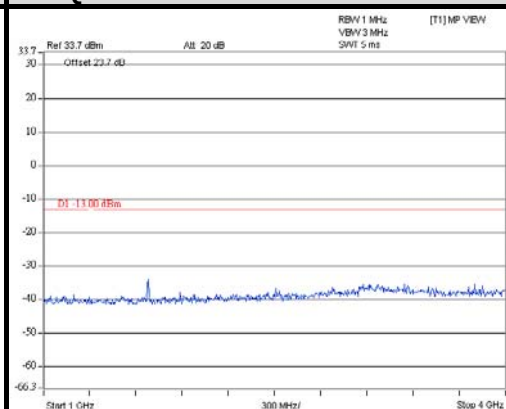

FREQUENCY RANGE : 4GHz~7GHz

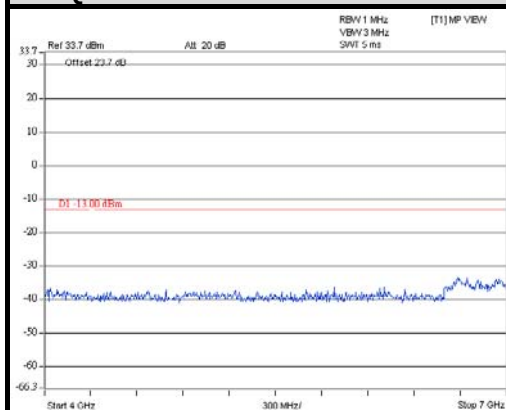


FREQUENCY RANGE : 7GHz~9GHz

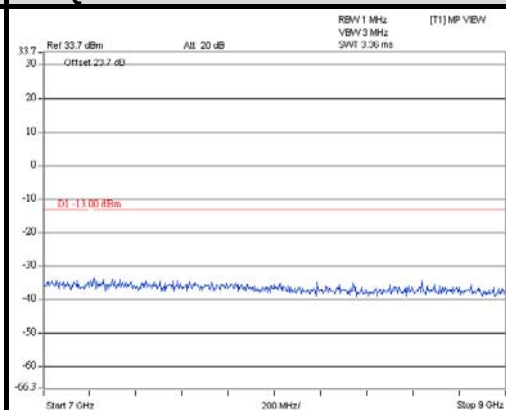

GPRS


CHANNEL 251

FREQUENCY RANGE : 9kHz~1GHz

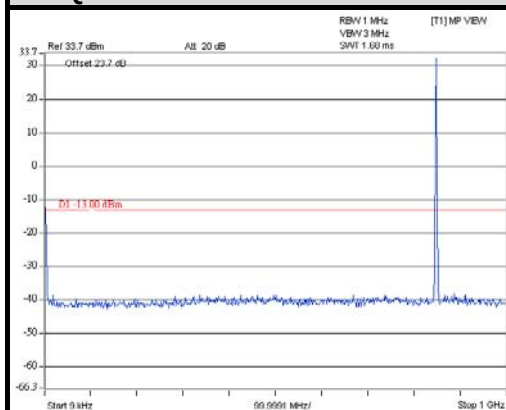


A D T

FREQUENCY RANGE : 1GHz~4GHz

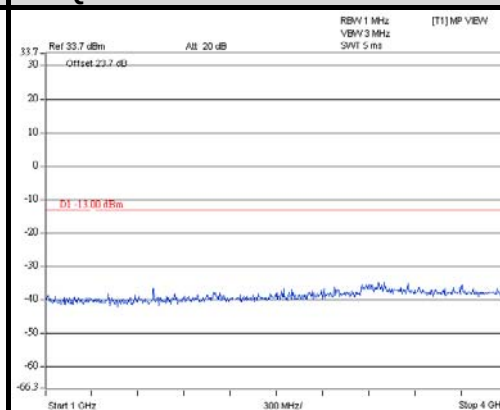


A D T

FREQUENCY RANGE : 4GHz~7GHz

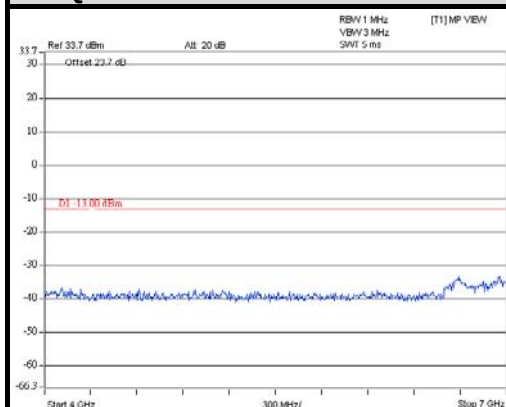

A D T

FREQUENCY RANGE : 7GHz~9GHz

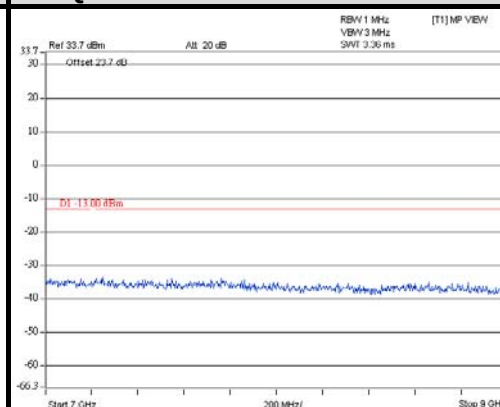


A D T


EDGE

CHANNEL 128


FREQUENCY RANGE : 9kHz~1GHz

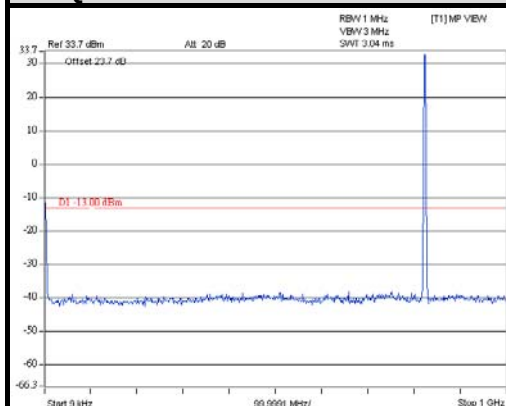


FREQUENCY RANGE : 1GHz~4GHz

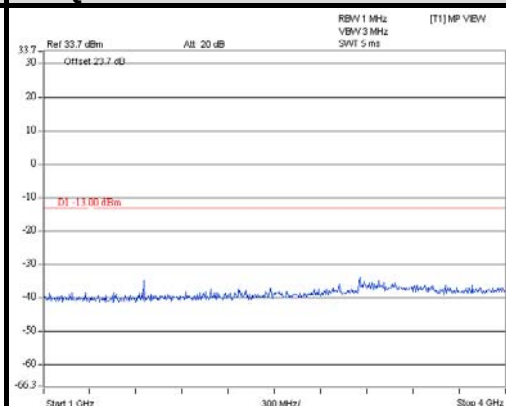

FREQUENCY RANGE : 4GHz~7GHz

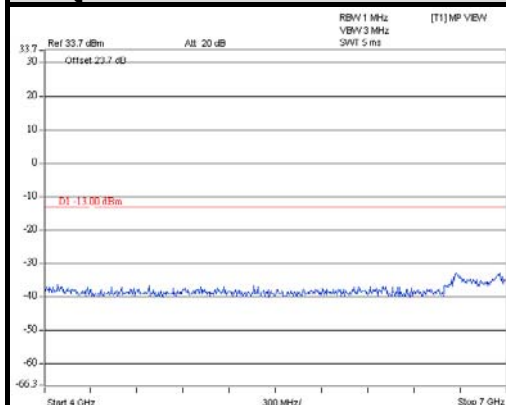


FREQUENCY RANGE : 7GHz~9GHz

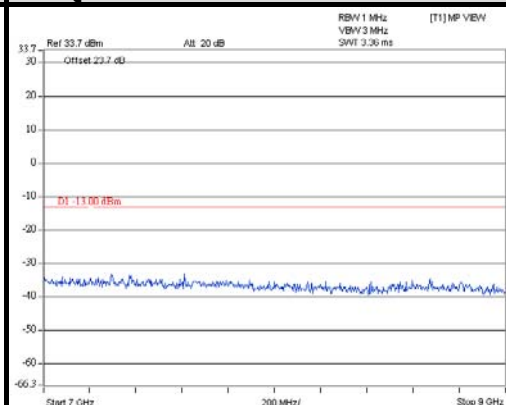

EDGE


CHANNEL 189

FREQUENCY RANGE : 9kHz~1GHz

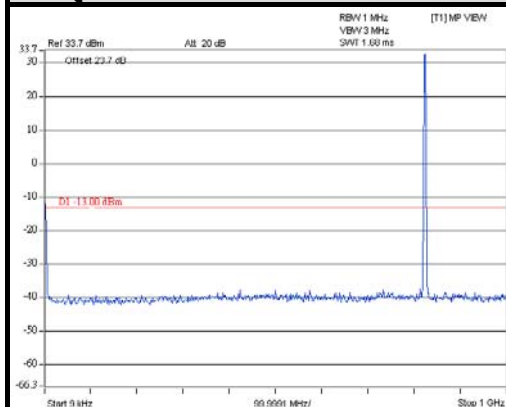


A D T

FREQUENCY RANGE : 1GHz~4GHz

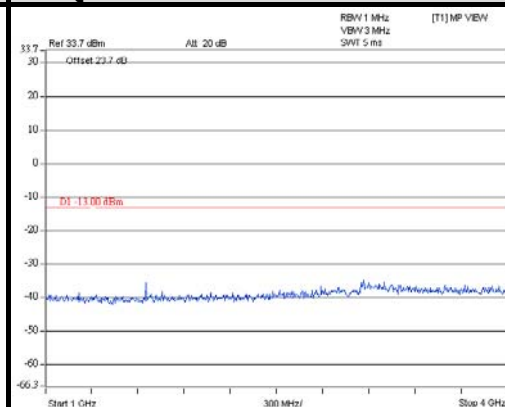


A D T

FREQUENCY RANGE : 4GHz~7GHz

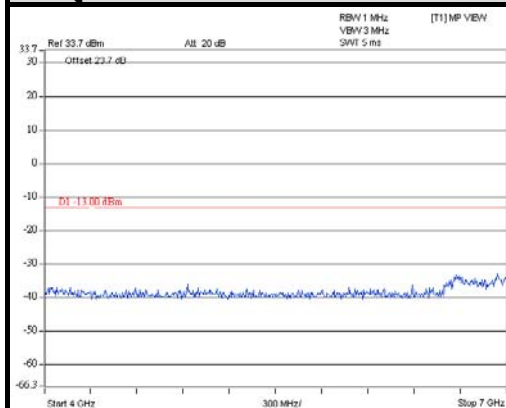

A D T

FREQUENCY RANGE : 7GHz~9GHz

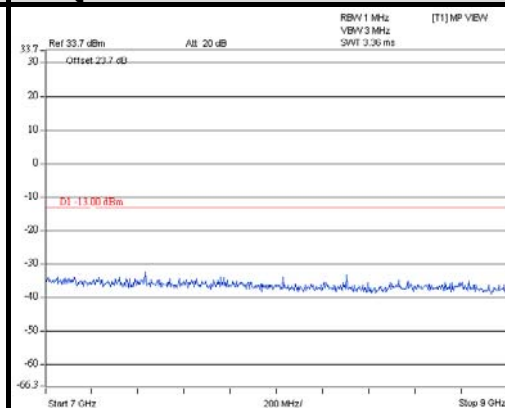


A D T

EDGE


CHANNEL 251

FREQUENCY RANGE : 9kHz~1GHz

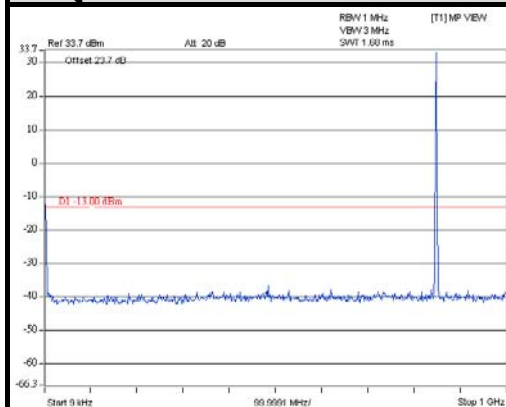


A D T

FREQUENCY RANGE : 1GHz~4GHz

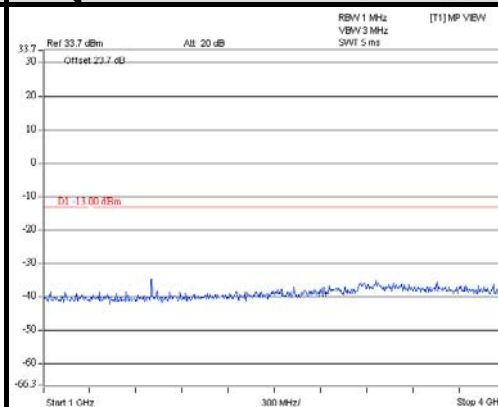


A D T

FREQUENCY RANGE : 4GHz~7GHz

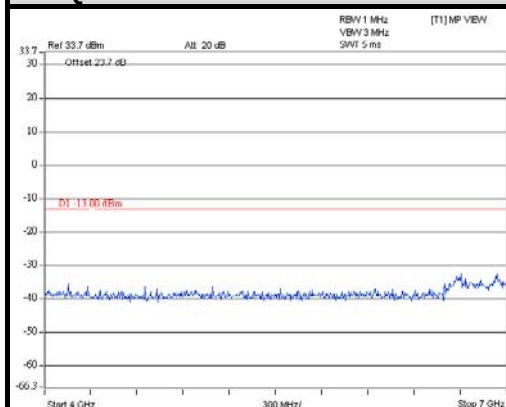

A D T

FREQUENCY RANGE : 7GHz~9GHz

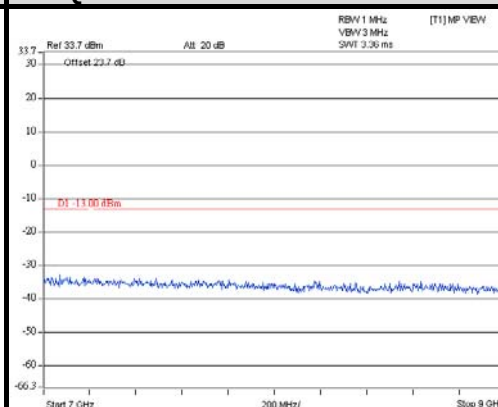


A D T


WCDMA

CHANNEL 4132


FREQUENCY RANGE : 9kHz~1GHz

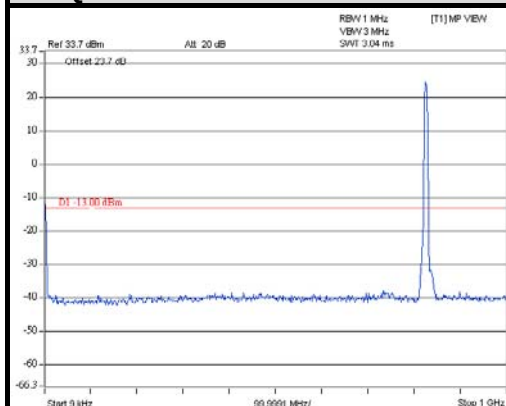


FREQUENCY RANGE : 1GHz~4GHz

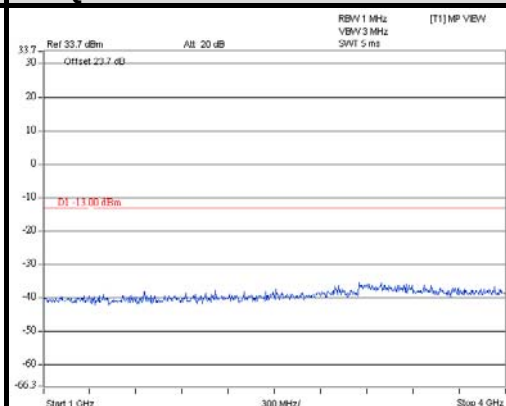

FREQUENCY RANGE : 4GHz~7GHz

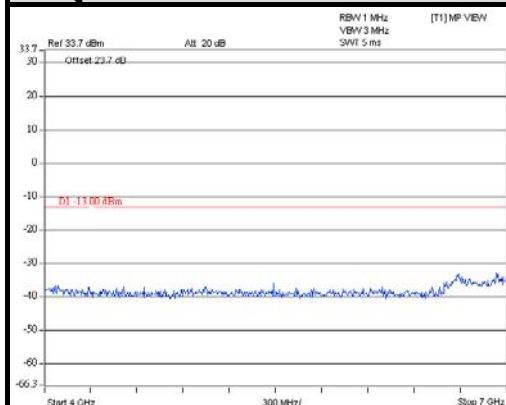


FREQUENCY RANGE : 7GHz~9GHz

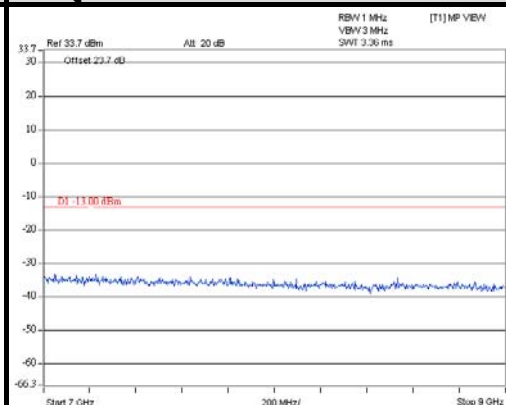


WCDMA

CHANNEL 4182


FREQUENCY RANGE : 9kHz~1GHz

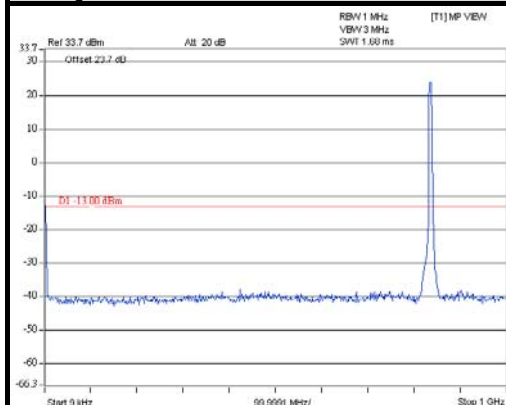


FREQUENCY RANGE : 1GHz~4GHz

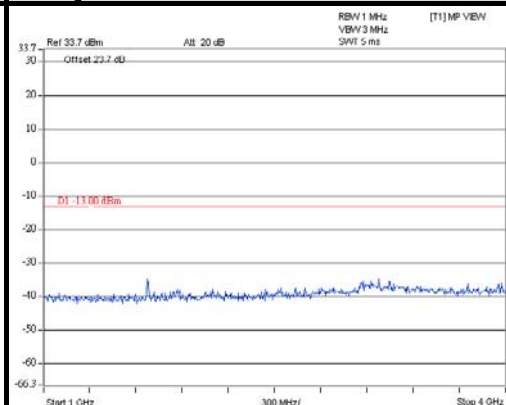

FREQUENCY RANGE : 4GHz~7GHz

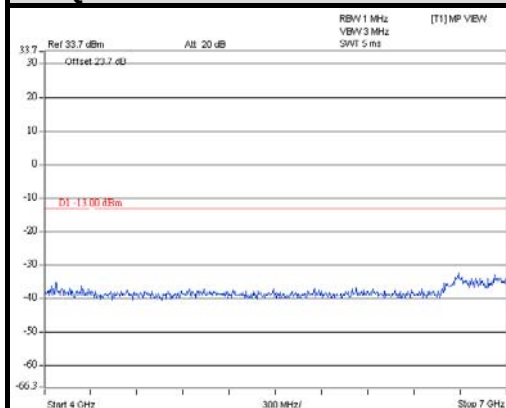


FREQUENCY RANGE : 7GHz~9GHz

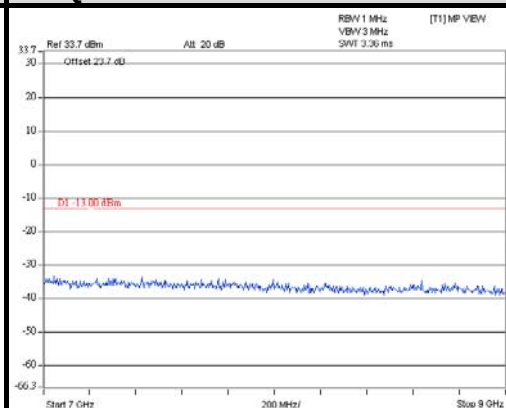


WCDMA

CHANNEL 4233


FREQUENCY RANGE : 9kHz~1GHz

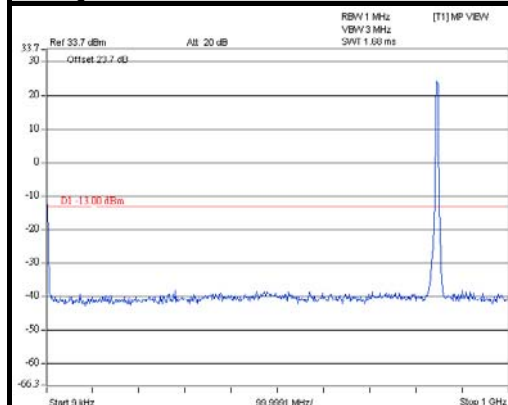


FREQUENCY RANGE : 1GHz~4GHz

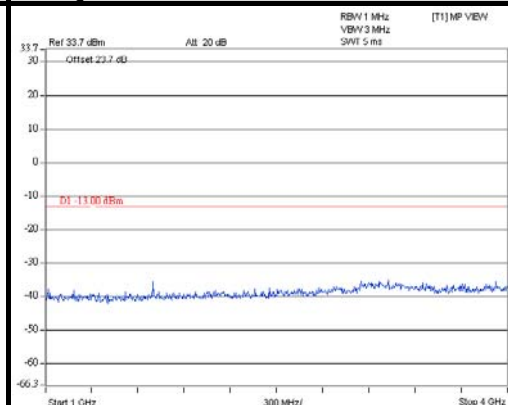

FREQUENCY RANGE : 4GHz~7GHz

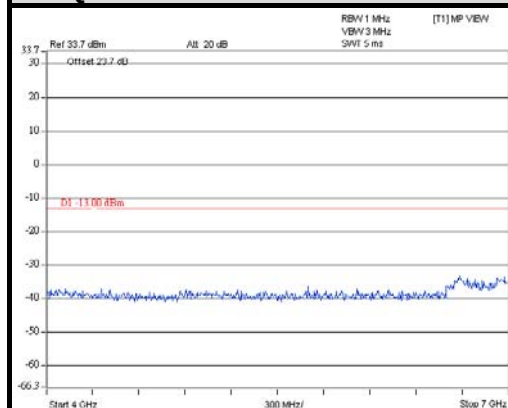


FREQUENCY RANGE : 7GHz~9GHz

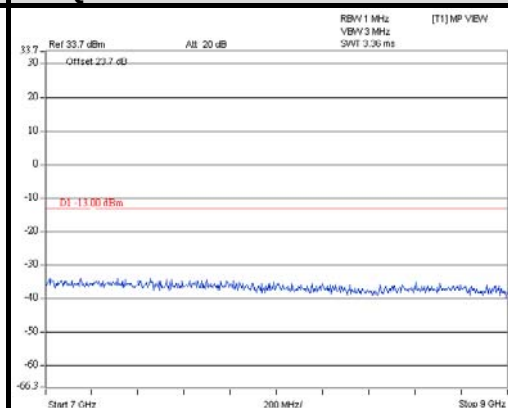


HSDPA

CHANNEL 4132


FREQUENCY RANGE : 9kHz~1GHz

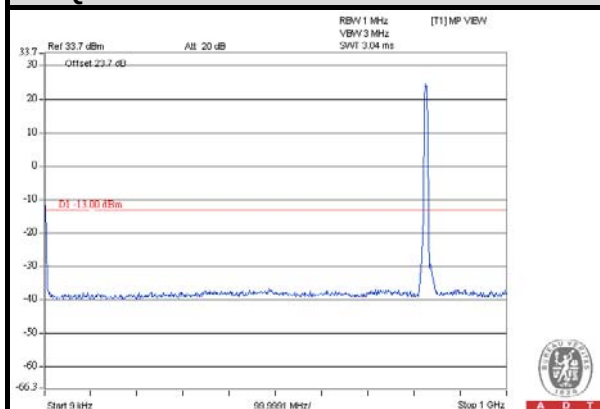


FREQUENCY RANGE : 1GHz~4GHz

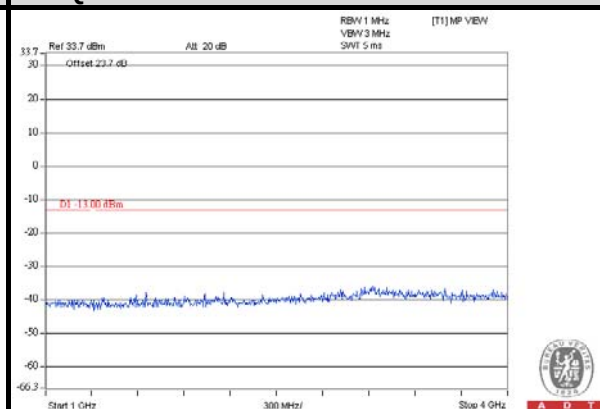

FREQUENCY RANGE : 4GHz~7GHz

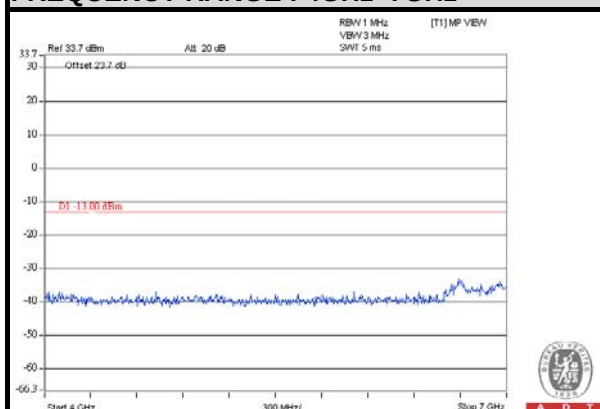


FREQUENCY RANGE : 7GHz~9GHz

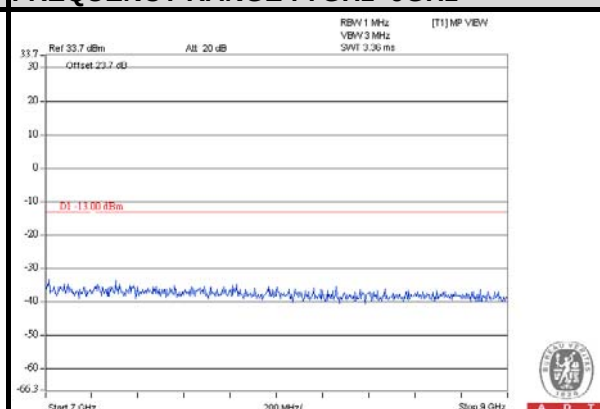


HSDPA

CHANNEL 4182


FREQUENCY RANGE : 9kHz~1GHz

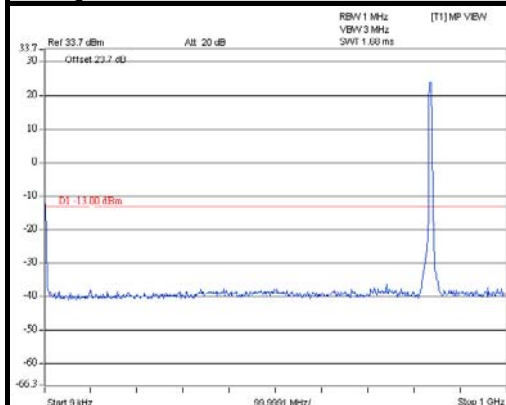


FREQUENCY RANGE : 1GHz~4GHz

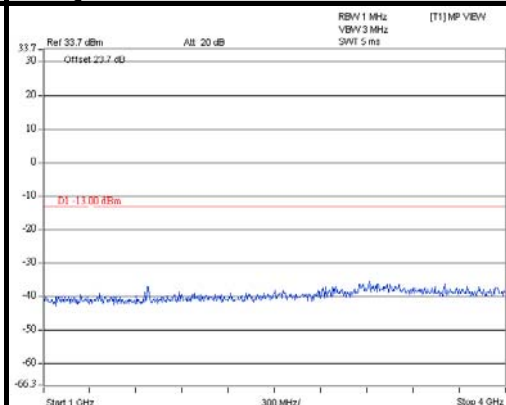

FREQUENCY RANGE : 4GHz~7GHz

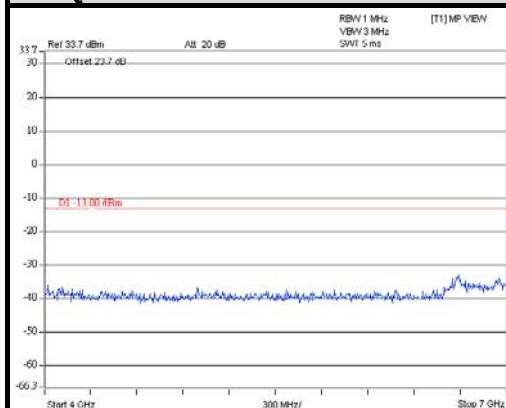


FREQUENCY RANGE : 7GHz~9GHz

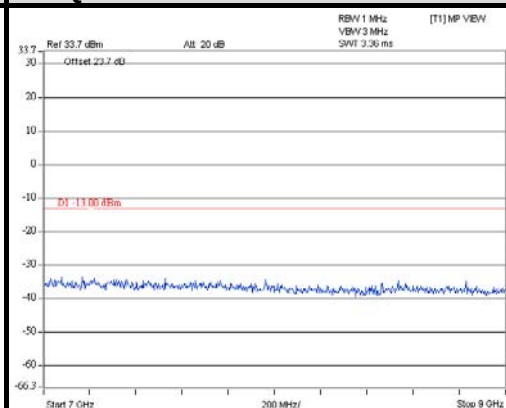


HSDPA

CHANNEL 4233


FREQUENCY RANGE : 9kHz~1GHz

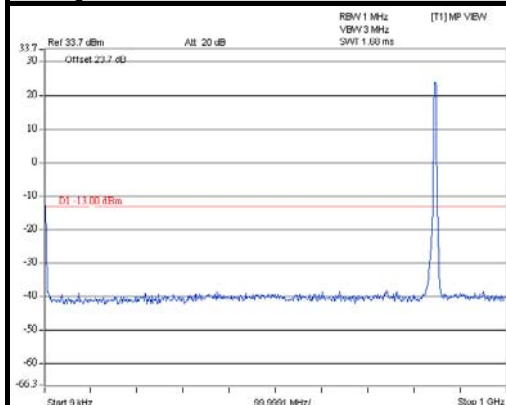


FREQUENCY RANGE : 1GHz~4GHz

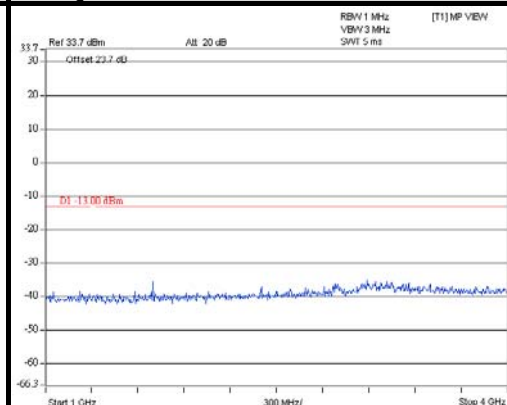

FREQUENCY RANGE : 4GHz~7GHz

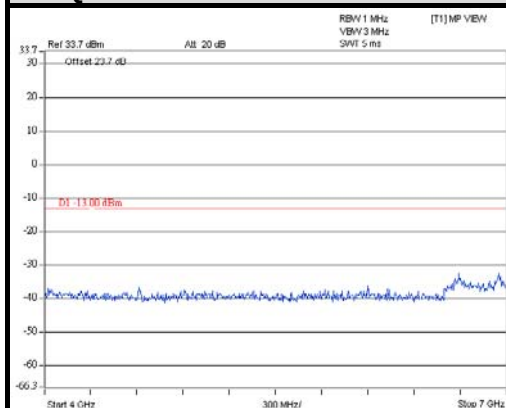


FREQUENCY RANGE : 7GHz~9GHz

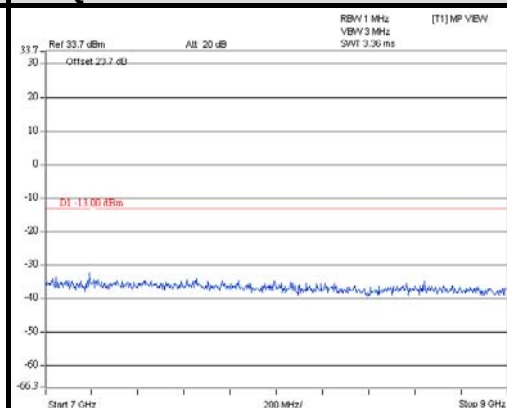


HSUPA

CHANNEL 4132


FREQUENCY RANGE : 9kHz~1GHz

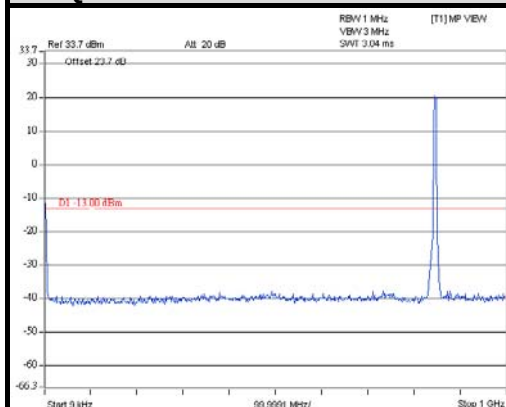


FREQUENCY RANGE : 1GHz~4GHz

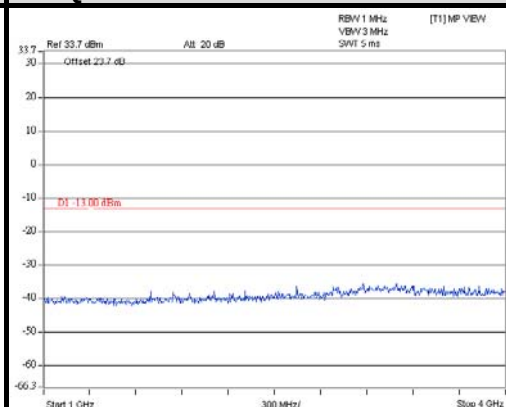

FREQUENCY RANGE : 4GHz~7GHz

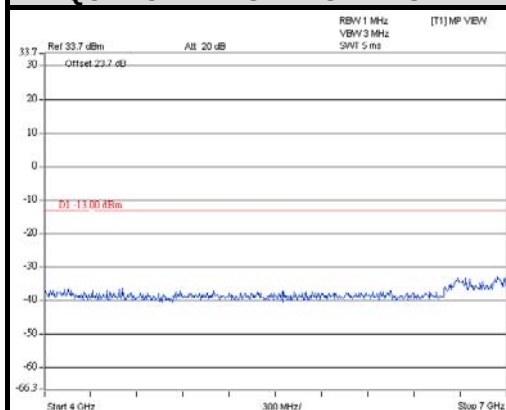


FREQUENCY RANGE : 7GHz~9GHz

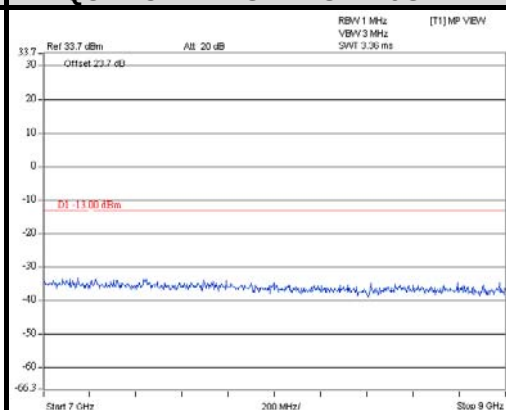


HSUPA

CHANNEL 4182


FREQUENCY RANGE : 9kHz~1GHz

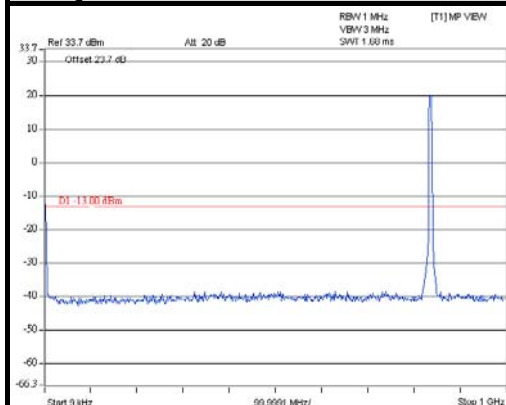


FREQUENCY RANGE : 1GHz~4GHz

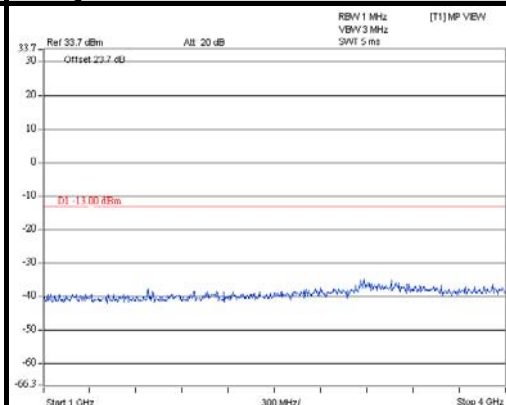

FREQUENCY RANGE : 4GHz~7GHz

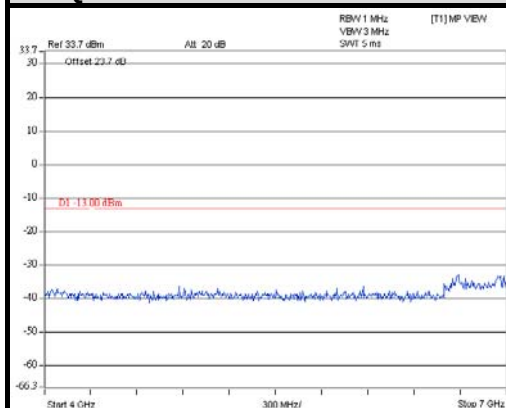


FREQUENCY RANGE : 7GHz~9GHz

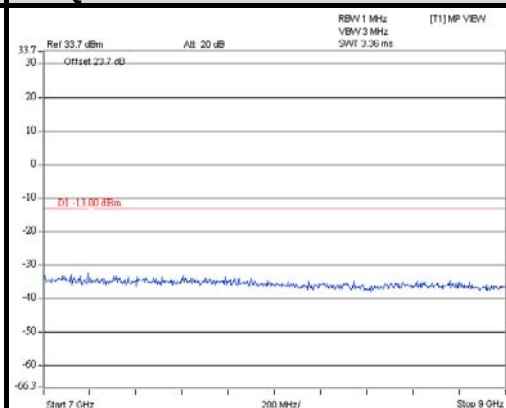


HSUPA

CHANNEL 4233


FREQUENCY RANGE : 9kHz~1GHz

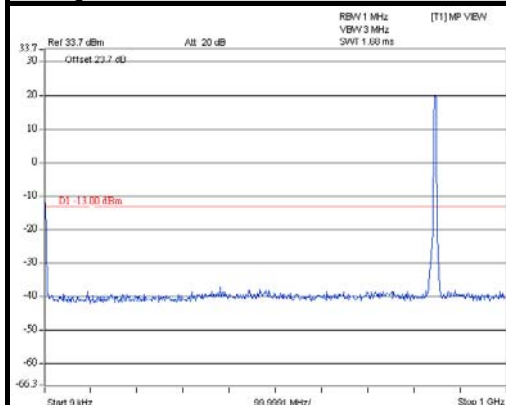


FREQUENCY RANGE : 1GHz~4GHz

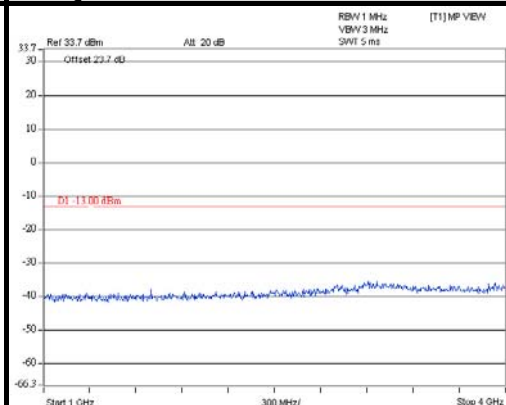

FREQUENCY RANGE : 4GHz~7GHz

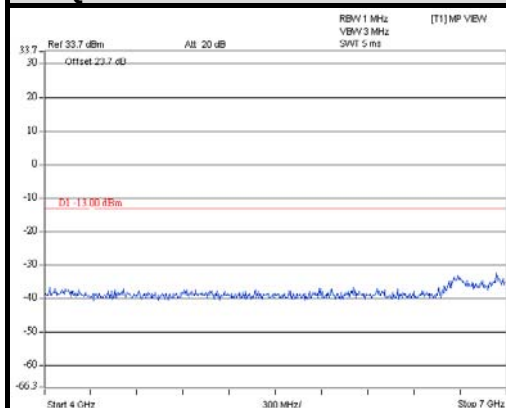

FREQUENCY RANGE : 7GHz~9GHz

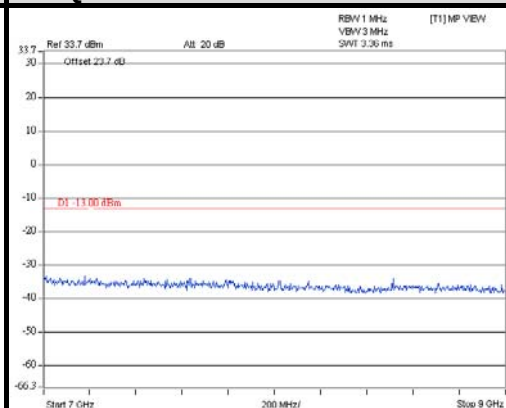

4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD

No deviation

4.6.4 TEST SETUP

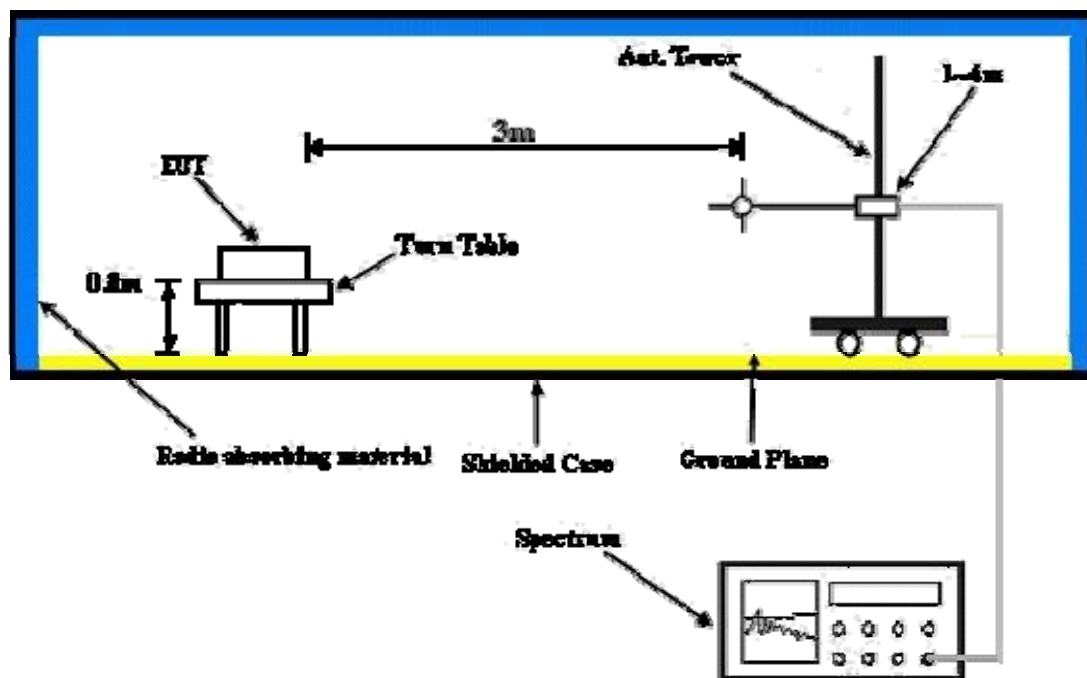

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 TEST RESULTS

GPRS

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	45.55	-56.70	-45.60	-10.50	-56.10	-13.00	-43.10
2	127.19	-47.70	-55.90	-0.10	-56.00	-13.00	-43.00
3	239.94	-55.20	-67.80	5.40	-62.40	-13.00	-49.40
4	407.11	-58.80	-66.10	5.30	-60.80	-13.00	-47.80
5	447.94	-55.40	-62.30	5.10	-57.20	-13.00	-44.20
6	500.42	-60.40	-67.20	4.90	-62.30	-13.00	-49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	47.49	-58.20	-56.10	-10.20	-66.30	-13.00	-53.30
2	119.42	-54.10	-61.70	0.10	-61.60	-13.00	-48.60
3	171.90	-56.30	-59.90	1.90	-58.00	-13.00	-45.00
4	447.94	-53.70	-59.20	5.10	-54.10	-13.00	-41.10
5	500.42	-63.10	-68.50	4.90	-63.60	-13.00	-50.60
6	665.65	-66.10	-67.70	5.00	-62.70	-13.00	-49.70

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Ted Chang	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	105.81	-50.46	-58.75	0.64	-58.11	-13.00	-45.11
2	199.12	-44.46	-54.37	5.35	-49.02	-13.00	-36.02
3	300.20	-58.20	-66.89	5.13	-61.76	-13.00	-48.76
4	399.34	-60.48	-67.27	5.28	-61.99	-13.00	-48.99
5	498.48	-59.44	-64.82	4.89	-59.93	-13.00	-46.93
6	698.70	-62.15	-63.14	5.24	-57.90	-13.00	-44.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	101.92	-42.72	-50.86	0.79	-50.07	-13.00	-37.07
2	199.12	-46.02	-55.93	5.35	-50.58	-13.00	-37.58
3	300.20	-62.20	-70.89	5.13	-65.76	-13.00	-52.76
4	399.34	-62.14	-68.93	5.28	-63.65	-13.00	-50.65
5	498.48	-58.34	-63.72	4.89	-58.83	-13.00	-45.83
6	696.75	-61.62	-62.64	5.22	-57.42	-13.00	-44.42

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	113.59	-49.94	-59.12	0.34	-58.78	-13.00	-45.78
2	201.06	-53.19	-66.50	5.47	-61.03	-13.00	-48.03
3	278.82	-54.14	-65.91	5.23	-60.68	-13.00	-47.68
4	362.40	-59.54	-68.62	5.22	-63.40	-13.00	-50.40
5	747.29	-67.65	-69.06	4.66	-64.40	-13.00	-51.40
6	819.22	-66.94	-67.73	3.97	-63.76	-13.00	-50.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	84.43	-49.17	-54.42	-0.42	-54.84	-13.00	-41.84
2	129.14	-48.39	-53.90	-0.11	-54.01	-13.00	-41.01
3	214.67	-50.01	-60.26	5.45	-54.81	-13.00	-41.81
4	276.87	-60.40	-69.68	5.25	-64.43	-13.00	-51.43
5	370.18	-59.81	-67.21	5.21	-62.00	-13.00	-49.00
6	554.85	-63.73	-67.84	4.62	-63.22	-13.00	-50.22

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

EDGE

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	46.81	-55.51	-44.93	-10.27	-55.20	-13.00	-42.20
2	129.57	-47.89	-55.79	-0.11	-55.90	-13.00	-42.90
3	240.15	-55.36	-68.01	5.41	-62.60	-13.00	-49.60
4	408.59	-59.12	-66.34	5.24	-61.10	-13.00	-48.10
5	445.52	-56.04	-62.90	5.10	-57.80	-13.00	-44.80
6	500.12	-60.73	-67.49	4.89	-62.60	-13.00	-49.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	47.51	-58.31	-56.28	-10.15	-66.43	-13.00	-53.43
2	119.69	-53.61	-61.20	0.08	-61.12	-13.00	-48.12
3	172.54	-57.73	-61.48	1.97	-59.51	-13.00	-46.51
4	447.51	-54.84	-60.36	5.08	-55.28	-13.00	-42.28
5	500.85	-63.00	-68.36	4.89	-63.47	-13.00	-50.47
6	664.51	-66.35	-67.93	4.97	-62.96	-13.00	-49.96

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Ted Chang	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	105.52	-52.50	-60.70	0.60	-60.10	-13.00	-47.10
2	200.10	-46.60	-56.70	5.40	-51.30	-13.00	-38.30
3	301.20	-58.70	-67.30	5.10	-62.20	-13.00	-49.20
4	399.96	-61.20	-67.90	5.20	-62.70	-13.00	-49.70
5	499.85	-59.80	-65.20	4.90	-60.30	-13.00	-47.30
6	699.28	-62.50	-63.60	5.30	-58.30	-13.00	-45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	101.54	-43.50	-51.80	0.90	-50.90	-13.00	-37.90
2	199.88	-46.60	-56.70	5.50	-51.20	-13.00	-38.20
3	300.96	-62.40	-71.00	5.10	-65.90	-13.00	-52.90
4	399.64	-62.70	-69.40	5.20	-64.20	-13.00	-51.20
5	498.99	-58.80	-64.10	4.90	-59.20	-13.00	-46.20
6	697.21	-62.20	-63.30	5.30	-58.00	-13.00	-45.00

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	113.51	-49.31	-58.48	0.34	-58.14	-13.00	-45.14
2	200.51	-53.06	-66.35	5.47	-60.88	-13.00	-47.88
3	277.31	-54.05	-65.87	5.25	-60.62	-13.00	-47.62
4	361.57	-58.93	-68.05	5.21	-62.84	-13.00	-49.84
5	746.54	-68.79	-70.24	4.67	-65.57	-13.00	-52.57
6	818.98	-66.29	-67.09	3.98	-63.11	-13.00	-50.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	85.11	-48.58	-53.89	-0.22	-54.11	-13.00	-41.11
2	128.69	-48.06	-53.67	-0.10	-53.77	-13.00	-40.77
3	214.11	-49.57	-59.80	5.45	-54.35	-13.00	-41.35
4	277.41	-59.59	-68.84	5.25	-63.59	-13.00	-50.59
5	371.58	-59.75	-67.11	5.22	-61.89	-13.00	-48.89
6	554.14	-63.52	-67.65	4.62	-63.03	-13.00	-50.03

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

WCDMA

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	45.55	-55.60	-44.50	-10.50	-55.00	-13.00	-42.00
2	127.19	-47.80	-56.00	-0.10	-56.10	-13.00	-43.10
3	154.41	-50.90	-57.10	0.10	-57.00	-13.00	-44.00
4	239.94	-56.00	-68.60	5.40	-63.20	-13.00	-50.20
5	407.11	-59.20	-66.50	5.30	-61.20	-13.00	-48.20
6	447.94	-54.80	-61.70	5.10	-56.60	-13.00	-43.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	47.49	-59.50	-57.40	-10.20	-67.60	-13.00	-54.60
2	121.36	-54.40	-61.60	0.00	-61.60	-13.00	-48.60
3	175.79	-54.60	-59.10	2.40	-56.70	-13.00	-43.70
4	234.11	-57.40	-67.10	5.40	-61.70	-13.00	-48.70
5	447.94	-53.80	-59.30	5.10	-54.20	-13.00	-41.20
6	500.42	-63.50	-68.90	4.90	-64.00	-13.00	-51.00

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Ted Chang	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	99.98	-51.19	-59.26	0.87	-58.39	-13.00	-45.39
2	199.12	-44.53	-54.44	5.35	-49.09	-13.00	-36.09
3	300.20	-58.64	-67.33	5.13	-62.20	-13.00	-49.20
4	399.34	-60.86	-67.65	5.28	-62.37	-13.00	-49.37
5	500.42	-60.87	-66.23	4.89	-61.34	-13.00	-48.34
6	698.70	-62.88	-63.87	5.24	-58.63	-13.00	-45.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	103.87	-42.68	-50.90	0.72	-50.18	-13.00	-37.18
2	199.12	-45.53	-55.44	5.35	-50.09	-13.00	-37.09
3	311.86	-62.17	-70.53	5.15	-65.38	-13.00	-52.38
4	411.00	-63.95	-70.17	5.24	-64.93	-13.00	-51.93
5	500.42	-58.71	-64.07	4.89	-59.18	-13.00	-46.18
6	698.70	-61.41	-62.40	5.24	-57.16	-13.00	-44.16

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 74%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	78.60	-55.56	-53.99	-2.11	-56.10	-13.00	-43.10
2	121.36	-51.51	-52.10	0.05	-52.05	-13.00	-39.05
3	179.68	-52.29	-55.70	2.87	-52.83	-13.00	-39.83
4	269.10	-57.08	-62.91	5.29	-57.62	-13.00	-44.62
5	342.97	-62.81	-68.54	5.19	-63.35	-13.00	-50.35
6	457.66	-66.02	-71.60	5.04	-66.56	-13.00	-53.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-47.04	-37.26	-11.93	-49.19	-13.00	-36.19
2	57.21	-53.98	-47.93	-8.20	-56.13	-13.00	-43.13
3	129.14	-51.53	-53.57	-0.11	-53.68	-13.00	-40.68
4	214.67	-52.40	-60.00	5.45	-54.55	-13.00	-41.55
5	399.34	-62.98	-70.41	5.28	-65.13	-13.00	-52.13
6	554.85	-63.48	-70.25	4.62	-65.63	-13.00	-52.63

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

ABOVE 1GHz

GPRS

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.40	-27.32	-27.36	5.48	-21.88	-13.00	-8.88
2	2472.60	-40.53	-41.52	6.43	-35.09	-13.00	-22.09
3	3296.80	-55.29	-56.72	6.87	-49.85	-13.00	-36.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.40	-26.82	-23.69	5.48	-18.21	-13.00	-5.21
2	2472.60	-43.20	-41.02	6.43	-34.59	-13.00	-21.59
3	3296.80	-57.34	-55.60	6.87	-48.73	-13.00	-35.73

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-27.37	-27.47	5.54	-21.93	-13.00	-8.93
2	2509.20	-40.77	-41.78	6.45	-35.33	-13.00	-22.33
3	3345.60	-55.89	-57.39	6.94	-50.45	-13.00	-37.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-27.64	-24.57	5.54	-19.03	-13.00	-6.03
2	2509.20	-43.55	-41.39	6.45	-34.94	-13.00	-21.94
3	3345.60	-58.11	-56.44	6.94	-49.50	-13.00	-36.50

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-27.36	-27.51	5.59	-21.92	-13.00	-8.92
2	2546.40	-40.68	-41.68	6.44	-35.24	-13.00	-22.24
3	3395.20	-55.77	-57.35	7.02	-50.33	-13.00	-37.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-27.63	-24.61	5.59	-19.02	-13.00	-6.02
2	2546.40	-43.47	-41.30	6.44	-34.86	-13.00	-21.86
3	3395.20	-58.10	-56.51	7.02	-49.49	-13.00	-36.49

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

EDGE

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.40	-28.95	-28.99	5.48	-23.51	-13.00	-10.51
2	2472.60	-42.64	-43.63	6.43	-37.20	-13.00	-24.20
3	3296.80	-58.34	-59.76	6.86	-52.90	-13.00	-39.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.40	-27.81	-24.68	5.48	-19.20	-13.00	-6.20
2	2472.60	-44.81	-42.63	6.43	-36.20	-13.00	-23.20
3	3296.80	-58.73	-56.98	6.86	-50.12	-13.00	-37.12

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-28.95	-29.05	5.54	-23.51	-13.00	-10.51
2	2509.20	-43.02	-44.03	6.45	-37.58	-13.00	-24.58
3	3345.60	-58.43	-59.93	6.94	-52.99	-13.00	-39.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-29.91	-26.84	5.54	-21.30	-13.00	-8.30
2	2509.20	-46.13	-43.97	6.45	-37.52	-13.00	-24.52
3	3345.60	-60.53	-58.86	6.94	-51.92	-13.00	-38.92

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-29.33	-29.48	5.59	-23.89	-13.00	-10.89
2	2546.40	-43.59	-44.59	6.44	-38.15	-13.00	-25.15
3	3395.20	-58.54	-60.12	7.02	-53.10	-13.00	-40.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-30.91	-27.89	5.59	-22.30	-13.00	-9.30
2	2546.40	-45.59	-43.42	6.44	-36.98	-13.00	-23.98
3	3395.20	-61.49	-59.90	7.02	-52.88	-13.00	-39.88

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

WCDMA

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1652.80	-44.60	-47.35	5.49	-41.86	-13.00	-28.86
2	2479.20	-68.75	-68.69	6.44	-62.25	-13.00	-49.25
3	3305.60	-69.06	-67.46	6.88	-60.58	-13.00	-47.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1652.80	-45.77	-50.43	5.49	-44.94	-13.00	-31.94
2	2479.20	-72.11	-71.91	6.44	-65.47	-13.00	-52.47
3	3305.60	-71.64	-70.42	6.88	-63.54	-13.00	-50.54

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-44.83	-47.66	5.54	-42.12	-13.00	-29.12
2	2509.20	-69.18	-68.98	6.45	-62.53	-13.00	-49.53
3	3345.60	-69.53	-68.01	6.94	-61.07	-13.00	-48.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-46.24	-50.87	5.54	-45.33	-13.00	-32.33
2	2509.20	-72.46	-72.23	6.45	-65.78	-13.00	-52.78
3	3345.60	-72.38	-71.11	6.94	-64.17	-13.00	-51.17

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 67%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Alan Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1693.20	-45.60	-48.51	5.58	-42.93	-13.00	-29.93
2	2539.80	-70.06	-69.65	6.44	-63.21	-13.00	-50.21
3	3386.40	-70.43	-68.99	7.01	-61.98	-13.00	-48.98
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1693.20	-46.34	-50.94	5.58	-45.36	-13.00	-32.36
2	2539.80	-73.26	-73.09	6.44	-66.65	-13.00	-53.65
3	3386.40	-72.84	-71.54	7.01	-64.53	-13.00	-51.53

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor} = \text{gain of substitution antenna} + \text{cable loss}$



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---