



A D T

FCC TEST REPORT

(PART 22)

REPORT NO.: RF130521C18H

MODEL NO.: PWS-770xxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

FCC ID: M82-PWS-770PH

RECEIVED: Oct. 01, 2013

TESTED: Oct. 01 ~ Oct. 02, 2013

ISSUED: Oct. 08, 2013

APPLICANT: ADVANTECH CO., LTD

ADDRESS: No.1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 TEST SITE AND INSTRUMENTS	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 CONFIGURATION OF SYSTEM UNDER TEST	8
3.3 DESCRIPTION OF SUPPORT UNITS	9
3.4 TEST ITEM AND TEST CONFIGURATION	10
3.5 EUT OPERATING CONDITIONS	11
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4 TEST TYPES AND RESULTS	12
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2 TEST PROCEDURES	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 TEST RESULTS	14
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	20
6 INFORMATION ON THE TESTING LABORATORIES	21
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	22



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130521C18H	Original release	Oct. 08, 2013



A D T

1 CERTIFICATION

PRODUCT: Computer

MODEL: PWS-770xxxxxxxxxxxxxx

("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

BRAND: **ADVANTECH**


APPLICANT: ADVANTECH CO., LTD

TESTED: Oct. 01 ~ Oct. 02, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC PART 22, Subpart H

This report is issued as a supplementary report of **RF130521C18** for adding external battery pack. This report shall be used combining with its original report.

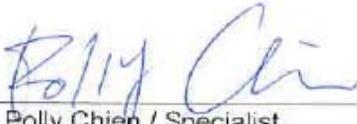PREPARED BY : , **DATE :** Oct. 08, 2013

Polly Chien / Specialist

APPROVED BY : , **DATE :** Oct. 08, 2013

Anderson Chiu / Senior Engineer

NOTE: The radiated spurious emission below 1GHz test was performed for the addendum. Refer to original report for the other test data.



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective radiated power	NA	Refer to Note
2.1055 22.355	Frequency Stability	NA	Refer to Note
2.1049	Occupied Bandwidth	NA	Refer to Note
22.917	Band Edge Measurements	NA	Refer to Note
2.1051 22.917	Conducted Spurious Emissions	NA	Refer to Note
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -29.30dB at 996.12MHz.

NOTE: The radiated spurious emission below 1GHz test was performed for the addendum. Refer to original report for the other test data.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 12, 2013	Sep. 11, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 23, 2013	Aug. 22, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 23, 2013	Aug. 22, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Computer
MODEL NO.	PWS-770xxxxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)
POWER SUPPLY	19Vdc (Adapter or cradle) 11.1Vdc (Battery)
MODULATION TYPE	GSM, GPRS, EDGE: GMSK WCDMA, HSDPA, HSUPA: BPSK
FREQUENCY RANGE	GSM, GPRS, EDGE: 824.2MHz ~ 848.8MHz WCDMA, HSDPA, HSUPA: 826.4MHz ~ 846.6MHz
MAX. ERP POWER	GSM: 503.50Mw (27.02dBm) WCDMA: 41.78mW (16.21dBm)
ANTENNA TYPE	PIFA antenna with -3.79dBi gain
ANTENNA CONNECTOR	IPEX
I/O PORTS	Refer to users' manual
DATA CABLE	N/A
ACCESSORY DEVICES	Adapter, Cradle, Stylus, Battery pack

NOTE:

1. This is a supplementary report of RF130521C18. This report shall be combined together with its original report.
2. This report is prepared for FCC class II permissive change. Difference compared with the original report is adding external battery pack. Therefore, the radiated spurious emission below 1GHz test had been re-tested and presented in the test report.
3. All models are electrically identical, different model names are for marketing purpose. Model PWS-770 is the representative for final test.

Brand	Model
Advantech	PWS-770xxxxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)


4. The EUT contains the following accessories. (New External Battery Pack is marked in boldface.)

No.	Product	Brand	Model	Description
1	Adapter	FSP GROUP INC.	FSP065-RAB	Input: 100-240Vac, 1.5A, 50-60Hz Output: 19Vdc, 3.42A Power Line: 1.5m cable with 1 core attached on adapter
2	Battery Pack	Joules	1760001576	Rating: 11.1Vdc, 1880mA, 20.87Wh Type: Li-ion
3	Cradle 1	ADVANTECH	pws-770 cradle	Rating: 19Vdc, 3.42A
4	Cradle 2	ADVANTECH	pws-770 vehicle cradle	Rating: 18.5Vdc, 4.9A
5	External Battery Pack	JOULES MILES CO., LTD.	PWS-770-01	Rating: 11.1Vdc, 5000mA, 55.5Wh


5. HW version is PCB PWS-770 MB A101-4
6. SW version is Image WIN7 pro PWS-770 V1.0 ENG
7. The above EUT information is declared by manufacturer and for more detailed feature description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A, B

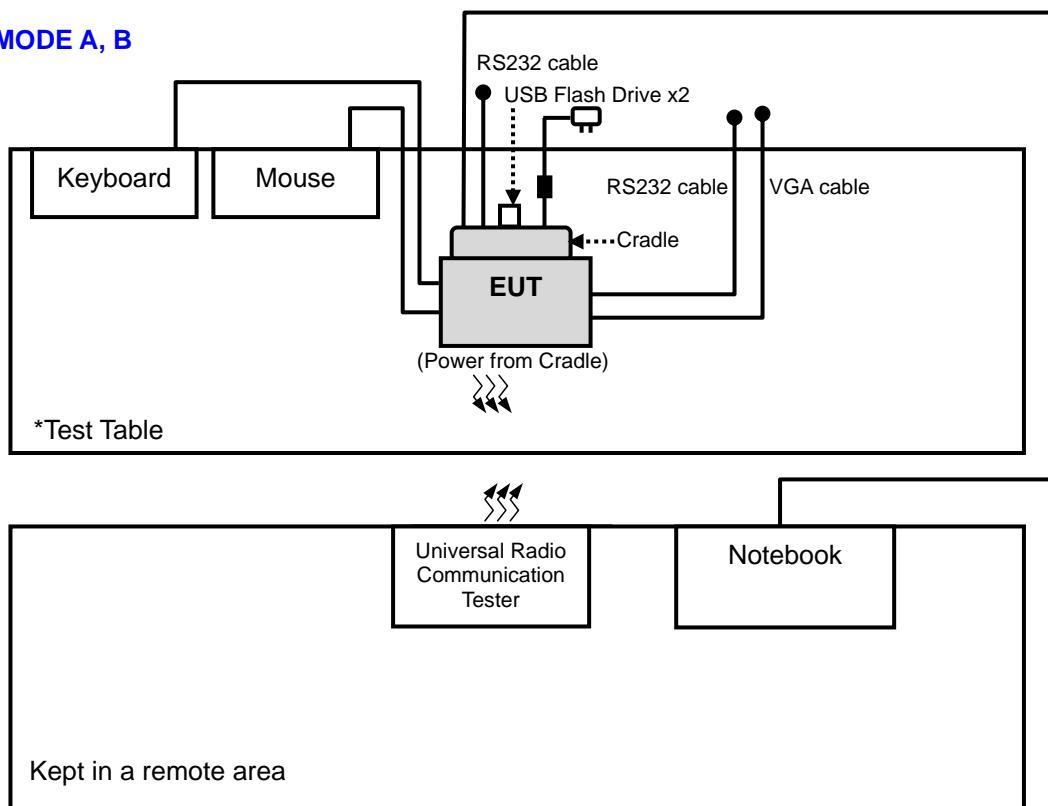

TEST MODE C

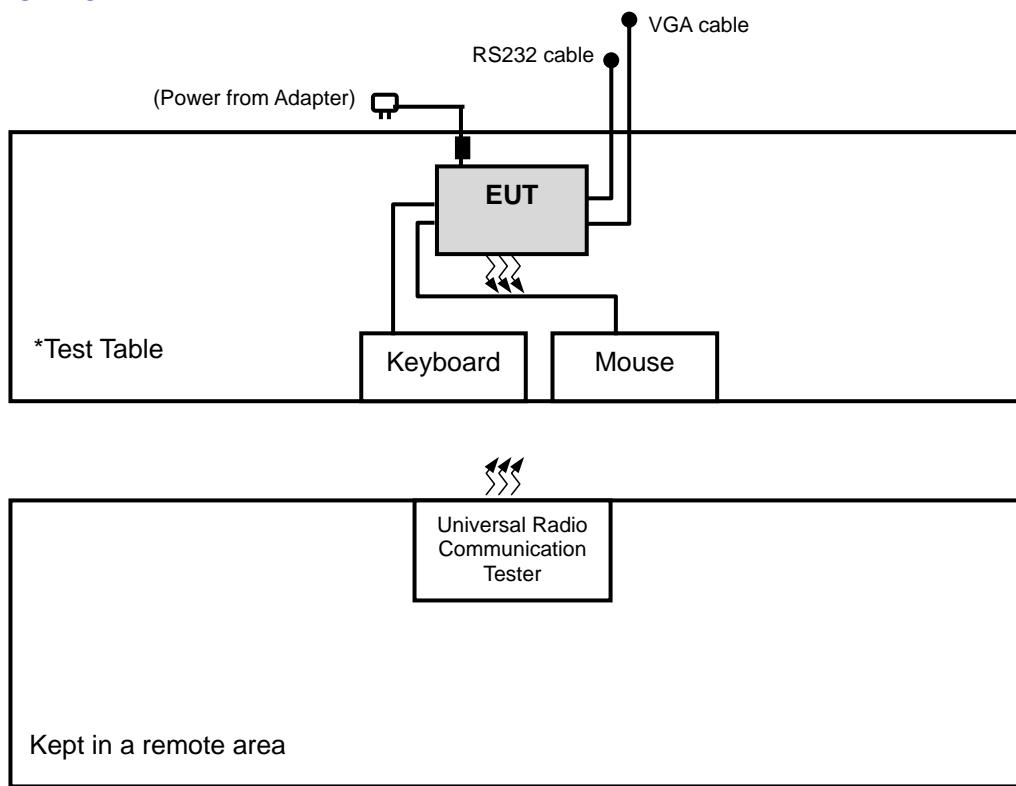



A D T

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	KEYBOARD	DELL	KB4021	CN-05V23T-71581-1AK-01Q2-A01	FCC DoC Approved
2	MOUSE	DELL	MS111-P	CN-011D3V-71581-1CJ-019E	FCC DoC Approved
3	USB FLASH DRIVE	Transcend	V85	538455 4490	NA
4	USB FLASH DRIVE	Transcend	V85	538455 4489	NA
5	NOTEBOOK	DELL	E5410	6RP2YM1	FCC DoC Approved
6	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	123112	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m foil shielded wire, USB connector, w/o core
2	1.8m foil shielded wire, USB connector, w/o core
3	NA
4	NA
5	10m RJ45cable, w/o core
6	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 5-6 acted as communication partners to transfer data.



3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below:

Test modes are presented in the report as below.

Test Mode	Test Condition
A	EUT with external battery pack, power from cradle 1
B	EUT with external battery pack, power from cradle 2
C	EUT with external battery pack, power from adapter (without cradle)

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A, B, C	RADIATED EMISSION BELOW 1GHz	128 to 251	128	GSM

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A, B, C	RADIATED EMISSION BELOW 1GHz	4132 to 4233	4132	WCDMA

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RADIATED EMISSION BELOW 1GHz	25deg. C, 65%RH	120Vac, 60Hz	Brad Tung



A D T

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.



A D T

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.1.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

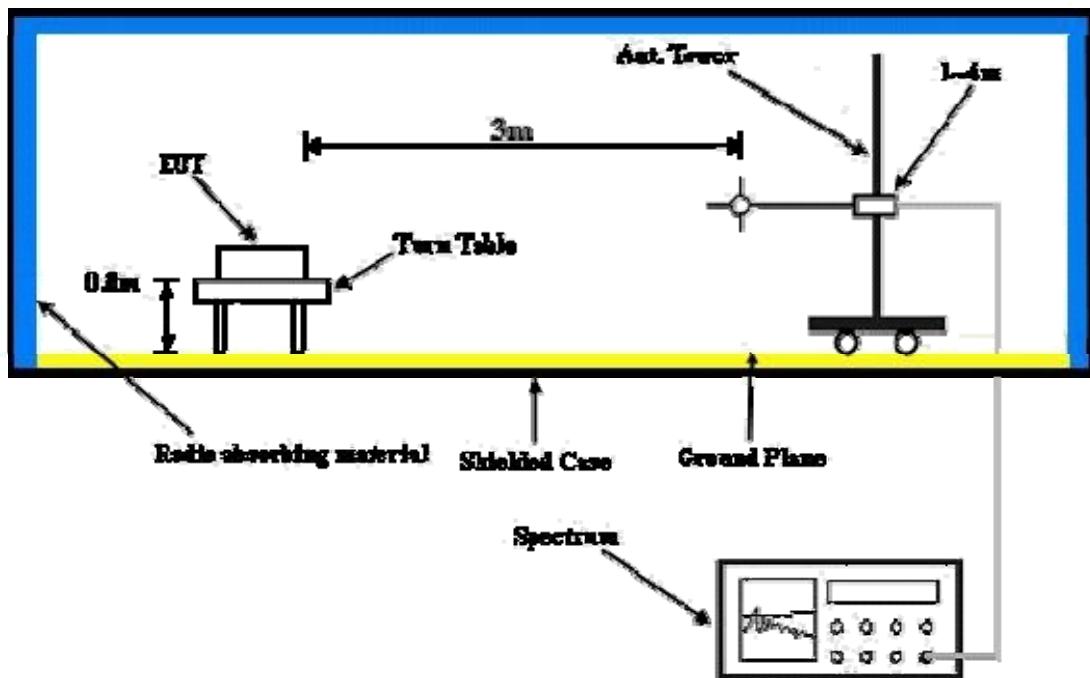

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.1.5 TEST RESULTS

GSM

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	198.78	-45.90	-52.30	5.40	-46.90	-13.00	-33.90
2	224.00	-51.20	-57.60	5.40	-52.20	-13.00	-39.20
3	398.60	-56.40	-62.60	5.20	-57.40	-13.00	-44.40
4	499.48	-58.80	-64.70	4.90	-59.80	-13.00	-46.80
5	697.36	-56.00	-62.30	5.30	-57.00	-13.00	-44.00
6	796.30	-56.50	-61.60	4.10	-57.50	-13.00	-44.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	107.60	-44.10	-50.80	0.50	-50.30	-13.00	-37.30
2	167.74	-56.10	-57.90	1.30	-56.60	-13.00	-43.60
3	198.78	-45.10	-55.00	5.40	-49.60	-13.00	-36.60
4	400.54	-59.00	-64.40	5.20	-59.20	-13.00	-46.20
5	499.48	-57.40	-61.80	4.90	-56.90	-13.00	-43.90
6	699.30	-62.80	-62.60	5.30	-57.30	-13.00	-44.30

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	99.84	-57.40	-59.30	0.90	-58.40	-13.00	-45.40
2	198.78	-45.80	-52.20	5.40	-46.80	-13.00	-33.80
3	398.60	-56.20	-62.40	5.20	-57.20	-13.00	-44.20
4	497.54	-59.80	-65.70	4.90	-60.80	-13.00	-47.80
5	699.30	-56.20	-62.50	5.30	-57.20	-13.00	-44.20
6	800.18	-57.20	-62.20	4.00	-58.20	-13.00	-45.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	107.60	-45.50	-52.10	0.50	-51.60	-13.00	-38.60
2	198.78	-45.00	-54.90	5.40	-49.50	-13.00	-36.50
3	398.60	-58.90	-64.30	5.20	-59.10	-13.00	-46.10
4	499.48	-56.80	-61.10	4.90	-56.20	-13.00	-43.20
5	699.30	-62.70	-62.40	5.30	-57.10	-13.00	-44.10
6	996.12	-52.90	-46.30	4.00	-42.30	-13.00	-29.30

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	198.78	-45.70	-52.10	5.40	-46.70	-13.00	-33.70
2	222.06	-51.90	-58.30	5.40	-52.90	-13.00	-39.90
3	398.60	-56.80	-63.00	5.20	-57.80	-13.00	-44.80
4	499.48	-60.00	-65.90	4.90	-61.00	-13.00	-48.00
5	699.30	-55.90	-62.20	5.30	-56.90	-13.00	-43.90
6	800.18	-57.50	-62.50	4.00	-58.50	-13.00	-45.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	105.66	-44.10	-50.80	0.60	-50.20	-13.00	-37.20
2	165.80	-56.50	-58.30	1.20	-57.10	-13.00	-44.10
3	198.78	-44.80	-54.70	5.40	-49.30	-13.00	-36.30
4	398.60	-58.00	-63.50	5.20	-58.30	-13.00	-45.30
5	499.48	-56.80	-61.10	4.90	-56.20	-13.00	-43.20
6	699.30	-62.80	-62.50	5.30	-57.20	-13.00	-44.20

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

WCDMA

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	198.78	-45.50	-51.90	5.40	-46.50	-13.00	-33.50
2	218.18	-51.60	-58.00	5.40	-52.60	-13.00	-39.60
3	398.60	-56.20	-62.50	5.20	-57.30	-13.00	-44.30
4	499.48	-59.00	-64.90	4.90	-60.00	-13.00	-47.00
5	699.30	-55.50	-61.80	5.30	-56.50	-13.00	-43.50
6	798.24	-57.40	-62.40	4.00	-58.40	-13.00	-45.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	105.66	-44.40	-51.10	0.60	-50.50	-13.00	-37.50
2	167.74	-56.00	-57.80	1.30	-56.50	-13.00	-43.50
3	198.78	-45.00	-54.90	5.40	-49.50	-13.00	-36.50
4	398.60	-58.20	-63.70	5.20	-58.50	-13.00	-45.50
5	499.48	-57.20	-61.60	4.90	-56.70	-13.00	-43.70
6	697.36	-62.50	-62.30	5.30	-57.00	-13.00	-44.00

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	198.78	-45.70	-52.10	5.40	-46.70	-13.00	-33.70
2	224.00	-52.10	-58.50	5.40	-53.10	-13.00	-40.10
3	398.60	-55.50	-61.70	5.20	-56.50	-13.00	-43.50
4	499.48	-59.40	-65.30	4.90	-60.40	-13.00	-47.40
5	697.36	-55.90	-62.20	5.30	-56.90	-13.00	-43.90
6	798.24	-57.80	-62.80	4.00	-58.80	-13.00	-45.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	107.60	-44.90	-51.50	0.50	-51.00	-13.00	-38.00
2	167.74	-56.30	-58.10	1.30	-56.80	-13.00	-43.80
3	198.78	-44.90	-54.80	5.40	-49.40	-13.00	-36.40
4	400.54	-59.00	-64.50	5.20	-59.30	-13.00	-46.30
5	499.48	-56.90	-61.30	4.90	-56.40	-13.00	-43.40
6	699.30	-62.80	-62.50	5.30	-57.20	-13.00	-44.20

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

MODE	TX channel 4132	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	INPUT POWER	120Vac, 60 Hz
TESTED BY	Brad Tung	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	198.78	-45.50	-51.90	5.40	-46.50	-13.00	-33.50
2	224.00	-51.20	-57.70	5.40	-52.30	-13.00	-39.30
3	398.60	-56.40	-62.60	5.20	-57.40	-13.00	-44.40
4	499.48	-60.10	-66.00	4.90	-61.10	-13.00	-48.10
5	699.30	-55.10	-61.40	5.30	-56.10	-13.00	-43.10
6	798.24	-57.20	-62.30	4.00	-58.30	-13.00	-45.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	105.66	-44.60	-51.30	0.60	-50.70	-13.00	-37.70
2	165.80	-56.10	-58.00	1.20	-56.80	-13.00	-43.80
3	198.78	-45.20	-55.10	5.40	-49.70	-13.00	-36.70
4	398.60	-58.60	-64.10	5.20	-58.90	-13.00	-45.90
5	499.48	-57.10	-61.50	4.90	-56.60	-13.00	-43.60
6	699.30	-62.20	-61.90	5.30	-56.60	-13.00	-43.60

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---