

TEST REPORT

Product Name: All in One Interactive Display

FCC ID: M82XDS32-860

Trademark: N/A

Model Number: XDS32-860WI50OPAS1E, XDS32-750WI50OPAS1E
XDS32-650WI50OPAS1E, XDS32-550WI50OPAS1E
XDS32-***WI50OPAS** (* represents 0-10, A-Z.)

Prepared For: Advantech Co Ltd

Address: No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei
114, Taiwan R.O.C.

Manufacturer: Advantech Co Ltd

Address: No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei
114, Taiwan R.O.C.

Prepared By: Shenzhen CTB Testing Technology Co., Ltd.

Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong China

Sample Received Date: May, 11, 2022

Sample tested Date: May, 11, 2022 to Jun, 07, 2022

Issue Date: Jun, 07, 2022


Report No.: CTB220524046RF

Test Standards: FCC Part15.247
ANSI C63.10:2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit	51
8.3 Test procedure	51
8.4 Test Result	52
9. CONDUCTED OUTPUT POWER	68
9.1 Block Diagram Of Test Setup	68
9.2 Limit	68
9.3 Test procedure	68
9.4 Test Result	69
10. 6DB OCCUPIED BANDWIDTH	70
10.1 Block Diagram Of Test Setup	70
10.2 Limit	70
10.3 Test procedure	70
10.4 Test Result	71
11. POWER SPECTRAL DENSITY	81
11.1 Block Diagram Of Test Setup	81
11.2 Limit	81
11.3 Test procedure	81

11.4	Test Result	82
12.	ANTENNA REQUIREMENT	91
13.	EUT PHOTOGRAPHS	92
14.	EUT TEST SETUP PHOTOGRAPHS	93

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220524046RF	Jun. 07, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	XDS32-860WI50OPAS1E, XDS32-750WI50OPAS1E XDS32-650WI50OPAS1E, XDS32-550WI50OPAS1E XDS32-***WI50OPAS** (* represents 0-10, A-Z.)
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: XDS32-860WI50OPAS1E
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
Max. RF output power:	WiFi (2.4G) : 15.729dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: External Antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Ratings:	AC 120V/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Mouse	DELL	MS116c	/	AE
2.	Keyboard	DELL	KB216t	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 2, ANT 3

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 2+ANT 3)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,
So the directional gain for PSD is 4.01dBi

2) For power measurements,
The Array gain=0 dB for NANT≤4,
So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

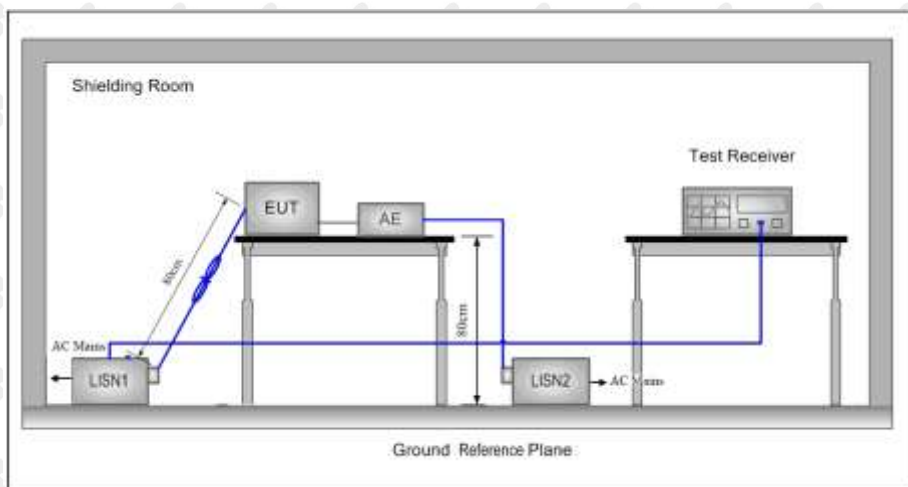

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed

0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

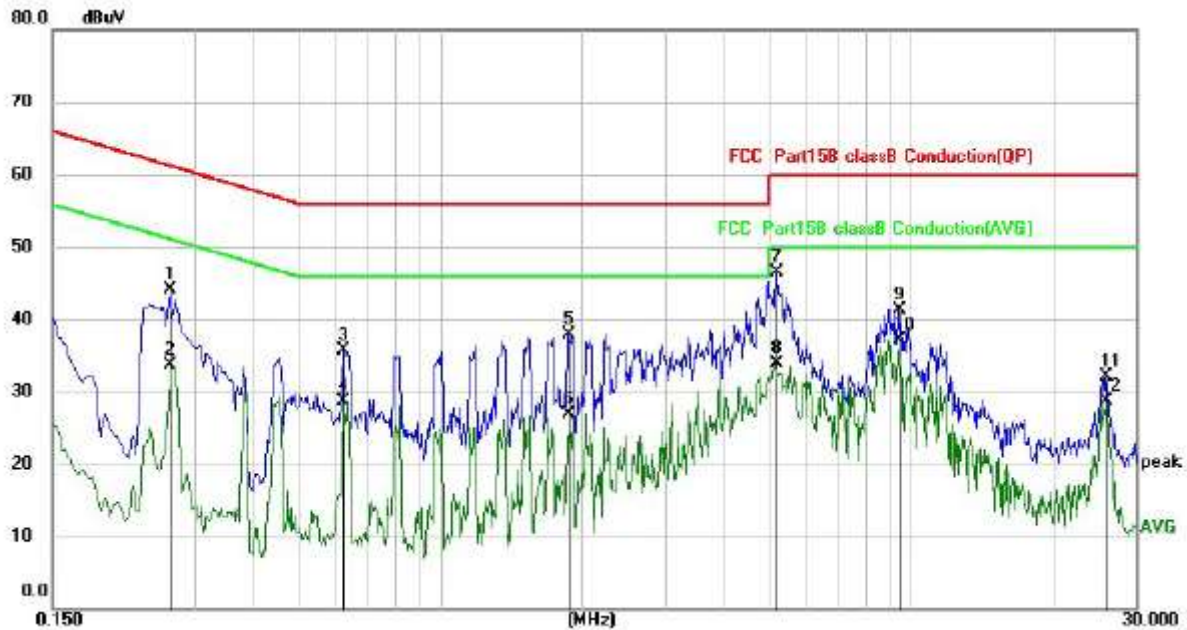


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2660	34.06	9.96	44.02	61.24	-17.22	QP
2		0.2660	23.81	9.96	33.77	51.24	-17.47	AVG
3		0.6219	25.77	9.96	35.73	56.00	-20.27	QP
4		0.6219	18.83	9.96	28.79	46.00	-17.21	AVG
5		1.8660	27.98	10.01	37.99	56.00	-18.01	QP
6		1.8660	16.81	10.01	26.82	46.00	-19.18	AVG
7		5.1578	36.26	10.19	46.45	60.00	-13.55	QP
8		5.1578	23.76	10.19	33.95	50.00	-16.05	AVG
9		9.4018	30.66	10.72	41.38	60.00	-18.62	QP
10	*	9.4018	26.46	10.72	37.18	50.00	-12.82	AVG
11		25.8700	20.89	11.23	32.12	60.00	-27.88	QP
12		25.8700	17.52	11.23	28.75	50.00	-21.25	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

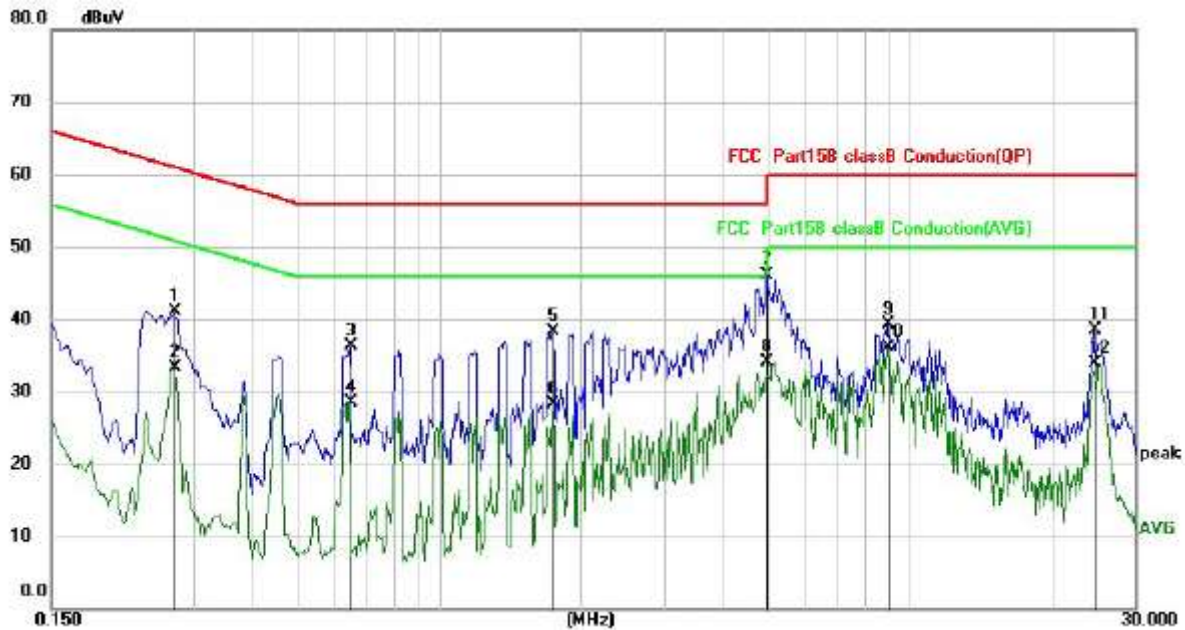

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2740	31.20	9.96	41.16	61.00	-19.84	QP
2		0.2740	23.34	9.96	33.30	51.00	-17.70	AVG
3		0.6460	26.41	9.96	36.37	56.00	-19.63	QP
4		0.6460	18.64	9.96	28.60	46.00	-17.40	AVG
5		1.7419	28.34	10.00	38.34	56.00	-17.66	QP
6		1.7419	18.32	10.00	28.32	46.00	-17.68	AVG
7	*	4.9659	35.91	10.17	46.08	56.00	-9.92	QP
8		4.9659	23.96	10.17	34.13	46.00	-11.87	AVG
9		8.9579	28.64	10.67	39.31	60.00	-20.69	QP
10		8.9579	25.46	10.67	36.13	50.00	-13.87	AVG
11		24.6178	27.36	11.21	38.57	60.00	-21.43	QP
12		24.6178	22.68	11.21	33.89	50.00	-16.11	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

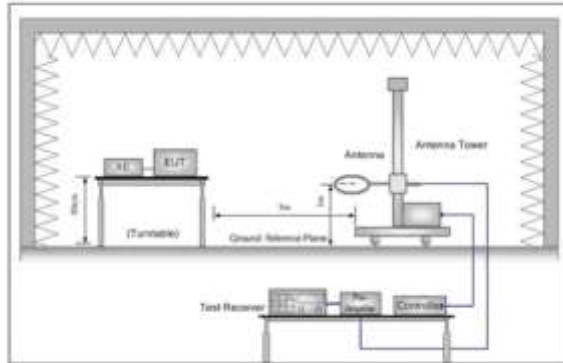


Figure 1. Below 30MHz

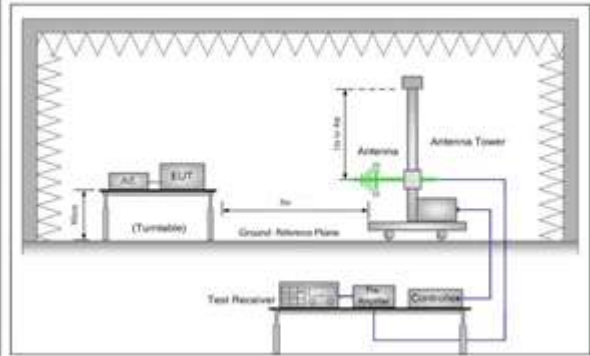


Figure 2. 30MHz to 1GHz

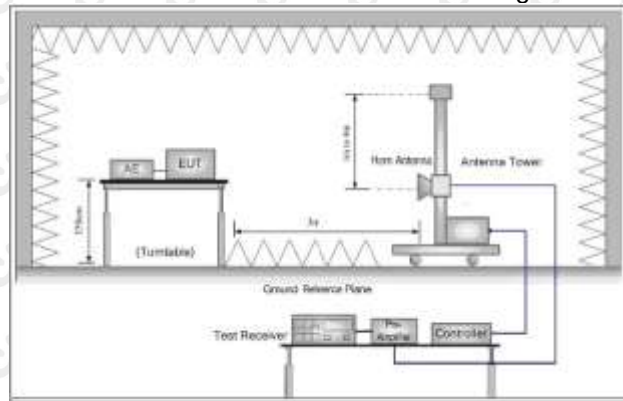


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		55.9025	29.29	-5.95	23.34	40.00	-16.66	QP
2	!	110.7626	45.51	-7.91	37.60	43.50	-5.90	QP
3		185.7880	44.15	-7.96	36.19	43.50	-7.31	QP
4	!	221.3916	46.31	-6.58	39.73	43.50	-3.77	QP
5	*	408.9458	44.38	-1.47	42.91	46.00	-3.09	QP
6	!	668.1422	37.13	3.52	40.65	46.00	-5.35	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

Antenna polarity: V

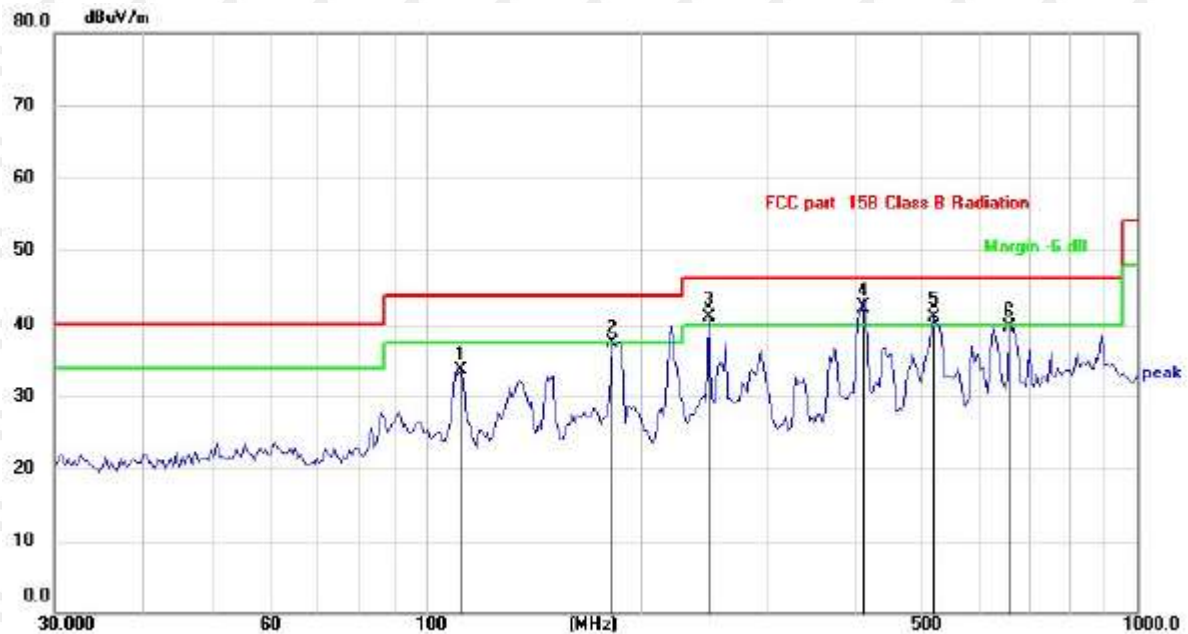

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		111.7377	41.47	-7.80	33.67	43.50	-9.83	QP
2	!	182.5592	45.43	-7.87	37.56	43.50	-5.94	QP
3	!	250.3009	46.76	-5.70	41.06	46.00	-4.94	QP
4	*	412.5466	43.60	-1.38	42.22	46.00	-3.78	QP
5	!	518.1556	40.00	1.05	41.05	46.00	-4.95	QP
6		662.3106	36.25	3.44	39.69	46.00	-6.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: TM1 (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: TM1 (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: TM1 (the worst)

Above 1 GHz Test Results:

ANT2:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.30	-3.64	62.66	74	-11.34	peak
4824	48.75	-3.64	45.11	54	-8.89	AVG
7236	57.53	-0.95	56.58	74	-17.42	peak
7236	46.06	-0.95	45.11	54	-8.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.82	-3.64	63.18	74	-10.82	peak
4824	47.17	-3.64	43.53	54	-10.47	AVG
7236	57.37	-0.95	56.42	74	-17.58	peak
7236	45.73	-0.95	44.78	54	-9.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2:

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.53	-3.51	60.02	74	-13.98	peak
4874	49.80	-3.51	46.29	54	-7.71	AVG
7311	59.45	-0.82	58.63	74	-15.37	peak
7311	45.60	-0.82	44.78	54	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.07	-3.51	60.56	74	-13.44	peak
4874	48.12	-3.51	44.61	54	-9.39	AVG
7311	59.68	-0.82	58.86	74	-15.14	peak
7311	43.12	-0.82	42.30	54	-11.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2:

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.74	-3.43	59.31	74	-14.69	peak
4924	46.29	-3.43	42.86	54	-11.14	AVG
7386	57.23	-0.75	56.48	74	-17.52	peak
7386	42.38	-0.75	41.63	54	-12.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.24	-3.43	61.81	74	-12.19	peak
4924	47.29	-3.43	43.86	54	-10.14	AVG
7386	59.21	-0.75	58.46	74	-15.54	peak
7386	42.23	-0.75	41.48	54	-12.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2:

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.01	-3.64	61.37	74	-12.63	peak
4824	50.17	-3.64	46.53	54	-7.47	AVG
7236	59.37	-0.95	58.42	74	-15.58	peak
7236	44.09	-0.95	43.14	54	-10.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.46	-3.64	58.82	74	-15.18	peak
4824	47.13	-3.64	43.49	54	-10.51	AVG
7236	60.62	-0.95	59.67	74	-14.33	peak
7236	43.41	-0.95	42.46	54	-11.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2:

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.63	-3.51	61.12	74	-12.88	peak
4874	48.51	-3.51	45.00	54	-9.00	AVG
7311	58.41	-0.82	57.59	74	-16.41	peak
7311	44.31	-0.82	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.80	-3.51	59.29	74	-14.71	peak
4874	46.87	-3.51	43.36	54	-10.64	AVG
7311	57.15	-0.82	56.33	74	-17.67	peak
7311	42.26	-0.82	41.44	54	-12.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2:

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.07	-3.43	59.64	74	-14.36	peak
4924	47.83	-3.43	44.40	54	-9.60	AVG
7386	57.84	-0.75	57.09	74	-16.91	peak
7386	43.69	-0.75	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.60	-3.43	59.17	74	-14.83	peak
4924	48.11	-3.43	44.68	54	-9.32	AVG
7386	57.31	-0.75	56.56	74	-17.44	peak
7386	41.84	-0.75	41.09	54	-12.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2:

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.03	-3.64	59.39	74	-14.61	peak
4824	47.85	-3.64	44.21	54	-9.79	AVG
7236	58.96	-0.95	58.01	74	-15.99	peak
7236	43.83	-0.95	42.88	54	-11.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.98	-3.64	59.34	74	-14.66	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	60.67	-0.95	59.72	74	-14.28	peak
7236	44.71	-0.95	43.76	54	-10.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT2:

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.26	-3.51	59.75	74.00	-14.25	peak
4874.00	49.68	-3.51	46.17	54.00	-7.83	AVG
7311.00	56.18	-0.82	55.36	74.00	-18.64	peak
7311.00	42.95	-0.82	42.13	54.00	-11.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.94	-3.51	60.43	74.00	-13.57	peak
4874.00	46.89	-3.51	43.38	54.00	-10.62	AVG
7311.00	58.65	-0.82	57.83	74.00	-16.17	peak
7311.00	42.66	-0.82	41.84	54.00	-12.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2:

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.30	-3.43	58.87	74	-15.13	peak
4924	47.84	-3.43	44.41	54	-9.59	AVG
7386	57.13	-0.75	56.38	74	-17.62	peak
7386	42.96	-0.75	42.21	54	-11.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.54	-3.43	62.11	74	-11.89	peak
4924	46.21	-3.43	42.78	54	-11.22	AVG
7386	57.90	-0.75	57.15	74	-16.85	peak
7386	41.80	-0.75	41.05	54	-12.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed

(5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

ANT3:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.17	-3.64	60.53	74	-13.47	peak
4824	49.21	-3.64	45.57	54	-8.43	AVG
7236	59.61	-0.95	58.66	74	-15.34	peak
7236	44.20	-0.95	43.25	54	-10.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.49	-3.64	62.85	74	-11.15	peak
4824	48.66	-3.64	45.02	54	-8.98	AVG
7236	56.31	-0.95	55.36	74	-18.64	peak
7236	45.60	-0.95	44.65	54	-9.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT3:

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.91	-3.51	61.40	74	-12.60	peak
4874	47.80	-3.51	44.29	54	-9.71	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	43.46	-0.82	42.64	54	-11.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.00	-3.51	61.49	74	-12.51	peak
4874	47.32	-3.51	43.81	54	-10.19	AVG
7311	57.64	-0.82	56.82	74	-17.18	peak
7311	42.71	-0.82	41.89	54	-12.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT3:

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.99	-3.43	59.56	74	-14.44	peak
4924	47.05	-3.43	43.62	54	-10.38	AVG
7386	57.67	-0.75	56.92	74	-17.08	peak
7386	43.09	-0.75	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.54	-3.43	60.11	74	-13.89	peak
4924	47.87	-3.43	44.44	54	-9.56	AVG
7386	58.91	-0.75	58.16	74	-15.84	peak
7386	42.59	-0.75	41.84	54	-12.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT3:

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.10	-3.64	61.46	74	-12.54	peak
4824	50.17	-3.64	46.53	54	-7.47	AVG
7236	57.09	-0.95	56.14	74	-17.86	peak
7236	45.18	-0.95	44.23	54	-9.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.81	-3.64	59.17	74	-14.83	peak
4824	46.69	-3.64	43.05	54	-10.95	AVG
7236	58.31	-0.95	57.36	74	-16.64	peak
7236	44.20	-0.95	43.25	54	-10.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT3:

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.50	-3.51	59.99	74	-14.01	
4874	49.54	-3.51	46.03	54	-7.97	AVG
7311	59.71	-0.82	58.89	74	-15.11	peak
7311	43.57	-0.82	42.75	54	-11.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.32	-3.51	60.81	74	-13.19	
4874	47.37	-3.51	43.86	54	-10.14	AVG
7311	57.10	-0.82	56.28	74	-17.72	peak
7311	42.66	-0.82	41.84	54	-12.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT3:

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.43	-3.43	61.00	74	-13.00	peak
4924	48.36	-3.43	44.93	54	-9.07	AVG
7386	58.29	-0.75	57.54	74	-16.46	peak
7386	41.82	-0.75	41.07	54	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.26	-3.43	59.83	74	-14.17	peak
4924	46.68	-3.43	43.25	54	-10.75	AVG
7386	56.90	-0.75	56.15	74	-17.85	peak
7386	41.62	-0.75	40.87	54	-13.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT3:

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.87	-3.64	59.23	74	-14.77	peak
4824	47.86	-3.64	44.22	54	-9.78	AVG
7236	58.79	-0.95	57.84	74	-16.16	peak
7236	42.97	-0.95	42.02	54	-11.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.21	-3.64	59.57	74	-14.43	peak
4824	49.72	-3.64	46.08	54	-7.92	AVG
7236	57.53	-0.95	56.58	74	-17.42	peak
7236	45.74	-0.95	44.79	54	-9.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT3:

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.89	-3.51	61.38	74.00	-12.62	peak
4874.00	48.26	-3.51	44.75	54.00	-9.25	AVG
7311.00	58.12	-0.82	57.30	74.00	-16.70	peak
7311.00	43.41	-0.82	42.59	54.00	-11.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.35	-3.51	60.84	74.00	-13.16	peak
4874.00	47.70	-3.51	44.19	54.00	-9.81	AVG
7311.00	58.11	-0.82	57.29	74.00	-16.71	peak
7311.00	41.37	-0.82	40.55	54.00	-13.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT3:

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.65	-3.43	59.22	74	-14.78	peak
4924	46.47	-3.43	43.04	54	-10.96	AVG
7386	58.23	-0.75	57.48	74	-16.52	peak
7386	43.71	-0.75	42.96	54	-11.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.35	-3.43	60.92	74	-13.08	peak
4924	47.11	-3.43	43.68	54	-10.32	AVG
7386	57.56	-0.75	56.81	74	-17.19	peak
7386	42.21	-0.75	41.46	54	-12.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT2:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.08	-5.81	51.27	74	-22.73	
2390	/	-5.81	/	54	/	AVG
2399	63.69	-5.84	57.85	74	-16.15	peak
2399	48.01	-5.84	42.17	54	-11.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.29	-5.81	50.48	74	-23.52	
2390	/	-5.81	/	54	/	AVG
2399	63.06	-5.84	57.22	74	-16.78	peak
2399	46.00	-5.84	40.16	54	-13.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:
ANT2:

802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.60	-5.65	50.95	74	-23.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.24	-5.65	50.59	74	-23.41	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT2:

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.99	-5.81	52.18	74	-21.82	peak
2390	/	-5.81	/	54	/	AVG
2399	62.29	-5.84	56.45	74	-17.55	peak
2399	46.34	-5.84	40.50	54	-13.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.34	-5.81	51.53	74	-22.47	peak
2390	/	-5.81	/	54	/	AVG
2399	61.47	-5.84	55.63	74	-18.37	peak
2399	45.42	-5.84	39.58	54	-14.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT2:

802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.86	-5.65	52.21	74	-21.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.80	-5.65	52.15	74	-21.85	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:
ANT2:

802.11n/H2O Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.08	-5.81	50.27	74	-23.73	peak
2390	/	-5.81	/	54	/	AVG
2399	62.04	-5.84	56.20	74	-17.80	peak
2399	47.23	-5.84	41.39	54	-12.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.77	-5.81	49.96	74	-24.04	peak
2390	/	-5.81	/	54	/	AVG
2399	60.86	-5.84	55.02	74	-18.98	peak
2399	46.94	-5.84	41.10	54	-12.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT2:

802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.98	-5.65	50.33	74	-23.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.90	-5.65	51.25	74	-22.75	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

ANT3:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.19	-5.81	51.38	74	-22.62	peak
2390	/	-5.81	/	54	/	AVG
2399	63.52	-5.84	57.68	74	-16.32	peak
2399	49.46	-5.84	43.62	54	-10.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.16	-5.81	50.35	74	-23.65	peak
2390	/	-5.81	/	54	/	AVG
2399	62.24	-5.84	56.40	74	-17.60	peak
2399	46.21	-5.84	40.37	54	-13.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT3:

802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.79	-5.65	51.14	74	-22.86	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.45	-5.65	50.80	74	-23.20	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT3:

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.19	-5.81	53.38	74	-20.62	peak
2390	/	-5.81	/	54	/	AVG
2399	63.41	-5.84	57.57	74	-16.43	peak
2399	46.79	-5.84	40.95	54	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.64	-5.81	50.83	74	-23.17	peak
2390	/	-5.81	/	54	/	AVG
2399	62.80	-5.84	56.96	74	-17.04	peak
2399	46.47	-5.84	40.63	54	-13.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT3:

802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.60	-5.65	50.95	74	-23.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.54	-5.65	50.89	74	-23.11	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT3:

802.11n/H2O Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.01	-5.81	51.20	74	-22.80	peak
2390	/	-5.81	/	54	/	AVG
2399	63.77	-5.84	57.93	74	-16.07	peak
2399	47.01	-5.84	41.17	54	-12.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.30	-5.81	50.49	74	-23.51	peak
2390	/	-5.81	/	54	/	AVG
2399	59.91	-5.84	54.07	74	-19.93	peak
2399	47.55	-5.84	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:
ANT3:

802.11n/H20 Mode TX CH High (2462MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.66	-5.65	50.01	74	-23.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.79	-5.65	51.14	74	-22.86	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

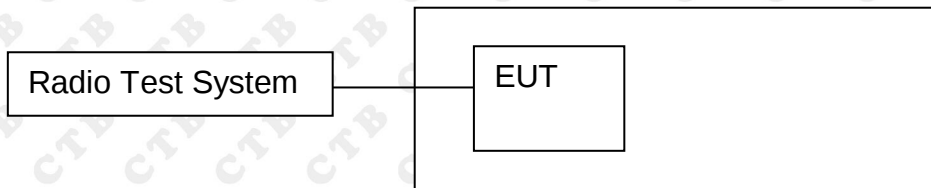

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT2:




BAND EDGE Graphs


802.11g/LCH

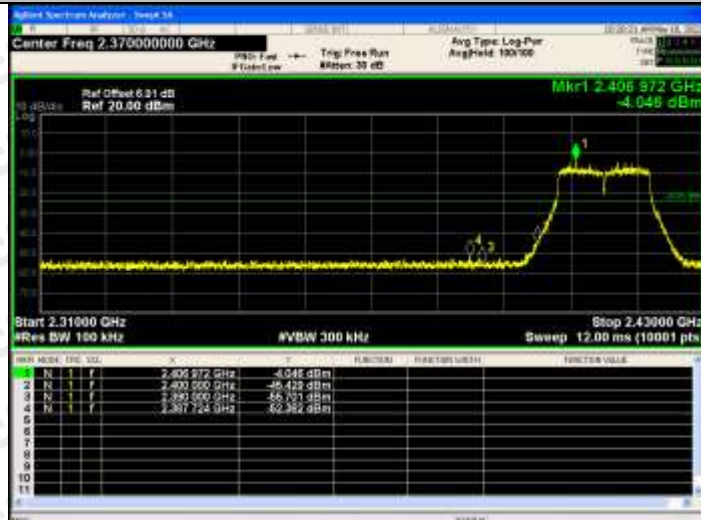

802.11g/HCH

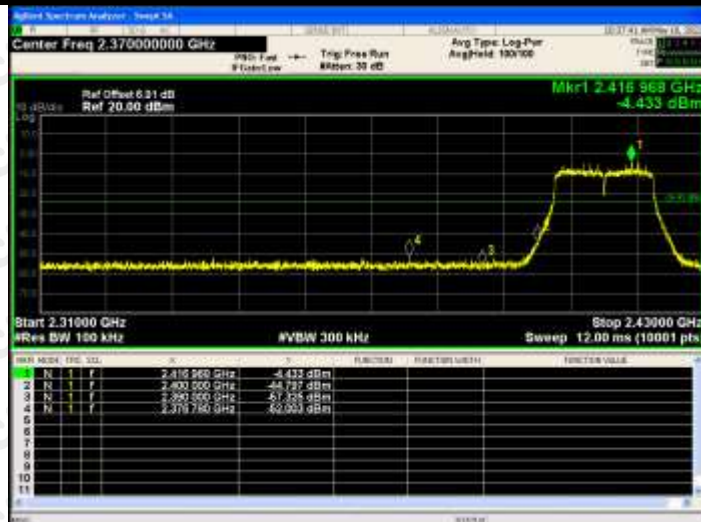


802.11n(HT20)/L
CH

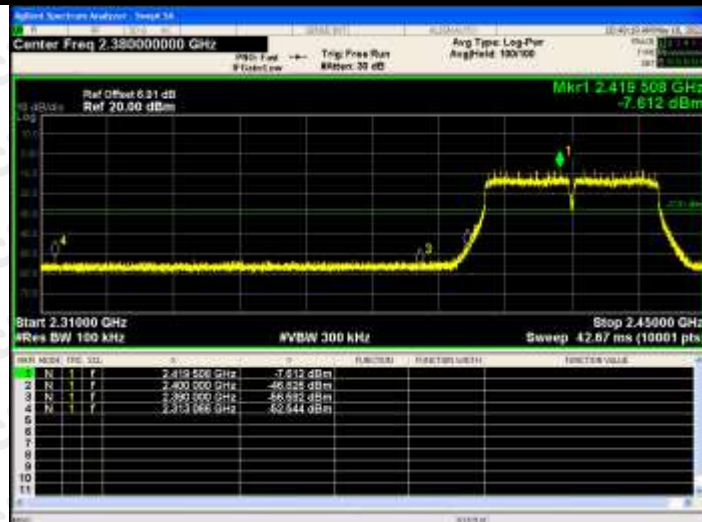802.11n(HT20)/H
CH



802.11n(HT40)/L
CH

802.11
n(HT40)/HCH

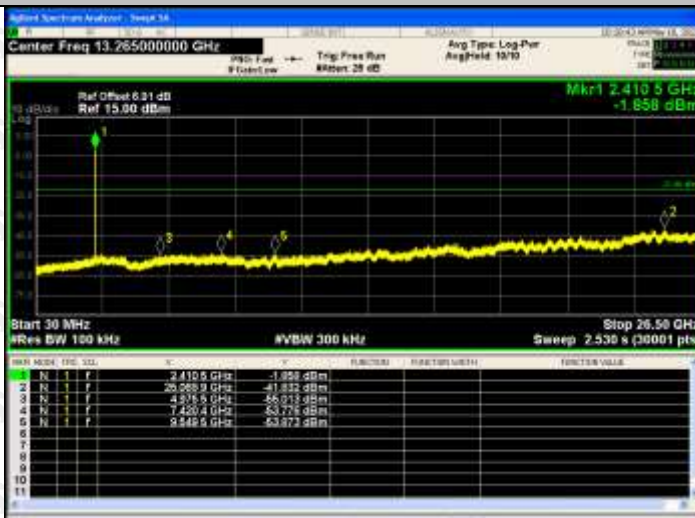
RF Conducted Spurious Emissions Graphs


802.11b/LCH

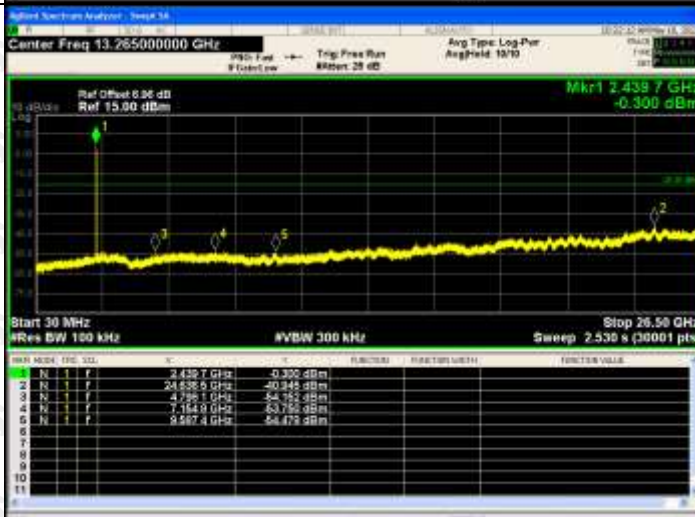

802.11b/MCH




802.11b/HCH

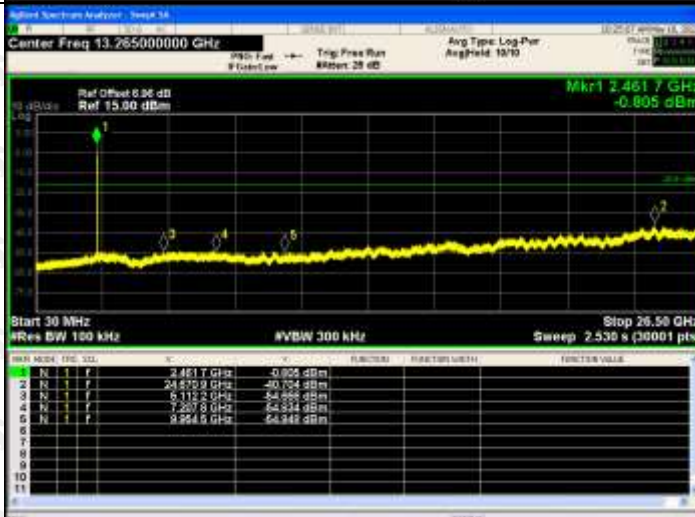


RF Conducted Spurious Emissions Graphs


802.11g/LCH

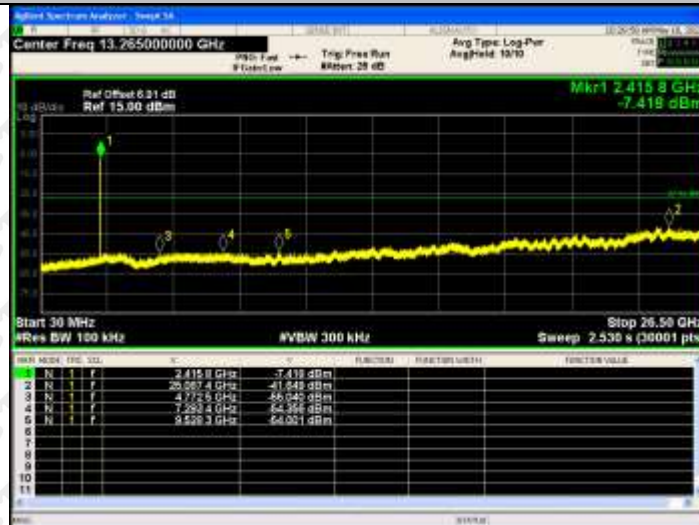

802.11g/MCH

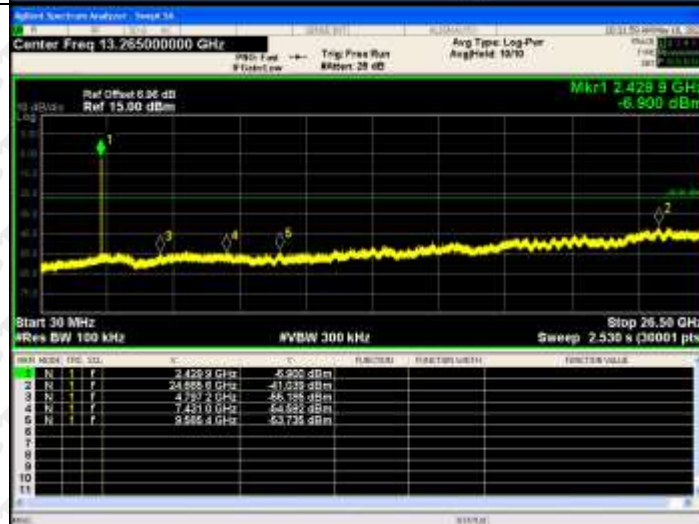


802.11g/HCH

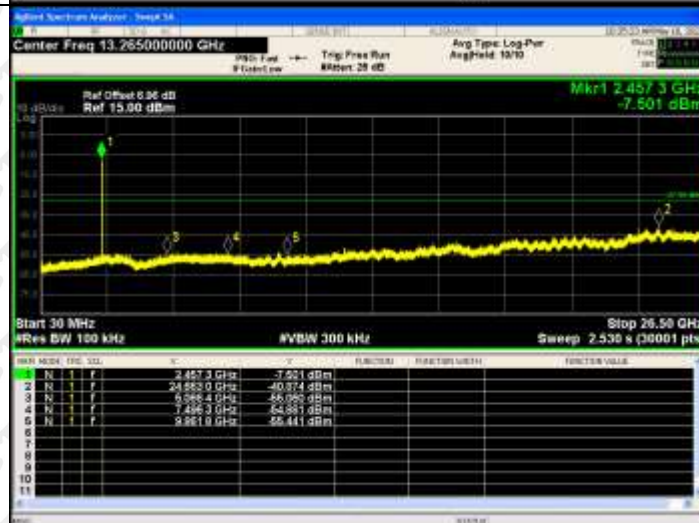


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



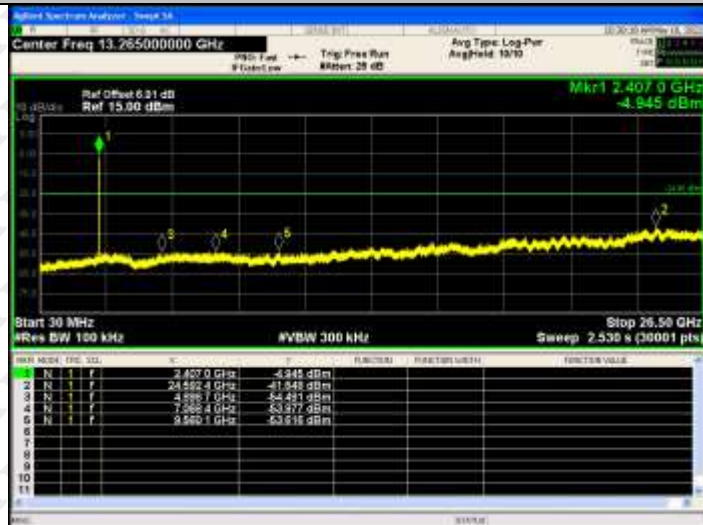


802.11 n(HT20)/MCH

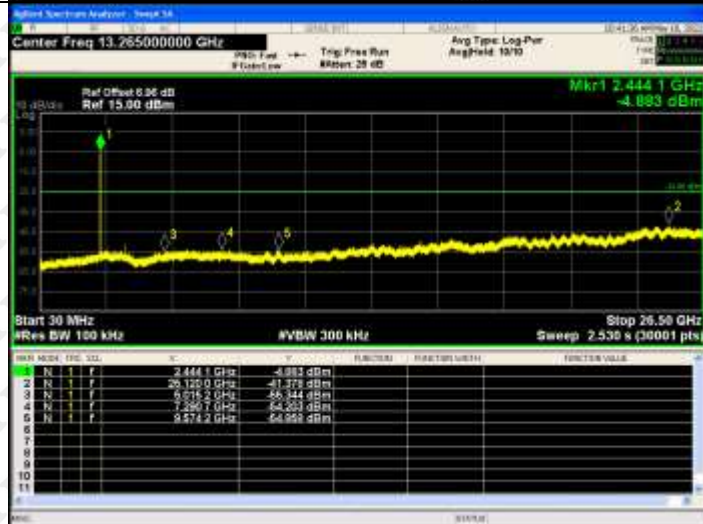

802.11 n(HT20)/HCH

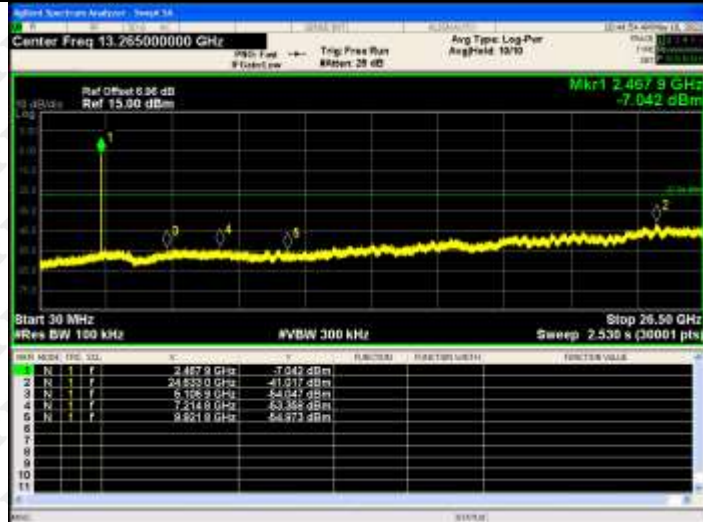


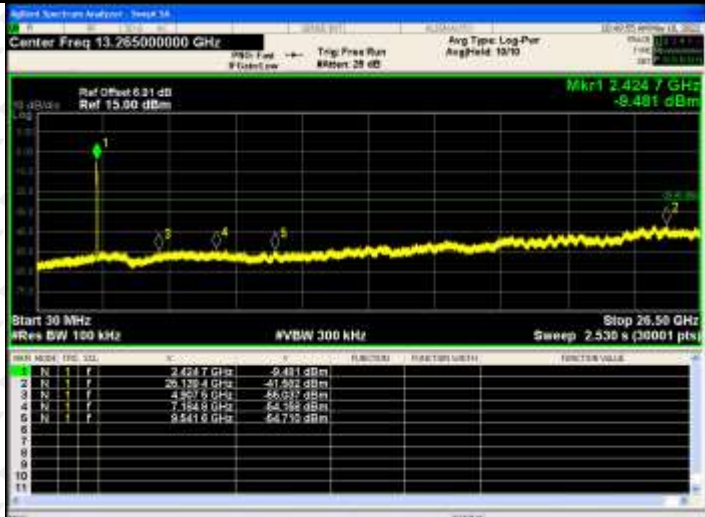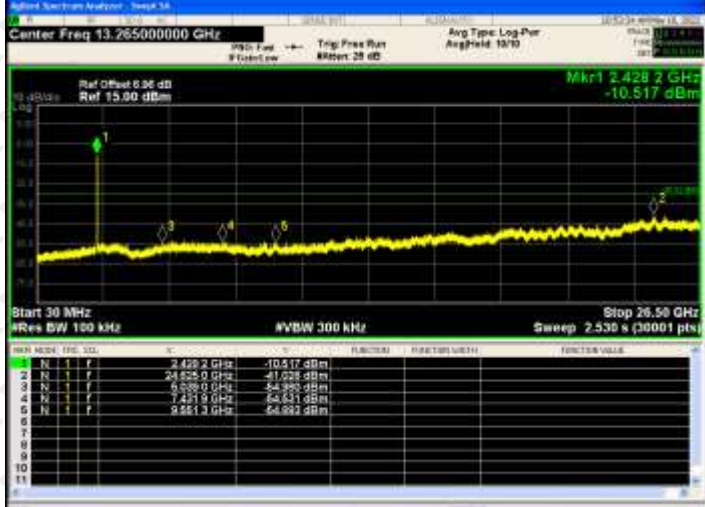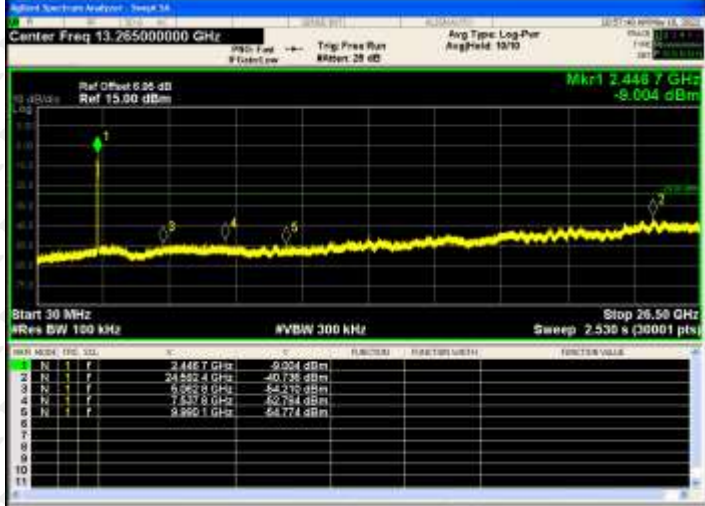802.11n(HT40)/LCH	 Center Freq 13.265000000 GHz Ref Offset 6.51 dB Ref 13.50 dBm Mkr1 2.4247 GHz -9.481 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.58 GHz Sweep 2.530 s (30001 pts) <table><tr><th>CHN</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4247 GHz</td><td>-9.481 dBm</td></tr><tr><td>2</td><td>N</td><td>24.129 GHz</td><td>-41.582 dBm</td></tr><tr><td>3</td><td>N</td><td>2.425 GHz</td><td>-26.017 dBm</td></tr><tr><td>4</td><td>N</td><td>2.4248 GHz</td><td>-25.288 dBm</td></tr><tr><td>5</td><td>N</td><td>2.425 GHz</td><td>-26.017 dBm</td></tr><tr><td>6</td><td>N</td><td>2.4248 GHz</td><td>-25.288 dBm</td></tr></table>	CHN	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4247 GHz	-9.481 dBm	2	N	24.129 GHz	-41.582 dBm	3	N	2.425 GHz	-26.017 dBm	4	N	2.4248 GHz	-25.288 dBm	5	N	2.425 GHz	-26.017 dBm	6	N	2.4248 GHz	-25.288 dBm
CHN	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4247 GHz	-9.481 dBm																										
2	N	24.129 GHz	-41.582 dBm																										
3	N	2.425 GHz	-26.017 dBm																										
4	N	2.4248 GHz	-25.288 dBm																										
5	N	2.425 GHz	-26.017 dBm																										
6	N	2.4248 GHz	-25.288 dBm																										
802.11 n(HT40)/MCH	 Center Freq 13.265000000 GHz Ref Offset 6.56 dB Ref 13.50 dBm Mkr1 2.4282 GHz -10.517 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.58 GHz Sweep 2.530 s (30001 pts) <table><tr><th>CHN</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4282 GHz</td><td>-10.517 dBm</td></tr><tr><td>2</td><td>N</td><td>24.525 GHz</td><td>-41.528 dBm</td></tr><tr><td>3</td><td>N</td><td>2.428 GHz</td><td>-25.288 dBm</td></tr><tr><td>4</td><td>N</td><td>2.428 GHz</td><td>-25.288 dBm</td></tr><tr><td>5</td><td>N</td><td>2.428 GHz</td><td>-25.288 dBm</td></tr><tr><td>6</td><td>N</td><td>2.428 GHz</td><td>-25.288 dBm</td></tr></table>	CHN	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4282 GHz	-10.517 dBm	2	N	24.525 GHz	-41.528 dBm	3	N	2.428 GHz	-25.288 dBm	4	N	2.428 GHz	-25.288 dBm	5	N	2.428 GHz	-25.288 dBm	6	N	2.428 GHz	-25.288 dBm
CHN	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4282 GHz	-10.517 dBm																										
2	N	24.525 GHz	-41.528 dBm																										
3	N	2.428 GHz	-25.288 dBm																										
4	N	2.428 GHz	-25.288 dBm																										
5	N	2.428 GHz	-25.288 dBm																										
6	N	2.428 GHz	-25.288 dBm																										
802.11 n(HT40)/HCH	 Center Freq 13.265000000 GHz Ref Offset 6.56 dB Ref 13.50 dBm Mkr1 2.4467 GHz -9.004 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.58 GHz Sweep 2.530 s (30001 pts) <table><tr><th>CHN</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4467 GHz</td><td>-9.004 dBm</td></tr><tr><td>2</td><td>N</td><td>24.552 GHz</td><td>-40.736 dBm</td></tr><tr><td>3</td><td>N</td><td>2.446 GHz</td><td>-25.288 dBm</td></tr><tr><td>4</td><td>N</td><td>2.446 GHz</td><td>-25.288 dBm</td></tr><tr><td>5</td><td>N</td><td>2.446 GHz</td><td>-25.288 dBm</td></tr><tr><td>6</td><td>N</td><td>2.446 GHz</td><td>-25.288 dBm</td></tr></table>	CHN	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4467 GHz	-9.004 dBm	2	N	24.552 GHz	-40.736 dBm	3	N	2.446 GHz	-25.288 dBm	4	N	2.446 GHz	-25.288 dBm	5	N	2.446 GHz	-25.288 dBm	6	N	2.446 GHz	-25.288 dBm
CHN	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4467 GHz	-9.004 dBm																										
2	N	24.552 GHz	-40.736 dBm																										
3	N	2.446 GHz	-25.288 dBm																										
4	N	2.446 GHz	-25.288 dBm																										
5	N	2.446 GHz	-25.288 dBm																										
6	N	2.446 GHz	-25.288 dBm																										


ANT3:

BAND EDGE Graphs

802.11b/LCH

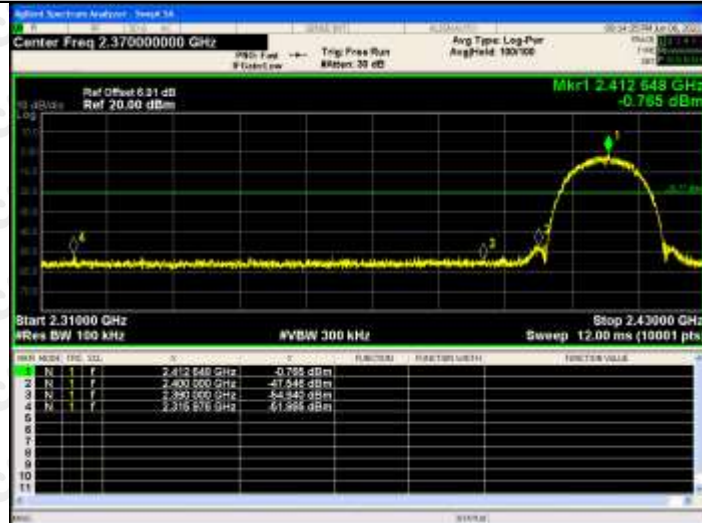


802.11b/HCH

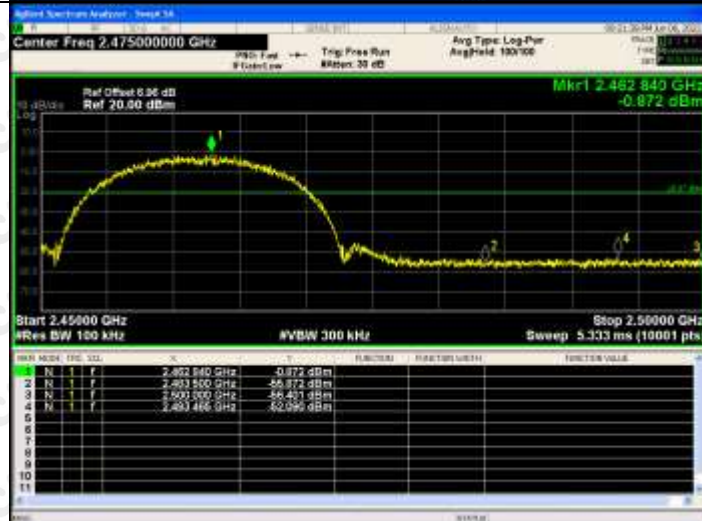


BAND EDGE Graphs


802.11g/LCH

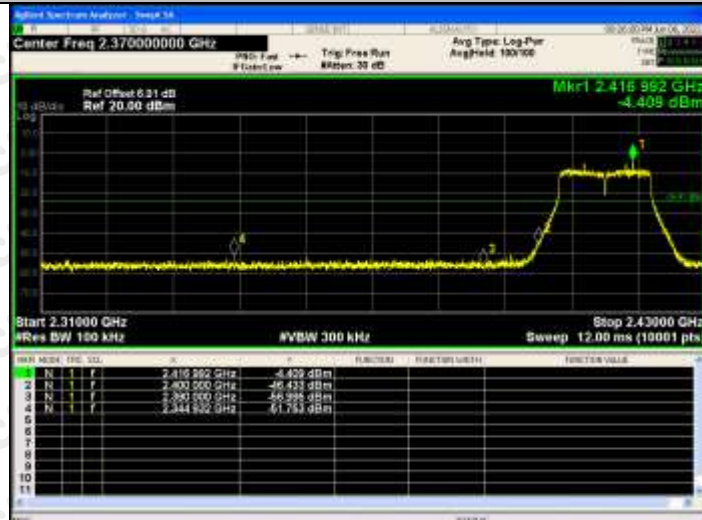

802.11g/HCH

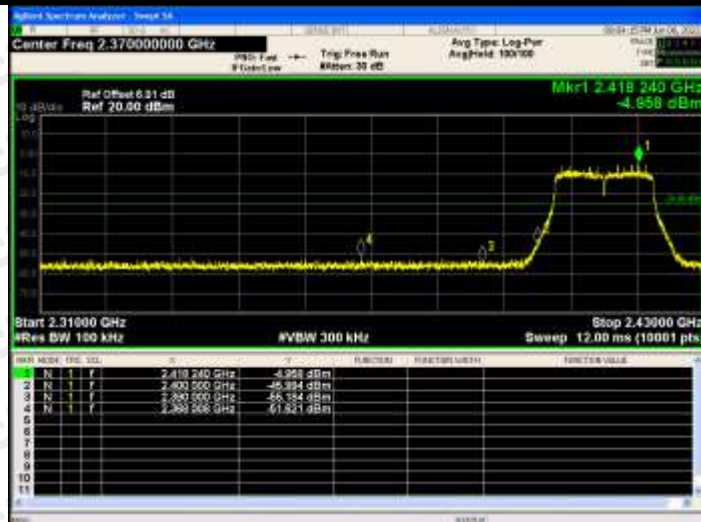


802.11n(HT20)/L
CH

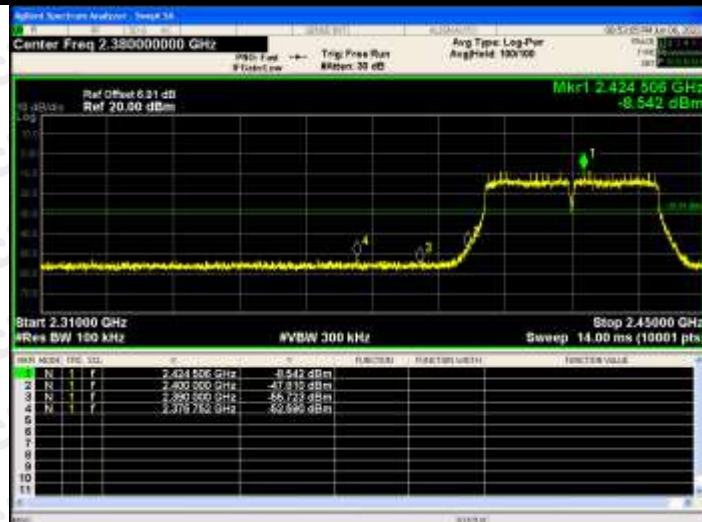802.11n(HT20)/H
CH



802.11n(HT40)/L
CH

802.11
n(HT40)/HCH

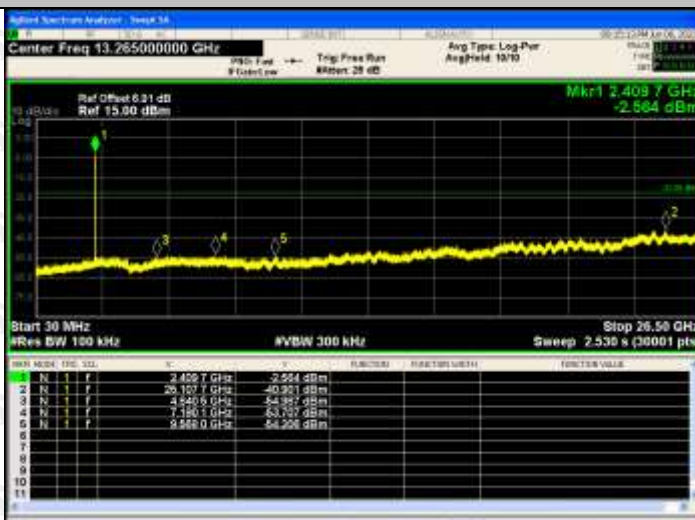
RF Conducted Spurious Emissions Graphs


802.11b/LCH

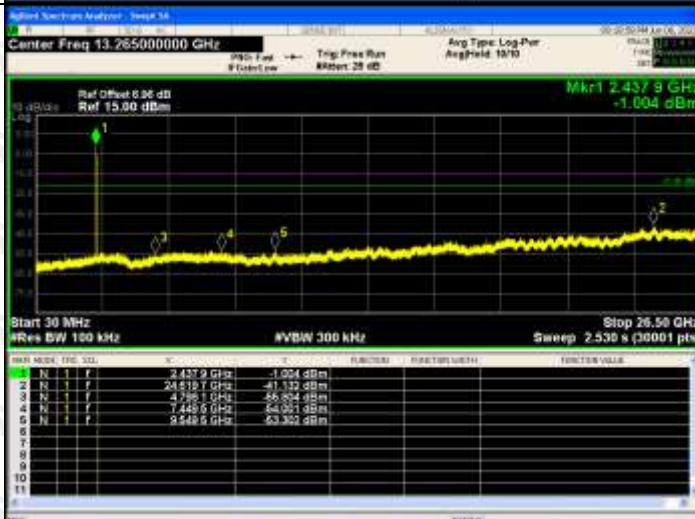

802.11b/MCH




802.11b/HCH

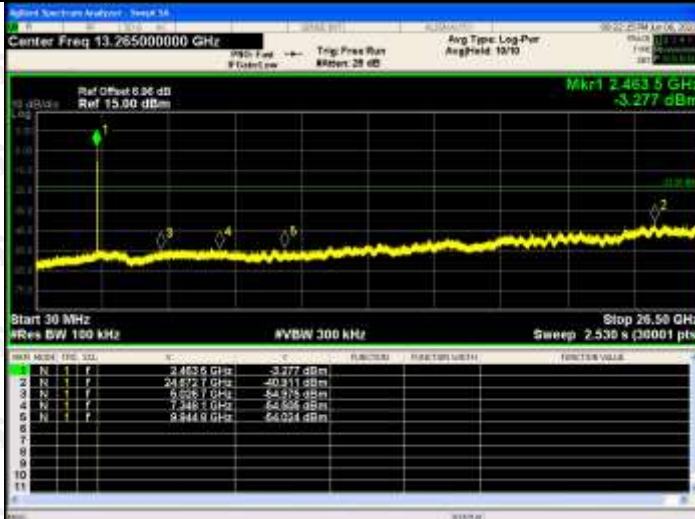


RF Conducted Spurious Emissions Graphs


802.11g/LCH

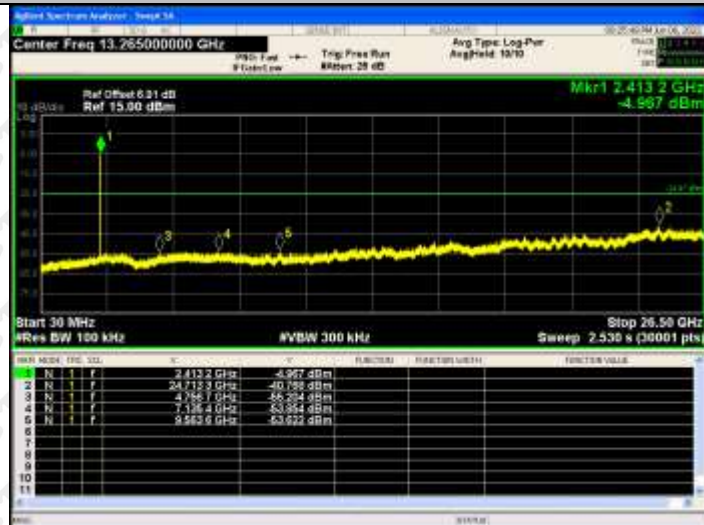

802.11g/MCH

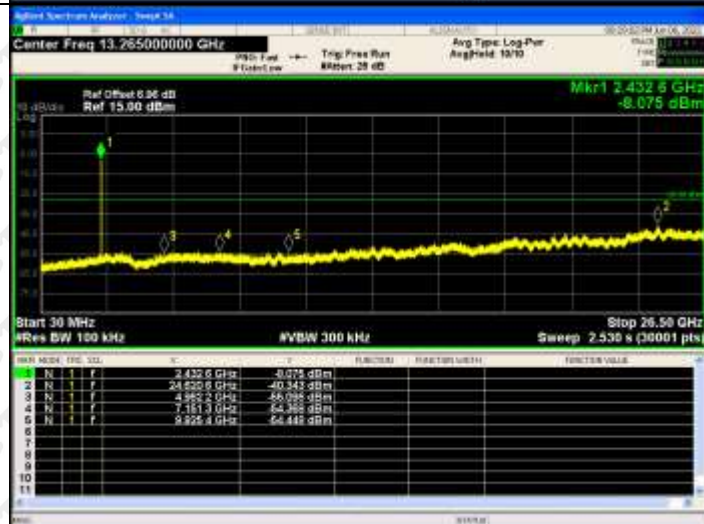


802.11g/HCH

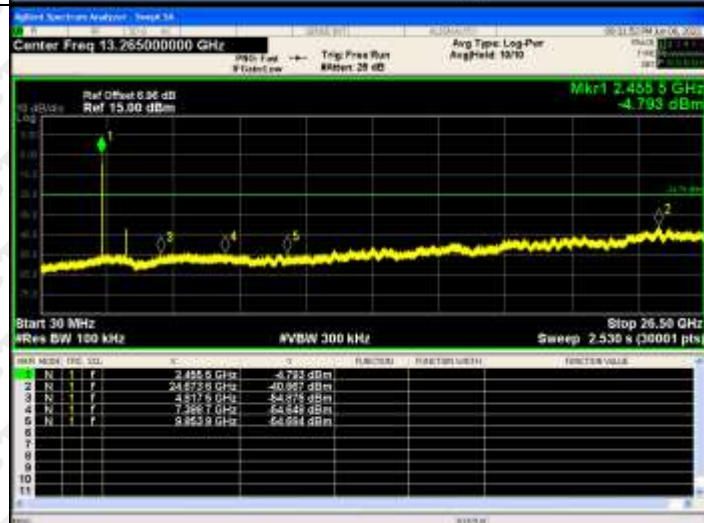


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH


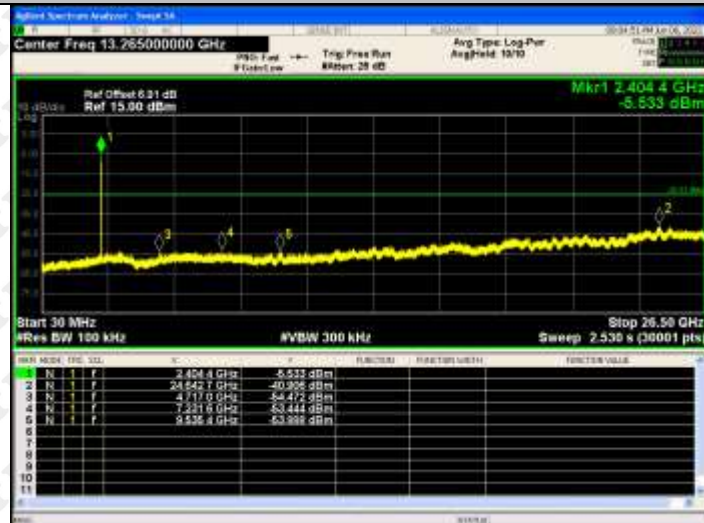


802.11 n(HT20)/MCH

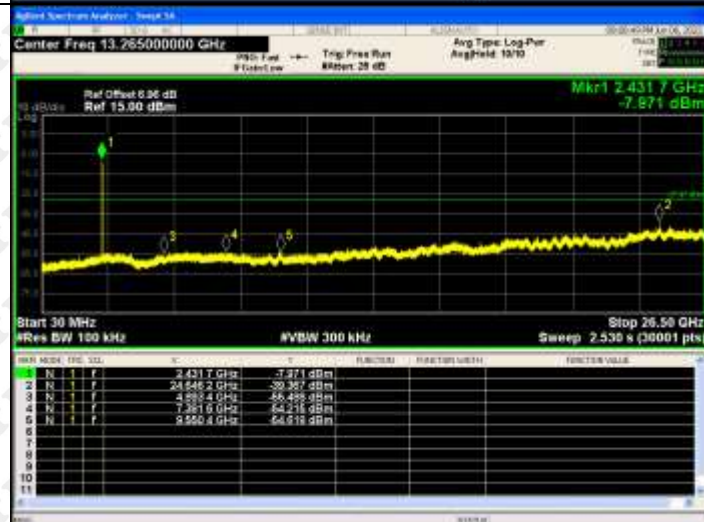

802.11 n(HT20)/HCH

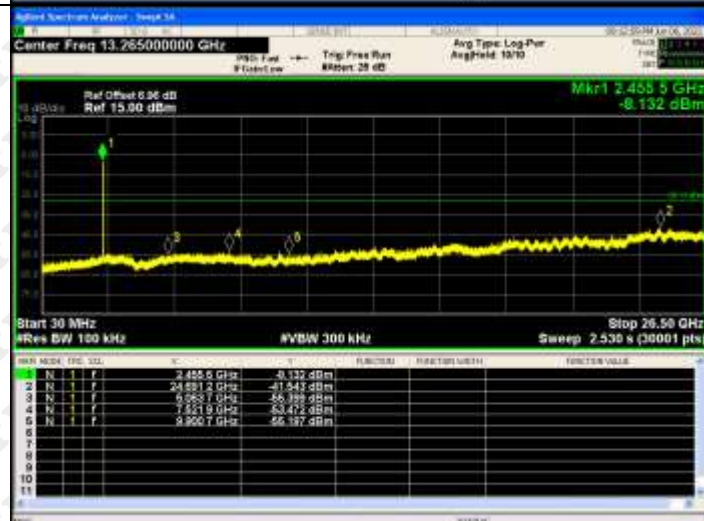

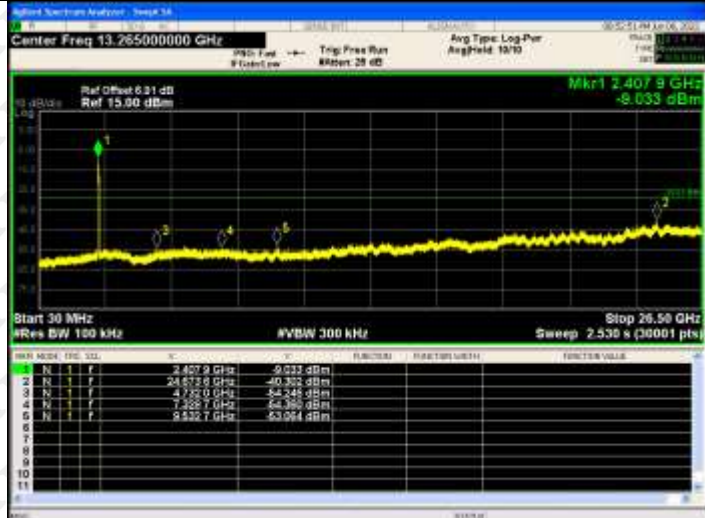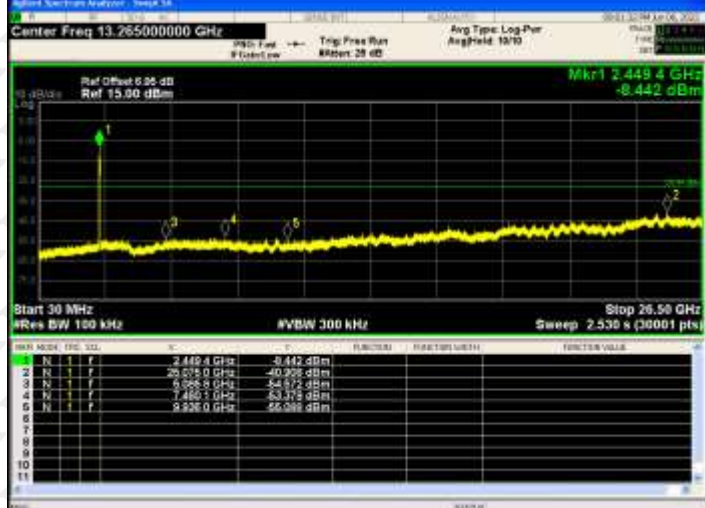802.11n(HT40)/LCH	 <table><tr><th>CH</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4079 GHz</td><td>-8.033 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6720 GHz</td><td>-40.303 dBm</td></tr><tr><td>3</td><td>N</td><td>2.4250 GHz</td><td>-41.348 dBm</td></tr><tr><td>4</td><td>N</td><td>2.4320 GHz</td><td>-58.545 dBm</td></tr><tr><td>5</td><td>N</td><td>2.4380 GHz</td><td>-53.131 dBm</td></tr><tr><td>6</td><td>N</td><td>2.4440 GHz</td><td>-53.084 dBm</td></tr></table>	CH	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4079 GHz	-8.033 dBm	2	N	24.6720 GHz	-40.303 dBm	3	N	2.4250 GHz	-41.348 dBm	4	N	2.4320 GHz	-58.545 dBm	5	N	2.4380 GHz	-53.131 dBm	6	N	2.4440 GHz	-53.084 dBm
CH	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4079 GHz	-8.033 dBm																										
2	N	24.6720 GHz	-40.303 dBm																										
3	N	2.4250 GHz	-41.348 dBm																										
4	N	2.4320 GHz	-58.545 dBm																										
5	N	2.4380 GHz	-53.131 dBm																										
6	N	2.4440 GHz	-53.084 dBm																										
802.11 n(HT40)/MCH	 <table><tr><th>CH</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4255 GHz</td><td>-8.443 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6720 GHz</td><td>-41.348 dBm</td></tr><tr><td>3</td><td>N</td><td>2.4320 GHz</td><td>-58.545 dBm</td></tr><tr><td>4</td><td>N</td><td>2.4380 GHz</td><td>-53.131 dBm</td></tr><tr><td>5</td><td>N</td><td>2.4440 GHz</td><td>-53.122 dBm</td></tr></table>	CH	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4255 GHz	-8.443 dBm	2	N	24.6720 GHz	-41.348 dBm	3	N	2.4320 GHz	-58.545 dBm	4	N	2.4380 GHz	-53.131 dBm	5	N	2.4440 GHz	-53.122 dBm				
CH	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4255 GHz	-8.443 dBm																										
2	N	24.6720 GHz	-41.348 dBm																										
3	N	2.4320 GHz	-58.545 dBm																										
4	N	2.4380 GHz	-53.131 dBm																										
5	N	2.4440 GHz	-53.122 dBm																										
802.11 n(HT40)/HCH	 <table><tr><th>CH</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.4494 GHz</td><td>-8.442 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6720 GHz</td><td>-40.303 dBm</td></tr><tr><td>3</td><td>N</td><td>2.4320 GHz</td><td>-58.545 dBm</td></tr><tr><td>4</td><td>N</td><td>2.4380 GHz</td><td>-53.131 dBm</td></tr><tr><td>5</td><td>N</td><td>2.4440 GHz</td><td>-53.084 dBm</td></tr></table>	CH	MODE	FREQ (GHz)	Power (dBm)	1	N	2.4494 GHz	-8.442 dBm	2	N	24.6720 GHz	-40.303 dBm	3	N	2.4320 GHz	-58.545 dBm	4	N	2.4380 GHz	-53.131 dBm	5	N	2.4440 GHz	-53.084 dBm				
CH	MODE	FREQ (GHz)	Power (dBm)																										
1	N	2.4494 GHz	-8.442 dBm																										
2	N	24.6720 GHz	-40.303 dBm																										
3	N	2.4320 GHz	-58.545 dBm																										
4	N	2.4380 GHz	-53.131 dBm																										
5	N	2.4440 GHz	-53.084 dBm																										

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 2	Maximum Output Power [dBm] ant 3	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	15.661	14.353	/	30
	MCH	15.729	14.607	/	30
	HCH	15.315	14.411	/	30
802.11g	LCH	14.516	13.721	/	30
	MCH	14.343	13.699	/	30
	HCH	14.313	13.117	/	30
802.11n(HT20)	LCH	14.448	13.453	16.989	30
	MCH	14.383	13.127	16.811	30
	HCH	14.723	13.508	17.168	30
802.11n(HT40)	LCH	13.507	12.33	15.969	30
	MCH	13.559	12.172	15.931	30
	HCH	13.23	12.464	15.874	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

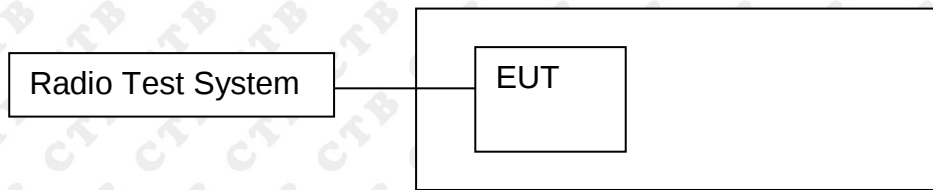

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.455	500	PASS
	MCH	10.584	500	PASS
	HCH	10.258	500	PASS
802.11g	LCH	16.364	500	PASS
	MCH	16.359	500	PASS
	HCH	16.369	500	PASS
802.11n(HT20)	LCH	17.041	500	PASS
	MCH	17.173	500	PASS
	HCH	17.037	500	PASS
802.11n(HT40)	LCH	35.645	500	PASS
	MCH	35.144	500	PASS
	HCH	35.69	500	PASS

ANT3:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.934	500	PASS
	MCH	11.394	500	PASS
	HCH	10.669	500	PASS
802.11g	LCH	16.361	500	PASS
	MCH	16.318	500	PASS
	HCH	16.327	500	PASS
802.11n(HT20)	LCH	17.307	500	PASS
	MCH	16.592	500	PASS
	HCH	16.908	500	PASS
802.11n(HT40)	LCH	35.599	500	PASS
	MCH	35.247	500	PASS
	HCH	35.594	500	PASS

Test Graph:
ANT2:

Graphs

802.11b /LCH




802.11b /MCH




802.11b/HCH

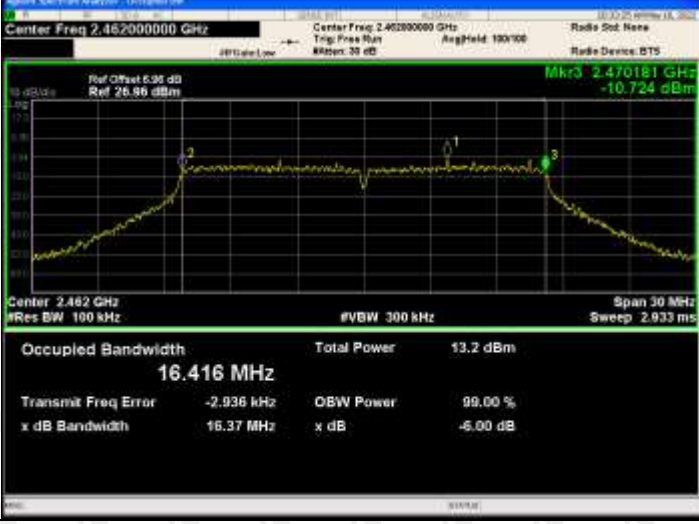

802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

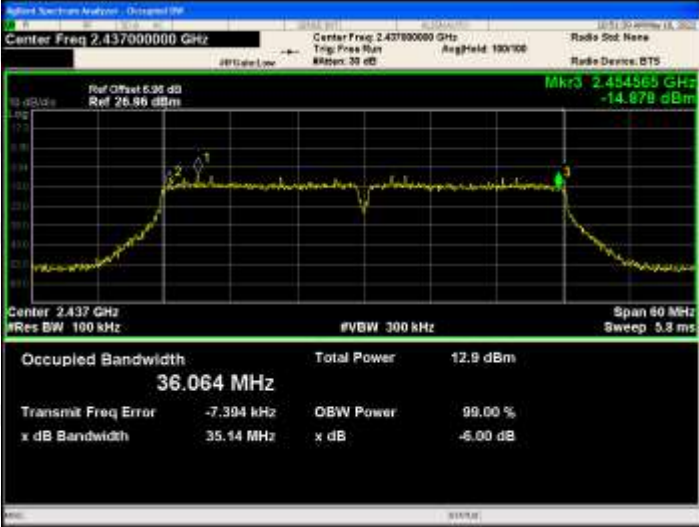802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT3:

Graphs

802.11b /LCH



802.11b /MCH




802.11b/HCH




802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

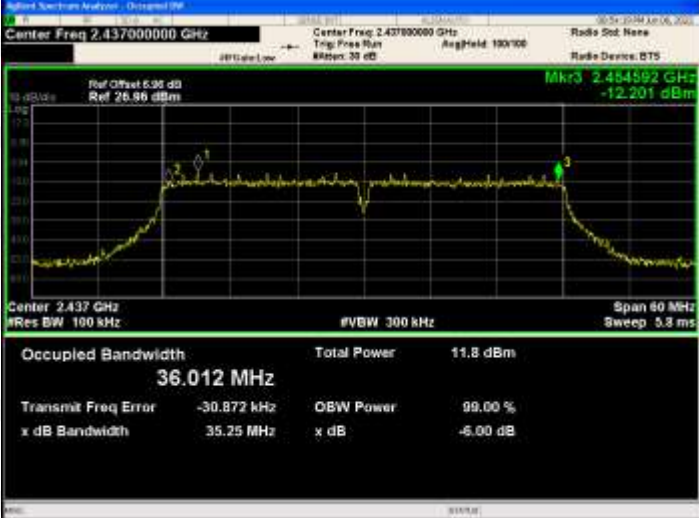802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

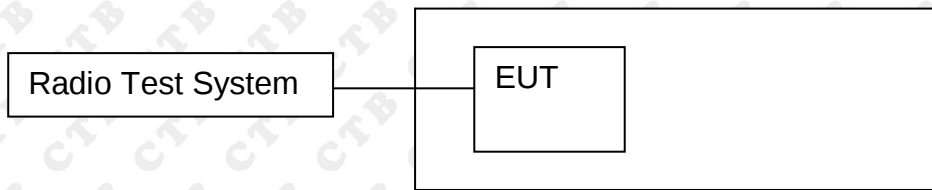

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] ANT 3	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-13.76	-15.244	/	8
	MCH	-13.545	-14.986	/	8
	HCH	-14.144	-15.113	/	8
802.11g	LCH	-17.54	-18.477	/	8
	MCH	-17.929	-18.304	/	8
	HCH	-18.208	-19.376	/	8
802.11n(H T20)	LCH	-17.848	-18.985	-15.369	8
	MCH	-18.22	-19.606	-15.848	8
	HCH	-17.661	-18.754	-15.163	8
802.11n(H T40)	LCH	-21.585	-23.16	-19.291	8
	MCH	-21.93	-23.147	-19.486	8
	HCH	-22.34	-22.94	-19.619	8


Test Graph ANT2:

Graphs


802.11b /LCH



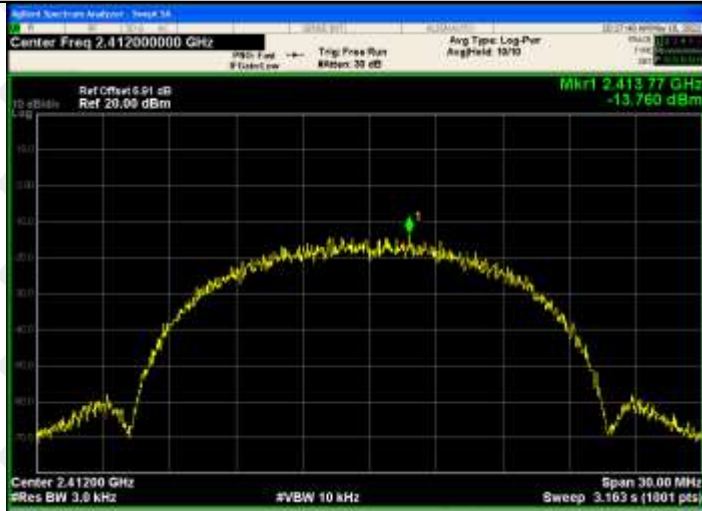





802.11b /MCH



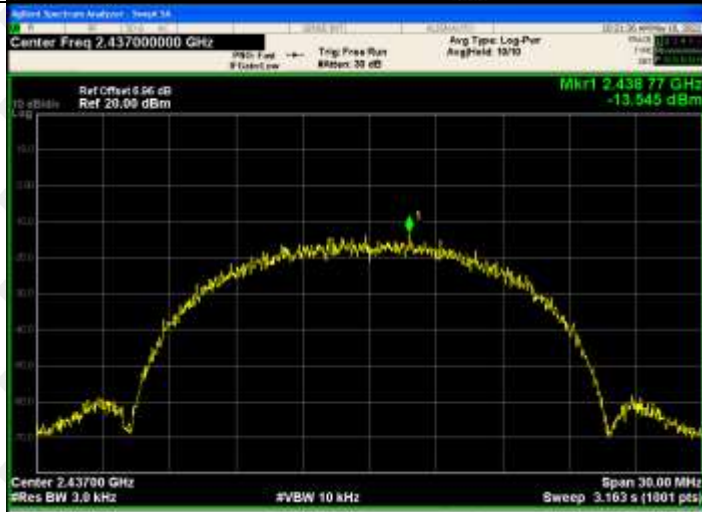


802.11b/HCH

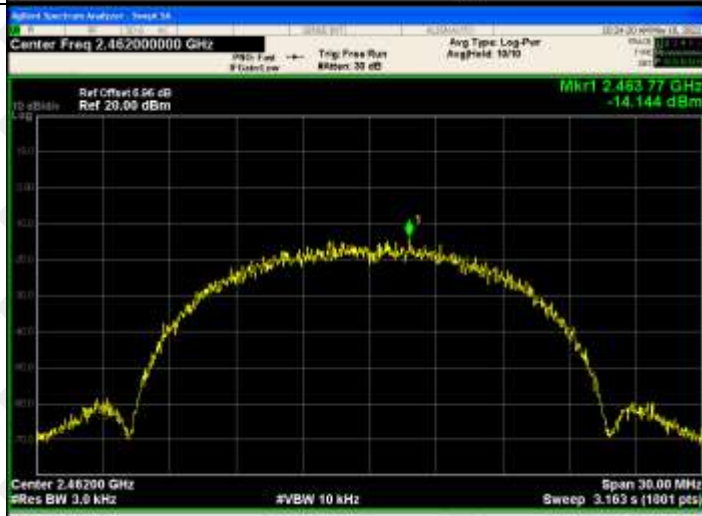

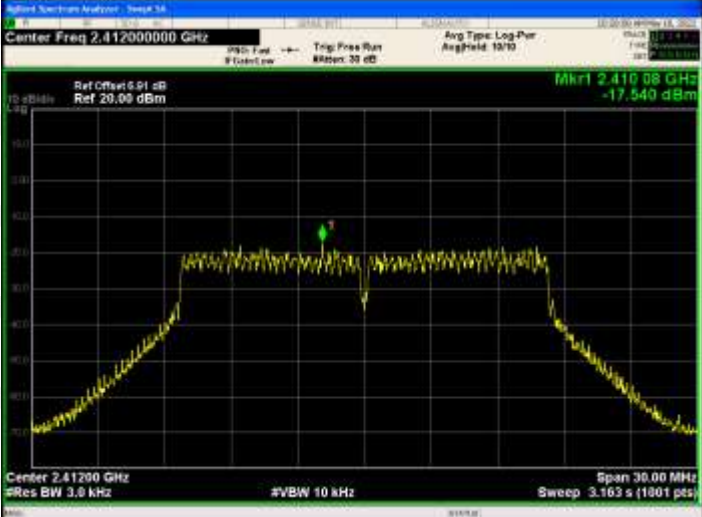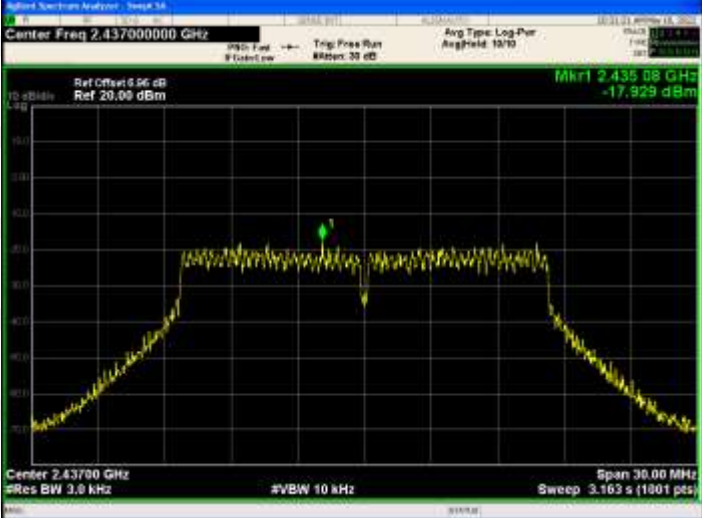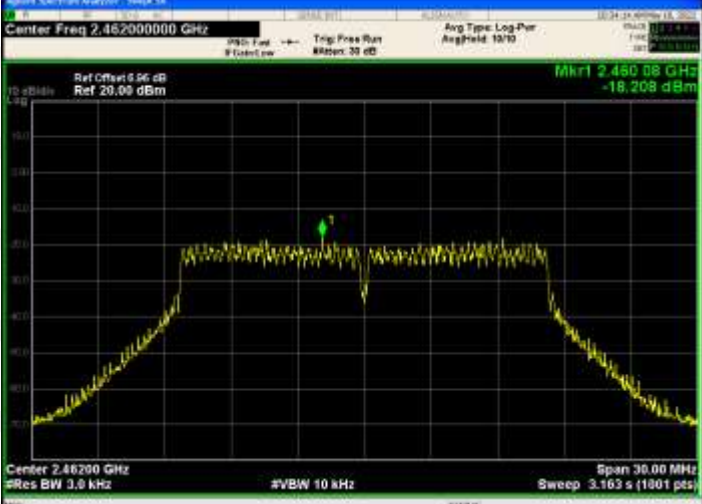802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

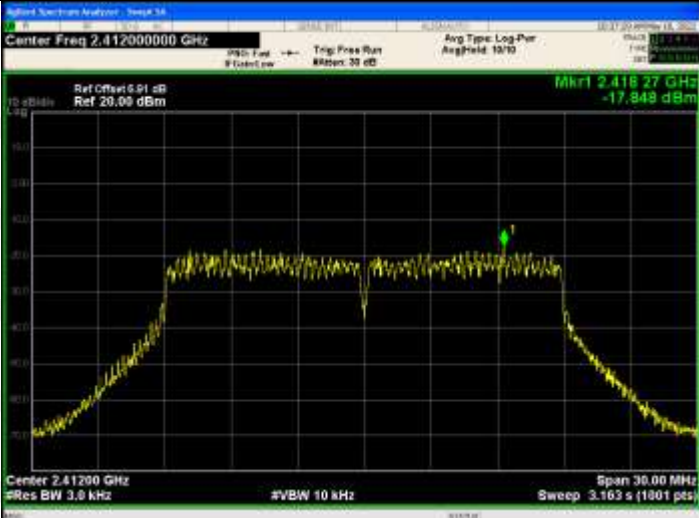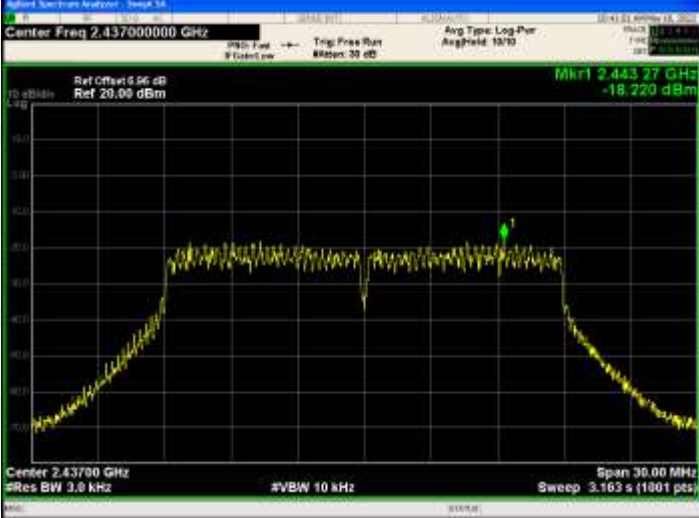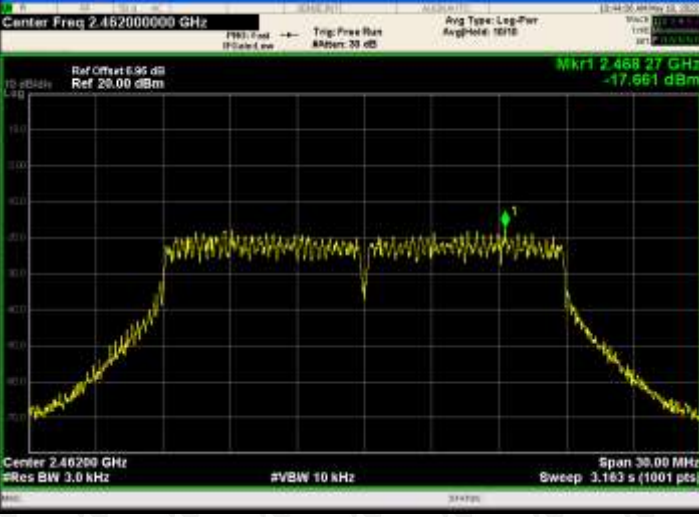802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

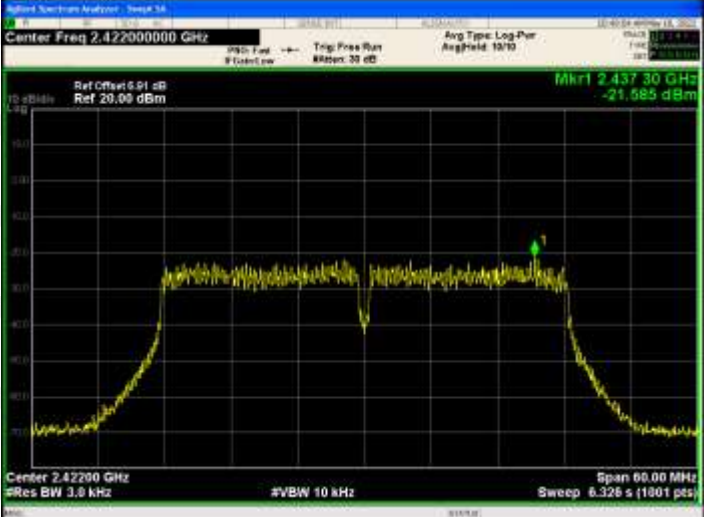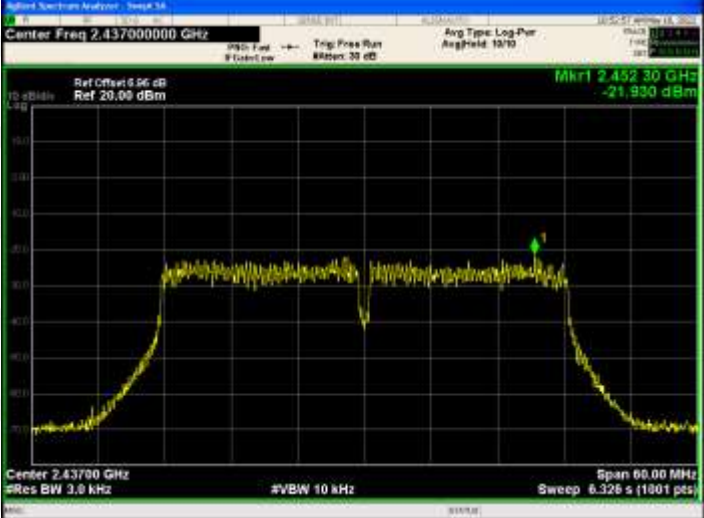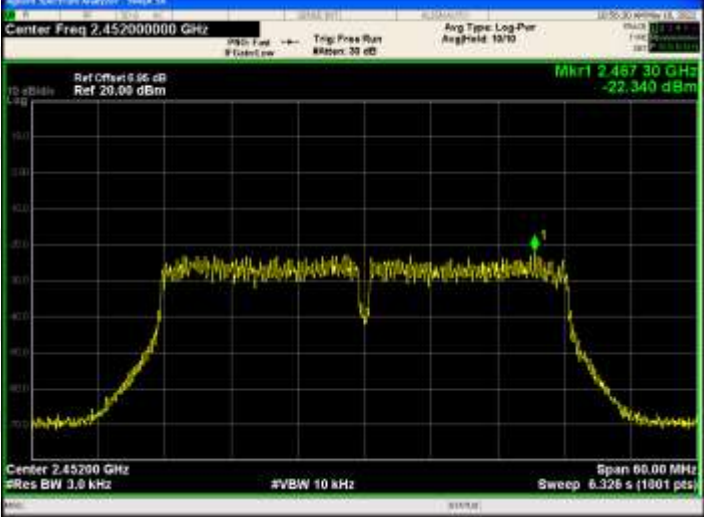802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT3:

Graphs

802.11b /LCH





802.11b /MCH






802.11b/HCH

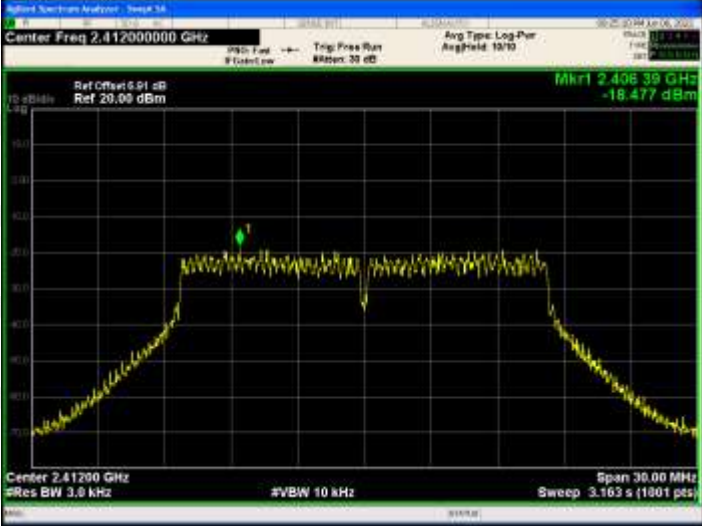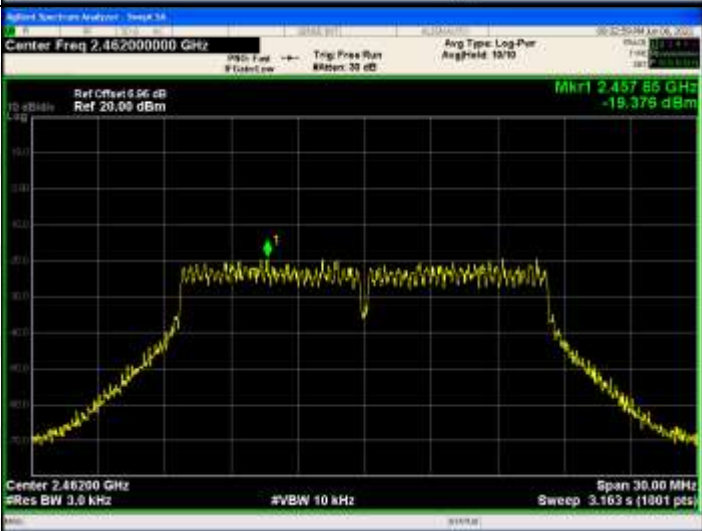

802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

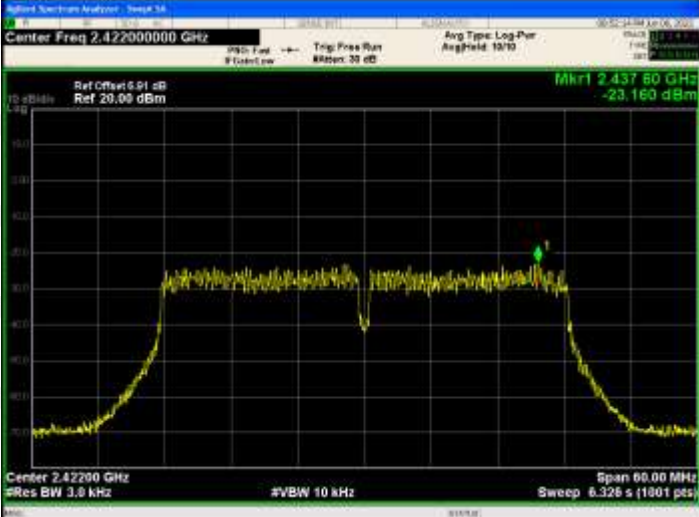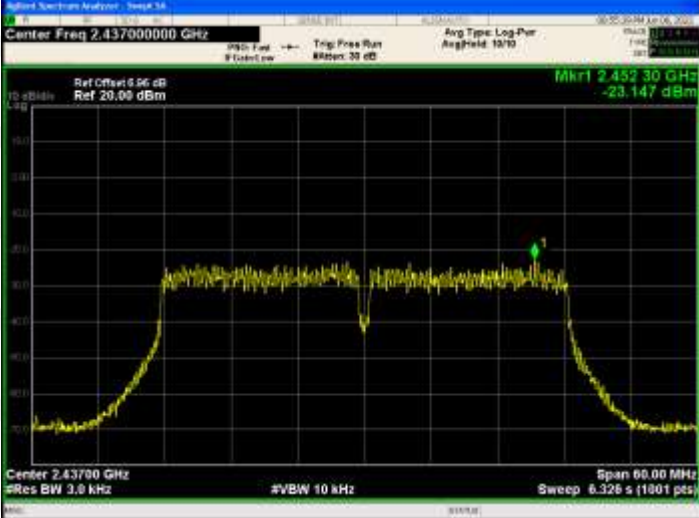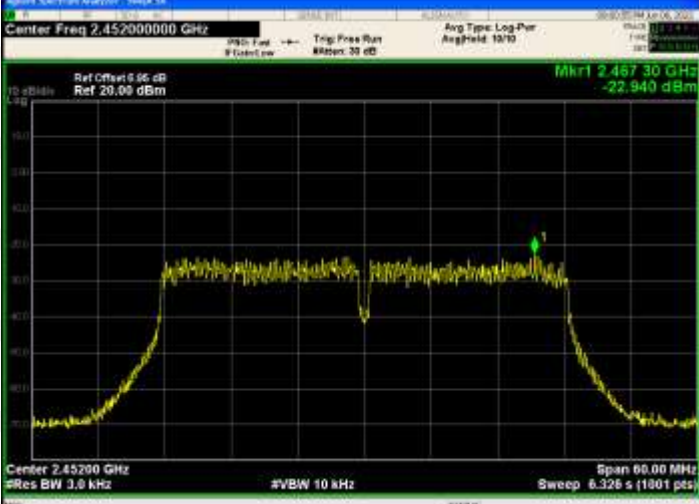802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****