



# FCC Test Report

Equipment : Wireless Gateway  
Brand Name : ufiSpace  
Model No. : GML820U-915U  
FCC ID : MCLGML820U-915U  
Standard : 47 CFR FCC Part 15.247  
Frequency : 902 MHz – 928 MHz  
Function :  Point-to-multipoint;  Point-to-point  
Applicant : Hon Hai Precision Ind. Co., Ltd.  
5F-1, 5, Hsin-An Road Hsinchu Science-Based  
Industrial Park Hsinchu, Taiwan  
Manufacturer : Hon Hai Precision Ind. Co., Ltd.  
5F-1, 5, Hsin-An Road Hsinchu Science-Based  
Industrial Park Hsinchu, Taiwan

The product sample received on Dec. 09, 2017 and completely tested on Mar. 28, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

  
Cliff Chang  
SPORTON INTERNATIONAL INC.





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Testing Applied Standards .....	6
1.3	Testing Location Information .....	6
1.4	Measurement Uncertainty .....	6
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>7</b>
2.1	Test Channel Mode .....	7
2.2	The Worst Case Measurement Configuration.....	7
2.3	EUT Operation during Test .....	8
2.4	Accessories .....	8
2.5	Support Equipment.....	8
2.6	Test Setup Diagram .....	10
<b>3</b>	<b>TEST RESULT .....</b>	<b>13</b>
3.1	AC Power-line Conducted Emissions .....	13
<b>4</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>15</b>
4.1	DTS Bandwidth .....	15
4.2	Maximum Conducted Output Power .....	16
4.3	Power Spectral Density .....	18
4.4	Emissions in Non-restricted Frequency Bands .....	20
4.5	Emissions in Restricted Frequency Bands.....	21
<b>5</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>25</b>

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS****APPENDIX B. TEST RESULTS OF DTS BANDWIDT\_ LORA-500KHZ****APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER\_ LORA-500KHZ****APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY\_ LORA-500KHZ****APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS\_ LORA-500KHZ****APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS\_ LORA-500KHZ****APPENDIX G. TEST PHOTOS****PHOTOGRAPHS OF EUT V01**



## Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
4.1	15.247(a)	DTS Bandwidth	$\geq 500\text{kHz}$	Complied
4.2	15.247(b)	Maximum Conducted Output Power	Power [dBm]:30	Complied
4.3	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
4.4	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: $>30\text{ dBc}$	Complied
4.5	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

Frequency Range (MHz)	LoRa Mode	Ch. Frequency (MHz)	Channel Spacing (MHz)	Channel Number
902-928MHz	LoRa-500kHz	923.3-927.5MHz	0.6	0-7 [8]

Band	LoRa Mode	BWch (kHz)	Nant
900M	LoRa-500kHz	0.6	1TX

Note:

- 900M is the 900MHz band (902-928MHz)
- LoRa-500kHz uses as a DTS
- LoRa uses Chirp Spread Spectrum (CSS) modulation
- BWch is the channel separation
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.
- Contain WWAN Module: WWAN Module (FCC ID: QISME906S-158)

#### 1.1.2 Antenna Information

Ant.	Brand	P/N	Antenna Type	Connector	Antenna Gain (dBi)	Cable Loss (dB)	True Gain (dBi)
1	FIT	ANEC2M2-CZZ00-EH	Dipole Antenna	N-JACK	8	1.5	6.5
2	FIT	ANEC2M2-CZZ00-EH	Dipole Antenna	N-JACK	8	1.5	6.5

Note: Only Ant.1 can be use as transmitting antenna

Ant. 1 and Ant. 2 could receive simultaneously.

#### 1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)
LoRa	1	0

#### 1.1.4 EUT Operational Condition

EUT Power Type	From PoE
----------------	----------



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r05
- ◆ FCC Public Notice DA 00-705
- ◆ FCC KDB 412172 D01 v01r01

## 1.3 Testing Location Information

Testing Location				
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456	FAX : 886-3-318-0055	
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065	FAX : 886-3-656-9085	

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Gino Huang	20°C / 54%	Mar. 28, 2017
Radiated	03CH01-CB	Joy Tseng	22°C / 54%	Mar. 23, 2017 Mar. 28, 2017
AC Conduction	CO01-CB	Da Deng	22°C / 53%	Mar. 27, 2017

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	$9.74 \times 10^{-8}$	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	Power Setting
LoRa_Nss1_1TX	-
923.3MHz	20
925.7MHz	20
927.5MHz	20

### 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT Normal Link (Function:LoRa+Wi-fi+GPS+LTE Band 2)

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Maximum Conducted Output Power Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Y axis Normal Link (Function: LoRa+WLAN 2.4GHz+GPS+LTE Band 2)
2	EUT in Z axis Normal Link (Function: LoRa+WLAN 2.4GHz+GPS+LTE Band 2)
For operating mode 1 are the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
The EUT was performed at Y axis and Z axis position for Radiated emission test below 1GHz, and the worst case was found at Y axis. So the measurement above 1GHz will follow this same test configuration.	
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	LoRa+WLAN 2.4GHz+GPS+LTE

Refer to Sporton Test Report No.: FA6D0726-01AA for Co-location RF Exposure Evaluation.

Note: The PoE is for measurement only, would not be marketed.

Power	Brand Holder	Model
PoE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050

## 2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 2.4 Accessories

Accessories
Ground cable*1: Non-shielded 1m
Antenna cable*3: Shielded 0.7m
Wall-mounted rack*1

## 2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook *2	DELL	E6430	DoC
2	LTE Base station	Anritsu	MT8820C	DoC
3	GPS Simulator	WELNAVIGATE	GS-100	DoC
4	LoRa	Foxconn	IoT ISM Band Car Trackers	PY3AC785S
5	AP Router	Planex	GW-AP54SGX	KA220030603014-1
6	SIM Card	NA	NA	DoC
7	PoE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC



## For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook*2	DELL	E4300	DoC
2	LTE base station	Anritsu	MT8820C	N/A
3	GPS Simulator	WELNAVIGATE	GS-100	N/A
4	WLAN AP	NETGEAR	WNDR3300v2	PY309300116
5	SIM Card	N/A	N/A	DoC
6	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC
7	LoRa	Foxconn	IoT ISM Band Car Trackers	DoC


## For Test Site No: 03CH01-CB (above 1GHz)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E4300	DoC
2	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC

## For Test Site No: TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E4300	DoC
2	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC

## 2.6 Test Setup Diagram

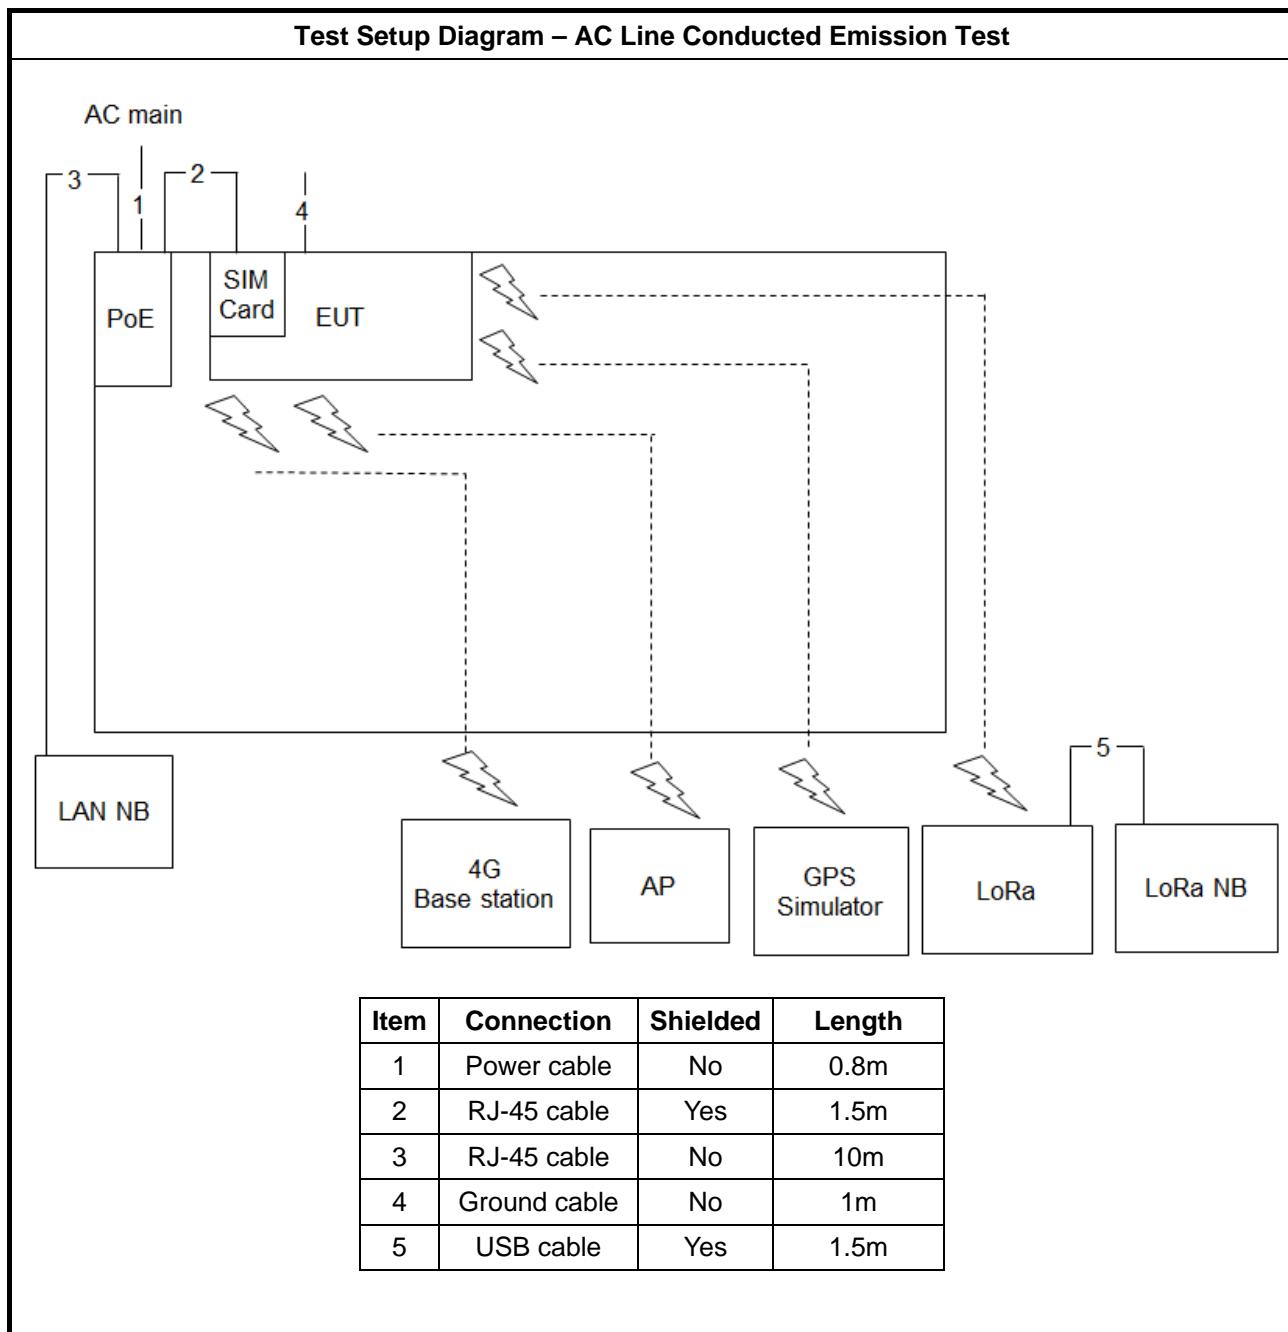

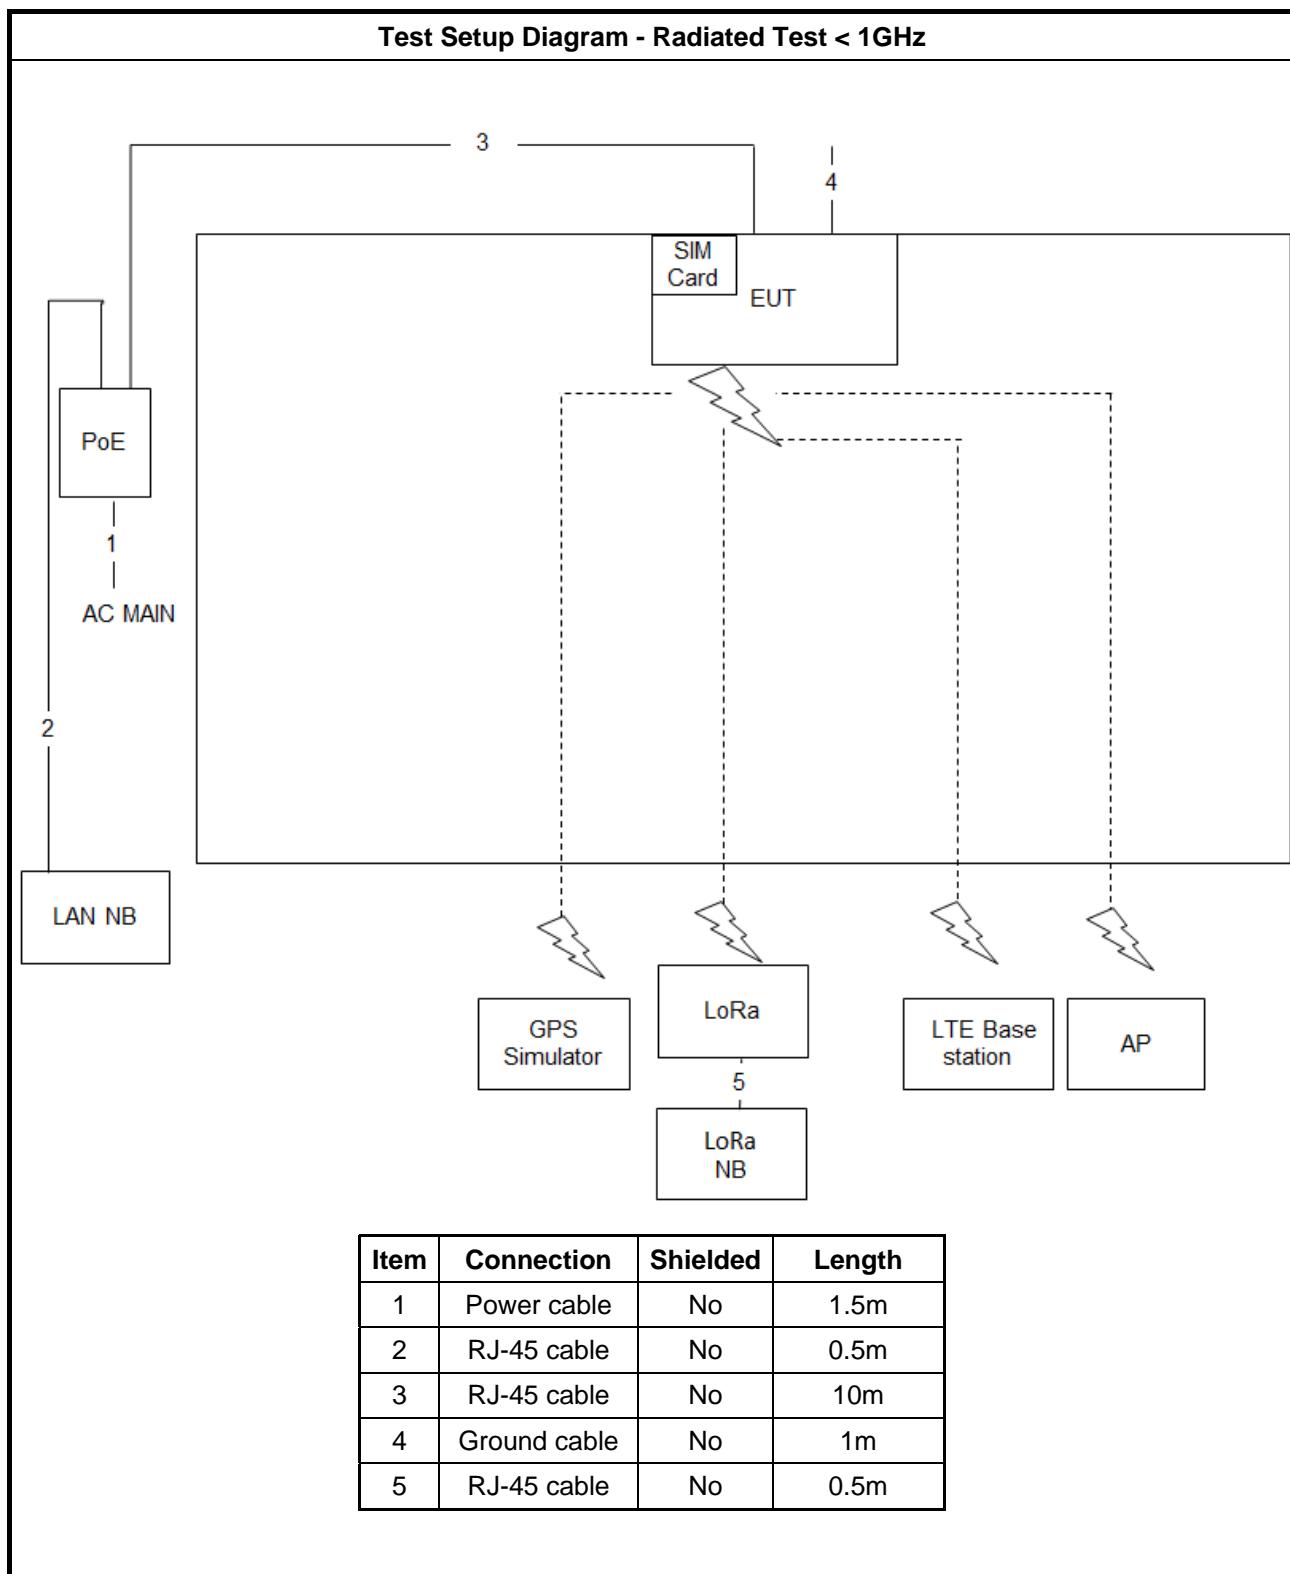

**Test Setup Diagram - Radiated Test > 1GHz**

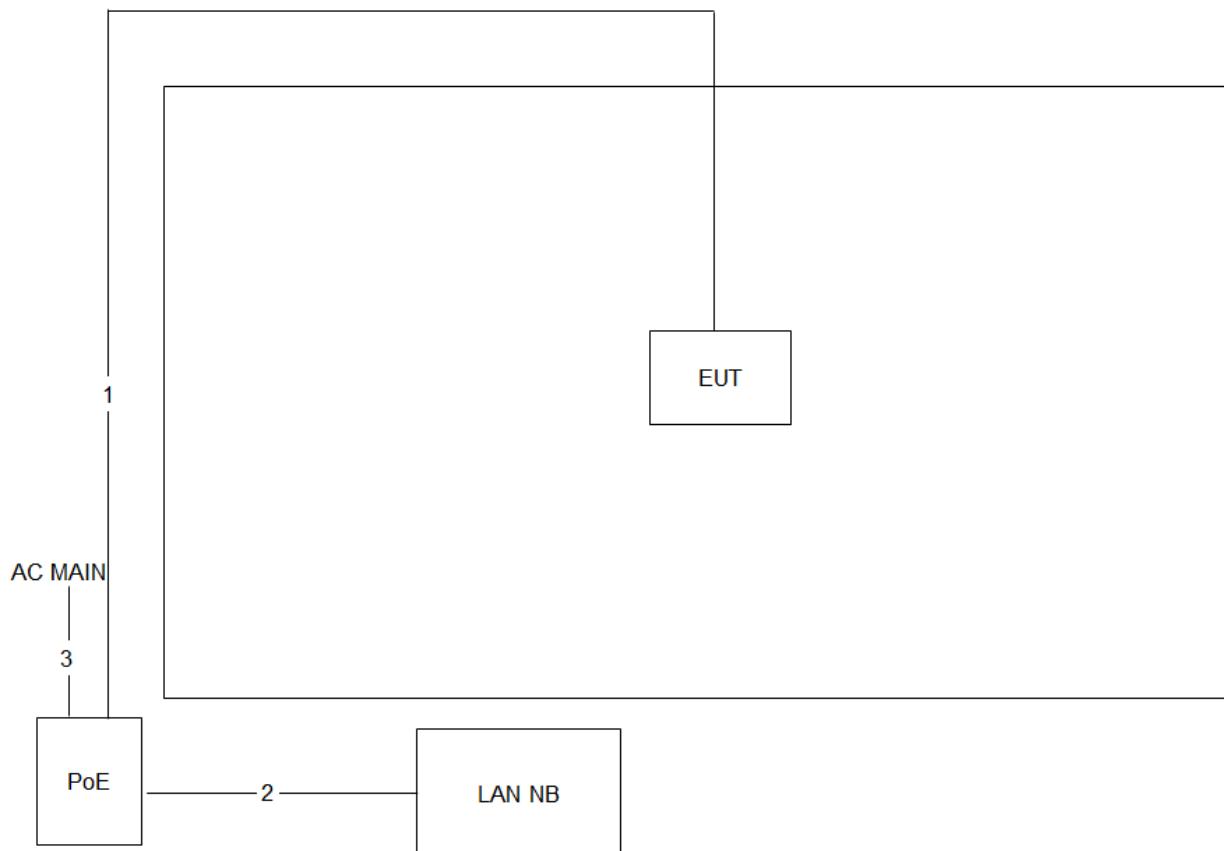

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	1.5m

### 3 Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

##### 3.1.4 Test Setup

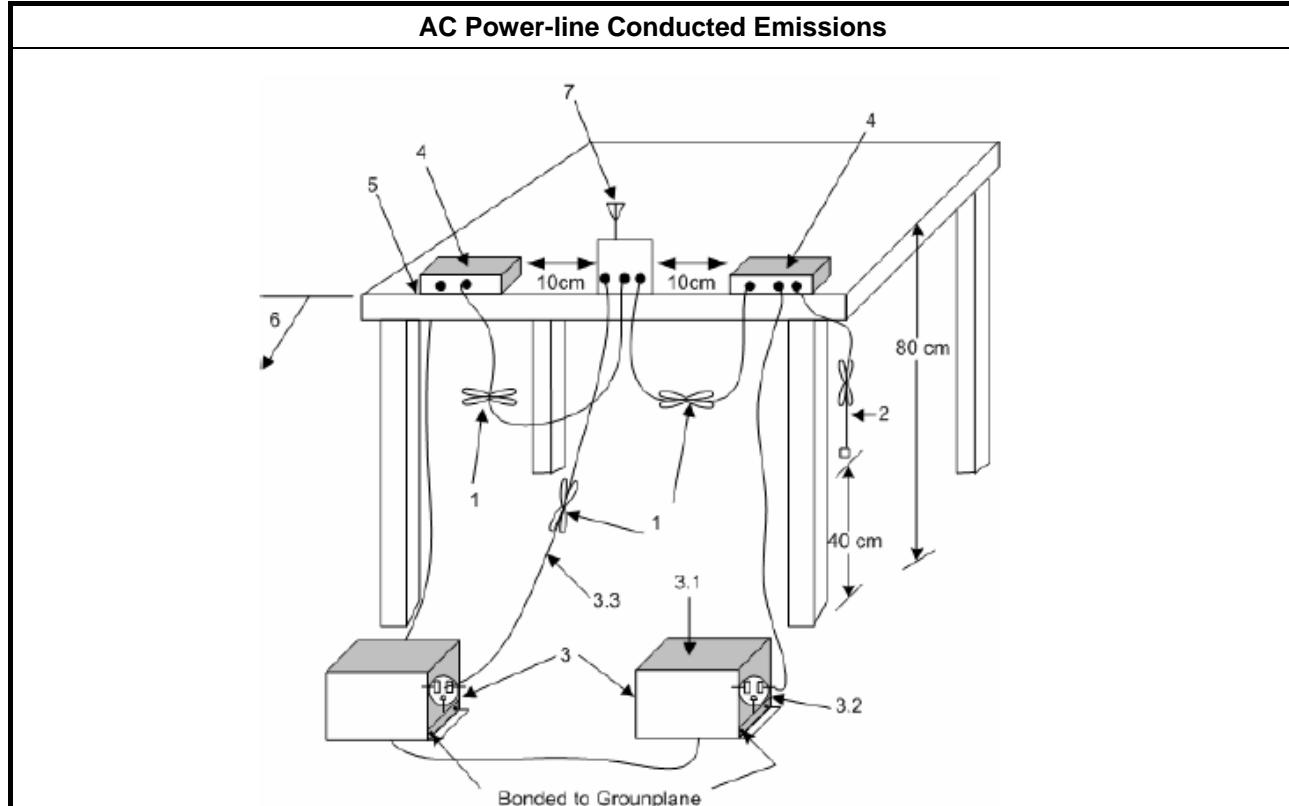



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

Refer as Appendix A

## 4 Transmitter Test Result

### 4.1 DTS Bandwidth

#### 4.1.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
▪ 6 dB bandwidth $\geq$ 500 kHz.


#### 4.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 4.1.3 Test Procedures

Test Method
▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

#### 4.1.4 Test Setup

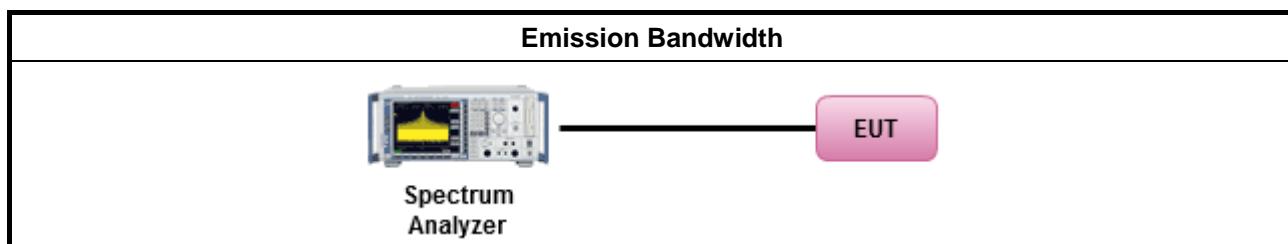

#### 4.1.5 Test Result of Emission Bandwidth

Refer as Appendix B



## 4.2 Maximum Conducted Output Power

### 4.2.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"><li>▪ If <math>G_{TX} \leq 6 \text{ dBi}</math>, then <math>P_{Out} \leq 30 \text{ dBm}</math> (1 W)</li></ul>
	<ul style="list-style-type: none"><li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6 \text{ dBi}</math>, then <math>P_{Out} = 30 - (G_{TX} - 6) \text{ dBm}</math></li></ul>
	<ul style="list-style-type: none"><li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6 \text{ dBi}</math>, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}</math></li></ul>
	<ul style="list-style-type: none"><li>▪ Smart antenna system (SAS):<ul style="list-style-type: none"><li>- Single beam: If <math>G_{TX} &gt; 6 \text{ dBi}</math>, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}</math></li><li>- Overlap beam: If <math>G_{TX} &gt; 6 \text{ dBi}</math>, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}</math></li><li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6 \text{ dBi}</math>, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8 \text{ dB dBm}</math></li></ul></li></ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum conducted output power in dBm, <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.</p>	


### 4.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 4.2.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW $\geq$ EBW method). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW $\geq$ DTS BW)
▪ Maximum Conducted Output Power	<p>[duty cycle <math>\geq</math> 98% or external video / power trigger]</p> <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed) <p>duty cycle &lt; 98% and average over on/off periods with duty factor</p> <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed) <p>RF power meter and average over on/off periods with duty factor or gated trigger</p> <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM-G (using an RF average power meter).
▪ For conducted measurement.	<ul style="list-style-type: none"><li>▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li><li>▪ If multiple transmit chains, EIRP calculation could be following as methods: <math>P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm]) <math>EIRP_{total} = P_{total} + DG</math></li></ul>

#### 4.2.4 Test Setup

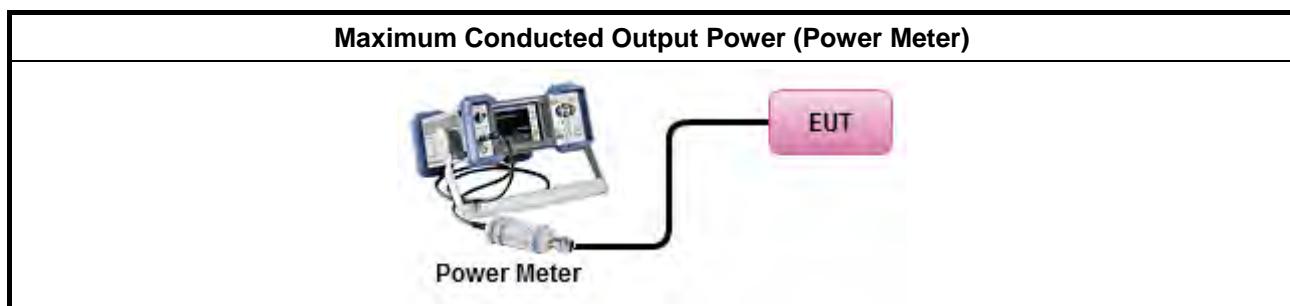

#### 4.2.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



## 4.3 Power Spectral Density

### 4.3.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD)≤8 dBm/3kHz


### 4.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 4.3.3 Test Procedures

Test Method
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
▪ For conducted measurement.
▪ If The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/> Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

#### 4.3.4 Test Setup

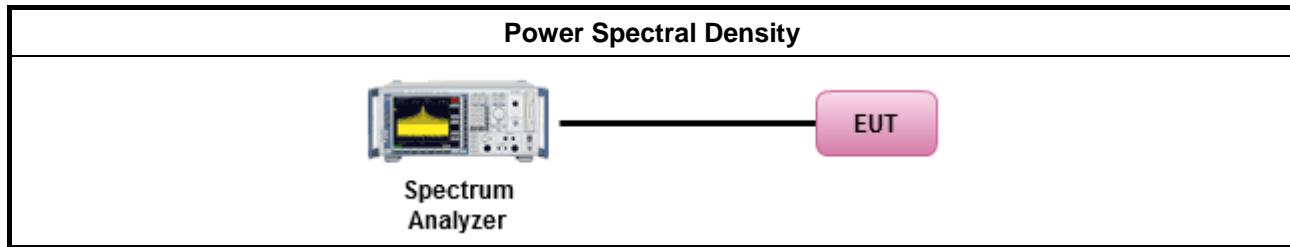

#### 4.3.5 Test Result of Power Spectral Density

Refer as Appendix D

## 4.4 Emissions in Non-restricted Frequency Bands

### 4.4.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


### 4.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 4.4.3 Test Procedures

Test Method
▪ Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.

### 4.4.4 Test Setup

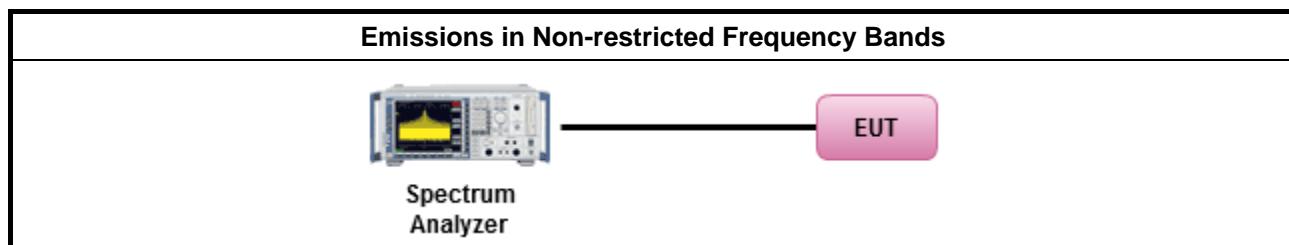

### 4.4.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



## 4.5 Emissions in Restricted Frequency Bands

### 4.5.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

### 4.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




#### 4.5.3 Test Procedures

<b>Test Method</b>	
<ul style="list-style-type: none"><li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li></ul>	
<ul style="list-style-type: none"><li>▪ Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li></ul>	
<ul style="list-style-type: none"><li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li></ul>	
<ul style="list-style-type: none"><li>▪ Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.</li></ul>	
	<ul style="list-style-type: none"><li><input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle <math>\geq 98\%</math>)</li><li><input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).</li><li><input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced <math>VBW \geq 1/T</math>).</li><li><input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced <math>VBW</math>). <math>VBW \geq 1/T</math>, where <math>T</math> is pulse time.</li><li><input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.</li><li><input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.</li></ul>
	<ul style="list-style-type: none"><li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li></ul>
	<ul style="list-style-type: none"><li>▪ Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li></ul>
	<ul style="list-style-type: none"><li>▪ Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.</li></ul>
	<ul style="list-style-type: none"><li>▪ Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li></ul>
	<ul style="list-style-type: none"><li>▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.</li></ul>
<ul style="list-style-type: none"><li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below:<ol style="list-style-type: none"><li>(1) Measure and sum the spectra across the outputs or</li><li>(2) Measure and add <math>10 \log(N)</math> dB</li></ol></li></ul>	
<ul style="list-style-type: none"><li>▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li></ul>	

## 4.5.4 Test Setup

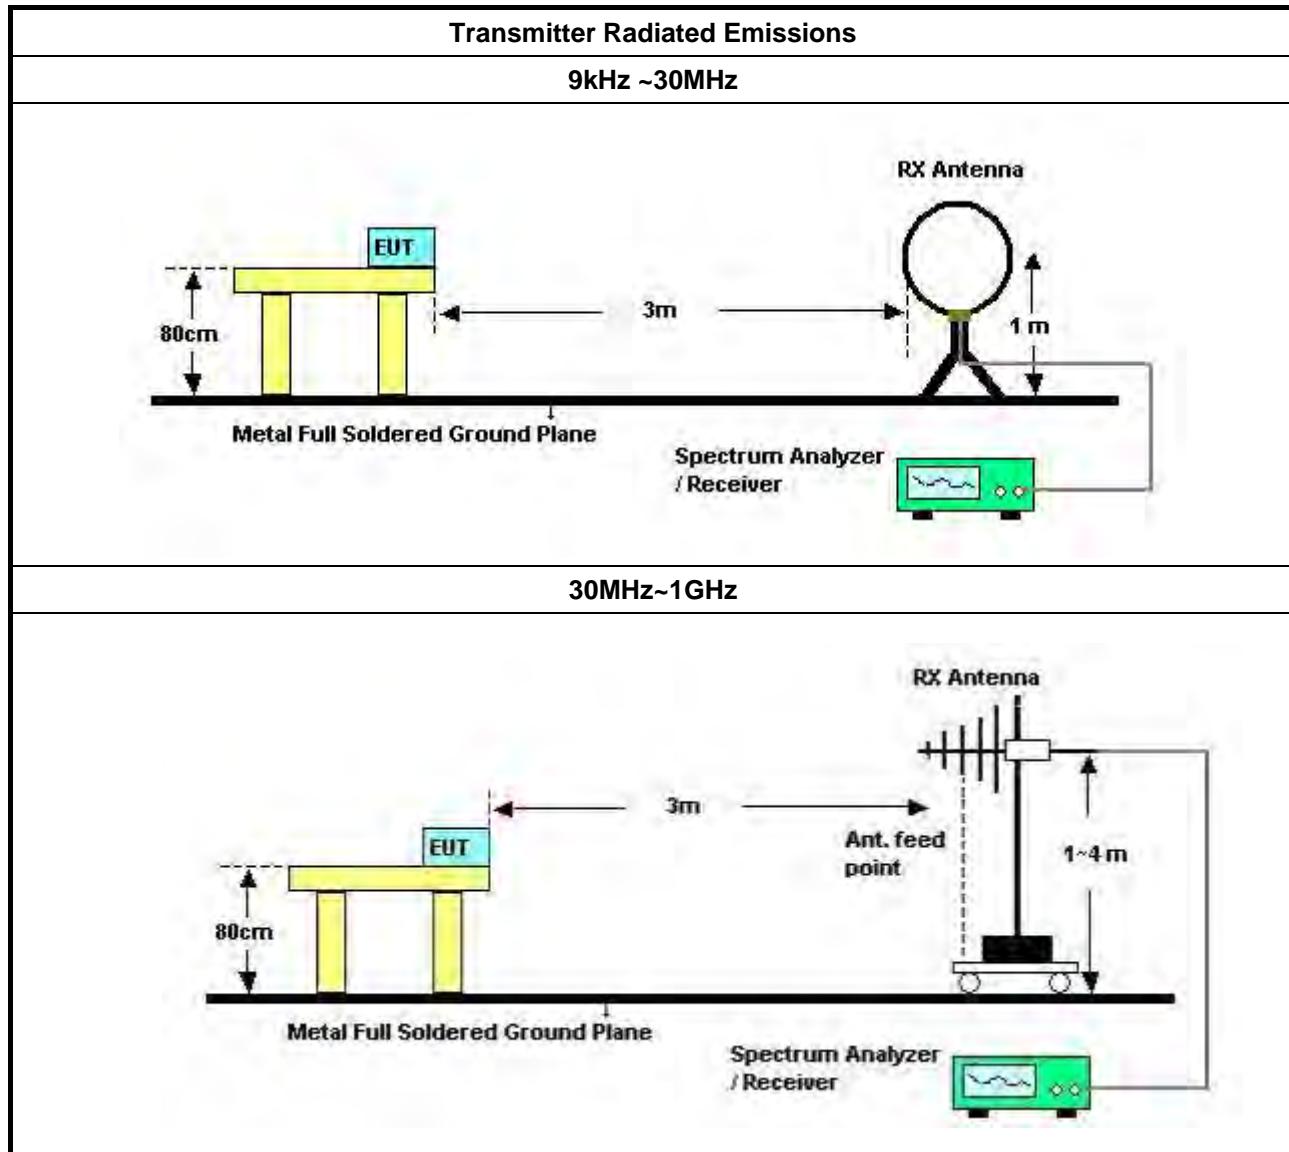

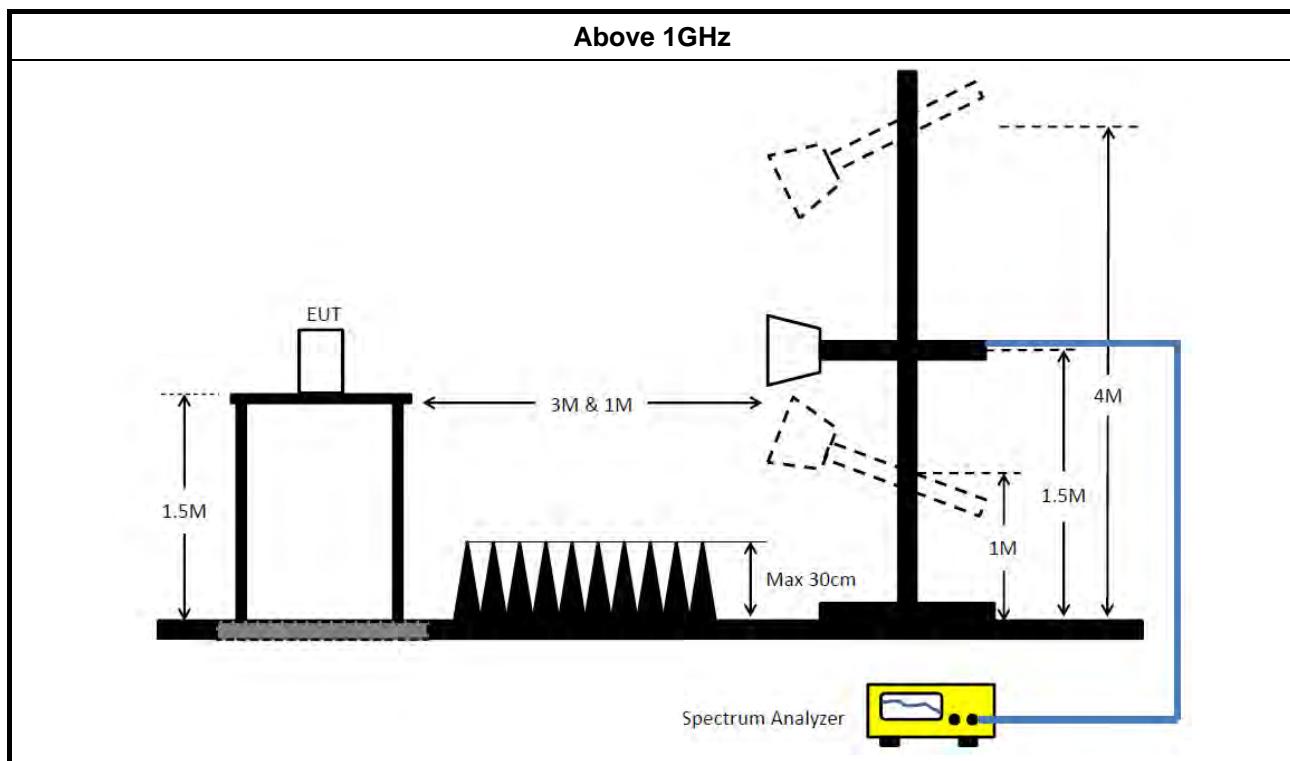

#### 4.5.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

#### 4.5.6 Transmitter Radiated Unwanted Emissions

Refer as Appendix F



## 5 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 13, 2017	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 16, 2017	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 26, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 22, 2016	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.


“\*\*” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.



## AC Power-line Conducted Emissions Result


Appendix A

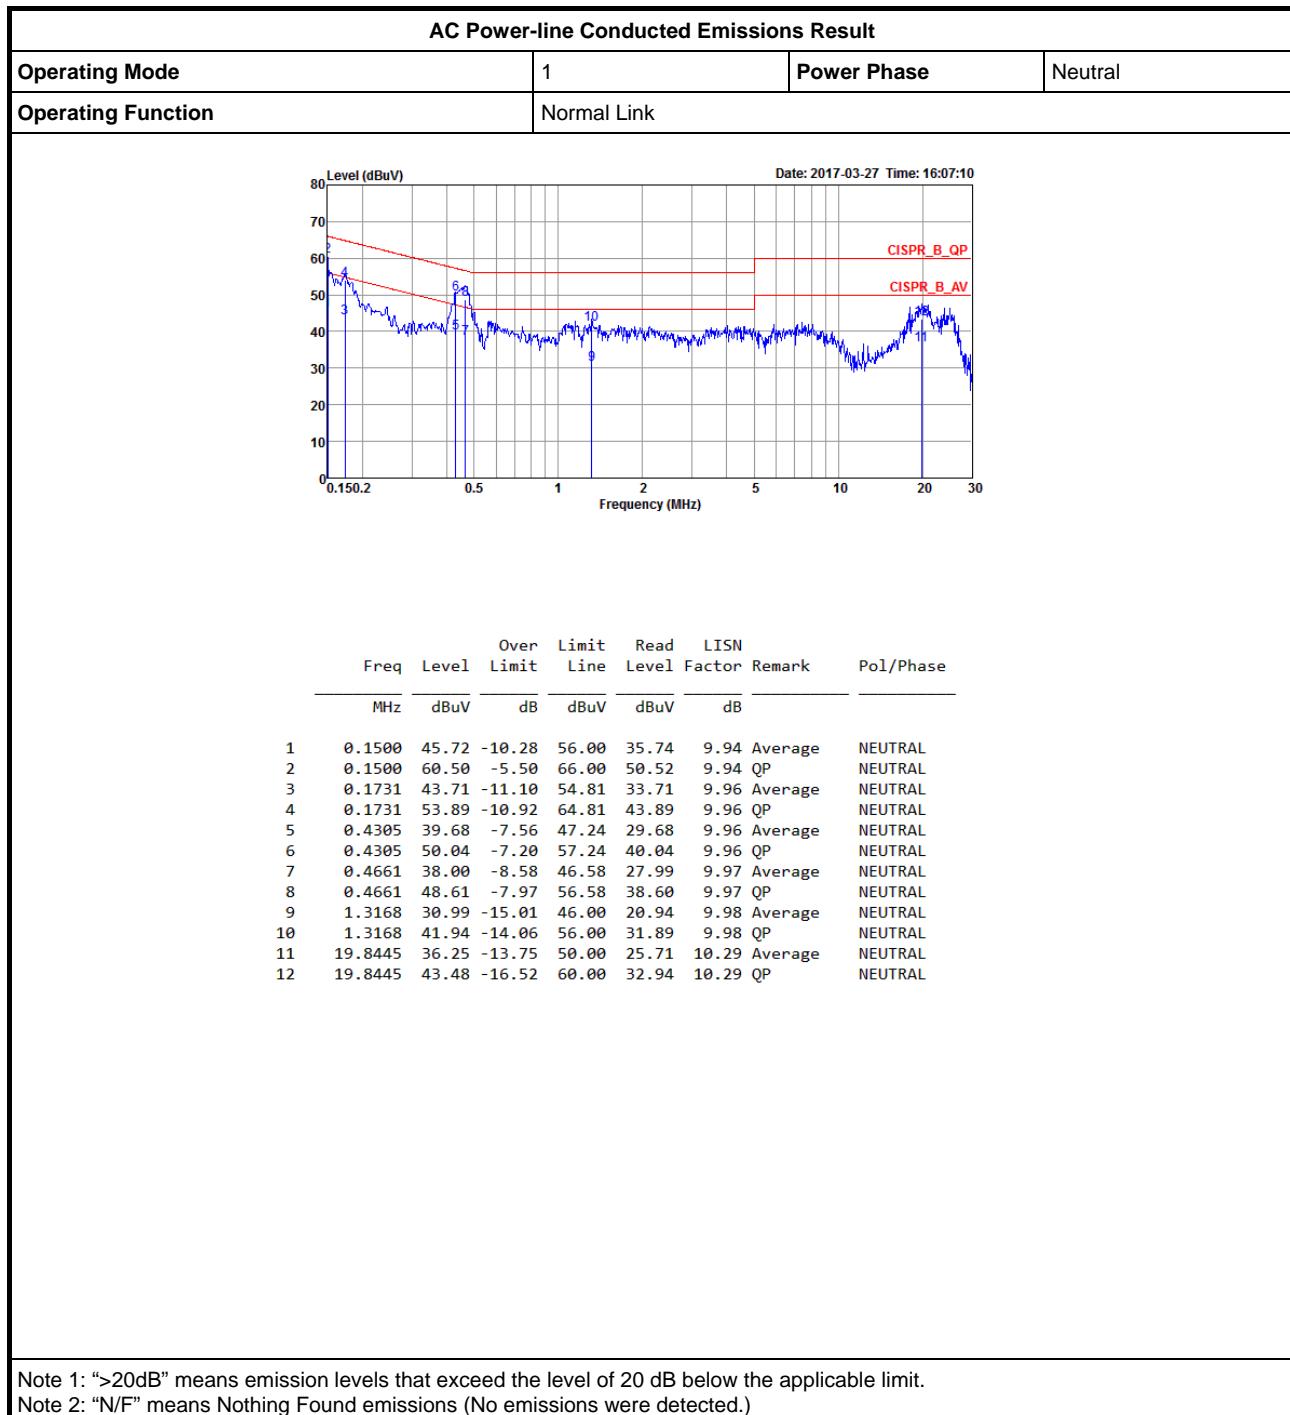



## AC Power-line Conducted Emissions Result

Appendix A

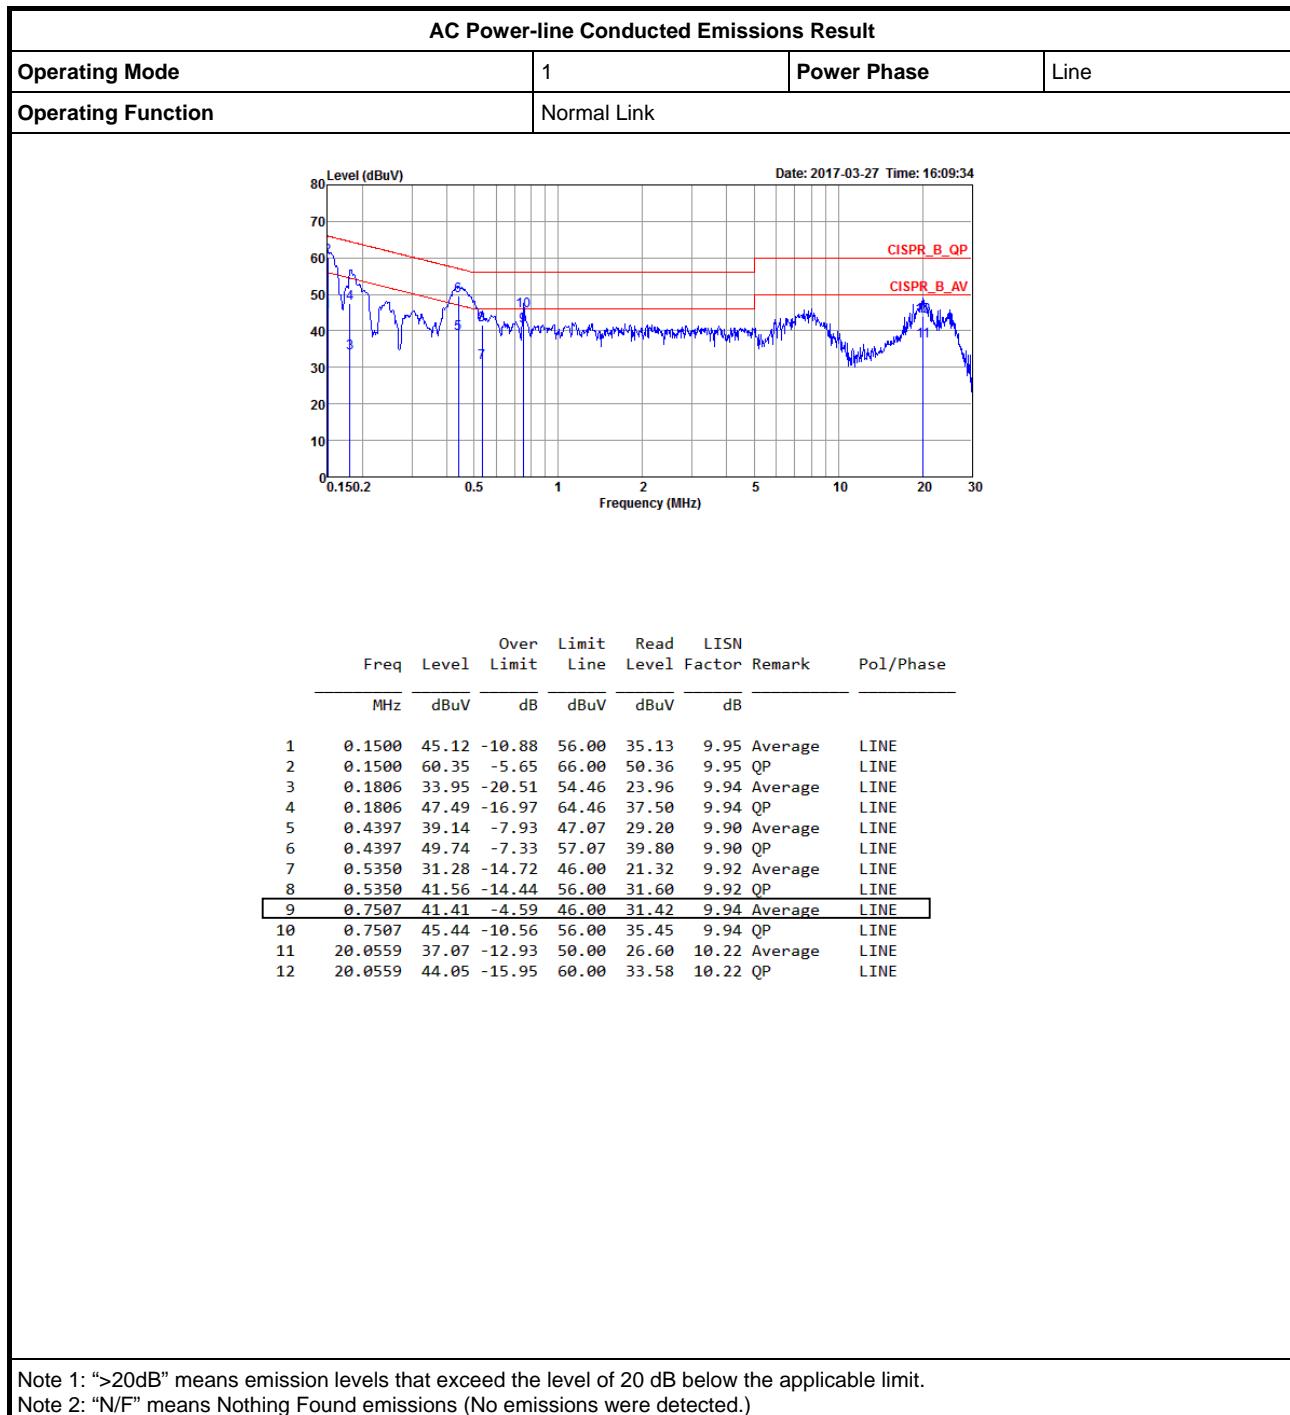




**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
LoRa_Nss1_1TX	-	-	-	-	-
902-928MHz	552k	487.256k	487KD1D	549k	486.507k

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
LoRa_Nss1_1TX	-	-	-	-
923.3MHz	Pass	500k	552k	487.256k
925.7MHz	Pass	500k	549k	487.256k
927.5MHz	Pass	500k	549k	486.507k

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

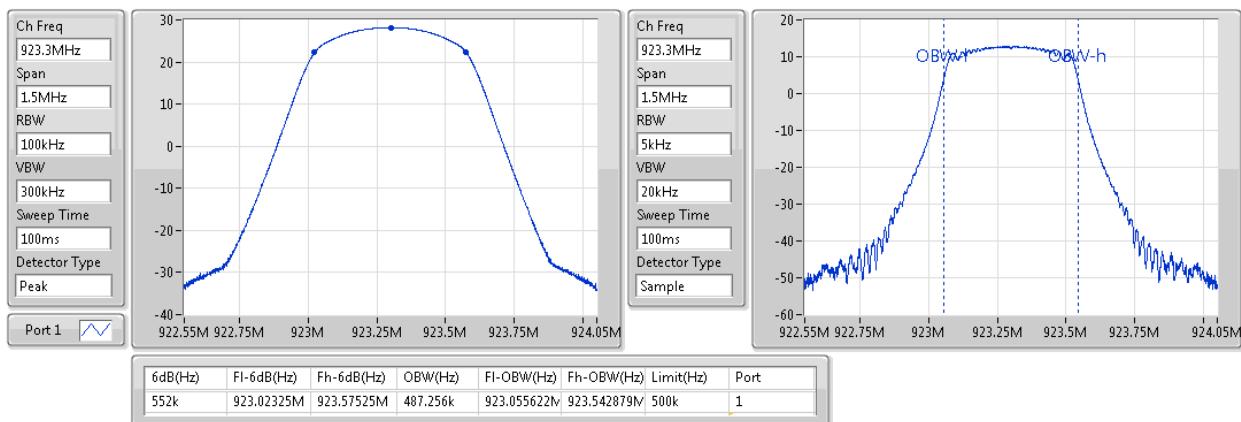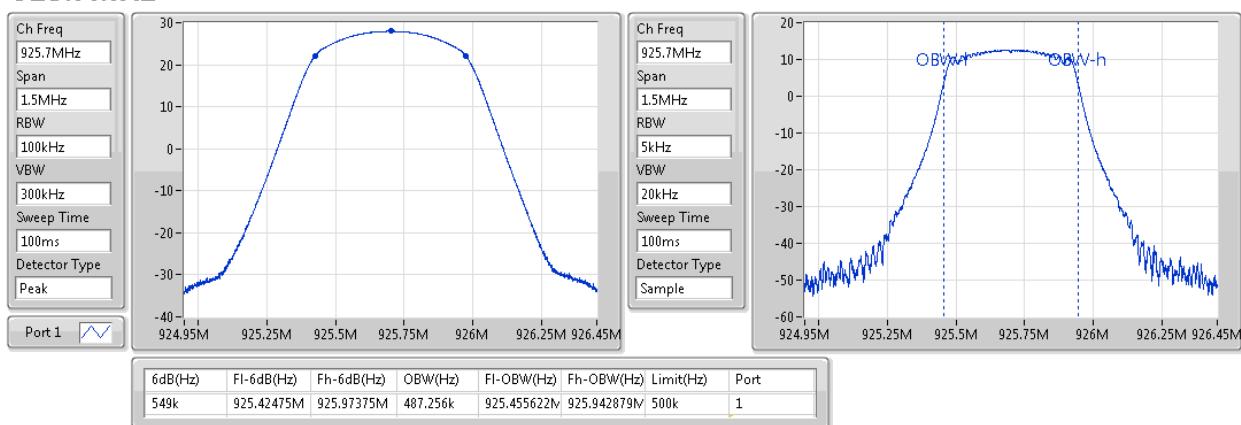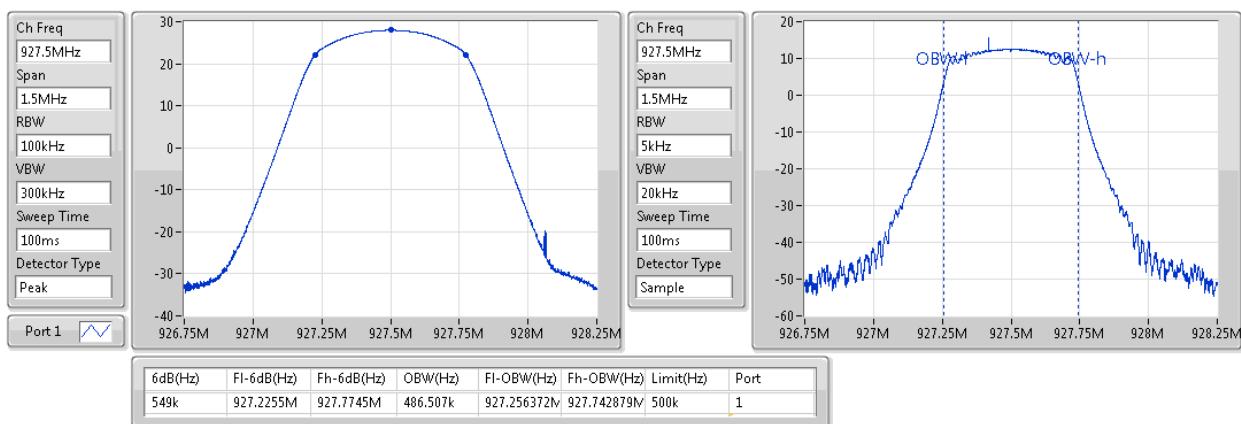**LoRa\_Nss1\_1TX****EBW****923.3MHz****LoRa\_Nss1\_1TX****EBW****925.7MHz****LoRa\_Nss1\_1TX****EBW****927.5MHz**

**Summary**

Mode	Total Power (dBm)	Total Power (W)
LoRa_Nss1_1TX	-	-
902-928MHz	26.85	0.48417

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
LoRa_Nss1_1TX	-	-	-	-	-
923.3MHz	Pass	6.50	26.79	26.79	29.50
925.7MHz	Pass	6.50	26.85	26.85	29.50
927.5MHz	Pass	6.50	26.66	26.66	29.50

**DG** = Directional Gain; **Port X** = Port X output power

**Summary**

Mode	PD (dBm/RBW)
LoRa_Nss1_1TX	-
902-928MHz	7.41

RBW=3kHz.


**Result**

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
LoRa_Nss1_1TX	-	-	-	-	-
923.3MHz	Pass	6.50	7.41	7.41	7.50
925.7MHz	Pass	6.50	7.09	7.09	7.50
927.5MHz	Pass	6.50	7.13	7.13	7.50

**DG** = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

**LoRa\_Nss1\_1TX****PSD****923.3MHz**


Ch Freq  
923.3MHz  
Span  
900kHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
100ms  
Detector Type  
RMS

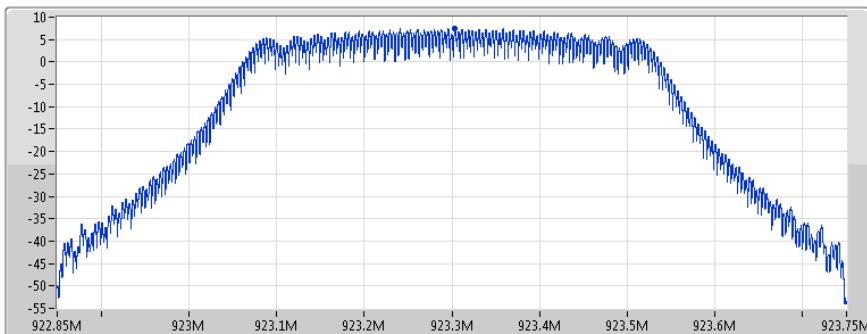

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.41	7.41	7.41

**LoRa\_Nss1\_1TX****PSD****925.7MHz**


Ch Freq  
925.7MHz  
Span  
900kHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
100ms  
Detector Type  
RMS

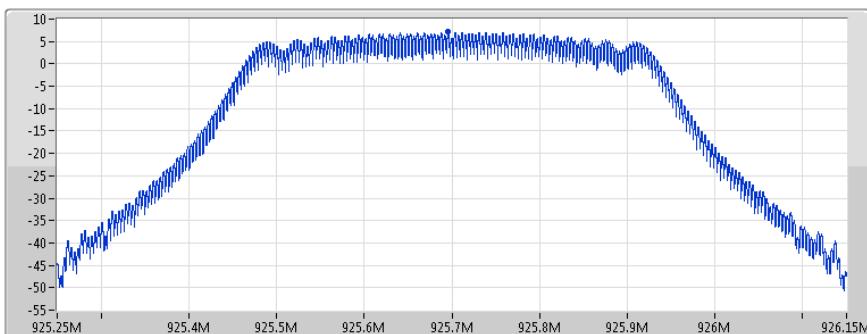

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.09	7.09	7.09

**LoRa\_Nss1\_1TX****PSD****927.5MHz**

Ch Freq  
927.5MHz  
Span  
900kHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
100ms  
Detector Type  
RMS

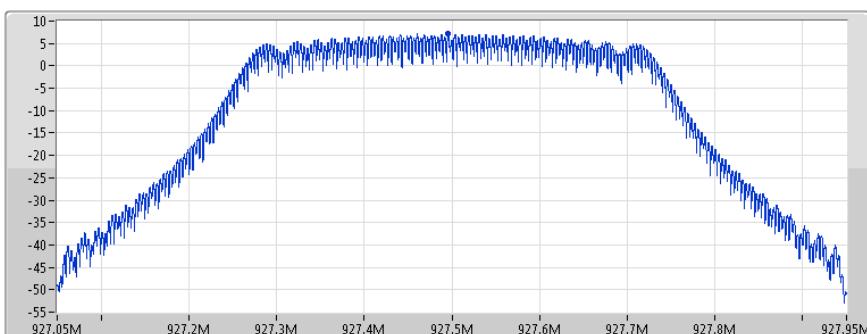


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.13	7.13	7.13

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port						
LoRa_Nss1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
902-928MHz	Pass	925.712M	27.96	-2.04	882.9486M	-49.82	901.4216M	-58.72	928.0024M	-17.01	1.854422G	-29.26	1

**Result**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port						
LoRa_Nss1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
923.3MHz	Pass	925.712M	27.96	-2.04	878.5946M	-48.11	901.7024M	-58.74	928.6312M	-53.78	1.845351G	-29.63	1
925.7MHz	Pass	925.712M	27.96	-2.04	880.7716M	-50.56	901.5032M	-58.22	928.0024M	-49.90	1.85102G	-28.31	1
927.5MHz	Pass	925.712M	27.96	-2.04	882.9486M	-49.82	901.4216M	-58.72	928.0024M	-17.01	1.854422G	-29.26	1

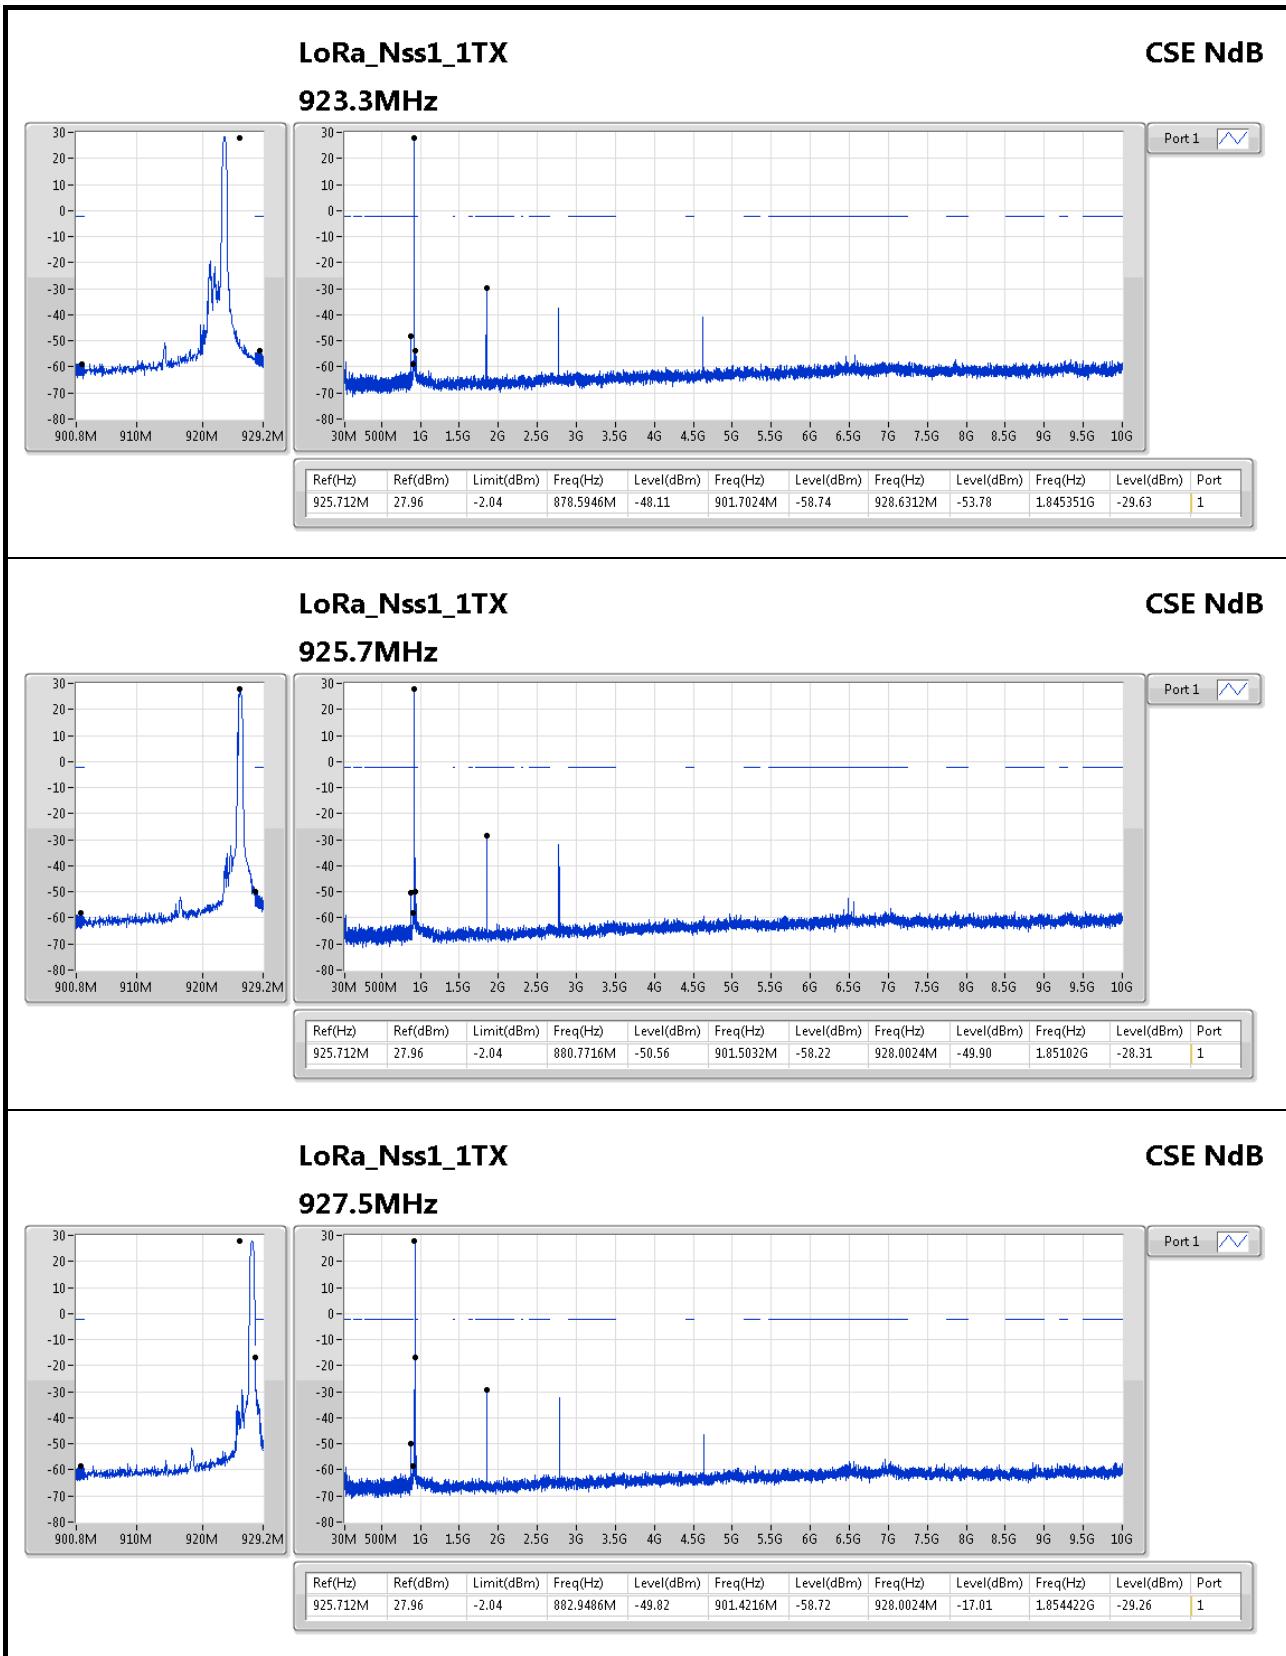



## RSE below 1GHz Result


## Appendix F.1

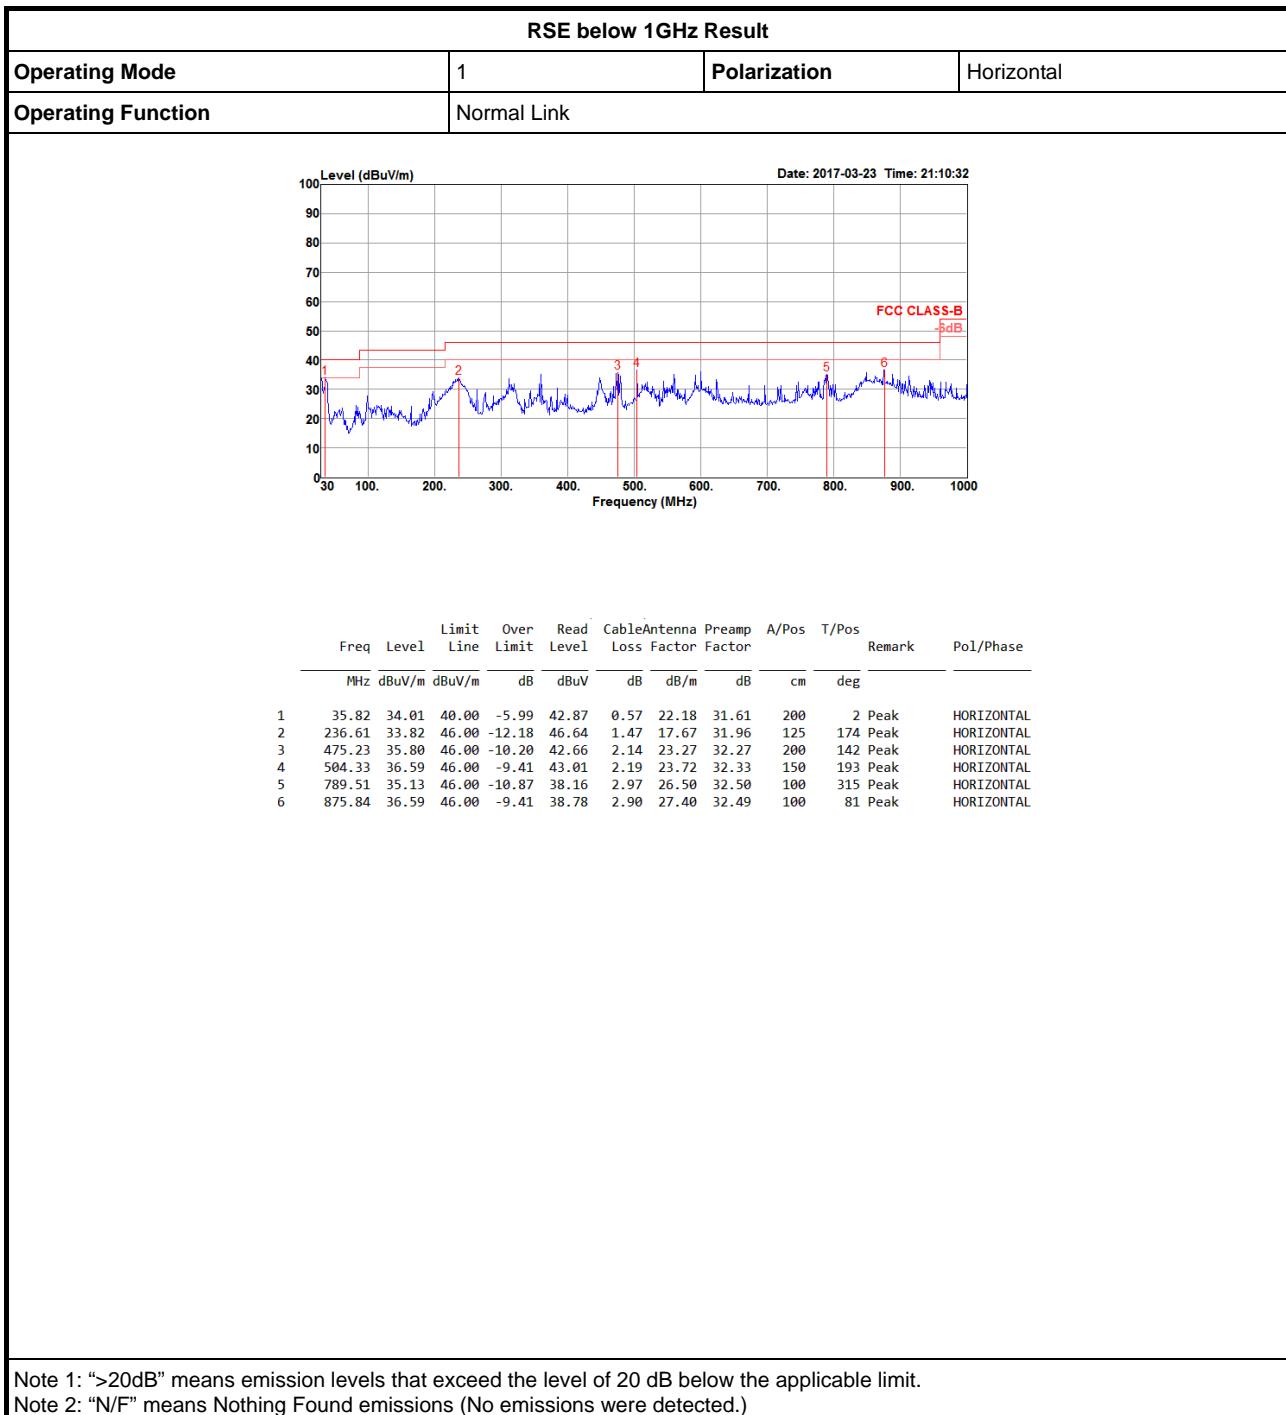



## RSE below 1GHz Result

## Appendix F.1

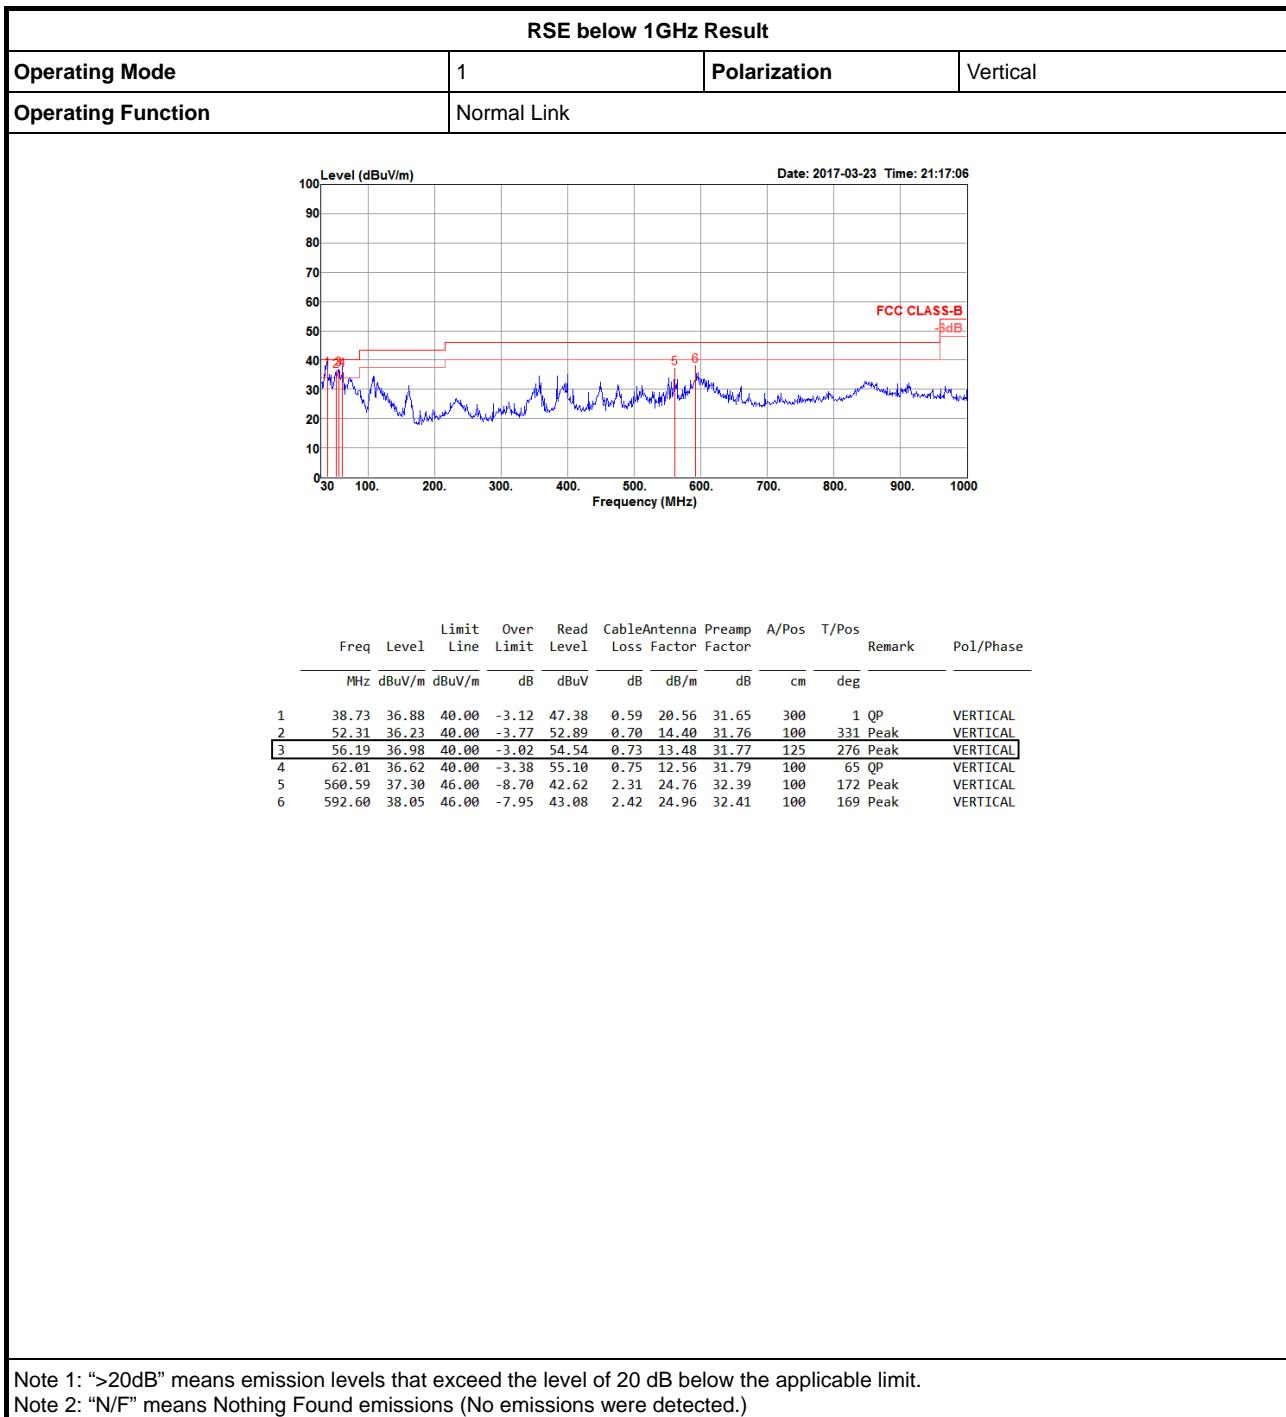

**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
LoRa_Nss1_1TX	-	-	-	-	-	-	-	-	-	-	-	-
902-928MHz	Pass	AV	2.77685G	48.40	54.00	-5.60	-2.18	3	V	166	1.37	-

**LoRa\_Nss1\_1TX****923.3MHz\_TX**

**LoRa\_Nss1\_1TX****923.3MHz\_TX**

**LoRa\_Nss1\_1TX****925.7MHz\_TX**

**LoRa\_Nss1\_1TX****925.7MHz\_TX**

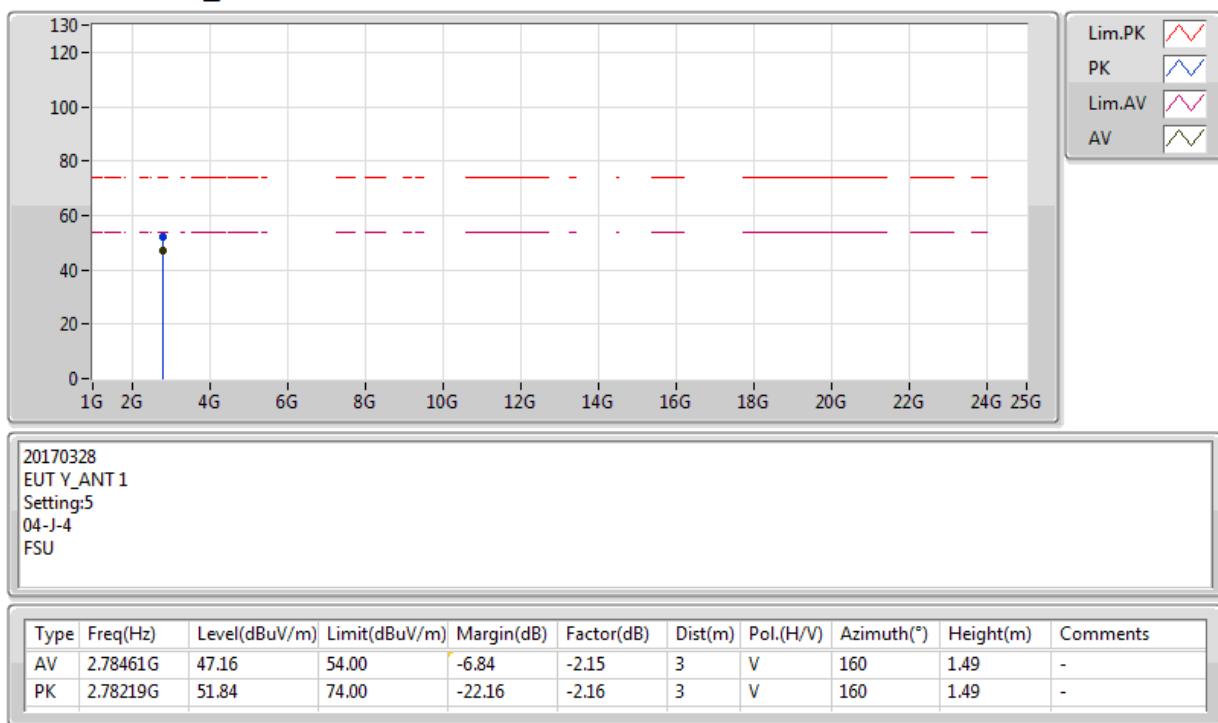**LoRa\_Nss1\_1TX****927.5MHz\_TX**

**LoRa\_Nss1\_1TX****927.5MHz\_TX**