



A D T

RF EXPOSURE REPORT

REPORT NO.: SA130412E08A

MODEL NO.: T77H446

FCC ID: MCLT77H446

RECEIVED: Apr. 25, 2013

TESTED: Apr. 25 to May 29, 2013

ISSUED: June 07, 2013

APPLICANT: Hon Hai PRECISION IND.CO.,LTD

ADDRESS: 5F-1, Hsin-An Road, Hsinchu, Science
Industrial Park, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by any
government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

TABLE OF CONTENTS

| | |
|---------------------------------------|---|
| RELEASE CONTROL RECORD | 3 |
| 1. CERTIFICATION..... | 4 |
| 2. EVALUATION RESULT | 5 |
| 3. SAR TEST EXCLUSION THRESHOLDS..... | 6 |
| 4. CONCLUSION | 7 |



A D T

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|--------------|-------------------|---------------|
| SA130412E08A | Original release | June 07, 2013 |



A D T

1. CERTIFICATION

PRODUCT: NFC 13.56MHz RFID transceiver module
BRAND NAME: FOXCONN
MODEL NO.: T77H446
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Hon Hai PRECISION IND.CO.,LTD
TESTED DATE: Apr. 25 to May 29, 2013
STANDARDS: FCC Part 2 (Section 2.1091)
FCC OET Bulletin 65, Supplement C (01-01)
IEEE C95.1

The above equipment (Model: T77H446) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Phoenix Huang , **DATE:** June 07, 2013
(Phoenix Huang, Specialist)

APPROVED BY : May Chen , **DATE:** June 07, 2013
(May Chen, Manager)



A D T

2. EVALUATION RESULT

Following FCC KDB 447498 D01 "General SAR test exclusion guidance"


The corresponding SAR Exclusion Threshold condition, listed below:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot \sqrt{f(\text{GHz})}$ ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR where
 - Ø $f(\text{GHz})$ is the RF channel transmit frequency in GHz
 - Ø Power and distance are rounded to the nearest mW and mm before calculation
 - Ø The result is rounded to one decimal place for comparisonThe test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- 2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:
 - a) [Threshold at 50 mm in step 1] $+ (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)$] mW, at 100MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1] $+ (\text{test separation distance} - 50 \text{ mm}) \cdot 10$] mW at > 1500 MHz and ≤ 6 GHz
- 3) At frequencies below 100 MHz, the following may be considered for SAR test exclusion.
 - a) The threshold at the corresponding test separation distance at 100 MHz in step 2 is multiplied by $[1 + \log(100/f(\text{MHz}))]$ for test separation distances > 50 mm and < 200 mm.
 - b) The threshold determined by the equation in a) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$ for test separation distances ≤ 50 mm.
 - c) SAR measurement procedures are not established below 100 MHz. When SAR test exclusion cannot be applied, a KDB inquiry is required to determine SAR evaluation requirements for any test results to be acceptable.

3. SAR TEST EXCLUSION THRESHOLDS

Smallest distance from the antenna and radiating structures or outer surface of the device

The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander. (See below figure and external EUT photo)

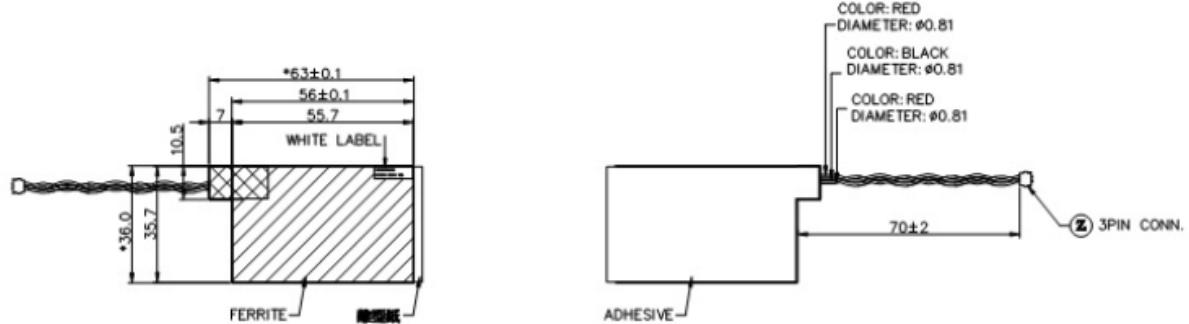



A D T

Power table

| Mode | Frequency (MHz) | Electric field (dB μ V/m) @10m | EIRP (dBm) |
|------|-----------------|------------------------------------|------------|
| RFID | 13.56 | 40.43 | -43.97 |

Field strength is then converted to EIRP as follows:

$$(i) \text{ EIRP} = ((E \cdot d)^2) / 30$$

where:

E is the field strength in V/m;

d is the measurement distance in meters;

EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to: $\text{EIRP}[\text{dBm}] = E[\text{dB}\mu\text{V/m}] + 20 \log(d[\text{meters}]) - 104.77$

(iii) Or, if d is 10 meters: $\text{EIRP}[\text{dBm}] = E[\text{dB}\mu\text{V/m}] - 84.8$

SAR Test Exclusion Thresholds

| Frequency (MHz) | Max. Power (mW) ^{*1} | Min. test separation distance (mm) | SAR test exclusion power thresholds ^{*2} (mW) | Result |
|-----------------|-------------------------------|------------------------------------|--|--------|
| 13.56 | 0.00004 | $\leq 50 \text{ mm}$ | 593 | Pass |

^{*1} Max. power obtained from maximum EIRP.

^{*2} Calculate SAR test exclusion thresholds from " 3) " formulas. (base on 10-g extremity SAR exclusion thresholds)

4. CONCLUSION

Since maximum EIRP is below SAR test exclusion power thresholds, the SAR evaluation is not required.

--- END ---