




Delta 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -0.00 dB VBW 3 MHz
92 dBμV 100.400802 ms SWT 300 ms Unit dBμV

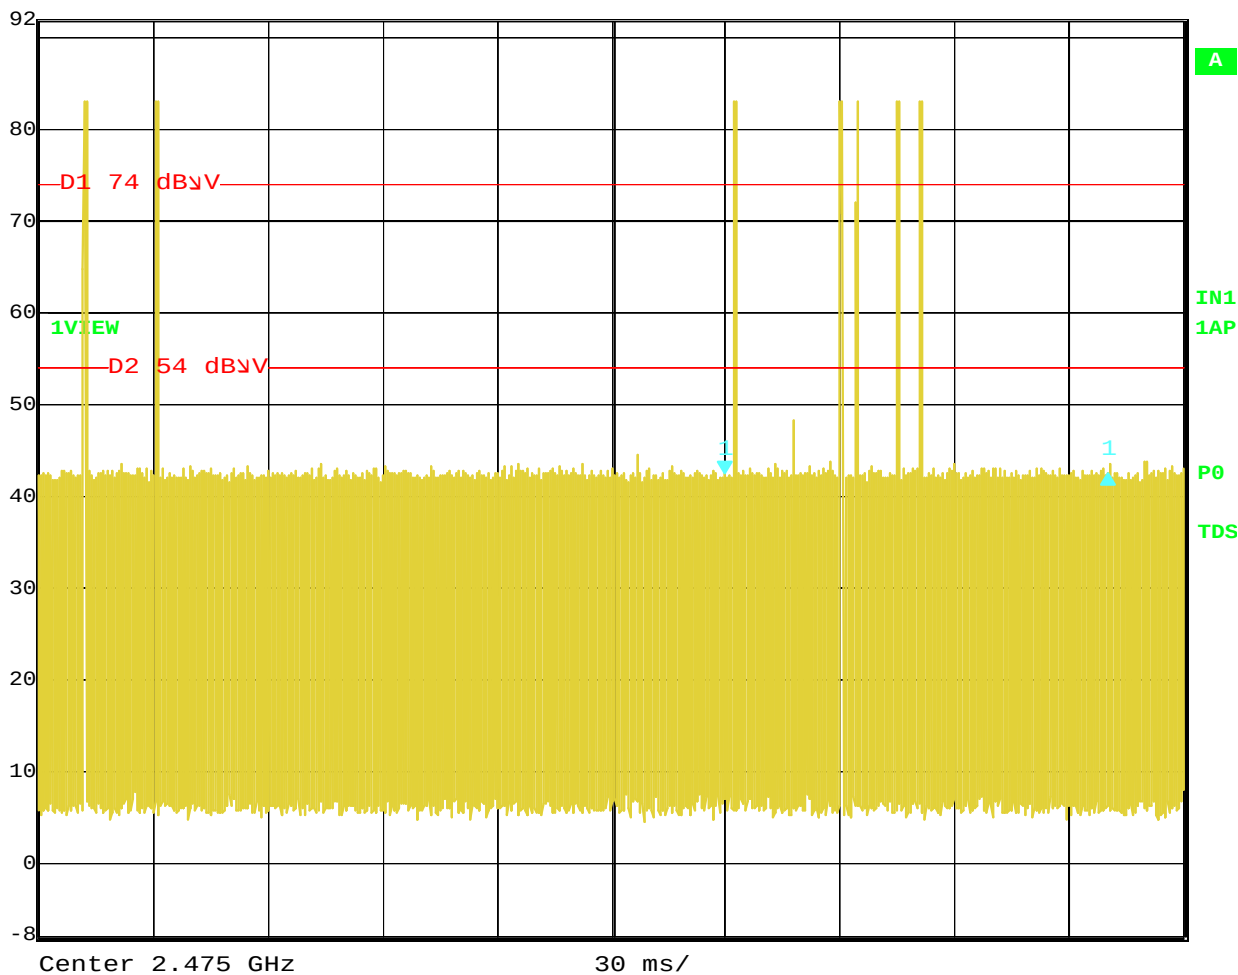


Date: 24.SEP.2014 07:45:46

Number of Pulses in Advertising Mode – Worst Case 100 ms is 5 Pulses



Ref Lvl	Delta 1 [T1]	RBW	1 MHz	RF Att	10 dB
92 dBμV	0.83 dB	VBW	3 MHz		
	1.082164 ms	SWT	20 ms	Unit	dBμV

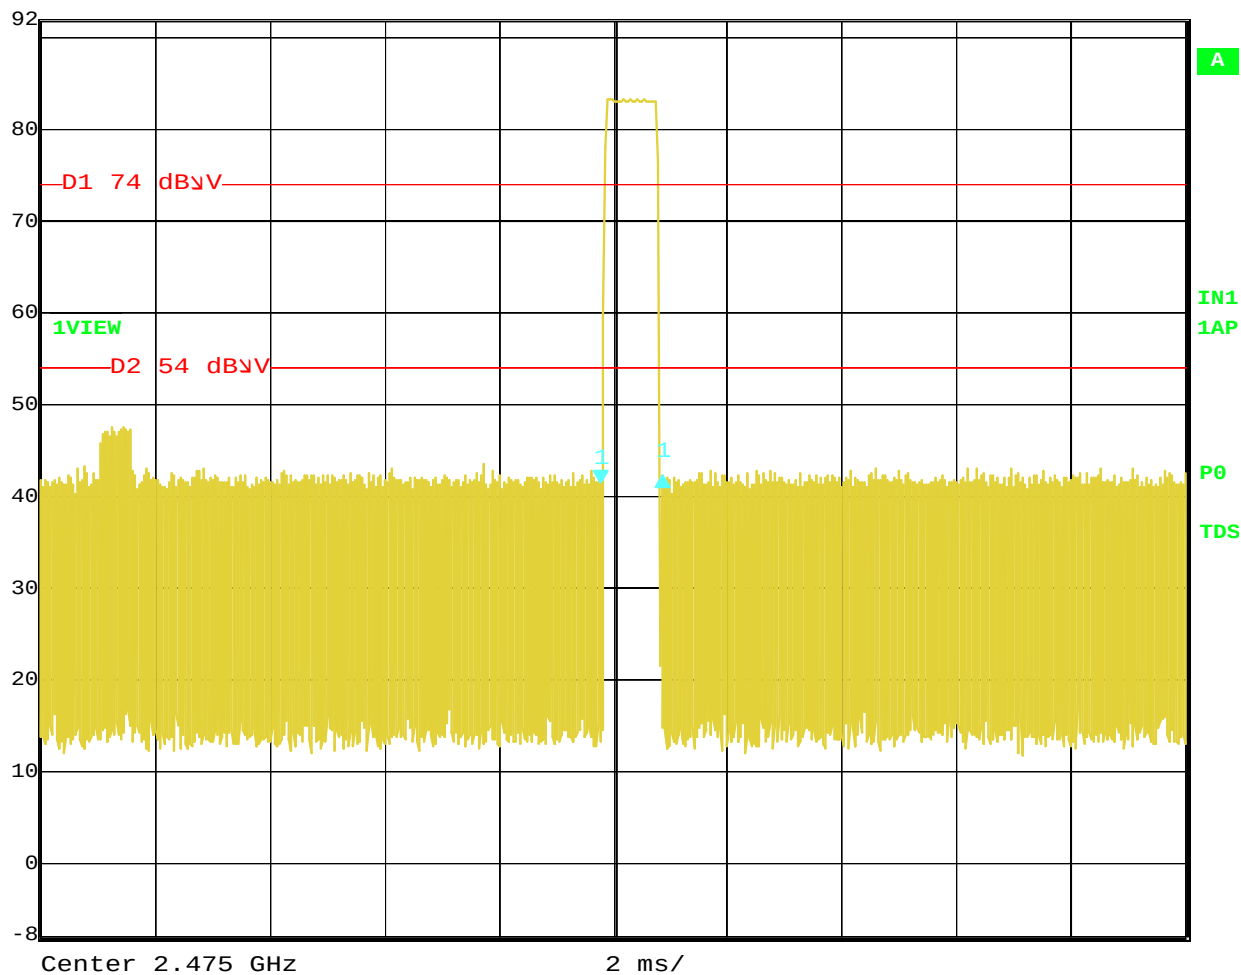


Date: 24.SEP.2014 07:45:01

Time of One Pulse – Advertising Mode – 1.082164 ms

Duty Cycle = (1.082164 ms * 5) / 100 ms = 5.41082%



Ref Lvl 92 dBμV
Delta 1 [T1] 0.29 dB
68.136273 ms
RBW 1 MHz
VBW 3 MHz
SWT 1 s
RF Att 10 dB
Unit dBμV

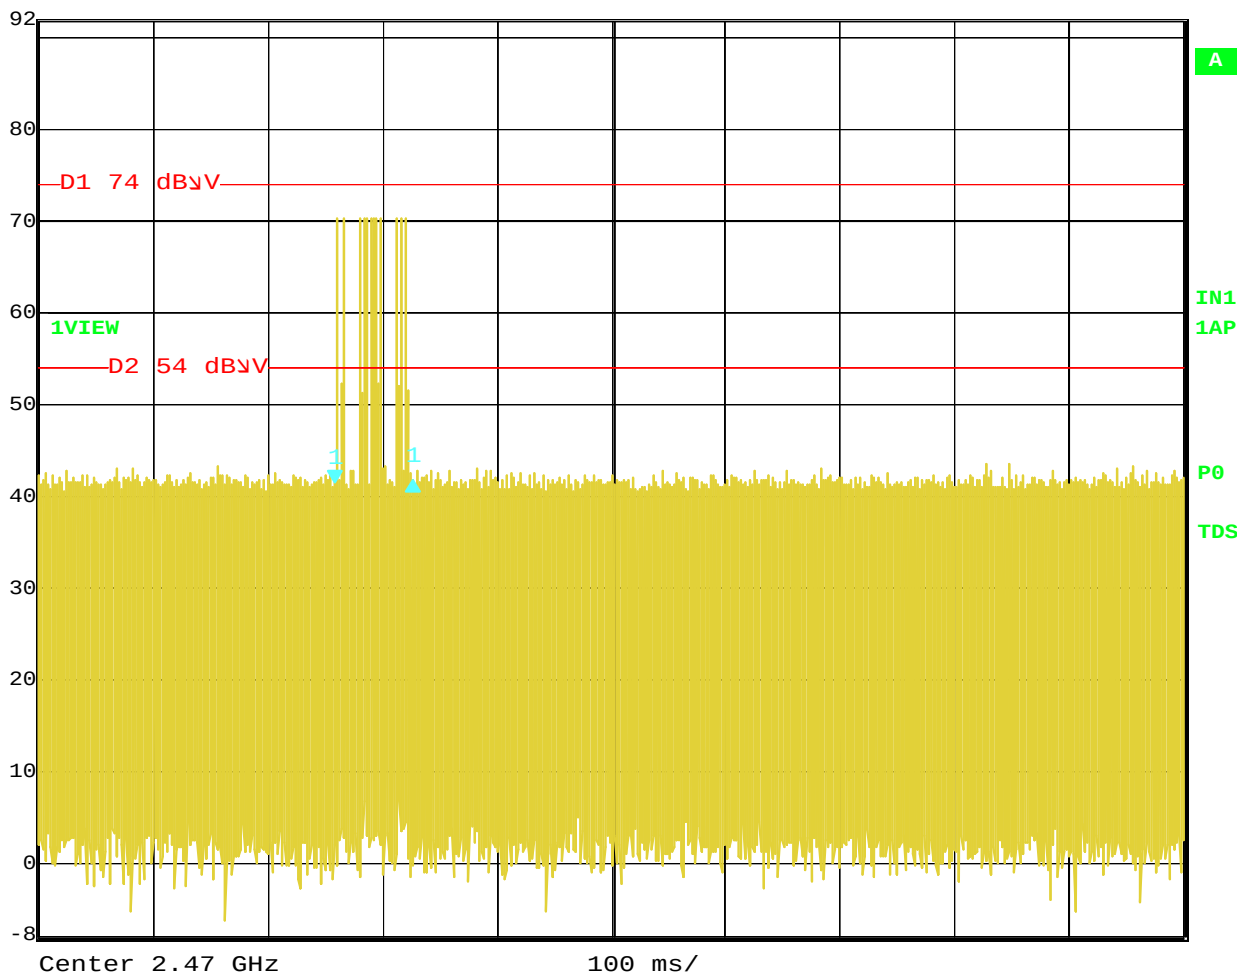


Date: 24.SEP.2014 07:56:45

Pulse Train in Pairing Mode




Ref Lvl 92 dBμV
Delta 1 [T1] 1.21 dB
100.200401 ms
RBW 1 MHz
VBW 3 MHz
SWT 1 s
RF Att 10 dB
Unit dBμV

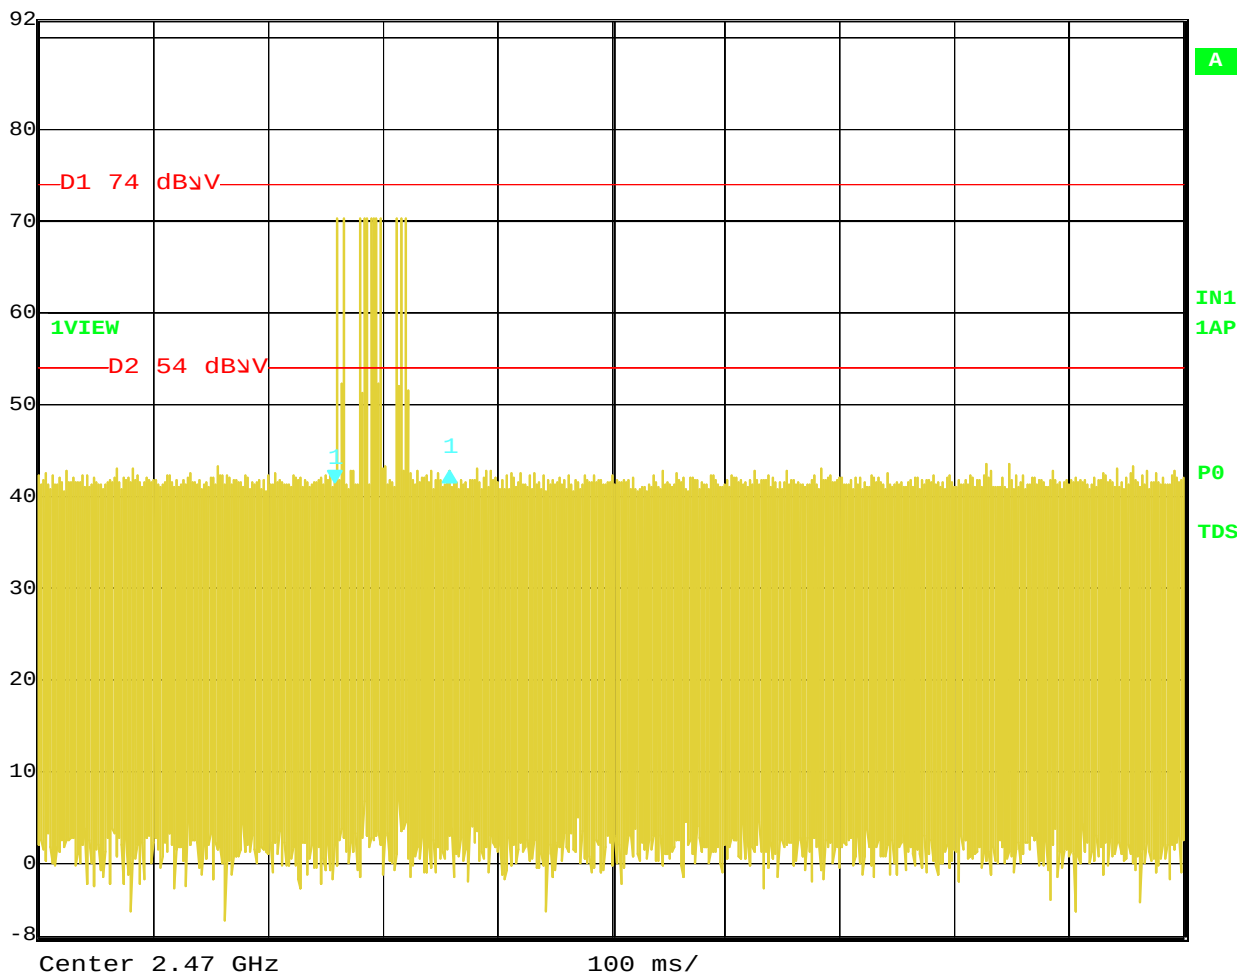


Date: 24.SEP.2014 07:57:10


Pulse train only shows up once in a 100 ms period – Pairing Mode

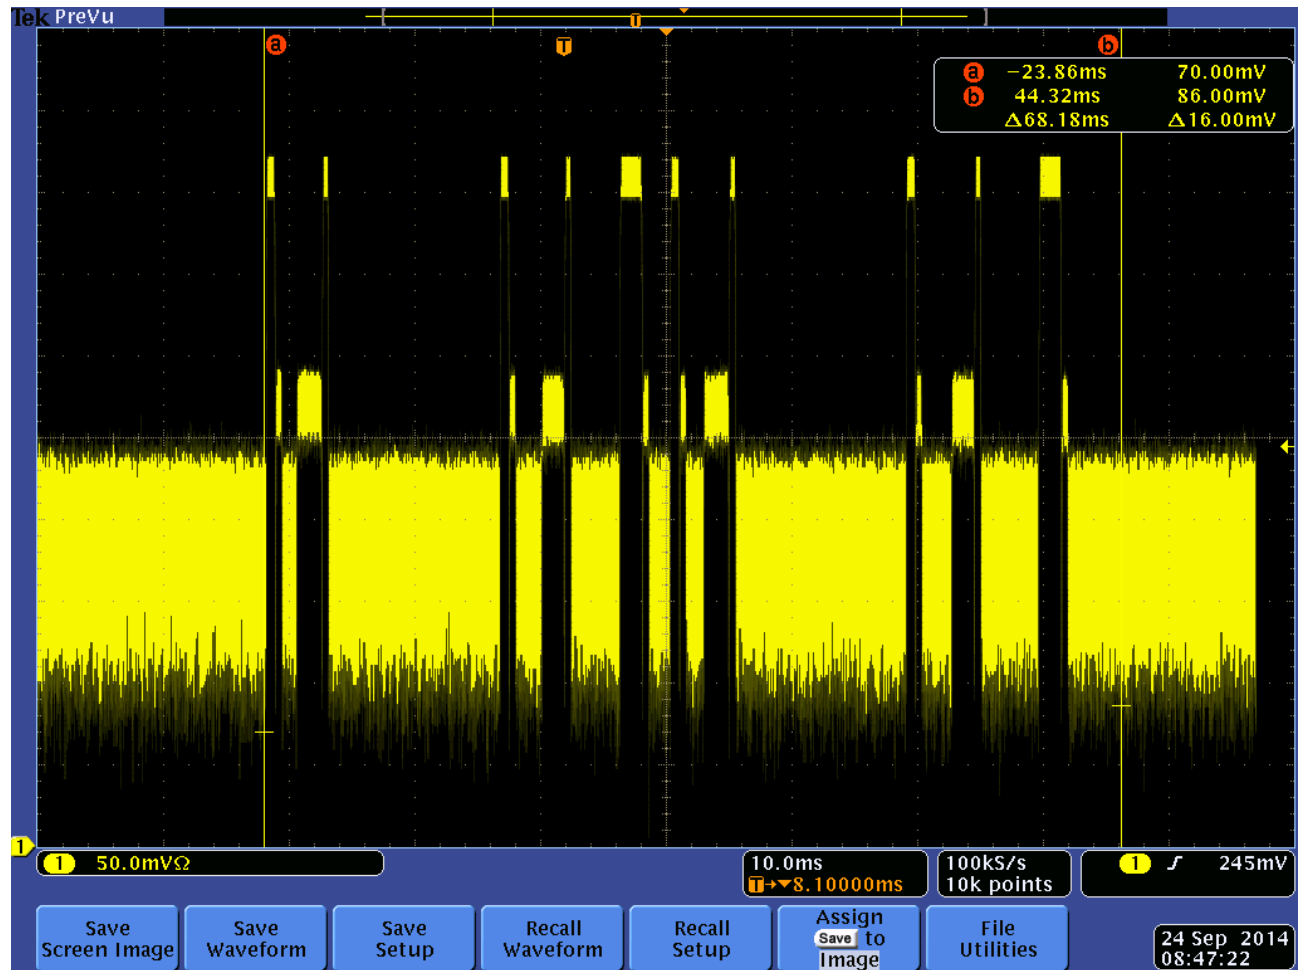


Pulse Train Shown Using the Oscilloscope – Pairing Mode

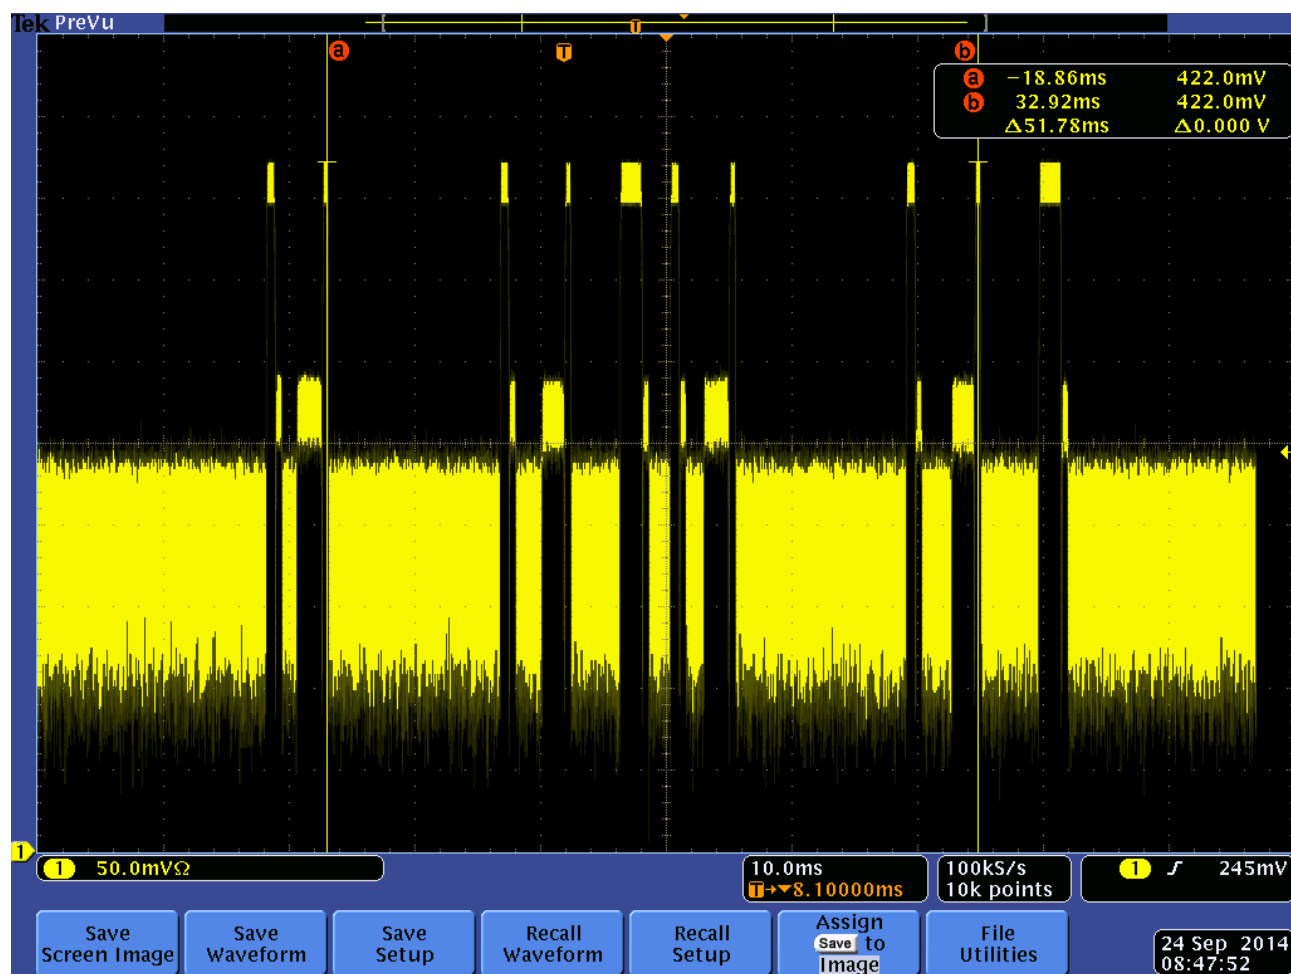


Maximum Voltage of High Pulses = 422 mV – Pairing Mode

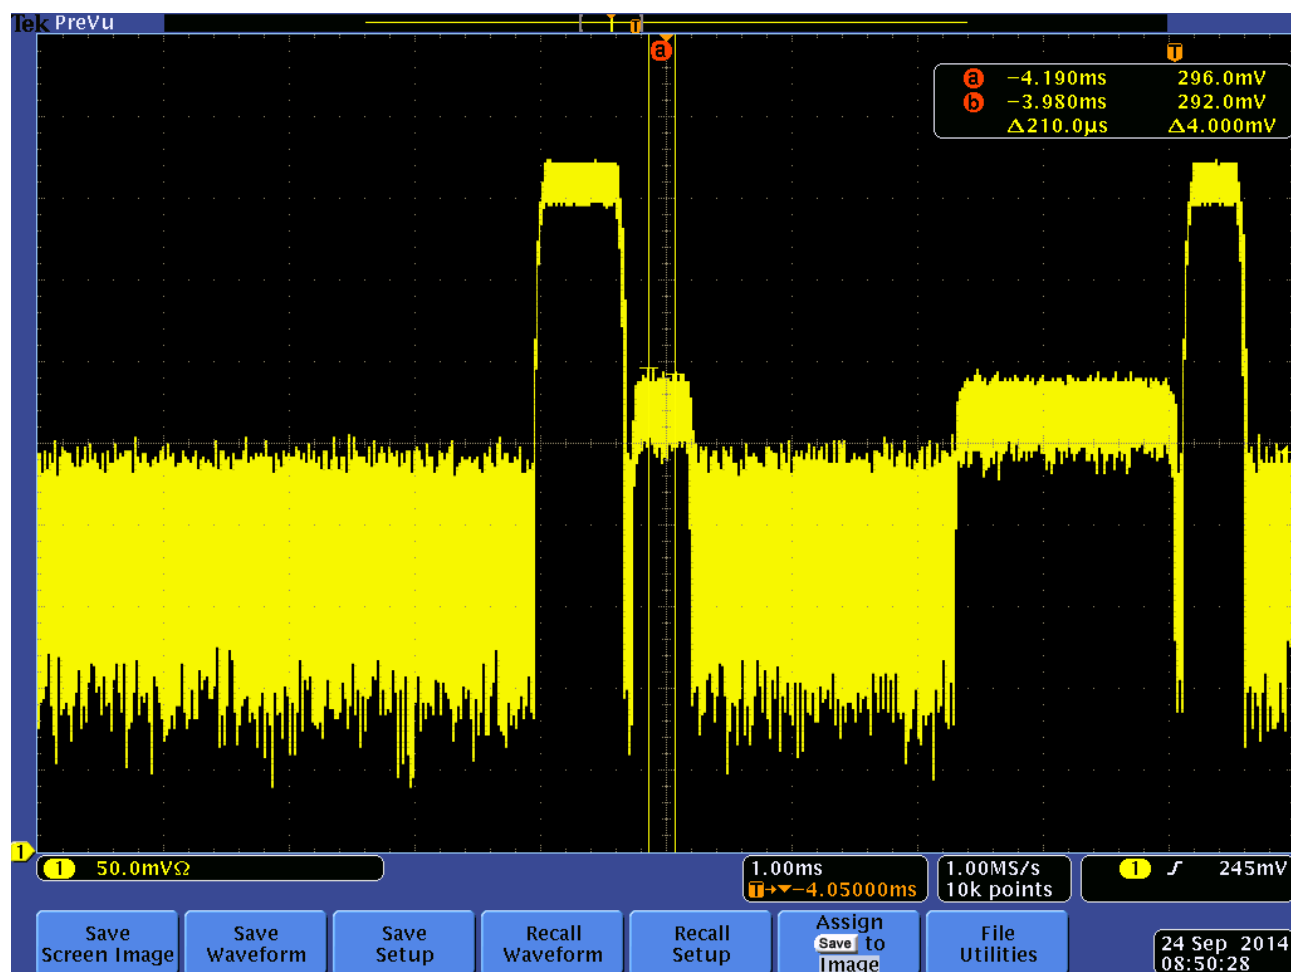


Maximum Voltage of Low Pulses = 296 mV – Pairing Mode

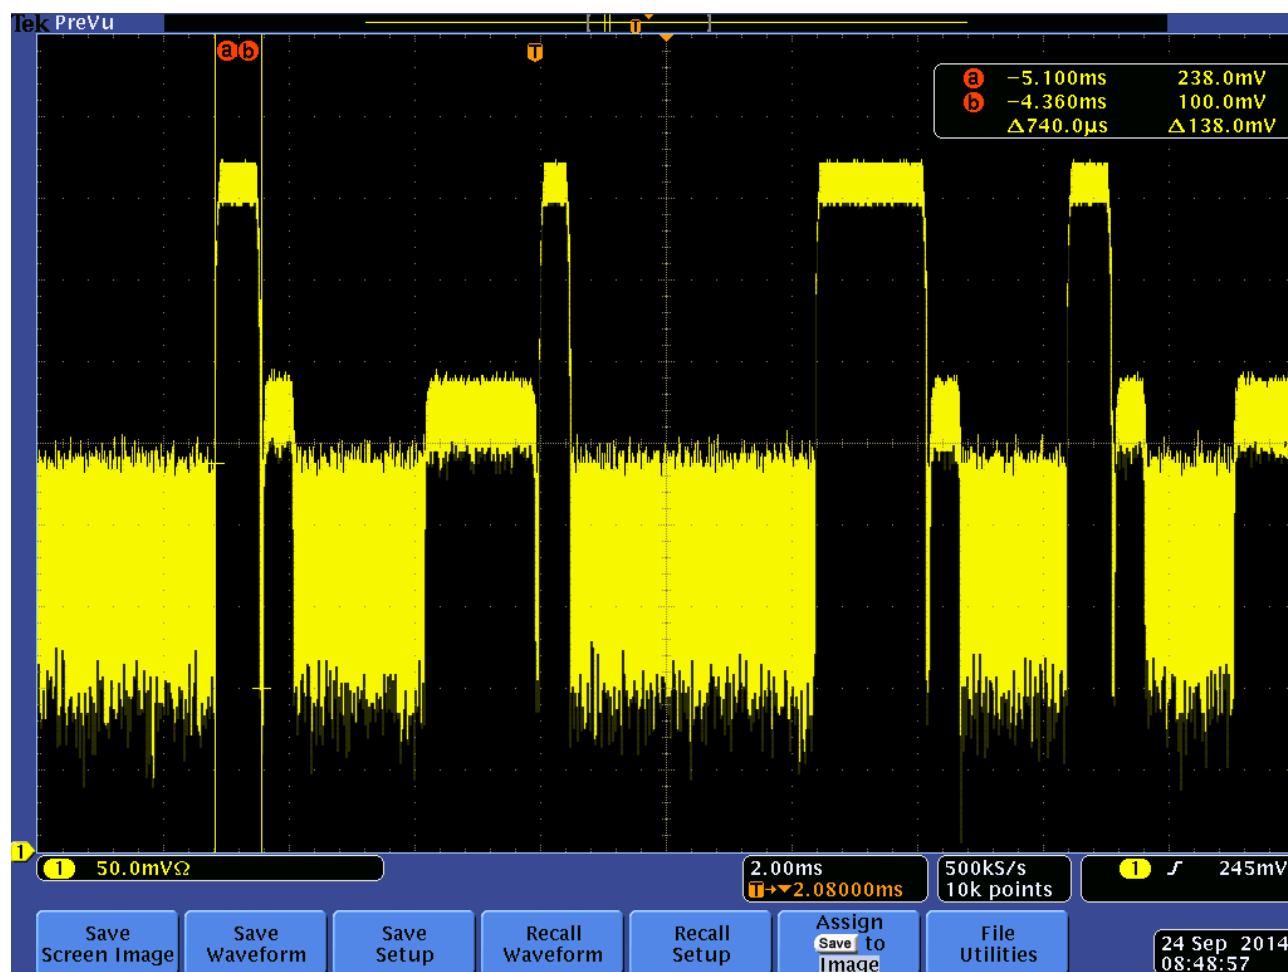


Pulse #1 and 5 = 740 us – Pairing Mode

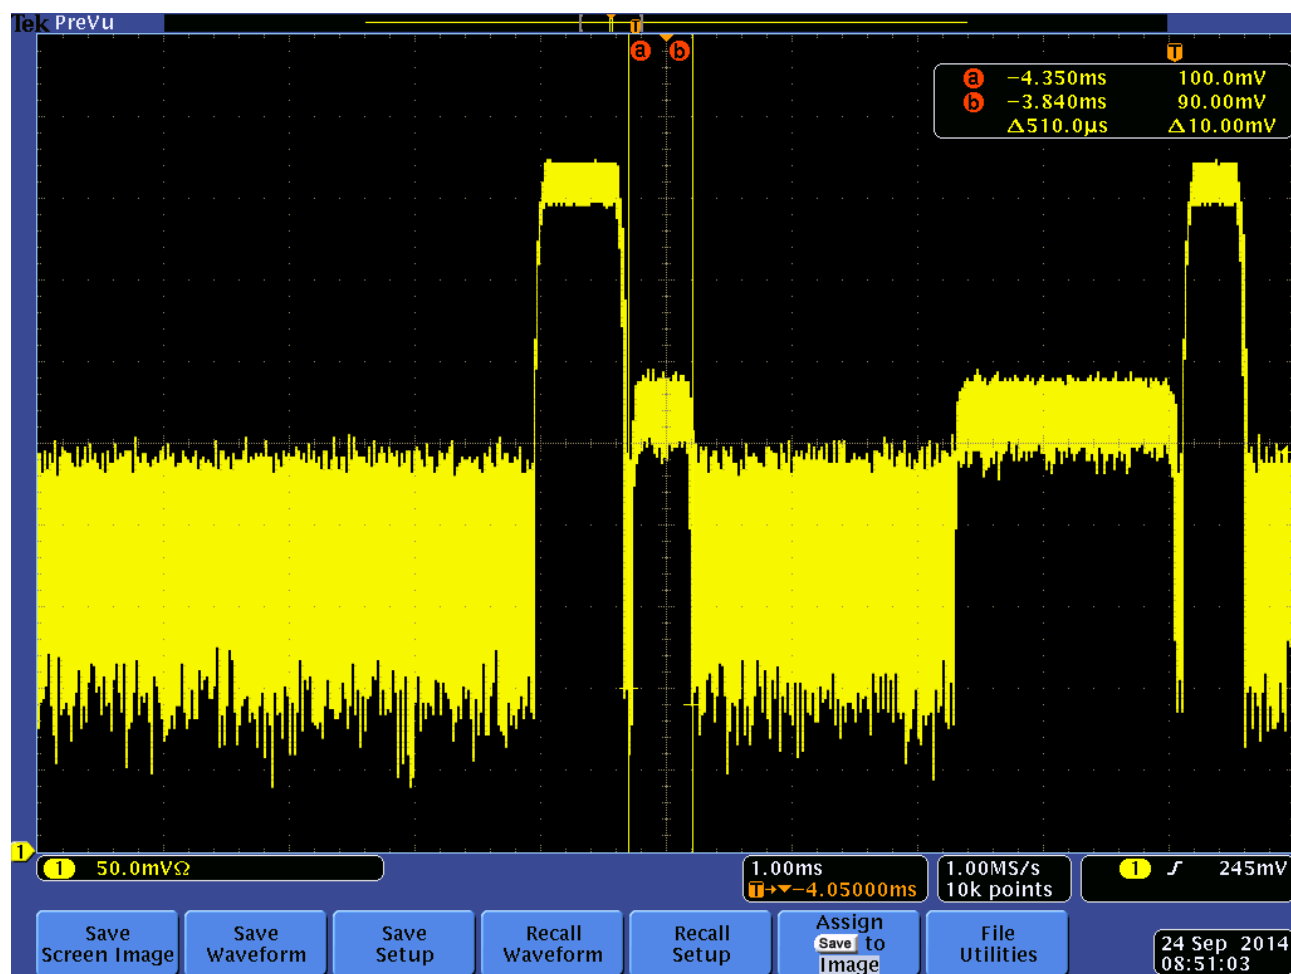


Pulse #2 and 6 = 510 us – Pairing Mode

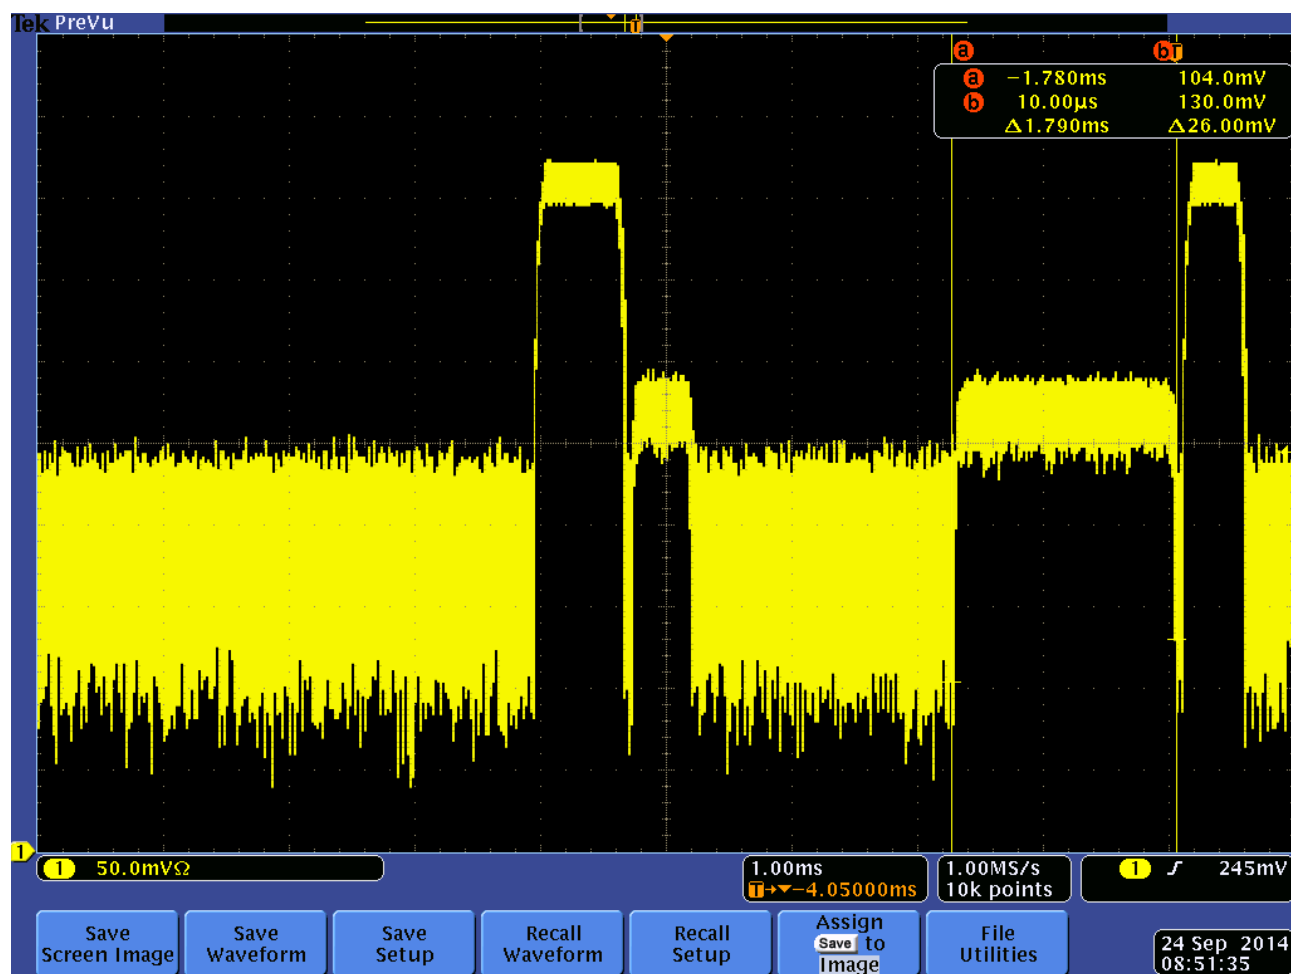


Pulse #3 and 7 = 1790 us – Pairing Mode

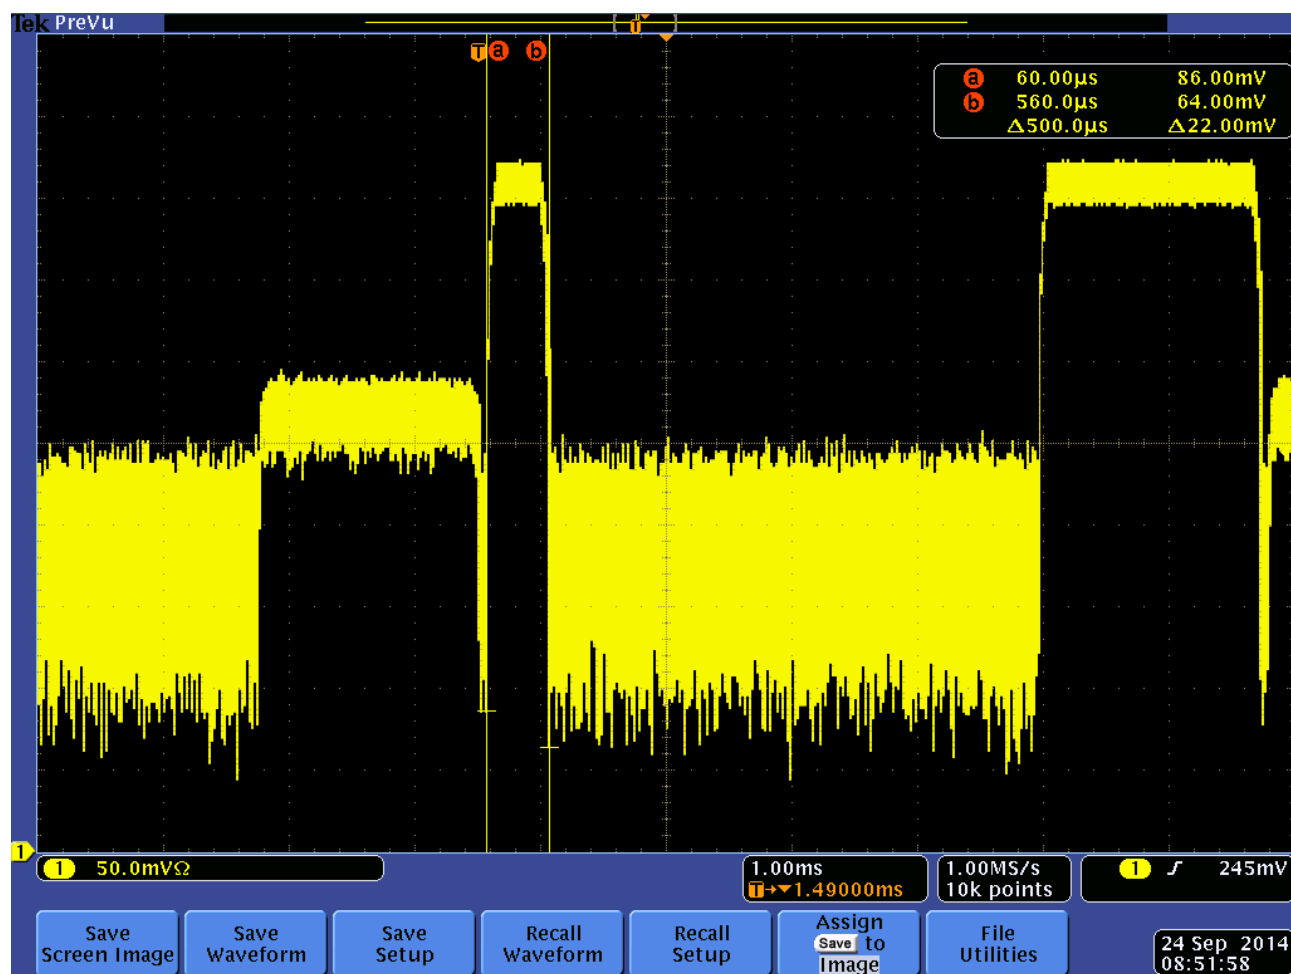


Pulse #4 and 8 = 500 us – Pairing Mode

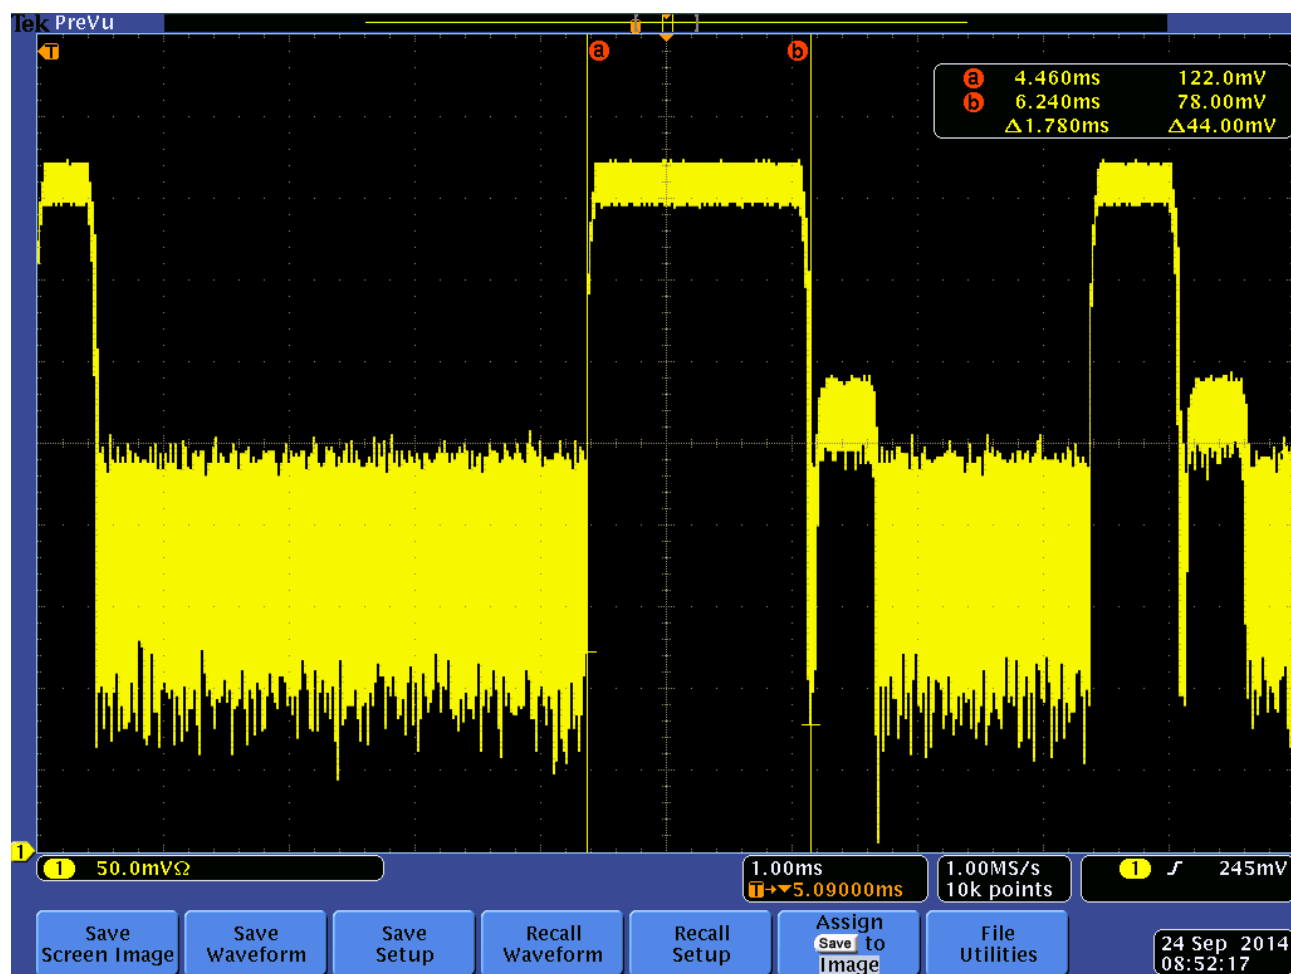


Pulse #9 = 1780 us – Pairing Mode

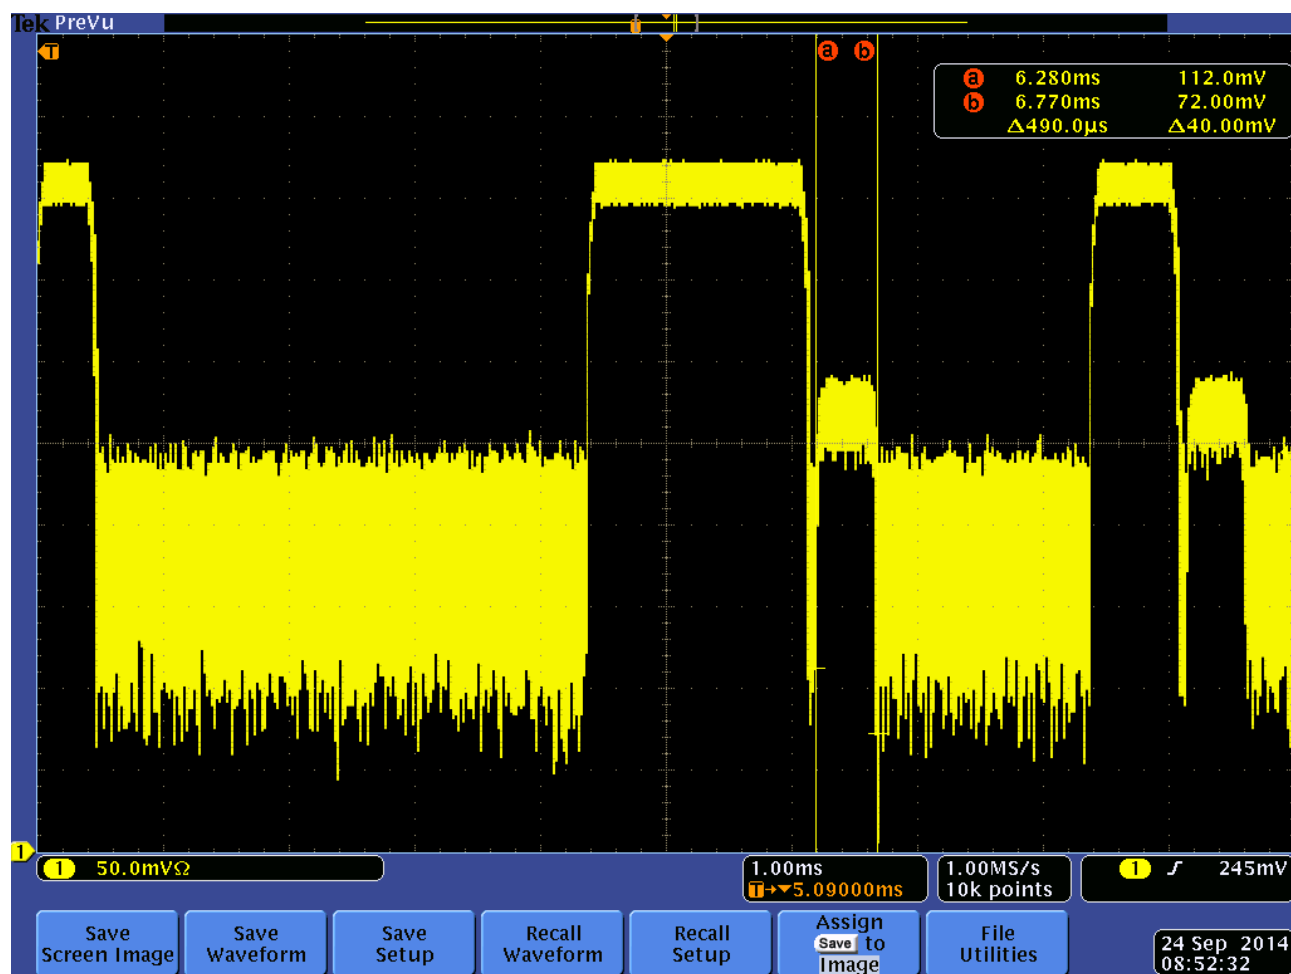


Pulse #10 = 490 us – Pairing Mode

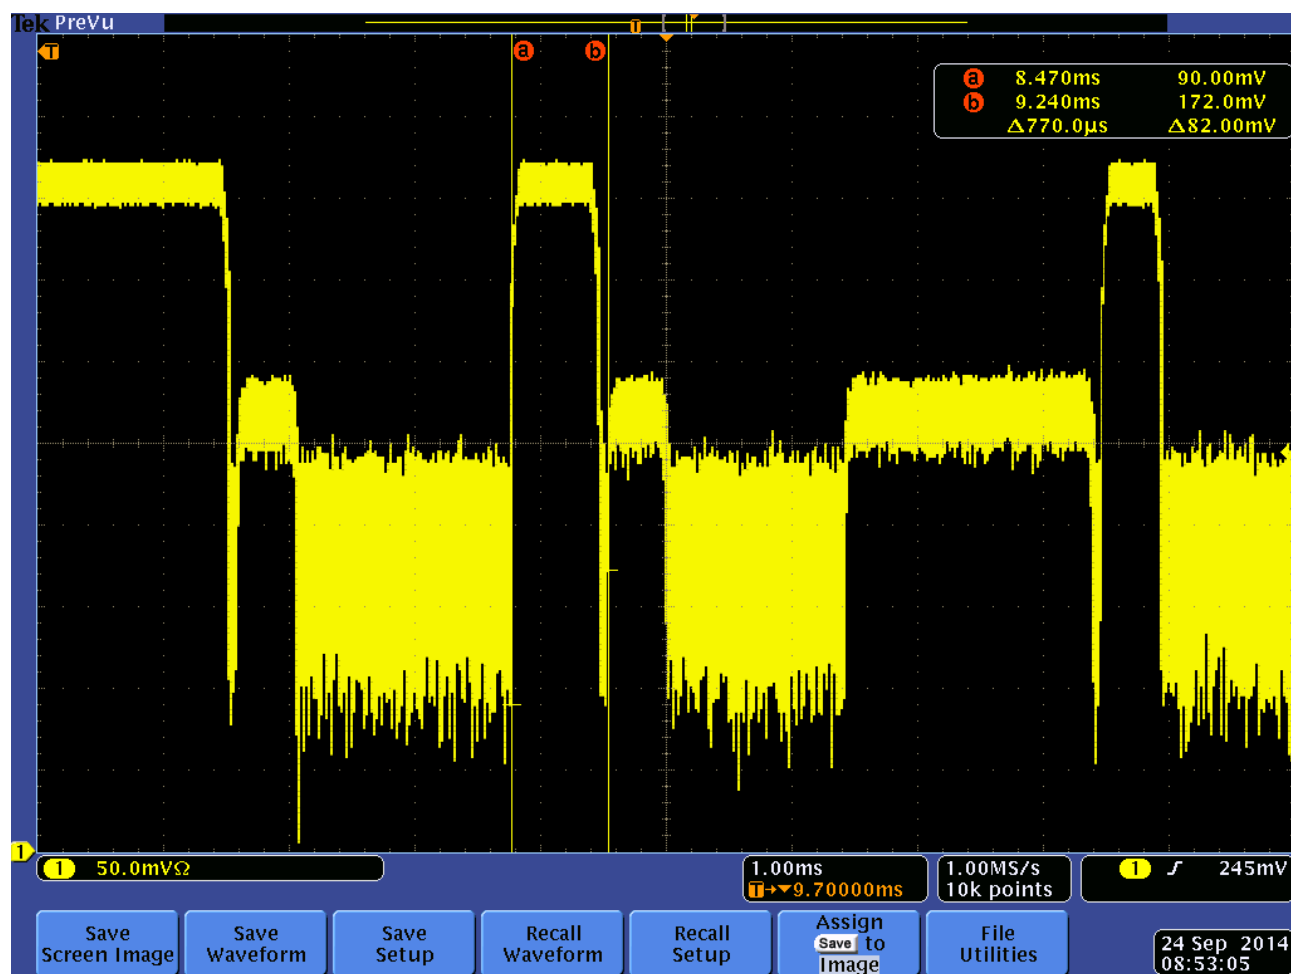


Pulse #11 = 770 us – Pairing Mode

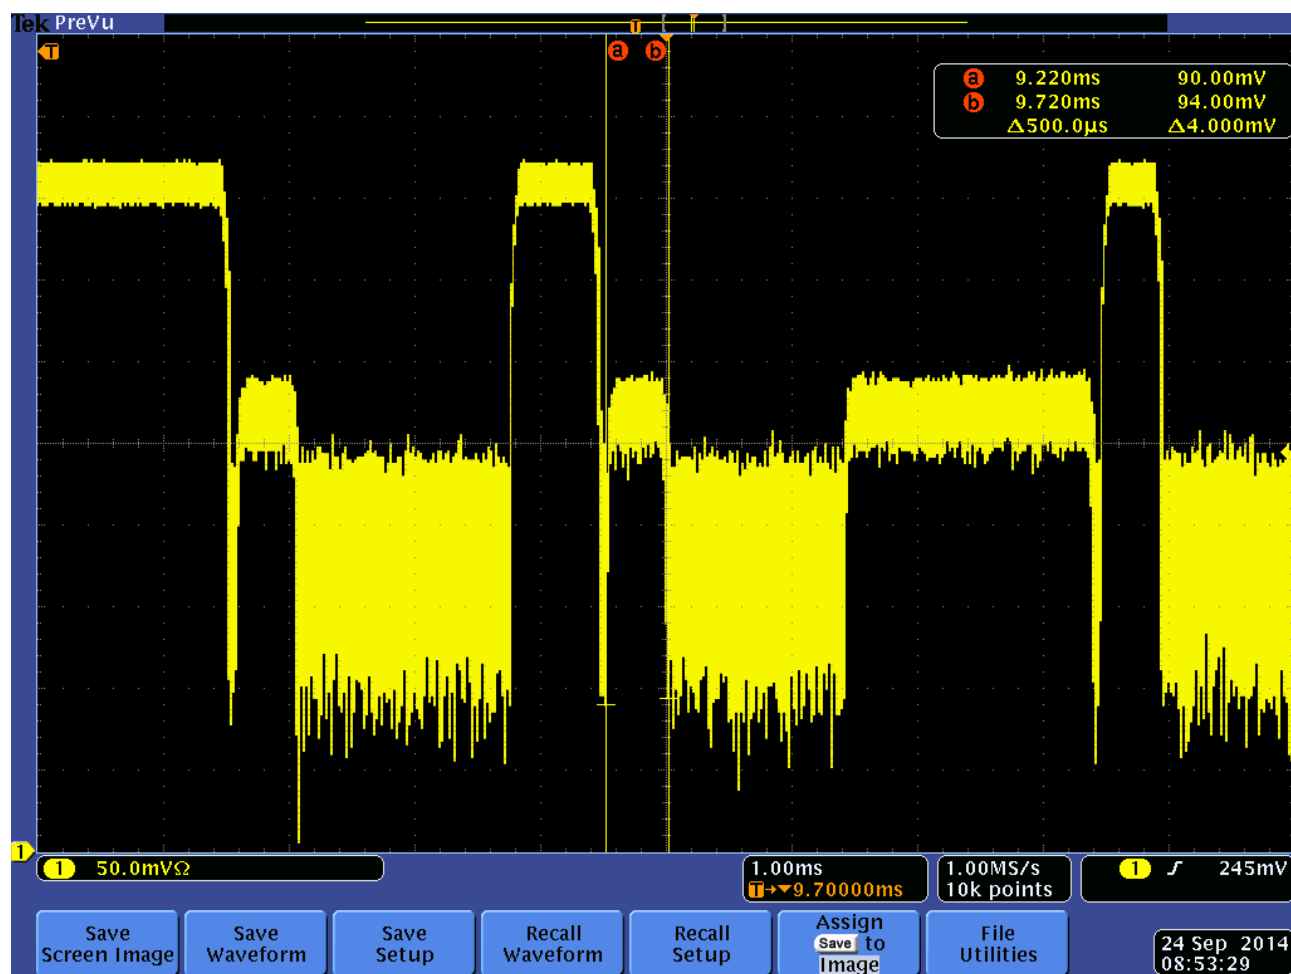


Pulse #12 = 500 us – Pairing Mode

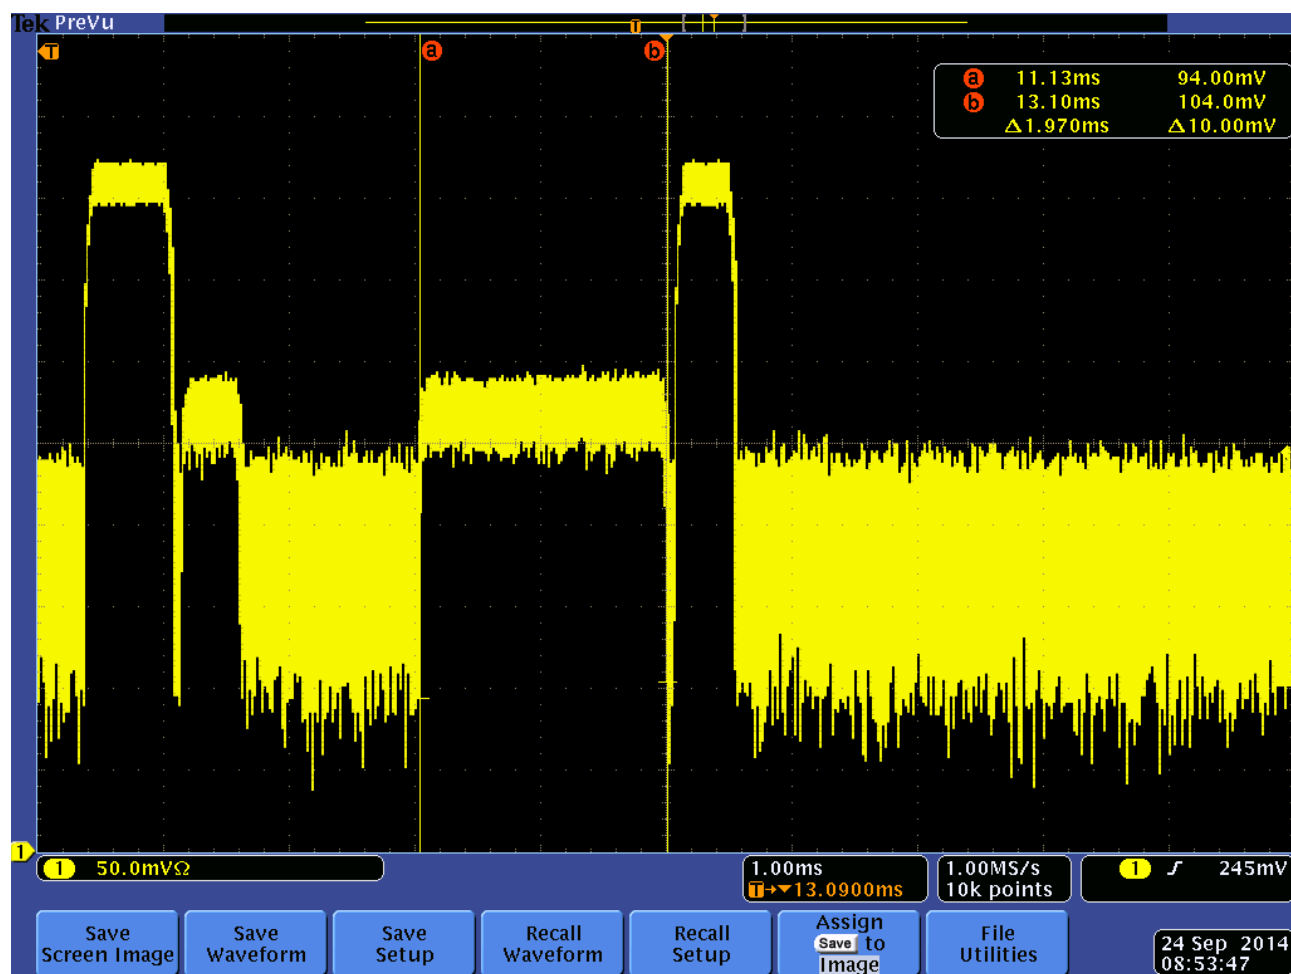


Pulse #13 = 1970 us – Pairing Mode

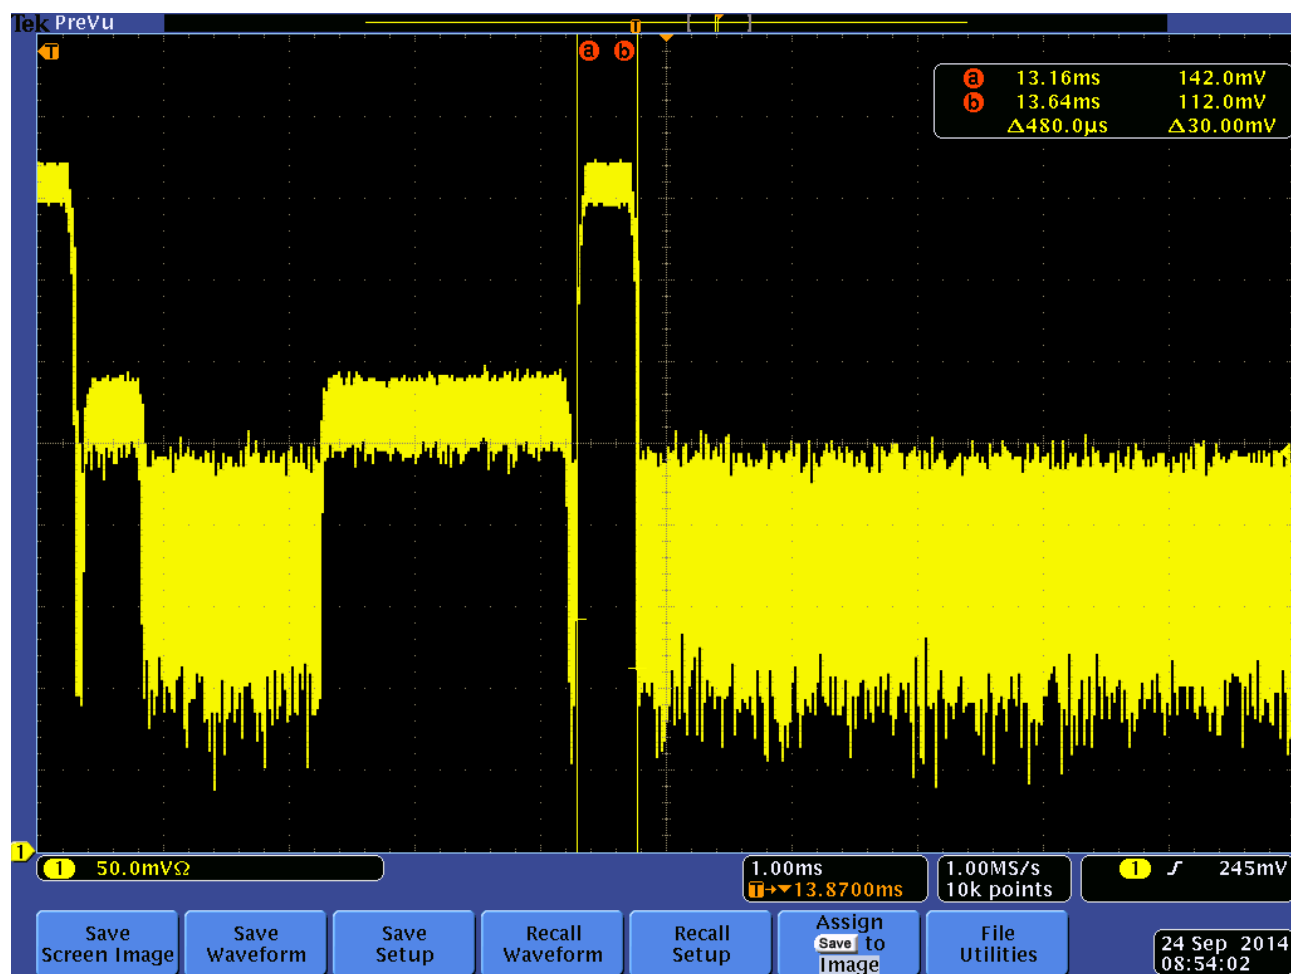


Pulse #14 = 480 us – Pairing Mode

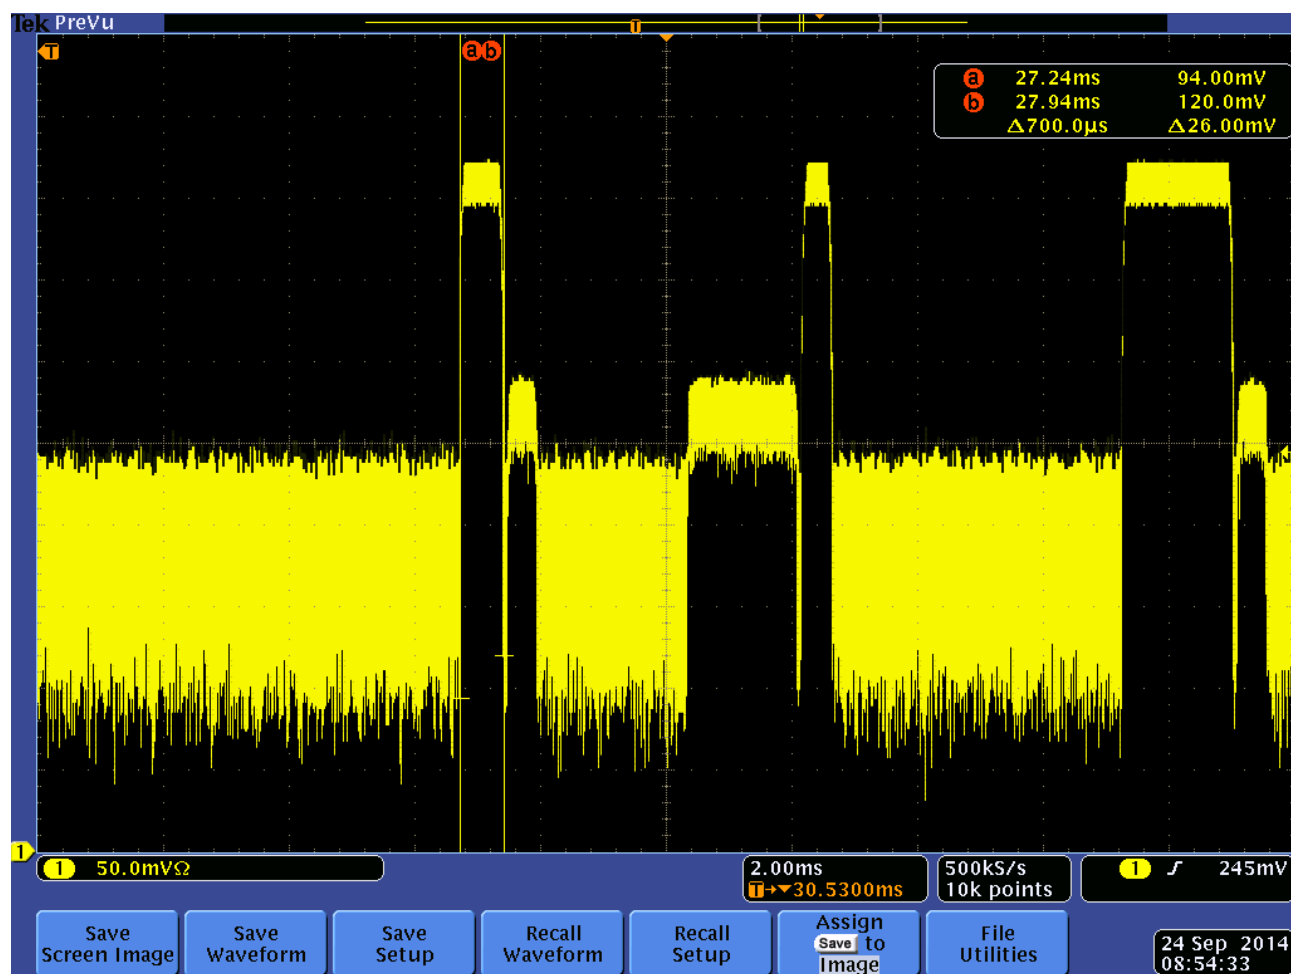


Pulse #15 = 700 us – Pairing Mode

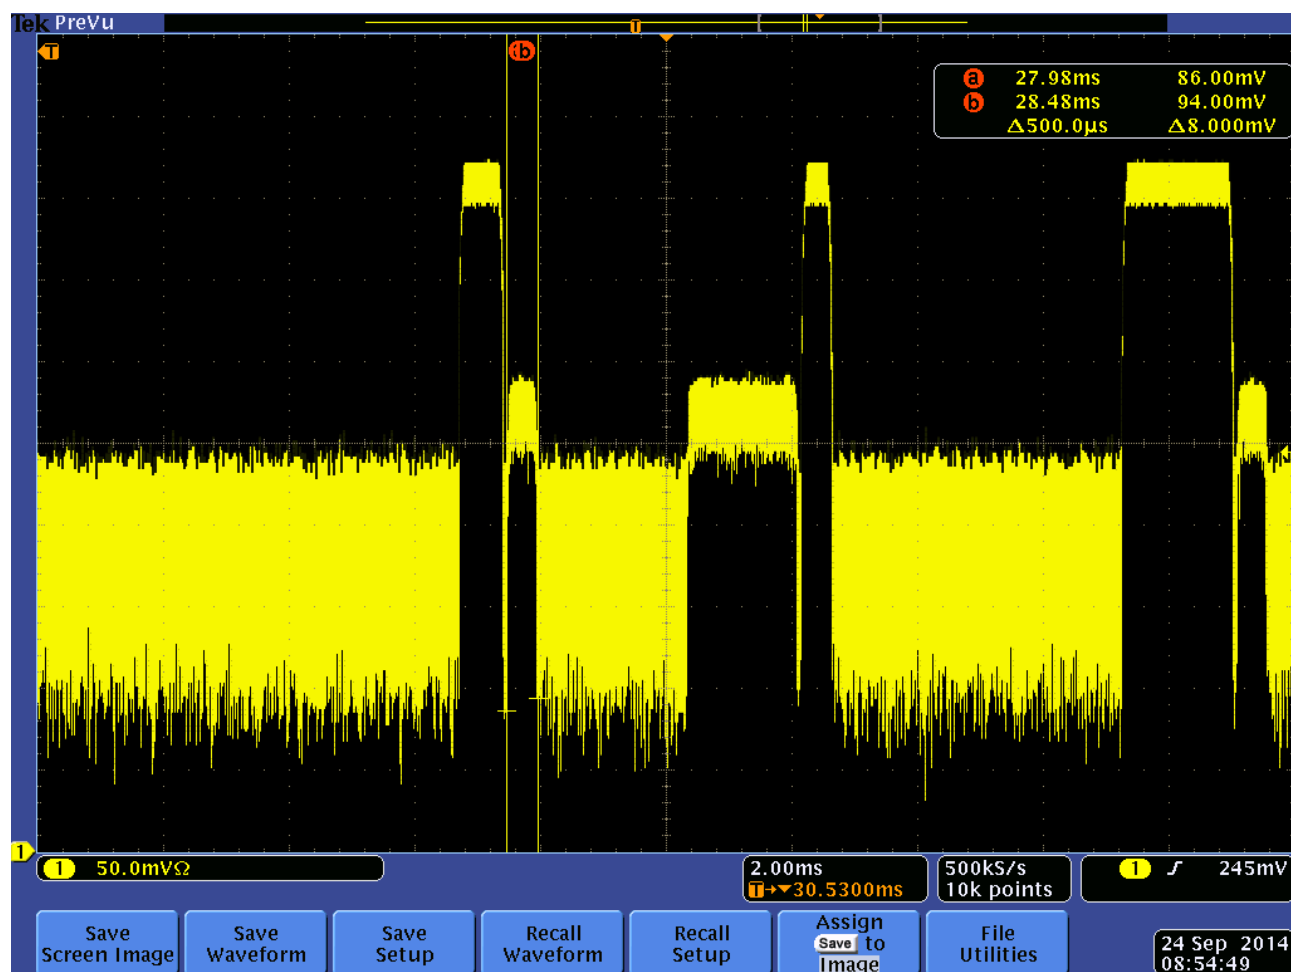


Pulse #16 = 500 us – Pairing Mode

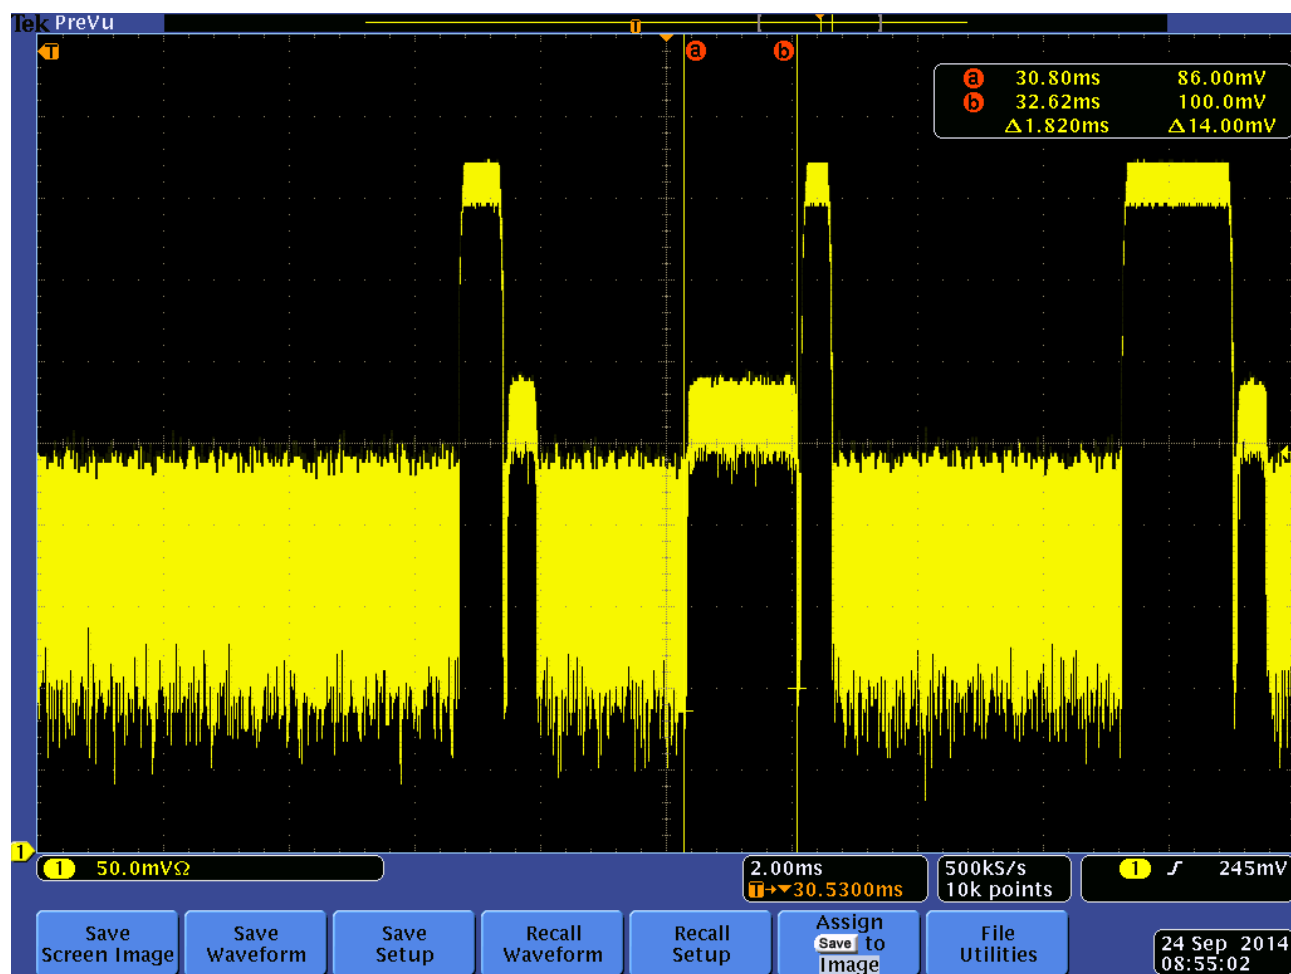


Pulse #17 = 1820 us – Pairing Mode

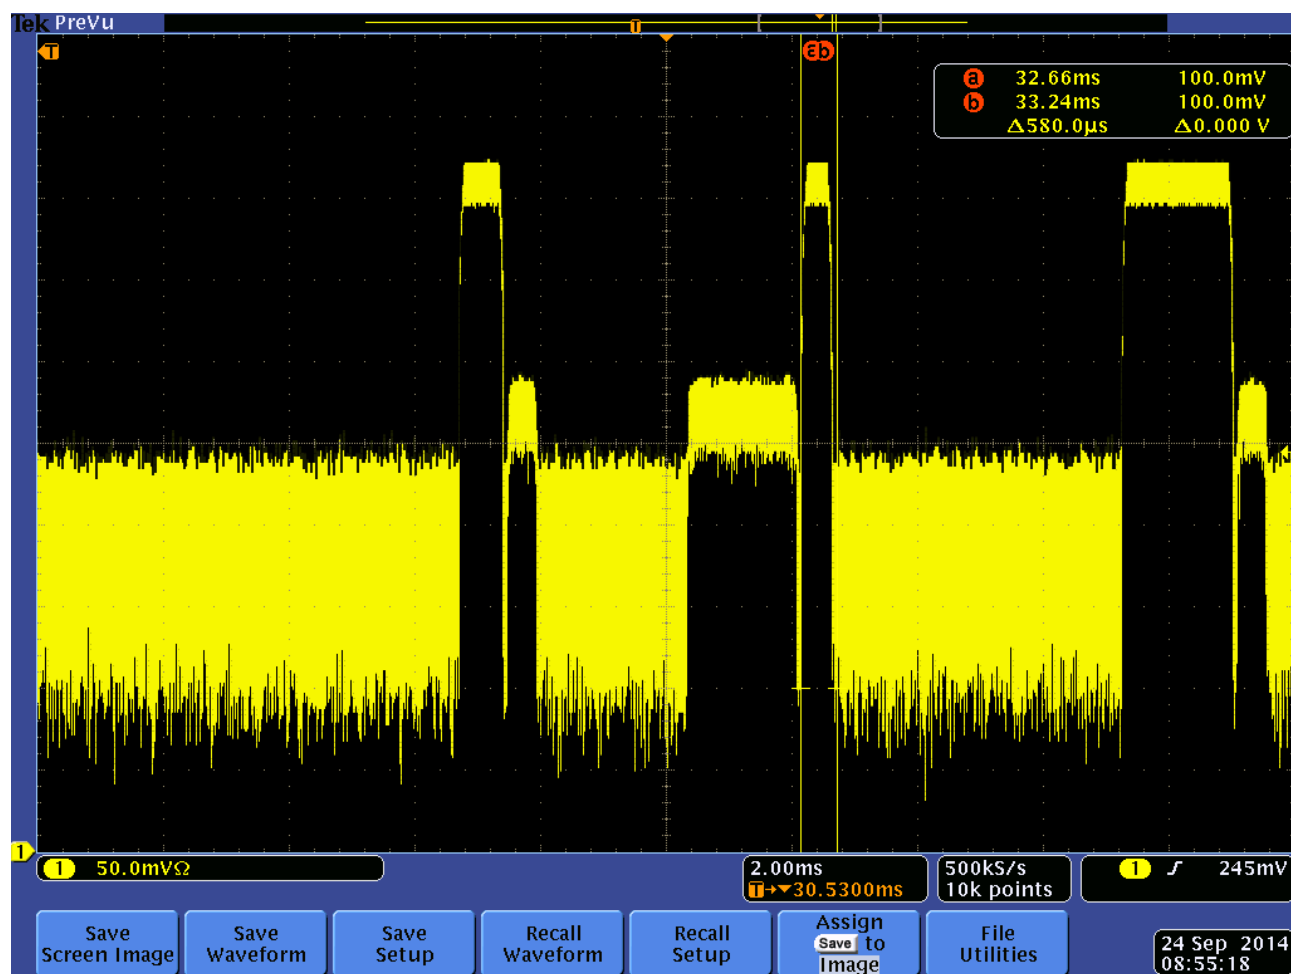

Pulse #18 = 580 us – Pairing Mode

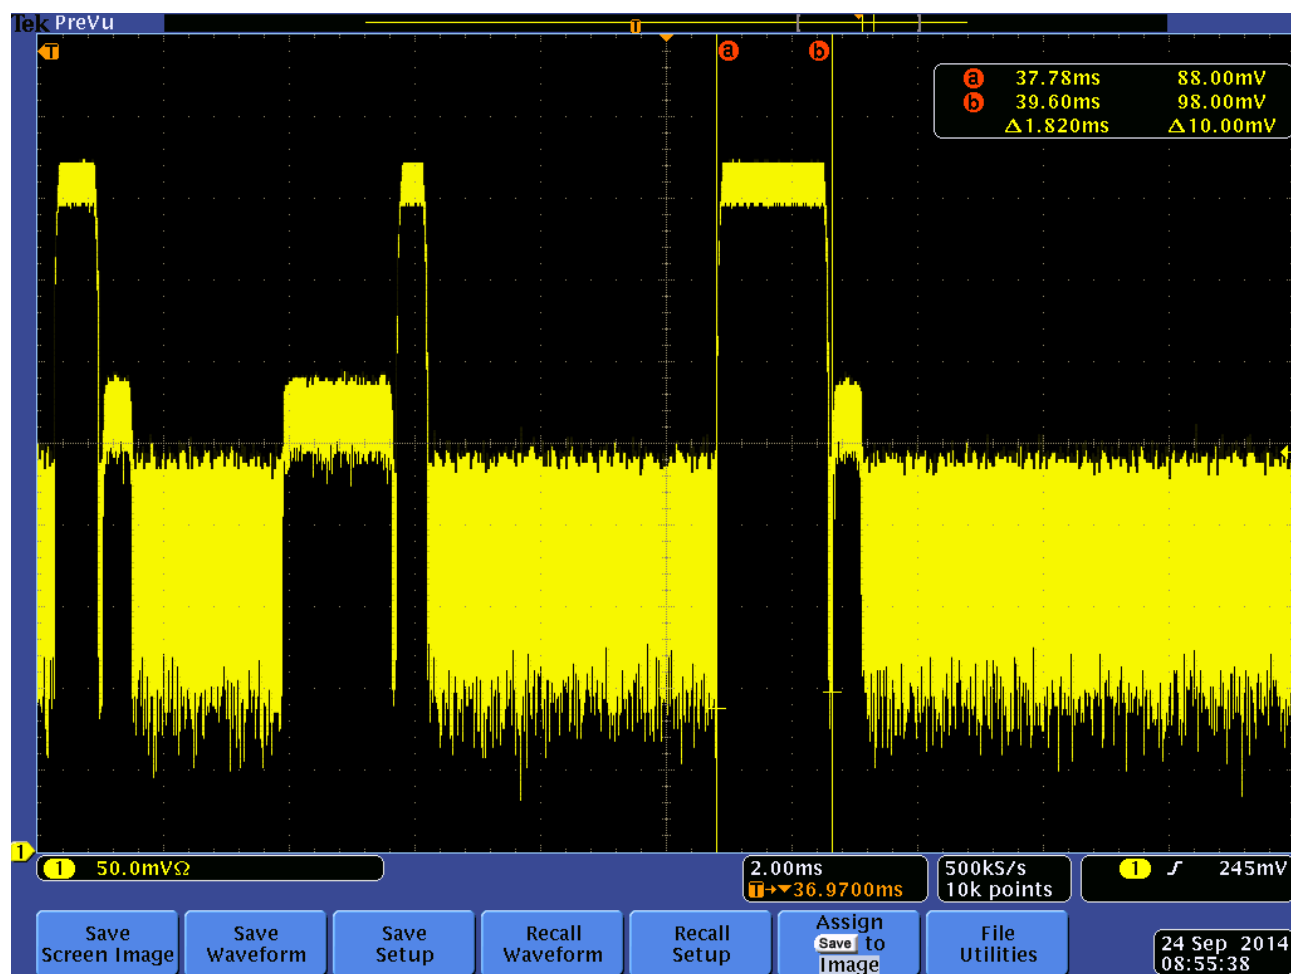

Pulse #19 = 1820 us – Pairing Mode

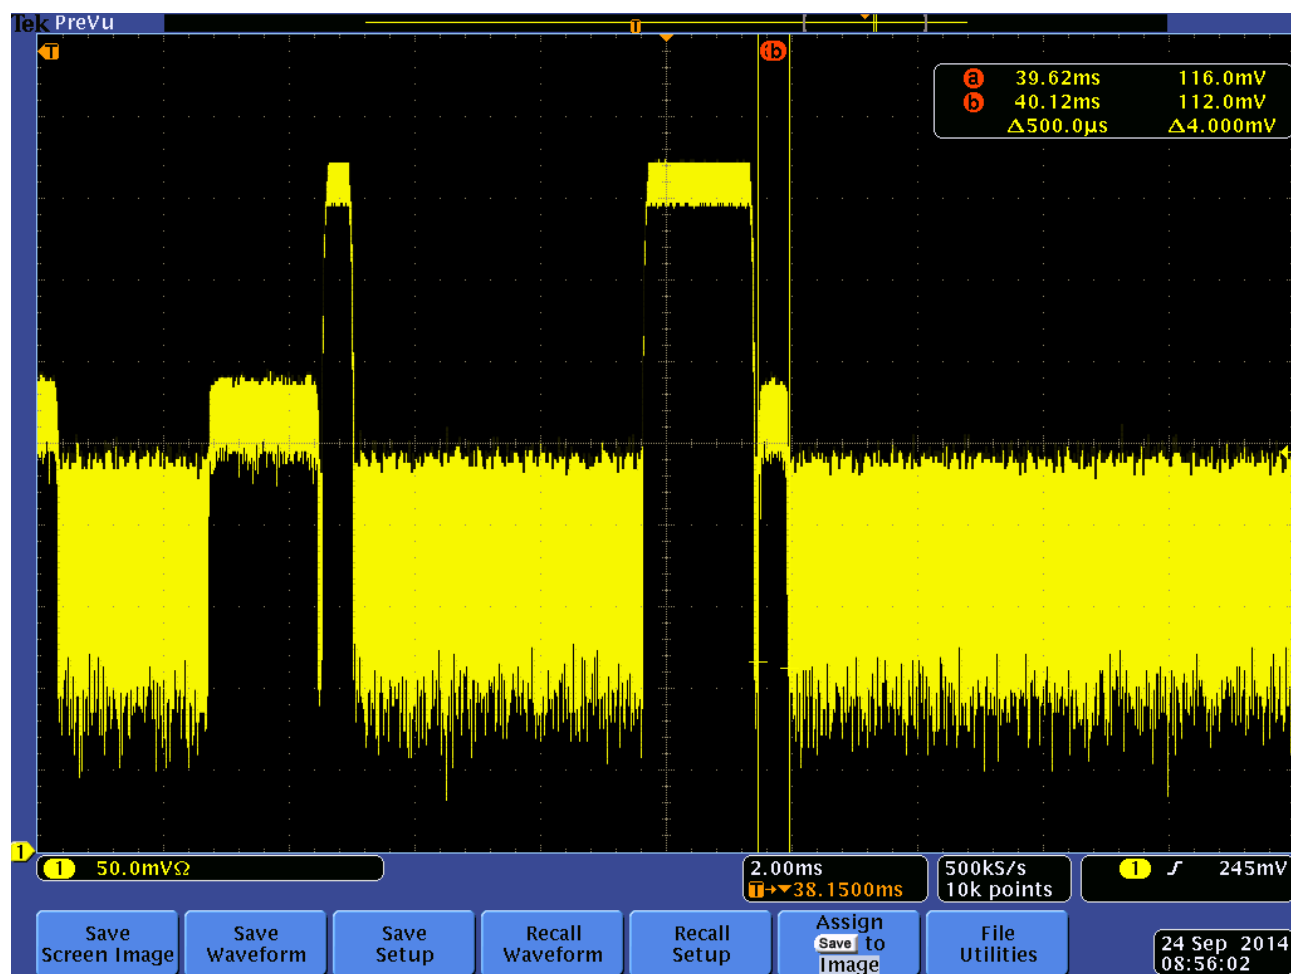

Pulse #20 = 500 us – Pairing Mode

DUTY CYCLE INFORMATION – PAIRING MODE

UNIVERSAL ELECTRONICS, INC.

ECHOSTAR SAGE ZHA REMOTE 2014

MODEL: URC-2001BC0-R

PULSE NUMBER	Time (uS)
1 and 5	740
2 and 6	510
3 and 7	1790
4 and 8	500
9	1780
10	490
11	770
12	500
13	1970
14	480
15	700
16	500
17	1820
18	580
19	1820
20	500

Total On Time = 18,990 uS

Total Time of Pulse with Blanking Interval = 100,000 uS

Total Duty Cycle = 18.99 %

Peak to Average Ratio = 14.42 dB