



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 90 TEST REPORT

APPLICANT	MIDLAND RADIO CORPORATION
	5900 PARRETTA DRIVE
	KANSAS CITY MISSOURI 64120 USA
FCC ID	MMA901090
MODEL NUMBER	STD1090
PRODUCT DESCRIPTION	VHF MOBILE TRANSCEIVER
DATE SAMPLE RECEIVED	8/13/2008
DATE TESTED	9/29/2008
TESTED BY	Joe Scoglio
APPROVED BY	Mario de Aranzeta
TIMCO REPORT NO.	1840AUT8TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



## TABLE OF CONTENTS

GENERAL REMARKS.....	3
GENERAL INFORMATION .....	4
EQUIPMENT LIST .....	5
TEST PROCEDURE .....	6
RF POWER OUTPUT .....	7
MODULATION CHARACTERISTICS.....	8
VOICE MODULATED COMMUNICATION EQUIPMENT .....	10
OTHER MODULATION CHARACTERISTICS .....	13
OCCUPIED BANDWIDTH.....	14
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	18
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	21
FREQUENCY STABILITY.....	23
FREQUENCY STABILITY.....	24

Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc

**GENERAL REMARKS**

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

**Summary**

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

**Attestations**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, Fl 32669



**Authorized Signatory Name:**

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** 10/1/2008

**GENERAL INFORMATION**

**DUT Specification**

<b>DUT Description</b>	VHF MOBILE TRANSCEIVER
<b>FCC ID</b>	MMA901090
<b>Model Number</b>	STD1090
<b>Operating Frequency</b>	136 – 174 MHz
<b>Type of Emission</b>	11K2F1D, 11K2F2D, 11K0F3E, 16K0F3E
<b>Modulation</b>	FM
<b>DUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power 12V
	<input type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed
	<input checked="" type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
<b>Test Conditions</b>	The temperature was 26°C with a relative humidity of 50%.
<b>Modification to the DUT</b>	None
<b>Test Exercise</b>	The DUT was placed in continuous transmit mode.
<b>Applicable Standards</b>	ANSI/TIA 603-C:2004, FCC CFR 47 Part 90
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.

## EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14499	CAL 12/29/06	12/29/08
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/07	3/30/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/06	3/3/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/06	4/5/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/06	12/1/08
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/07	5/9/09
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/07	5/14/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

## TEST PROCEDURE

**Power Line Conducted Interference:** The procedure used was ANSI/TIA 603-C:2004, using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**Bandwidth 20 dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**Radiation Interference:** The test procedure used was ANSI/TIA 603-C:2004, using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.


## RF POWER OUTPUT

**Rule Part No.:** Part 2.1046(a), Part 90

### Test Requirements:

**Method of Measurement:** RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

### Test Setup Diagram:

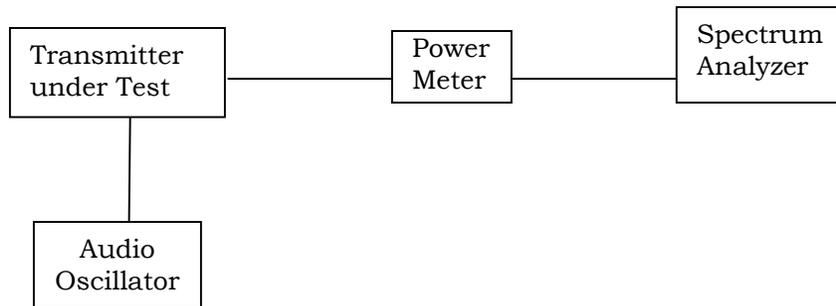

### Test Data:

OUTPUT POWER: HIGH – 110.0 Watts  
LOW - 10.0 Watts

### Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER:  $(13.6V)(4.0A) = 54.4$  Watts  
FOR HIGH POWER SETTING INPUT POWER:  $(13.6V)(14A) = 190.4$ Watts

**MODULATION CHARACTERISTICS**


**Rule Part No.:** Part 2.1047(a)(b)

**Test Requirements:**


**Method of Measurement:**

*Audio frequency response*

The audio frequency response was measured in accordance with ANSI/TIA 603-C:2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

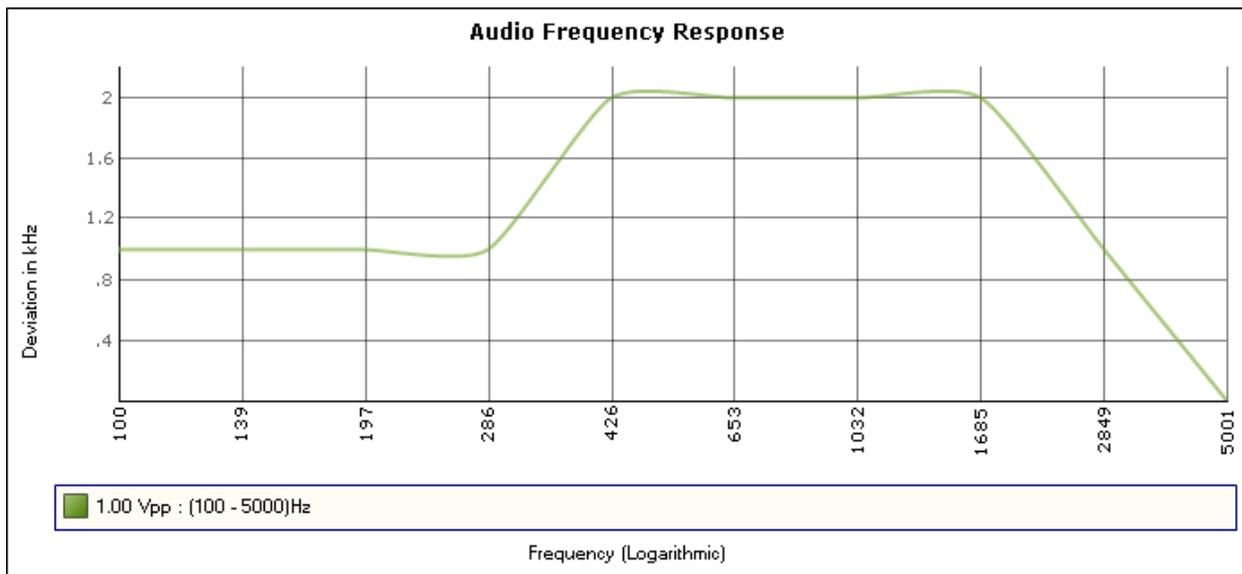

**AUDIO FREQUENCY RESPONSE PLOT 12.5KHz**

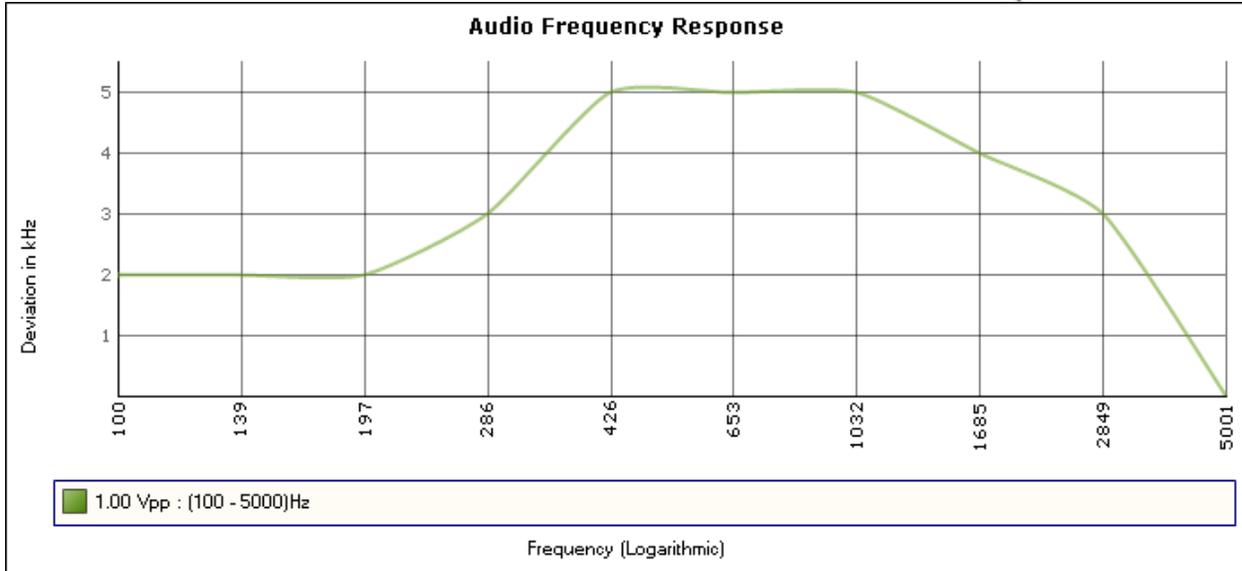

**AUDIO FREQUENCY RESPONSE PLOT 25KHz**


Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc

**VOICE MODULATED COMMUNICATION EQUIPMENT**

**Part 2.1047(a):** For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

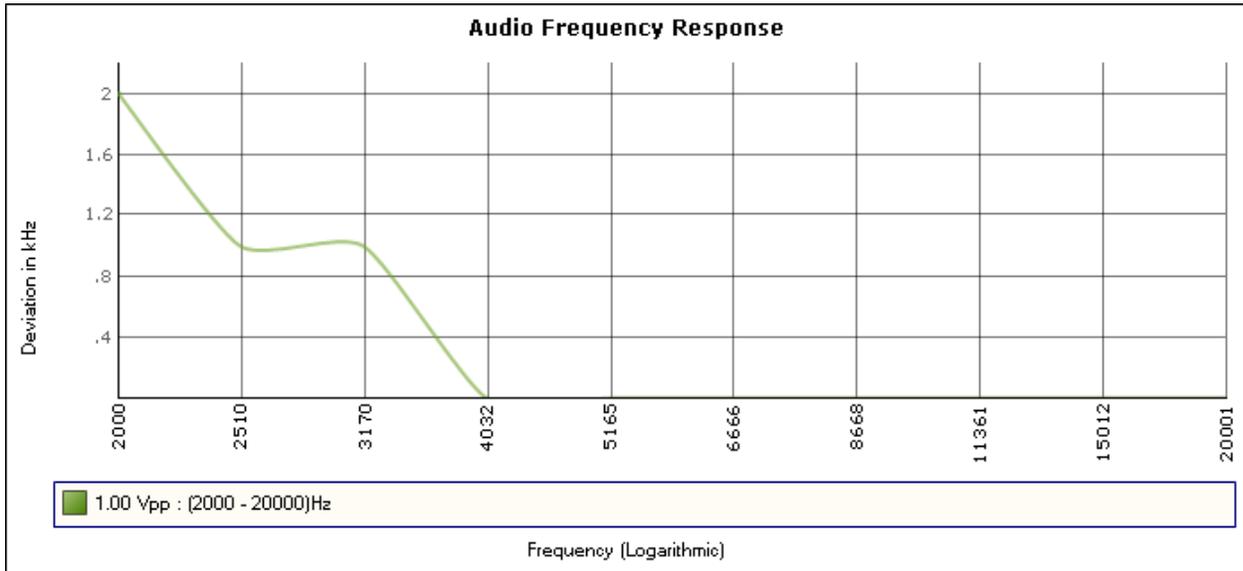

**AUDIO LOW PASS FILTER. Plot 12.5 kHz and 25 kHz**


**AUDIO INPUT VERSUS MODULATION**

**Rule Part No.:** Part 2.1047(b) & 90


**Test Requirements:**

**Method of Measurement:** **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

**Test data:**

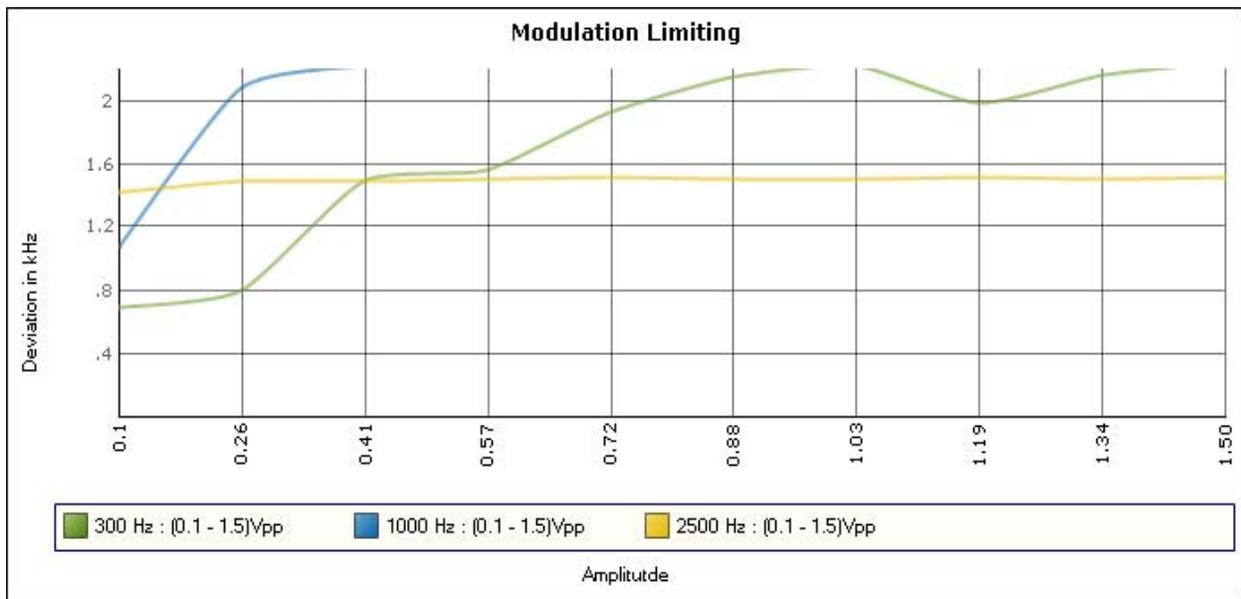

**Modulation Limiting Plot 12.5 kHz**

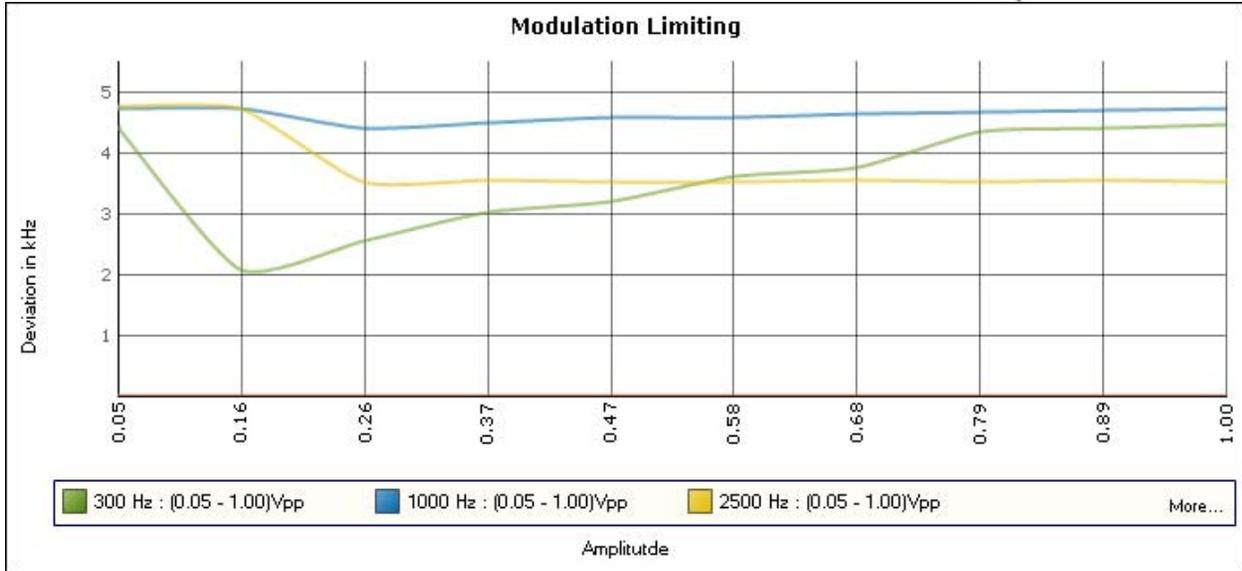

**Modulation Limiting Plot 25 kHz**

## **OTHER MODULATION CHARACTERISTICS**

### **Part 2.1033(c)**

**Part 2.1033(c) (4)** Type of Emission: 11K2F1D

### **Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$   
 $M = B/2 = 9600/2 = 4800$   
 $D = 800$   
 $K=1$

$B_n = 2(4800) + 2(800) = 11.2k$

### **Part 2.1033(c)**

**Part 2.1033(c) (4)** Type of Emission: 11K2F2D

### **Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$   
 $M = B/2 = 9600/2 = 4800$   
 $D = 800$   
 $K=1$

$B_n = 2(4800) + 2(800) = 11.2k$

**Part 2.1033(c) (4)** Type of Emission: 11K0F3E

### **Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$   
 $M = 3000$   
 $D = 2500$   
 $K=1$

$B_n = 2(3000) + 2(2500) = 11.0k$

**Part 2.1033(c) (4)** Type of Emission: 16K0F3E

### **Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$   
 $M = 3000$   
 $D = 5000$   
 $K=1$

$B_n = 2(3000) + 2(5000) = 16.0k$

## OCCUPIED BANDWIDTH

### **Part 2.1049(c)**      EMISSION BANDWIDTH: **Part 90.210(b) 25kHz Channel Spacing**

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + 10\log(P)$ dB.

### **Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter**

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz but not more than 10 kHz: At least  $83 \log(f_d/5)$  dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least  $29 \log(f_d/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least  $43+10 \log(P_0)$ dB.

### **Part 90.210(d)**      **Emission Mask D - 12.5 kHz channel BW equipment.**

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27 (f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10\log(P)$  dB or 70 dB, whichever is the lesser attenuation.


### **Part 90.210(e)**      **Emission Mask E - 6.25 kHz channel BW equipment.**

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3.0 \text{ kHz})$  or  $55 + 10 \log(P)$  or 65, whichever us the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least  $55 + 10\log(P)$  dB or 65 dB, whichever is the lesser attenuation.

**Method of Measurement: ANSI/TIA 603-C: 2004**


**Test Setup Diagram:**

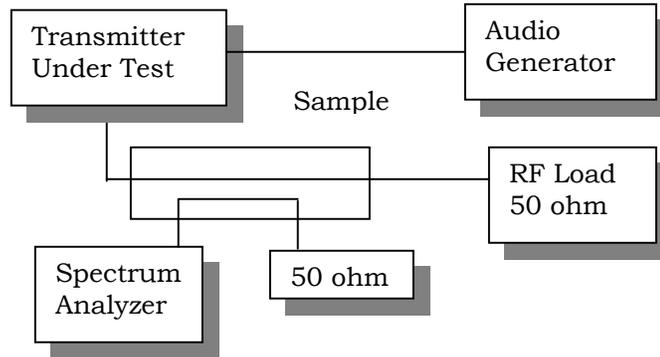

**Test Data:** See the plots below

**NOTES:**

Occupied bandwidth 12.5K

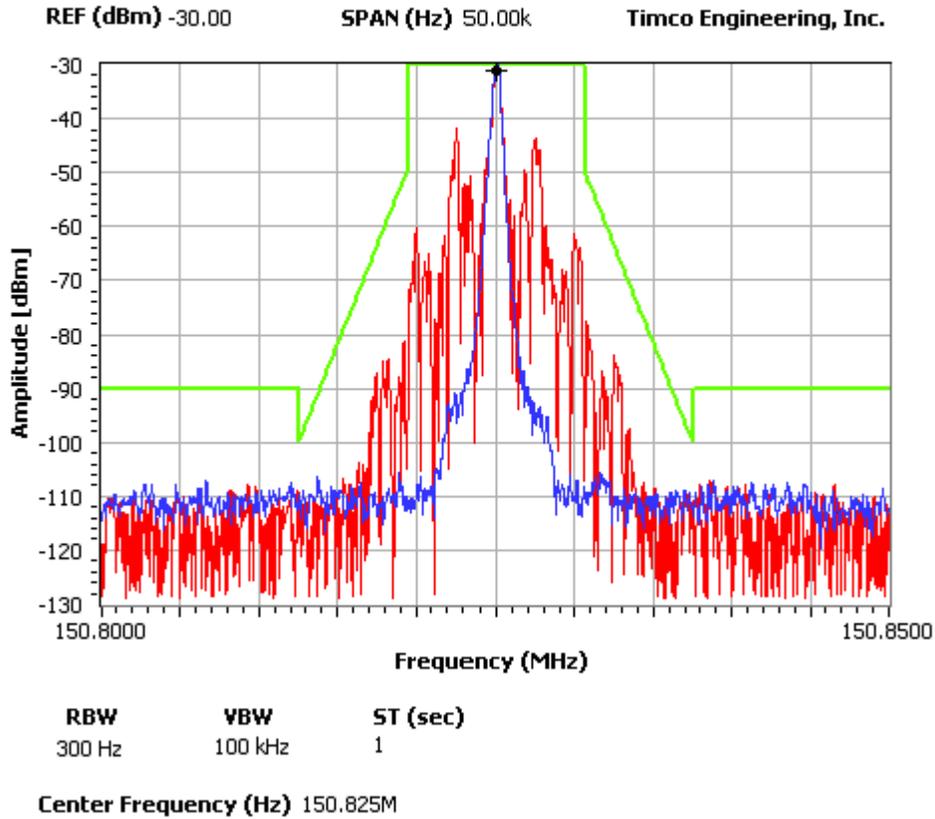

**OCCUPIED BANDWIDTH PLOT 12.5 kHz**


Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc

**NOTES:**

Occupied Bandwidth 25K

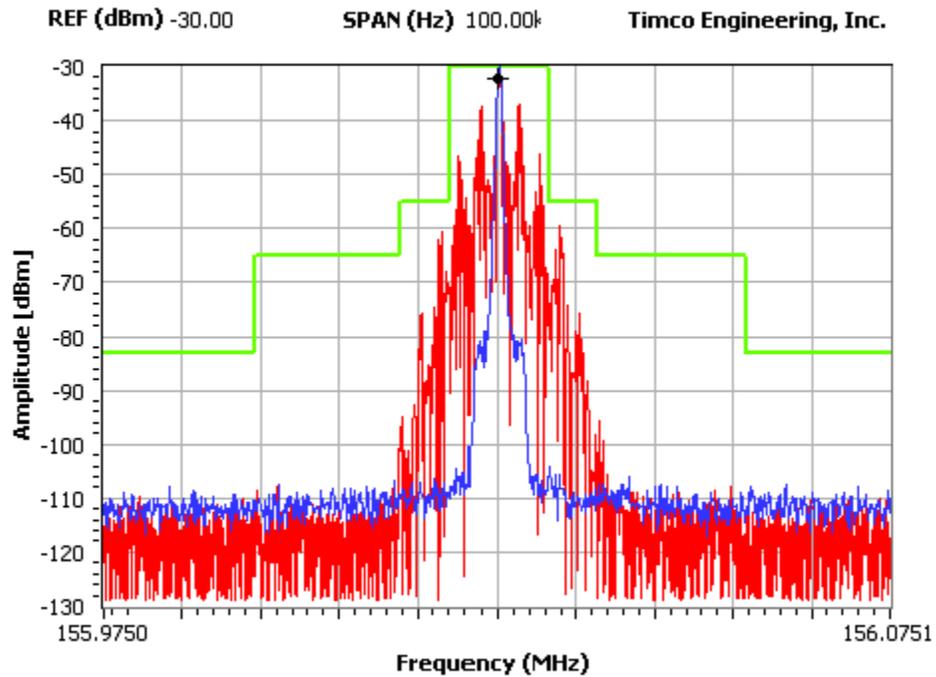

<b>RBW</b>	<b>VBW</b>	<b>ST (sec)</b>
300 Hz	100 kHz	2

Center Frequency (Hz) 156.025M

**OCCUPIED BANDWIDTH PLOT 25 kHz**

Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc



**SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**

**Rule Part No.:** Part 2.1051(a)

**Requirements:** 25kHz Channel Spacing =  $43+10\log(110)$  = 63.41 dBc  
 12.5kHz Channel Spacing =  $50+10\log(110)$  = 70.41 dBc

25kHz Channel Spacing =  $43+10\log(10)$  = 53 dBc  
 12.5kHz Channel Spacing =  $50+10\log(10)$  = 60 dBc

**Method of Measurement:** The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

**Test Data:**

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
136	272	89.9		136	272	70.8
136	408	86		136	408	97.4
136	544.1	118.6		136	544.1	111.8
136	680.1	109		136	680.1	110.3
136	816.1	122.2		136	816.1	
136	952.1	114.2		136	952.1	
136	1088.2	121.8		136	1088.2	
136	1224.2	121		136	1224.2	
136	1360.2	122.1		136	1360.2	

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
155	310	85		155	310	72.6
155	465	87.6		155	465	98.8
155	620.1	121.2		155	620.1	111.5
155	775.1	103.5		155	775.1	108.3
155	930.1	120.3		155	930.1	
155	1085.1	116.1		155	1085.1	
155	1240.2	120.8		155	1240.2	
155	1395.2	119.7		155	1395.2	
155	1550.2	121.2		155	1550.2	

Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc


<b>TF HIGH POWER</b>	<b>EF</b>	<b>dB below carrier</b>		<b>TF LOW POWER</b>	<b>EF</b>	<b>dB below carrier</b>
173.9	347.9	102.7		173.9	347.9	103
173.9	521.9	91		173.9	521.9	97.2
173.9	695.9	119.3		173.9	695.9	110.6
173.9	869.8	109.4		173.9	869.8	110.1
173.9	1043.8	120.3		173.9	1043.8	
173.9	1217.8	119.5		173.9	1217.8	
173.9	1391.8	121		173.9	1391.8	
173.9	1565.7	119.6		173.9	1565.7	
173.9	1739.7	121.8		173.9	1739.7	

Applicant: MIDLAND RADIO CORPORATION

FCC ID: MMA901090

Report: M\MidlandRadio\_MMA\1840AUT8\1840AUT8TestReport.doc

### Method of Measuring Conducted Spurious Emissions

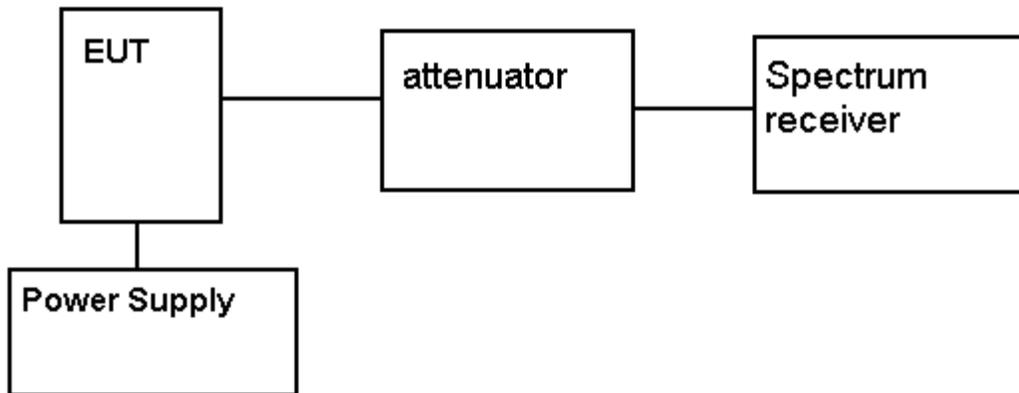

## FIELD STRENGTH OF SPURIOUS EMISSIONS


**Rule Parts. No.:** Part 2.1053

**Requirements:** 25kHz Channel Spacing =  $43+10\log(110) = 63.41$  dBc  
 12.5kHz Channel Spacing =  $50+10\log(110) = 70.41$  dBc

25kHz Channel Spacing =  $43+10\log(10) = 53$  dBc  
 12.5kHz Channel Spacing =  $50+10\log(10) = 60$  dBc

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

**Test Setup Diagram:**

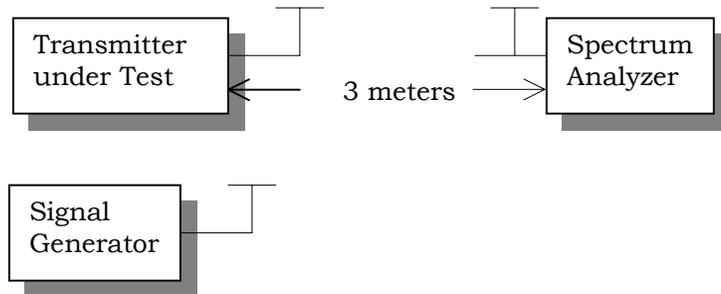

**Test Data:**

HIGH POWER			LOW POWER			
Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
136.00	0	0		136.00	0	0
272.00	V	129.72		272.00	H	116.71
408.00	V	108.30		408.00	H	111.09
544.10	H	113.76		544.10	V	98.85
680.10	V	117.80		680.10	V	110.59
816.10	V	118.34		816.10	H	113.73
952.10	H	119.39				

HIGH POWER

LOW POWER

<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>		<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>
155.00	0	0		155.00		0
310.00	H	119.96		310.00	H	108.05
465.00	H	128.32		465.00	V	116.71
620.10	H	124.38		620.10	H	107.17
775.10	H	115.67		775.10	H	113.66
930.10	H	117.03				

HIGH POWER

LOW POWER

<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>		<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>
173.90	0	0		173.90		0
347.90	V	125.28		347.90	V	114.27
521.90	V	117.56		521.90	V	112.45
695.90	H	118.78		695.90	H	111.77
869.80	V	109.10		869.80	H	109.69

## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 90.213

**Requirements:** Temperature range requirements: -30 to +50° C.  
Voltage Variation +, -15%  
±2.5 PPM

**Method of Measurements:** ANSI/TIA 603-C: 2004.

**Test Data:**

<b>Assigned Frequency (Ref. Frequency) (MHz)</b>		
<b>Temperature (°C)</b>	<b>Frequency (MHz)</b>	<b>Frequency Stability (PPM)</b>
-30	155.025251	1.87
-20	155.024906	-0.35
-10	155.025109	0.95
0	155.025047	0.55
+10	155.025028	0.43
+20	155.025015	0.35
+30	155.024944	-0.11
+40	155.024906	-0.35
+50	155.024878	-0.54

<b>Assigned Frequency (Ref. Frequency) (MHz)</b>		
<b>% Battery</b>	<b>Frequency (MHz)</b>	<b>Frequency Stability (PPM)</b>
-15%	155.024961	0.00
0	155.024961	
+15%	155.02496	-0.01

## FREQUENCY STABILITY

### Part 90.214 Transient Frequency Behavior

**REQUIREMENTS:** Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

#### Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

$t_1^4$	$\pm 25.0$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 12.5$ kHz	20.0 ms	25.0 ms
$t_3^4$	$\pm 25.0$ kHz	5.0 ms	10.0 ms


#### Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

$t_1^4$	$\pm 12.5$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 6.25$ kHz	20.0 ms	25.0 ms
$t_3^4$	$\pm 12.5$ kHz	5.0 ms	10.0 ms


#### Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

$t_1^4$	$\pm 6.25$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 3.125$ kHz	20.0 ms	25.0 ms
$t_3^4$	$\pm 6.25$ kHz	5.0 ms	10.0 ms




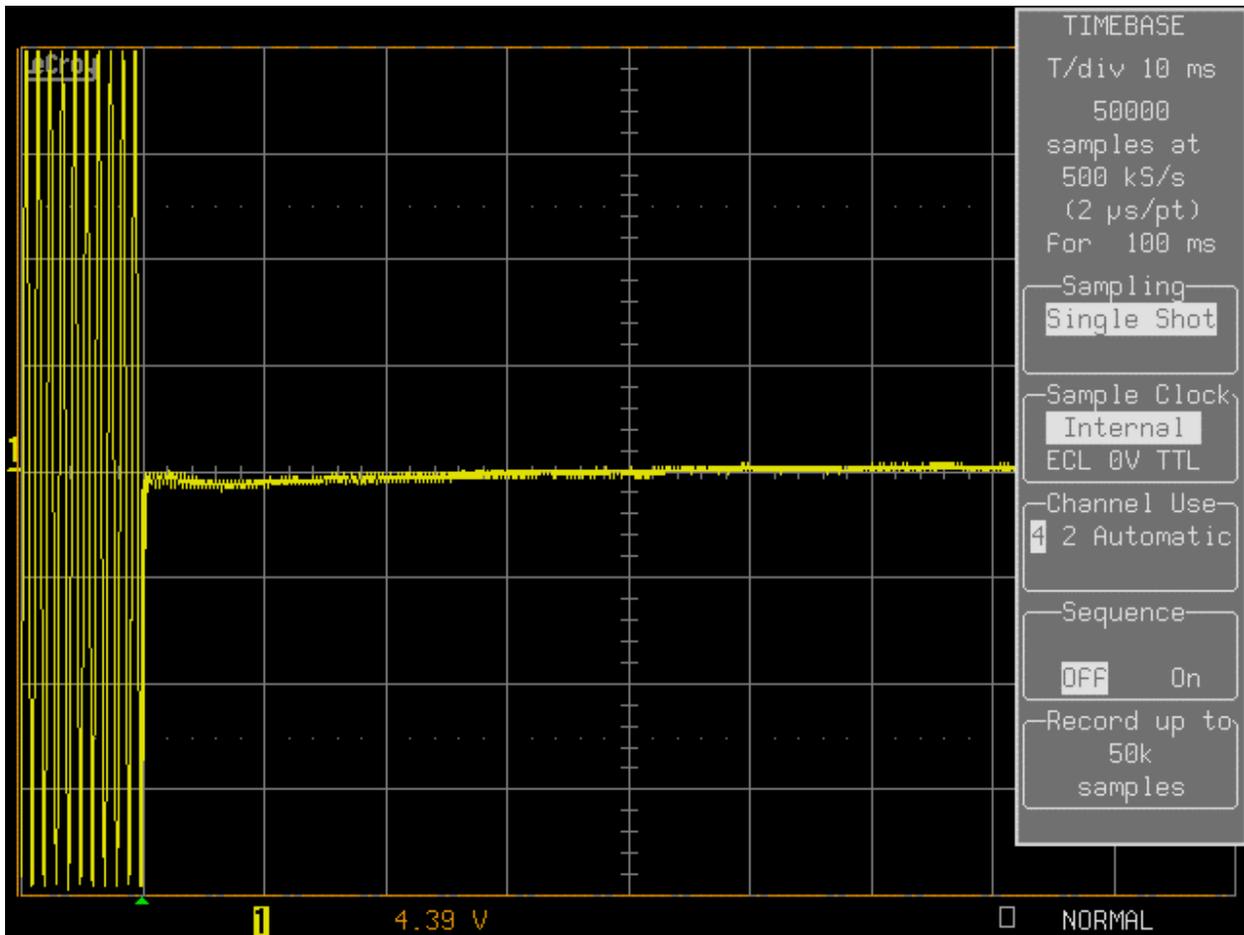


LOW POWER -ON

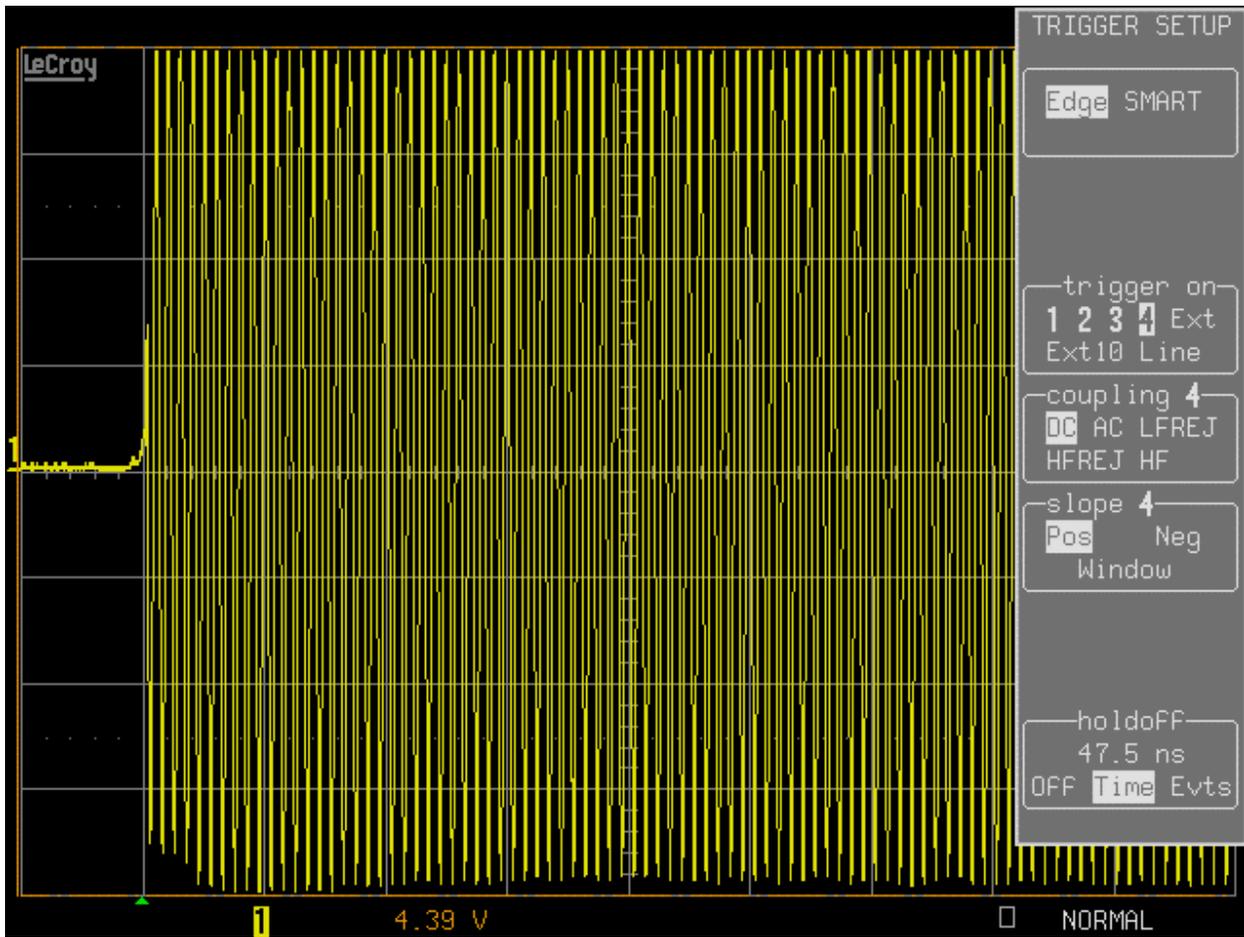

LOW POWER - OFF

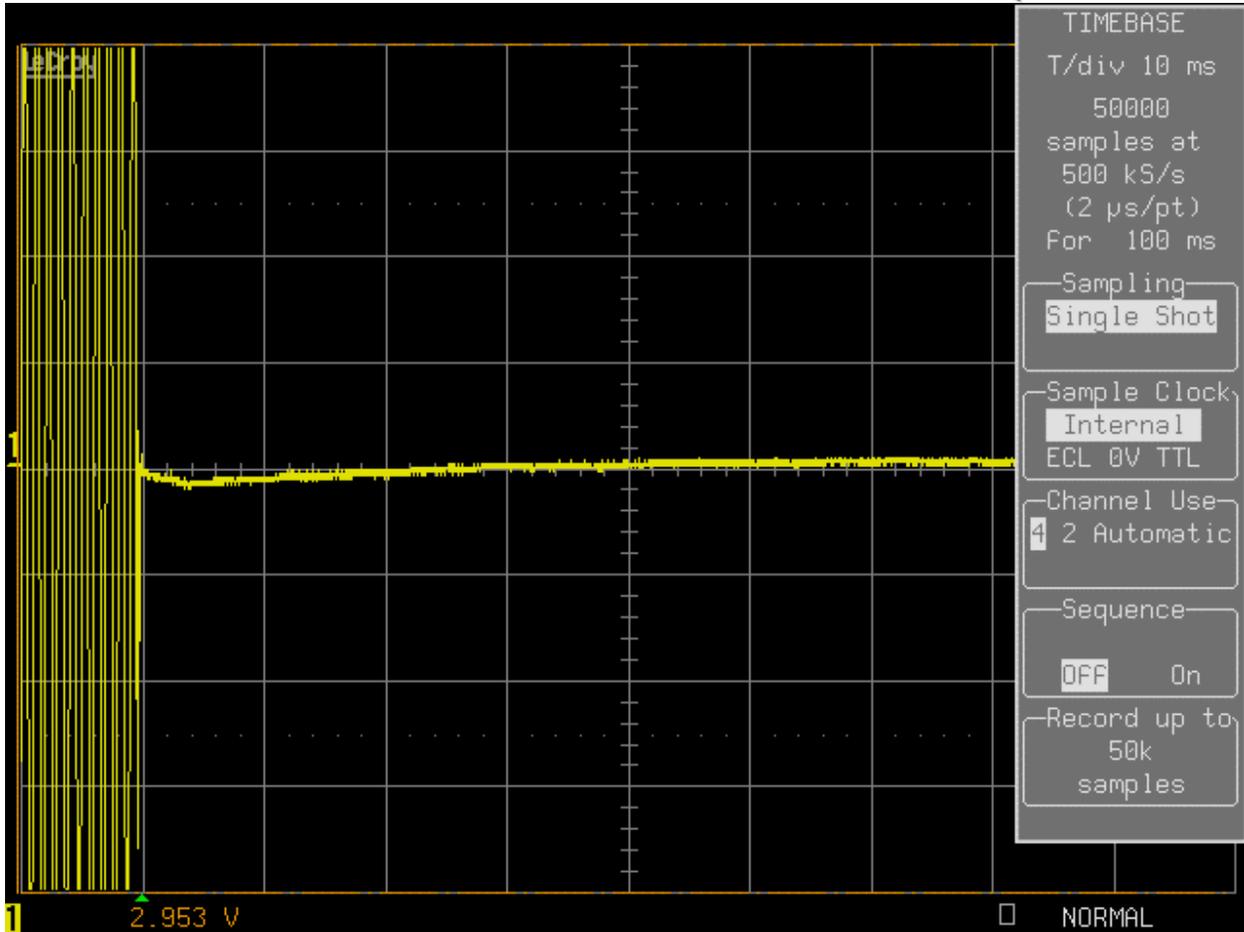

HIGH POWER – ON

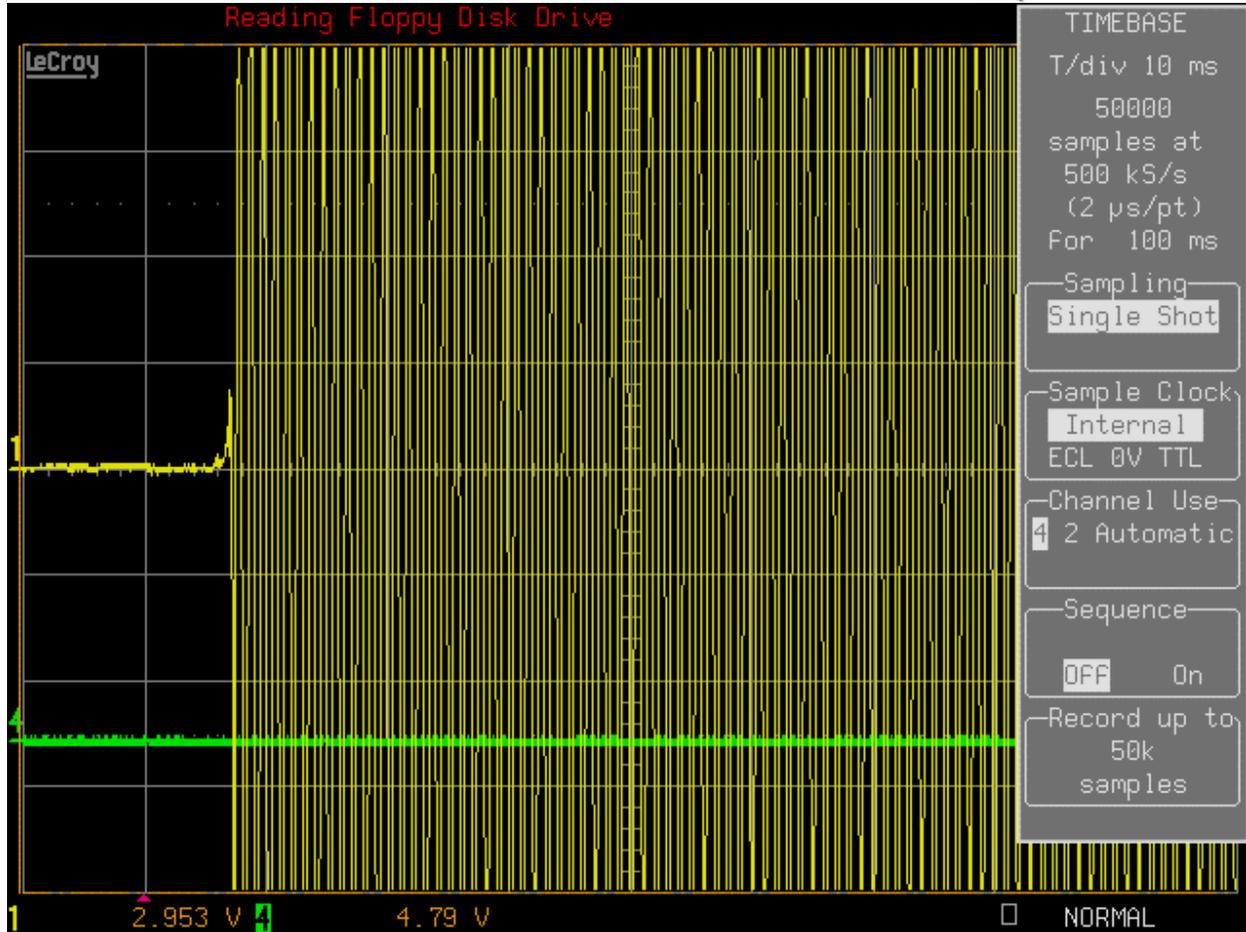

HIGH POWER - OFF