

# **THRUlab & Engineering.**

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net



Test Report

Product Name: GMRS/FRS Combination

MODEL NO:GXT555

FCC ID:MMAGXT555

## **Applicant:**

**Midland Radio Corporation.**

**1120 Clay St. North Kansan City,**

**MO 64116**

**Date Receipt:05/03/2005**

**Date Tested: 05/06/2005**

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thru kang@kornet.net

## TABLE OF CONTENTS LIST

APPLICANT: Midland Radio Corporation.  
FCC ID :MMAGXT555

### TEST REPORT

PAGE 1..... GENERAL INFORMATION & TECHNICAL DESCRIPTION  
PAGE 2..... TECHNICAL DEACRIPTION & RF POWER OUTPUT  
PAGE 3..... MOD. CHARACTERISTICS & AUDIO FREQUENCY RESPONSE GRAPH  
PAGE 4..... MODULATION LIMITING GRAPH - 300 Hz  
PAGE 5..... MODULATION LIMITING GRAPH - 1000 Hz & 2500 Hz  
PAGE 6..... AUDIO LOW PASS FILTER GRAPH  
PAGE 7..... OCCUPIED BANDWIDTH  
PAGE 8..... OCCUPIED BANDWIDTH PLOT  
PAGE 9..... SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 10.....UNWANTED RADIATION - GMRS  
PAGE 11.....UNWANTED RADIATION - FRS  
PAGE 12.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 13.....FREQUENCY STABILITY  
PAGE 14....LIST OF EMC TEST EQUIPMENT

### EXHIBITS CONTAINING:

EXHIBIT 1.... FCC ID LABEL SAMPLES  
EXHIBIT 2.... LABEL LOCATION  
EXHIBIT 3.... EXTERNAL PHOTOGRAPHS  
EXHIBIT 4.... INTERNAL PHOTOGRAPHS  
EXHIBIT 5.... BLOCK DIAGRAM  
EXHIBIT 6.... SCHMATICS  
EXHIBIT 7.... USER'S MANUAL  
EXHIBIT 8.... THEORY OF OPERATION  
EXHIBIT 9.... ALIGNMENT PROCEDURE  
EXHIBIT 10... PARTS LIST  
EXHIBIT 11... TEST SET UP PHOTO

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thru kang@kornet.net

## GENERAL INFORMATION REQUIRED FOR CERTIFICATION

2.1033 (c) (1) (2) MidLand Radio Corporation. will manufacture  
the FCCID: MMAGXT555 GMRS/FRS COMBINATION TRANSCEIVER  
in quantity, for use under FCC RULES PART 95.  
MidLand Radio Corporation.  
1120 Clay St.  
North Kansas City, MO 64116

2.1033 (c) TECHNICAL DESCRIPTION

2.1033 (c) (3) Instruction book. A draft copy of the instruction  
manual is included as EXHIBIT 7.

2.1033 (c) (4) Type of Emission : 10K5F3E  
95.631  
Bn = 2M + 2DK  
M = 3000  
D = 2.25k  
Bn = 2(3000) + 2(2250) = 10.5k  
GMRS Frequency Range : 20.0kHz

2.1033 (c) (5) GMRS Frequency Range:  
95.621

1. 462.5500	13. 462.7000
2. 462.5625	14. 462.7125
3. 462.5750	15. 462.7250
4. 462.5875	16. 467.5500
5. 462.6000	17. 467.5750
6. 462.6125	18. 467.6000
7. 462.6250	19. 467.6250
8. 462.6375	20. 467.6500
9. 462.6500	21. 467.6750
10. 462.6625	22. 467.7000
11. 462.6750	23. 467.7250
12. 462.6875	

FRS Authorized Bandwidth:12.5kHz

2.1033(c)(5) FRS Frequency Range:  
95.627

1. 462.5625	8. 467.5625
2. 462.5875	9. 467.5875
3. 462.6125	10. 467.6125
4. 462.6375	11. 467.6375
5. 462.6625	12. 467.6625
6. 462.6875	13. 467.6875
7. 462.7125	14. 467.7125 MHz

2.10311c)(6)(7) RF power is measured by the substitution method as  
2.1046(a) outlined in TIA/EIA - 603. With a nominal battery  
voltage of 6V, and the transmitter properly  
adjusted the RF output measures:  
power supply : Romet batteries (1.5VDC) 4


GMRS (HIGH) - 1.549 Watts  
GMRS (LOW) - 0.148 Watts  
FRS - 0.198 Watts

APPLICANT : Midland Radio Corporation.  
FCC ID : MMAGXT555  
REPORT : THRU-505006  
Pages: 1 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thrukang@kornet.net

- 2.1033(c)(6)(7) FRS Power Output shall not exceed 0.50 Watts effective  
95.639 radiated power. There can be no provisions for  
95.649 Increasing the power or varying the power.
- 2.1033(c)(8) DC Voltages and Current into Final Amplifier:  
FINAL AMPLIFIER ONLY
- FOR GMRS HIGH POWER SETTING INPUT POWER: (6V)(1.610A)=9.66 Watts  
FOR GMRS LOW POWER SETTING INPUT POWER: (6V)(0.480A)=2.88 Watts  
FOR FRS POWER SETTING INPUT POWER: (6V)(0.520A)=3.12 Watts
- 2.1033(c)(9) Tune-up procedure. The tune-up procedure is included  
as EXHIBIT # 9.
- 2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is  
included as EXHIBIT 6 of this report. The block  
diagrams are included as EXHIBIT 5 of this  
report.
- 2.1033(c)(11) A photograph or a drawing of the equipment  
identification label is included as exhibit No. 1.
- 2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient  
clarity to reveal equipment construction and layout,  
including meters, labels for controls, including any  
view under shields. See exhibits 3-4.
- 2.1033(c)(13) Digital modulation is not allowed.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is  
submitted below.
- 2.1046(a) RF power output. The test procedure used was  
TIA/EIA-603.

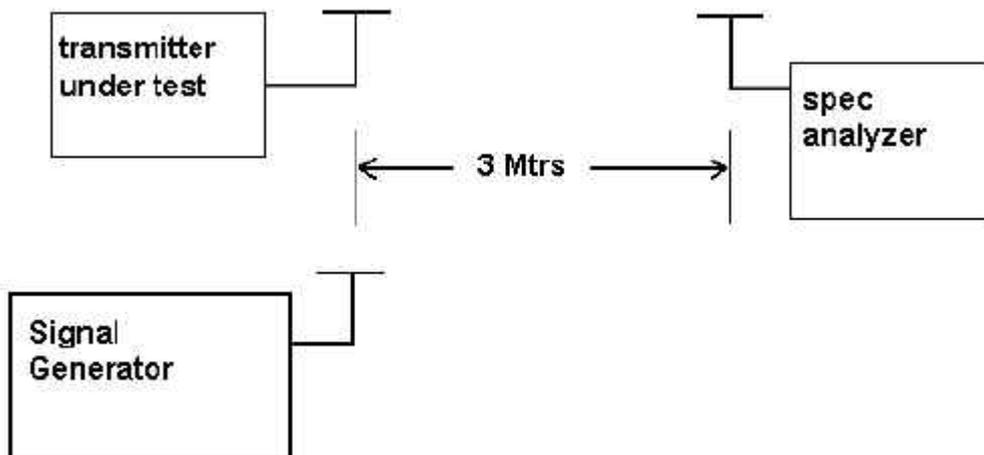

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA


81221095059F81221095056 email thrukang@kornet.net

## 2.1047 (a) (b) Modulation characteristics :

### AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone Circuit and into the microphone connector. The Input required to produce 30 percent modulation Level was measured. See plot below.

AUDIO FREQUENCY RESPONSE PLOT GOES HERE

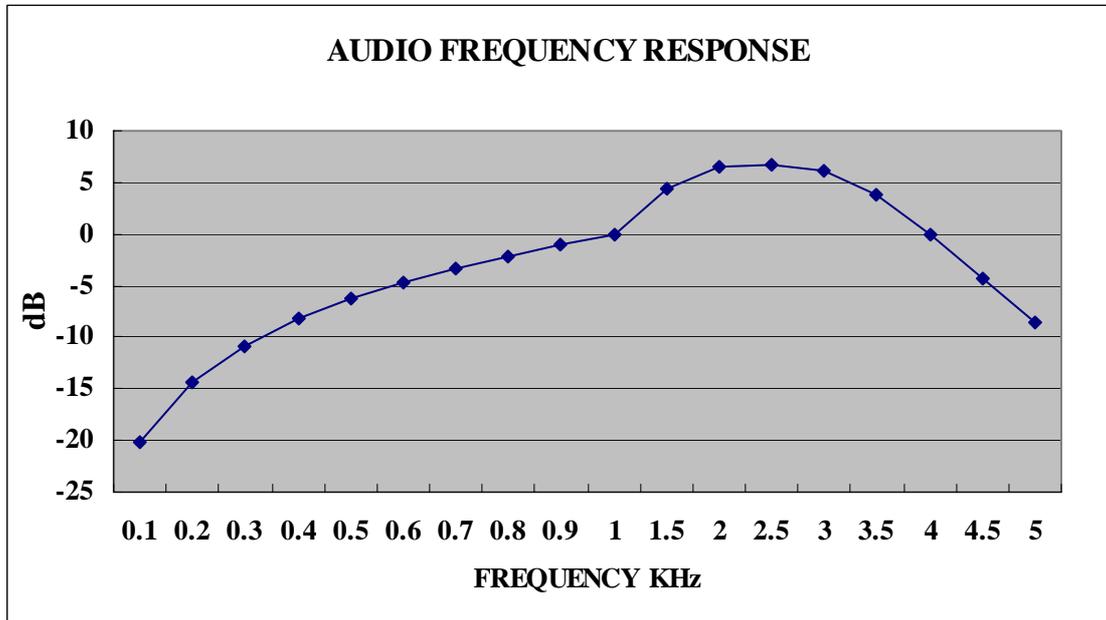

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 3of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thru kang@kornet.net

2.1047 (b)

## Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See Pages 6 and 7 of report.

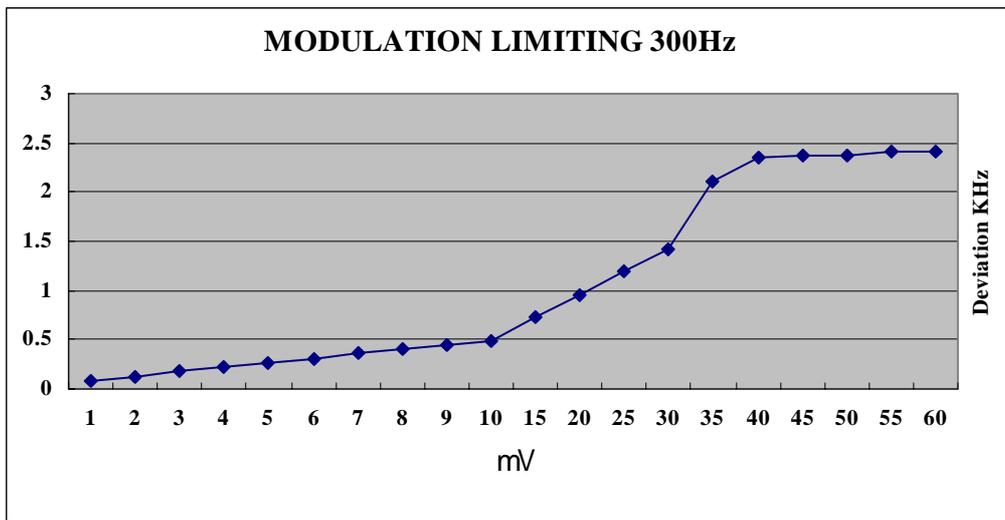

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006



Pages: 4 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thru kang@kornet.net

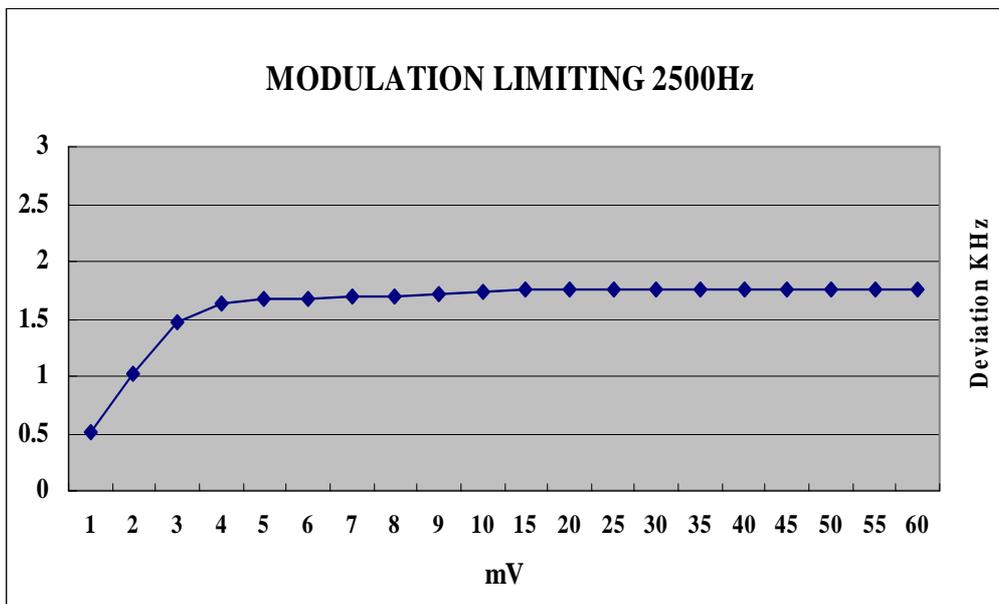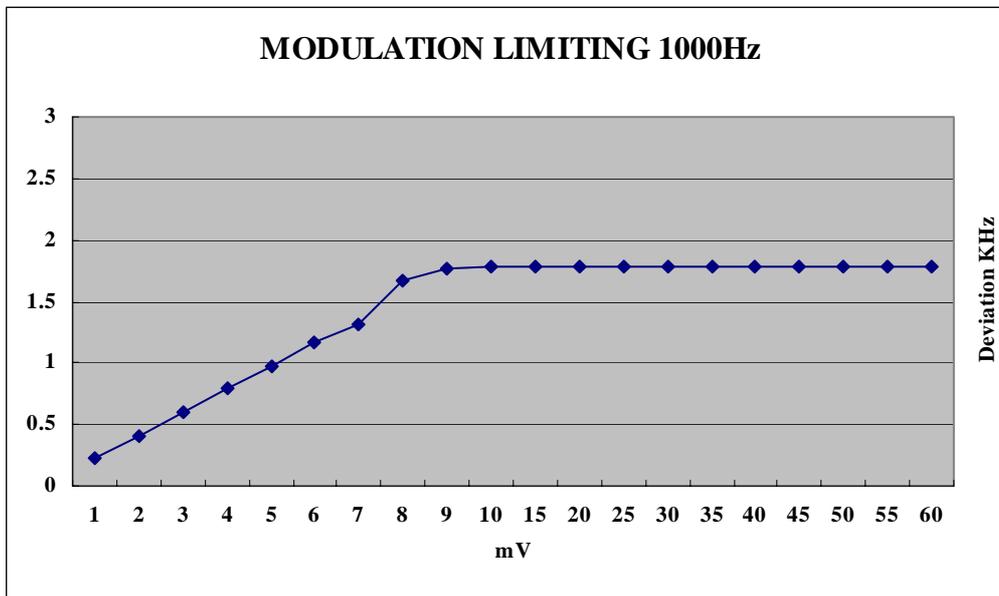

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006


Pages: 5 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thrukang@kornet.net

## AUDIO LOW PASS FILTER GRAPH

95.637 Post Limiter Filter Each GMRS transmitter, except a Mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1KHz. See below.

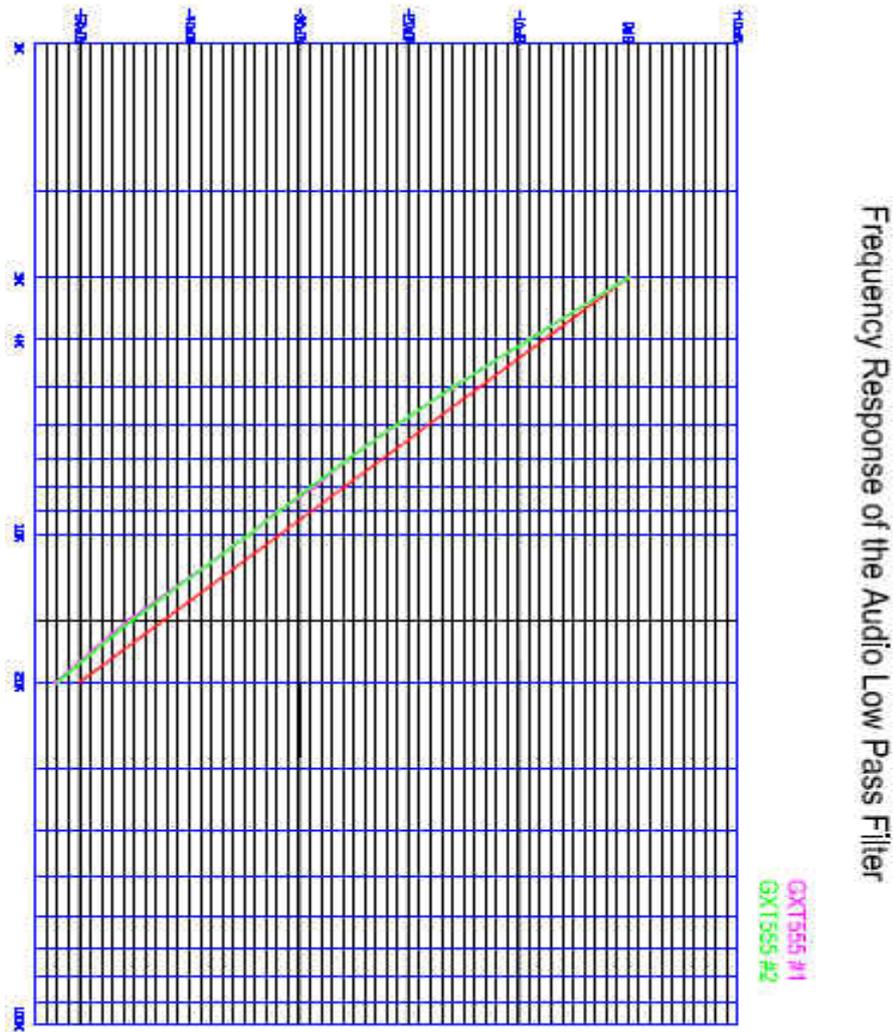

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA


81221095059F81221095056 email thrukang@kornet.net

2.1049 Occupied bandwidth :

95.635 (b) (1) (3) (7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least  $43 + \log_{10}(TP)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See plots on the next 1 pages.

Occupied BW Test Equipment Setup

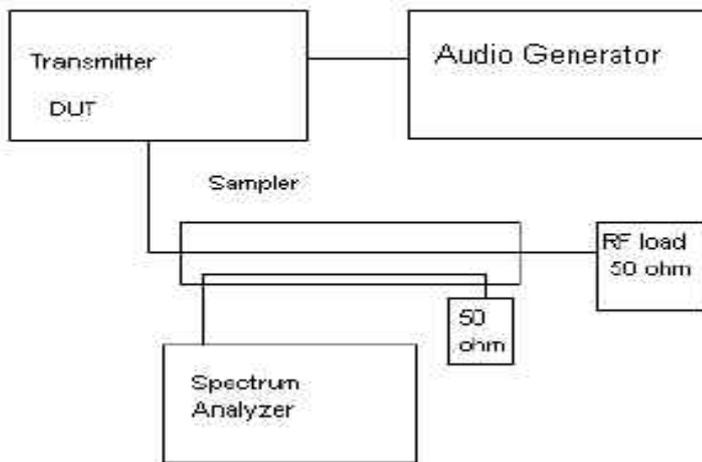

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555


REPORT : THRU-505006

Pages: 7 of 16


# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thrukang@kornet.net

## 15ch GMRS

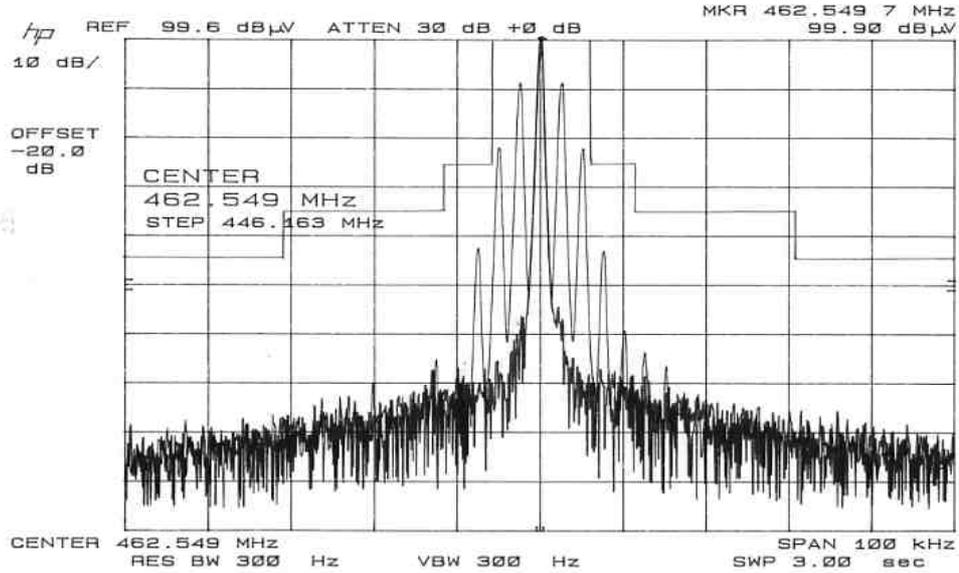

## 8ch FRS

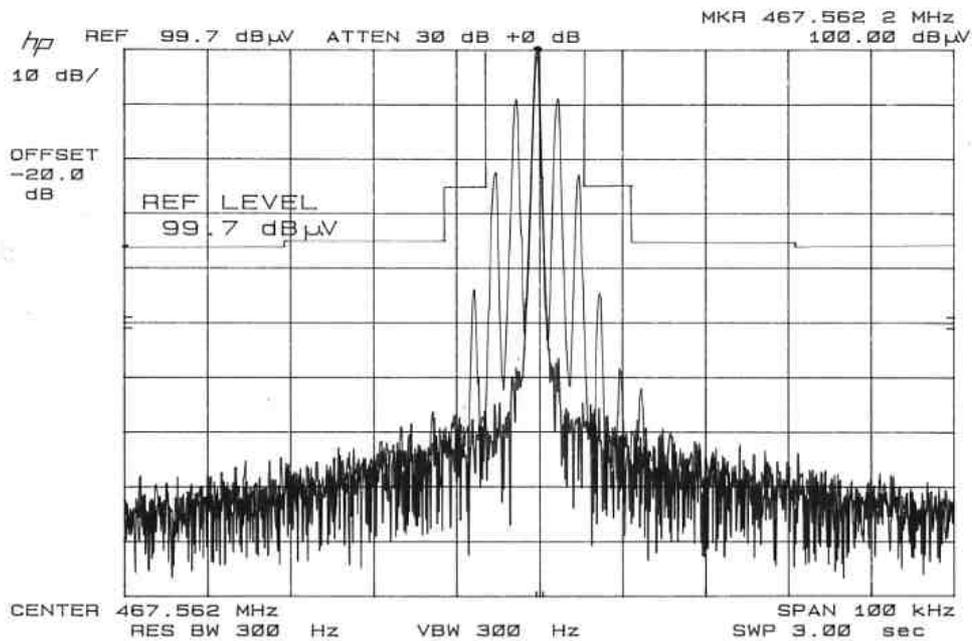

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1051 Spurious emissions at antenna terminals (conducted) :

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIS/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was the fundamental.

spurious Emission at  
antenna Terminals

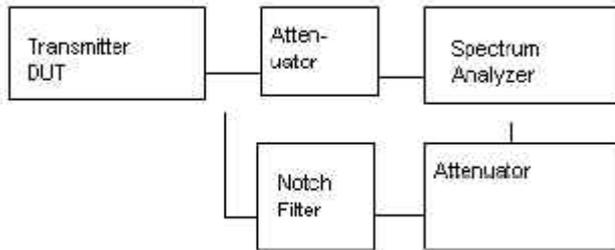

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 9 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
 YONGSAN-GU, SEOUL, KOREA  
 81221095059F81221095056 email thrukang@kornet.net

2.1053  
 95.635 (b) (7)

## UNWANTED RADIATION

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

**REQUIREMENTS: GMRS (HIGH):  $43 + 10\log(1.549) = 44.90051\text{dB}$**   
**(LOW) :  $43 + 10\log(0.138) = 34.39879\text{dB}$**

Test Data :	GMRS-	High Power	Test Data :	GMRS -	Low Power
Emission Frequency	ATTN dBc	Margin dB	Emission Frequency	ATTN dBc	Margin dB
462.55	0.00	0.00	462.55	0.00	0.00
925.10	53.25	8.35	925.10	46.55	12.15
1387.65	48.70	3.80	1387.65	45.50	11.10
1850.20	73.17	28.27	1850.20	58.57	24.17
2312.75	61.25	16.35	2312.75	49.45	15.05
2775.30	71.57	26.67	2775.30	62.07	27.67
3237.85	71.20	26.29	3237.85	60.60	26.19
3700.40	70.36	25.46	3700.40	60.06	25.66
4162.95	67.89	22.98	4162.95	57.29	22.88
4625.50	66.31	21.41	4625.50	56.51	22.11

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 389 JeAm-Rhi HyangNam-Myun ,HwaSung-Shi ,KyoungKi-Do Korea.

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1053

UNWANTED RADIATION:

95.635 (b) (7)

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

**REQUIREMENTS: FRS:  $43 + 10\log(0.198) = 35.96665\text{dB}$**

Test Data :	FRS	
Emission Frequency	ATTN dBc	Margin dB
467.56	0.00	0.00
935.13	46.95	10.98
1402.69	46.84	10.87
1870.25	58.84	22.86
2337.81	53.39	17.42
2805.38	63.01	27.04
3272.94	62.03	26.06
3740.50	59.71	23.74
4208.06	59.42	23.45
4675.63	57.01	21.03

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 389 JeAm-Rhi HyangNam-Myun, HwaSung-Shi, KyoungKi-Do Korea.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 11 of 16


# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

Method of Measuring Radiated Spurious Emissions

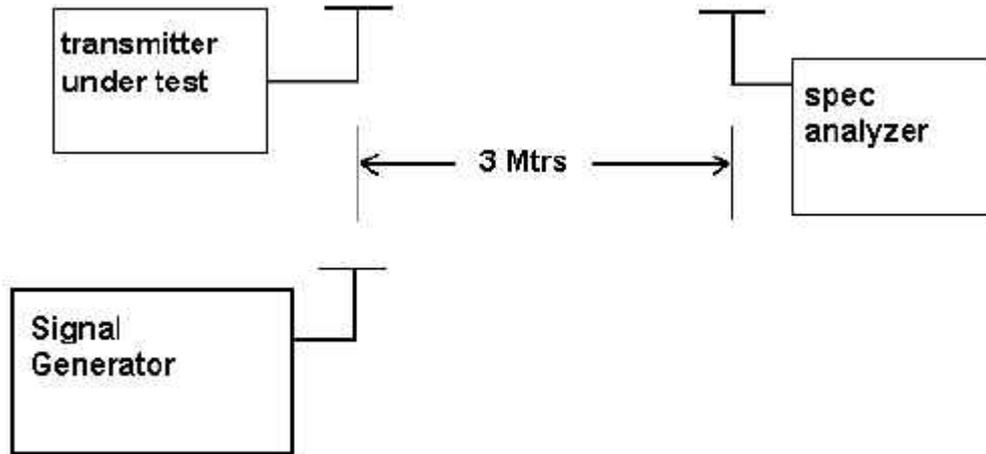

Equipment placed 80 cm above ground

on a rotatable platform.

\* Appropriate antenna raised from 1 to 4 M.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 12 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1055 Frequency stability  
95.621 (b)

Temperature and voltage tests were performed to verify that The frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows : The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to - 30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Reading were also taken at the end point of the battery voltage of 6 V/dc

## MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency) : 462.5500

TEMPERATURE	FREQUENCY (MHz)	ppm	LIMIT (ppm)
REFERENCE	462.55000	0	
-30	462.54780	-4.76	5.0
-20	462.54924	-1.64	2.5
-10	462.54998	-0.04	2.5
0	462.55041	0.89	2.5
10	462.55010	0.22	2.5
20	462.54959	-0.89	2.5
30	462.54974	-0.56	2.5
40	462.54940	-1.30	2.5
50	462.54975	-0.54	2.5
END POINT OF BATTERY:4.3V	462.54935	-1.41	2.5

Note: This EUT meets the frequency stability requirement for a FRS: +/-2.5ppm over temp range of -20 degrees C to + 50 degrees C. It also meets the GMRS frequency stability requirements : +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 13of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thru kang@kornet.net

## EMC Equipment List

DEVICE	MODEL	MFGR	SERNO	DUE . CAL
EMI Test Receiver	ESVS 10	Rohde & Schwarz	830489/001	2006.04.23.
Spectrum Analyzer	8566B	Hewlett Packard	2311A02394	2006.04.23
Spectrum Display	85662A	Hewlett Packard	2542A12429	2006.04.23.
Quasi-Peak Adapter	85650A	Hewlett Packard	2521A00887	2006.04.23.
RF Preselector	85685A	Hewlett Packard	2648A00504	2006.04.23
Pre-Amplifier	8449B	Hewlett Packard	3008A00375	2006.04.23.
Pre-Amplifier	8447F	Hewlett Packard	3113A05367	2006.04.23.
Spectrum Monitor	EZM	Rohde & Schwarz	862304/007	2006.04.23.
Bico-Antenna	94455-1	Eaton	977	2007.04.01.
Log-Periodic Antenna	3146	EMCO	2051	2007.04.01.
Dipole Antenna	TDA25/1/2	Electro Metrics	176/200/200	2007.04.01.
Horn Antenna	SAS-571	A.H Systems	414	2007.04.01.
Spectrum Analyzer	R3261C	Advantest	71720189	2006.04.23
LISN	KNW-242	Kyoritsu	8-923-2	2007.04.25.
LISN	8012-50-R-24	Solar	8379121	2007.04.25..
Loop Ant	6507	EMCO	1435	2005.10.06.
Signal Generator	SMS	Rohde & Schwarz	872165/100	2006.04.23.
Modulation Analyzer	8901B	Hewlett Packard	3438A05094	2006.04.23.
Frequency Counter	CMC251	Tektronic	CMC-251TW52489	2006.04.23.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT555

REPORT : THRU-505006

Pages: 14 of 16