

Test Report

SATO Corporation
Printed Pattern Antenna



Model: CLSXR-RFID-SRA COUPLER

Antenna Characteristic Test

Applicant: SATO Corporation
1-207 Onari, Omiya, Saitama, Saitama 330-0852, Japan

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-24140-1

SIGNATURE			
NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	RF Deputy Manager of EMC Lab	Approved Signatory	2024.09.05

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

NAME	RESPONSIBLE FOR	SIGNATURE
Tadahiro Seino	Testing	

DISCLAIMER AND COPYRIGHT

The measurements in this report apply only to the device tested.
In addition, reproduction of any part of the report, except for complete reproduction, is prohibited without written approval from our testing laboratory.
Applicant-provided data that affect the validity of the results are identified in the report.
Our laboratory assumes no responsibility whatsoever for such data.

Table of contents

1	Test Overview	3
1.1	Test Report Revision History	3
1.2	Test Method	3
1.3	Test Period	3
2	Overview of the equipment under test.....	4
2.1	EUT Information	4
2.2	Test Equipment Change History	4
3	Test results	5
3.1	Measurement data	5
3.2	Measurement results	6
4	Measuring equipment	25
5	Antenna Position	26
6	Measurement environment.....	27

1 Study Overview

1.1 Test report revision history

Document Number	Change history	Issue date
JPD-TR-24140-0	First Edition	22-July-2024
JPD-TR-24140-1	Added test frequencies for antenna characteristic tests (Additional frequencies: 865MHz, 866.5MHz, 868MHz)	See cover page

1.2 Test Method

Conducted using temporary test method JPD_W_07.069J.

1.3 Test period

11-July-2024 - 12-July-2024 : (902MHz, 915MHz, 928MHz)
2-September-2024 - 3-September-2024 : (865MHz, 866.5MHz, 868MHz)

2 Overview of the equipment under test

2.1 EUT information

Applicant	SATO Corporation 1-207 Onari, Omiya, Saitama, Saitama 330-0852, Japan
Test equipment	Printed Pattern Antenna
Measurement frequency	865 MHz, 866.5 MHz, 868 MHz 902MHz, 915MHz, 928MHz

2.2 Change history of the EUT

The following is a history of changes made to the EUT during this test project:

Modification State	Modification details	Change Maker	Change implementation date
Model: CLSXR-RFID-SRA COUPLER Serial Number: H04336200			
0	As supplied by the applicant	Not Applicable	Not Applicable

3 Test Results

3.1 Measurement data

Date of Test : 11-July-2024
Climatic condition : 22.9°C 64.3%
Test place : 3 m Semi-Anechoic Chamber Measurement by : Tadahiro Jono

Date of Test : 12-July-2024
Climatic condition : 23.6°C 64.8%
Test place : 3 m Semi-Anechoic Chamber Measurement by : Tadahiro Jono

Date of Test : 2-September-2024
Climatic condition : 21.3°C 62.4%
Test place : 3 m Semi-Anechoic Chamber Measurement by : Tadahiro Jono

Date of Test : 3-September-2024
Climatic condition : 22.3°C 68.2%
Test place : 3 m Semi-Anechoic Chamber Measurement by : Tadahiro Jono

3.2 Measurement results

3.2.1 Antenna gain

865MHz, 866.5MHz, 868MHz

Frequency	Position 1		Position 2		Position 3	
	Horizontal (H side)	Vertical (Side E)	Horizontal (H side)	Vertical (Side E)	Horizontal (H side)	Vertical (Side E)
865MHz	-26.38	-30.68	-27.50	-30.19	-29.39	-33.39
866.5MHz	-26.59	-30.71	-27.71	-30.48	-29.28	-33.50
868MHz	-26.34	-31.09	-26.96	-29.92	-29.23	-33.26

: MAX GAIN

Half-Power Beamwidth

Position	Position 1		Position 2		Position 3	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
865MHz	34	30	38	46	50	73
866.5MHz	30	30	38	51	48	45
868MHz	32	31	34	48	50	49

902MHz, 915MHz, 928MHz

Frequency	Position 1		Position 2		Position 3	
	Horizontal (H side)	Vertical (Side E)	Horizontal (H side)	Vertical (Side E)	Horizontal (H side)	Vertical (Side E)
902MHz	-26.56	-31.27	-27.91	-29.10	-29.76	-29.32
915MHz	-27.21	-32.02	-27.95	-31.93	-31.31	-30.31
928MHz	-27.99	-32.58	-28.86	-30.77	-31.86	-30.73


: MAX GAIN

Half-Power Beamwidth


Position	Position 1		Position 2		Position 3	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
902MHz	25	46	25	33	25	37
915MHz	26	43	22	63	29	25
928MHz	26	55	26	49	36	27

3.2.2 Antenna Pattern **Position 1**

865MHz

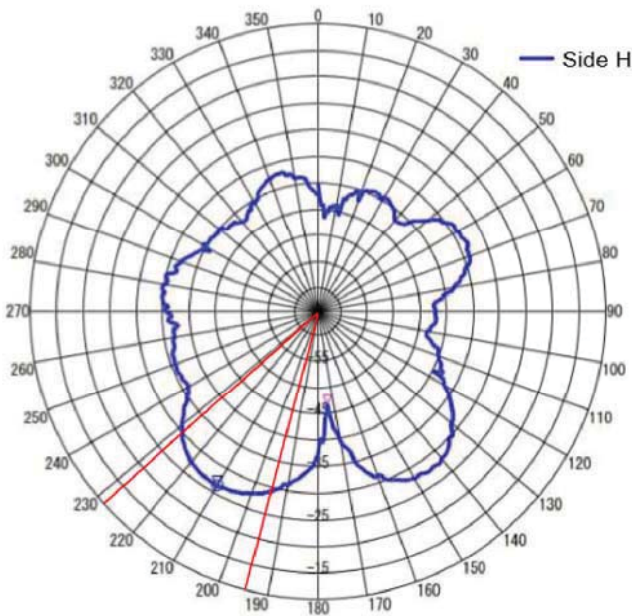


Side H Half-Power Beamwidth
34 degrees

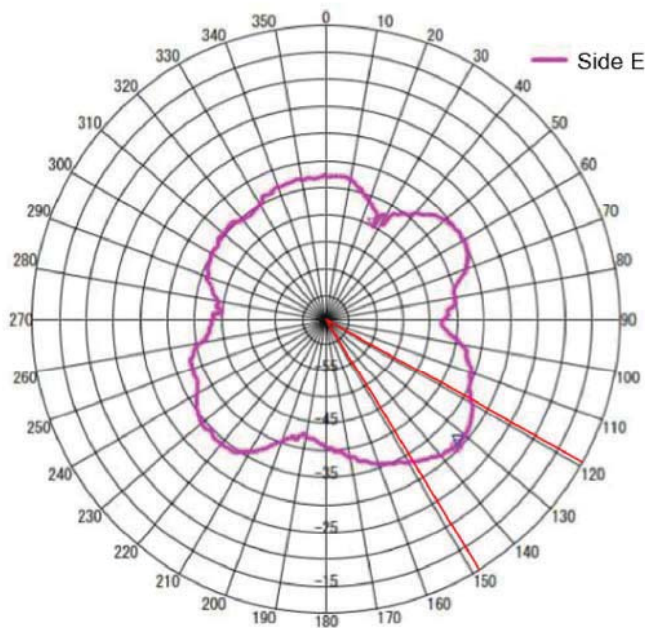


Side E Half-Power Beamwidth
30 degrees

866.5MHz

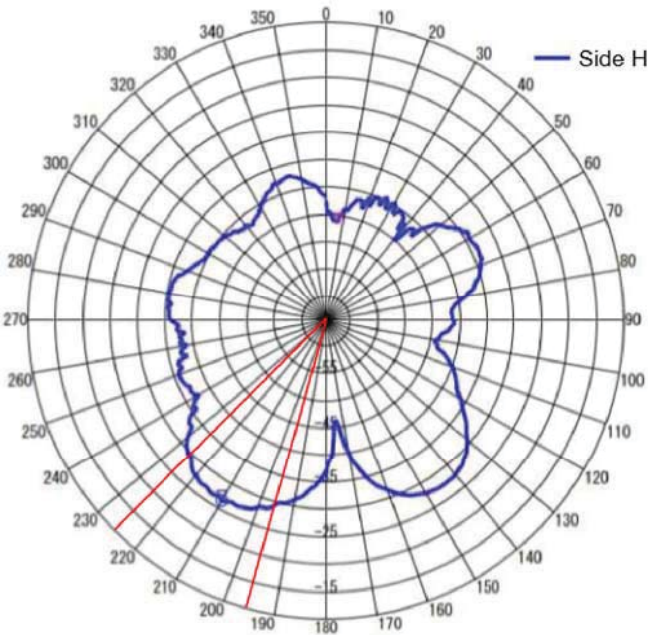


Side H Half-Power Beamwidth
30 degrees

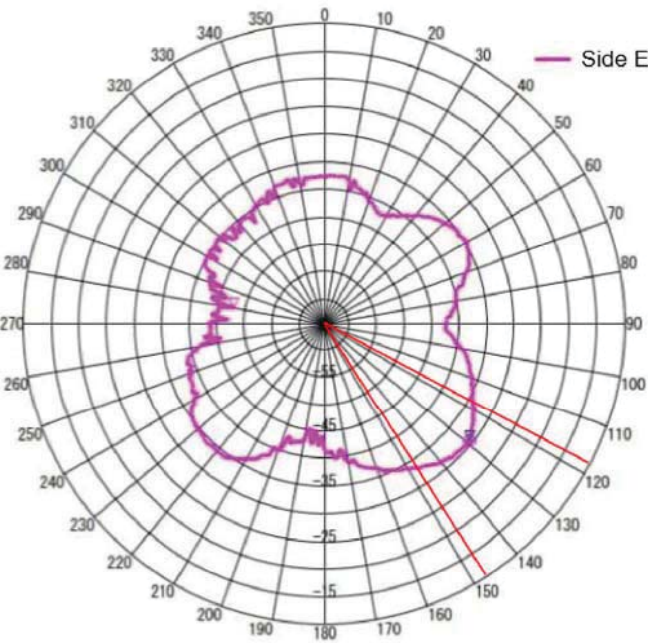


Side E Half-Power Beamwidth
30 degrees



868MHz

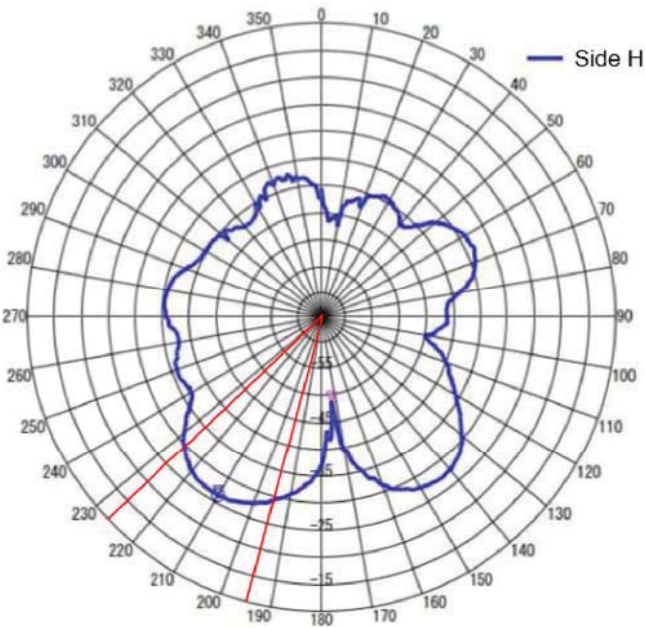


Side H Half-Power Beamwidth
32 degrees

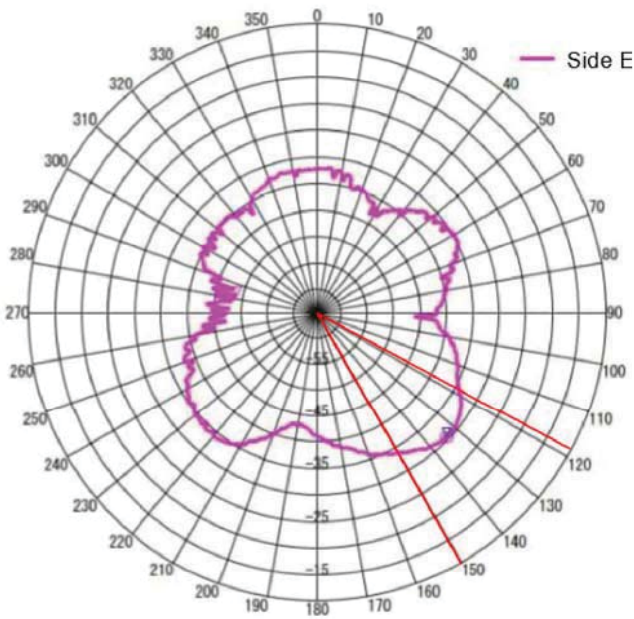


Side E Half-Power Beamwidth
31 degrees

3.2.3 Antenna Pattern **Position 2**

865MHz

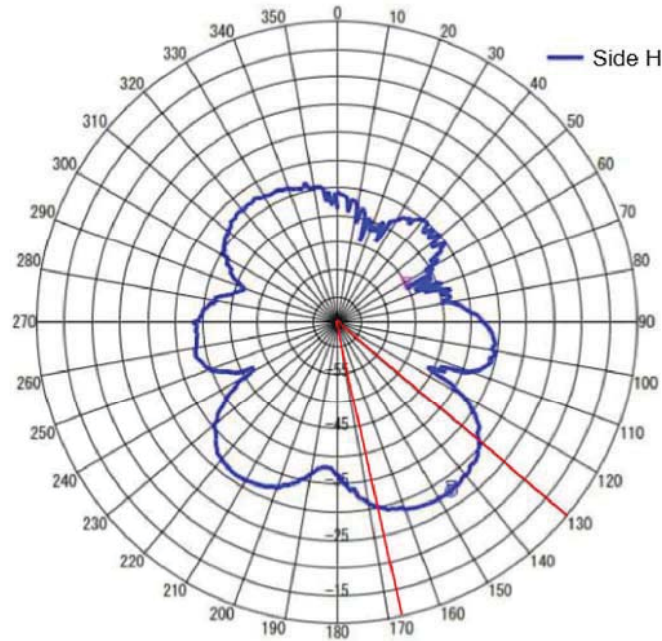


Side H Half-Power Beamwidth
38 degrees

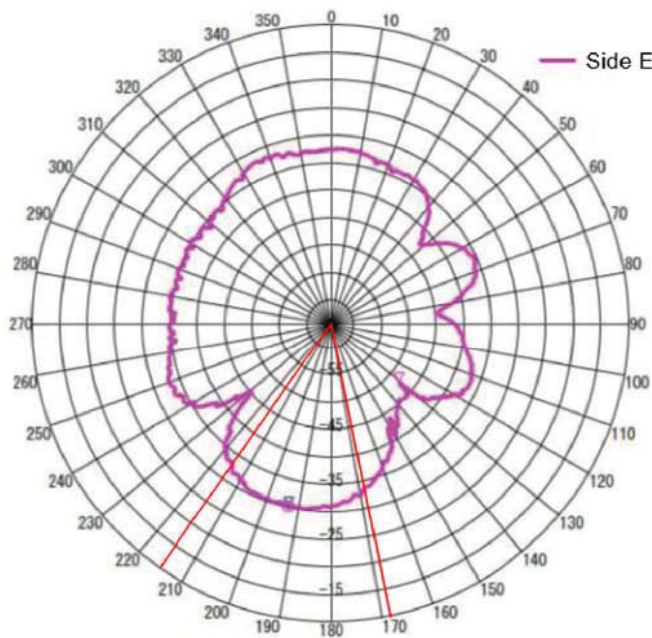


Side E Half-Power Beamwidth
46 degrees



866.5MHz

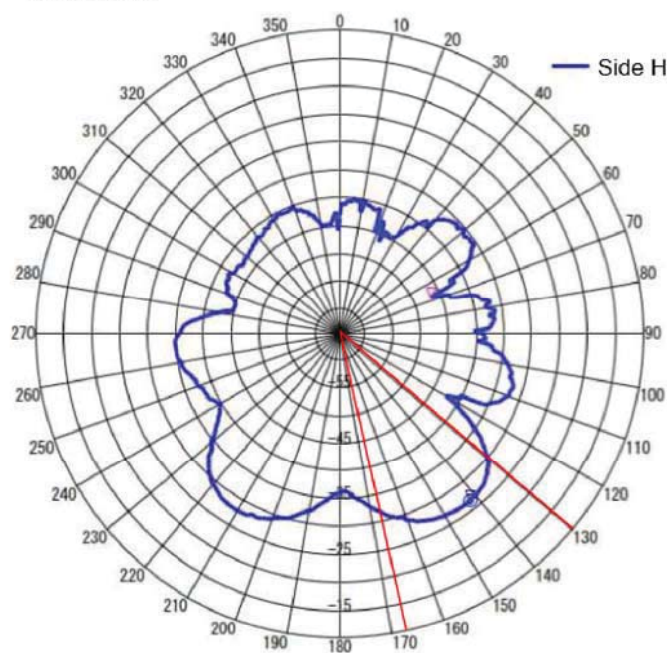


Side H Half-Power Beamwidth
38 degrees

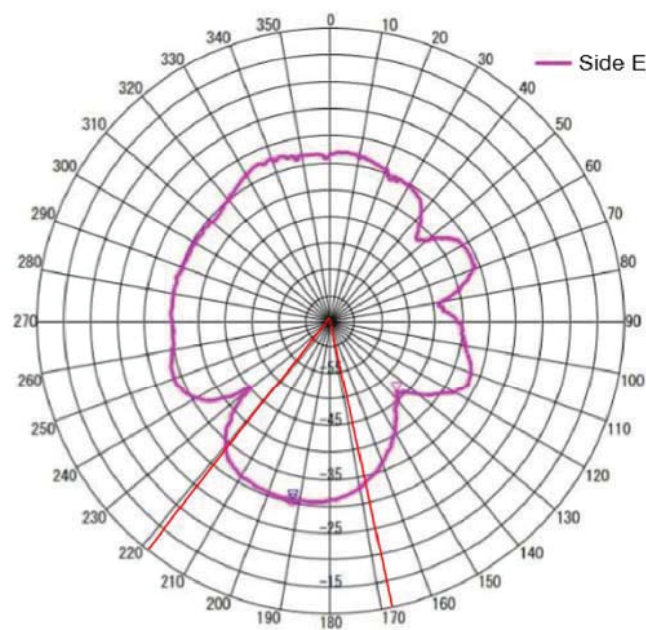


Side E Half-Power Beamwidth
51 degrees

868MHz

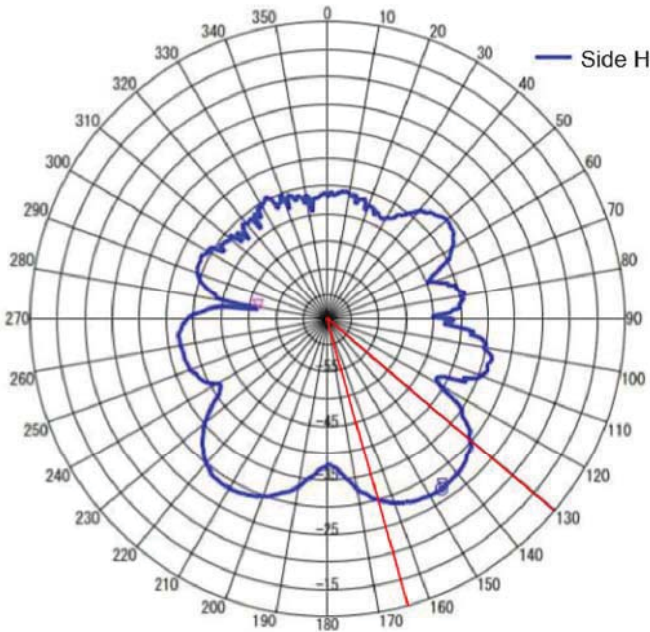


Side H Half-Power Beamwidth
34 degrees

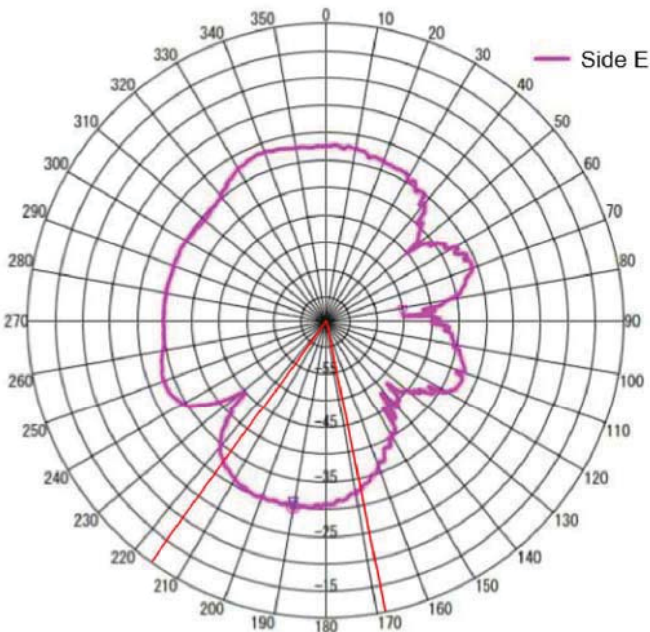


Side E Half-Power Beamwidth
48 degrees

3.2.4 Antenna Pattern **Position 3**

865MHz

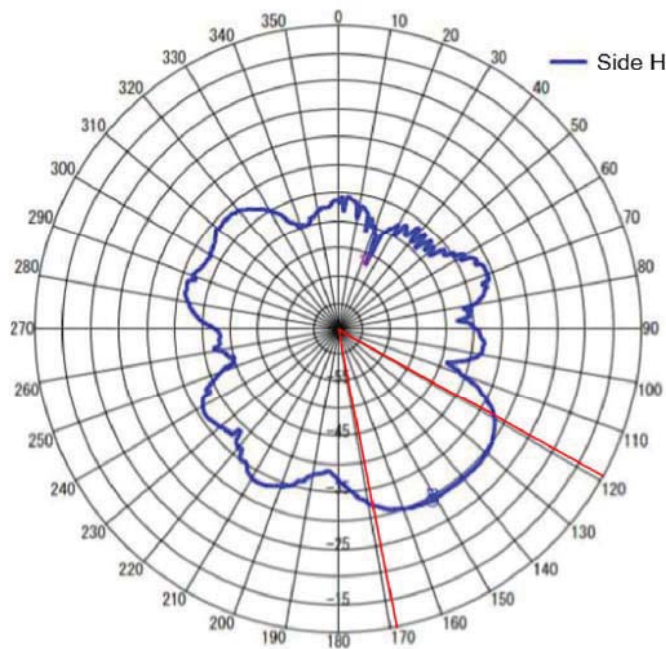


Side H Half-Power Beamwidth
50 degrees

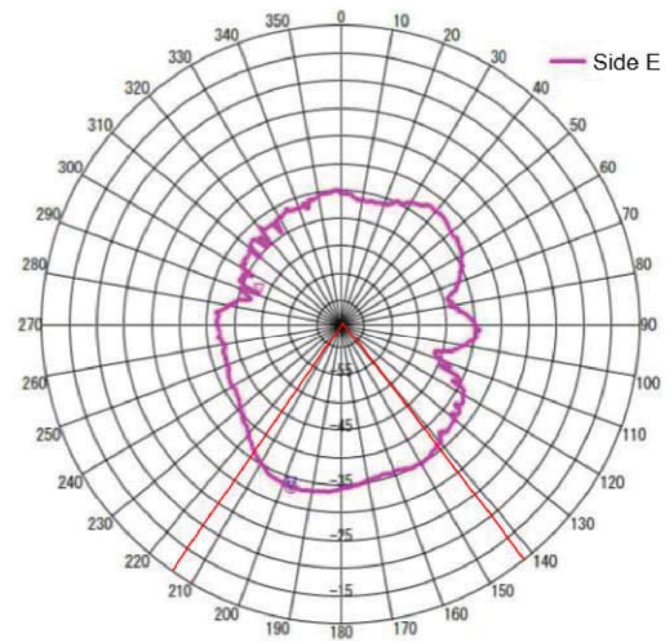


Side E Half-Power Beamwidth
73 degrees



866.5MHz

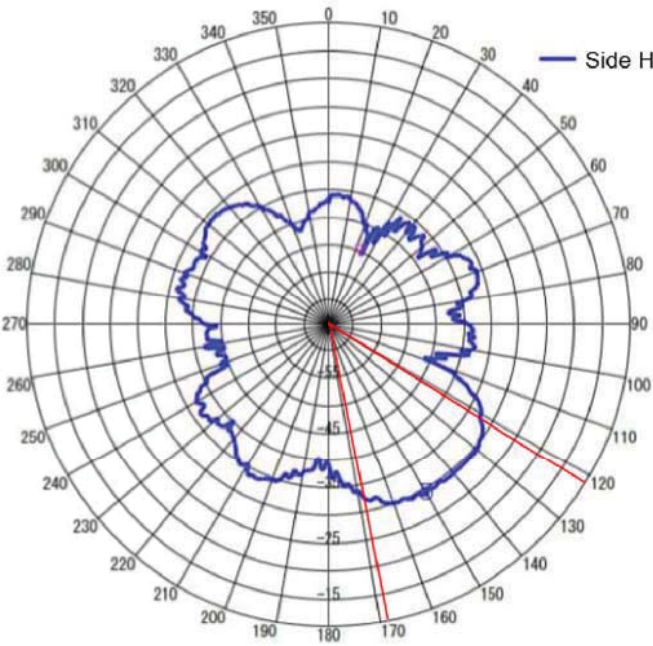


Side H Half-Power Beamwidth
48 degrees

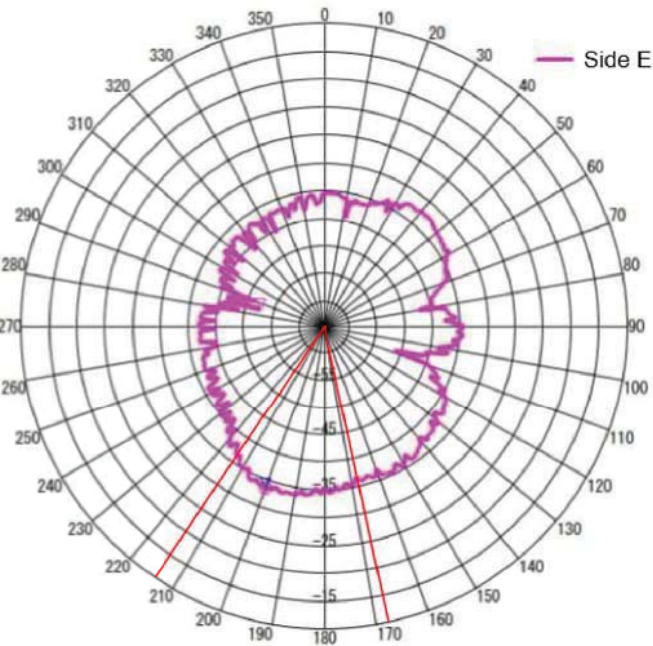


Side E Half-Power Beamwidth
45 degrees



868MHz

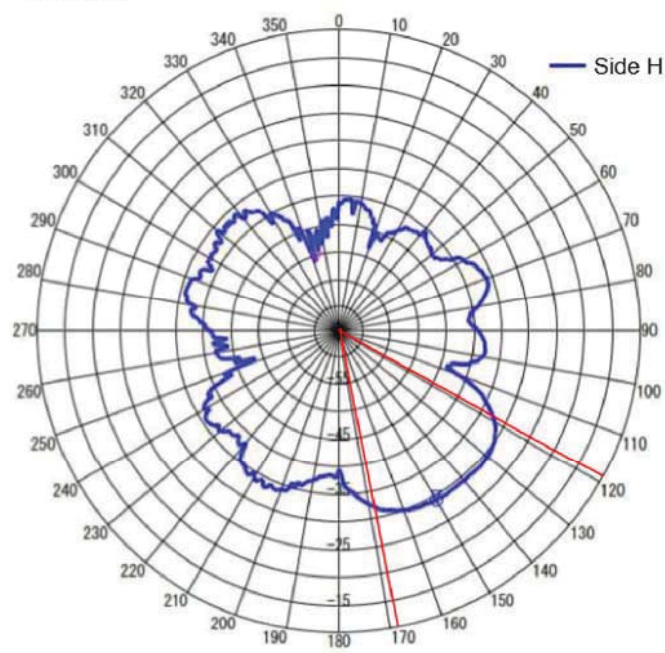


Side H Half-Power Beamwidth
50 degrees

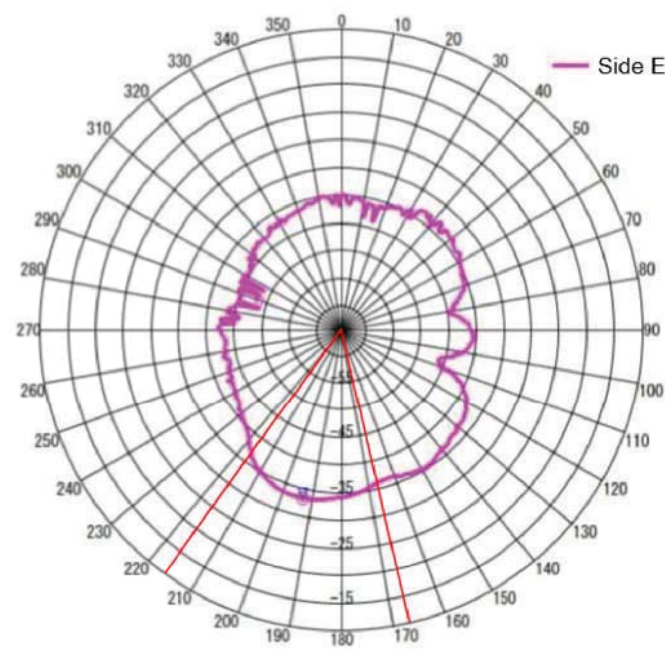


Side E Half-Power Beamwidth
49 degrees

3.2.5 Antenna Pattern **Position 1**

902MHz

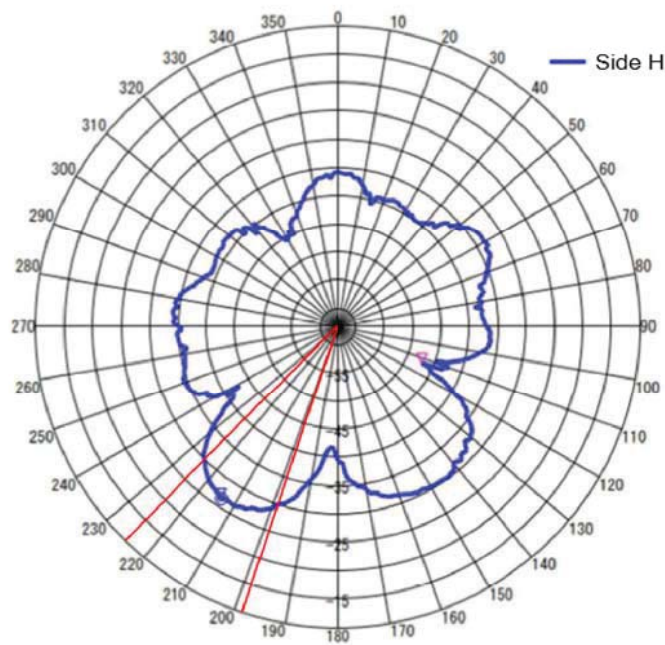


Side H Half-Power Beamwidth
25 degrees

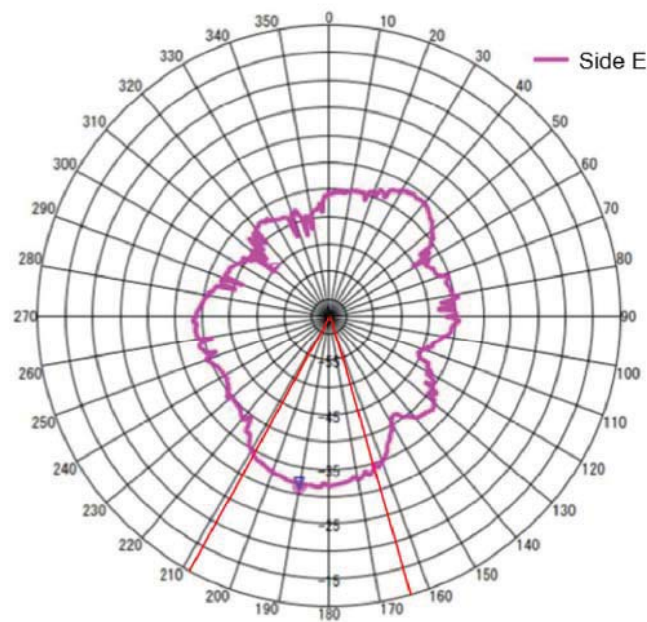


Side E Half-Power Beamwidth
46 degrees



915MHz

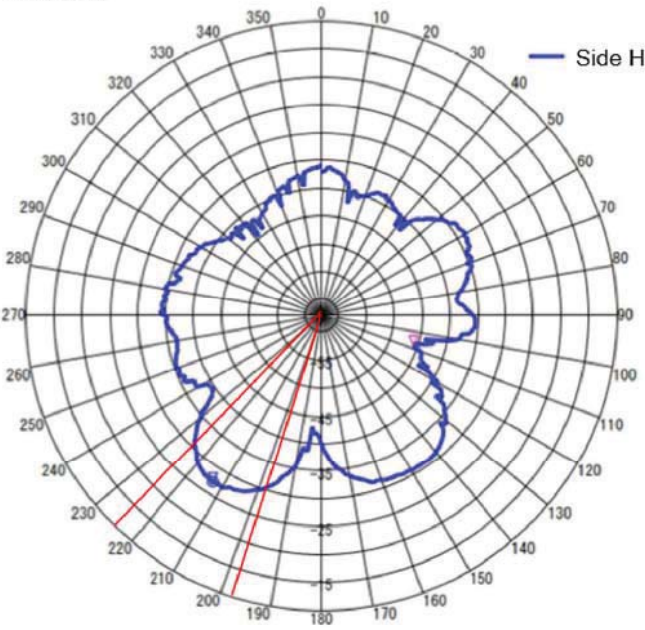


Side H Half-Power Beamwidth
26 degrees

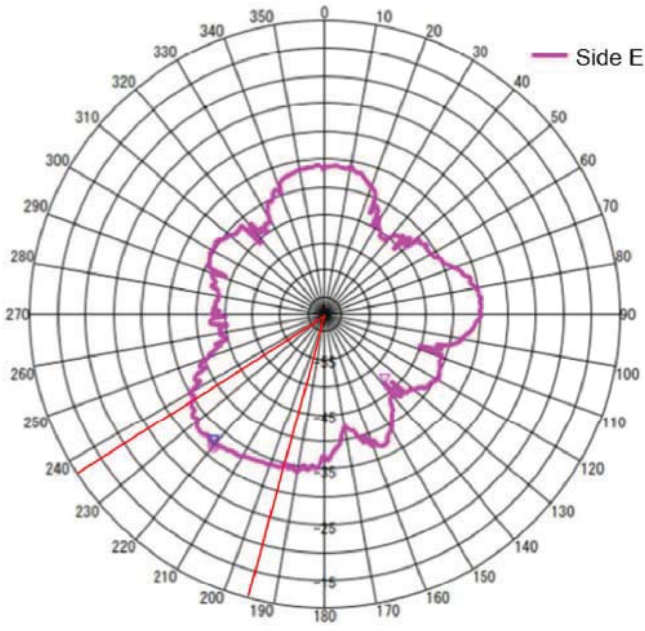


Side E Half-Power Beamwidth
43 degrees



928MHz

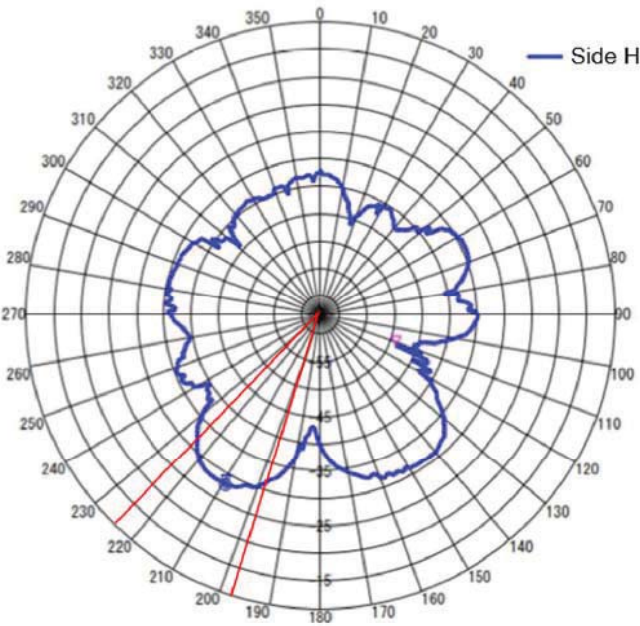


Side H Half-Power Beamwidth
26 degrees

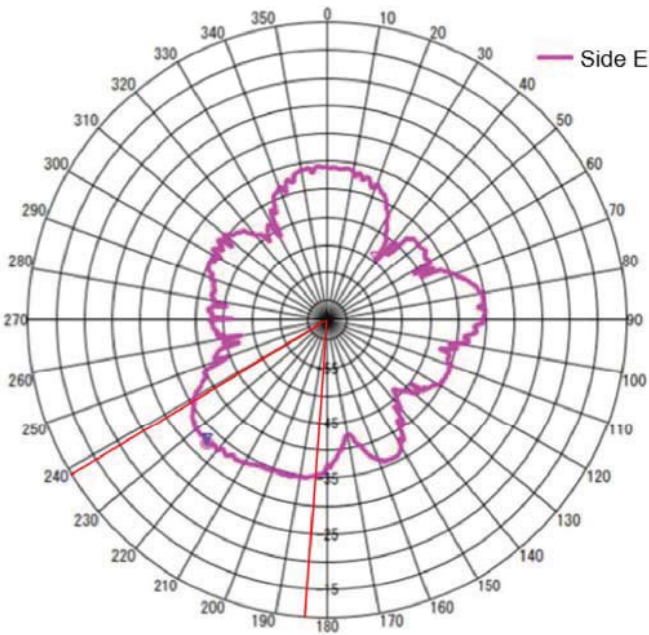


Side E Half-Power Beamwidth
55 degrees

3.2.6 Antenna Pattern **Position 2**

902MHz

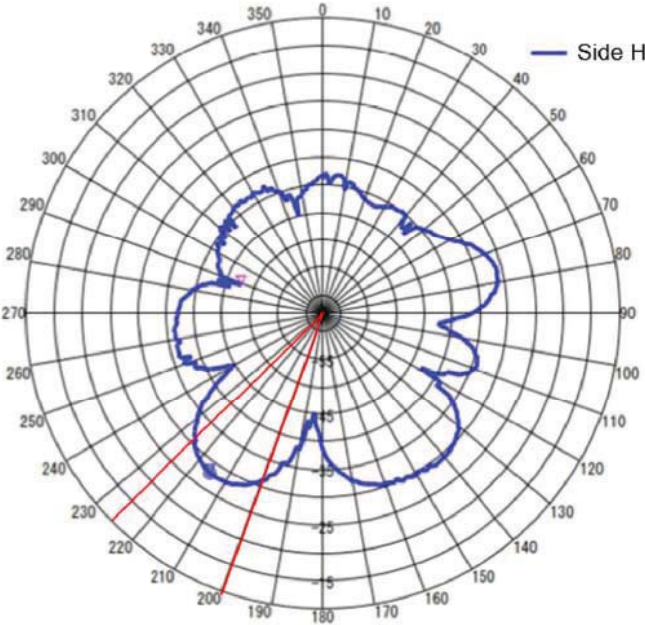


Side H Half-Power Beamwidth
25 degrees

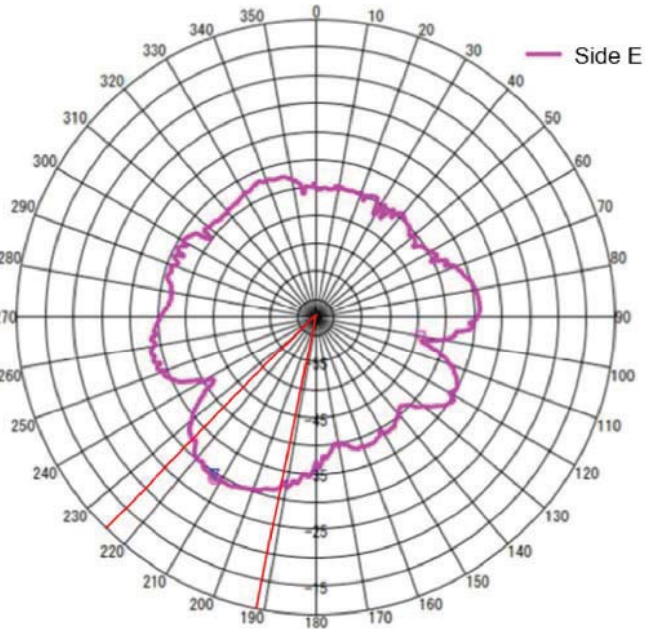


Side E Half-Power Beamwidth
33 degrees



915MHz

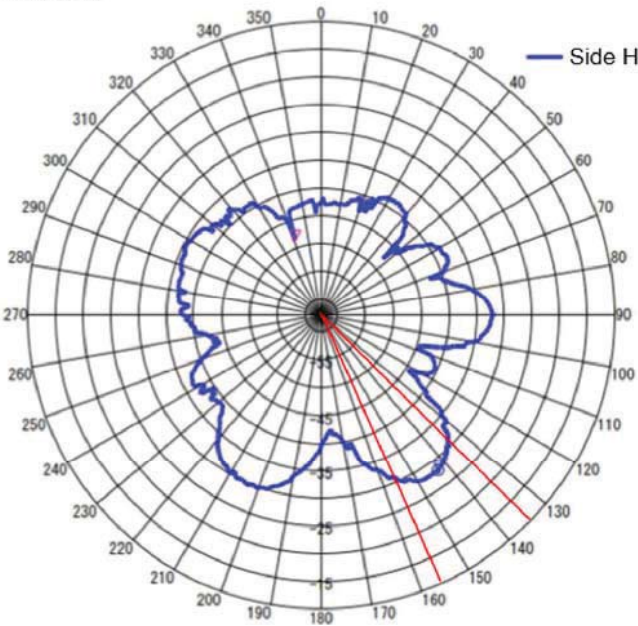


Side H Half-Power Beamwidth
22 degrees

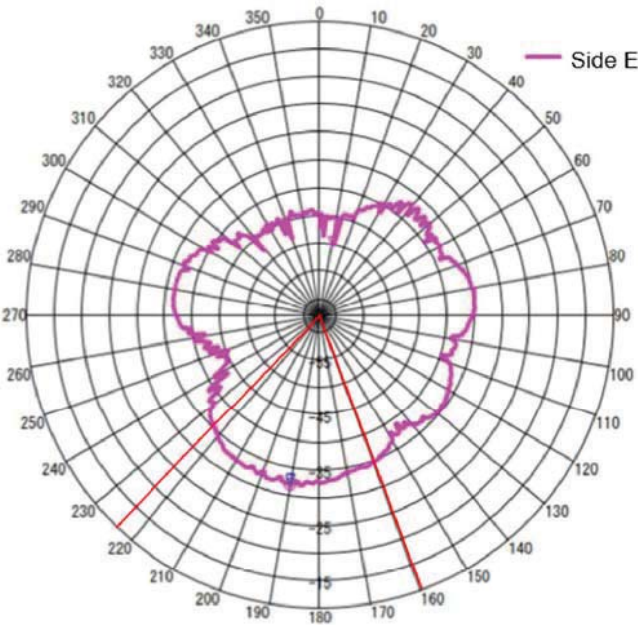


Side E Half-Power Beamwidth
63 degrees



928MHz

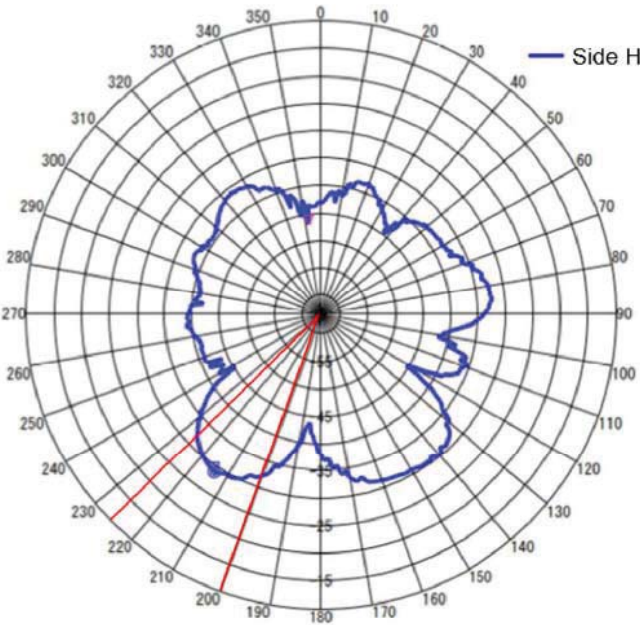


Side H Half-Power Beamwidth
26 degrees

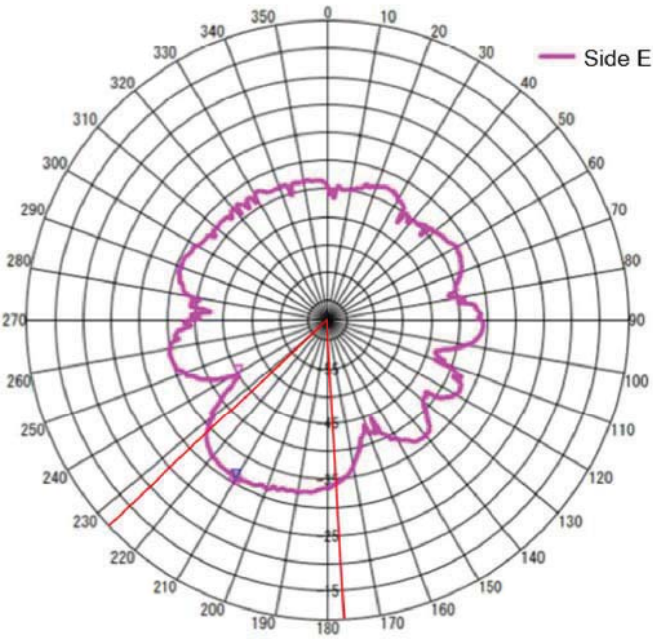


Side E Half-Power Beamwidth
49 degrees

3.2.7 Antenna Pattern **Position 3**

902MHz

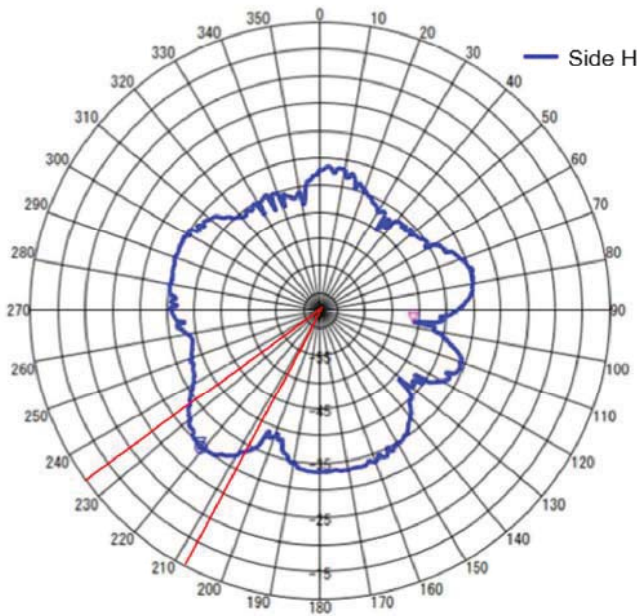


Side H Half-Power Beamwidth
25 degrees

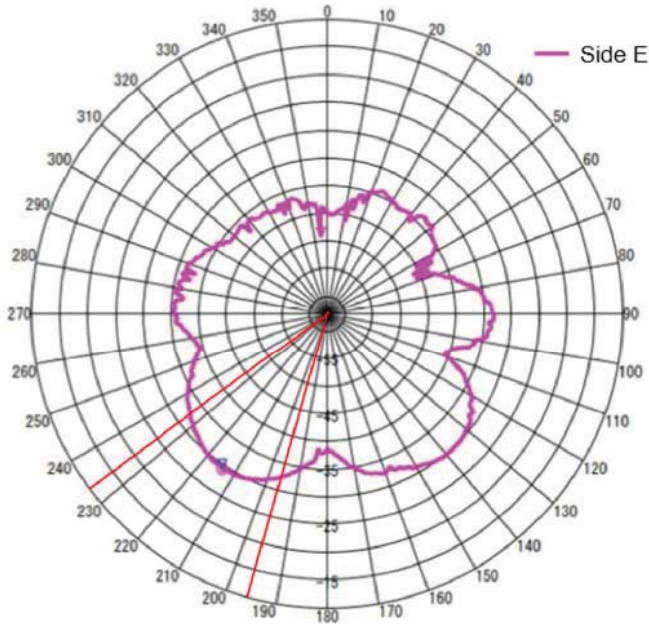


Side E Half-Power Beamwidth
37 degrees



915MHz

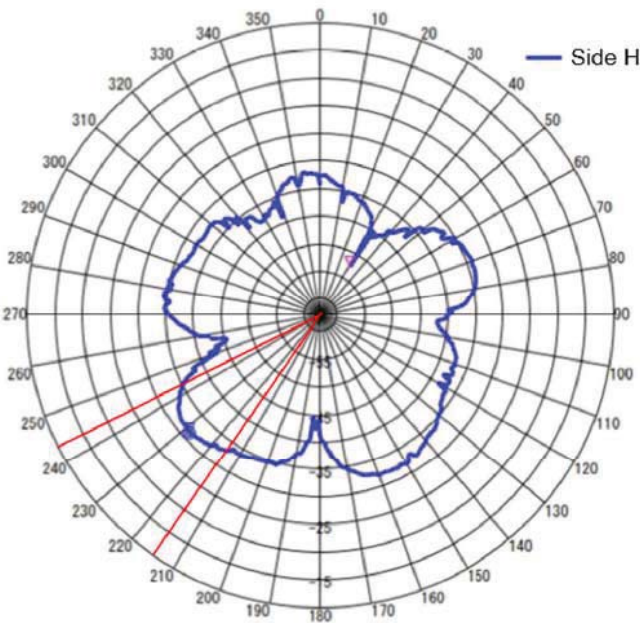


Side H Half-Power Beamwidth
29 degrees

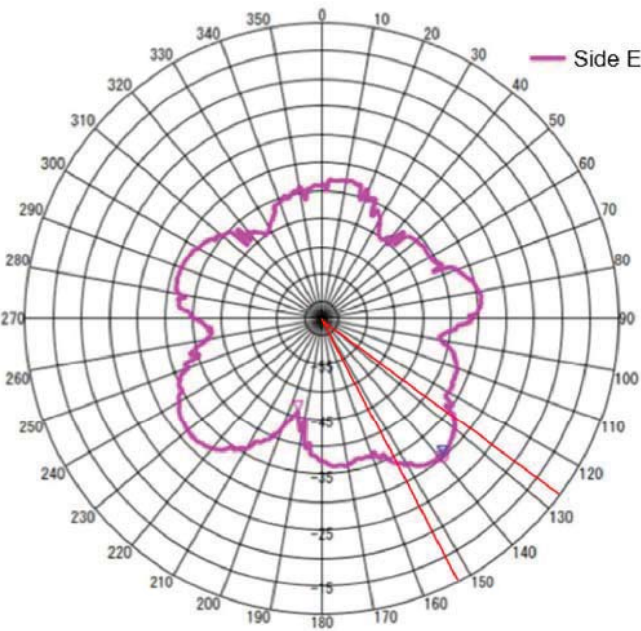


Side E Half-Power Beamwidth
25 degrees



928MHz

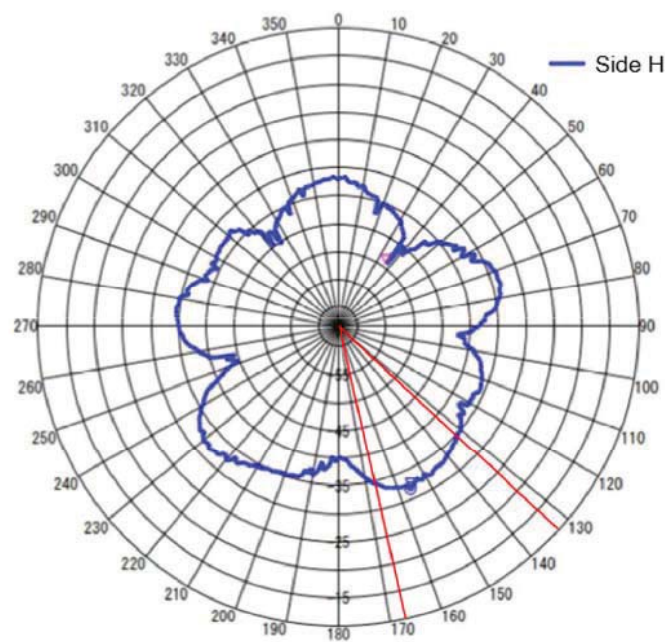

Side H Half-Power Beamwidth
36 degrees

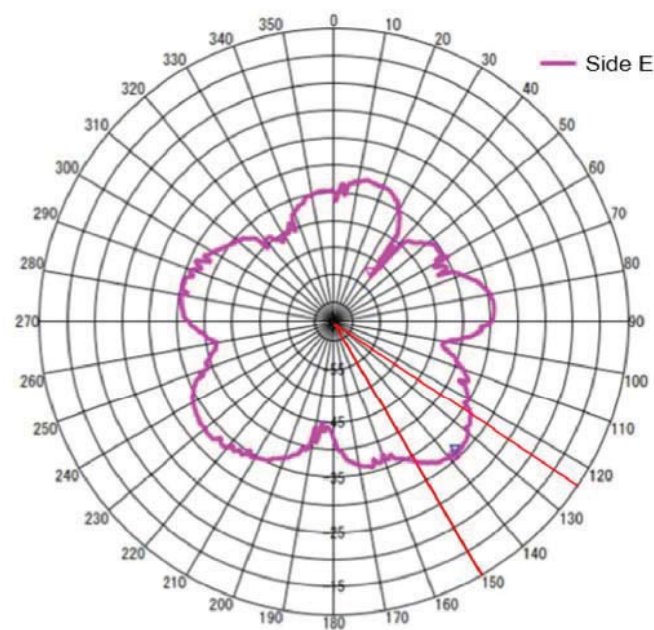

Side E Half-Power Beamwidth
27 degrees

4 Measuring Equipment


Equipment	Company	Model No.	Serial No.	Cal. Authority	Cal. Method	Cal. Date
EMI receiver	ROHDE&SCHWARZ	ESW44	103171	ROHDE&SCHWARZ	(d)	19-Oct-2023
Log-periodic antenna	Schwarzbeck	VUSLP9111B	346	Intertek	(d)	22-Dec-2023
Preamplifier	SONOMA	310	372170	Intertek	(d)	21-Sep-2023
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	Intertek	(d)	15-Dec-2023
Attenuator	AEROFLEX	26A-10	081217-08	Intertek	(d)	15-Dec-2023
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	2001099/4	Intertek	(d)	15-Dec-2023
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1m	MY32976/4	Intertek	(d)	15-Dec-2023
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	SN MY28404/4	Intertek	(d)	15-Dec-2023
Microwave cable	HUBER+SUHNER	SUCOFLEX106/7m	41625/6	Intertek	(d)	15-Dec-2023
Dipole Antenna	ANRITSU	MA5612 A2	6200215728	Intertek	(d)	14-Nov-2023
Attenuator	Weinschel	56-10	J4993	Intertek	(d)	19-Dec-2023
Microwave cable	HUBER SUNER	Sucoflex 102/2m	31648	Intertek	(d)	7-Mar-2024
Vector Signal generator	ROHDE&SCHWARZ	SMBV100A	257406	ROHDE&SCHWARZ	(d)	7-Mar-2024
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(NSA)	Intertek	(d)	14-May-2024
Absorber	NEC TOKIN	TFA	N/A	N/A	N/A	N/A
Software	Techno Science Japan	TEPTO-ANT	Version 1.3.0015	N/A	N/A	N/A

The calibration deadline is within one year from the month following the date of calibration.


Cal.Method ...

- a) : Calibration conducted by the National Institute of Information and Communications Technology~NICT~ or a designated calibration agency under Article 102-18 paragraph (1)~ Telecom Engineering Center, Intertek Japan K.K., Keysight Technologies, Inc~.
- b) : Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)~Japan Calibration Service System~
- c) : Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)~ Telecom Engineering Center, Intertek Japan K.K.,
- d) : Calibration conducted by using other equipment that listed above from a) to c)

5 Antenna Position

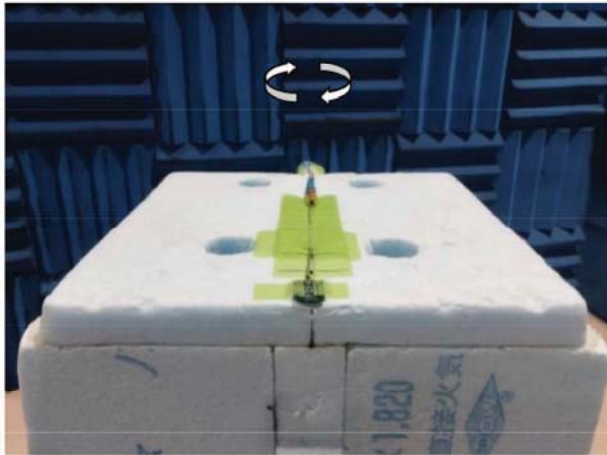

Position 1

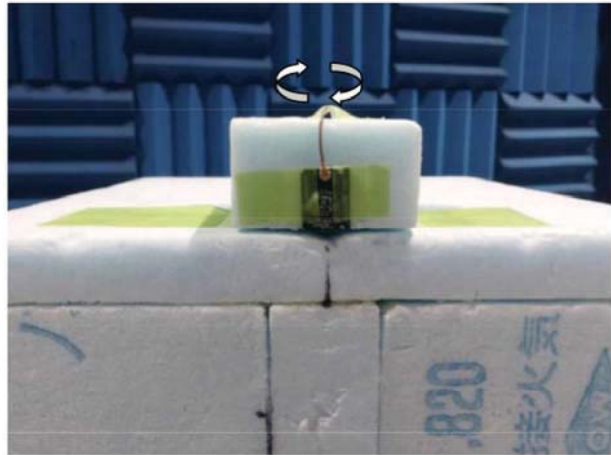

Position 2



Position 3

*Measurement plane relative to the receiving antenna.

*0° to 360° is clockwise relative to the receiving antenna.

6 Measurement environment

