

**Shenzhen Jiadianbao Electrical Products Co., Ltd.**

Application  
For  
Certification  
**(FCC ID: MMIG7706)**

RF Lighting Device

WO#0012009  
CKL/at  
November 15, 2000

---

## INTERTEK TESTING SERVICES

---

### LIST OF EXHIBITS

#### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

**Shenzhen Jiadianbao Electrical Products Co., Ltd. - MODEL: G7706**  
**FCC ID: MMIG7706**

**November 15, 2000**

This report concerns (check one:)      Original Grant X      Class II Change \_\_\_\_\_

Equipment Type: RF Lighting

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes \_\_\_\_\_      No  
X \_\_\_\_\_

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on  
that date.

Report prepared by:

C. K. Lam  
Intertek Testing Services  
2/F., Garment Center,  
576, Castle Peak Road,  
HONG KONG  
Phone: 852-2713-8512  
Fax: 852-2742-6487

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 <u>General Description</u></b> .....	2
1.1 Product Description.....	2
1.2 Related Submittal(s) Grants.....	2
1.3 Test Methodology.....	3
1.4 Test Facility .....	3
1.5 Equipment List .....	4
<b>2.0 <u>System Test Configuration</u></b> .....	6
2.1 Justification .....	6
2.2 EUT Exercising Software .....	6
2.3 Special Accessories .....	6
2.4 Equipment Modification .....	7
2.5 Support Equipment List and Description .....	7
<b>3.0 <u>Emission Results</u></b> .....	9
3.1 Field Strength Calculation.....	10
3.1 Field Strength Calculation (cont) .....	11
3.2 Radiated Emission Configuration Photograph .....	12
3.3 Radiated Emission Data .....	13
3.4 Line Conducted Configuration Photograph (cont'd) .....	15
3.5 Line Conducted Emission Data.....	16
<b>4.0 <u>Equipment Photographs</u></b> .....	18
<b>5.0 <u>Product Labelling</u></b> .....	20
<b>6.0 <u>Technical Specifications</u></b> .....	22
<b>7.0 <u>Instruction Manual</u></b> .....	24

---

## INTERTEK TESTING SERVICES

---

### List of attached file

Exhibit type	File Description	filename
Cover Letter	Letter of Agency	letter.pdf
Test Report	Test Report	report.doc
Operation Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated1.jpg to radiated2.jpg
Test Setup Photo	Conducted Emission	conduct1.jpg to conduct2.jpg
Test Report	Conducted Emission Test Result	conduct.pdf
External Photo	External Photo	ophoto1.jpg to ophoto3.jpg
Internal Photo	Internal Photo	iphoto1.jpg to iphoto6.jpg
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf

**EXHIBIT 1**

**GENERAL DESCRIPTION**

# INTERTEK TESTING SERVICES

---

## 1.0 General Description

### 1.1 Product Description

The equipment under test (EUT) is a RF lighting consisting of an electronic ballast and fluorescent tube . The EUT is operated with 45 kHz and powered by 120V, 60Hz.

For electronic filing, the brief circuit description is saved with filename: descri.pdf

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a consumer RF lighting device.

## INTERTEK TESTING SERVICES

---

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in MP-5. All measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application.

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

---

## INTERTEK TESTING SERVICES

---

### 1.5 Equipment List

#### 1) Radiated Emission Test for FCC Part 18

Equipment	Registration No.	Manufacturer	Model No.	Serial No.	Calibration Due Date
EMI Test Receiver	EW-0016	R&S	ESVS30	8693342/008	August 14, 2001
Antenna Set	EW-0953	EMCO	3148	9909-1093	June 1, 2001
	EW-0954	EMCO	3104C	9911-4872	June 9, 2001
	EW-1041	EMCO	3104C	0003-4883	September 30, 2001
	EW-1042	EMCO	3148	0001-1109	October 10, 2001
EMI Test Receiver	EW-0017	R&S	ESHS30	842053/002	August 11, 2001

#### 2) Disturbance Voltage Tests for FCC Part 18

Equipment	Registration No.	Manufacturer	Model No.	Serial No.	Calibration Due Date
EMI Test Receiver	EW-0017	R&S	ESHS30	842053/002	August 11, 2001
Absorbing Clamp	EW-0019	R&S	MDS21	828228/006	February 17, 2001
	EW-0613	R&S	MDS21	840031/001	October 30, 2001
LISN	EW-0090	R&S	ESH3-Z5	840731/0013	March 16, 2001

**EXHIBIT 2**

**SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in MP-5.

The EUT was powered from 120V, 60Hz.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of wood platform.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the EUT is turned on, it emits the RF noise.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

## INTERTEK TESTING SERVICES

---

### 2.4 Equipment Modification

Any modifications installed previous to testing by Shenzhen Jiadianbao Electrical Products Co., Ltd. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services.

### 2.5 Support Equipment List and Description

This product was tested in a standalone configuration.

All the items listed under section 2.0 of this report are

*Confirmed by:*

*C. K. Lam  
Technical Manager  
Intertek Testing Services Hong Kong Ltd.  
Agent for Shenzhen Jiadianbao Electrical Products Co., Ltd.*



---

Signature

---

November 15, 2000

---

Date

**EXHIBIT 3**

**EMISSION RESULTS**

## INTERTEK TESTING SERVICES

---

### 3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

---

## INTERTEK TESTING SERVICES

---

### 3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
CF = Cable Attenuation Factor in dB  
AF = Antenna Factor in dB  
AG = Amplifier Gain in dB  
PD = Pulse Desensitization in dB  
AV = Average Factor in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

### 3.1 Field Strength Calculation (cont'd)

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

---

## INTERTEK TESTING SERVICES

---

### 3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
at  
35.946 MHz

For electronic filing, the front view and back view of test configuration photograph is saved with filename: radiated1.jpg and radiated2.jpg respectively.

## INTERTEK TESTING SERVICES


---

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 16.4 dB

### **TEST PERSONNEL:**

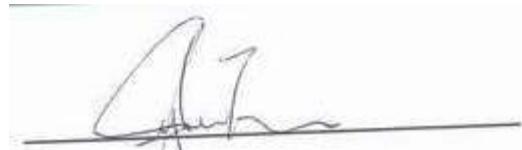

*Signature*

Sylvia Tam, Compliance Engineer  
*Typed/Printed Name*

November 15, 2000

*Date*

# INTERTEK TESTING SERVICES

---

Company: Shenzhen Jiadianbao Electrical Products Co., Ltd.      Date of Test: October 30, 2000  
Model: G7706

Table 1

## Radiated Emissions

Polarity	Frequency (M Hz)	Reading (dB $\mu$ V)	Antenna Factor (dB)	Pre-Amp Gain (dB)	Net at 3m (dB $\mu$ V/m)	Calculated Net at 30m (dB $\mu$ V/m)	Limit at 30m (dB $\mu$ V/m)	Margin (dB)
H	30.173	28.7	10	16	22.7	2.7	20	-17.3
H	35.946	29.6	10	16	23.6	3.6	20	-16.4
H	40.034	29.5	10	16	23.5	3.5	20	-16.5
H	45.160	28.8	10	16	22.8	2.8	20	-17.2
H	50.349	27.4	11	16	22.4	2.4	20	-17.6
H	55.686	27.1	11	16	22.1	2.1	20	-17.9

Notes:

1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.

Test Engineer: Sylvia Tam

---

## INTERTEK TESTING SERVICES

---

### 3.4 Line Conducted Configuration Photograph

Worst Case Line-Conducted Configuration  
at  
30.000 MHz

For electronic filing, the worst case line-conducted configuration photograph are saved with filename: conduct1.jpg , conduct 2.jpg and conduct3.jpg respectively.

## INTERTEK TESTING SERVICES

---

### 3.5 Line Conducted Emission Configuration Data

For electronic filing, the graph and data table of the worst case conducted emission is saved with filename: conducted.pdf.

Judgement: Passed by 2.6 dB

#### ***TEST PERSONNEL:***



A handwritten signature in black ink, appearing to read "Sylvia Tam", is written over a horizontal line. Below the signature, the word "Signature" is printed in a smaller, italicized font.

Sylvia Tam, Compliance Engineer  
*Typed/Printed Name*

October 30, 2000  
*Date*

**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 4.0 **Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: ophoto1.jpg to ophoto3.jpg for external photo and iphoto1.jpg to iphoto6.jpg for internal photo.

**EXHIBIT 5**

**PRODUCT LABELLING**

### 5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf

**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**

### 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 7**

**INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

This manual will be provided to the end-user with each unit sold/leased in the United States.