

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

| Platform information | | | | | | | | | | |
|--|-----------------------------|----------------------------|---------------------------------------|--|------------------------------|------------------------|------------------------|------------------------|-------------------------|--|
| Brand | ODM | ****End product model name | Intel platform (ex: Yes, No or NA) | Platform type (ex: regular NB, convertible PC, AIO...etc) | *SAR minimum separation (mm) | | | | | |
| ASUS | HUAQIN | B5302FB,B5302CB | Yes | Convertible NB | | | | | | |
| *****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection. | | | | | | | | | | |
| Antenna information | | | | | | | | | | |
| Vendor | Type | | Antenna Part number (Main) | Antenna Part number (Aux) | | | | | | |
| AWAN | PIFA | | C-AYP6Y-C7-00 HQ20604914000 | C-AYP6Y-C7-01 HQ20604913000 | | | | | | |
| Peak gain w/ cable loss (dBi)* | | | | | | | | | | |
| | 2.4GHz 2400-2483.5 MHz | 5.2GHz 5150-5250MHz | 5.3GHz 5250-5350MHz | 5.6GHz 5470-5725MHz | 5.8GHz 5725-5850MHz | 6.2GHz 5925-6425MHz | 6.5GHz 6425-6525MHz | 6.7GHz 6525-6875MHz | 7.0 GHz 6875-7125MHz | |
| Main | 1.25 | 2.51 | 2.51 | 1.14 | 2.63 | 4.79 | 2.06 | 4.85 | 4.85 | |
| Aux | -0.07 | 1.39 | 1.39 | 1.21 | 3.09 | 4.48 | -0.40 | 3.75 | 3.75 | |
| Intel Reference Gain/Type/ Separation distance | | | | | | | | | | |
| Antenna Type | Antenna Peak gain (In dBi)* | | | | | | | | | Distance to the end user (mm) |
| | 2.4GHz 2400-2483.5 MHz | 5.2GHz 5150-5250MHz | 5.3GHz 5250-5350MHz | 5.6GHz 5470-5725MHz | 5.8GHz 5725-5850MHz | 6.2GHz 5925-6425MHz | 6.5GHz 6425-6525MHz | 6.7GHz 6525-6875MHz | 7.0GHz 6875-7125MHz | |
| Design | 3.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | 5.00 | Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm |
| PIFA | 3.24 | 3.64 | 3.73 | 4.77 | 4.97 | 4.83 | 4.30 | 5.37 | 5.59 | |
| Dipole | 2.89 | 2.92 | 3.19 | 4.41 | 4.22 | 4.83 | 4.30 | 4.49 | 5.34 | |
| Notes (marked with *) | | | | | | | | | | |
| * SAR minimum separation (mm) | | | | | | | | | | |
| - Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device) | | | | | | | | | | |
| - Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device) | | | | | | | | | | |
| - Mini-tablet: Minimum antenna-to-edge (6 sides of the device) | | | | | | | | | | |
| * 3D Peak Antenna gain should be equal or greater than -2 dBi | | | | | | | | | | |
| - If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host. | | | | | | | | | | |

Antenna Sample / Antenna Data

Requirements for worldwide regulatory approval

| Section | Description of Required OEM / ODM Antenna Information | US / IC | EU | Japan | Taiwan | S. Korea |
|------------------|--|----------|----------|----------|--------------------------|--------------------------|
| 1A | Part Number for Antenna only | Required | Required | Required | Required | Required |
| 1B | Antenna Manufacturer Name | Required | Required | Required | Required | Required |
| 1C | Description of Antenna Type | Required | Required | N/A | Required | N/A |
| 1D | Part number of Antenna Assembly / cable impedance, length & diameter. | Required | Optional | Optional | Optional | Optional |
| 1E | Main & Aux antenna (Peak Gain W/ cable loss) * | Required | Required | Required | Required | Required |
| 1E OR 1F, 1G, 1H | | | | | | |
| 1F | Main & Aux antenna (Peak Gain only) * | Required | Required | Required | Required | Required |
| 1G | VSWR of cable including connector | Required | Required | Required | Required | Required |
| 1H | Main & Aux antenna (Cable loss W/ connector) * | Required | Required | Required | Required | Required |
| 1 | Antenna gain range should be equal or greater than -2 dBi. (5GHz: EU, 6GHz: FCC) | Required | Required | N/A | N/A | N/A |
| 2 | Dimensioned Photographs <u>and</u> Drawings of Main & Aux antennas | Required | Required | Required | Required | Required |
| 3 | Radiation patterns of antennas loaded in the host platform. | Required | Optional | Required | Required | Required |
| 4 | Platform model name / number - correlated to antenna manufacturer and antenna part number | Required | Required | Optional | Required | Optional |
| 5 | Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</u> | Required | Required | Optional | <u>Required (Photos)</u> | <u>Required (Photos)</u> |
| 6 | Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement). | Required | N/A | N/A | N/A | N/A |

Antenna Information

Section 1. Antenna Assembly Specifications


| 1A Antenna Part Number | 1B Manufacturer | 1C Antenna Type | 1D Cable Assembly Part Number and Information | Freq Range MHz | 1E * Peak Gain W/ Cable loss (dBi) | 1F Peak Gain w/o Cable Loss (dBi) | 1G Max VSWR | 1H Cable Loss (dB) |
|---|--------------------|--------------------|---|-------------------|---------------------------------------|--------------------------------------|----------------|-----------------------|
| (P/N: C-AYP6Y-C7-00) Main Antenna | AWAN | PIFA | (P/N: 20565-001R-13) 50 ohm Coaxial length: 170mm diameter: 1.13mm | 2400-2483.5 | 1.25 | 1.67 | 2.0 | 0.42 |
| | | | | 5150-5250 | 2.51 | 3.18 | 2.0 | 0.67 |
| | | | | 5250-5350 | 2.51 | 3.18 | 2.0 | 0.67 |
| | | | | 5470-5725 | 1.14 | 1.82 | 2.0 | 0.68 |
| | | | | 5725-5850 | 2.63 | 3.33 | 2.0 | 0.70 |
| | | | | 5925-6425 | 4.79 | 5.49 | 2.0 | 0.70 |
| | | | | 6425-6525 | 2.06 | 2.80 | 2.0 | 0.74 |
| | | | | 6525-6875 | 4.85 | 5.61 | 2.0 | 0.76 |
| | | | | 6875-7125 | 4.85 | 5.63 | 2.0 | 0.78 |
| (P/N: C-AYP6Y-C7-01) Aux Antenna | AWAN | PIFA | (P/N: 20565-001R-13) 50 ohm Coaxial length: 313mm diameter: 1.13mm | 2400-2483.5 | -0.07 | 0.71 | 2.0 | 0.78 |
| | | | | 5150-5250 | 1.39 | 2.62 | 2.0 | 1.23 |
| | | | | 5250-5350 | 1.39 | 2.62 | 2.0 | 1.23 |
| | | | | 5470-5725 | 1.21 | 2.46 | 2.0 | 1.25 |
| | | | | 5725-5850 | 3.09 | 4.37 | 2.0 | 1.28 |
| | | | | 5925-6425 | 4.48 | 5.77 | 2.0 | 1.29 |
| | | | | 6425-6525 | -0.40 | 0.96 | 2.0 | 1.36 |
| | | | | 6525-6875 | 3.75 | 5.15 | 2.0 | 1.40 |
| | | | | 6875-7125 | 3.75 | 5.18 | 2.0 | 1.43 |

- 3D Antenna Peak Gain required being test in system basis.


Section 2. Dimensioned Photos and Drawings of Antennas

Include the dimensioned photo and drawing of Main antenna here.

Main Antenna Drawing:

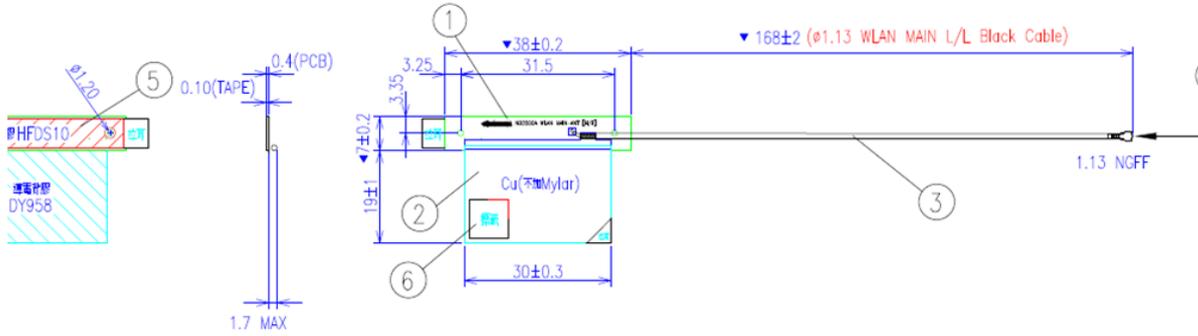


Main Antenna Photo (Front/Back):

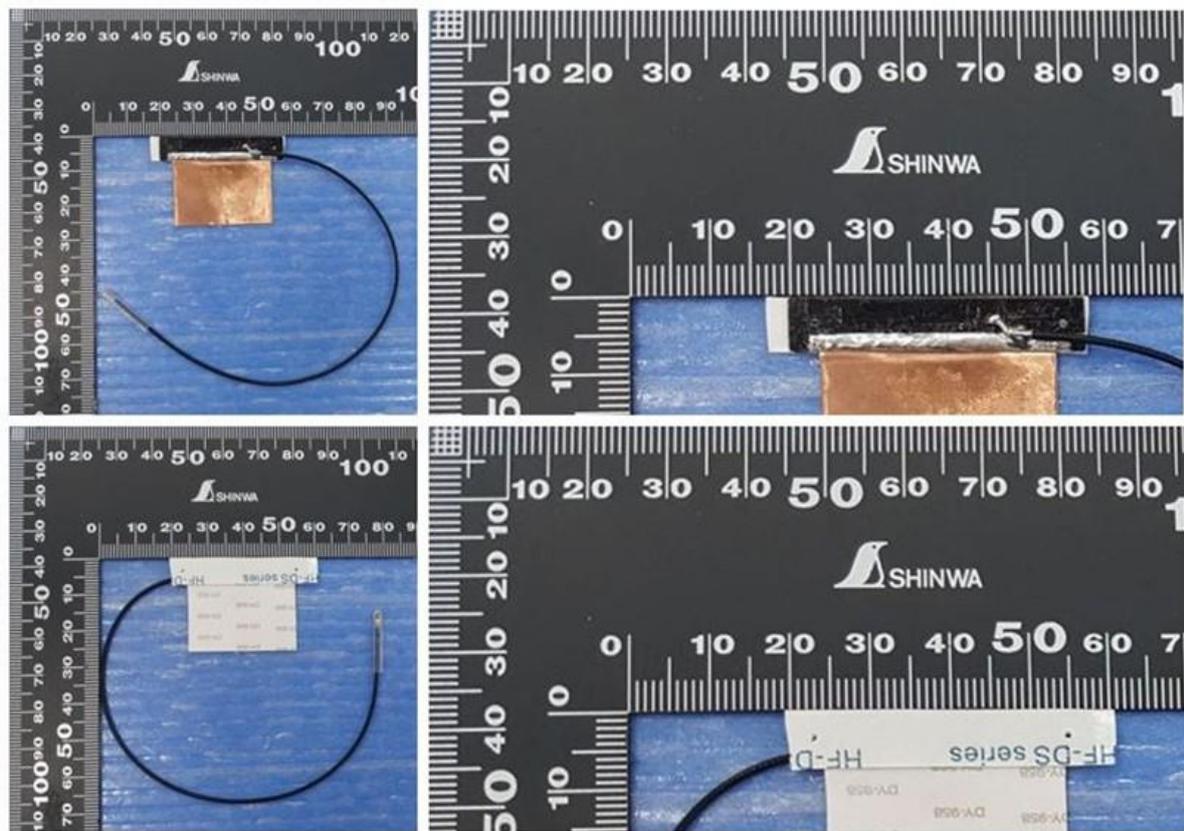

Note: antenna photo should include L type ruler


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 2400-2483.5 | 1.25 |

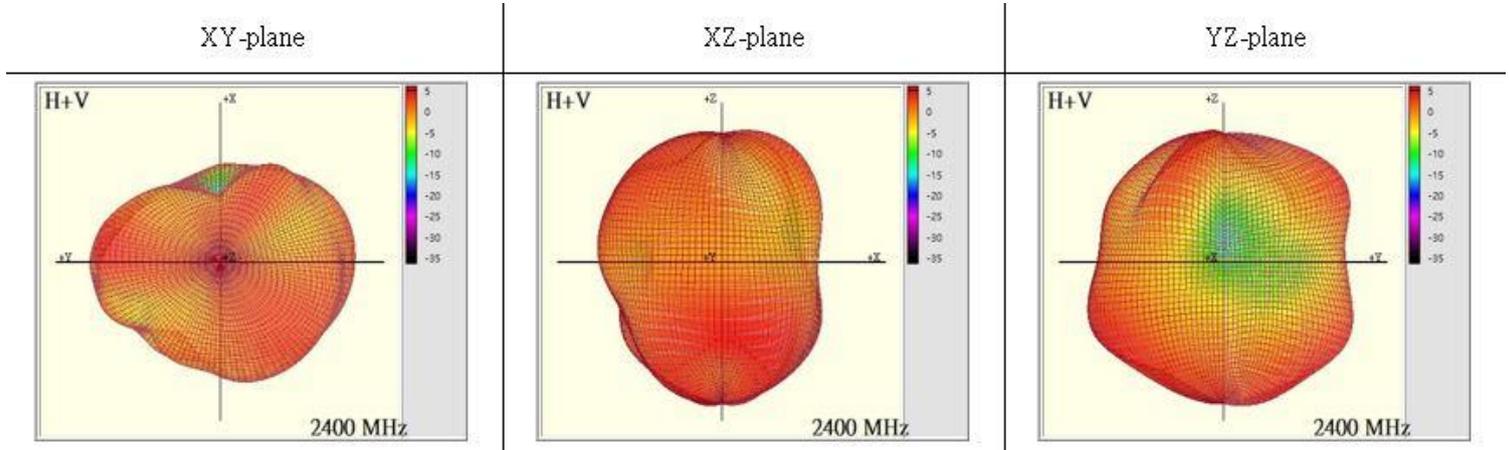


Max Antenna 3D Radiation Pattern 5150-5250 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5150-5250 | 2.51 |

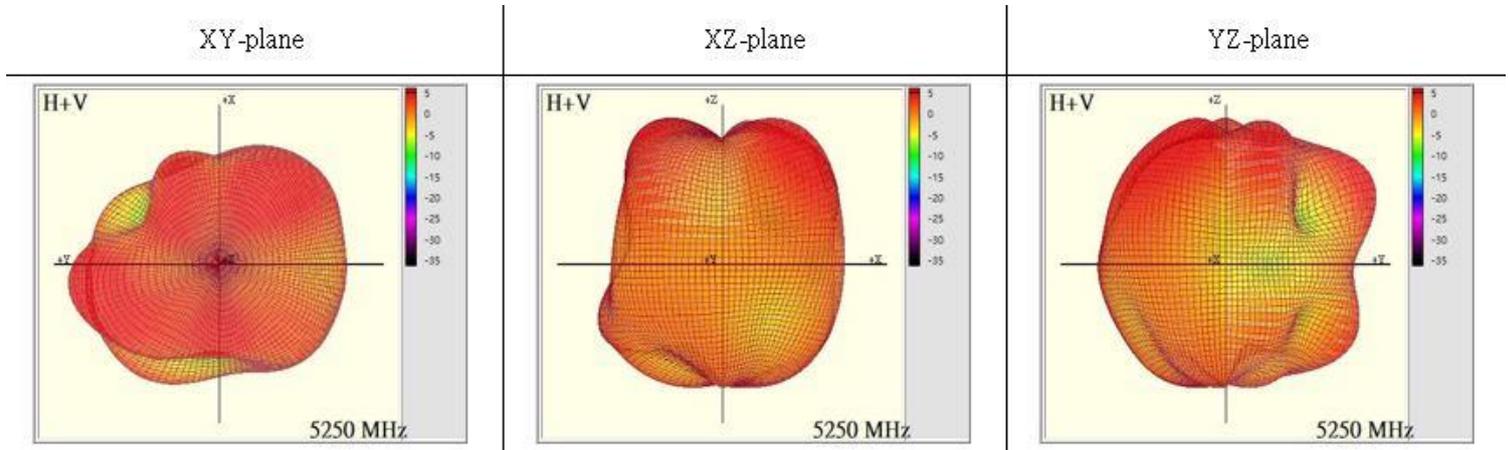


Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350 | 2.51 |

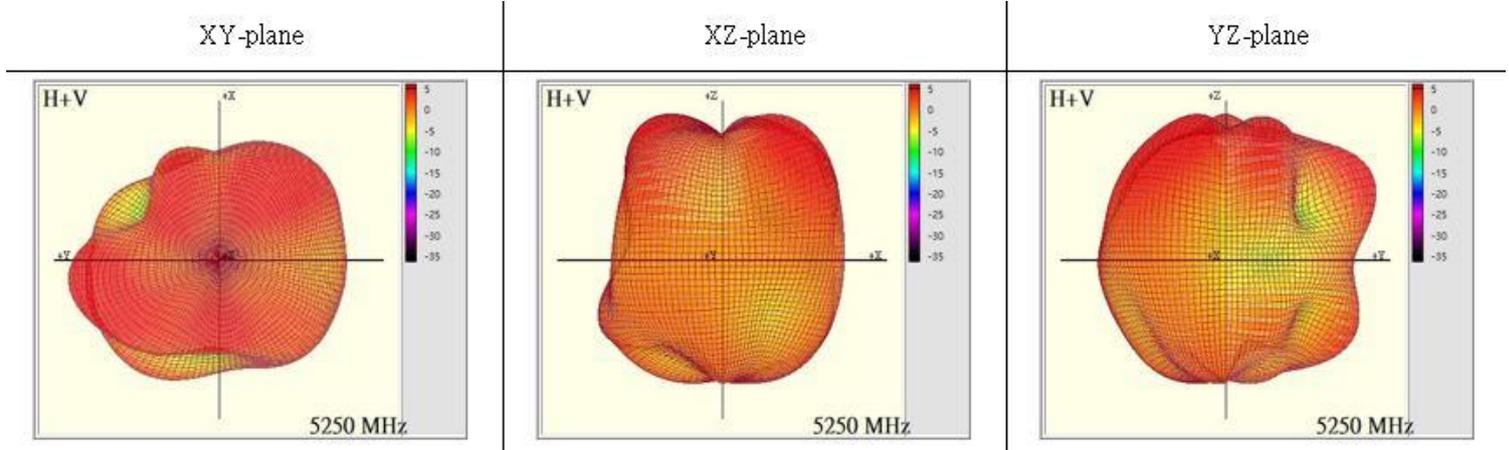


Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5470-5725 | 1.14 |

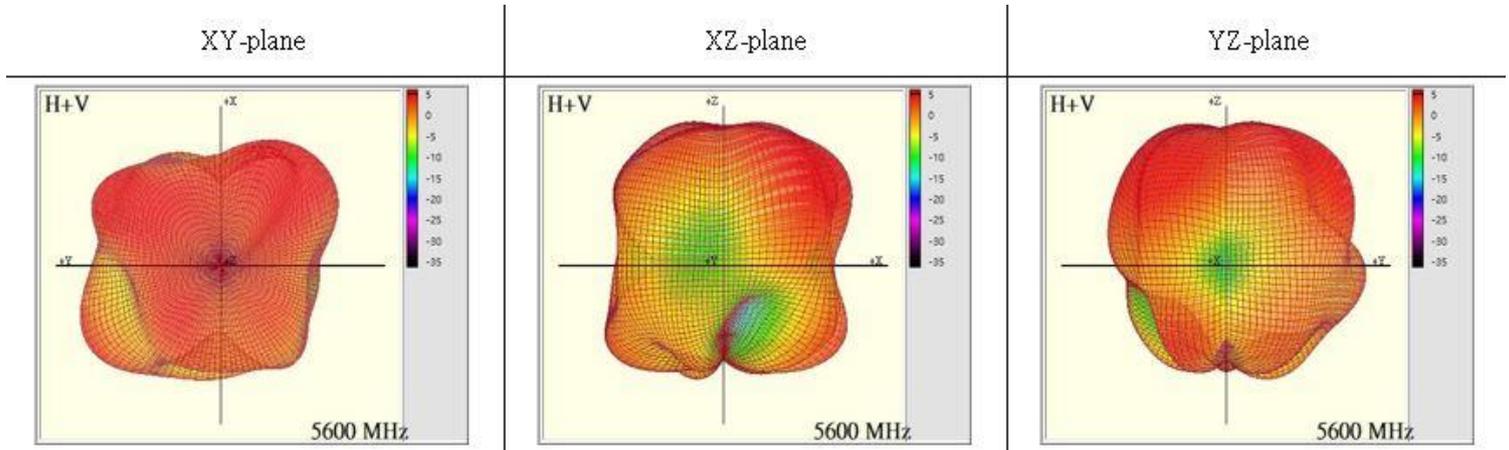


Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5725-5850 | 2.63 |

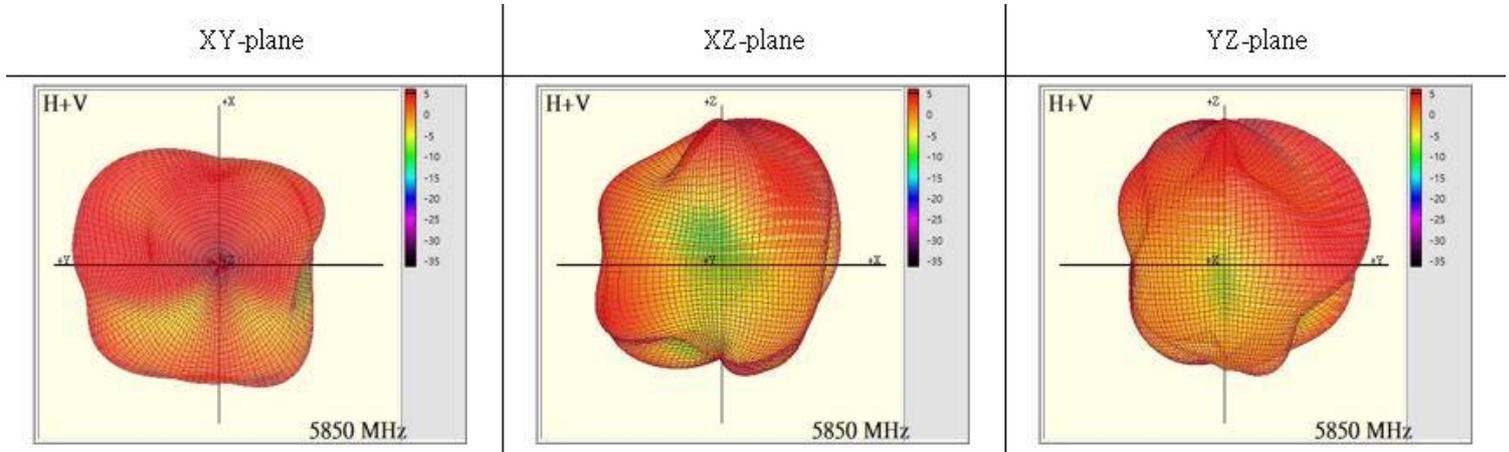


Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5925-6425 | 4.79 |

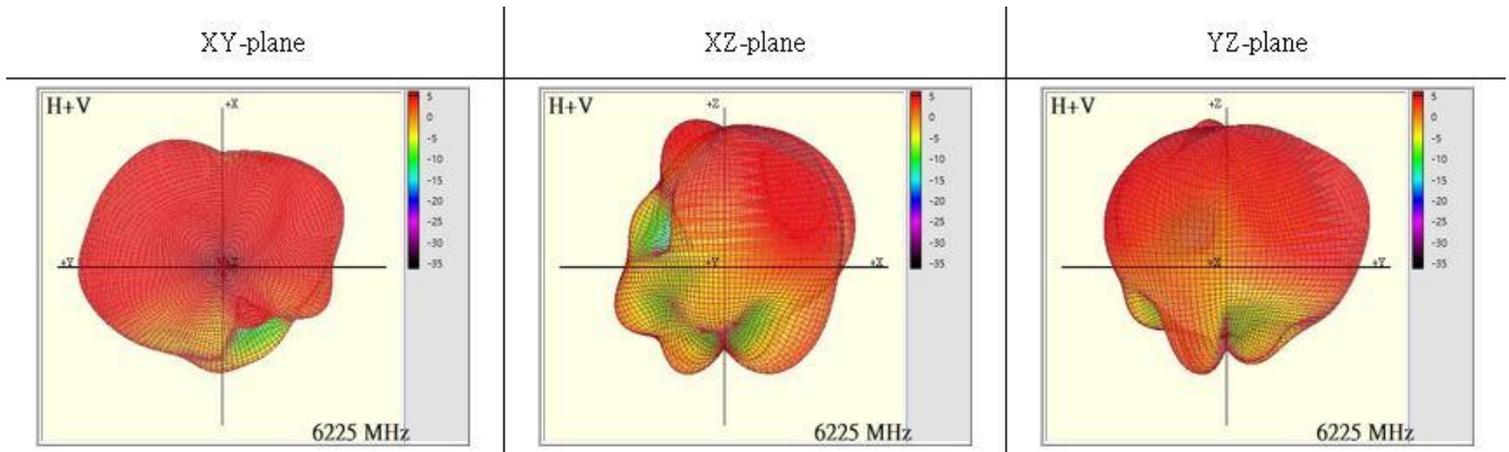


Max Antenna 3D Radiation Pattern 6425-6525 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6425-6525 | 2.06 |

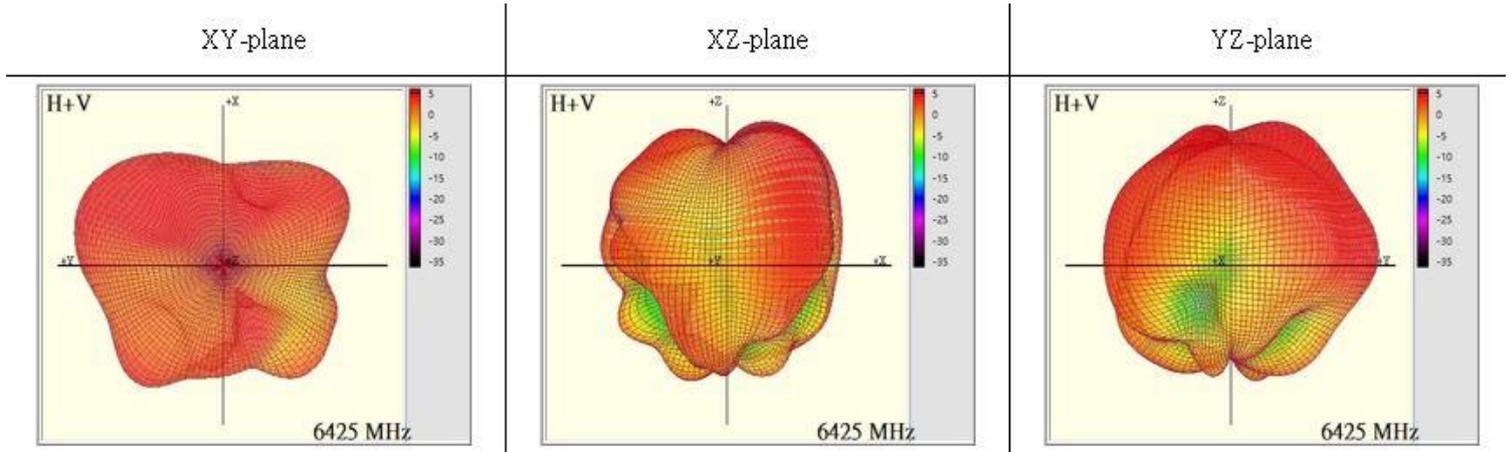


Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6525-6875 | 4.85 |

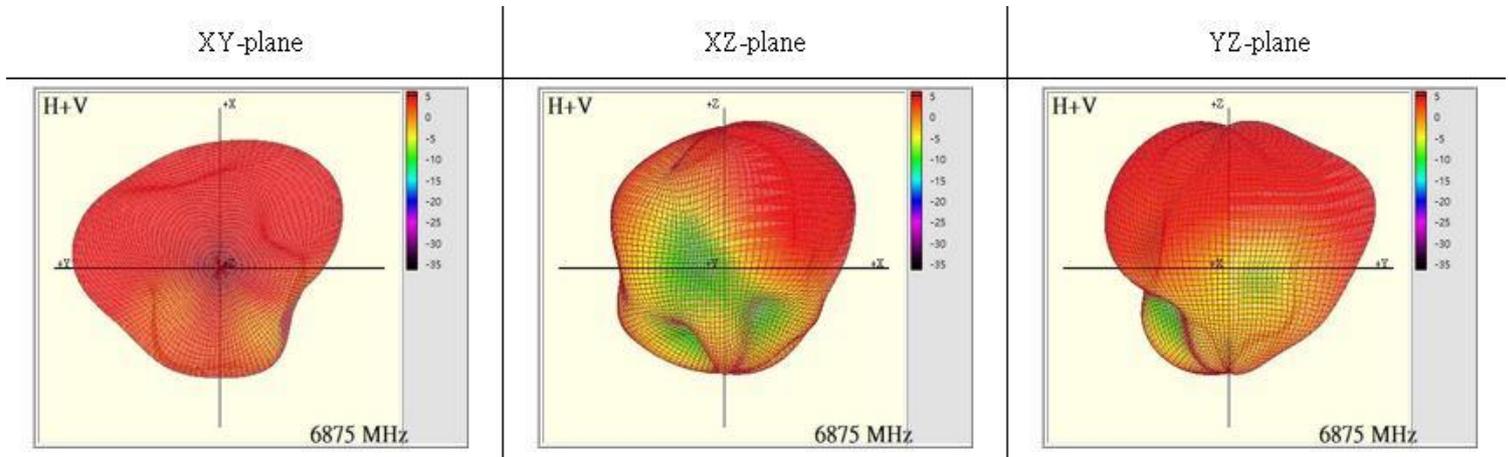

Max Antenna 3D Radiation Pattern 6875-7125 MHz


| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6875-7125 | 4.85 |

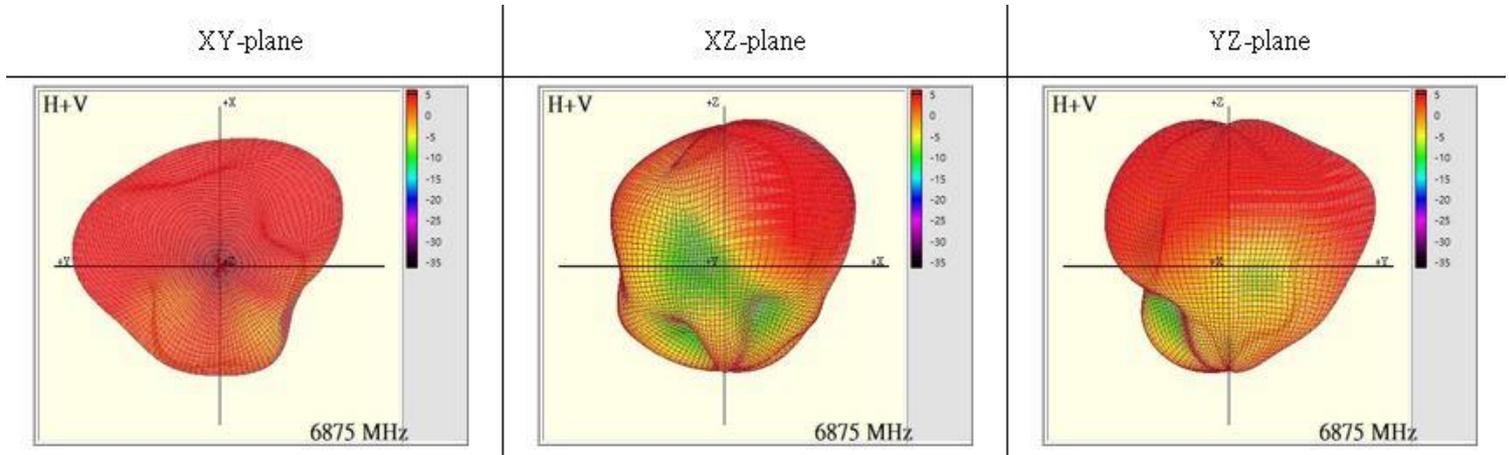

Auxiliary Antenna

Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz


| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 2400-2483.5 | -0.07 |

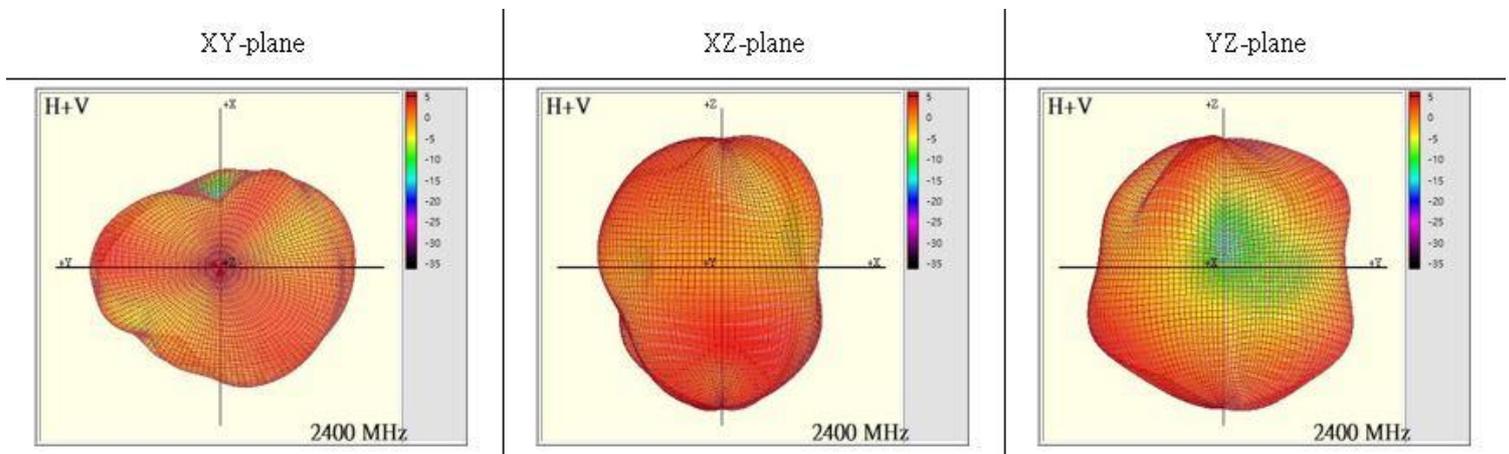


Max Antenna 3D Radiation Pattern 5150-5250 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5150-5250 | 1.39 |


XY-plane

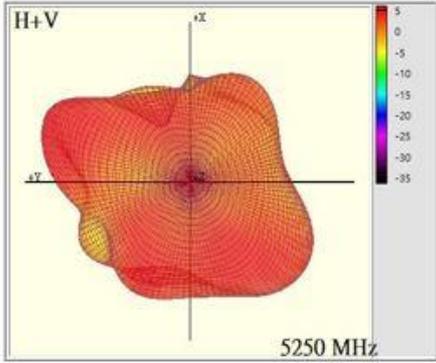

XZ-plane

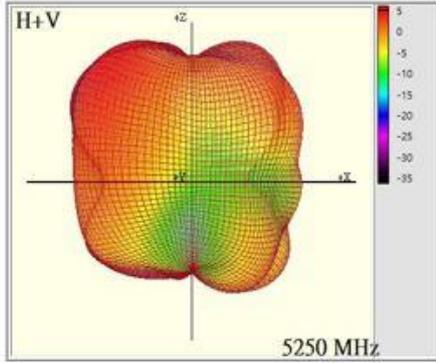


YZ-plane

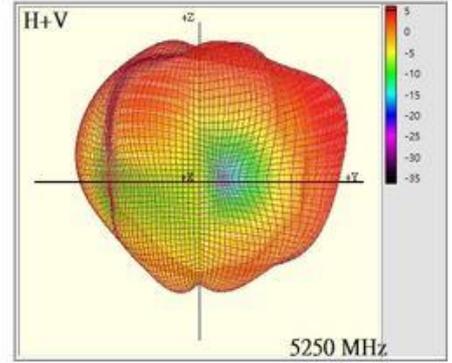


Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350 | 1.39 |

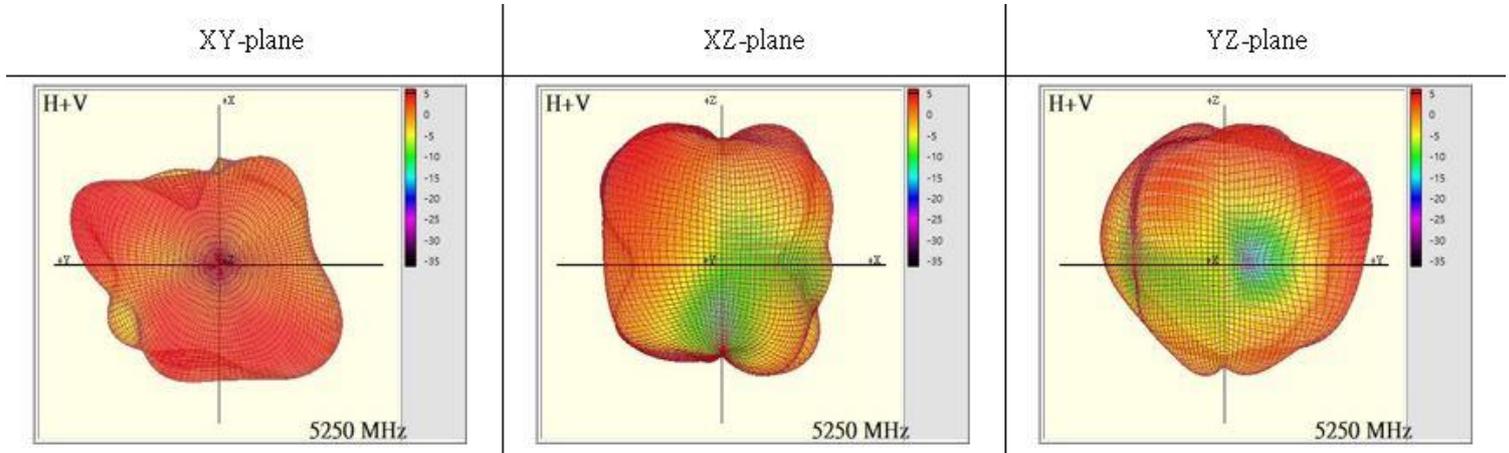


Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5470-5725 | 1.21 |

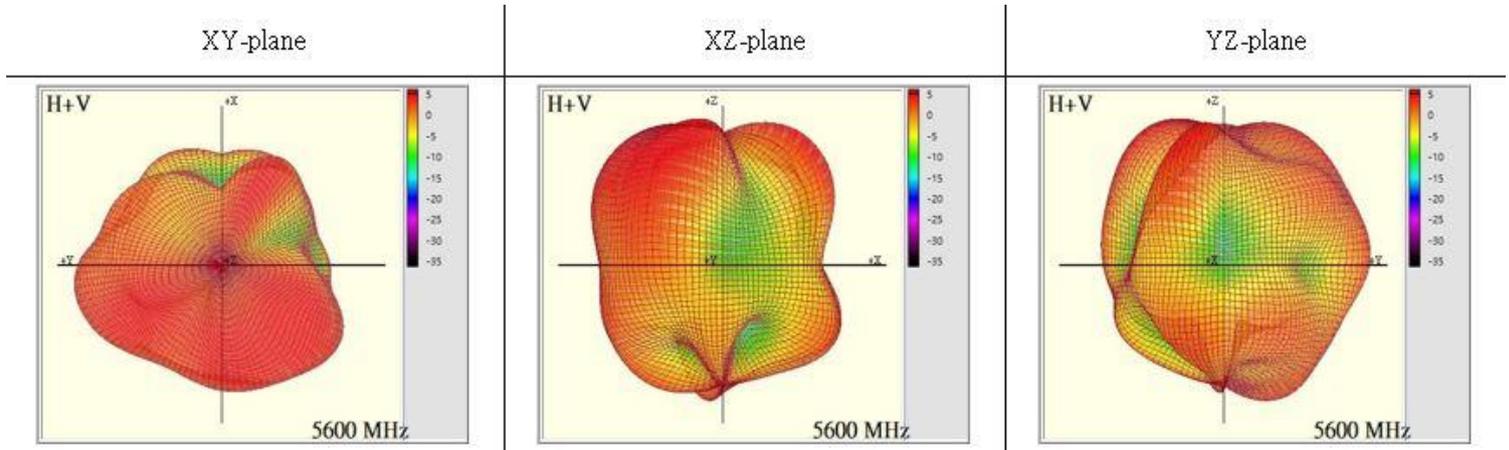


Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5725-5850 | 3.09 |

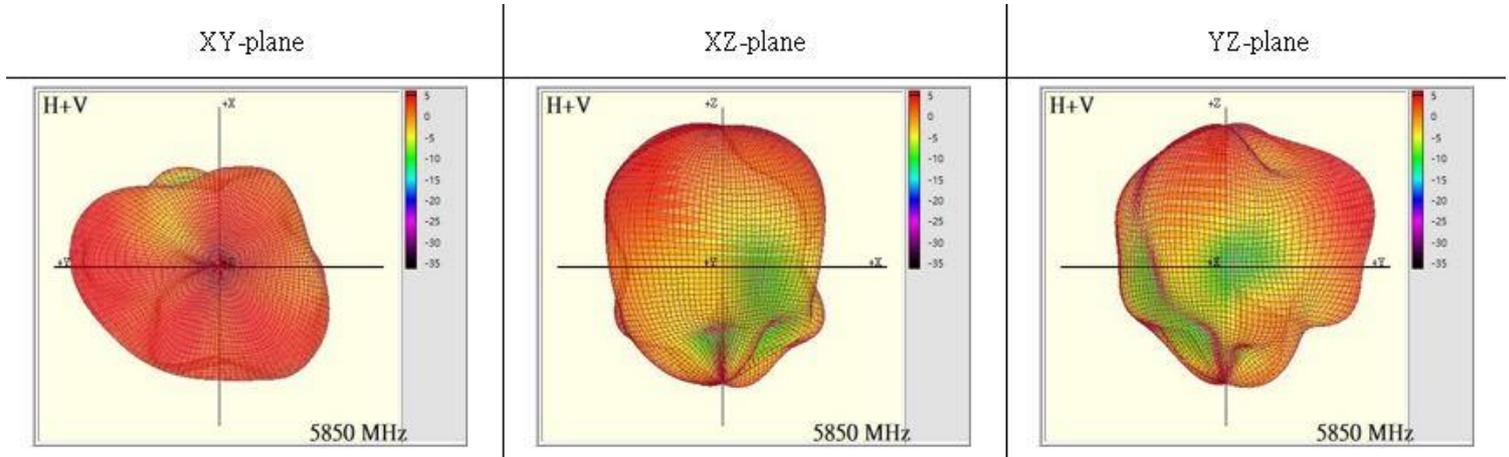


Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5925-6425 | 4.48 |

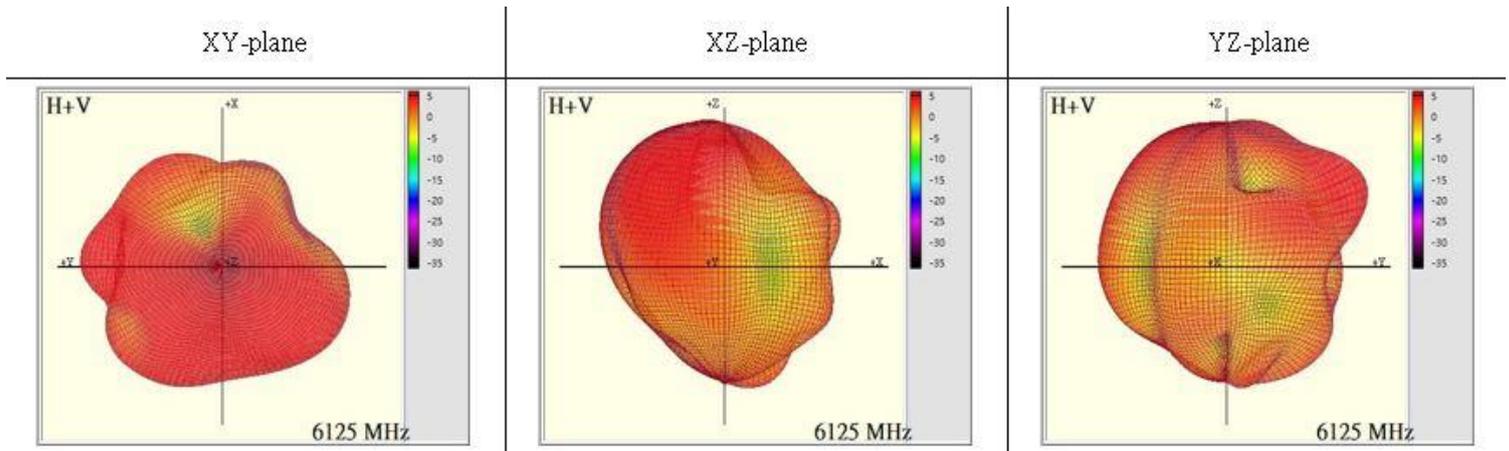


Max Antenna 3D Radiation Pattern 6425-6525 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6425-6525 | -0.40 |

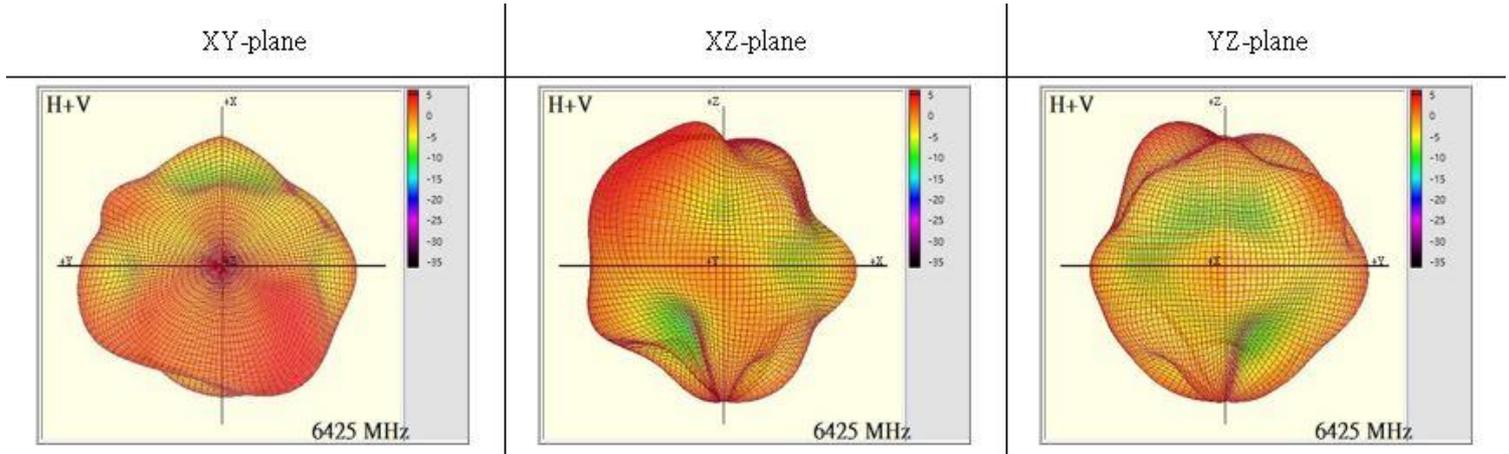


Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6525-6875 | 3.75 |

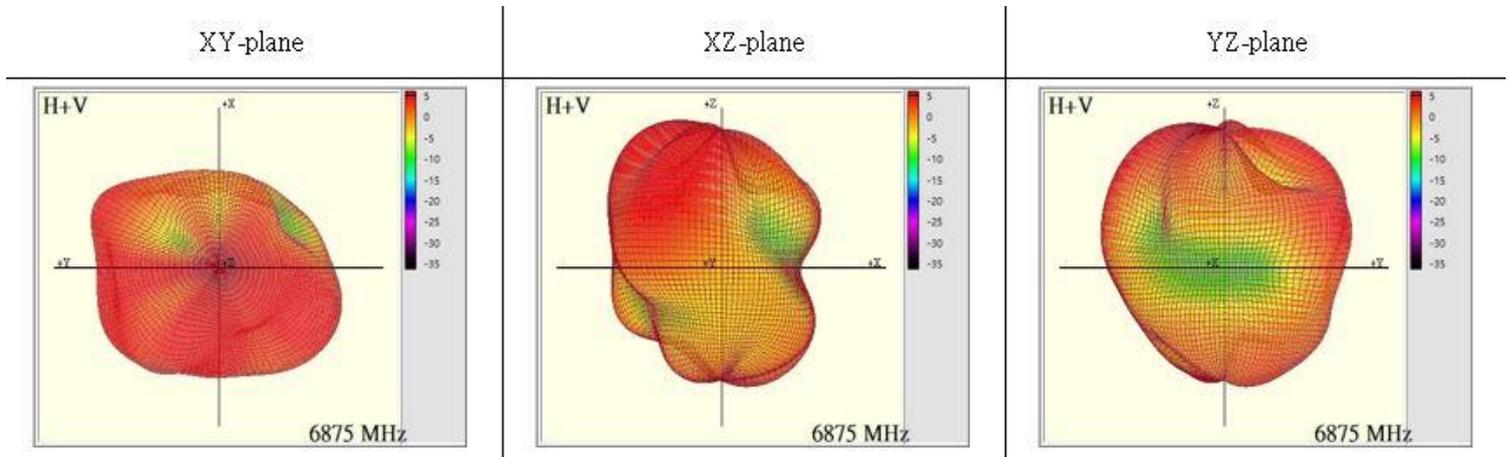

Max Antenna 3D Radiation Pattern 6875-7125 MHz


| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6875-7125 | 3.75 |

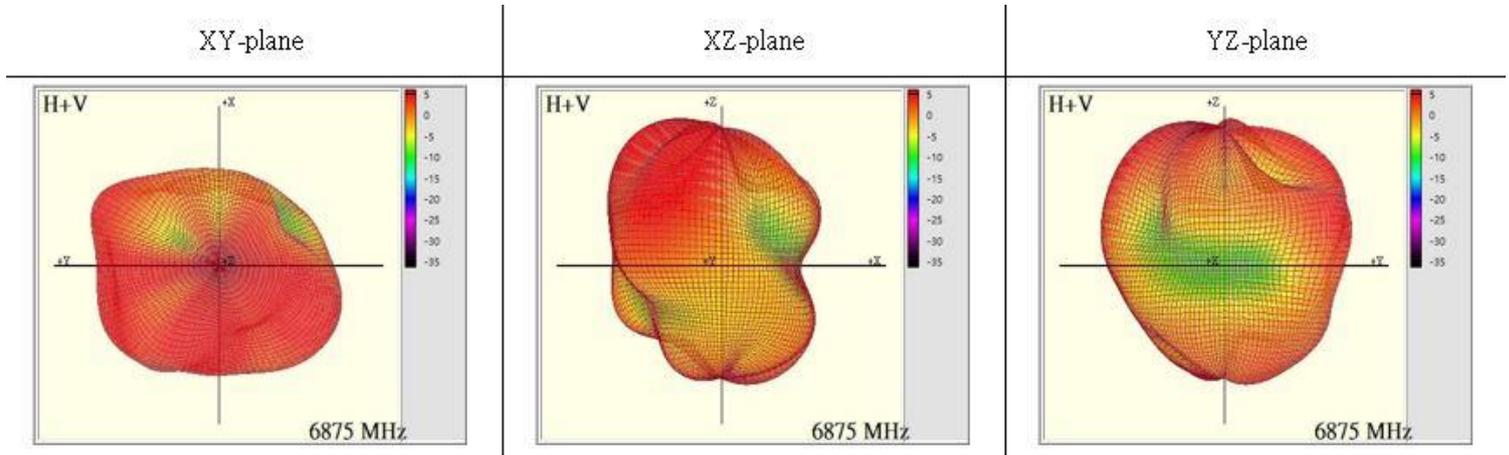

Section 4. Antenna Host Platform Location Information

Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).


Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

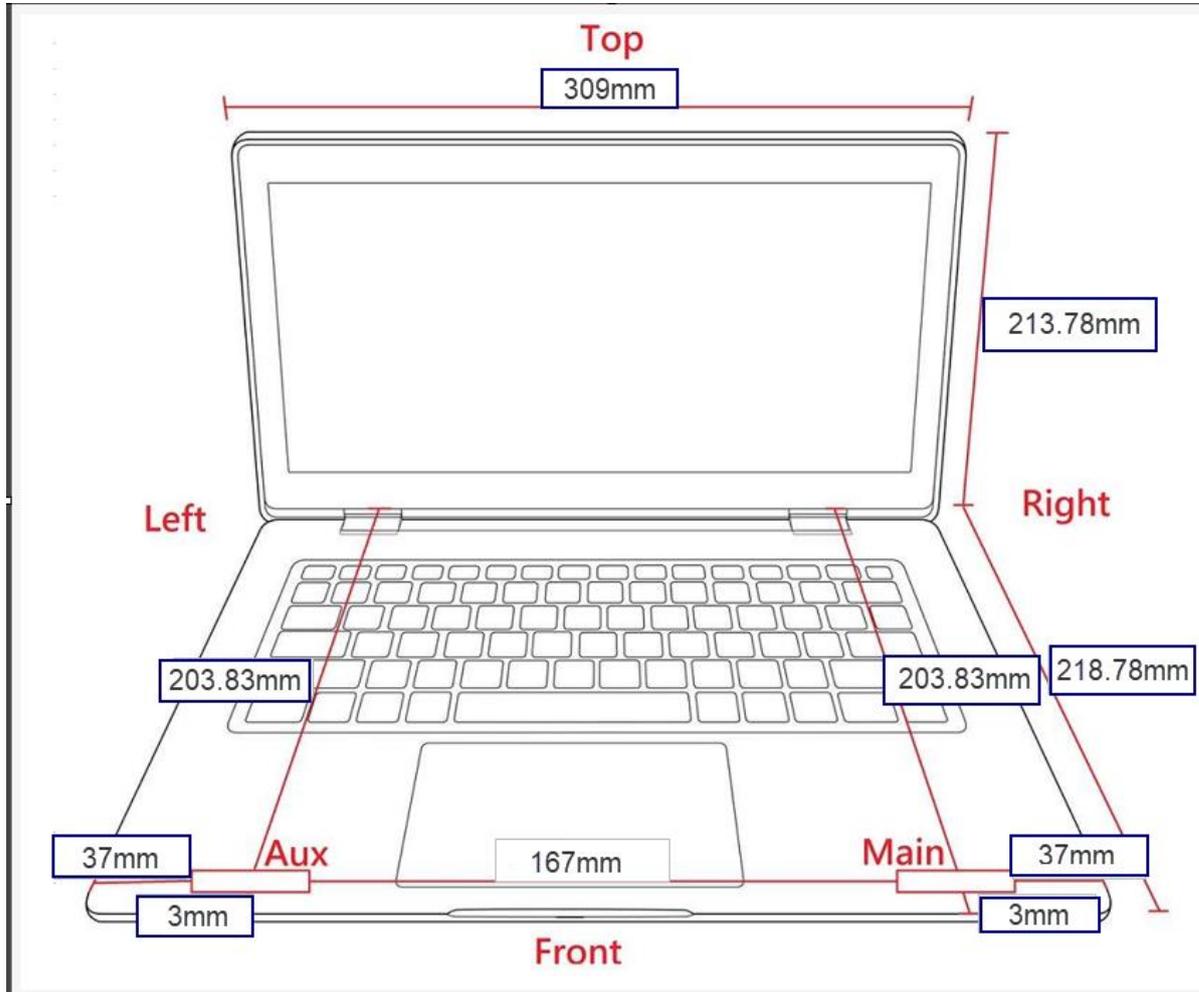


Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary

landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

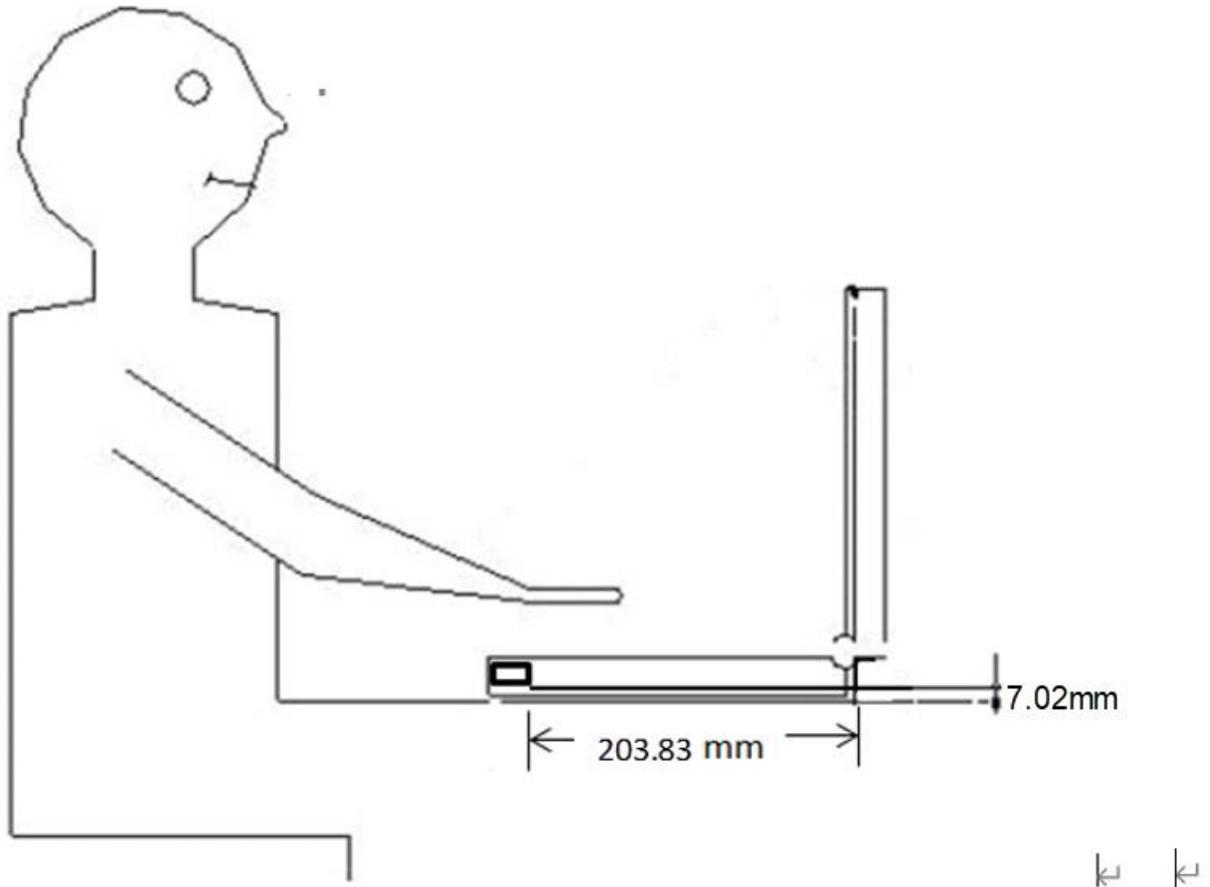

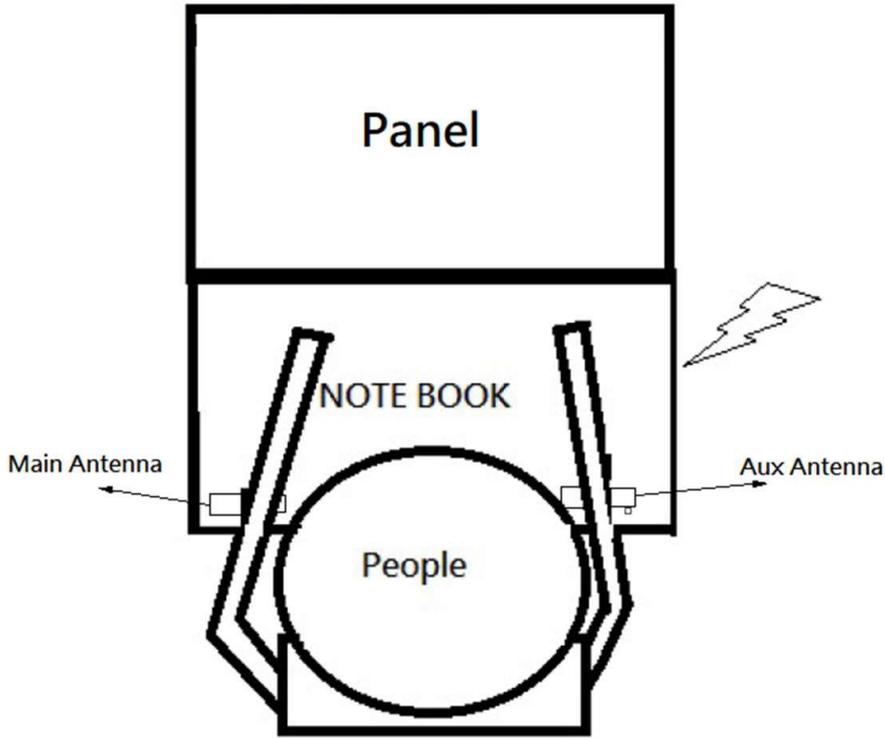

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between **all WLAN transmit antennas** and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

