



n14, Channel Bandwidth 10MHz

Channel 158600 (793.0MHz)

Frequency Range : 9kHz ~ 1GHz

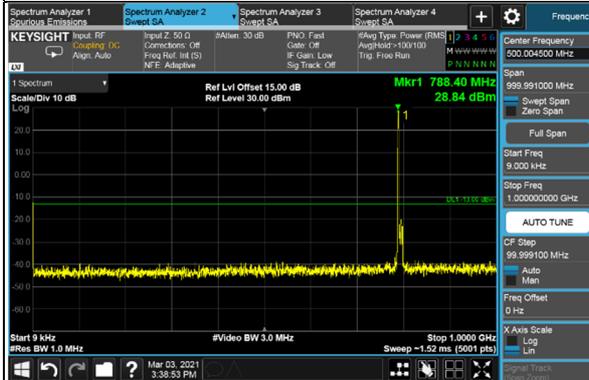

Frequency Range : 1.559GHz ~ 1.61GHz

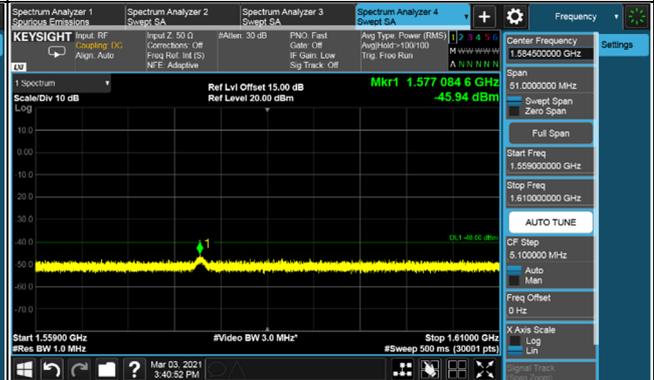

Frequency Range : 1GHz ~ 10GHz



\*The 9kHz signal over the limit is from Spectrum.

## 4.7 Radiated Emission Measurement

### 4.7.1 Limits of Radiated Emission Measurement

For n14:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission equal to  $-13$ dBm.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz. The limit of emissions is equal to  $-40$  dBm.

For LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13$ dBm.

### 4.7.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
  - $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
  - $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

### 4.7.3 Deviation from Test Standard


No deviation.

#### 4.7.4 Test Setup

For radiated emission 30MHz to 1GHz

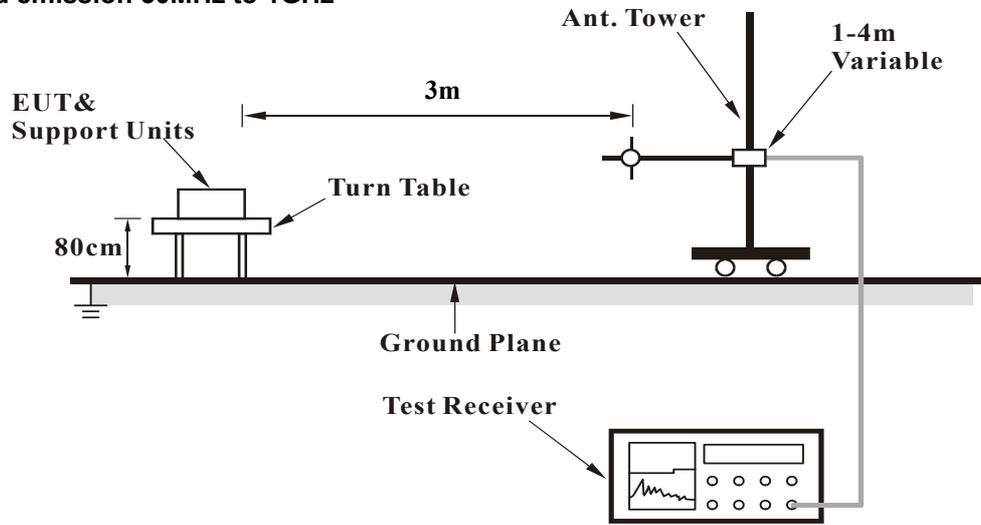

For radiated emission above 1GHz

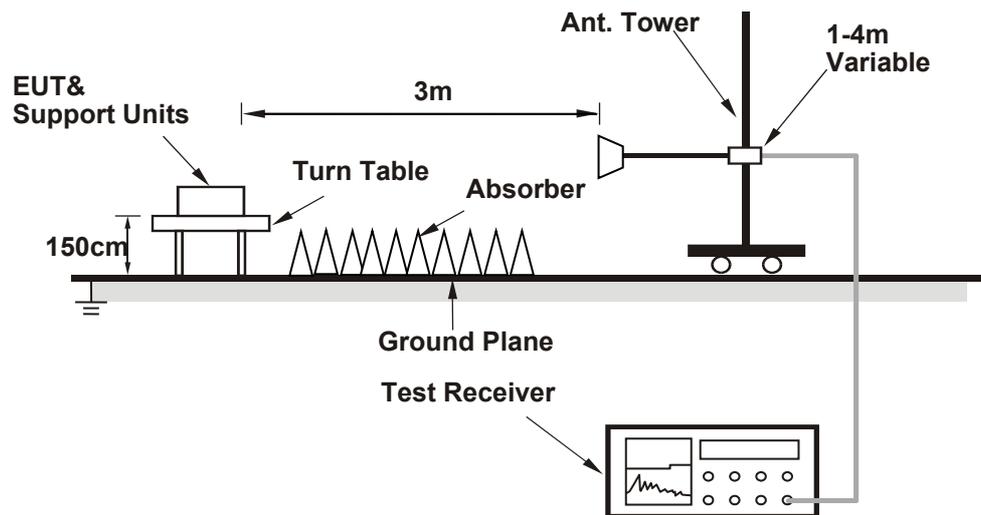

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.7.5 Test Results

Below 1GHz


n14, Channel Bandwidth 5MHz

Mode	TX channel 158600 (793.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-67.87	-13.00	-54.87	1.99 H	154	49.33	-117.20
2	79.47	-65.39	-13.00	-52.39	1.99 H	161	55.41	-120.80
3	164.83	-63.39	-13.00	-50.39	1.49 H	180	52.33	-115.72
4	191.02	-59.71	-13.00	-46.71	1.99 H	69	58.77	-118.48
5	244.37	-63.99	-13.00	-50.99	1.49 H	18	53.05	-117.04
6	340.40	-64.61	-13.00	-51.61	1.00 H	181	49.35	-113.96

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$ .
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$ .
4. The other ERP levels were very low against the limit.

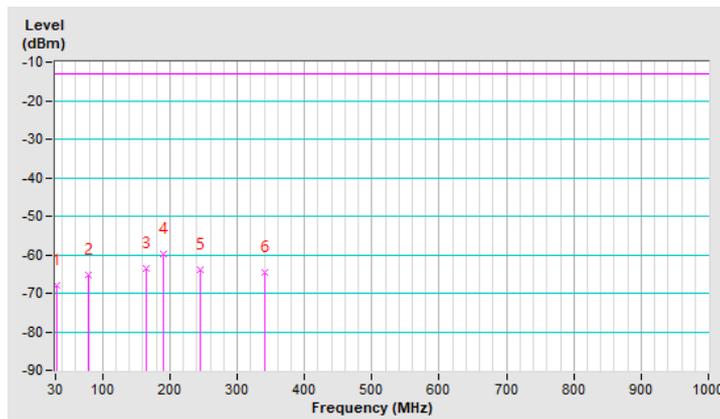


Mode	TX channel 158600 (793.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-55.54	-13.00	-42.54	1.01 V	18	61.58	-117.12
2	58.13	-59.11	-13.00	-46.11	1.01 V	259	57.42	-116.53
3	80.44	-65.06	-13.00	-52.06	1.50 V	294	56.02	-121.08
4	166.77	-62.78	-13.00	-49.78	1.01 V	316	52.94	-115.72
5	193.93	-67.60	-13.00	-54.60	1.01 V	184	51.30	-118.90
6	350.10	-69.57	-13.00	-56.57	1.51 V	194	44.38	-113.95

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$ .
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

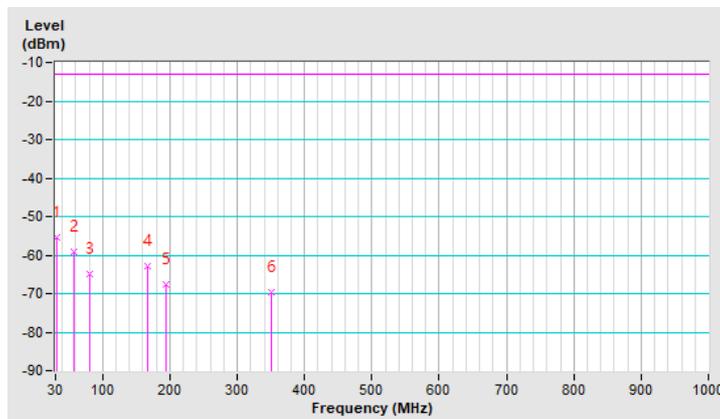


LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625 (1852.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	81.41	-66.17	-13.00	-53.17	1.00 H	153	52.99	-119.16
2	164.83	-62.11	-13.00	-49.11	1.00 H	100	51.46	-113.57
3	191.02	-58.56	-13.00	-45.56	2.00 H	48	57.77	-116.33
4	239.52	-61.54	-13.00	-48.54	1.00 H	60	53.53	-115.07
5	339.43	-63.37	-13.00	-50.37	2.00 H	2	48.44	-111.81
6	497.54	-65.85	-13.00	-52.85	1.00 H	7	42.30	-108.15

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

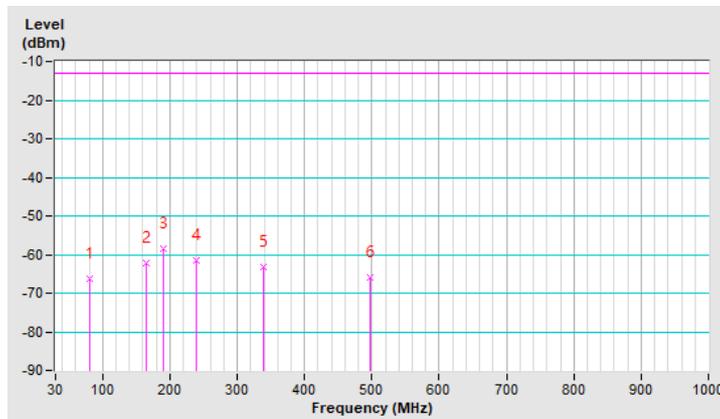


Mode	TX channel 18625 (1852.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-57.45	-13.00	-44.45	1.00 V	205	57.27	-114.72
2	57.16	-57.73	-13.00	-44.73	1.50 V	15	56.66	-114.39
3	81.41	-63.93	-13.00	-50.93	1.00 V	254	55.23	-119.16
4	164.83	-61.45	-13.00	-48.45	1.00 V	283	52.12	-113.57
5	185.20	-67.63	-13.00	-54.63	2.00 V	147	48.01	-115.64
6	345.25	-67.49	-13.00	-54.49	2.00 V	263	44.36	-111.85

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

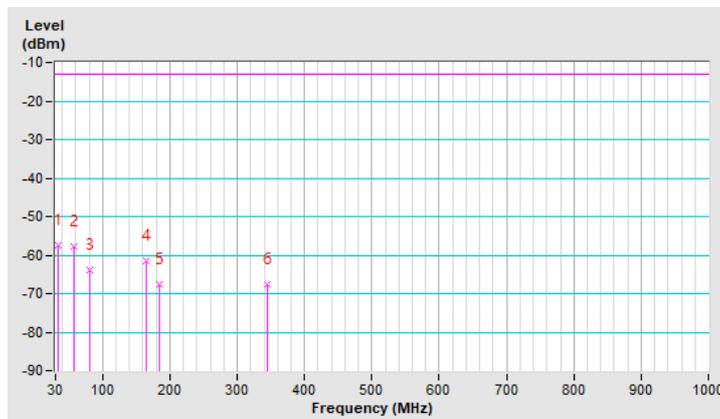

Above 1GHz

n14, Channel Bandwidth 5MHz

Mode	TX channel 158100 (790.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-52.50	-40.00	-12.50	1.50 H	125	44.60	-97.10
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1581.00	-51.70	-40.00	-11.70	1.34 V	211	45.40	-97.10

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 158600 (793.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-51.80	-40.00	-11.80	1.86 H	157	45.30	-97.10
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-51.30	-40.00	-11.30	1.54 V	313	45.80	-97.10

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 159100 (795.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-52.20	-40.00	-12.20	2.13 H	302	44.90	-97.10
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1591.00	-51.80	-40.00	-11.80	1.03 V	113	45.30	-97.10

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

n14, Channel Bandwidth 10MHz

Mode	TX channel 158600 (793.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1586.00	-51.20	-40.00	-11.20	1.23 H	105	45.90	-97.10
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
<b>1</b>	<b>1586.00</b>	<b>-50.70</b>	<b>-40.00</b>	<b>-10.70</b>	<b>2.11 V</b>	<b>13</b>	<b>46.40</b>	<b>-97.10</b>

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607 (1850.7MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-52.13	-13.00	-39.13	2.58 H	211	44.22	-96.35
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-51.12	-13.00	-38.12	1.52 V	300	45.23	-96.35

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.56	-13.00	-38.56	1.59 H	211	44.73	-96.29
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.09	-13.00	-39.09	1.02 V	133	44.20	-96.29

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19193 (1909.3MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-52.07	-13.00	-39.07	1.33 H	100	44.12	-96.19
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-51.31	-13.00	-38.31	2.08 V	137	44.88	-96.19

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625 (1852.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-51.62	-13.00	-38.62	1.54 H	303	44.73	-96.35
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
<b>1</b>	<b>3705.00</b>	<b>-51.05</b>	<b>-13.00</b>	<b>-38.05</b>	<b>1.33 V</b>	<b>36</b>	<b>45.30</b>	<b>-96.35</b>

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.26	-13.00	-38.26	2.42 H	101	45.03	-96.29
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.72	-13.00	-38.72	1.01 V	245	44.57	-96.29

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19175 (1907.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-52.13	-13.00	-39.13	1.34 H	175	44.06	-96.19
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-51.37	-13.00	-38.37	3.05 V	313	44.82	-96.19

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18700 (1860.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-51.21	-13.00	-38.21	1.34 H	175	45.13	-96.34
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-51.53	-13.00	-38.53	1.02 V	319	44.81	-96.34

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.16	-13.00	-38.16	1.52 H	318	45.13	-96.29
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.85	-13.00	-38.85	1.88 V	131	44.44	-96.29

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19100 (1900.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-51.99	-13.00	-38.99	2.42 H	135	44.23	-96.22
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-51.47	-13.00	-38.47	1.20 V	57	44.75	-96.22

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---