



65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,
169,
173,
177,
181,
185,
189,
193,
197,
201,
205,
209,



```
        213,  
        217,  
        221,  
        225,  
        229,  
        233  
    ]  
},  
{  
    "globalOperatingClass": 132,  
    "channelCfi": [  
        3,  
        11,  
        19,  
        27,  
        35,  
        43,  
        51,  
        59,  
        67,  
        75,  
        83,  
        91,  
        99,  
        107,  
        115,  
        123,  
        131,  
        139,  
        147,  
        155,  
        163,  
        171,  
        179,  
        187,  
        195,  
        203,
```



```
        211,  
        219,  
        227  
    ]  
},  
{  
    "globalOperatingClass": 133,  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
},  
{
```



```
        "globalOperatingClass": 136,
        "channelCfi": [
            2
        ]
    },
    {
        "globalOperatingClass": 137,
        "channelCfi": [
            31,
            63,
            95,
            127,
            159,
            191
        ]
    }
],
"minDesiredPower": -1
}
]
}
}
```

2025-02-25T07:33:23Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
        }
      ]
    }
  ]
}
```

```
"maxPsd": 18.8
},
{
  "frequencyRange": {
    "highFrequency": 5985,
    "lowFrequency": 5965
  },
  "maxPsd": 18.8
},
{
  "frequencyRange": {
    "highFrequency": 6005,
    "lowFrequency": 5985
  },
  "maxPsd": 14.3
},
{
  "frequencyRange": {
    "highFrequency": 6025,
    "lowFrequency": 6005
  },
  "maxPsd": 16.4
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 16.4
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 14.5
},
},
```



```
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 16.9
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 21.7
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 18.1
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 15.4
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 16.1
},
{
  "frequencyRange": {
```



```
        "highFrequency": 6185,
        "lowFrequency": 6165
    },
    "maxPsd": 9.6
},
{
    "frequencyRange": {
        "highFrequency": 6605,
        "lowFrequency": 6585
    },
    "maxPsd": 20.9
},
{
    "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 12.7
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
    },
    "maxPsd": 12.2
},
{
    "frequencyRange": {
        "highFrequency": 6665,
        "lowFrequency": 6645
    },
    "maxPsd": 9.3
},
{
    "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
```

```
    },
    "maxPsd": 11.1
  },
  {
    "frequencyRange": {
      "highFrequency": 6785,
      "lowFrequency": 6765
    },
    "maxPsd": 15.1
  },
  {
    "frequencyRange": {
      "highFrequency": 6805,
      "lowFrequency": 6785
    },
    "maxPsd": 11.8
  },
  {
    "frequencyRange": {
      "highFrequency": 6825,
      "lowFrequency": 6805
    },
    "maxPsd": 17.6
  }
],
"availableChannelInfo": [
  {
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
```



```
37,  
41,  
45,  
129,  
133,  
137,  
141,  
161,  
165,  
169,  
173  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
31.8,  
31.8,  
27.3,  
29.4,  
29.4,  
27.5,  
29.9,  
34.7,  
31.1,  
28.4,  
29.1,  
22.6,  
33.9,  
25.7,  
25.2,  
22.3,  
24.1,  
28.1,  
24.8,  
30.6  
]  
},  
{
```



```
"channelCfi": [  
  3,  
  11,  
  19,  
  27,  
  35,  
  43,  
  131,  
  139,  
  163,  
  171  
],  
"globalOperatingClass": 132,  
"maxEirp": [  
  34.8,  
  30.3,  
  30.5,  
  32.9,  
  31.4,  
  25.6,  
  28.7,  
  25.3,  
  27.1,  
  27.8  
]  
},  
{  
  "channelCfi": [  
    7,  
    23,  
    39,  
    135,  
    167  
  ],  
  "globalOperatingClass": 133,  
  "maxEirp": [  
    33.3,
```



```
        33.5,
        28.6,
        28.3,
        30.1
    ]
},
{
    "channelCfi": [
        15
    ],
    "globalOperatingClass": 134,
    "maxEirp": [
        36.0
    ]
}
],
"requestId": "22955806",
"availabilityExpireTime": "2025-02-26T07:33:22Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1

2025-02-25T07:41:06Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
```



```
"Content-Length": "1493",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "54203988",
      "deviceDescriptor": {
        "serialNumber": "W1701K2405000030",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "MXF-W1701K"
          }
        ]
      }
    },
    {
      "location": {
        "ellipse": {
          "center": {
            "longitude": -121.985869,
            "latitude": 37.381933
          },
          "majorAxis": 150,
          "minorAxis": 150,
          "orientation": 0
        },
        "elevation": {
          "height": 15,
          "heightType": "AGL",
          "verticalUncertainty": 2
        },
        "indoorDeployment": 0
      },
      "inquiredFrequencyRange": [
        {
          "lowFrequency": 5925,
```



```
        "highFrequency": 6425
      },
      {
        "lowFrequency": 6525,
        "highFrequency": 6875
      }
    ],
    "inquiredChannels": [
      {
        "globalOperatingClass": 131,
        "channelCfi": [
          1,
          5,
          9,
          13,
          17,
          21,
          25,
          29,
          33,
          37,
          41,
          45,
          49,
          53,
          57,
          61,
          65,
          69,
          73,
          77,
          81,
          85,
          89,
          93,
          97,
          101,
```



```
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,
```



```
"channelCfi": [  
  3,  
  11,  
  19,  
  27,  
  35,  
  43,  
  51,  
  59,  
  67,  
  75,  
  83,  
  91,  
  99,  
  107,  
  115,  
  123,  
  131,  
  139,  
  147,  
  155,  
  163,  
  171,  
  179,  
  187,  
  195,  
  203,  
  211,  
  219,  
  227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,
```



```
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
},  
{  
    "globalOperatingClass": 136,  
    "channelCfi": [  
        2  
    ]  
},  
{  
    "globalOperatingClass": 137,  
    "channelCfi": [  
        31,  
        63,
```



```
        95,  
        127,  
        159,  
        191  
    ]  
  }  
],  
"minDesiredPower": -1  
}  
]  
}  
}
```

2025-02-25T07:41:07Z

```
{  
  "availableSpectrumInquiryResponses": [  
    {  
      "response": {  
        "responseCode": 0,  
        "shortDescription": "SUCCESS"  
      },  
      "availableFrequencyInfo": [  
        {  
          "frequencyRange": {  
            "highFrequency": 6045,  
            "lowFrequency": 6025  
          },  
          "maxPsd": 18.1  
        },  
        {  
          "frequencyRange": {  
            "highFrequency": 6065,  
            "lowFrequency": 6045  
          },  
          "maxPsd": 15.7  
        },  
        {
```



```
"frequencyRange": {
  "highFrequency": 6085,
  "lowFrequency": 6065
},
"maxPsd": 12.5
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 8.4
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 15.8
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 12.6
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 18.1
},
{
  "frequencyRange": {
    "highFrequency": 6665,
```



```
        "lowFrequency": 6645
      },
      "maxPsd": 18.8
    },
    {
      "frequencyRange": {
        "highFrequency": 6685,
        "lowFrequency": 6665
      },
      "maxPsd": 16.8
    },
    {
      "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
      },
      "maxPsd": 11.3
    },
    {
      "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
      },
      "maxPsd": 12.6
    },
    {
      "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
      },
      "maxPsd": 10.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
      },
    },
```

```
"maxPsd": 21.2
},
{
  "frequencyRange": {
    "highFrequency": 6785,
    "lowFrequency": 6765
  },
  "maxPsd": 10.0
},
{
  "frequencyRange": {
    "highFrequency": 6805,
    "lowFrequency": 6785
  },
  "maxPsd": 18.7
},
{
  "frequencyRange": {
    "highFrequency": 6825,
    "lowFrequency": 6805
  },
  "maxPsd": 17.7
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      17,
      21,
      25,
      29,
      129,
      133,
      137,
      141,
      145,
      149,
```



```
153,  
157,  
161,  
165,  
169,  
173  
,  
"globalOperatingClass": 131,  
"maxEirp": [  
  31.1,  
  28.7,  
  25.5,  
  21.4,  
  28.8,  
  25.6,  
  31.1,  
  31.8,  
  29.8,  
  24.3,  
  25.6,  
  23.2,  
  34.2,  
  23.0,  
  31.7,  
  30.7  
]  
},  
{  
  "channelCfi": [  
    19,  
    27,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171
```



```
],
  "globalOperatingClass": 132,
  "maxEirp": [
    31.7,
    24.4,
    28.6,
    34.1,
    27.3,
    26.2,
    26.0,
    33.7
  ]
},
{
  "channelCfi": [
    23,
    135,
    151,
    167
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    27.4,
    31.6,
    29.2,
    29.0
  ]
},
{
  "channelCfi": [
    143
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    32.2
  ]
}
```



```
    ],
    "requestId": "54203988",
    "availabilityExpireTime": "2025-02-26T07:41:07Z",
    "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
  }
],
"version": "1.4"
}

##### 2025-02-25T07:44:22Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1493",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "54203989",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MXF-W1701K"
            }
          ]
        }
      }
    ]
  },
}
```



```
"location": {
  "ellipse": {
    "center": {
      "longitude": -121.985869,
      "latitude": 37.381933
    },
    "majorAxis": 150,
    "minorAxis": 150,
    "orientation": 0
  },
  "elevation": {
    "height": 15,
    "heightType": "AGL",
    "verticalUncertainty": 2
  },
  "indoorDeployment": 0
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
```



25,
29,
33,
37,
41,
45,
49,
53,
57,
61,
65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,
169,



```
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,
```



```
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215  
  ]  
},  
{  
  "globalOperatingClass": 134,  
  "channelCfi": [  

```



```
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
},  
{  
    "globalOperatingClass": 136,  
    "channelCfi": [  
        2  
    ]  
},  
{  
    "globalOperatingClass": 137,  
    "channelCfi": [  
        31,  
        63,  
        95,  
        127,  
        159,  
        191  
    ]  
}  
],  
"minDesiredPower": -1  
}  
]  
}  
}
```

2025-02-25T07:44:22Z

```
{  
    "availableSpectrumInquiryResponses": [  
        {
```



```
"response": {
  "responseCode": 0,
  "shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 5965,
      "lowFrequency": 5945
    },
    "maxPsd": 19.6
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 11.0
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 11.0
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 19.6
  },
  {
    "frequencyRange": {
      "highFrequency": 6125,
      "lowFrequency": 6105
    }
  }
]
```

```
    },
    "maxPsd": 21.7
  },
  {
    "frequencyRange": {
      "highFrequency": 6145,
      "lowFrequency": 6125
    },
    "maxPsd": 13.9
  },
  {
    "frequencyRange": {
      "highFrequency": 6165,
      "lowFrequency": 6145
    },
    "maxPsd": 17.5
  },
  {
    "frequencyRange": {
      "highFrequency": 6185,
      "lowFrequency": 6165
    },
    "maxPsd": 21.9
  },
  {
    "frequencyRange": {
      "highFrequency": 6205,
      "lowFrequency": 6185
    },
    "maxPsd": 9.2
  },
  {
    "frequencyRange": {
      "highFrequency": 6225,
      "lowFrequency": 6205
    },
    "maxPsd": 12.4
  }
```



```
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 16.2
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 20.5
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 16.8
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 13.5
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 16.9
},
{
```



```
"frequencyRange": {
  "highFrequency": 6345,
  "lowFrequency": 6325
},
"maxPsd": 18.2
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 18.6
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 18.5
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 11.9
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 18.1
}
],
"availableChannelInfo": [
  {
```



```
"channelCfi": [  
  1,  
  5,  
  9,  
  13,  
  33,  
  37,  
  41,  
  45,  
  49,  
  53,  
  57,  
  61,  
  65,  
  69,  
  73,  
  77,  
  81,  
  85,  
  89,  
  93  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
  32.6,  
  24.0,  
  24.0,  
  32.6,  
  34.7,  
  26.9,  
  30.5,  
  34.9,  
  22.2,  
  25.4,  
  29.2,  
  33.5,  
  29.8,
```



```
        26.5,  
        29.9,  
        31.2,  
        31.6,  
        31.5,  
        24.9,  
        31.1  
    ]  
},  
{  
    "channelCfi": [  
        3,  
        11,  
        35,  
        43,  
        51,  
        59,  
        67,  
        75,  
        83,  
        91  
    ],  
    "globalOperatingClass": 132,  
    "maxEirp": [  
        27.0,  
        27.0,  
        29.9,  
        33.5,  
        25.2,  
        32.2,  
        29.5,  
        32.9,  
        34.5,  
        27.9  
    ]  
},  
{
```



```
"channelCfi": [  
    7,  
    39,  
    55,  
    71,  
    87  
],  
"globalOperatingClass": 133,  
"maxEirp": [  
    30.0,  
    32.9,  
    28.2,  
    32.5,  
    30.9  
]  
},  
{  
    "channelCfi": [  
        47,  
        79  
    ],  
    "globalOperatingClass": 134,  
    "maxEirp": [  
        31.2,  
        33.9  
    ]  
},  
{  
    "channelCfi": [  
        63  
    ],  
    "globalOperatingClass": 137,  
    "maxEirp": [  
        34.3  
    ]  
}  
],
```



```
        "requestId": "54203989",
        "availabilityExpireTime": "2025-02-26T07:44:22Z",
        "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1

2025-02-25T08:06:24Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1493",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "82666579",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MXF-W1701K"
            }
          ]
        }
      }
    ]
  }
}
```



```
},
"location": {
  "ellipse": {
    "center": {
      "longitude": -121.985869,
      "latitude": 37.381933
    },
    "majorAxis": 150,
    "minorAxis": 150,
    "orientation": 0
  },
  "elevation": {
    "height": 15,
    "heightType": "AGL",
    "verticalUncertainty": 2
  },
  "indoorDeployment": 0
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
```



21,
25,
29,
33,
37,
41,
45,
49,
53,
57,
61,
65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,



```
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,
```



```
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215  
  ]  
},  
{  
  "globalOperatingClass": 134,
```



```
        "channelCfi": [
            15,
            47,
            79,
            111,
            143,
            175,
            207
        ]
    },
    {
        "globalOperatingClass": 136,
        "channelCfi": [
            2
        ]
    },
    {
        "globalOperatingClass": 137,
        "channelCfi": [
            31,
            63,
            95,
            127,
            159,
            191
        ]
    }
],
"minDesiredPower": -1
}
]
}
}
```

2025-02-25T08:06:24Z

```
{
    "availableSpectrumInquiryResponses": [
```



```
{
  "response": {
    "responseCode": 0,
    "shortDescription": "SUCCESS"
  },
  "availableFrequencyInfo": [
    {
      "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
      },
      "maxPsd": 20.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
      "maxPsd": 17.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
      },
      "maxPsd": 19.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
      },
      "maxPsd": 16.6
    },
    {
      "frequencyRange": {
        "highFrequency": 6205,
```



```
        "lowFrequency": 6185
      },
      "maxPsd": 11.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6225,
        "lowFrequency": 6205
      },
      "maxPsd": 17.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6245,
        "lowFrequency": 6225
      },
      "maxPsd": 20.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6265,
        "lowFrequency": 6245
      },
      "maxPsd": 9.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6605,
        "lowFrequency": 6585
      },
      "maxPsd": 16.4
    },
    {
      "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
      },
    },
```

```
"maxPsd": 10.4
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 9.5
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 11.5
},
{
  "frequencyRange": {
    "highFrequency": 6685,
    "lowFrequency": 6665
  },
  "maxPsd": 13.7
},
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 13.1
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 14.9
},
},
```



```
{
  "frequencyRange": {
    "highFrequency": 6745,
    "lowFrequency": 6725
  },
  "maxPsd": 15.1
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
      129,
      133,
      137,
      141,
      145,
      149,
      153,
      157
    ],
    "globalOperatingClass": 131,
    "maxEirp": [
      33.7,
      30.9,
      32.0,
      29.6,
      24.5,
      30.5,
      33.9,
```



```
    22.0,  
    29.4,  
    23.4,  
    22.5,  
    24.5,  
    26.7,  
    26.1,  
    27.9,  
    28.1  
  ]  
},  
{  
  "channelCfi": [  
    35,  
    43,  
    51,  
    59,  
    131,  
    139,  
    147,  
    155  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    33.9,  
    32.6,  
    27.5,  
    25.0,  
    26.4,  
    25.5,  
    29.1,  
    30.9  
  ]  
},  
{  
  "channelCfi": [  
    39,
```



```

    55,
    135,
    151
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    35.6,
    28.0,
    28.5,
    32.1
  ]
},
{
  "channelCfi": [
    47,
    143
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    31.0,
    31.5
  ]
}
],
"requestId": "82666579",
"availabilityExpireTime": "2025-02-26T08:06:24Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}

```

2025-02-25T08:08:29Z

```

{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",

```

```
"Accept": "application/json",
"Content-Type": "application/json",
"Expect": "100-continue",
"X-Forwarded-For": "192.168.50.179",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "1493",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "82666580",
      "deviceDescriptor": {
        "serialNumber": "W1701K2405000030",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "MXF-W1701K"
          }
        ]
      }
    }
  ],
  "location": {
    "ellipse": {
      "center": {
        "longitude": -121.985869,
        "latitude": 37.381933
      },
      "majorAxis": 150,
      "minorAxis": 150,
      "orientation": 0
    },
    "elevation": {
      "height": 15,
      "heightType": "AGL",
      "verticalUncertainty": 2
    }
  }
}
```



```
    },
    "indoorDeployment": 0
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "inquiredChannels": [
    {
      "globalOperatingClass": 131,
      "channelCfi": [
        1,
        5,
        9,
        13,
        17,
        21,
        25,
        29,
        33,
        37,
        41,
        45,
        49,
        53,
        57,
        61,
        65,
        69,
        73,
        77,
```



81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,
169,
173,
177,
181,
185,
189,
193,
197,
201,
205,
209,
213,
217,
221,
225,



```
        229,  
        233  
    ]  
},  
{  
    "globalOperatingClass": 132,  
    "channelCfi": [  
        3,  
        11,  
        19,  
        27,  
        35,  
        43,  
        51,  
        59,  
        67,  
        75,  
        83,  
        91,  
        99,  
        107,  
        115,  
        123,  
        131,  
        139,  
        147,  
        155,  
        163,  
        171,  
        179,  
        187,  
        195,  
        203,  
        211,  
        219,  
        227  
    ]  
}
```



```
},
{
  "globalOperatingClass": 133,
  "channelCfi": [
    7,
    23,
    39,
    55,
    71,
    87,
    103,
    119,
    135,
    151,
    167,
    183,
    199,
    215
  ]
},
{
  "globalOperatingClass": 134,
  "channelCfi": [
    15,
    47,
    79,
    111,
    143,
    175,
    207
  ]
},
{
  "globalOperatingClass": 136,
  "channelCfi": [
    2
  ]
}
```



```
    },
    {
      "globalOperatingClass": 137,
      "channelCfi": [
        31,
        63,
        95,
        127,
        159,
        191
      ]
    }
  ],
  "minDesiredPower": -1
}
]
}
}
```

2025-02-25T08:08:30Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 14.3
        },
        {
          "frequencyRange": {
```



```
        "highFrequency": 5985,
        "lowFrequency": 5965
    },
    "maxPsd": 14.2
},
{
    "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
    },
    "maxPsd": 16.8
},
{
    "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
    },
    "maxPsd": 11.9
},
{
    "frequencyRange": {
        "highFrequency": 6045,
        "lowFrequency": 6025
    },
    "maxPsd": 17.5
},
{
    "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
    },
    "maxPsd": 8.8
},
{
    "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
```

```
    },
    "maxPsd": 17.1
  },
  {
    "frequencyRange": {
      "highFrequency": 6105,
      "lowFrequency": 6085
    },
    "maxPsd": 20.0
  },
  {
    "frequencyRange": {
      "highFrequency": 6285,
      "lowFrequency": 6265
    },
    "maxPsd": 15.8
  },
  {
    "frequencyRange": {
      "highFrequency": 6305,
      "lowFrequency": 6285
    },
    "maxPsd": 9.3
  },
  {
    "frequencyRange": {
      "highFrequency": 6325,
      "lowFrequency": 6305
    },
    "maxPsd": 19.3
  },
  {
    "frequencyRange": {
      "highFrequency": 6345,
      "lowFrequency": 6325
    },
    "maxPsd": 18.2
  }
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 11.3
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 14.5
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 11.3
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 21.9
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      1,
      5,
      9,
      13,
```



```
17,  
21,  
25,  
29,  
65,  
69,  
73,  
77,  
81,  
85,  
89,  
93  
,  
"globalOperatingClass": 131,  
"maxEirp": [  
27.3,  
27.2,  
29.8,  
24.9,  
30.5,  
21.8,  
30.1,  
33.0,  
28.8,  
22.3,  
32.3,  
31.2,  
24.3,  
27.5,  
24.3,  
34.9  
]  
},  
{  
"channelCfi": [  
3,  
11,
```



```
    19,  
    27,  
    67,  
    75,  
    83,  
    91  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    30.2,  
    27.9,  
    24.8,  
    33.1,  
    25.3,  
    34.2,  
    27.3,  
    27.3  
  ]  
},  
{  
  "channelCfi": [  
    7,  
    23,  
    71,  
    87  
  ],  
  "globalOperatingClass": 133,  
  "maxEirp": [  
    30.9,  
    27.8,  
    28.3,  
    30.3  
  ]  
},  
{  
  "channelCfi": [  
    15,
```



```
79
    ],
    "globalOperatingClass": 134,
    "maxEirp": [
        30.8,
        31.3
    ]
}
],
"requestId": "82666580",
"availabilityExpireTime": "2025-02-26T08:08:30Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_320MHz_10715_1

2025-02-25T08:33:46Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1493",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
```



```
"requestId": "49728131",
"deviceDescriptor": {
  "serialNumber": "W1701K2405000030",
  "certificationId": [
    {
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
      "id": "MXF-W1701K"
    }
  ]
},
"location": {
  "ellipse": {
    "center": {
      "longitude": -121.985869,
      "latitude": 37.381933
    },
    "majorAxis": 150,
    "minorAxis": 150,
    "orientation": 0
  },
  "elevation": {
    "height": 15,
    "heightType": "AGL",
    "verticalUncertainty": 2
  },
  "indoorDeployment": 0
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
```



```
"inquiredChannels": [  
  {  
    "globalOperatingClass": 131,  
    "channelCfi": [  
      1,  
      5,  
      9,  
      13,  
      17,  
      21,  
      25,  
      29,  
      33,  
      37,  
      41,  
      45,  
      49,  
      53,  
      57,  
      61,  
      65,  
      69,  
      73,  
      77,  
      81,  
      85,  
      89,  
      93,  
      97,  
      101,  
      105,  
      109,  
      113,  
      117,  
      121,  
      125,  
      129,
```



```
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,
```



```
51,  
59,  
67,  
75,  
83,  
91,  
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,
```



```
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
},  
{  
    "globalOperatingClass": 136,  
    "channelCfi": [  
        2  
    ]  
},  
{  
    "globalOperatingClass": 137,  
    "channelCfi": [  
        31,  
        63,  
        95,  
        127,  
        159,  
        191  
    ]  
}  
],
```



```
        "minDesiredPower": -1
      }
    ]
  }
}
```

2025-02-25T08:33:46Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 13.4
        },
        {
          "frequencyRange": {
            "highFrequency": 5985,
            "lowFrequency": 5965
          },
          "maxPsd": 17.3
        },
        {
          "frequencyRange": {
            "highFrequency": 6005,
            "lowFrequency": 5985
          },
          "maxPsd": 19.6
        },
        {

```



```
"frequencyRange": {
  "highFrequency": 6025,
  "lowFrequency": 6005
},
"maxPsd": 19.4
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 9.6
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 12.4
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 17.6
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 10.3
},
{
  "frequencyRange": {
    "highFrequency": 6125,
```



```
        "lowFrequency": 6105
      },
      "maxPsd": 19.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
      "maxPsd": 16.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
      },
      "maxPsd": 12.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
      },
      "maxPsd": 10.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6205,
        "lowFrequency": 6185
      },
      "maxPsd": 16.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6225,
        "lowFrequency": 6205
      },
    },
```



```
    "maxPsd": 16.3
  },
  {
    "frequencyRange": {
      "highFrequency": 6245,
      "lowFrequency": 6225
    },
    "maxPsd": 9.8
  },
  {
    "frequencyRange": {
      "highFrequency": 6265,
      "lowFrequency": 6245
    },
    "maxPsd": 8.8
  }
],
"availableChannelInfo": [
  {
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61
    ]
  }
],
```



```
"globalOperatingClass": 131,  
  "maxEirp": [  
    26.4,  
    30.3,  
    32.6,  
    32.4,  
    22.6,  
    25.4,  
    30.6,  
    23.3,  
    32.0,  
    29.0,  
    25.9,  
    23.5,  
    29.2,  
    29.3,  
    22.8,  
    21.8  
  ]  
},  
{  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    29.4,  
    35.4,  
    25.6,  
    26.3,
```



```
        32.0,  
        26.5,  
        32.2,  
        24.8  
    ]  
},  
{  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55  
    ],  
    "globalOperatingClass": 133,  
    "maxEirp": [  
        32.4,  
        28.6,  
        29.5,  
        27.8  
    ]  
},  
{  
    "channelCfi": [  
        15,  
        47  
    ],  
    "globalOperatingClass": 134,  
    "maxEirp": [  
        31.6,  
        30.8  
    ]  
},  
{  
    "channelCfi": [  
        31  
    ],  
    "globalOperatingClass": 137,
```



```
        "maxEirp": [
            33.9
        ]
    }
],
"requestId": "49728131",
"availabilityExpireTime": "2025-02-26T08:33:46Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

2025-02-25T08:36:14Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1493",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "49728132",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
```



```
        "id": "MXF-W1701K"
      }
    ]
  },
  "location": {
    "ellipse": {
      "center": {
        "longitude": -121.985869,
        "latitude": 37.381933
      },
      "majorAxis": 150,
      "minorAxis": 150,
      "orientation": 0
    },
    "elevation": {
      "height": 15,
      "heightType": "AGL",
      "verticalUncertainty": 2
    },
    "indoorDeployment": 0
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "inquiredChannels": [
    {
      "globalOperatingClass": 131,
      "channelCfi": [
        1,
        5,
```



9,
13,
17,
21,
25,
29,
33,
37,
41,
45,
49,
53,
57,
61,
65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,



```
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,
```



```
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215  
  ]  
}
```



```
    },
    {
      "globalOperatingClass": 134,
      "channelCfi": [
        15,
        47,
        79,
        111,
        143,
        175,
        207
      ]
    },
    {
      "globalOperatingClass": 136,
      "channelCfi": [
        2
      ]
    },
    {
      "globalOperatingClass": 137,
      "channelCfi": [
        31,
        63,
        95,
        127,
        159,
        191
      ]
    }
  ],
  "minDesiredPower": -1
}
]
}
```



2025-02-25T08:36:14Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6125,
            "lowFrequency": 6105
          },
          "maxPsd": 3.5
        },
        {
          "frequencyRange": {
            "highFrequency": 6145,
            "lowFrequency": 6125
          },
          "maxPsd": 4.2
        },
        {
          "frequencyRange": {
            "highFrequency": 6165,
            "lowFrequency": 6145
          },
          "maxPsd": 7.8
        },
        {
          "frequencyRange": {
            "highFrequency": 6185,
            "lowFrequency": 6165
          },
          "maxPsd": 11.8
        }
      ]
    }
  ]
}
```



```
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 6.7
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 6.8
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 4.2
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 4.4
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 9.1
},
{
  "frequencyRange": {
```



```
        "highFrequency": 6305,
        "lowFrequency": 6285
    },
    "maxPsd": 2.4
},
{
    "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
    },
    "maxPsd": 6.1
},
{
    "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
    },
    "maxPsd": 3.5
},
{
    "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
    },
    "maxPsd": 5.1
},
{
    "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
    },
    "maxPsd": 9.8
},
{
    "frequencyRange": {
        "highFrequency": 6405,
        "lowFrequency": 6385
```



```
    },
    "maxPsd": 9.5
  },
  {
    "frequencyRange": {
      "highFrequency": 6425,
      "lowFrequency": 6405
    },
    "maxPsd": 8.0
  }
],
"availableChannelInfo": [
  {
    "channelCfi": [
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
      65,
      69,
      73,
      77,
      81,
      85,
      89,
      93
    ],
    "globalOperatingClass": 131,
    "maxEirp": [
      16.5,
      17.2,
      20.8,
      24.8,
```



```
19.7,  
19.8,  
17.2,  
17.4,  
22.1,  
15.4,  
19.1,  
16.5,  
18.1,  
22.8,  
22.5,  
21.0  
]  
,  
{  
  "channelCfi": [  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    19.5,  
    23.8,  
    22.7,  
    20.2,  
    18.4,  
    19.5,  
    21.1,  
    24.0  
  ]  
},
```



```
{
  "channelCfi": [
    39,
    55,
    71,
    87
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    22.5,
    23.2,
    21.4,
    24.1
  ]
},
{
  "channelCfi": [
    47,
    79
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    25.5,
    24.4
  ]
},
{
  "channelCfi": [
    63
  ],
  "globalOperatingClass": 137,
  "maxEirp": [
    27.5
  ]
}
],
"requestId": "49728132",
```



```
"availabilityExpireTime": "2025-02-26T08:36:14Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
  "version": "1.4"  
}
```



Transmitting Power Measurement

AFC Capability – Inquired Frequency

AFCD.RSA: Successful spectrum access update												
Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6135	LPI	20	14.28	4.20	18.48	-	N/A	0.59	4.20	4.79	5	Pass
6815	SP	20	19.72	5.31	25.03	-	N/A	6.06	5.31	11.37	11.7	Pass
6735	SP	20	21.22	5.31	26.53	-	N/A	7.58	5.31	12.89	13.3	Pass
6125	LPI	40	17.45	4.20	21.65	-	N/A	0.70	4.20	4.90	5	Pass
6125	SP	40	19.94	4.20	24.14	-	N/A	3.21	4.20	7.41	9.4	Pass
6805	SP	40	22.98	5.31	28.29	-	N/A	6.36	5.31	11.67	11.8	Pass
6785	LPI	80	19.19	5.31	24.50	-	N/A	-0.66	5.31	4.65	5	Pass
6385	SP	80	22.46	4.20	26.66	-	N/A	3.45	4.20	7.65	8.5	Pass
6785	SP	80	24.13	5.31	29.44	-	N/A	4.36	5.31	9.67	10.5	Pass
6185	LPI	160	23.50	4.20	27.70	-	N/A	0.58	4.20	4.78	5	Pass
6665	SP	160	28.59	5.31	33.90	-	N/A	5.94	5.31	11.25	11.6	Pass
6185	SP	160	25.59	4.20	29.79	-	N/A	3.22	4.20	7.42	8.7	Pass
6105	LPI	320	25.37	4.20	29.57	-	N/A	-0.12	4.20	4.08	5	Pass
6265	SP	320	26.43	4.20	30.63	-	N/A	1.12	4.20	5.32	7.4	Pass
6105	SP	320	18.27	4.20	22.47	-	N/A	-7.00	4.20	-2.80	-1.2	Pass



AFC Capability – Inquired Channel

AFCD.RSA: Successful spectrum access update												
Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6135	LPI	20	14.04	4.20	18.24	-	N/A	0.34	4.20	4.54	5	Pass
6815	SP	20	24.56	5.31	29.87	30.1	Pass	10.88	5.31	16.19	-	N/A
6335	SP	20	20.21	4.20	24.41	26.8	Pass	6.47	4.20	10.67	-	N/A
6325	LPI	40	16.06	4.20	20.26	-	N/A	-0.65	4.20	3.55	5	Pass
6645	SP	40	20.05	5.31	25.36	26.2	Pass	3.34	5.31	8.65	-	N/A
6805	SP	40	21.12	5.31	26.43	27.2	Pass	4.72	5.31	10.03	-	N/A
6785	LPI	80	18.70	5.31	24.01	-	N/A	-1.12	5.31	4.19	5	Pass
6785	SP	80	21.28	5.31	26.59	27.1	Pass	1.67	5.31	6.98	-	N/A
6705	SP	80	22.98	5.31	28.29	29	Pass	3.22	5.31	8.53	-	N/A
6185	LPI	160	22.79	4.20	26.99	-	N/A	0.06	4.20	4.26	5	Pass
6665	SP	160	27.35	5.31	32.66	33.4	Pass	4.68	5.31	9.99	-	N/A
6345	SP	160	23.96	4.20	28.16	30.9	Pass	1.32	4.20	5.52	-	N/A
6105	LPI	320	24.25	4.20	28.45	-	N/A	-0.99	4.20	3.21	5	Pass
6265	SP	320	24.12	4.20	28.32	31.4	Pass	-1.14	4.20	3.06	-	N/A
6105	SP	320	16.47	4.20	20.67	23.4	Pass	-8.36	4.20	-4.16	-	N/A



AFC Capability – Inquired Frequency & Channel

AFCD.RSA: Successful spectrum access update

Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6135	LPI	20	14.25	4.20	18.45	-	N/A	0.53	4.20	4.73	5	Pass
6415	SP	20	25.66	4.20	29.86	31.3	Pass	12.08	4.20	16.28	18.3	Pass
6815	SP	20	24.65	5.31	29.96	30.1	Pass	10.82	5.31	16.13	17.1	Pass
6805	LPI	40	16.22	5.31	21.53	-	N/A	-0.48	5.31	4.83	5	Pass
6725	SP	40	21.65	5.31	26.96	27.4	Pass	4.92	5.31	10.23	11.4	Pass
6805	SP	40	22.18	5.31	27.49	27.8	Pass	5.51	5.31	10.82	11.8	Pass
6785	LPI	80	19.36	5.31	24.67	-	N/A	-0.43	5.31	4.88	5	Pass
6785	SP	80	23.59	5.31	28.90	29	Pass	4.03	5.31	9.34	10	Pass
6385	SP	80	25.65	4.20	29.85	30.9	Pass	6.36	4.20	10.56	11.9	Pass
6185	LPI	160	23.44	4.20	27.64	-	N/A	0.50	4.20	4.70	5	Pass
6185	SP	160	25.97	4.20	30.17	31	Pass	3.41	4.20	7.61	9	Pass
6345	SP	160	25.57	4.20	29.77	31.3	Pass	3.08	4.20	7.28	9.3	Pass
6265	LPI	320	24.98	4.20	29.18	-	N/A	-0.43	4.20	3.77	5	Pass
6105	SP	320	25.80	4.20	30.00	33.9	Pass	0.93	4.20	5.13	8.8	Pass
6265	SP	320	21.18	4.20	25.38	27.5	Pass	-4.20	4.20	0.00	2.4	Pass




AFC Capability – Inquired Frequency

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

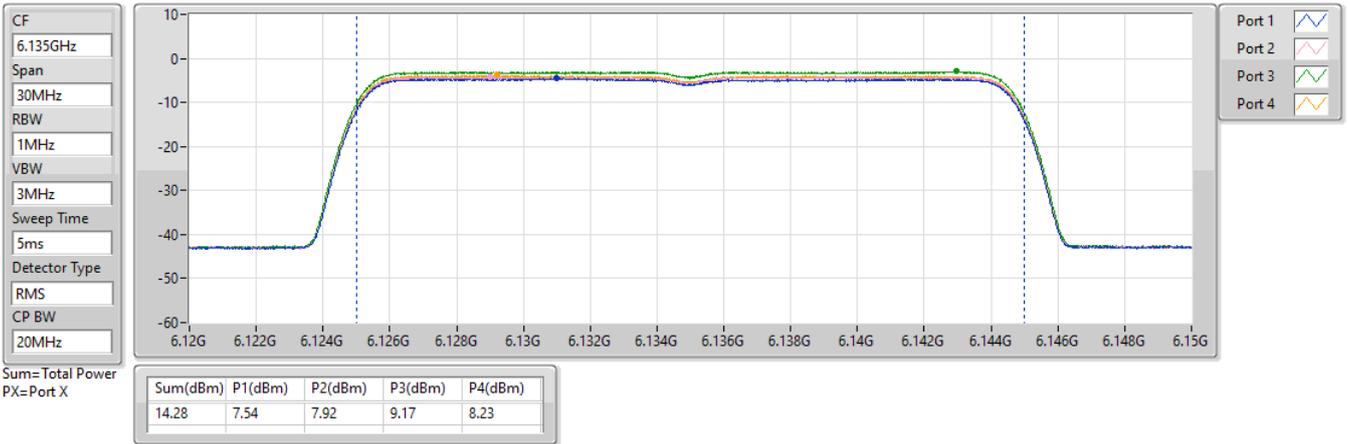

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

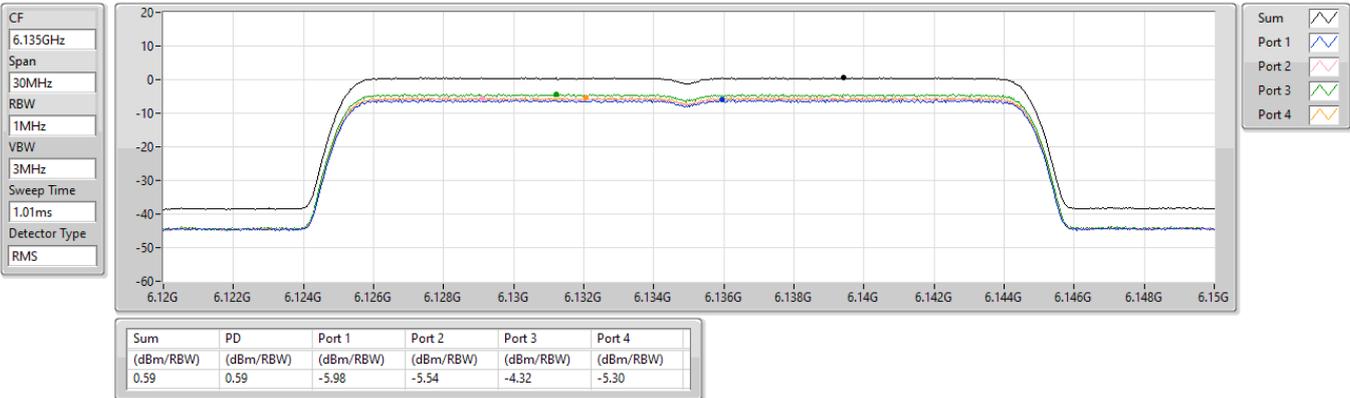




AFC Capability – Inquired Frequency

Frequency (MHz): 6815

6.525-6.875GHz_802.11be EHT20_4TX

AV Power


6815MHz_TX

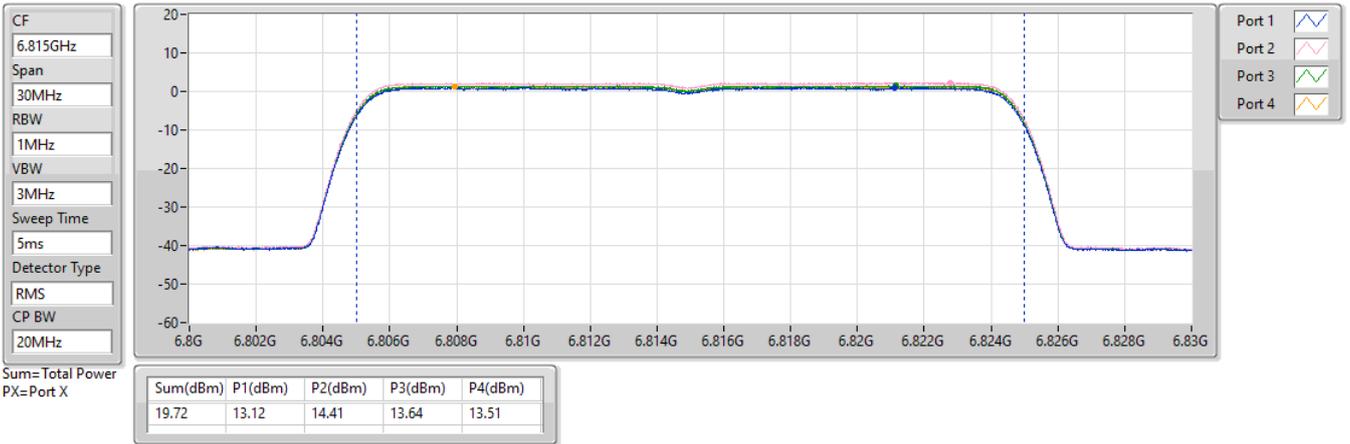

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6815MHz

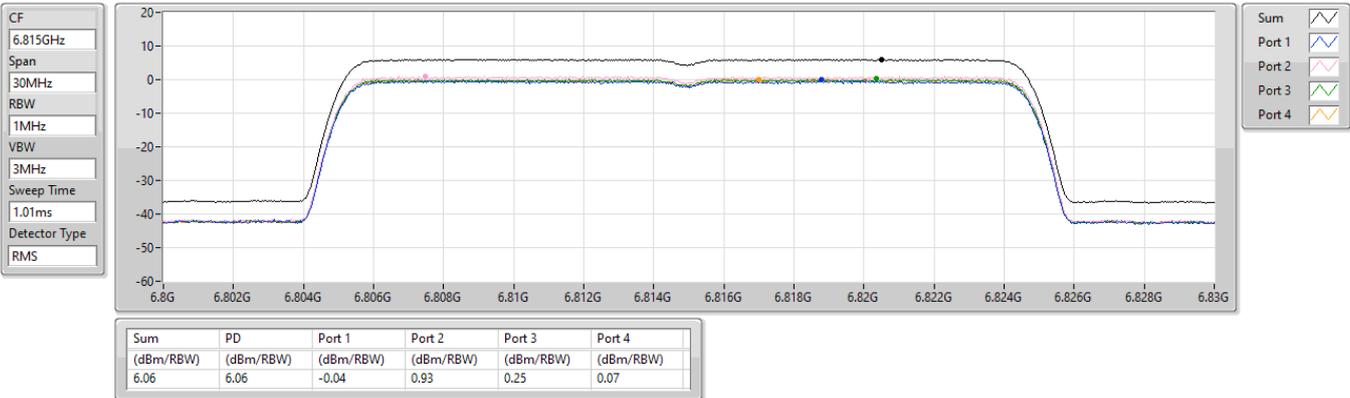




AFC Capability – Inquired Frequency

Frequency (MHz): 6735

6.525-6.875GHz_802.11be EHT20_4TX

AV Power

6735MHz_TX

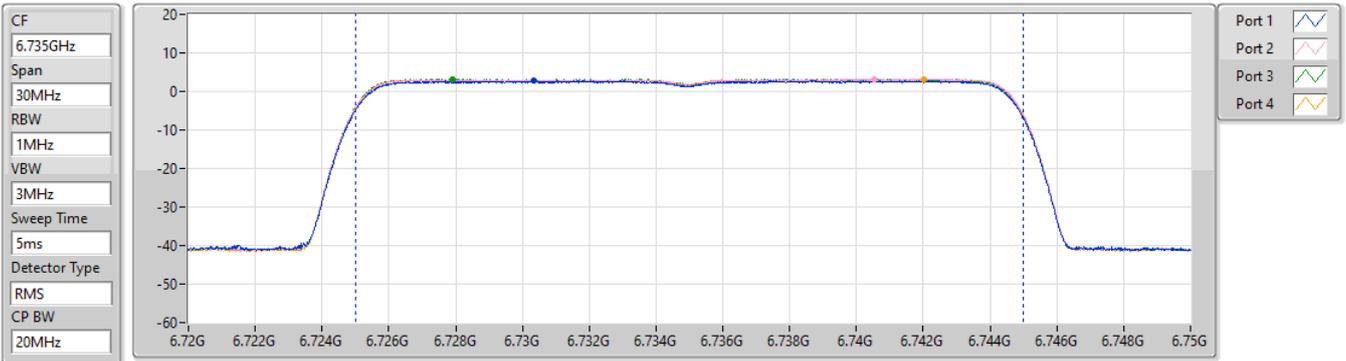


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
21.22	14.89	15.30	15.31	15.27

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6735MHz

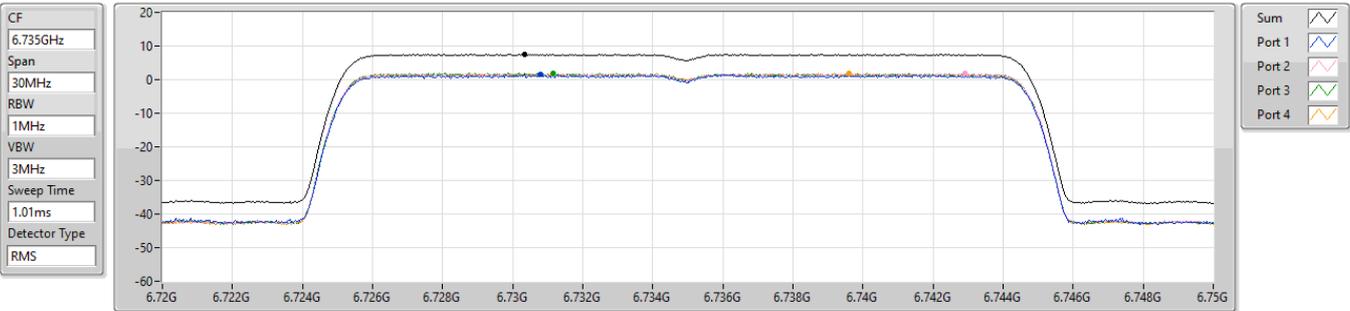

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.58	7.58	1.46	1.80	1.91	1.87




AFC Capability – Inquired Frequency

Frequency (MHz): 6125

5.925-6.425GHz_802.11be EHT40_4TX

AV Power


6125MHz_TX

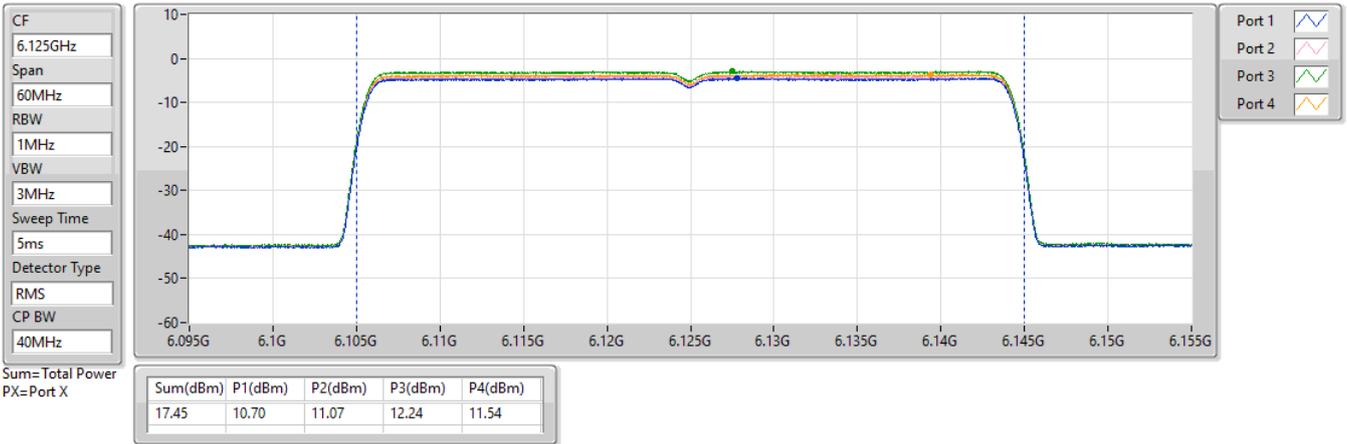

5.925-6.425GHz_802.11be EHT40_4TX

PSD

6125MHz

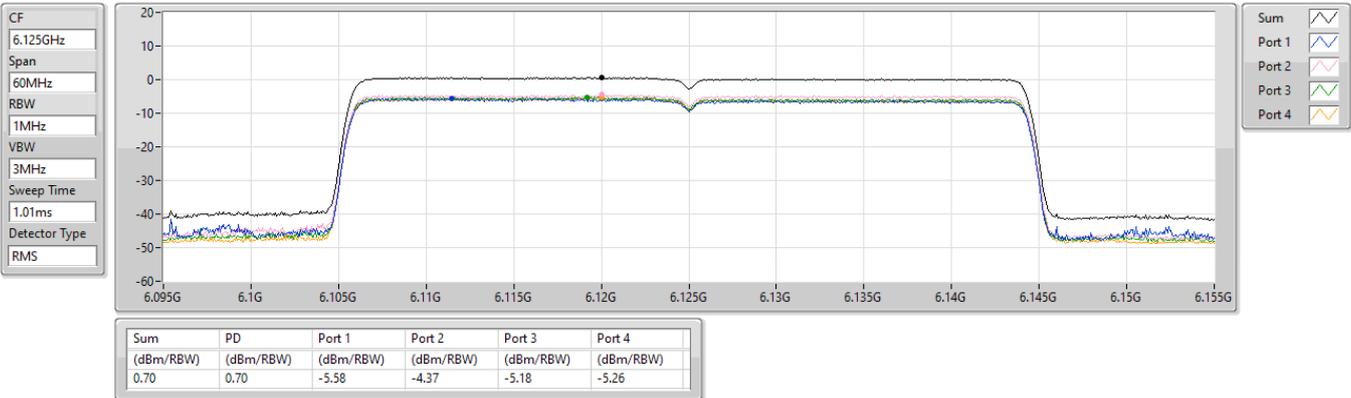



AFC Capability – Inquired Frequency

Frequency (MHz): 6125

5.925-6.425GHz_802.11be EHT40_4TX

AV Power


6125MHz_TX



5.925-6.425GHz_802.11be EHT40_4TX

PSD

6125MHz

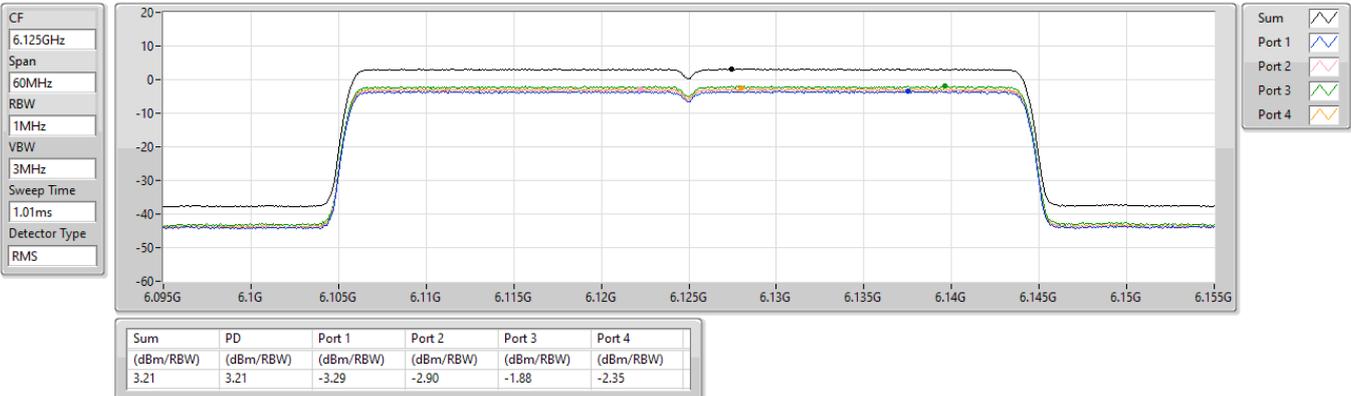




AFC Capability – Inquired Frequency

Frequency (MHz): 6805

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6805MHz_TX

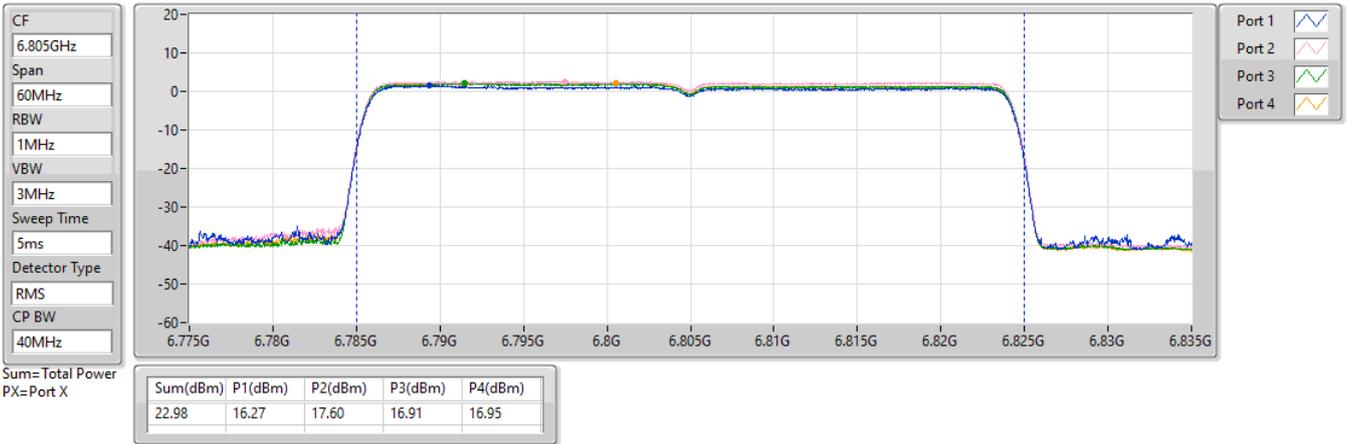

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6805MHz

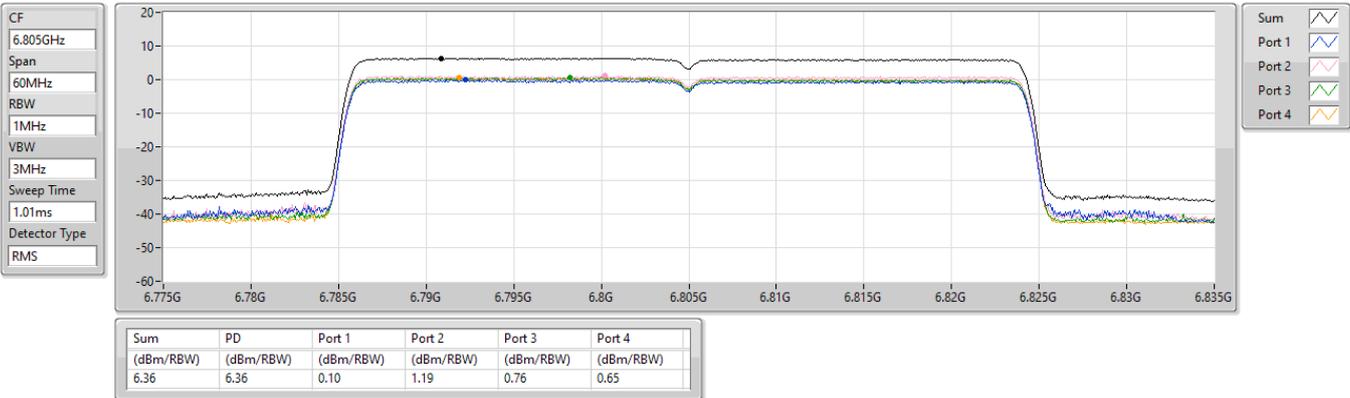




AFC Capability – Inquired Frequency

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

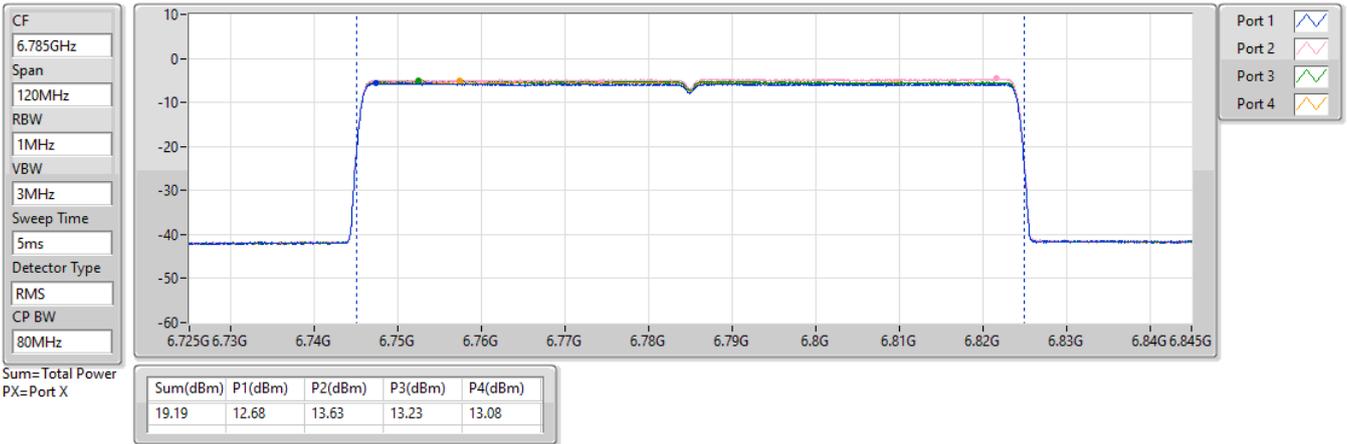

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

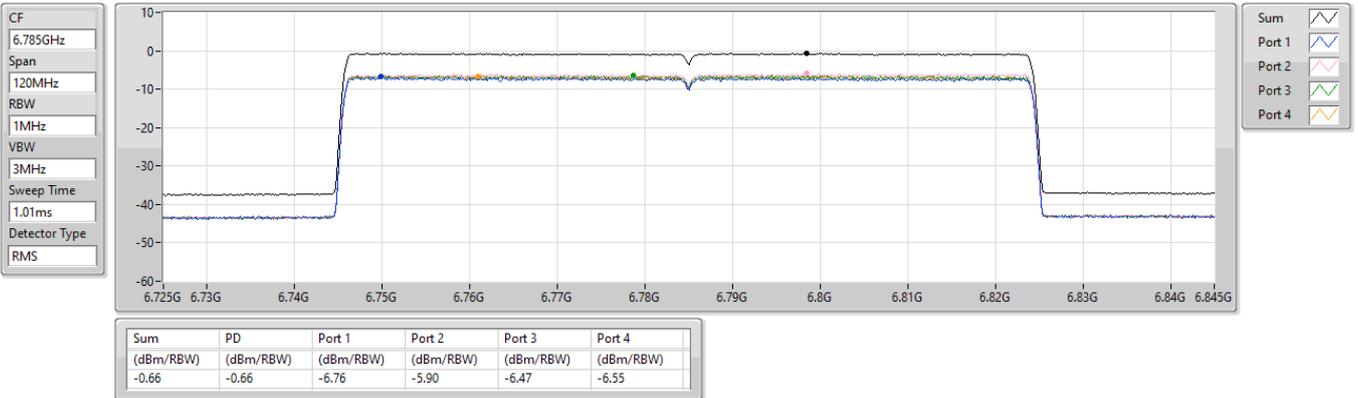




AFC Capability – Inquired Frequency

Frequency (MHz): 6385

5.925-6.425GHz_802.11be EHT80_4TX

AV Power


6385MHz_TX

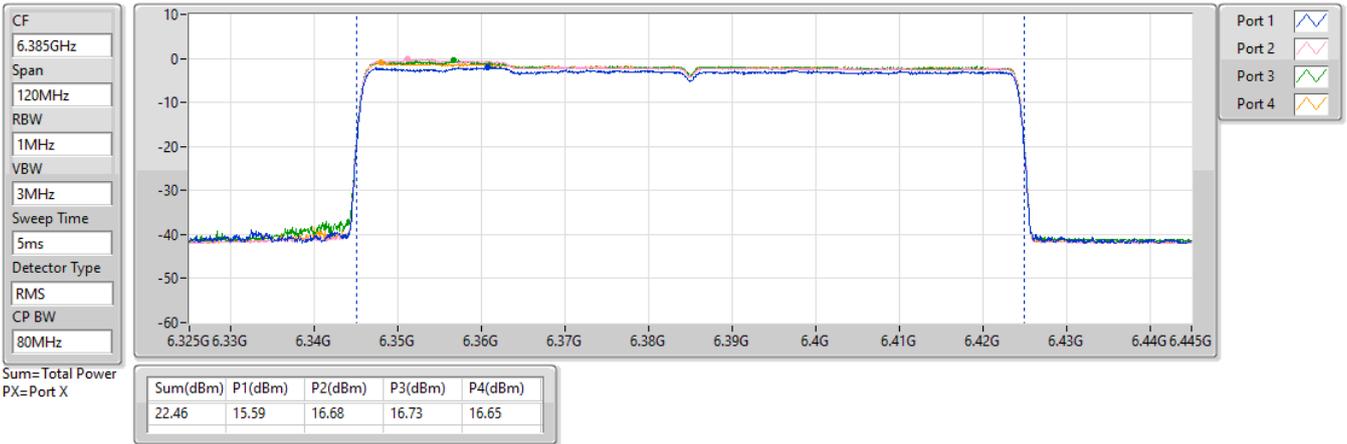

5.925-6.425GHz_802.11be EHT80_4TX

PSD

6385MHz

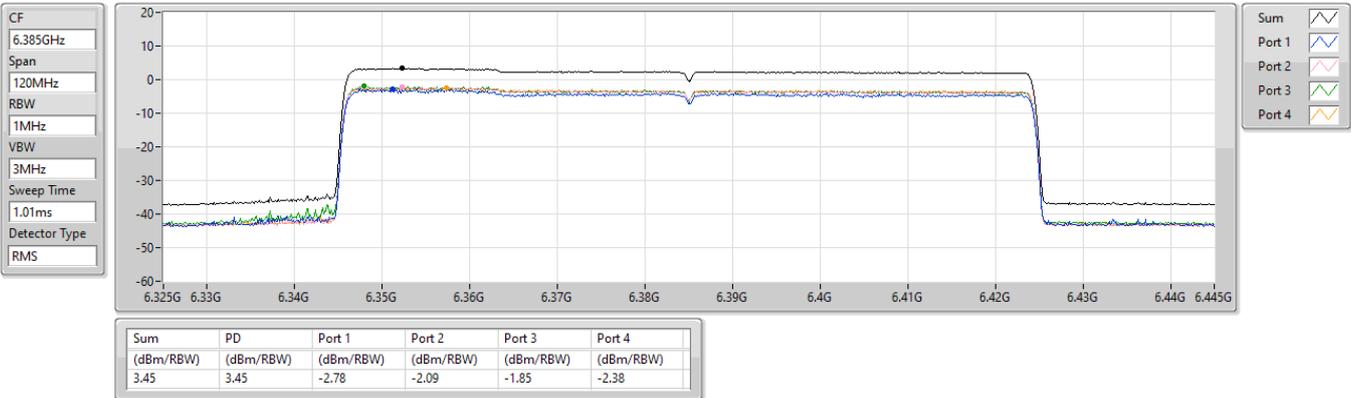




AFC Capability – Inquired Frequency

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

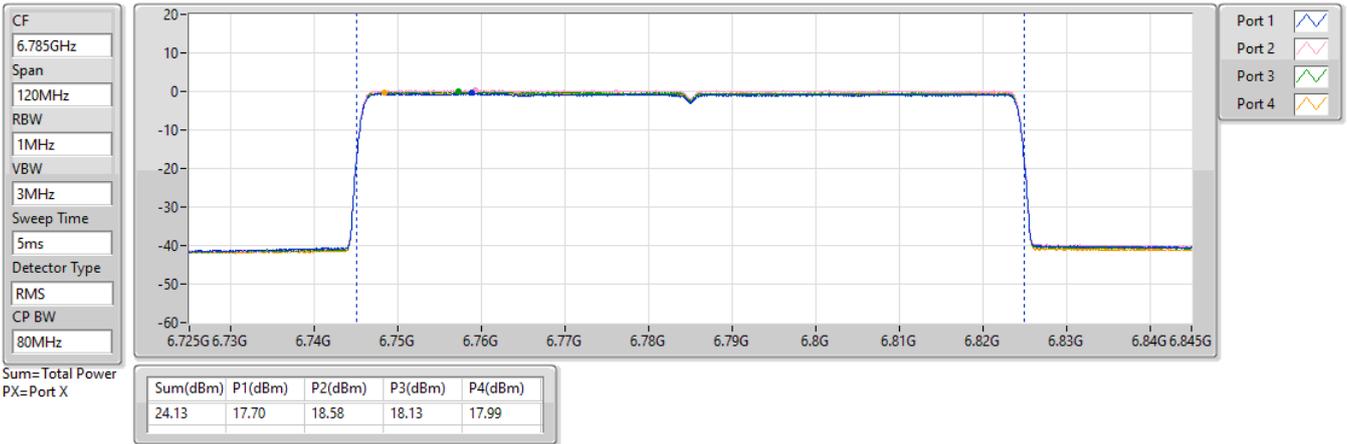

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

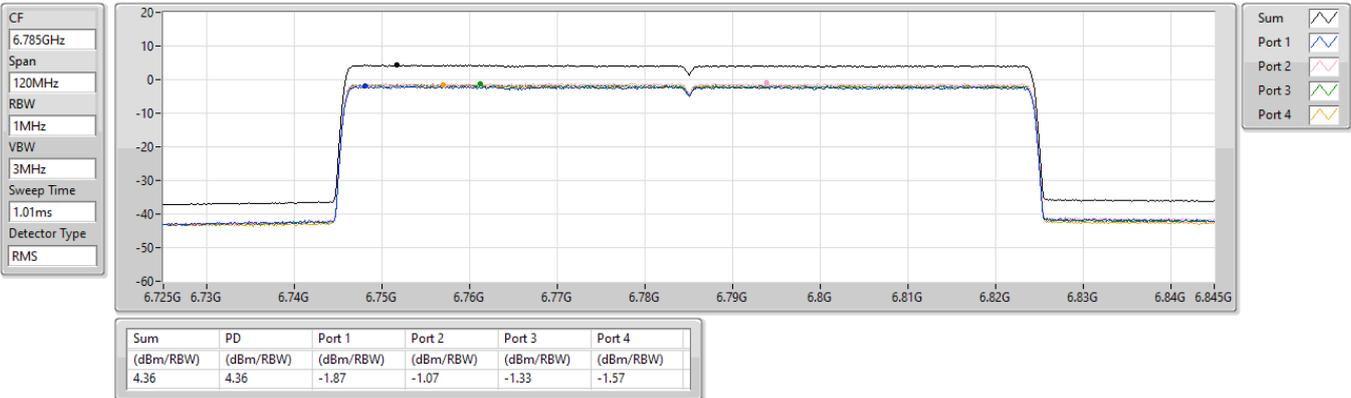




AFC Capability – Inquired Frequency

Frequency (MHz): 6185

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6185MHz_TX

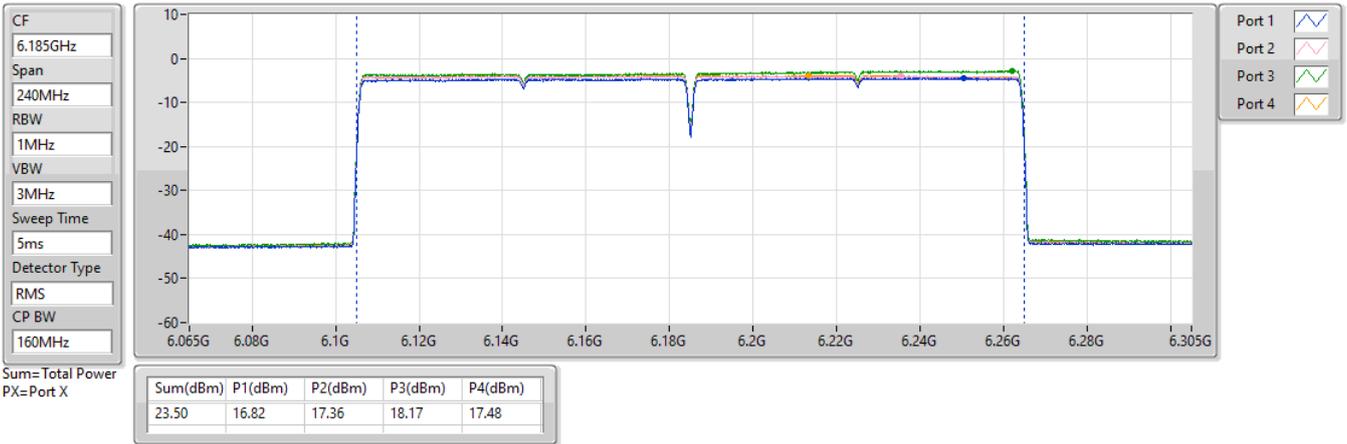

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6185MHz

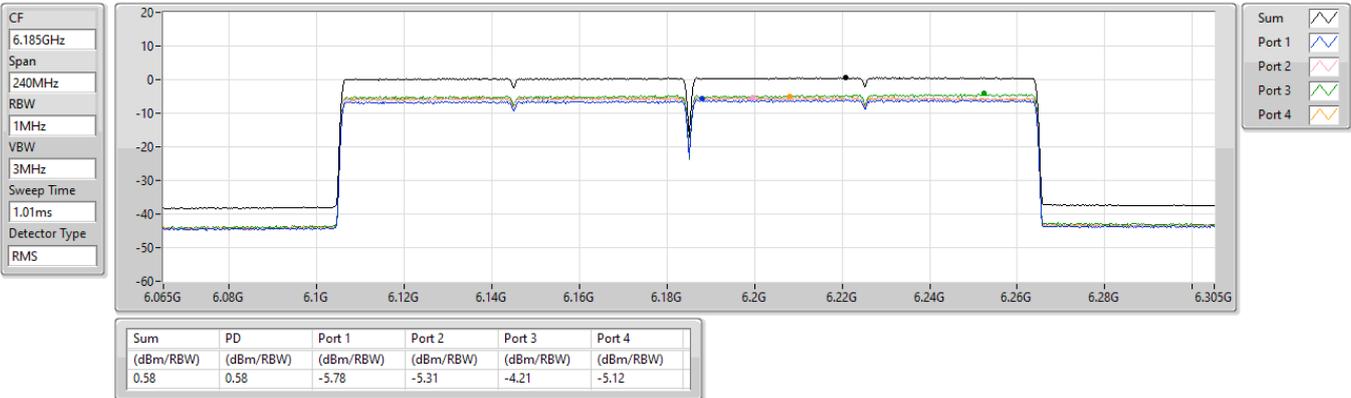




AFC Capability – Inquired Frequency

Frequency (MHz): 6665

6.525-6.875GHz_802.11be EHT160_4TX

AV Power


6665MHz_TX

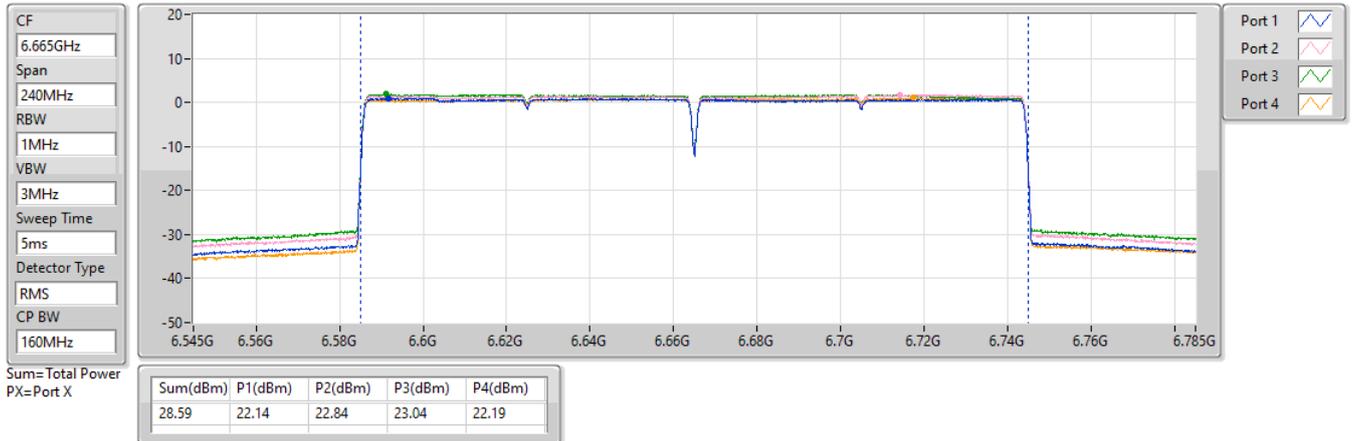

6.525-6.875GHz_802.11be EHT160_4TX

PSD

6665MHz

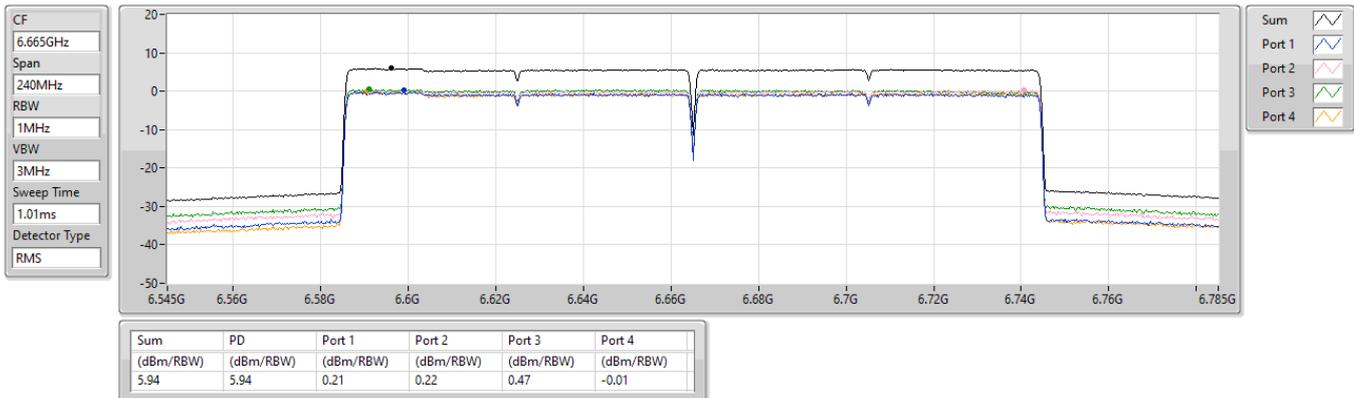




AFC Capability – Inquired Frequency

Frequency (MHz): 6185

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6185MHz_TX

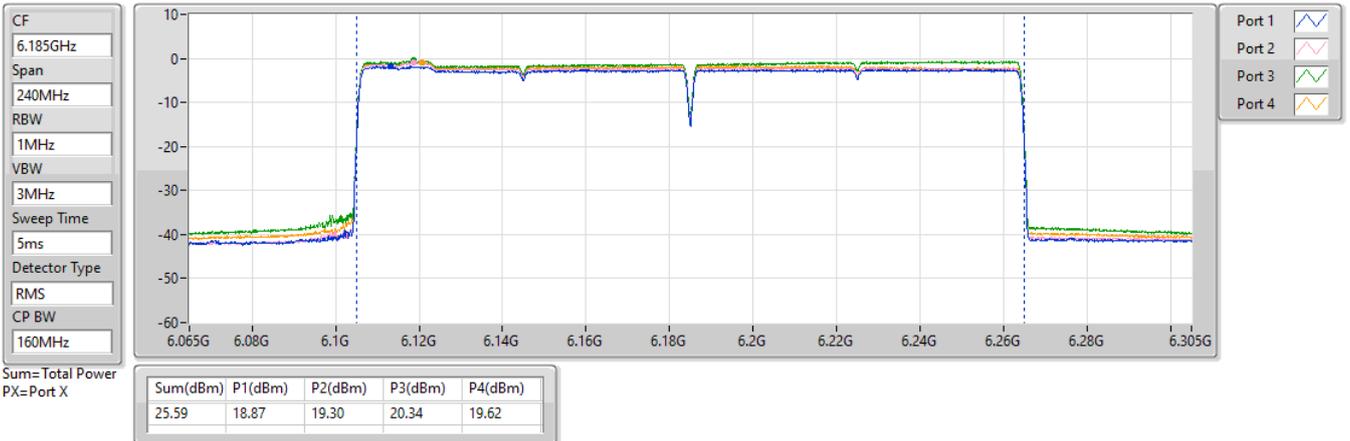

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6185MHz

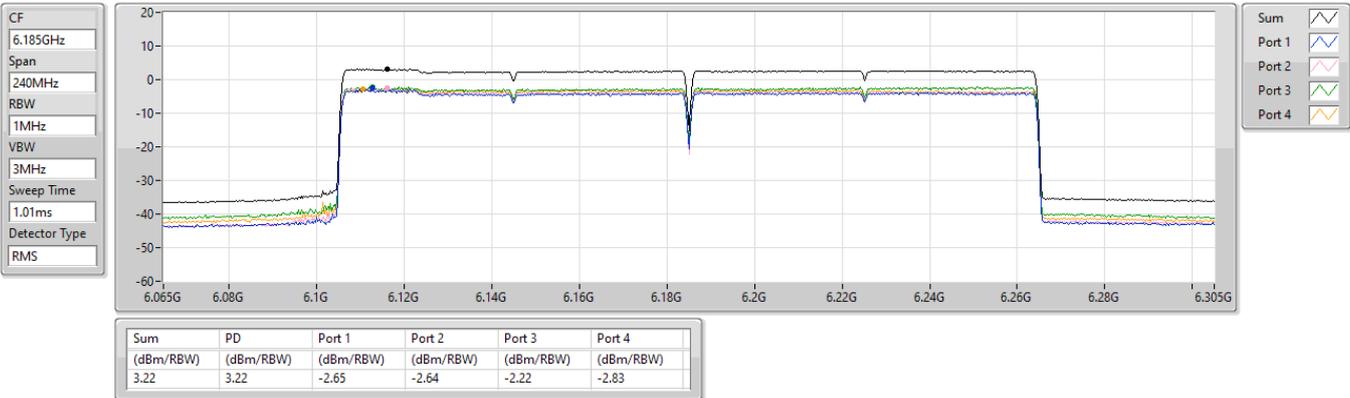




AFC Capability – Inquired Frequency

Frequency (MHz): 6105

5.925-6.425GHz_802.11be EHT320_4TX

AV Power


6105MHz_TX

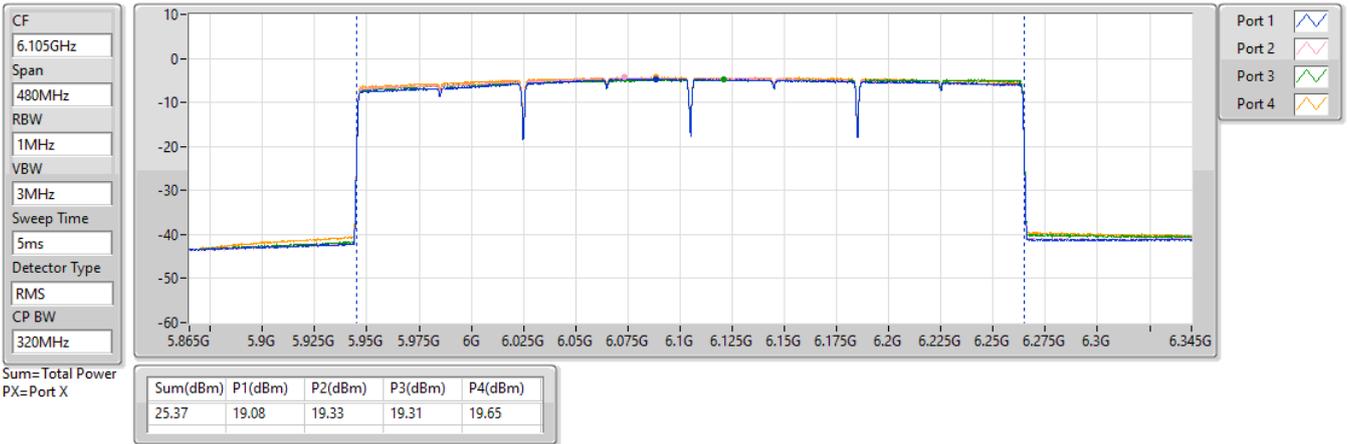

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6105MHz

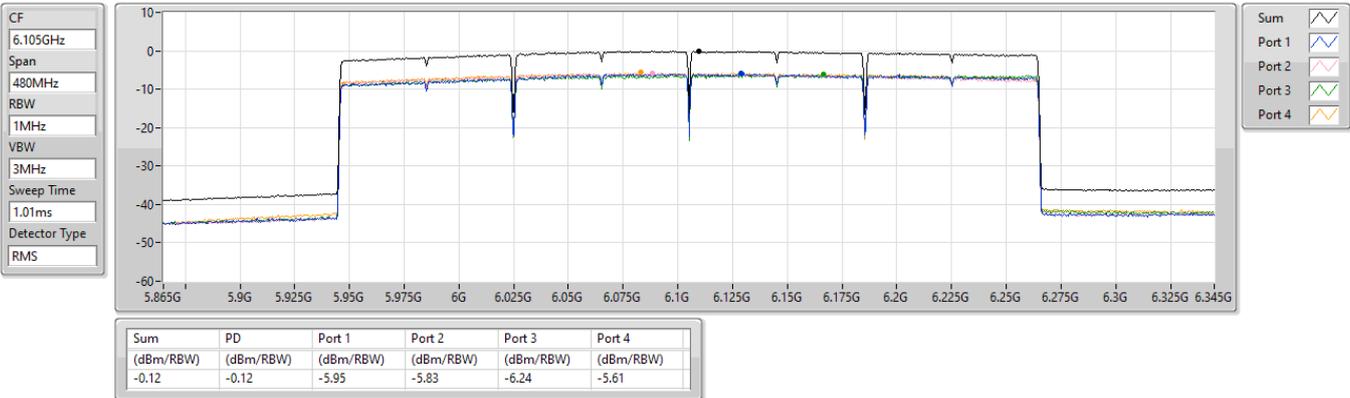



AFC Capability – Inquired Frequency

Frequency (MHz): 6265

5.925-6.425GHz_802.11be EHT320_4TX

AV Power

6265MHz_TX

CF
6.265GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
5ms

Detector Type
RMS

CP BW
320MHz

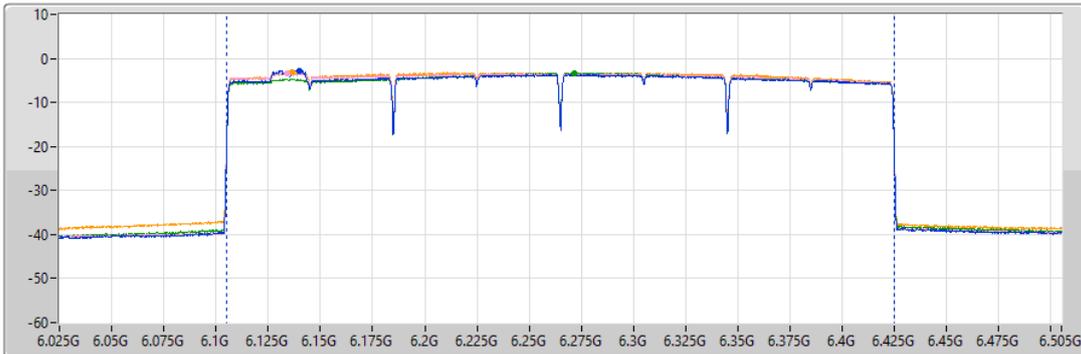

Port 1

Port 2

Port 3

Port 4

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
26.43	20.17	20.51	20.20	20.75

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6265MHz

CF
6.265GHz


Span
480MHz

RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

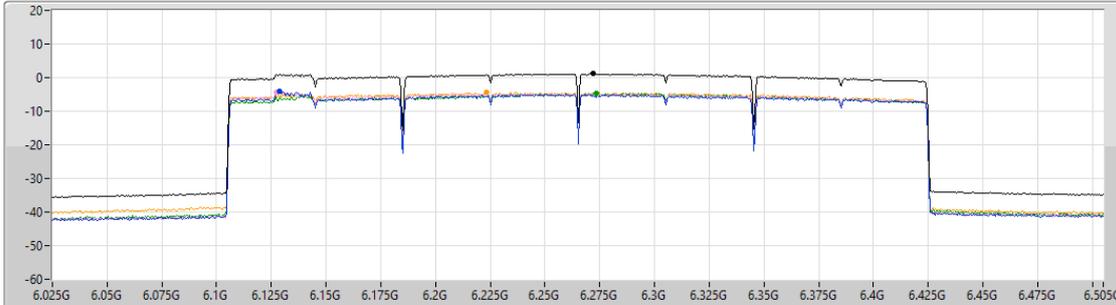

Sum

Port 1

Port 2

Port 3

Port 4

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)
1.12	1.12	-4.09	-4.36	-4.70	-4.38




AFC Capability – Inquired Frequency

Frequency (MHz): 6105

5.925-6.425GHz_802.11be EHT320_4TX

AV Power


6105MHz_TX

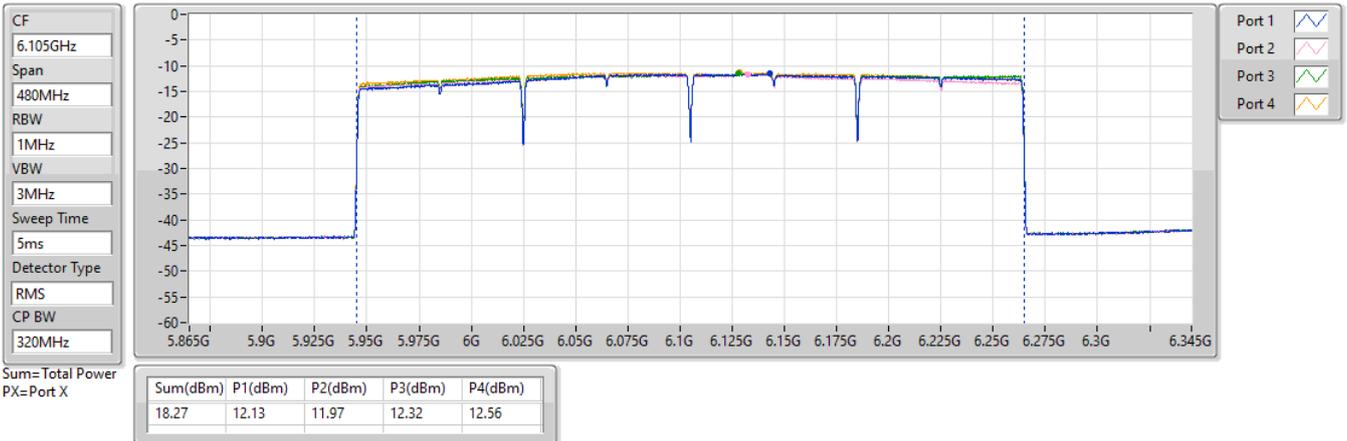

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6105MHz

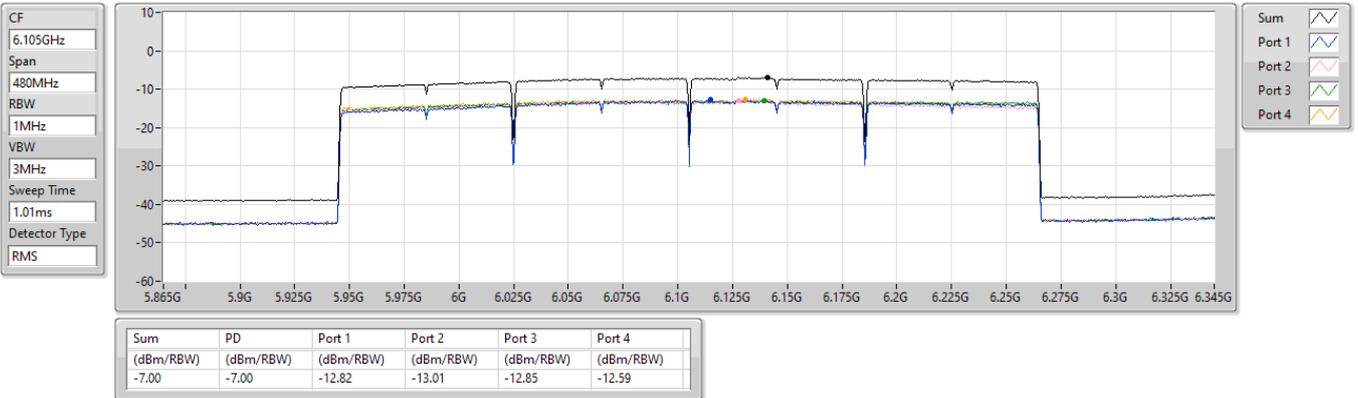




AFC Capability – Inquired Channel

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

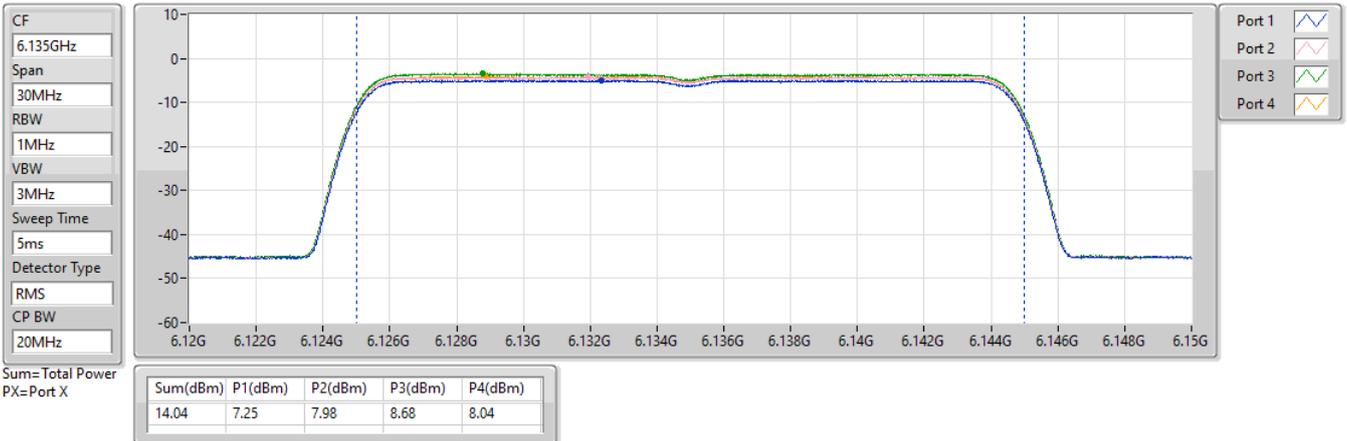

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

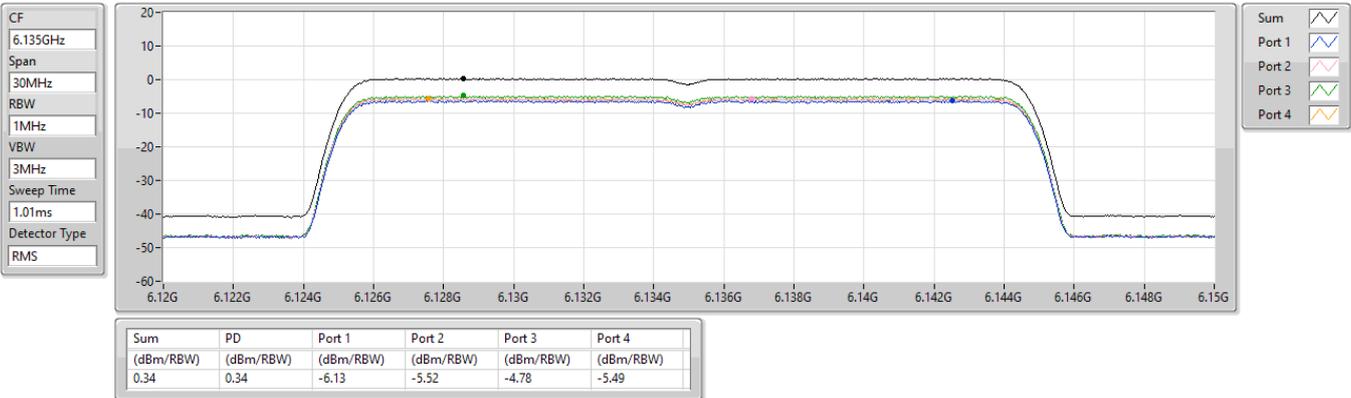




AFC Capability – Inquired Channel

Frequency (MHz): 6815

6.525-6.875GHz_802.11be EHT20_4TX

AV Power

6815MHz_TX

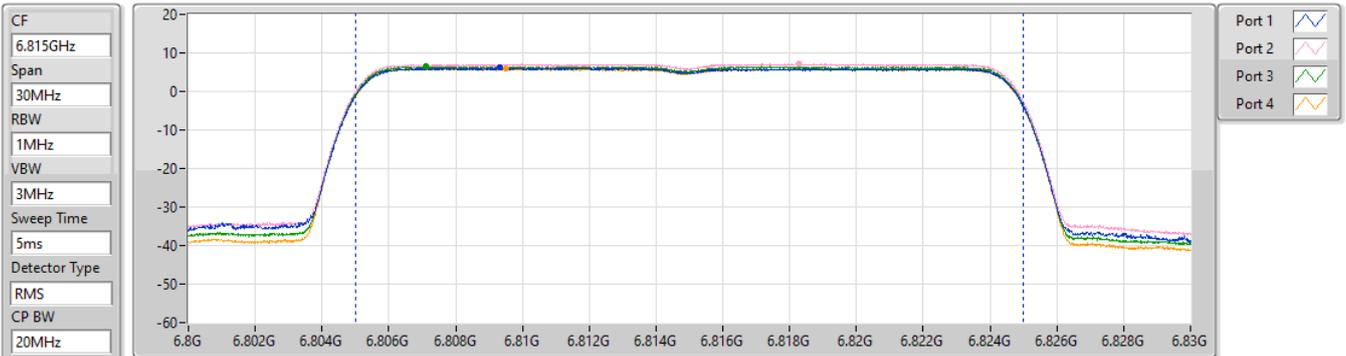


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
24.56	18.17	19.26	18.57	18.07

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6815MHz

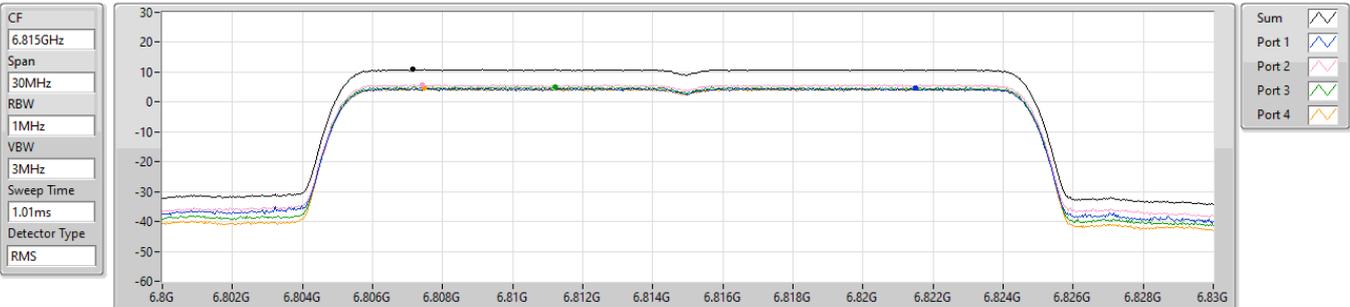

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	4.68	5.87	5.05	4.55




AFC Capability – Inquired Channel

Frequency (MHz): 6335

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6335MHz_TX

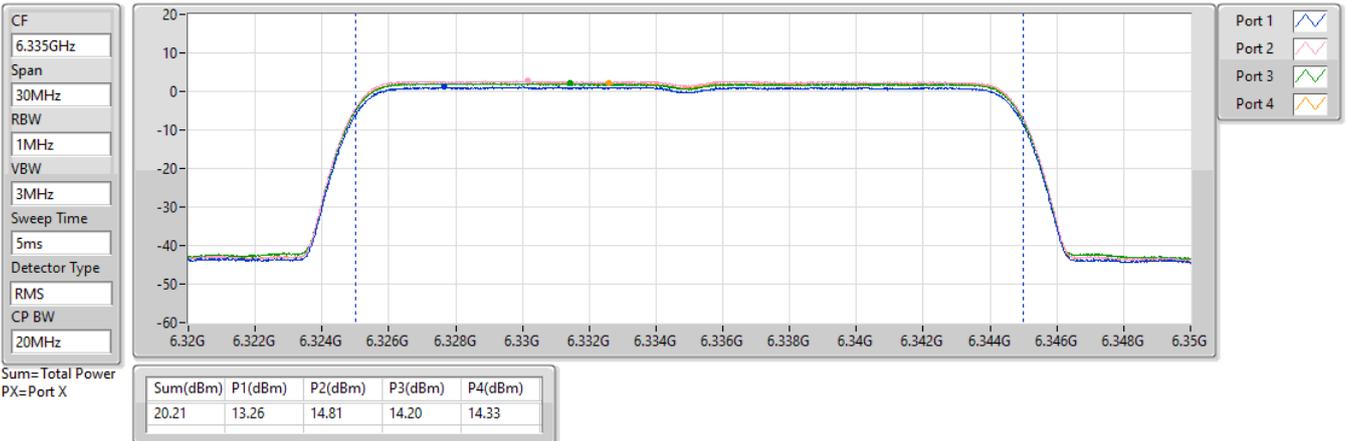

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6335MHz

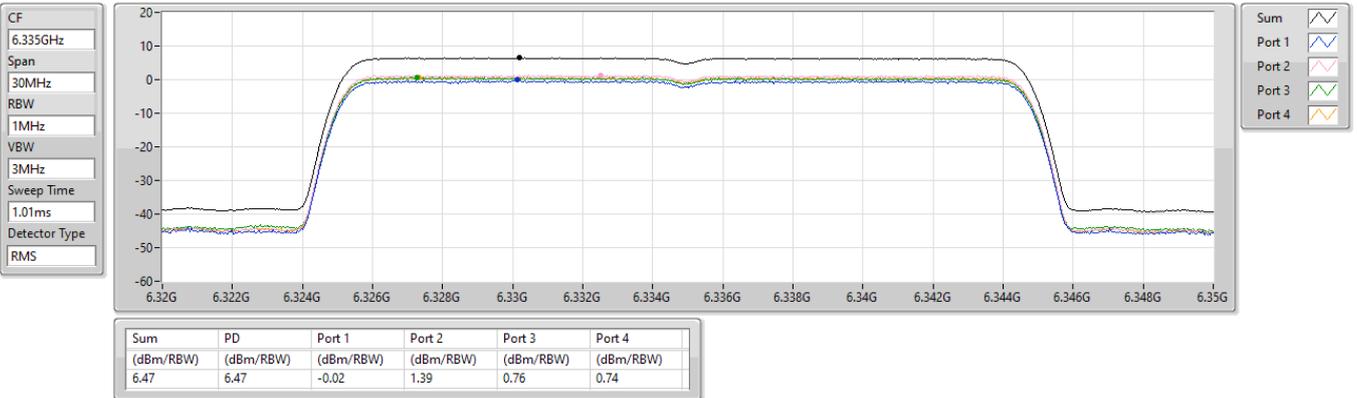



AFC Capability – Inquired Channel

Frequency (MHz): 6325

5.925-6.425GHz_802.11be EHT40_4TX

AV Power


6325MHz_TX



5.925-6.425GHz_802.11be EHT40_4TX

PSD

6325MHz

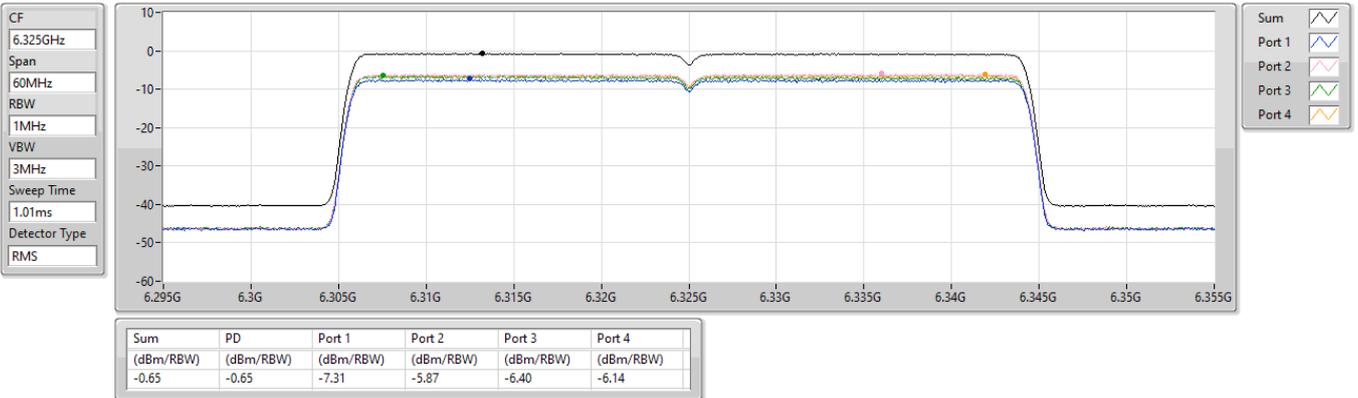




AFC Capability – Inquired Channel

Frequency (MHz): 6645

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6645MHz_TX

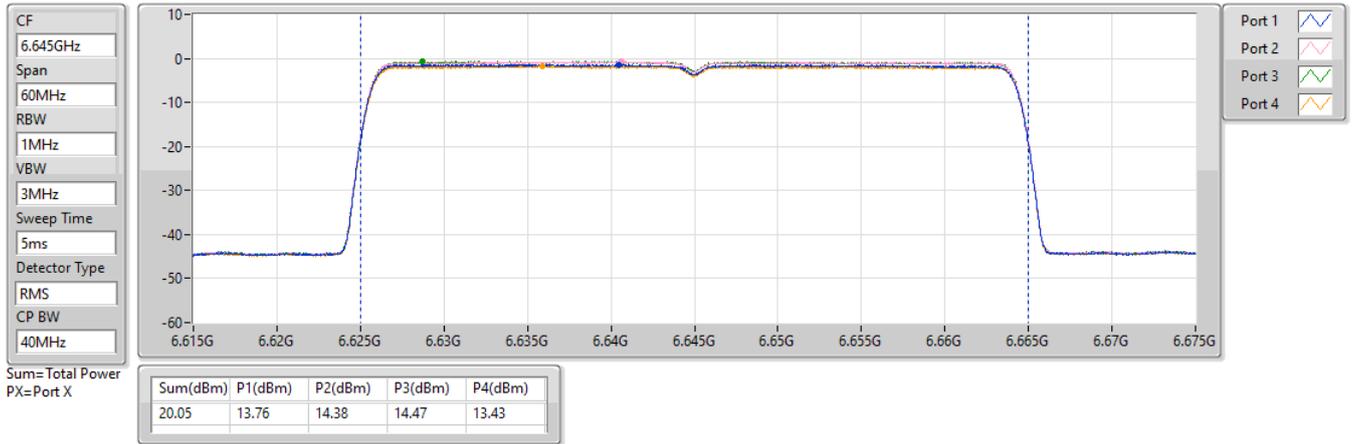

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6645MHz

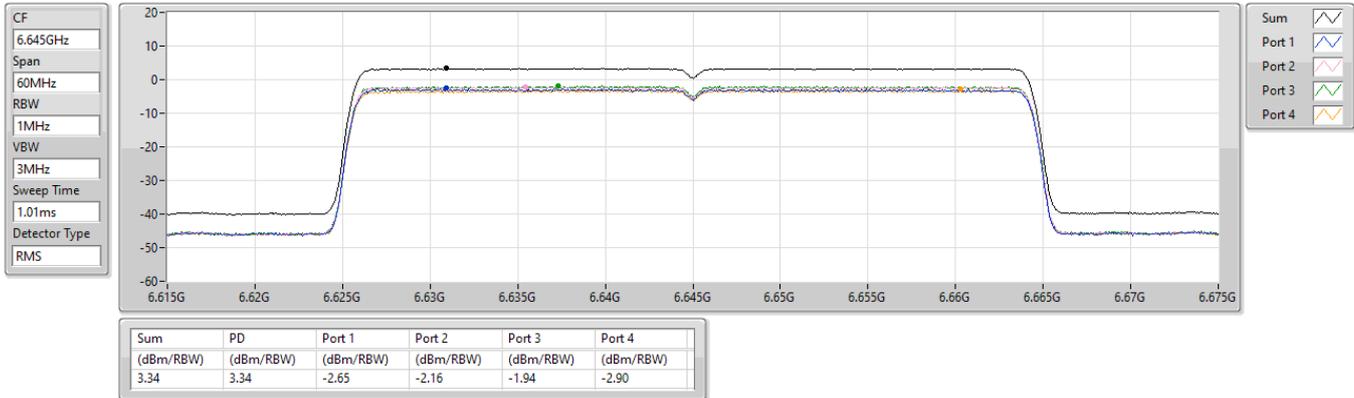




AFC Capability – Inquired Channel

Frequency (MHz): 6805

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6805MHz_TX

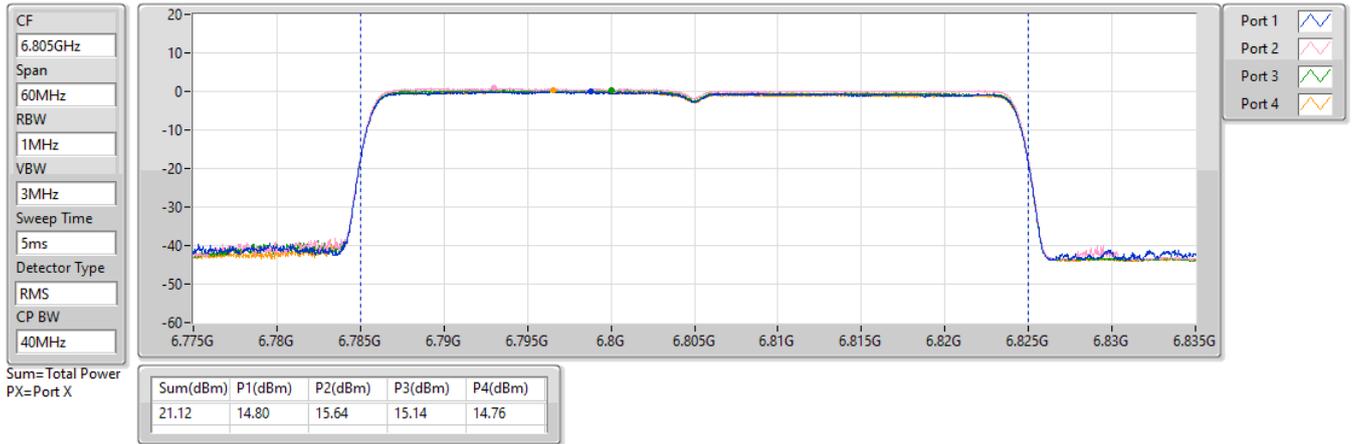

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6805MHz

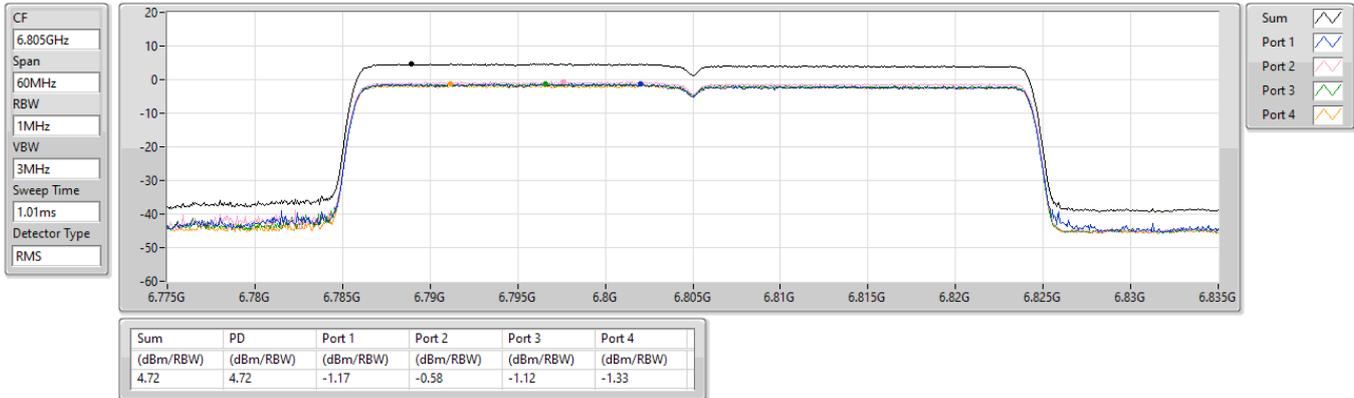




AFC Capability – Inquired Channel

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

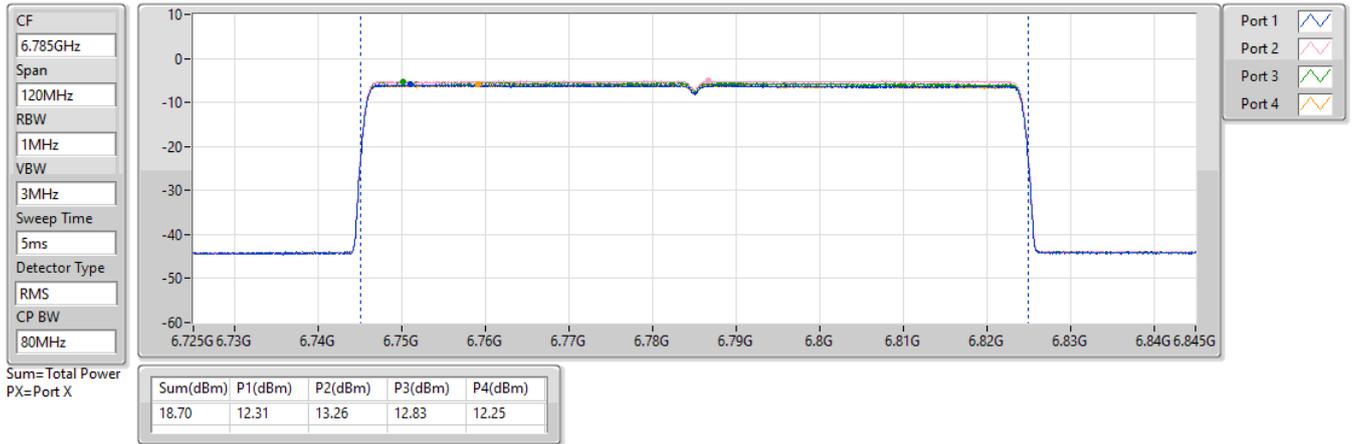

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

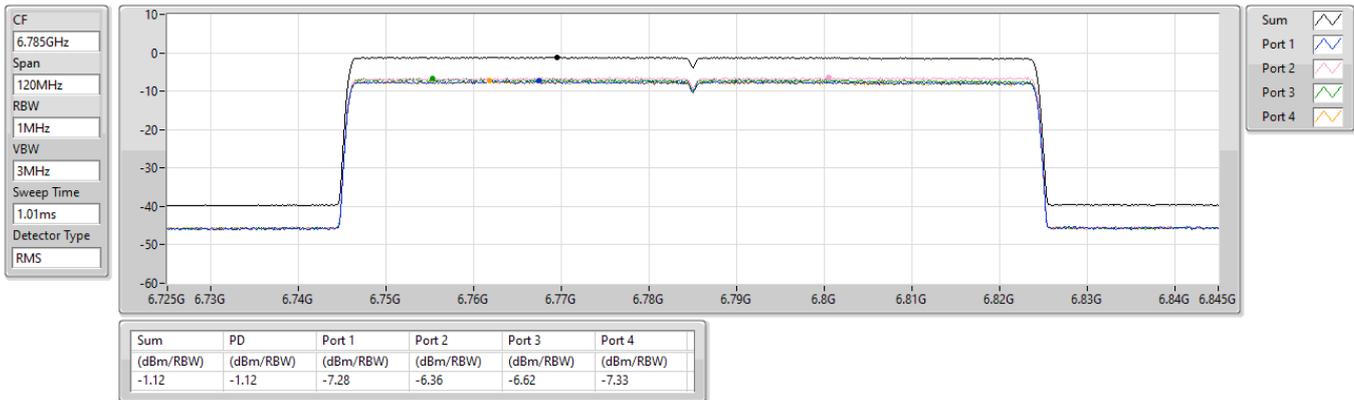




AFC Capability – Inquired Channel

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

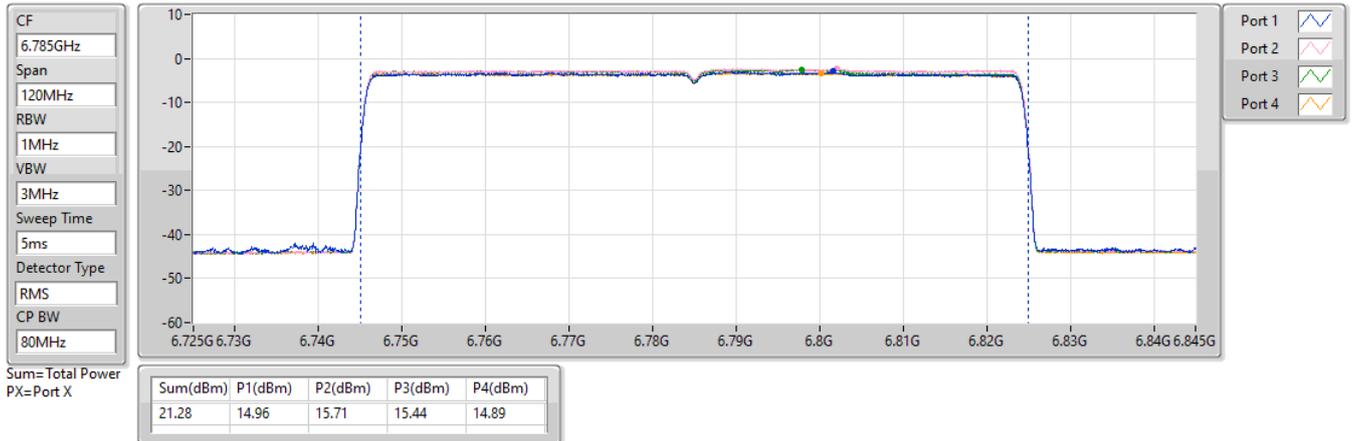

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

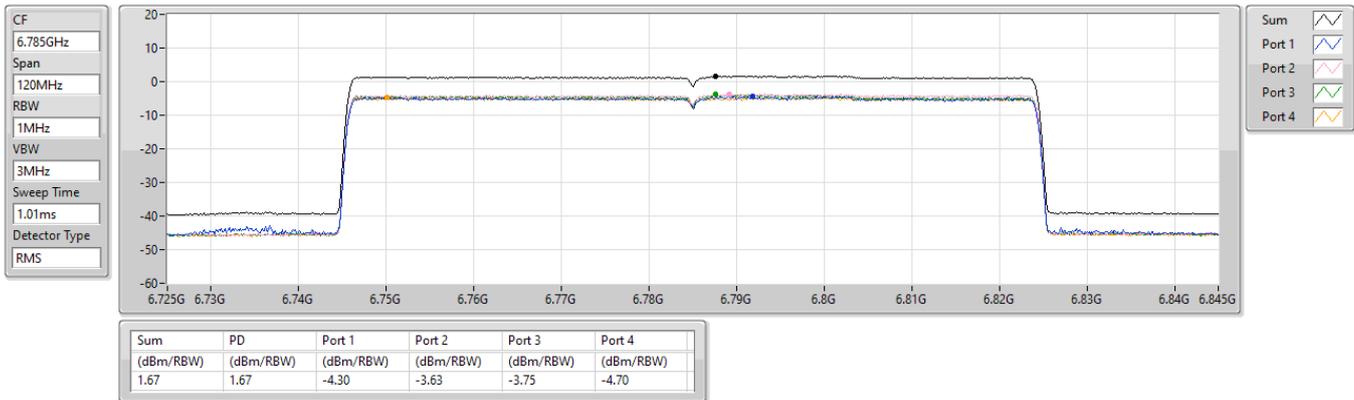




AFC Capability – Inquired Channel

Frequency (MHz): 6705

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6705MHz_TX

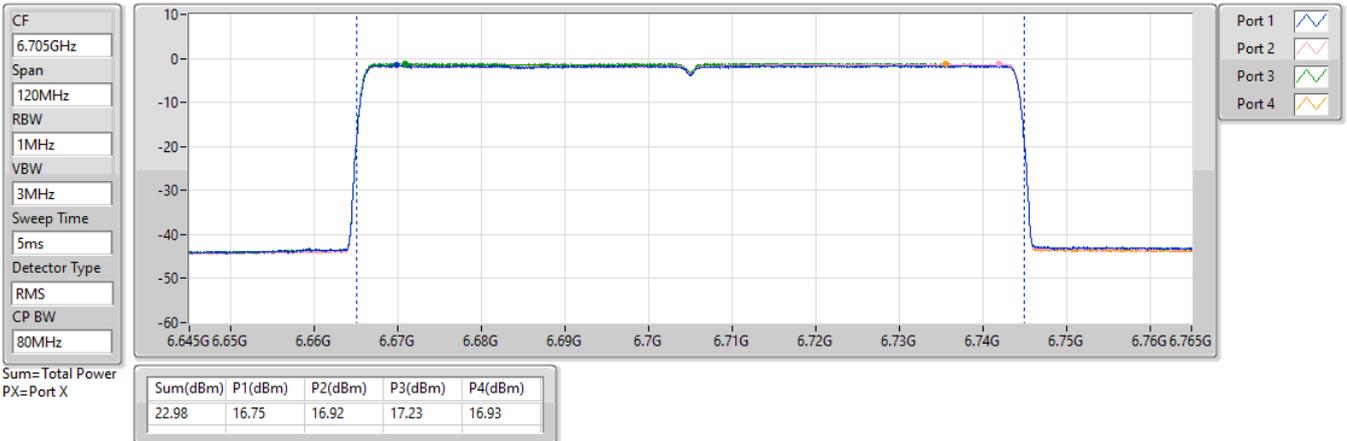

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6705MHz

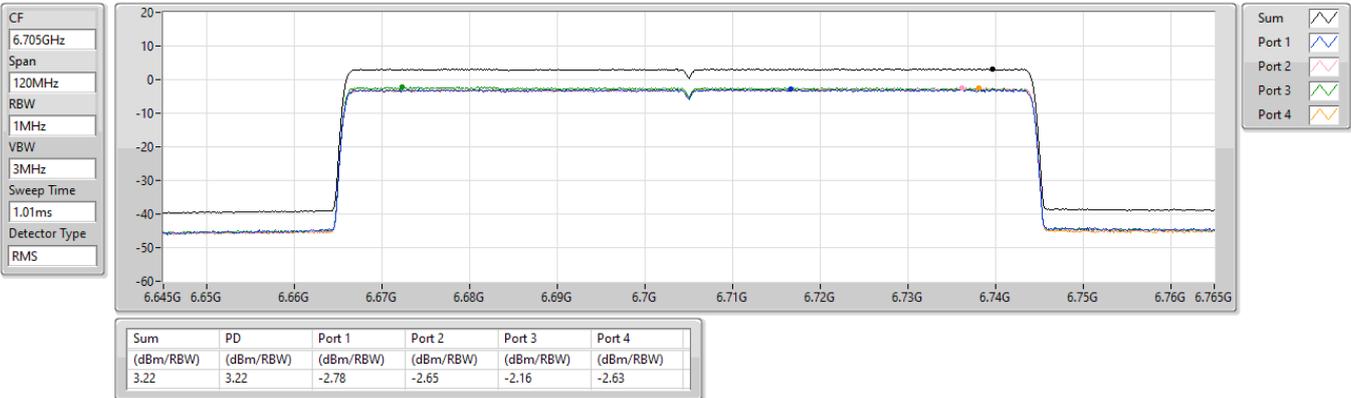




AFC Capability – Inquired Channel

Frequency (MHz): 6185

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6185MHz_TX

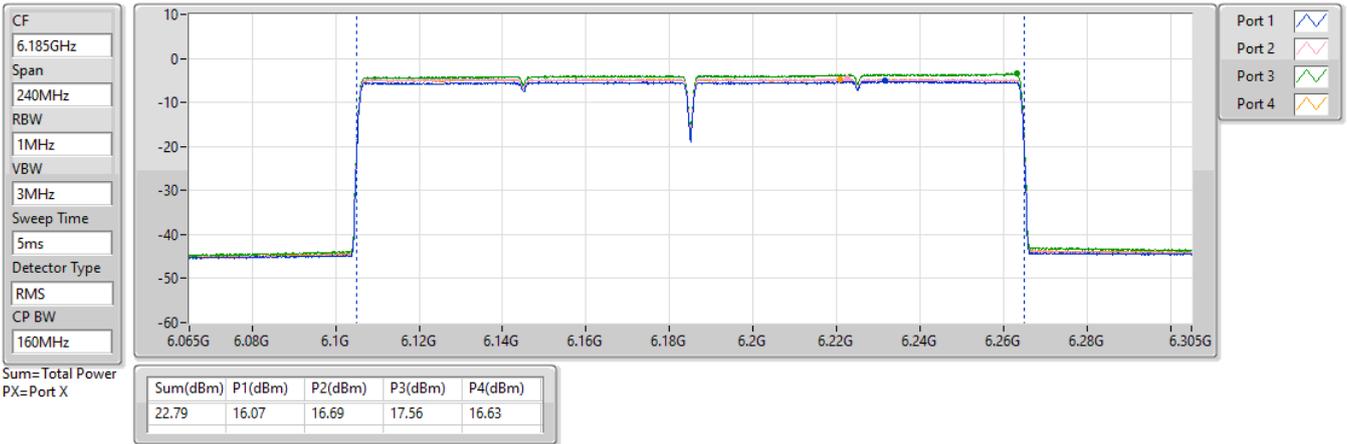

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6185MHz

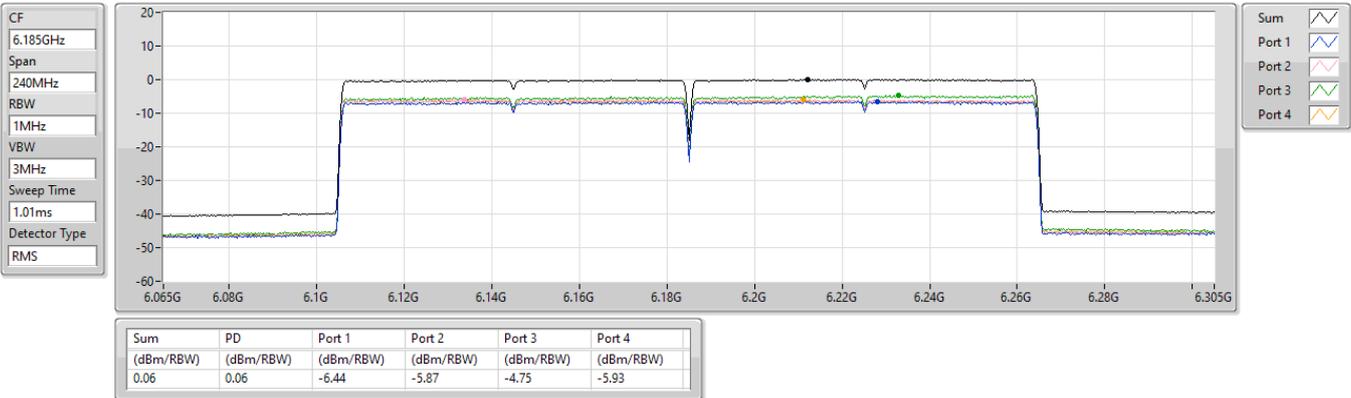




AFC Capability – Inquired Channel

Frequency (MHz): 6665

6.525-6.875GHz_802.11be EHT160_4TX

AV Power


6665MHz_TX

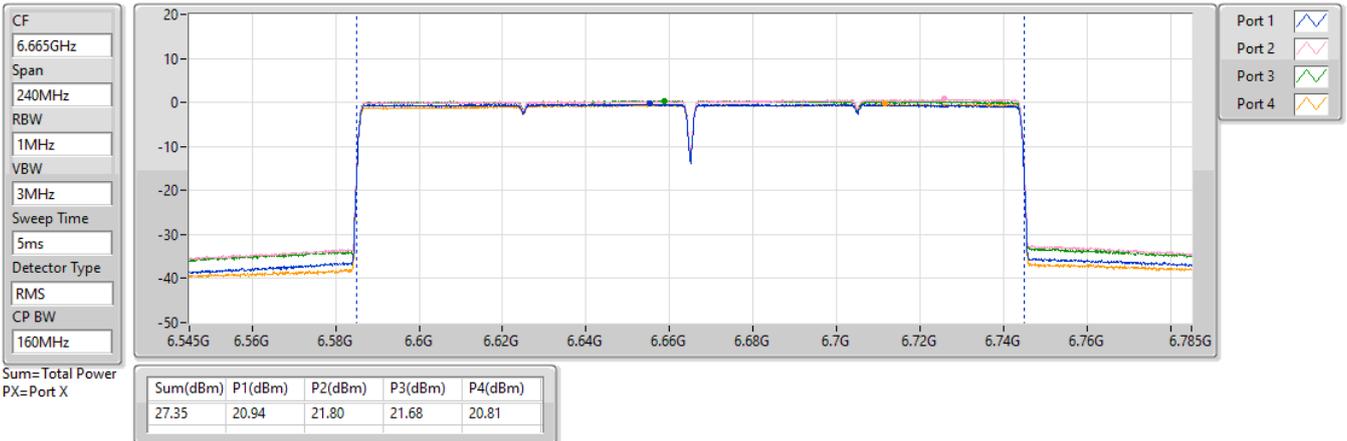

6.525-6.875GHz_802.11be EHT160_4TX

PSD

6665MHz

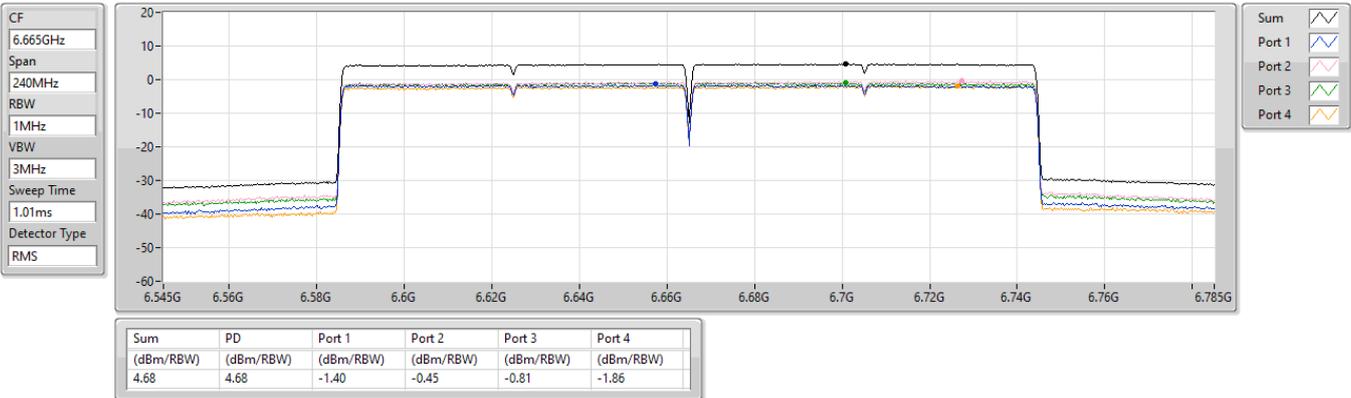




AFC Capability – Inquired Channel

Frequency (MHz): 6345

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6345MHz_TX

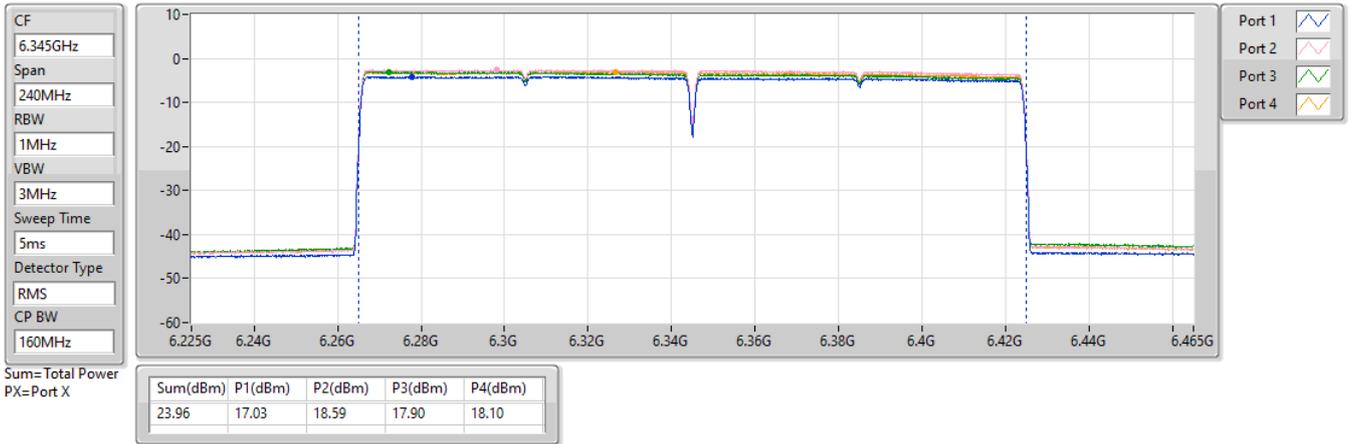

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6345MHz

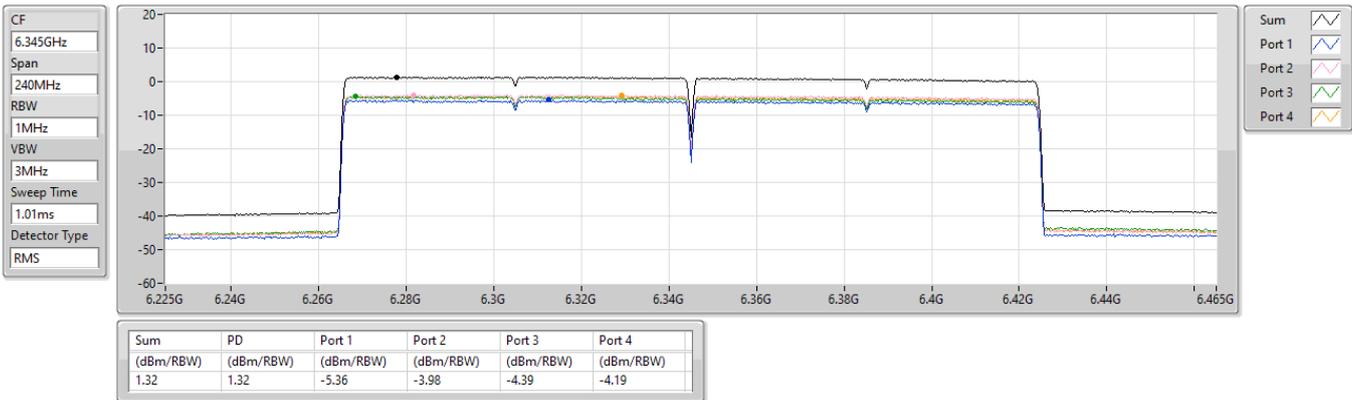




AFC Capability – Inquired Channel

Frequency (MHz): 6105

5.925-6.425GHz_802.11be EHT320_4TX

AV Power


6105MHz_TX

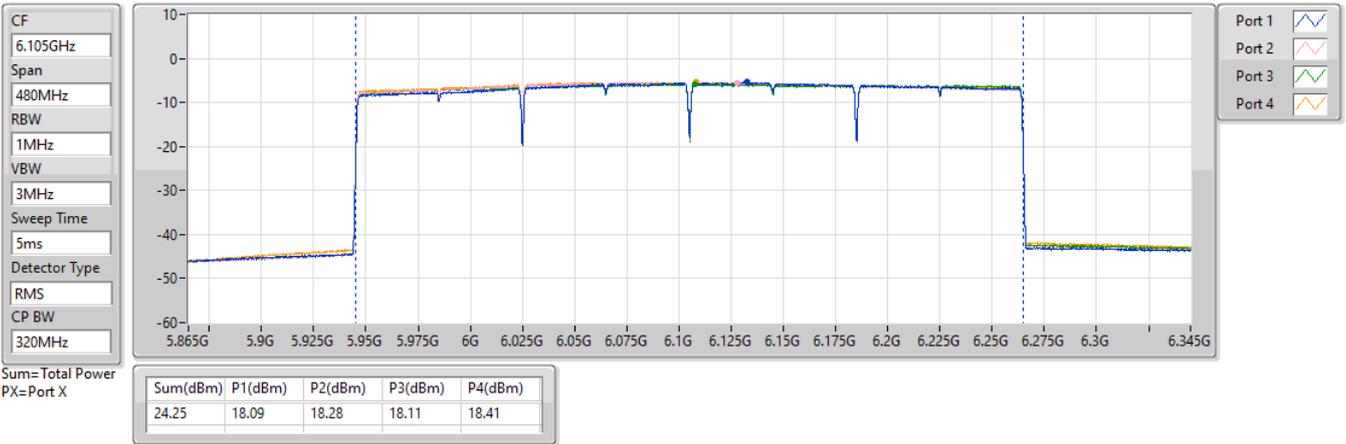

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6105MHz

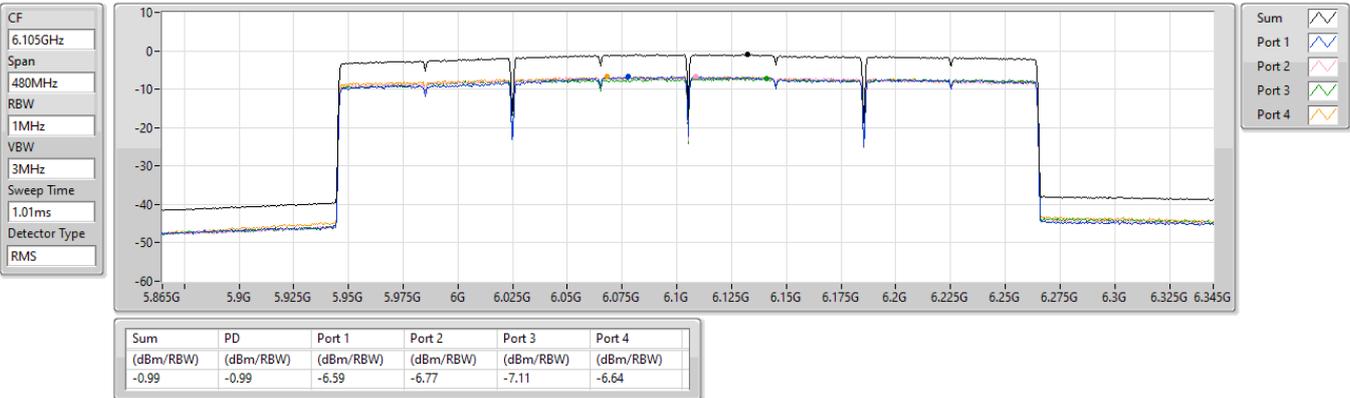



AFC Capability – Inquired Channel

Frequency (MHz): 6265

5.925-6.425GHz_802.11be EHT320_4TX

AV Power


6265MHz_TX



5.925-6.425GHz_802.11be EHT320_4TX

PSD

6265MHz

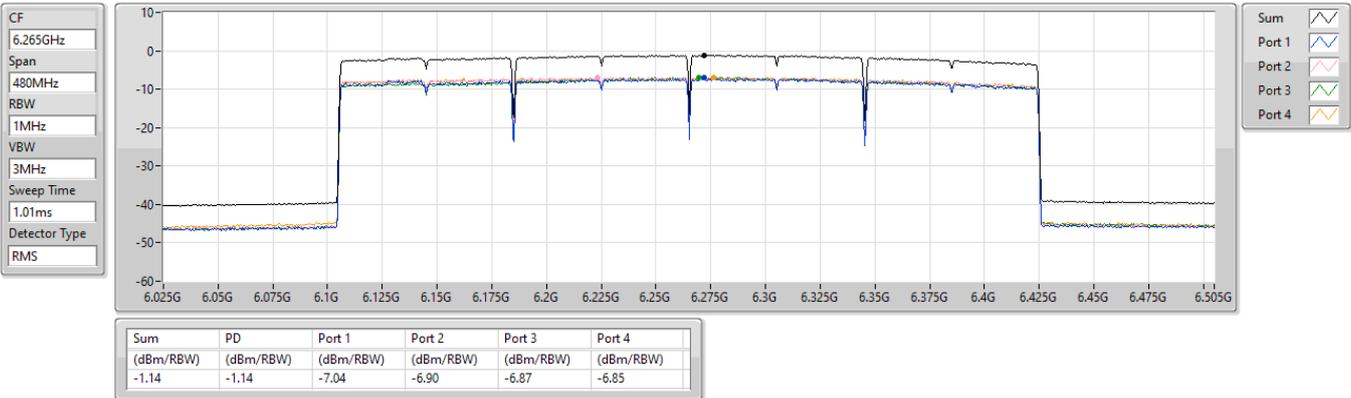



AFC Capability – Inquired Channel

Frequency (MHz): 6105

5.925-6.425GHz_802.11be EHT320_4TX

AV Power

6105MHz_TX

CF
6.105GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
5ms

Detector Type
RMS

CP BW
320MHz

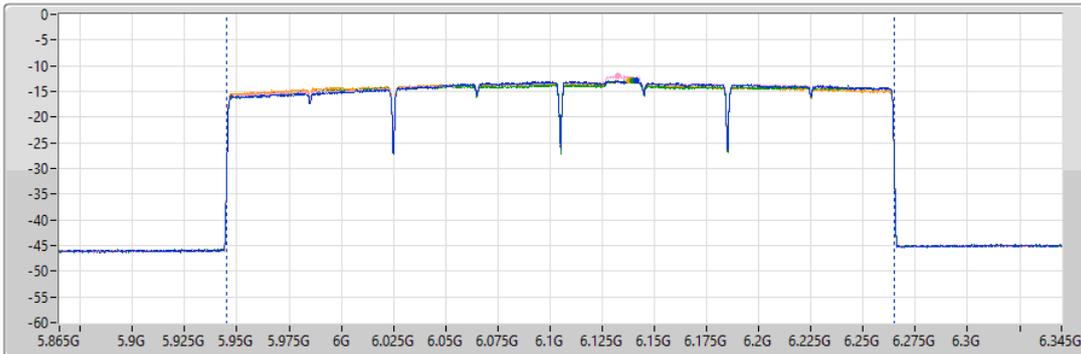

Port 1

Port 2

Port 3

Port 4

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
16.47	10.48	10.62	10.26	10.41

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6105MHz

CF
6.105GHz


Span
480MHz

RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

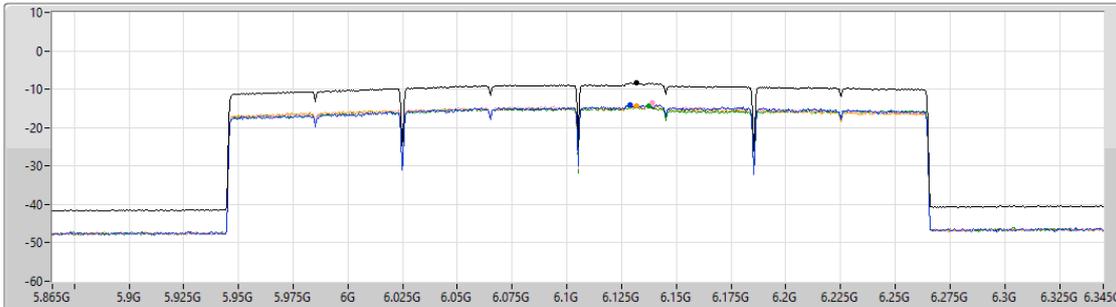

Sum

Port 1

Port 2

Port 3

Port 4

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)
-8.36	-8.36	-13.94	-13.54	-14.40	-14.24




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

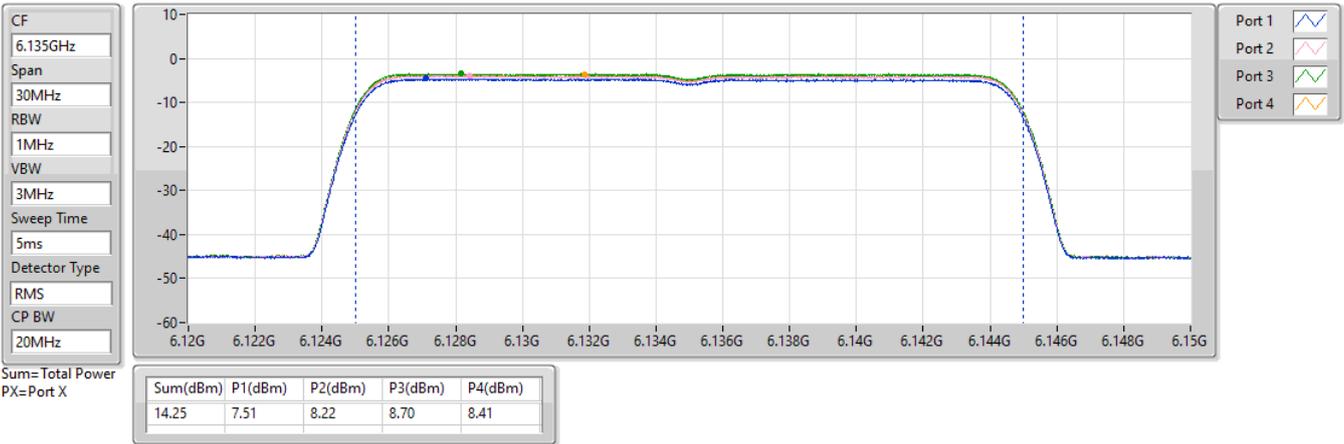

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

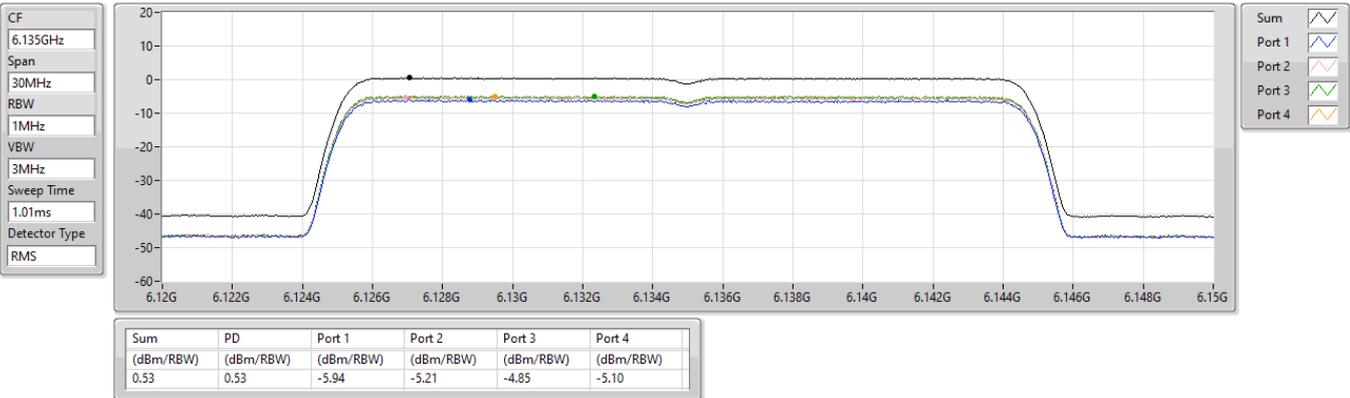




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6415

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6415MHz_TX

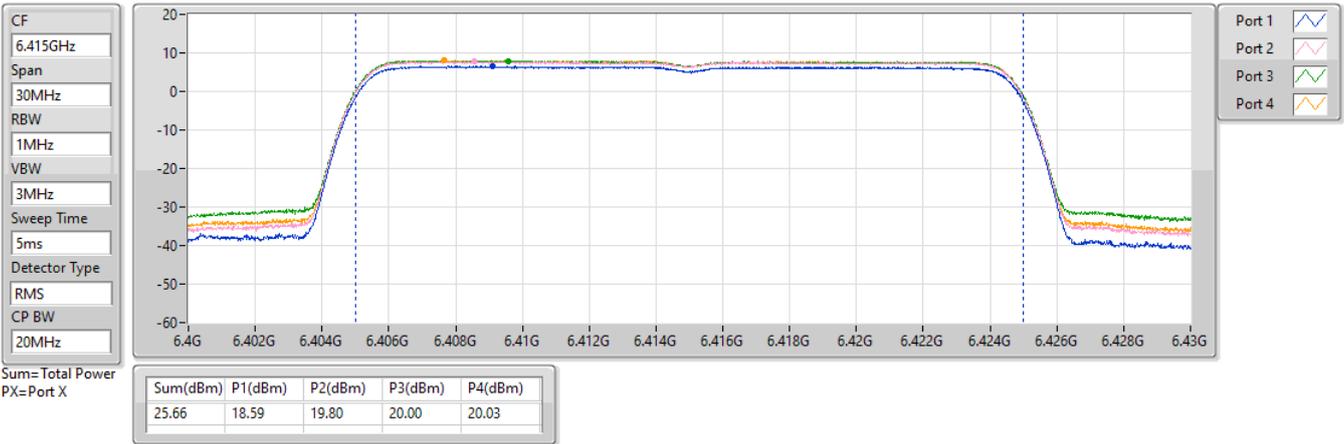

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6415MHz

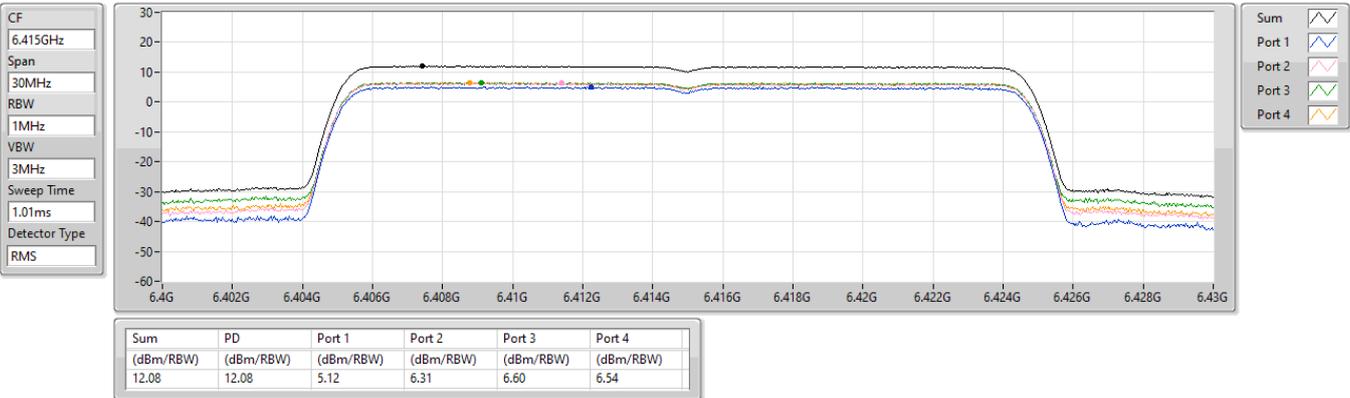




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6815

6.525-6.875GHz_802.11be EHT20_4TX

AV Power

6815MHz_TX

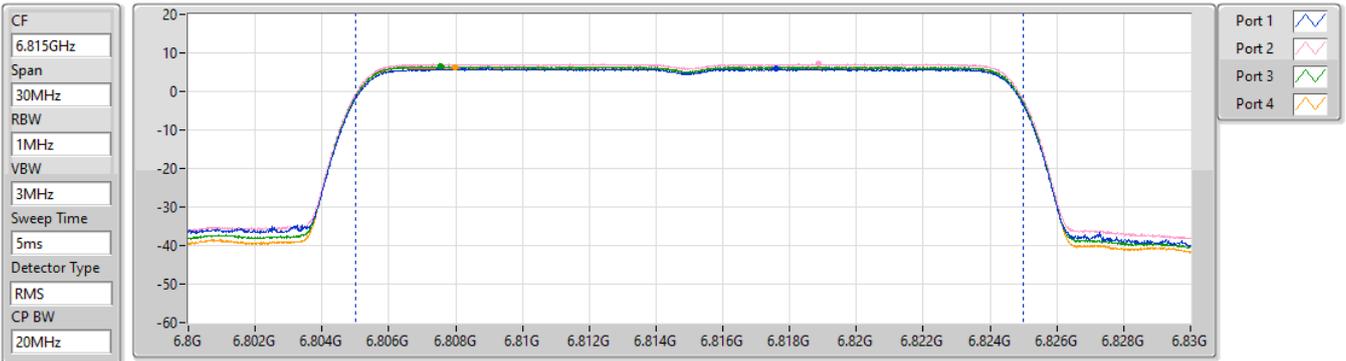


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
24.65	18.05	19.29	18.60	18.49

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6815MHz

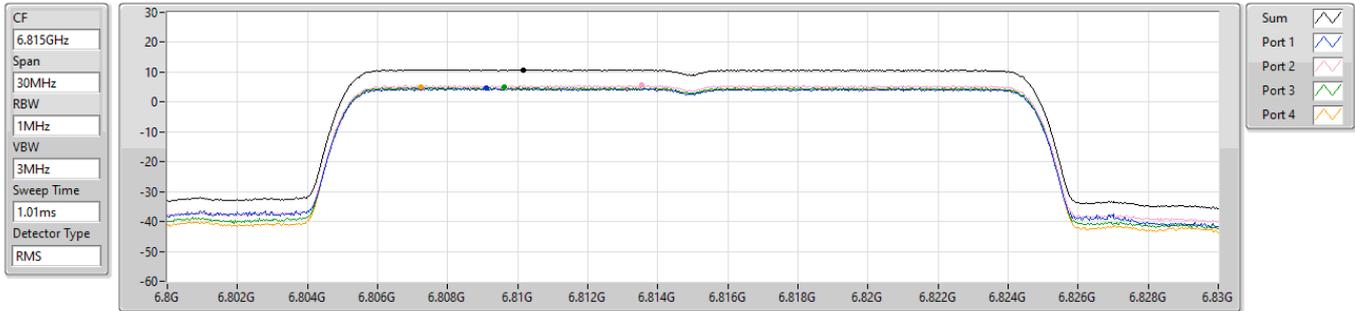

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	4.55	5.59	5.00	4.93




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6805

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6805MHz_TX

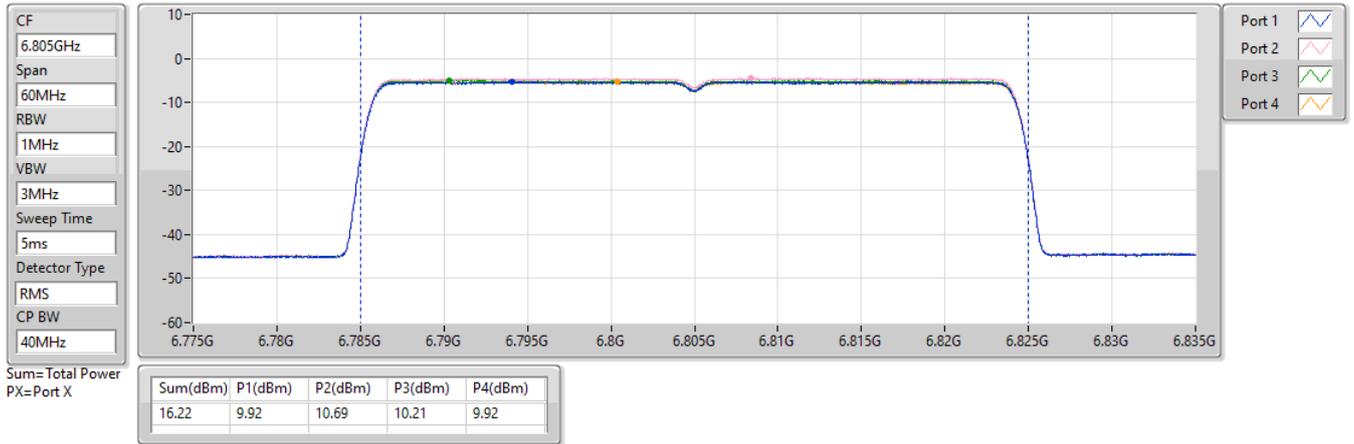

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6805MHz

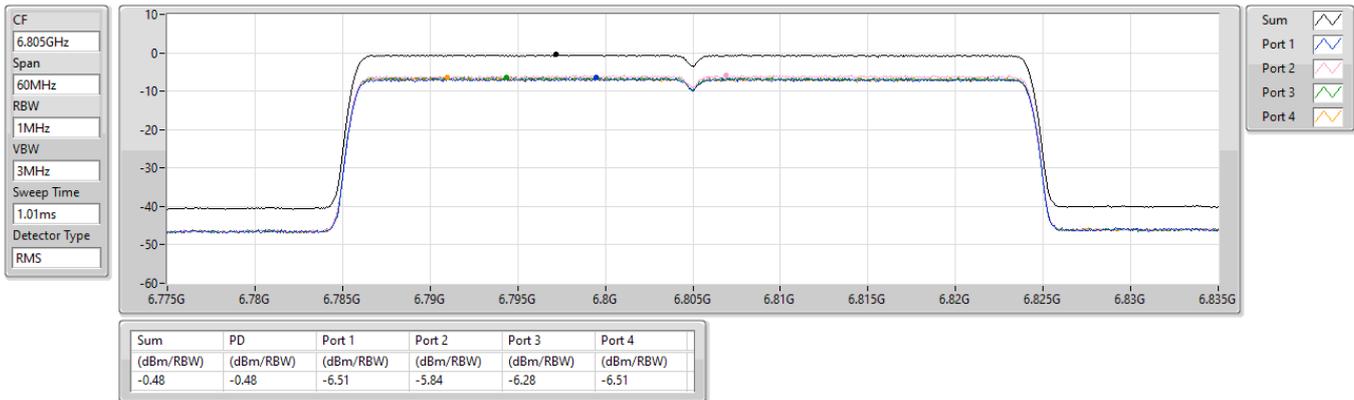




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6725

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6725MHz_TX

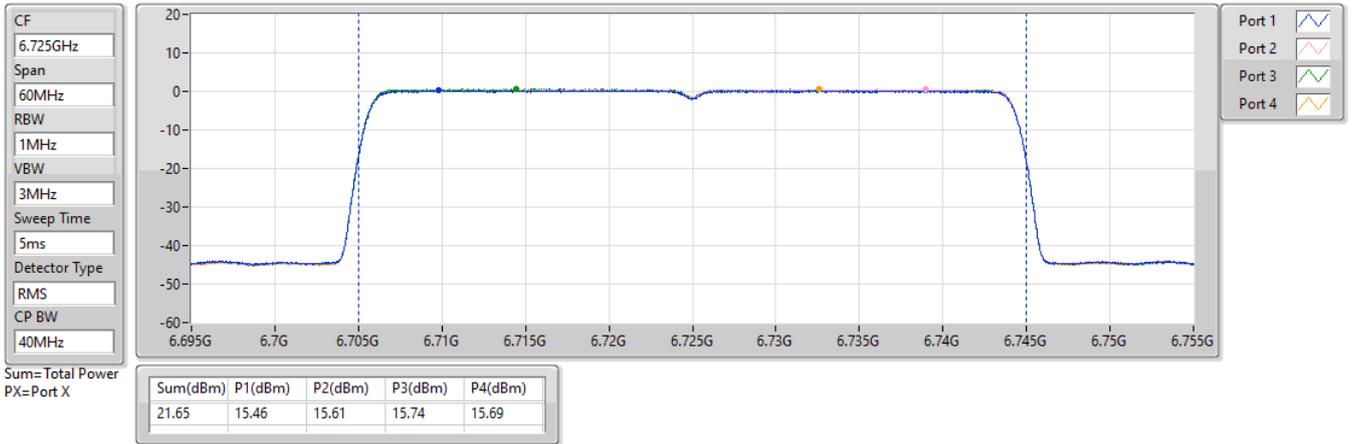

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6725MHz

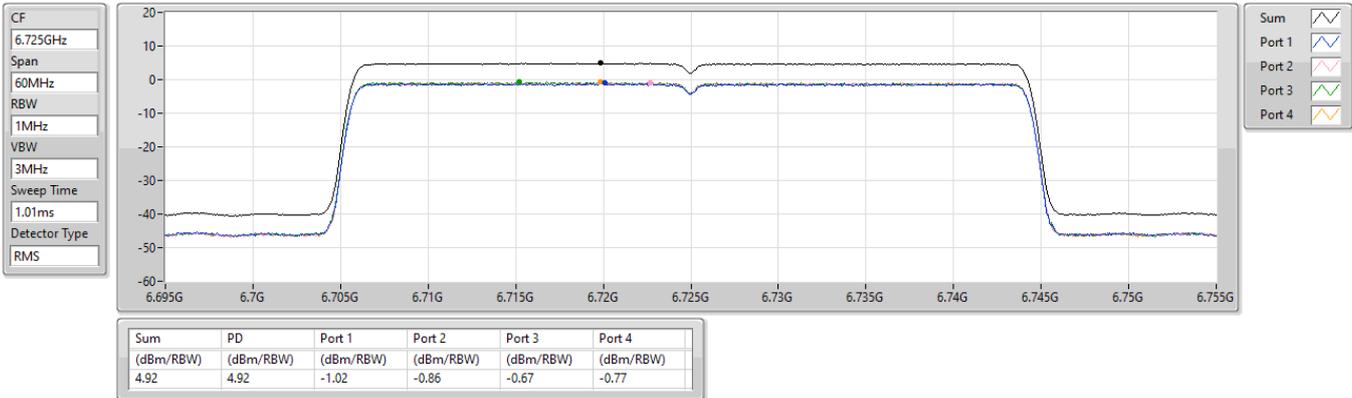




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6805

6.525-6.875GHz_802.11be EHT40_4TX

AV Power


6805MHz_TX

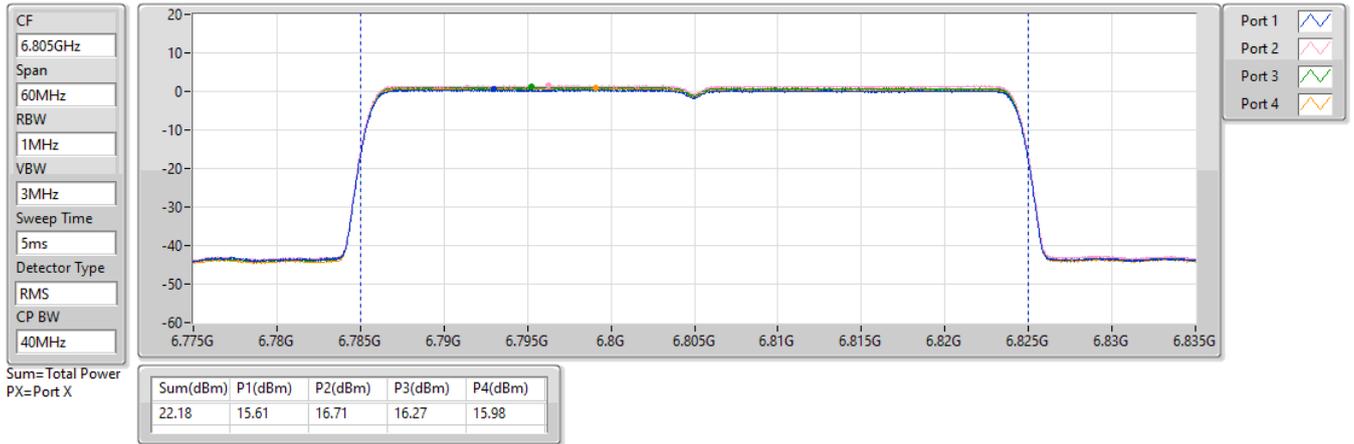

6.525-6.875GHz_802.11be EHT40_4TX

PSD

6805MHz

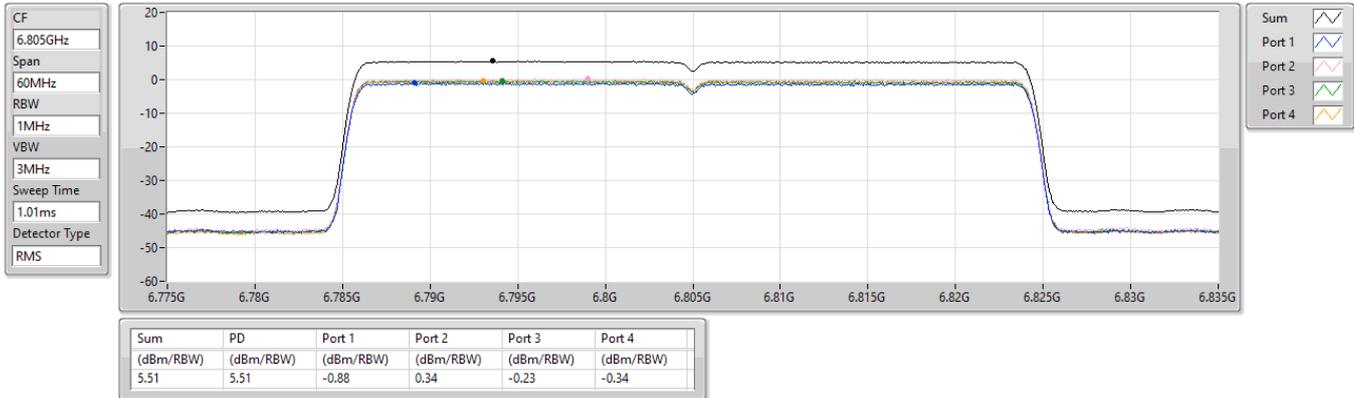




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

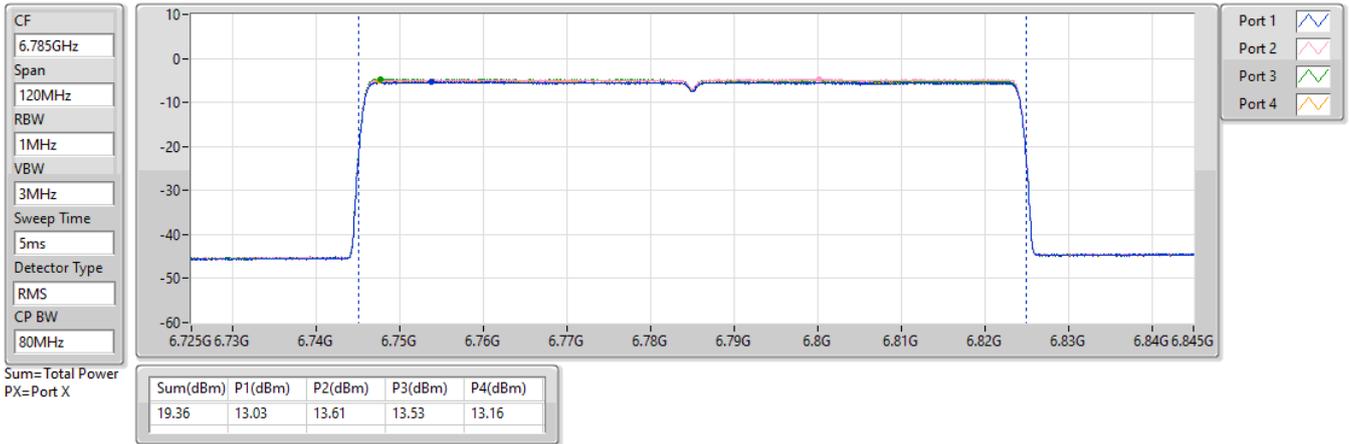

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

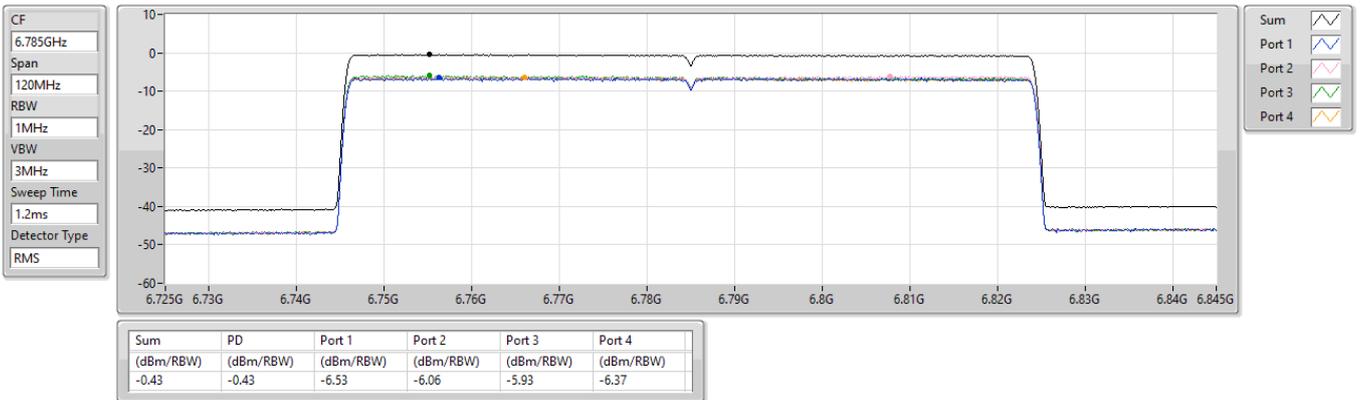




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6785

6.525-6.875GHz_802.11be EHT80_4TX

AV Power


6785MHz_TX

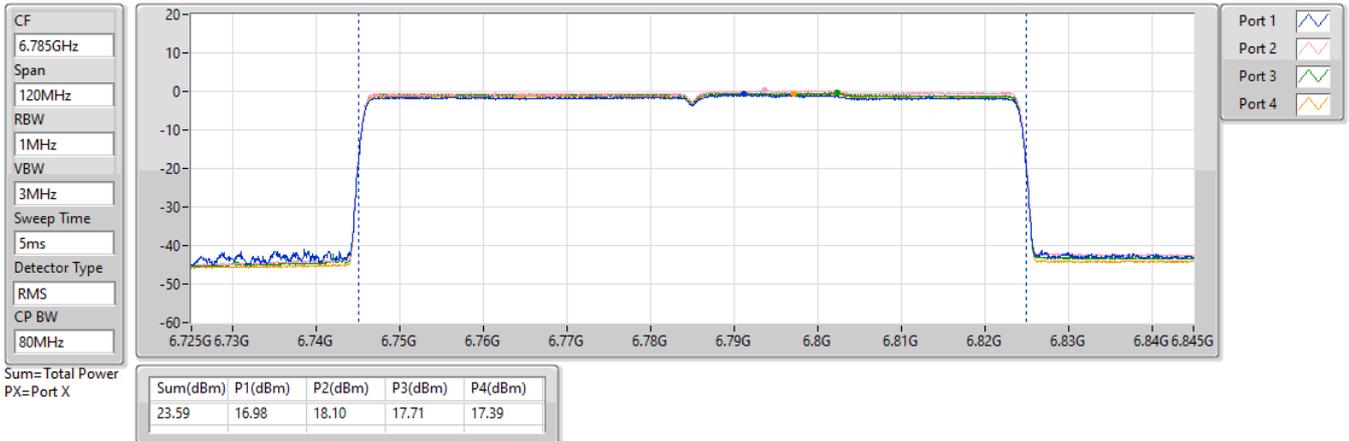

6.525-6.875GHz_802.11be EHT80_4TX

PSD

6785MHz

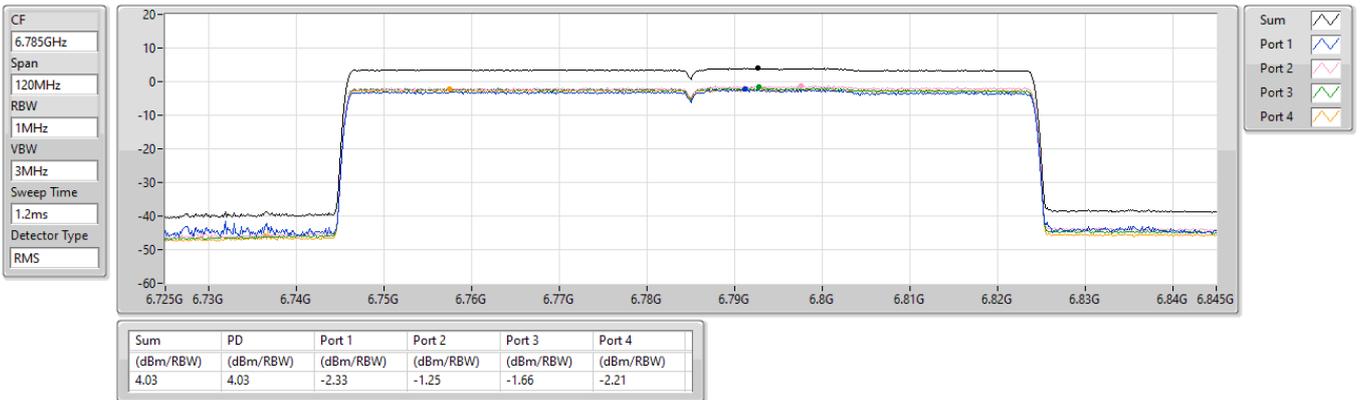




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6385

5.925-6.425GHz_802.11be EHT80_4TX

AV Power


6385MHz_TX

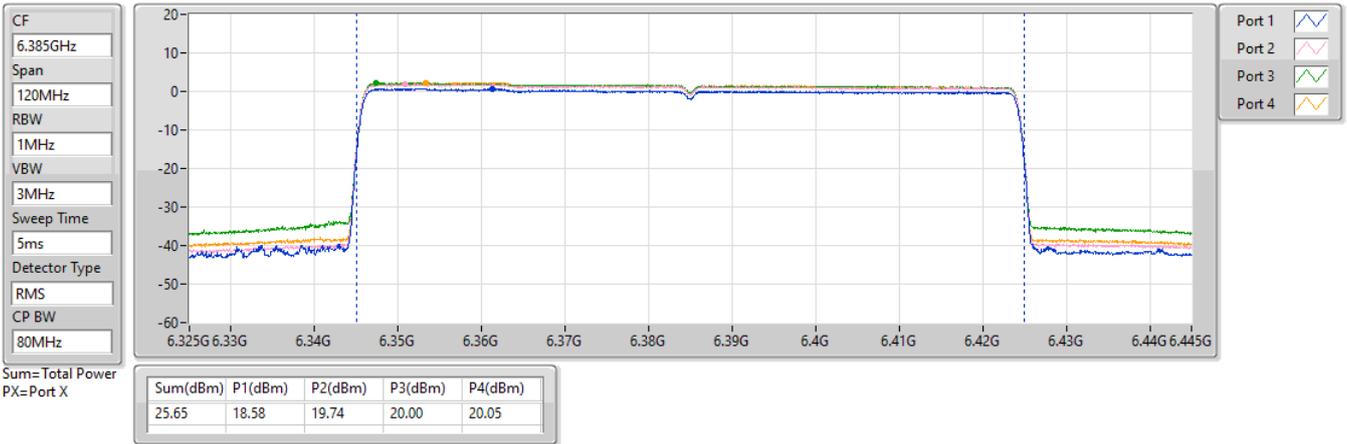

5.925-6.425GHz_802.11be EHT80_4TX

PSD

6385MHz

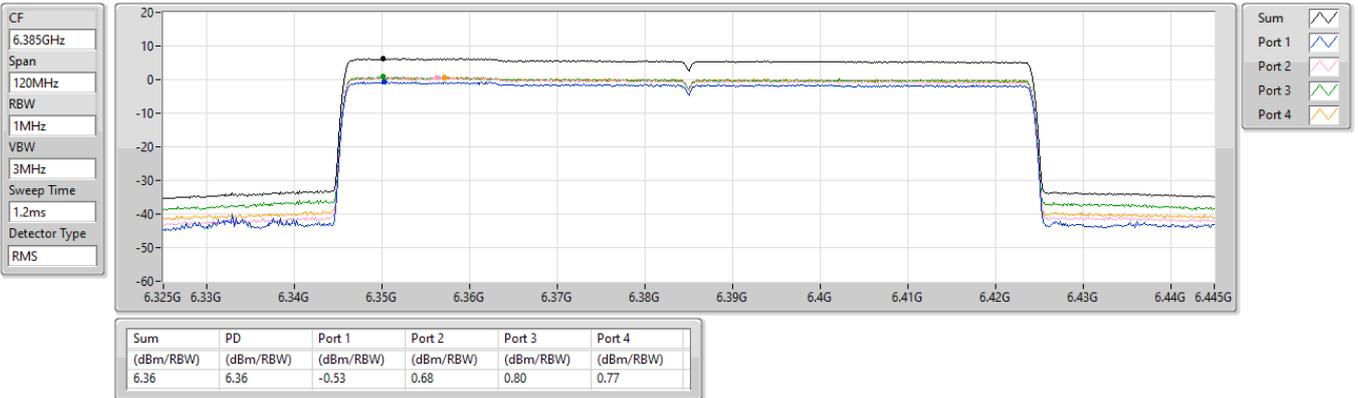




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6185

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6185MHz_TX

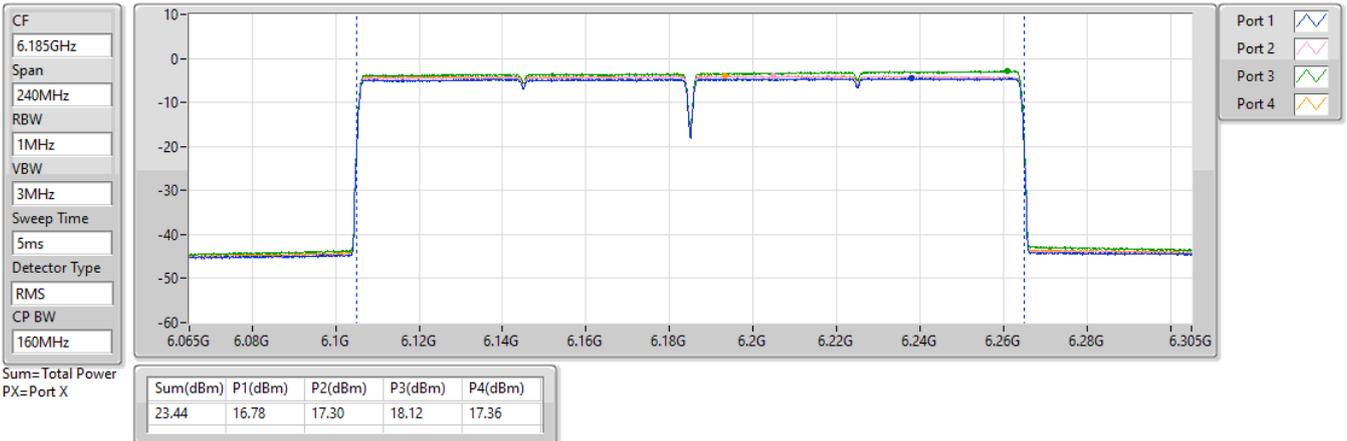

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6185MHz

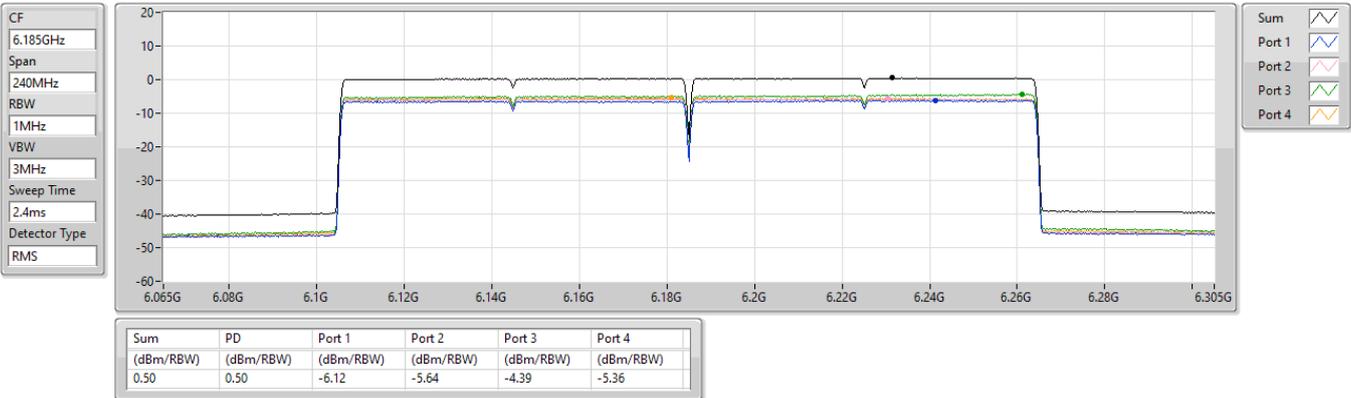




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6185

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6185MHz_TX

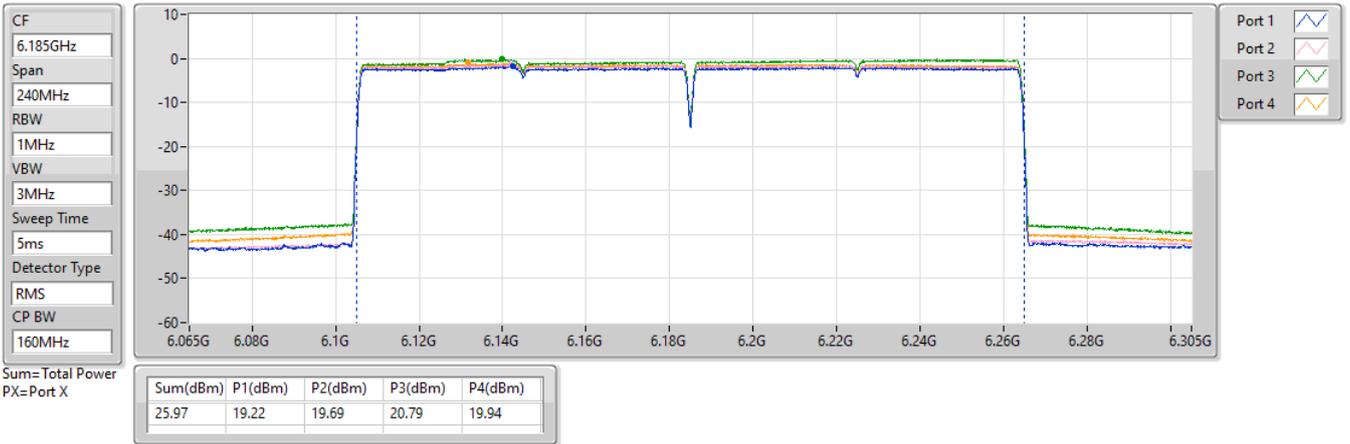

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6185MHz

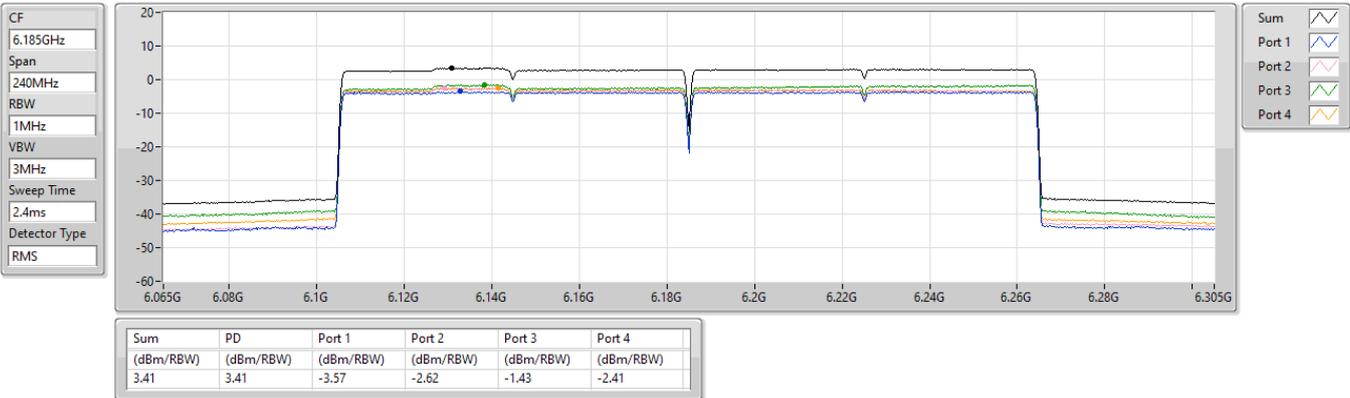




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6345

5.925-6.425GHz_802.11be EHT160_4TX

AV Power


6345MHz_TX

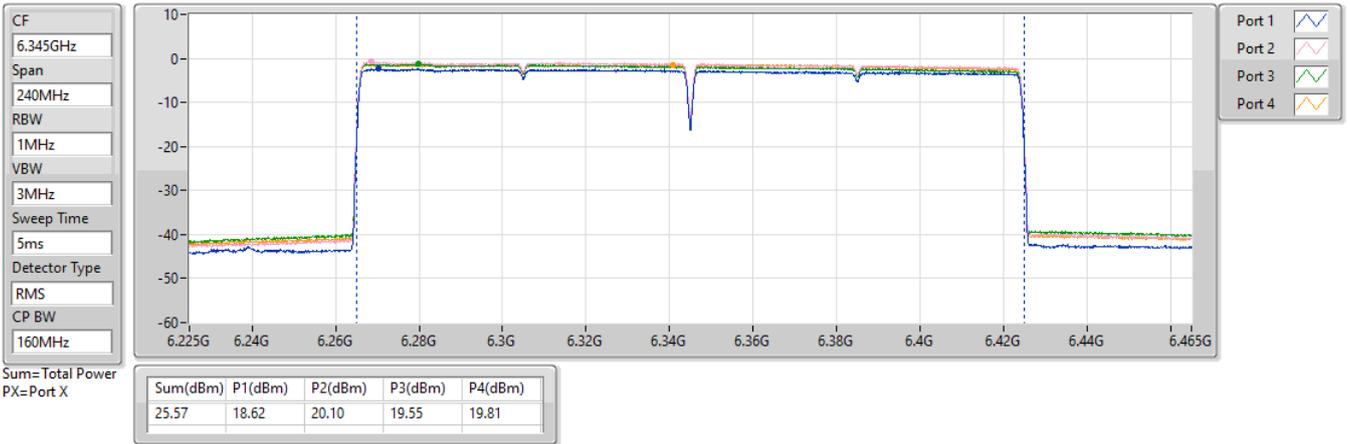

5.925-6.425GHz_802.11be EHT160_4TX

PSD

6345MHz

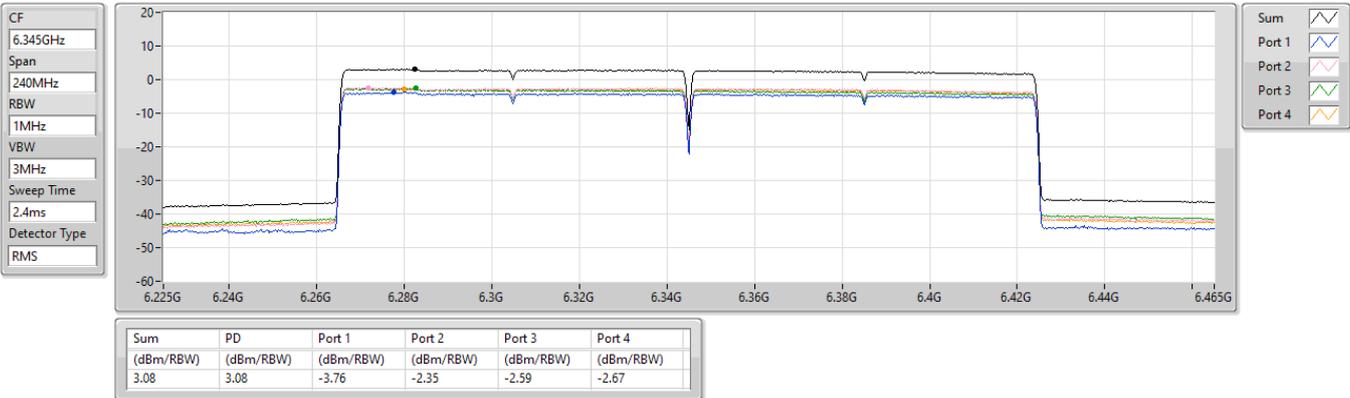




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6265

5.925-6.425GHz_802.11be EHT320_4TX

AV Power


6265MHz_TX

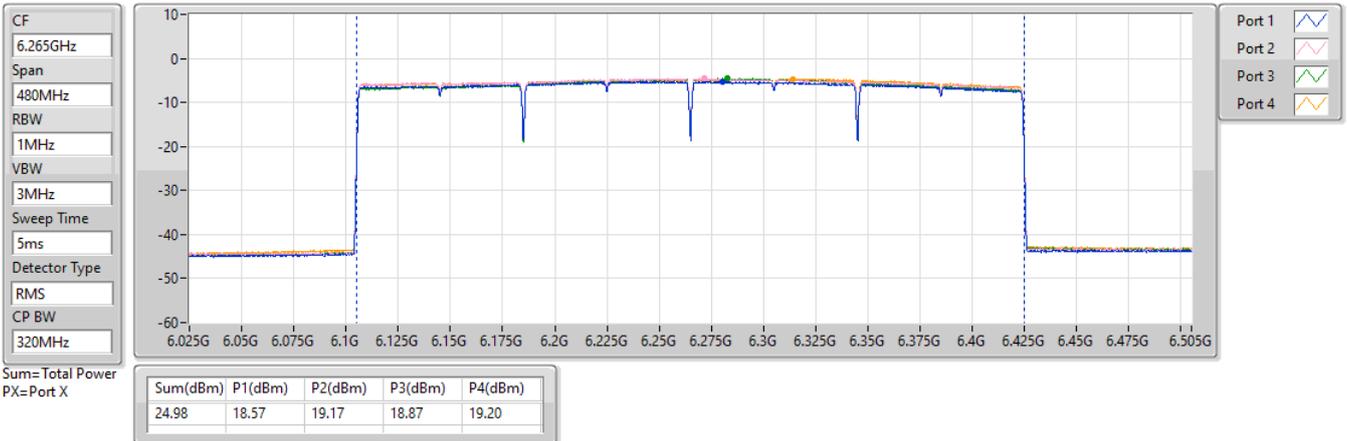

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6265MHz

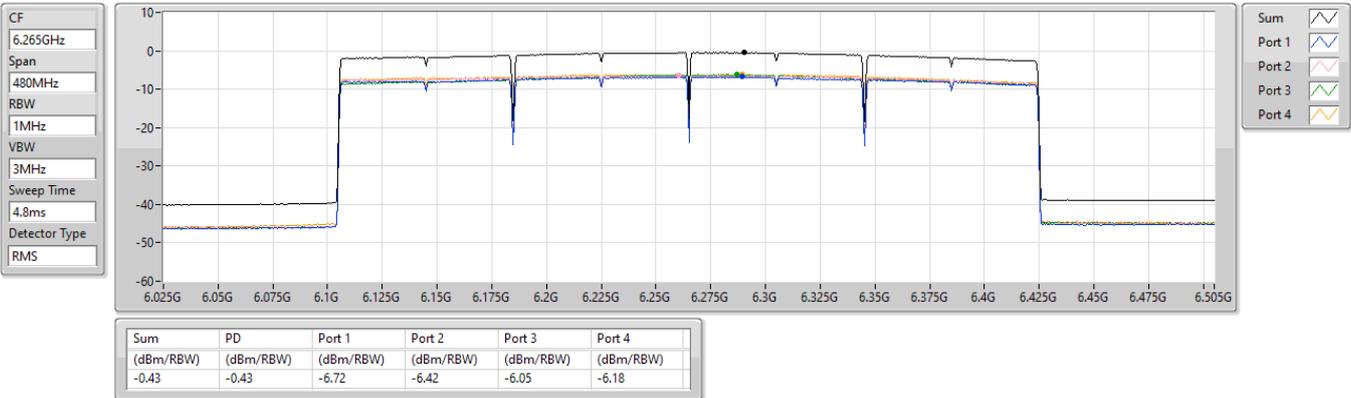



AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6105

5.925-6.425GHz_802.11be EHT320_4TX

AV Power

6105MHz_TX

CF
6.105GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
5ms

Detector Type
RMS

CP BW
320MHz

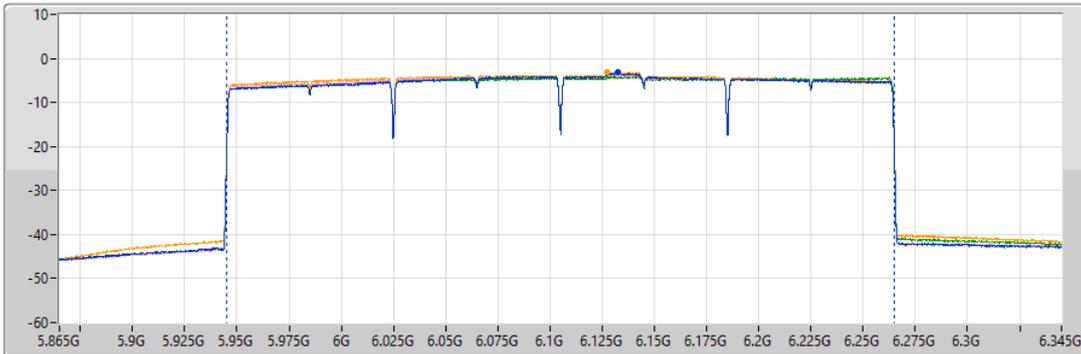

Port 1

Port 2

Port 3

Port 4

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
25.80	19.65	19.74	19.60	20.10

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6105MHz

CF
6.105GHz


Span
480MHz

RBW
1MHz

VBW
3MHz

Sweep Time
4.8ms

Detector Type
RMS

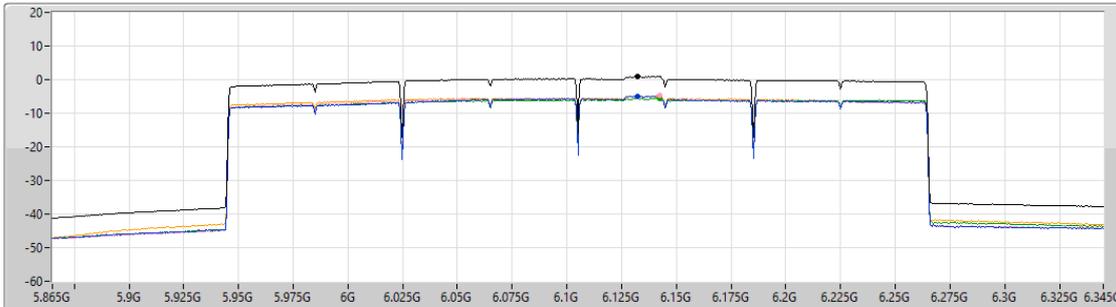

Sum

Port 1

Port 2

Port 3

Port 4

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)
0.93	0.93	-4.85	-4.82	-5.57	-4.87



AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6265

5.925-6.425GHz_802.11be EHT320_4TX

AV Power

6265MHz_TX

CF
6.265GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
5ms

Detector Type
RMS

CP BW
320MHz

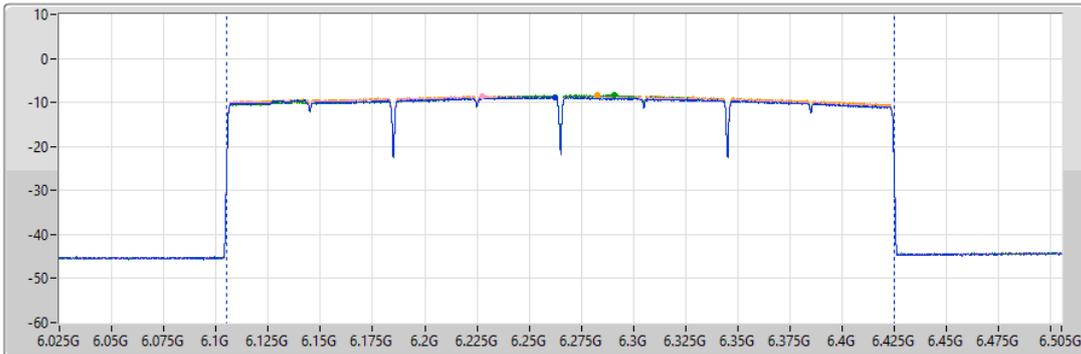

Port 1

Port 2

Port 3

Port 4

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
21.18	14.93	15.19	15.11	15.40

5.925-6.425GHz_802.11be EHT320_4TX

PSD

6265MHz

CF
6.265GHz


Span
480MHz

RBW
1MHz

VBW
3MHz

Sweep Time
4.8ms

Detector Type
RMS

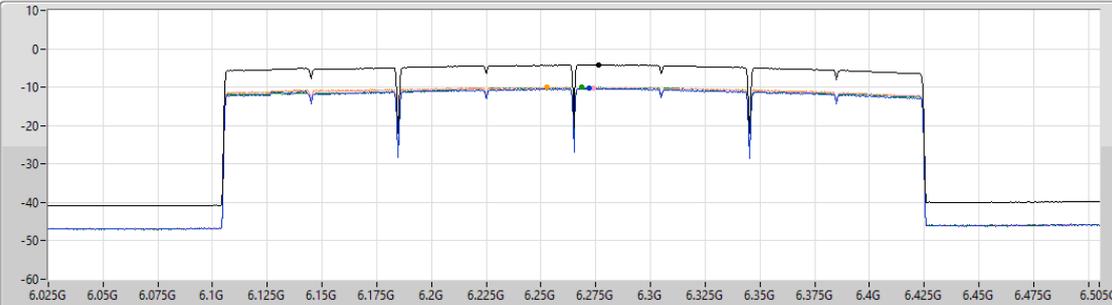

Sum

Port 1

Port 2

Port 3


Port 4

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)
-4.20	-4.20	-10.36	-10.19	-10.01	-10.00

Duty Cycle Measurement

Duty Cycle, Mode: be EHT20


DC;be20;BWch:20

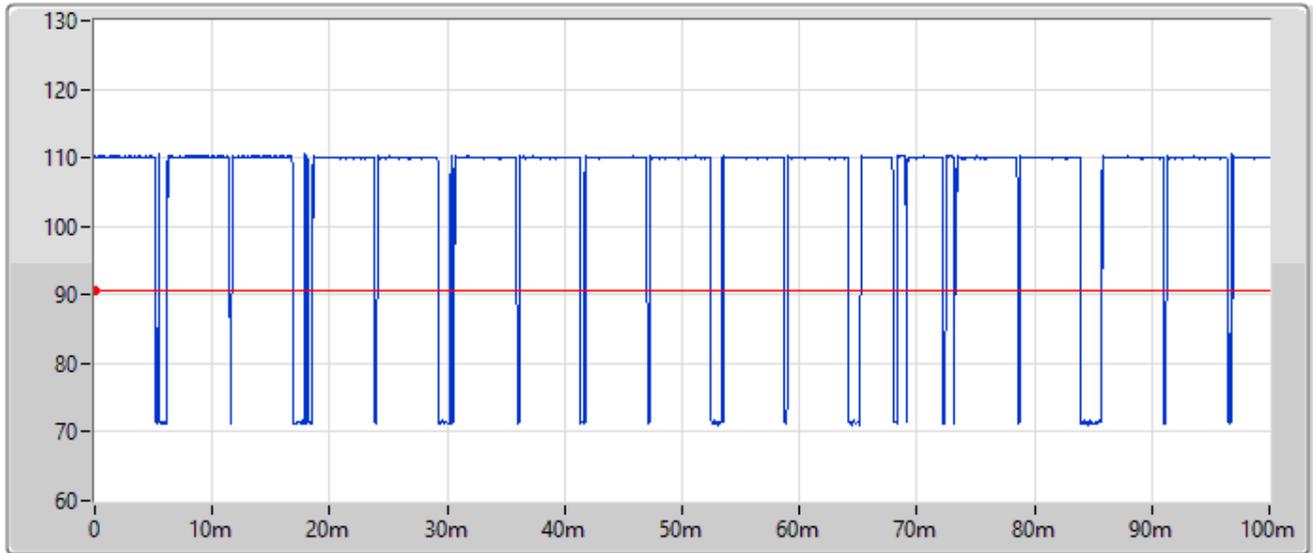

Ch Freq	RBW	VBW	Sweep Time	Total Sample	Sample Time	TX Time	DC
6.135GHz	10MHz	10MHz	100ms	2001	50us	90.15ms	0.901

Duty Cycle, Mode: be EHT40


DC;be40;BWch:40

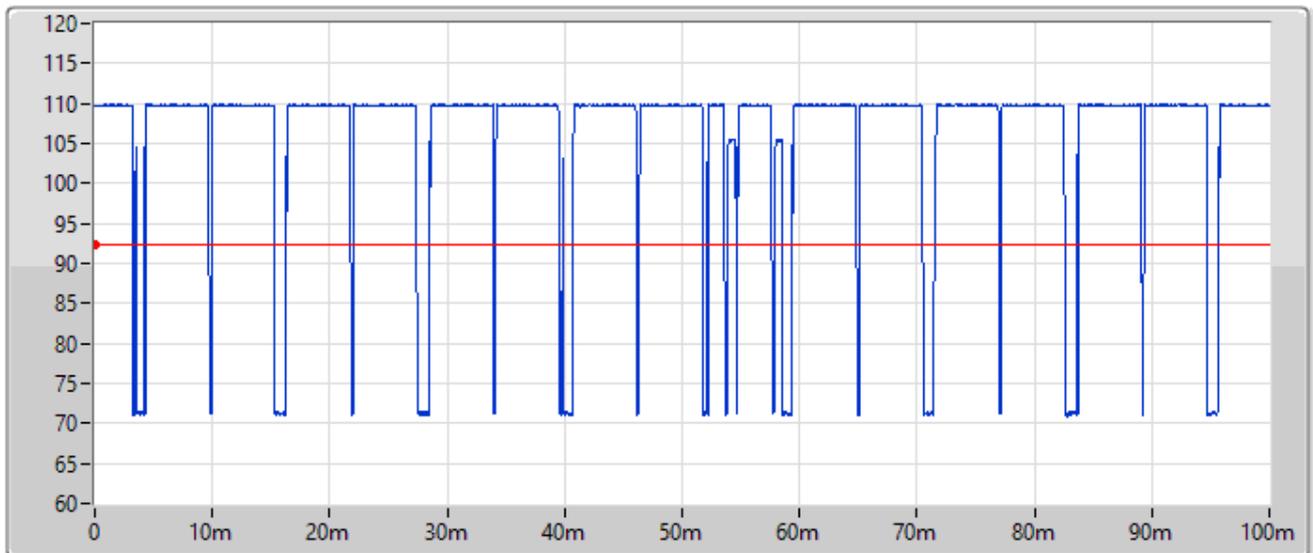

Ch Freq	RBW	VBW	Sweep Time	Total Sample	Sample Time	TX Time	DC
6.125GHz	10MHz	10MHz	100ms	2001	50us	90ms	0.9

Duty Cycle, Mode: be EHT80


DC;be80;BWch:80

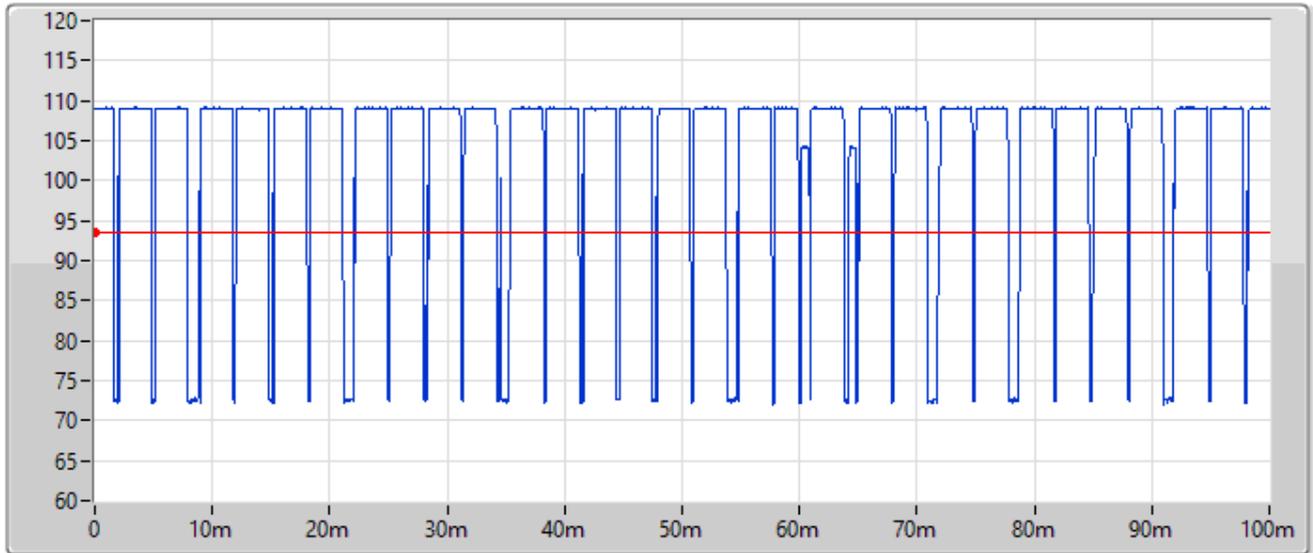

Ch Freq	RBW	VBW	Sweep Time	Total Sample	Sample Time	TX Time	DC
6.785GHz	10MHz	10MHz	100ms	2001	50us	87.35ms	0.873

Duty Cycle, Mode: be EHT160

DC;be160;BWch:160

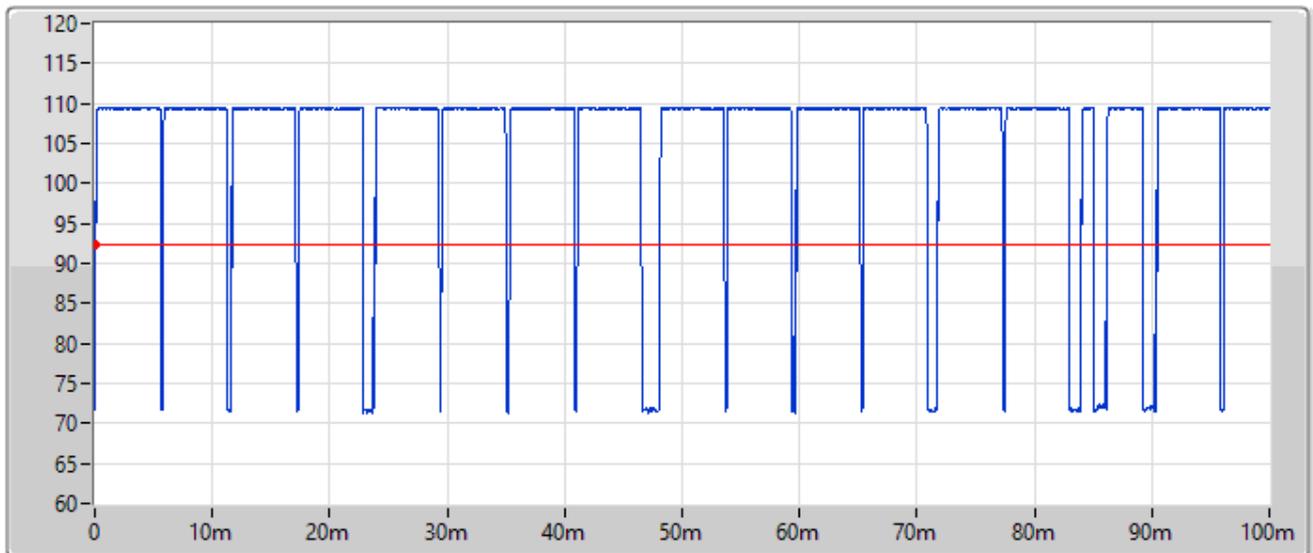


Ch Freq	RBW	VBW	Sweep Time	Total Sample	Sample Time	TX Time	DC
6.185GHz	10MHz	10MHz	100ms	2001	50us	90.75ms	0.907



Duty Cycle, Mode: be EHT320

DC;be320;BWch:320

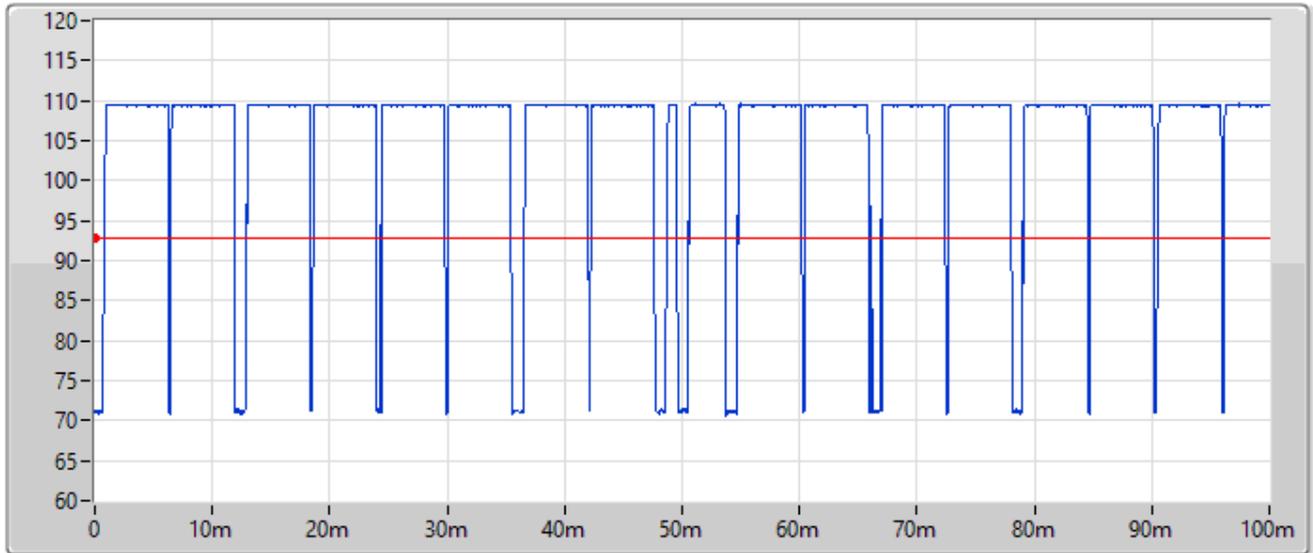

Ch Freq	RBW	VBW	Sweep Time	Total Sample	Sample Time	TX Time	DC
6.105GHz	10MHz	10MHz	100ms	2001	50us	90.05ms	0.9



AFC DUT Compliance Test Report

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	Gemtek
DUT Product Model	W1701K

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1 (Unsuccessful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1 (Unsuccessful registration and spectrum access request)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
	AFC DUT sends an Available		



AFC DUT Compliance Test Report

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditons in the Spectrum Inquiry Response	true	PASS



AFC DUT Compliance Test Report

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	Gemtek
DUT Product Model	W1701K

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1 (Unsuccessful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1 (Unsuccessful registration and spectrum access request)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
	AFC DUT sends an Available		



AFC DUT Compliance Test Report

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditons in the Spectrum Inquiry Response	true	PASS



AFC DUT Compliance Test Report

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	Gemtek
DUT Product Model	W1701K

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1 (Unsuccessful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1 (Unsuccessful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
	AFC DUT sends an Available		



AFC DUT Compliance Test Report

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditons in the Spectrum Inquiry Response	true	PASS



AFC Capability – Inquired Frequency

CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1

2025-02-24T09:32:49Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "640",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "25578827",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MXF-W1701K"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "longitude": -121.985869,
          "latitude": 37.381933
        },
        "majorAxis": 150,
```



```
        "minorAxis": 150,
        "orientation": 0
    },
    "elevation": {
        "height": 15,
        "heightType": "AGL",
        "verticalUncertainty": 2
    },
    "indoorDeployment": 0
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": -1
}
]
}
```

2025-02-24T09:32:49Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "requestId": "25578827",
      "availabilityExpireTime": "2025-02-25T09:32:49Z",
```



```
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
  }  
],  
"version": "1.4"  
}
```



AFC Capability – Inquired Channel

CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1

2025-02-25T03:03:44Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1365",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "48105893",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MXF-W1701K"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "longitude": -121.985869,
          "latitude": 37.381933
        },
        "majorAxis": 150,
```



```
"minorAxis": 150,
"orientation": 0
},
"elevation": {
  "height": 15,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 0
},
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
      65,
      69,
      73,
      77,
      81,
      85,
      89,
```



93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,
169,
173,
177,
181,
185,
189,
193,
197,
201,
205,
209,
213,
217,
221,
225,
229,
233

]



```
},  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,  
    211,  
    219,  
    227  
  ]  
},  
{  
  "globalOperatingClass": 133,
```



```
"channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215  
]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
},  
{  
    "globalOperatingClass": 136,  
    "channelCfi": [  
        2  
    ]  
},  
{  
    "globalOperatingClass": 137,
```



```
        "channelCfi": [
            31,
            63,
            95,
            127,
            159,
            191
        ]
    },
    ],
    "minDesiredPower": -1
}
]
}
}

##### 2025-02-25T03:03:44Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableChannelInfo": [],
            "requestId": "48105893",
            "availabilityExpireTime": "2025-02-26T03:03:44Z",
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
        }
    ],
    "version": "1.4"
}
```



AFC Capability – Inquired Frequency and Channel

CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1

2025-02-25T09:35:25Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "User-Agent": "libcrp/0.1",
    "Accept": "application/json",
    "Content-Type": "application/json",
    "Expect": "100-continue",
    "X-Forwarded-For": "192.168.50.179",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1493",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "45026604",
        "deviceDescriptor": {
          "serialNumber": "W1701K2405000030",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MXF-W1701K"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "longitude": -121.985869,
          "latitude": 37.381933
        },
        "majorAxis": 150,
```



```
"minorAxis": 150,
"orientation": 0
},
"elevation": {
  "height": 15,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 0
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
```



53,
57,
61,
65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
117,
121,
125,
129,
133,
137,
141,
145,
149,
153,
157,
161,
165,
169,
173,
177,
181,
185,
189,
193,
197,



```
        201,  
        205,  
        209,  
        213,  
        217,  
        221,  
        225,  
        229,  
        233  
    ]  
},  
{  
    "globalOperatingClass": 132,  
    "channelCfi": [  
        3,  
        11,  
        19,  
        27,  
        35,  
        43,  
        51,  
        59,  
        67,  
        75,  
        83,  
        91,  
        99,  
        107,  
        115,  
        123,  
        131,  
        139,  
        147,  
        155,  
        163,  
        171,  
        179,
```



```
        187,  
        195,  
        203,  
        211,  
        219,  
        227  
    ]  
},  
{  
    "globalOperatingClass": 133,  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207
```



```
    ]
  },
  {
    "globalOperatingClass": 136,
    "channelCfi": [
      2
    ]
  },
  {
    "globalOperatingClass": 137,
    "channelCfi": [
      31,
      63,
      95,
      127,
      159,
      191
    ]
  }
],
"minDesiredPower": -1
}
]
}
}
```

2025-02-25T09:35:25Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "availableChannelInfo": [],
      "requestId": "45026604",
    }
  ]
}
```



```
"availabilityExpireTime": "2025-02-26T09:35:25Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
  "version": "1.4"  
}
```



Transmitting Power Measurement

AFC Capability – Inquired Frequency

AFCD.USA: Unsuccessful spectrum access update												
Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6135	LPI	20	14.23	4.20	18.43	-	N/A	0.56	4.20	4.76	5	Pass
6135	LPI	20	14.22	4.20	18.42	-	N/A	0.54	4.20	4.74	5	Pass

AFC Capability – Inquired Channel

AFCD.USA: Unsuccessful spectrum access update												
Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6135	LPI	20	14.28	4.20	18.48	-	N/A	0.60	4.20	4.80	5	Pass
6135	LPI	20	14.29	4.20	18.49	-	N/A	0.63	4.20	4.83	5	Pass

AFC Capability – Inquired Frequency & Channel

AFCD.USA: Unsuccessful spectrum access update												
Freq (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Power (dBm)	Power Directional Gain (dBi)	EIRP (dBm)	AFC Response EIRP Limit (dBm)	Result	PSD (dBm/MHz)	PSD Directional Gain (dBi)	EIRP PSD (dBm/MHz)	AFC Response EIRP PSD Limit (dBm/MHz)	Result
6655	LPI	20	13.06	5.31	18.37	-	N/A	-0.59	5.31	4.72	5	Pass
6655	LPI	20	13.10	5.31	18.41	-	N/A	-0.53	5.31	4.78	5	Pass




AFC Capability – Inquired Frequency

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

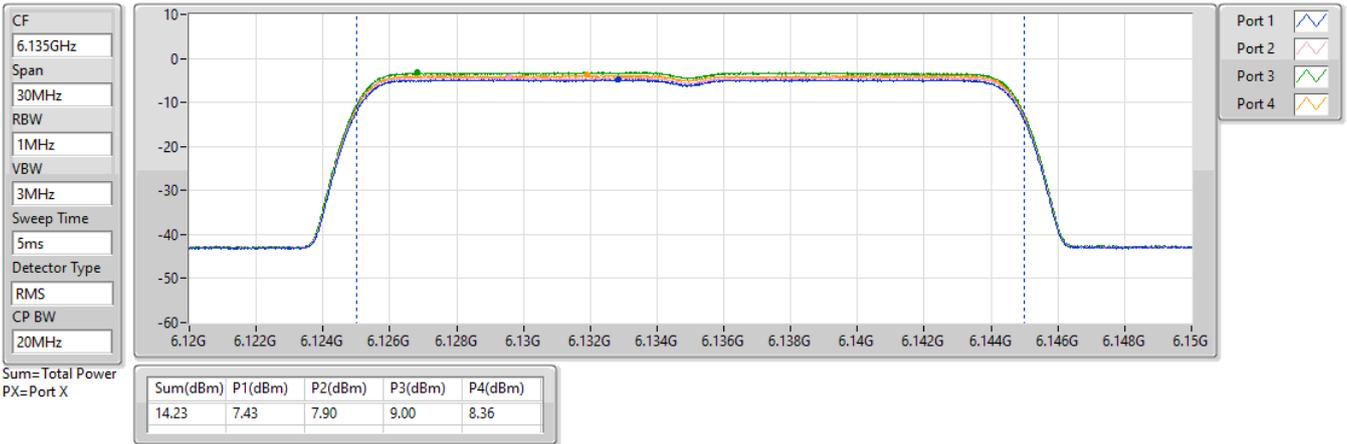

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

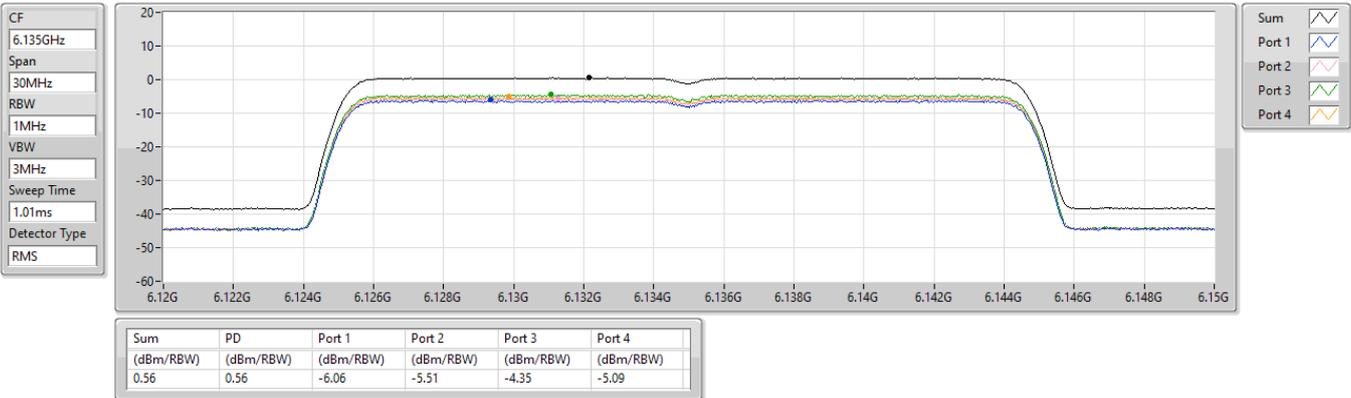




AFC Capability – Inquired Frequency

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

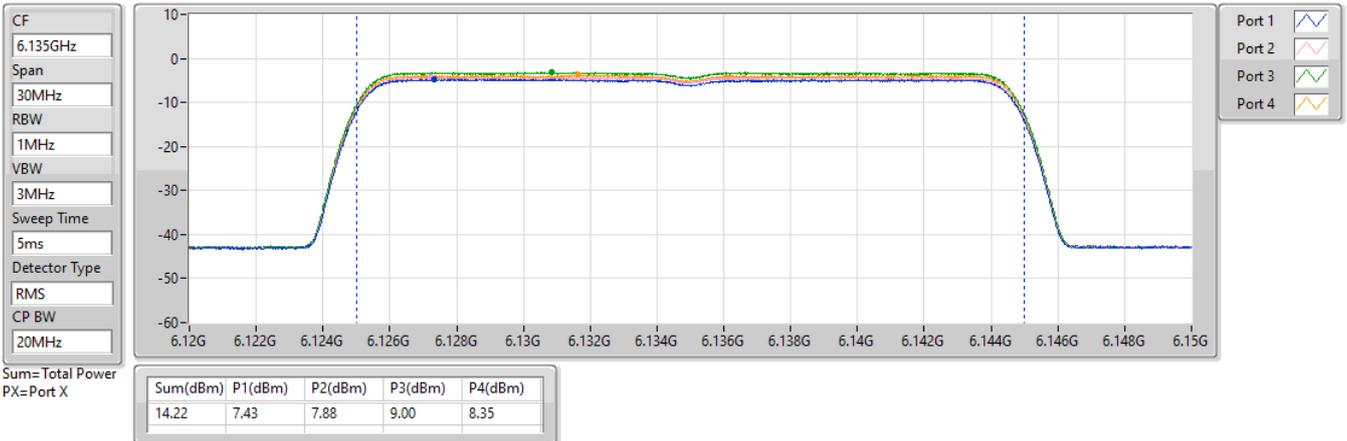

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

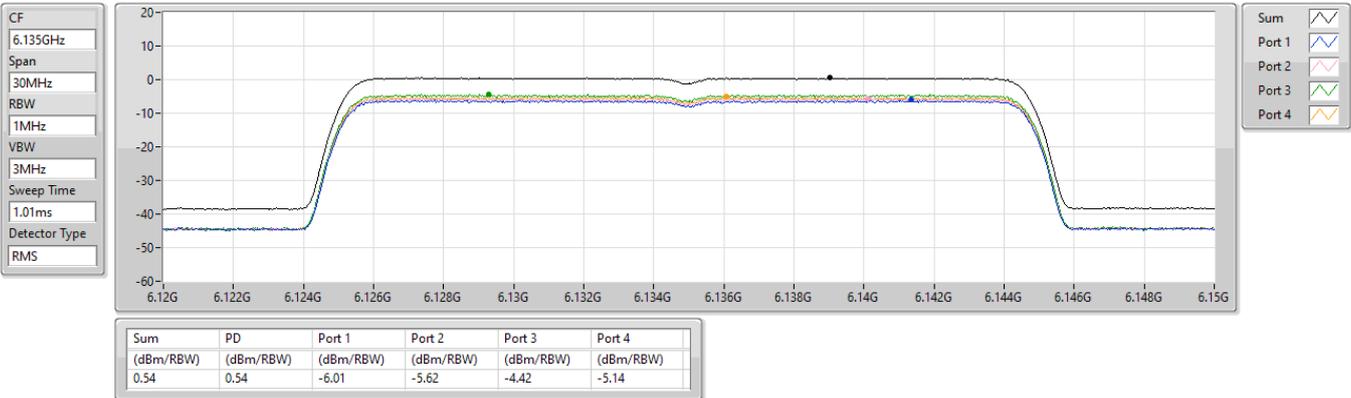




AFC Capability – Inquired Channel

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

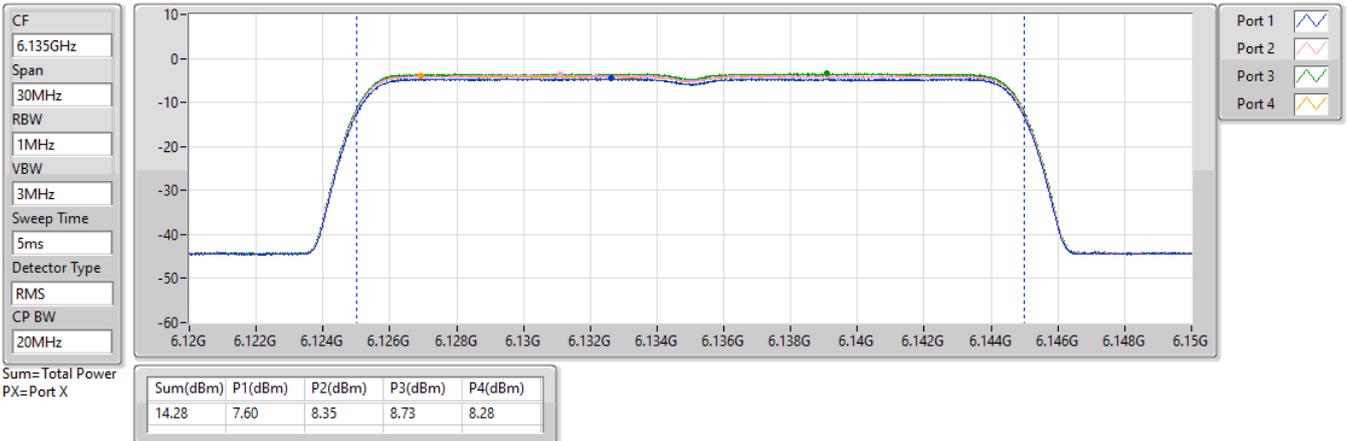

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

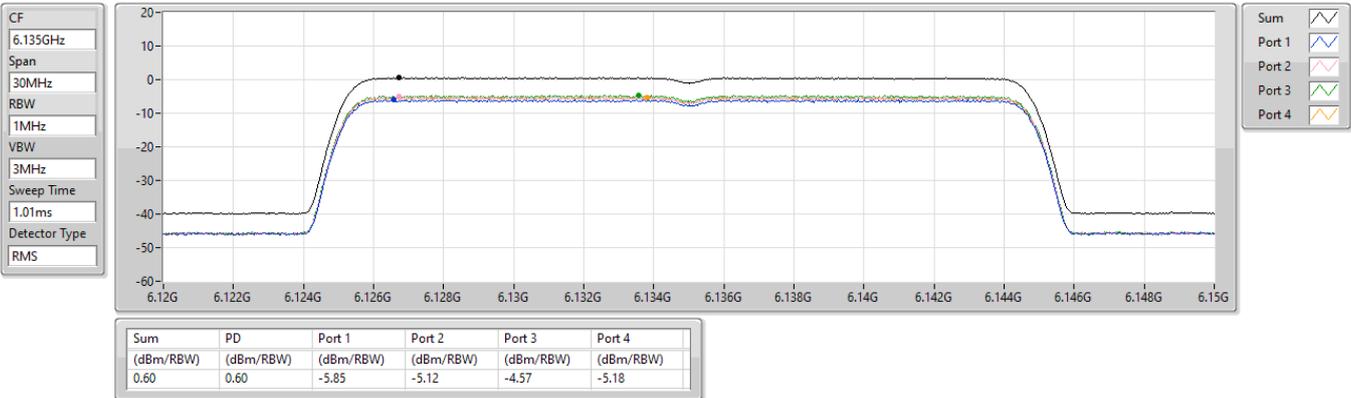




AFC Capability – Inquired Channel

Frequency (MHz): 6135

5.925-6.425GHz_802.11be EHT20_4TX

AV Power


6135MHz_TX

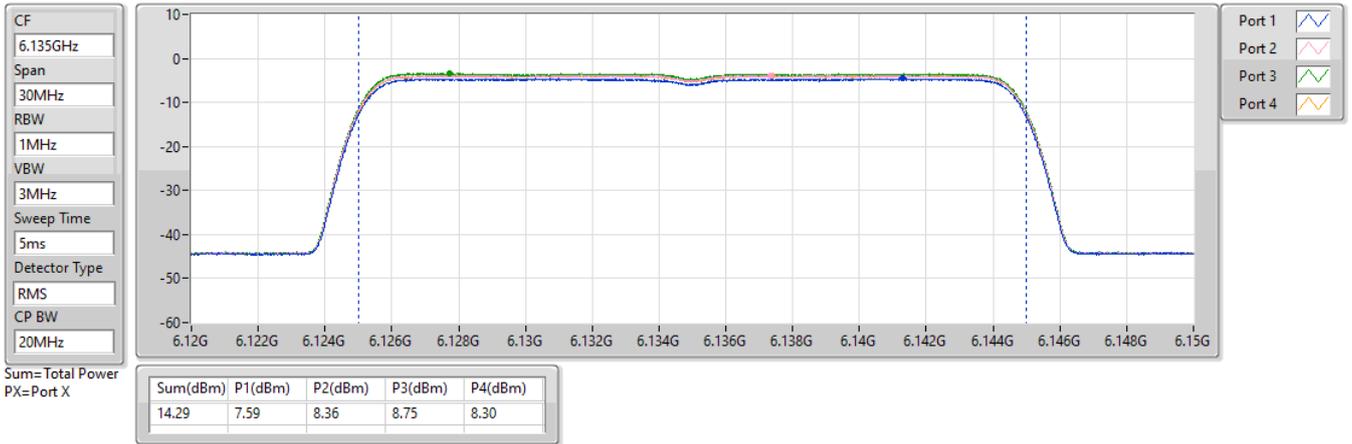

5.925-6.425GHz_802.11be EHT20_4TX

PSD

6135MHz

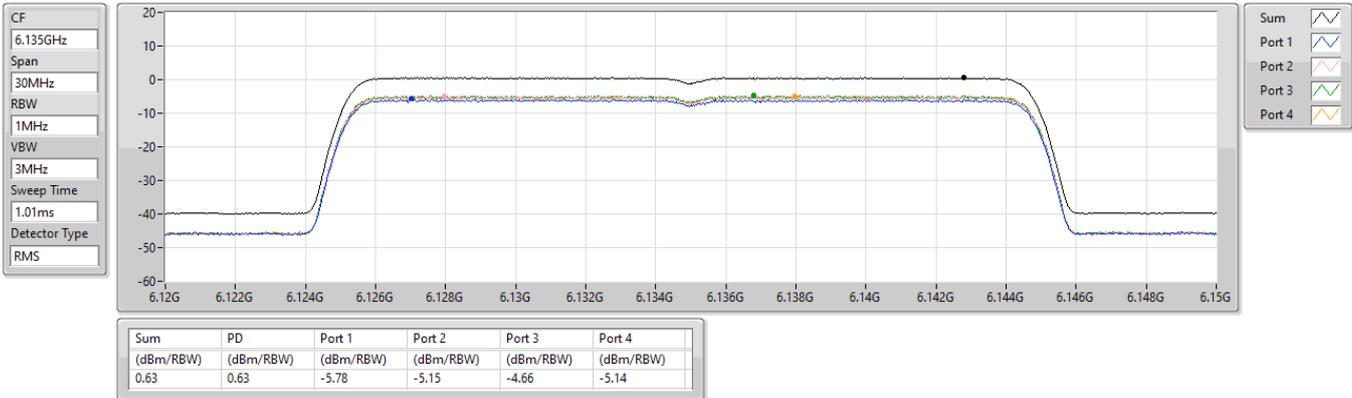




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6655

6.525-6.875GHz_802.11be EHT20_4TX

AV Power

6655MHz_TX

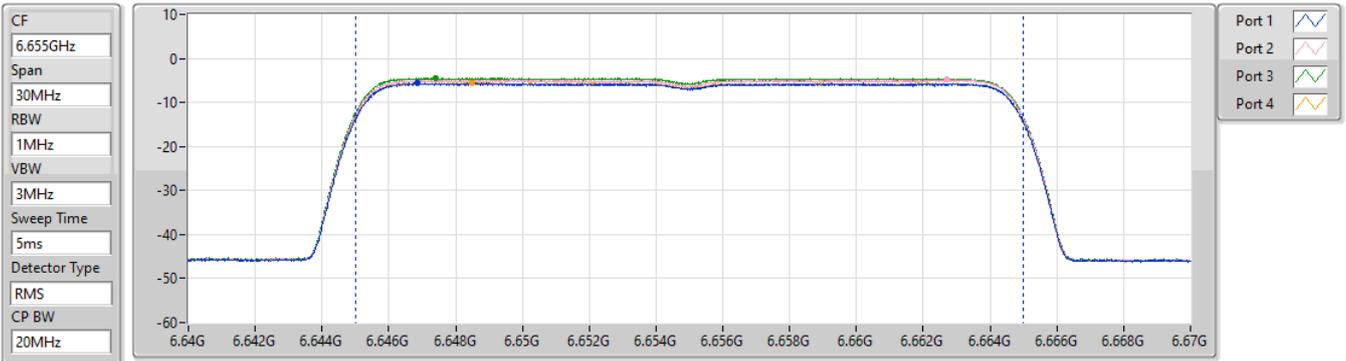


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
13.06	6.50	7.24	7.70	6.61

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6655MHz

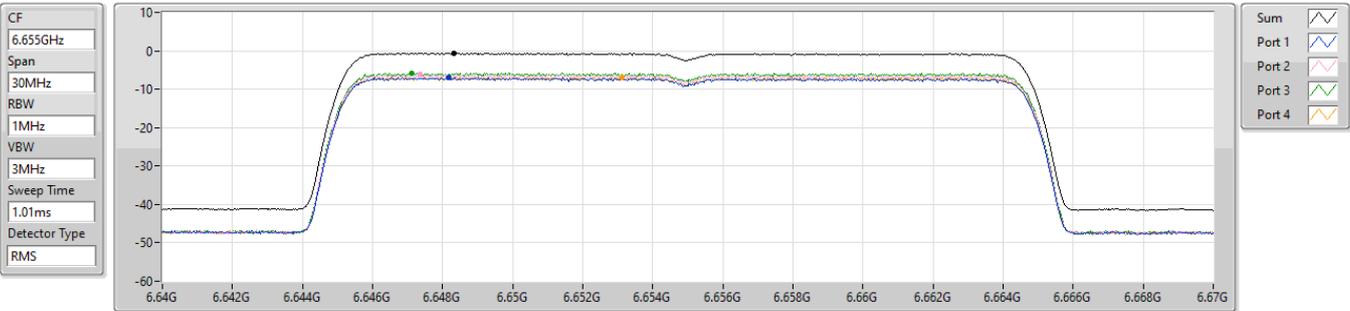

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.59	-0.59	-6.88	-6.24	-5.80	-6.84




AFC Capability – Inquired Frequency & Channel

Frequency (MHz): 6655

6.525-6.875GHz_802.11be EHT20_4TX

AV Power

6655MHz_TX

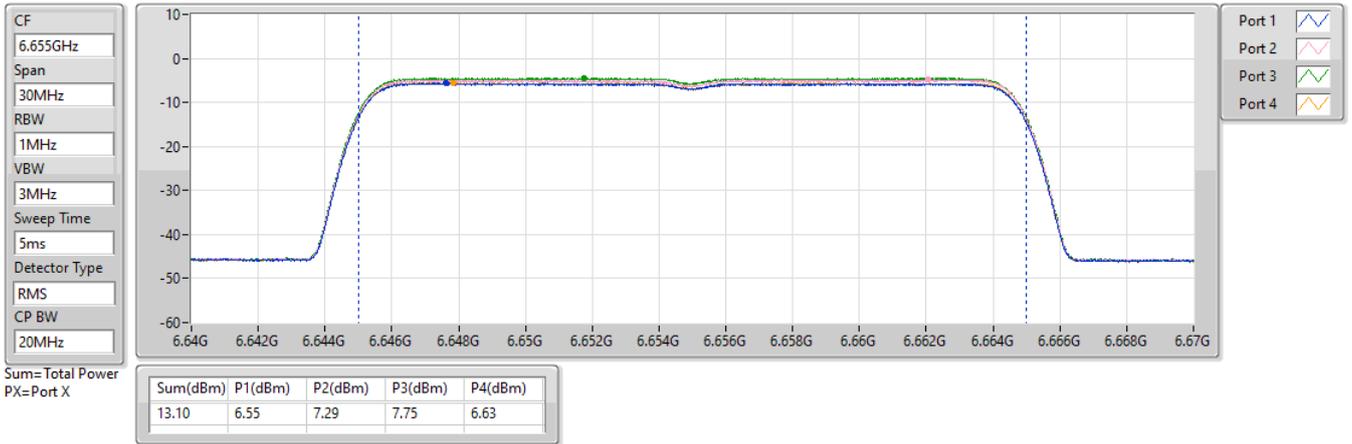

6.525-6.875GHz_802.11be EHT20_4TX

PSD

6655MHz

