

TEST REPORT

FCC Test for SDR-30-600
Certification

APPLICANT
ADRF KOREA, Inc.

REPORT NO.
HCT-RF-2007-FC019-R2

DATE OF ISSUE
27 July 2020

Tested by
Kyung Soo Kang



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC Test for
SDR-30-600

REPORT NO.
HCT-RF-2007-FC019-R2

DATE OF ISSUE
July 27, 2020

Additional Model
—

Applicant	ADRF KOREA, Inc. 5-5, Mojeon-Ri, Backsa-Myun, Icheon-Citi, Kyunggi-Do, Korea
Eut Type Model Name	REPEATER SDR-30-600
FCC ID	N52-SDR-30-600
Output Power	30 dBm
Date of Test	July 2, 2020 ~ July 13, 2020
FCC Rule Parts:	Part 2, Part 27

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 14, 2020	Initial Release
1	July 24, 2020	Added the note 'Simultaneous filter supporting 2 channel.' on section 3.2.
2	July 27, 2020	Added the plots of simultaneous spurious emissions condition on section 5.5.

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. GENERAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. PRODUCT INFORMATION	5
1.3. TEST INFORMATION	5
2. FACILITIES AND ACCREDITATIONS	6
2.1. FACILITIES	6
2.2. EQUIPMENT	6
3. TEST SPECIFICATIONS	7
3.1. STANDARDS	7
3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST	8
3.3. MEASUREMENT UNCERTAINTY	10
3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS	10
3.5. TEST DIAGRAMS	11
4. TEST EQUIPMENTS	12
5. TEST RESULT	13
5.1. AGC THRESHOLD	13
5.2. OUT-OF-BAND REJECTION	15
5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON	17
5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN	29
5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS	34
5.6. RADIATED SPURIOUS EMISSIONS	75
6. Annex A_EUT AND TEST SETUP PHOTO	80

1. GENERAL INFORMATION

1.1. APPLICANT INFORMATION

Company Name	ADRF KOREA, Inc.
Company Address	5-5, Mojeon-Ri, Backsa-Myun, Icheon-Citi, Kyunggi-Do, Korea

1.2. PRODUCT INFORMATION

EUT Type	REPEATER		
EUT Serial Number	SDR30-6203001		
Power Supply	Input: 100 Vac~130 Vac _9A , 210~240Vac6A / Output (DC): +27V, +6V, +3.8V		
Frequency Range	Band Name	Uplink (MHz)	Downlink (MHz)
	600 MHz Service	663 ~ 698	617 ~ 652
Tx Output Power	30 dBm		
Antenna Peak Gain	7.4 dBi		

1.3. TEST INFORMATION

FCC Rule Parts	Part 2, Part 27
Measurement Standards	KDB 935210 D05 v01r04, ANSI C63.26-2015
Test Location	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

2. FACILITIES AND ACCREDITATIONS

2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 (Version: 2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3. TEST SPECIFICATIONS

3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 2 and Part 27.

Description	Reference	Results
AGC threshold	KDB 935210 D05 v01r04 3.2	Compliant
Out-of-band rejection	KDB 935210 D05 v01r04 3.3	Compliant
Input-versus-output signal comparison	§ 2.1049	Compliant
Input/output power and amplifier/booster gain	§ 2.1046, § 27.50(c)	Compliant
Out-of-band/out-of-block emissions and spurious emissions	§ 2.1051, § 27.53(g)	Compliant
Spurious emissions radiated	§ 2.1053, § 27.53	Compliant

3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST

Except for the following cases, EUT was tested under normal operating conditions.

: Out-of-band rejection test requires maximum gain condition without AGC.

This EUT is supported power supply both of AC and DC. Test results are only attached worst cases.

The test was generally based on the method of KDB 935210 D05 v01r04 and only followed ANSI C63.26-2015 if there was no test method in KDB standard.

EUT was tested with following modulated signals provide by applicant.

Band Name	Tested signals
600 MHz Service	LTE 20 MHz
	5G NR 20 MHz

*Simultaneous filter supporting 2 channel.

The frequency stability measurement has been omitted in accordance with section 3.7 of KDB 935210 D05 v01r04.

: It can be confirmed through input-versus-output signal comparison test that EUT does not alter the input signal.

The tests results included actual loss value for attenuator and cable combination as shown in the table below.

: Input Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
600	0.692	2 100	1.078
650	0.745	2 150	1.118
700	0.782	2 200	1.131
750	0.728	2 250	1.112
800	0.725	2 300	1.428
850	0.702	2 350	1.498
900	0.717	2 400	1.237

: Output Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
2	29.386	1 600	30.693
10	29.486	1 700	30.547
30	29.533	1 800	30.532
50	29.432	1 900	30.561
100	29.508	2 000	30.713
200	29.625	2 100	30.750
300	29.936	2 200	30.777
400	30.073	2 300	30.787
500	30.137	2 400	30.873
600	30.205	2 500	30.847
700	30.282	2 600	30.941
800	30.284	2 700	30.798
900	30.236	3 000	31.227
1 000	30.269	4 000	31.525
1 100	30.289	5 000	31.619
1 200	30.477	6 000	31.804
1 300	30.537	7 000	32.023
1 400	30.546	8 000	32.374
1 500	30.595	-	-

3.3. MEASUREMENT UNCERTAINTY


Description	Reference	Results
AGC threshold	-	±0.87 dB
Out-of-band rejection	-	±0.58 MHz
Input-versus-output signal comparison		±0.58 MHz
Input/output power and amplifier/booster gain	-	±0.87 dB
Out-of-band/out-of-block emissions and spurious emissions	-	±1.08 dB
Spurious emissions radiated	$f \leq 1 \text{ GHz}$	±4.80 dB
	$f > 1 \text{ GHz}$	±6.07 dB

* Coverage factor $k = 2$, Confidence levels of 95 %

3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature	+15 °C to +35 °C
Relative humidity	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar

3.5. TEST DIAGRAMS

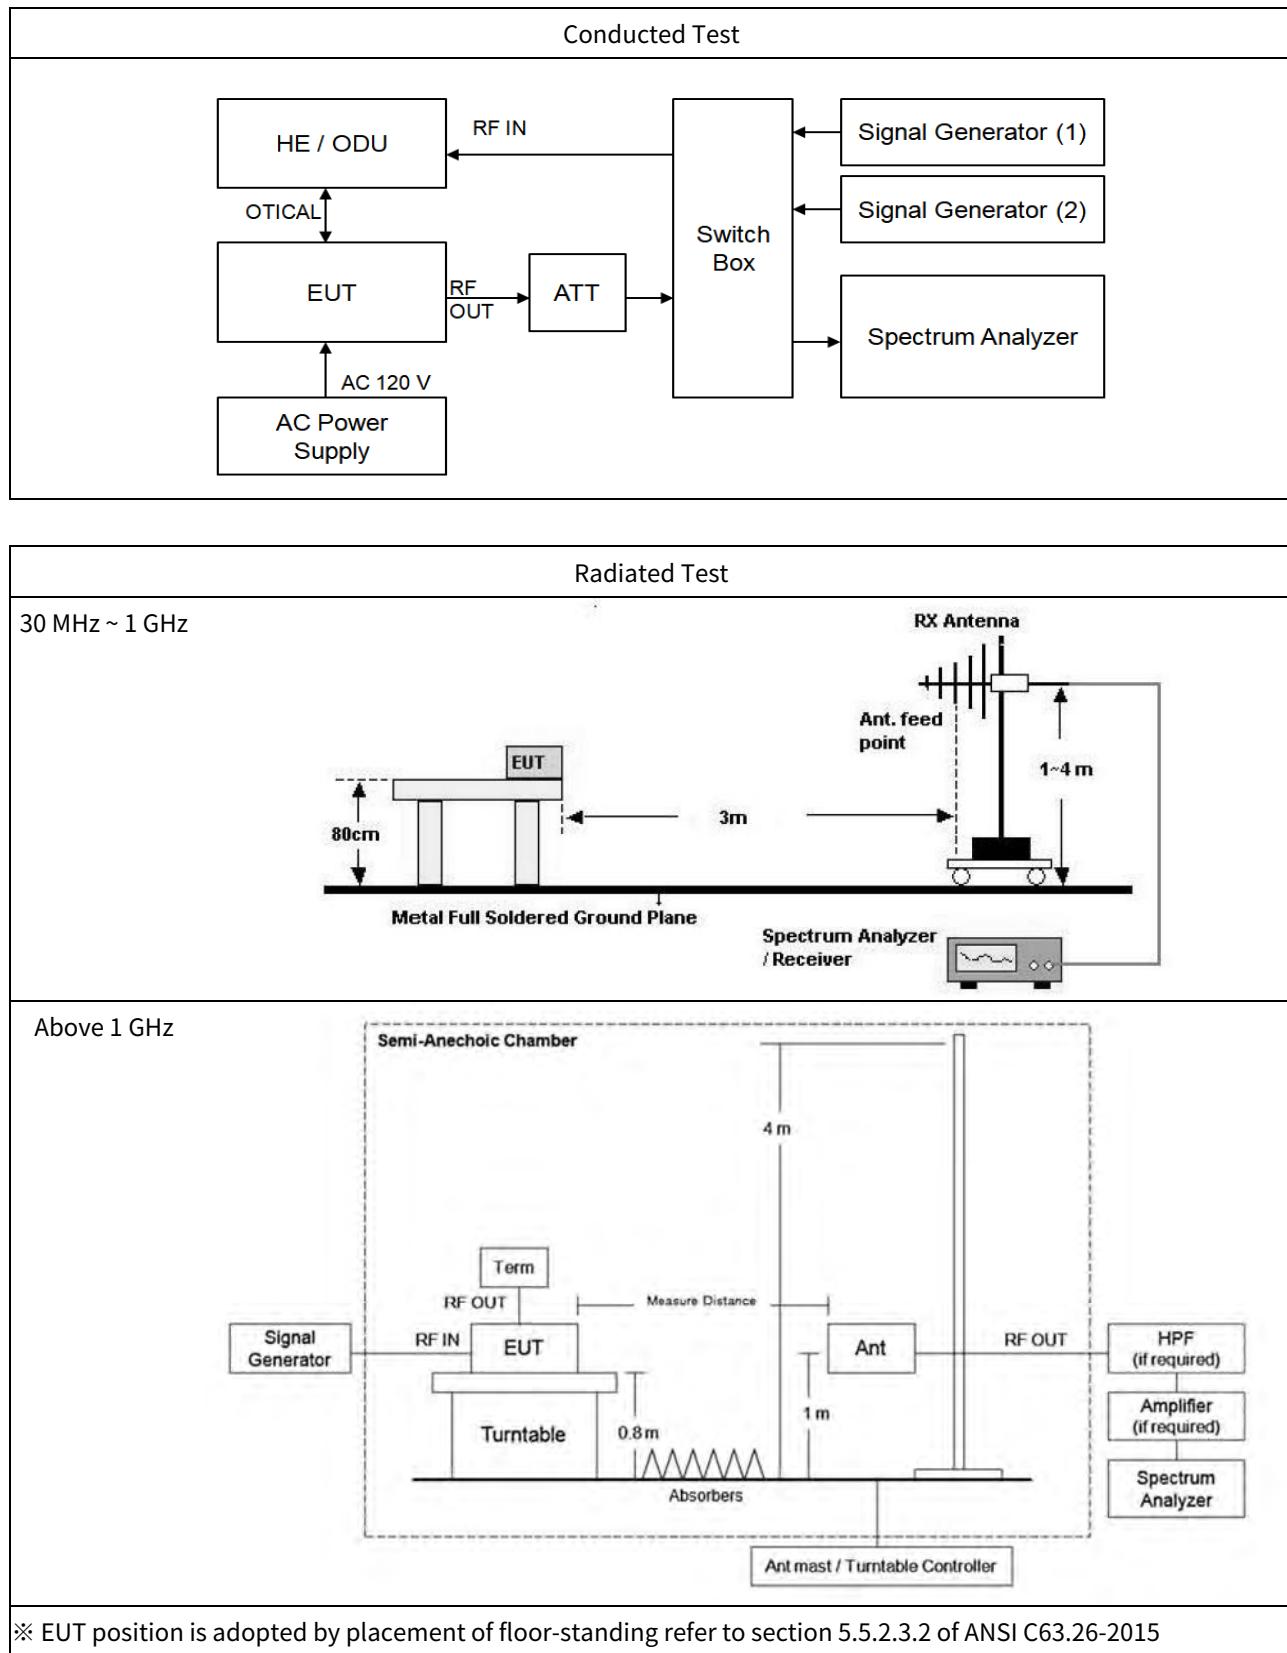

4. TEST EQUIPMENTS

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Agilent	N9020A / MXA Signal Analyzer	08/12/2019	Annual	MY52440870
Agilent	N9030B / PXA Signal Analyzer	06/04/2020	Annual	MY55480167
Agilent	N5182A / MXG Vector Signal Generator	08/21/2019	Annual	MY50140312
Agilent	N5182A / MXG Vector Signal Generator	01/17/2020	Annual	MY47070406
Weinschel Associates	WA93-30-33 / 30 dB Attenuator	04/09/2020	Annual	0202
KEITHLEY	S46 / Switch	N/A	N/A	1088024
Deayoung ENT	DFSS60 / AC Power Supply	04/07/2020	Annual	1003030-1
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/12/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	06/08/2020	Annual	100843
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
Wainwright Instruments	WHKX10-900-1000-15000-40SS/ High Pass Filter	06/24/2020	Annual	5
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. TEST RESULT

5.1. AGC THRESHOLD

Test Requirement:**KDB 935210 D05 v01r04**

Testing at and above the AGC threshold is required.

Test Procedures:

Measurements were in accordance with the test methods section 3.2 of KDB 935210 D05 v01r04.

In the case of fiber-optic distribution systems, the RF input port of the equipment under test (EUT) refers to the RF input of the supporting equipment RF to optical convertor; see also descriptions and diagrams for typical DAS booster systems in KDB Publication 935210 D02

Devices intended to be directly connected to an RF source (donor port) only need to be evaluated for any over-the-air transmit paths.

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals.
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of ANSI C63.26-2015 subclause 5.2.4.4.1, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.
- g) Repeat the procedure with the remaining test signal.

Output power measurement in subclause 5.2.4.4.1 of ANSI C63.26

- a) Set span to $2 \times$ to $3 \times$ the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time: auto-couple
- f) Detector = power averaging (rms).
- g) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- h) Omit
- i) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be

averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Test Results:

Test Band	Link	Signal	Center Frequency (MHz)	AGC Threshold Level (dBm)	Output Level (dBm)
600 MHz Service	Uplink	LTE 20 MHz	680.50	-60	29.79
		5G NR 20 MHz	680.50	-60	29.67
	Downlink	LTE 20 MHz	634.50	-60	30.16
		5G NR 20 MHz	634.50	-60	29.90

5.2. OUT-OF-BAND REJECTION

Test Requirement:**KDB 935210 D05 v01r04**

Out-of-band rejection required.



Test Procedures:

Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01r04.

A signal booster shall reject amplification of other signals outside of its passband. Adjust the internal gain control of the EUT (if so equipped) to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
 - 1) Frequency range = $\pm 250\%$ of the passband, for each applicable CMRS band.
 - 2) Level = a sufficient level to affirm that the out-of-band rejection is > 20 dB above the noise floor and will not engage the AGC during the entire sweep.
 - 3) Dwell time = approximately 10 ms.
 - 4) Number of points = SPAN/(RBW/2).
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth (RBW) of the spectrum analyzer to be 1 % to 5 % of the EUT passband, and the video bandwidth (VBW) shall be set to $\geq 3 \times$ RBW.
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as f_0 .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -20 dB down amplitude, to determine the 20 dB bandwidth.
- i) Capture the frequency response of the EUT.
- j) Repeat for all frequency bands applicable for use by the EUT.

Test Results:

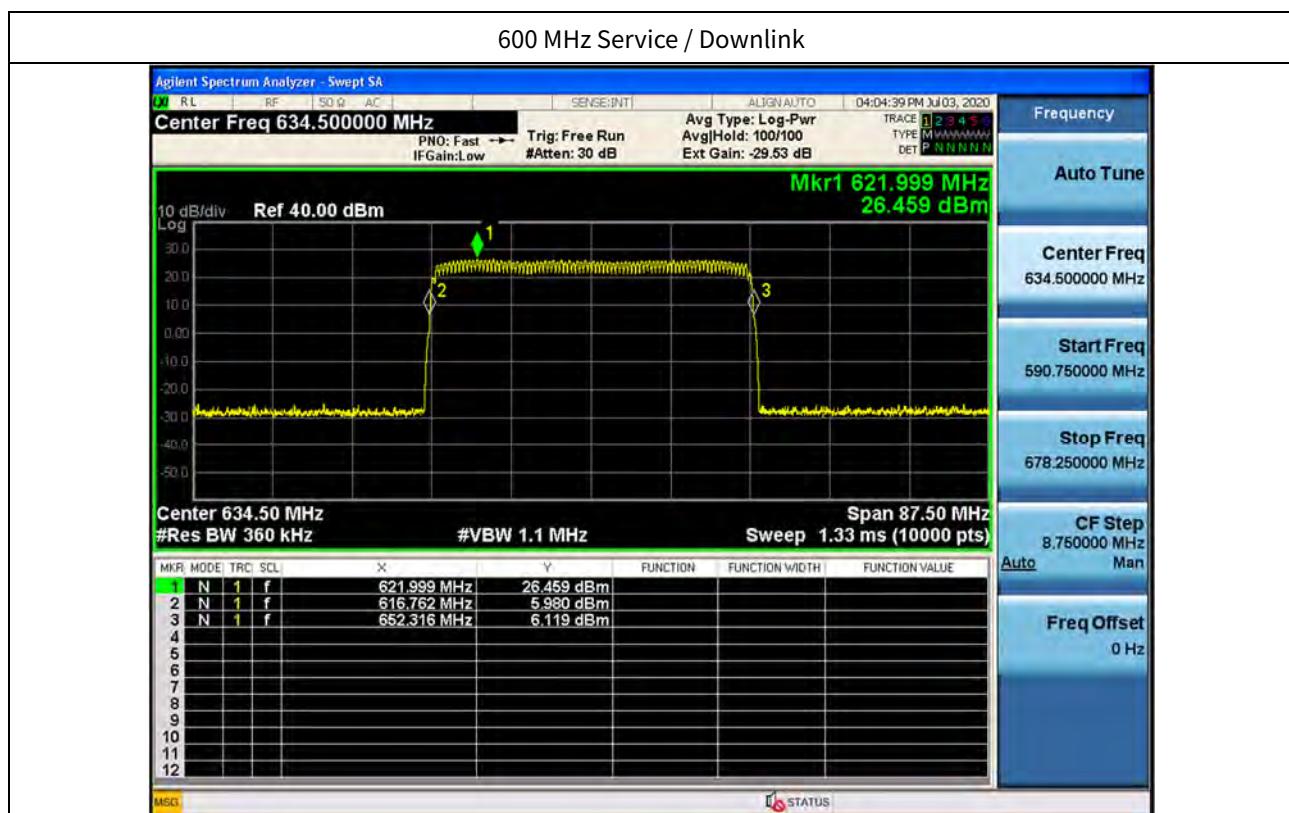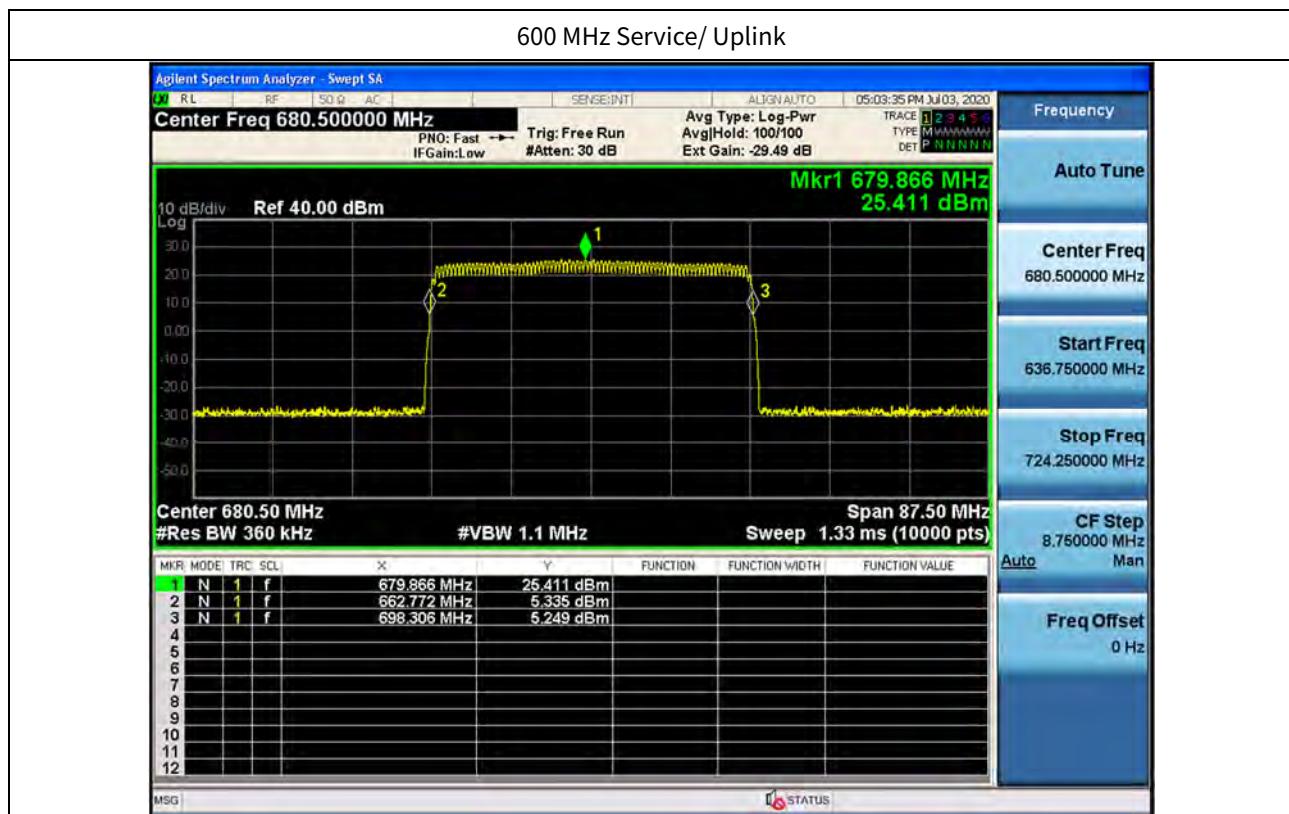

5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

Test Requirement:

§ 2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r04.

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal; alternatively, the 99% OBW can be measured and used. See KDB Publication 971168 [R8] for more information on measuring OBW.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- f) The nominal RBW shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be $\geq 3 \times$ RBW.
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than $[10 \log (\text{OBW} / \text{RBW})]$ below the reference level. Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency.
- l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -26 dB down amplitude. The 26 dB EBW (alternatively OBW) is the positive frequency difference between the two markers. If the spectral envelope crosses the -26 dB down amplitude at multiple points, the lowest or highest frequency shall be selected as the frequencies that are the furthest removed from the center frequency at which the spectral envelope crosses the -26 dB down amplitude point.

- m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
- n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.
- o) Repeat the procedure [steps e) to n)] with the input signal amplitude set to 3 dB above the AGC threshold.
- p) Repeat steps e) to o) with the signal generator set to the narrowband signal.
- q) Repeat steps e) to p) for all frequency bands authorized for use by the EUT.

Test Results:

Tabular data of Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
600 MHz Service	Uplink	LTE 20 MHz	680.50	17.9298	19.651
		5G NR 20 MHz	680.50	18.1912	19.489
	Downlink	LTE 20 MHz	634.50	17.9942	19.901
		5G NR 20 MHz	634.50	18.2722	19.470

Tabular data of Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
600 MHz Service	Uplink	LTE 20 MHz	680.50	18.1262	19.941
		5G NR 20 MHz	680.50	18.3271	19.514
	Downlink	LTE 20 MHz	634.50	18.0205	19.831
		5G NR 20 MHz	634.50	18.3212	19.446

Tabular data of 3 dB above the AGC threshold Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
600 MHz Service	Uplink	LTE 20 MHz	680.50	17.9063	19.931
		5G NR 20 MHz	680.50	18.1867	19.463
	Downlink	LTE 20 MHz	634.50	18.0038	19.592
		5G NR 20 MHz	634.50	18.2853	19.452

Tabular data of 3 dB above the AGC threshold Input Occupied Bandwidth



Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
600 MHz Service	Uplink	LTE 20 MHz	680.50	18.0462	19.849
		5G NR 20 MHz	680.50	18.2645	19.471
	Downlink	LTE 20 MHz	634.50	17.9593	19.752
		5G NR 20 MHz	634.50	18.2645	19.478

Measured Occupied Bandwidth Comparison

Test Band	Link	Signal	Variant of Input and output Occupied Bandwidth (%)	Variant of Input and 3 dB above the AGC threshold output Occupied Bandwidth (%)
600 MHz Service	Uplink	LTE 20 MHz	-1.454	0.413
		5G NR 20 MHz	-0.128	-0.041
	Downlink	LTE 20 MHz	0.353	-0.810
		5G NR 20 MHz	0.123	-0.133

* Change in input-output OBW is less than $\pm 5\%$.


Plot data of Occupied Bandwidth

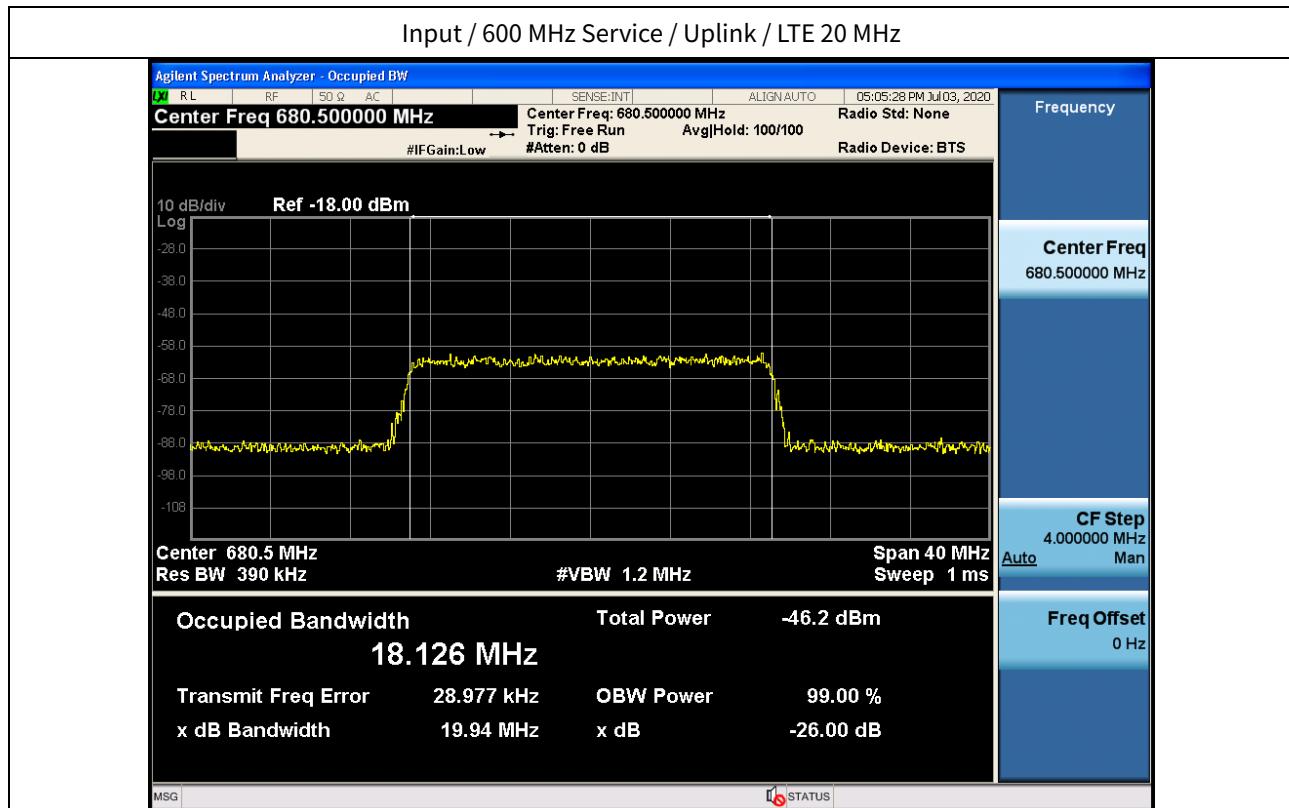
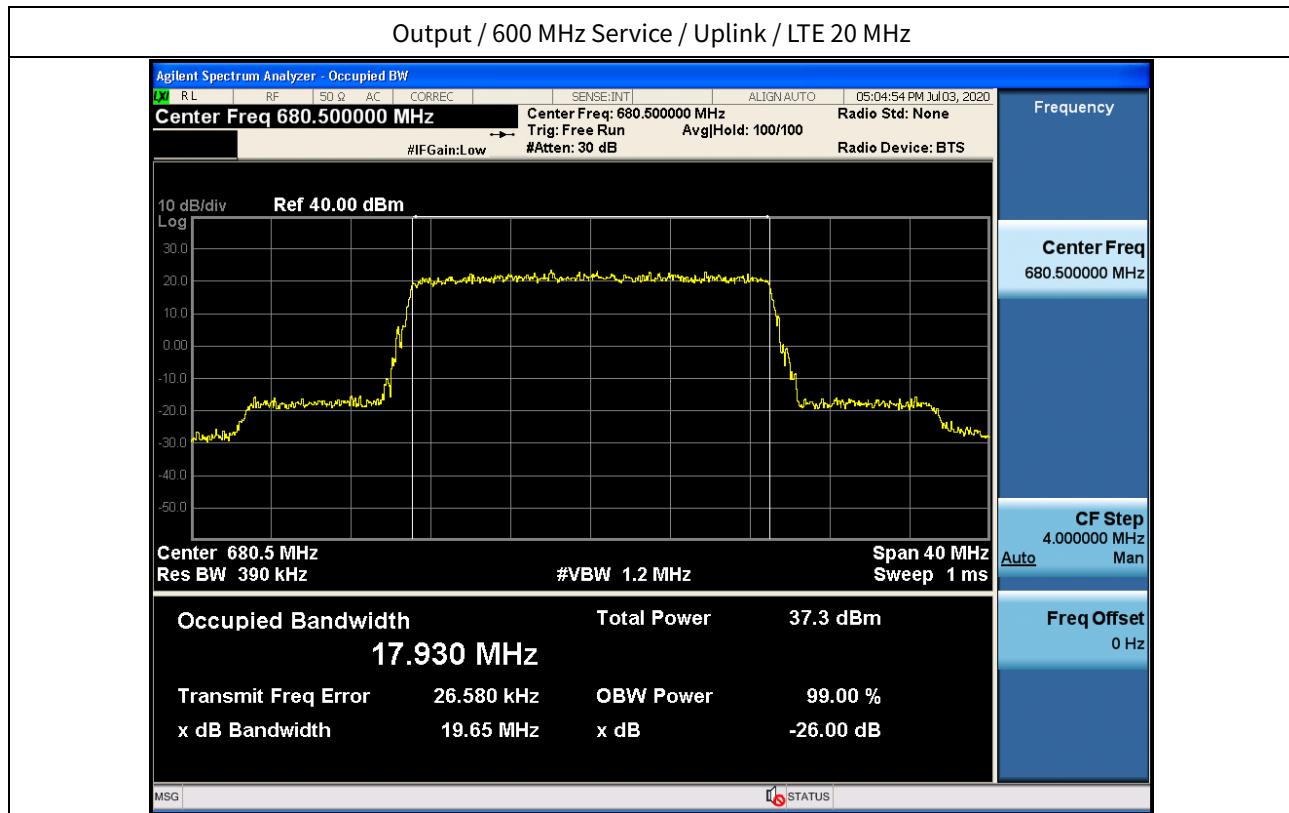


3 dB above the AGC threshold output / 600 MHz Service / Uplink / LTE 20 MHz




3 dB above the AGC threshold Input / 600 MHz Service / Uplink / LTE 20 MHz

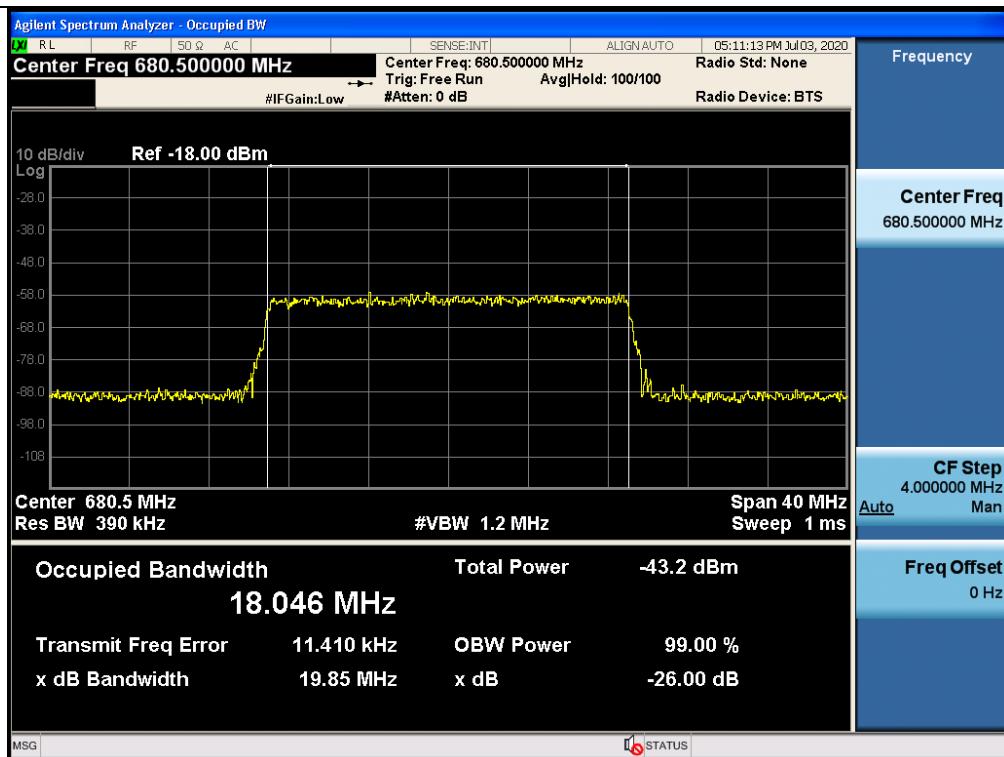


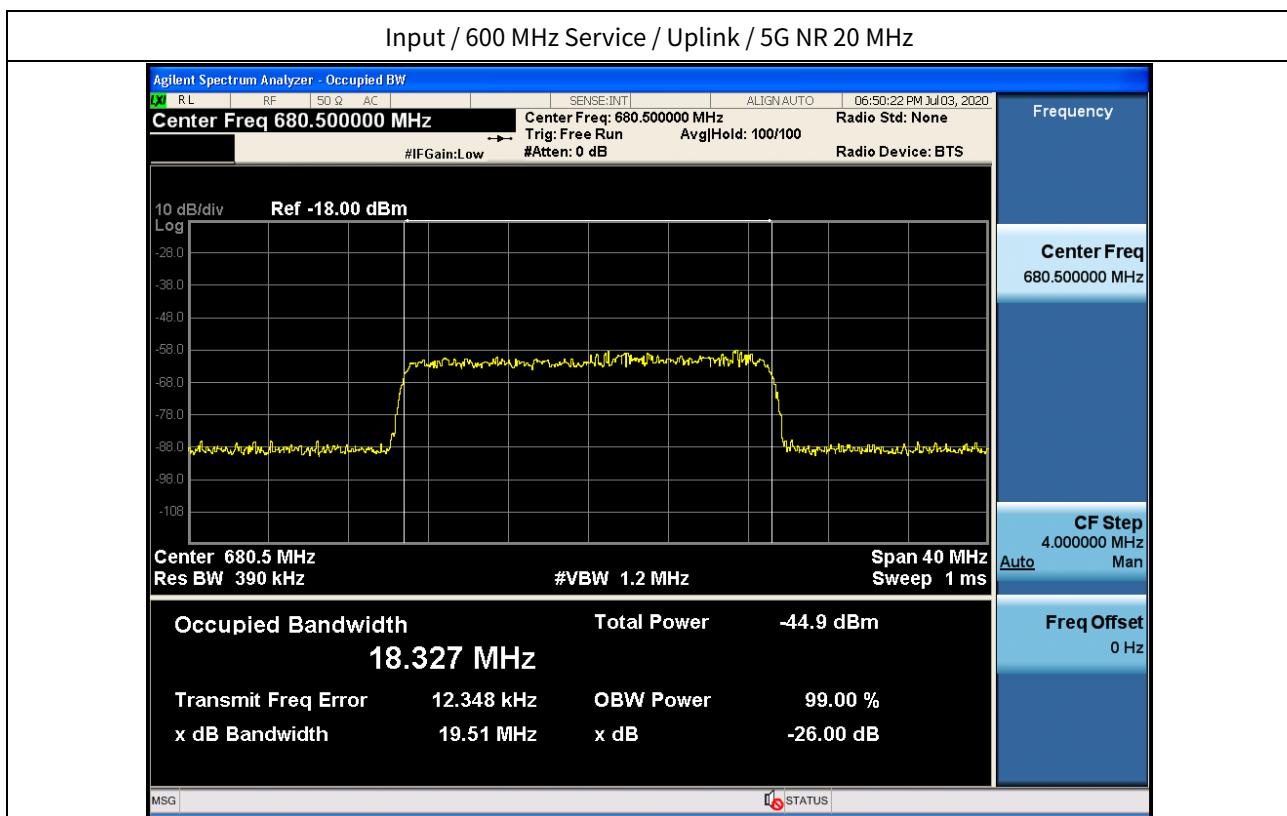
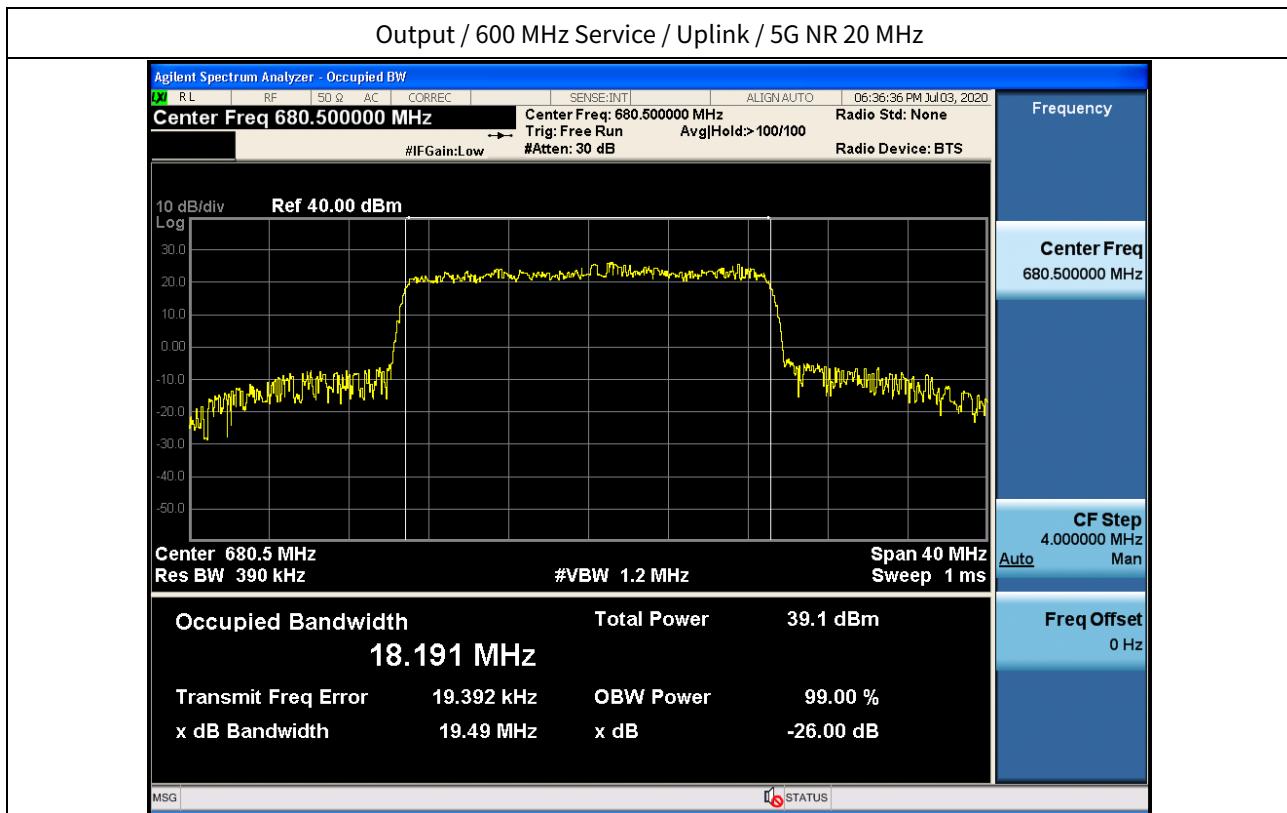


3 dB above the AGC threshold output / 600 MHz Service / Uplink / 5G NR 20 MHz

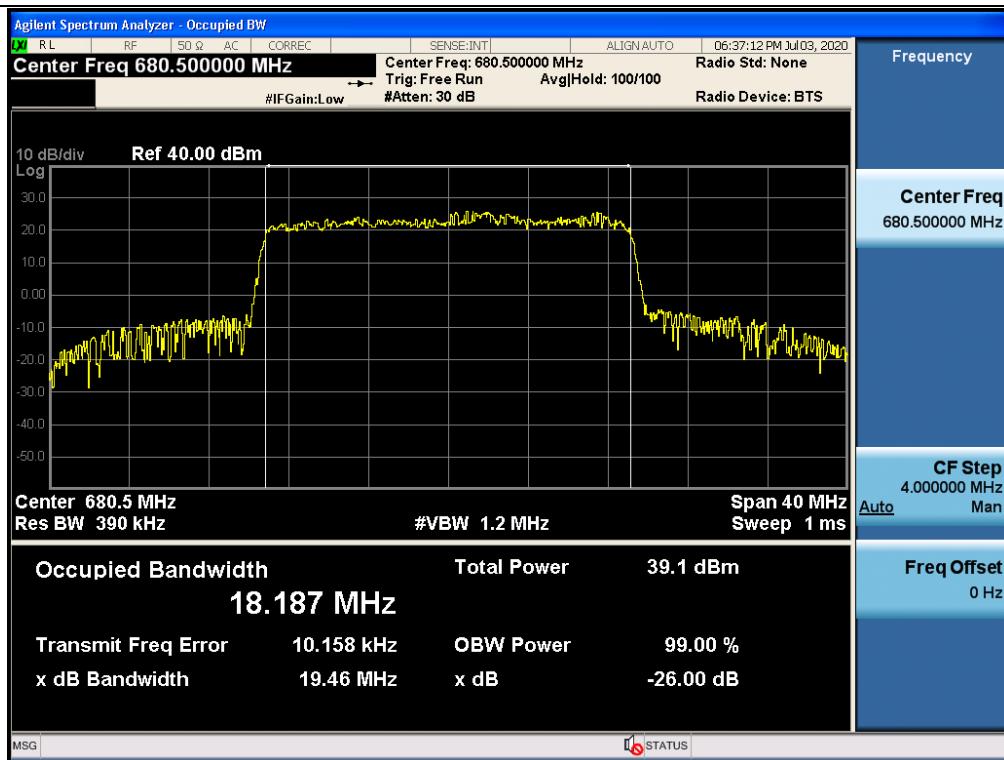


3 dB above the AGC threshold Input / 600 MHz Service / Uplink / 5G NR 20 MHz

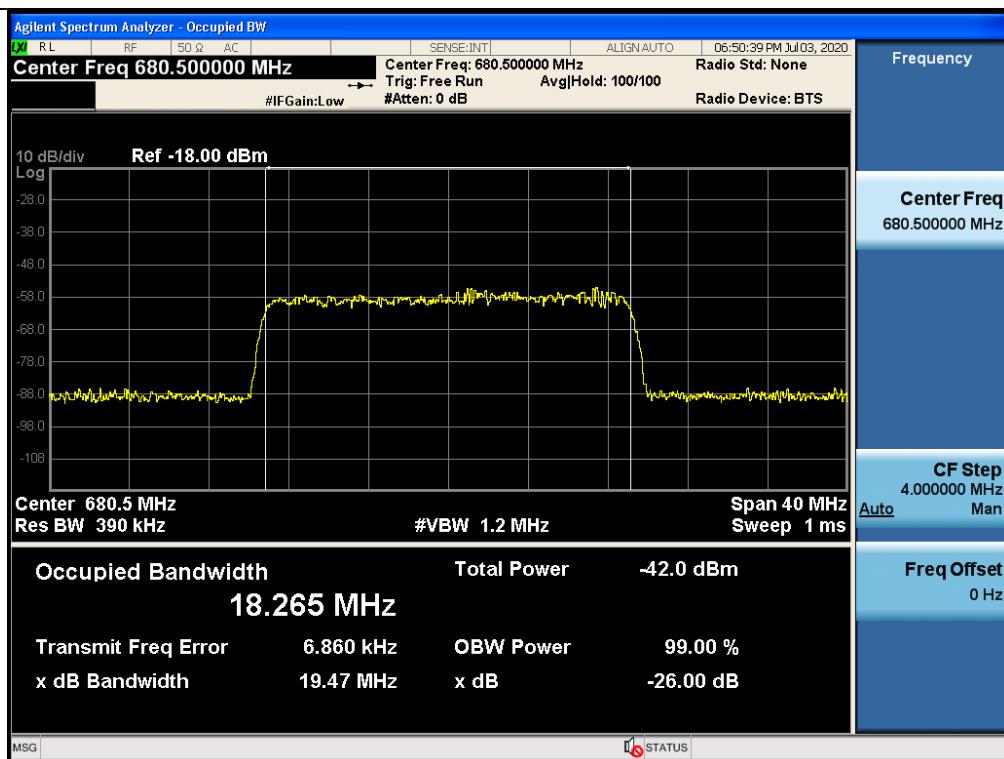


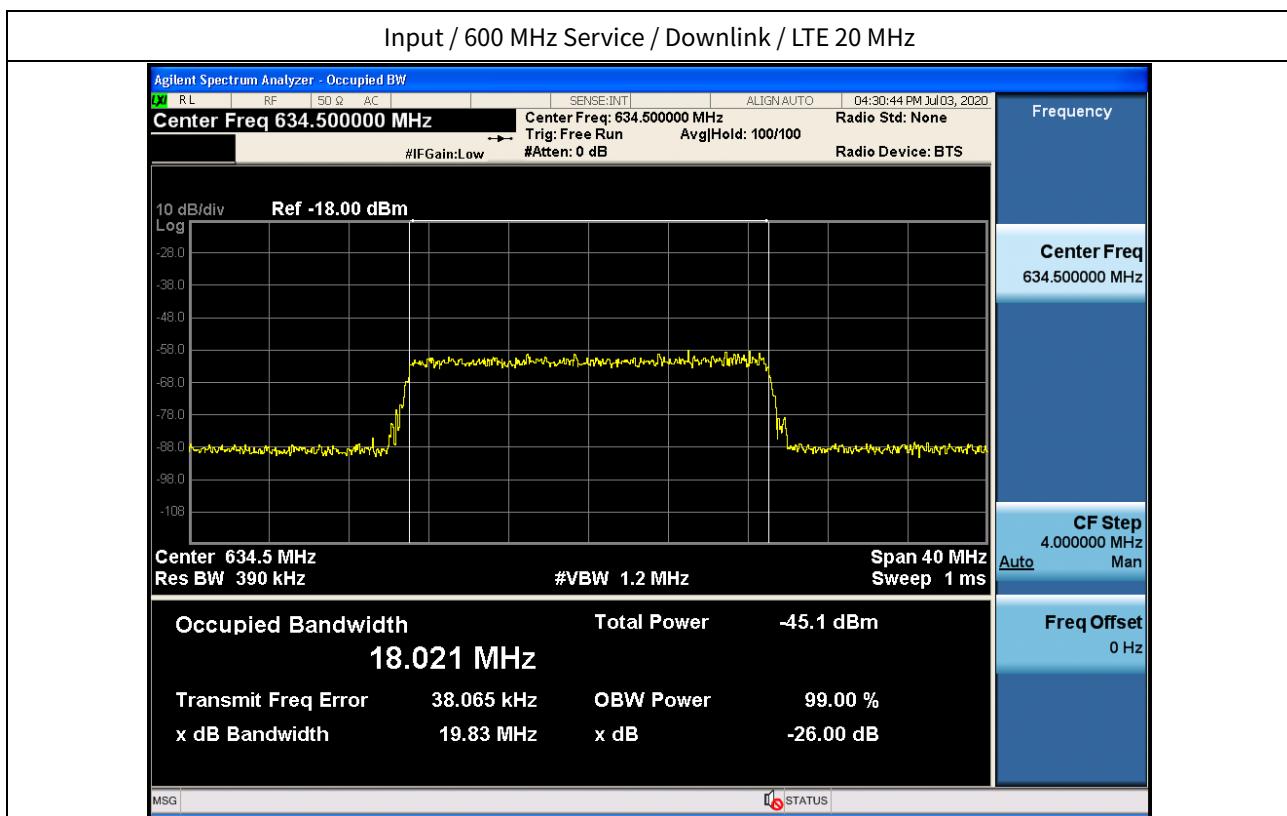
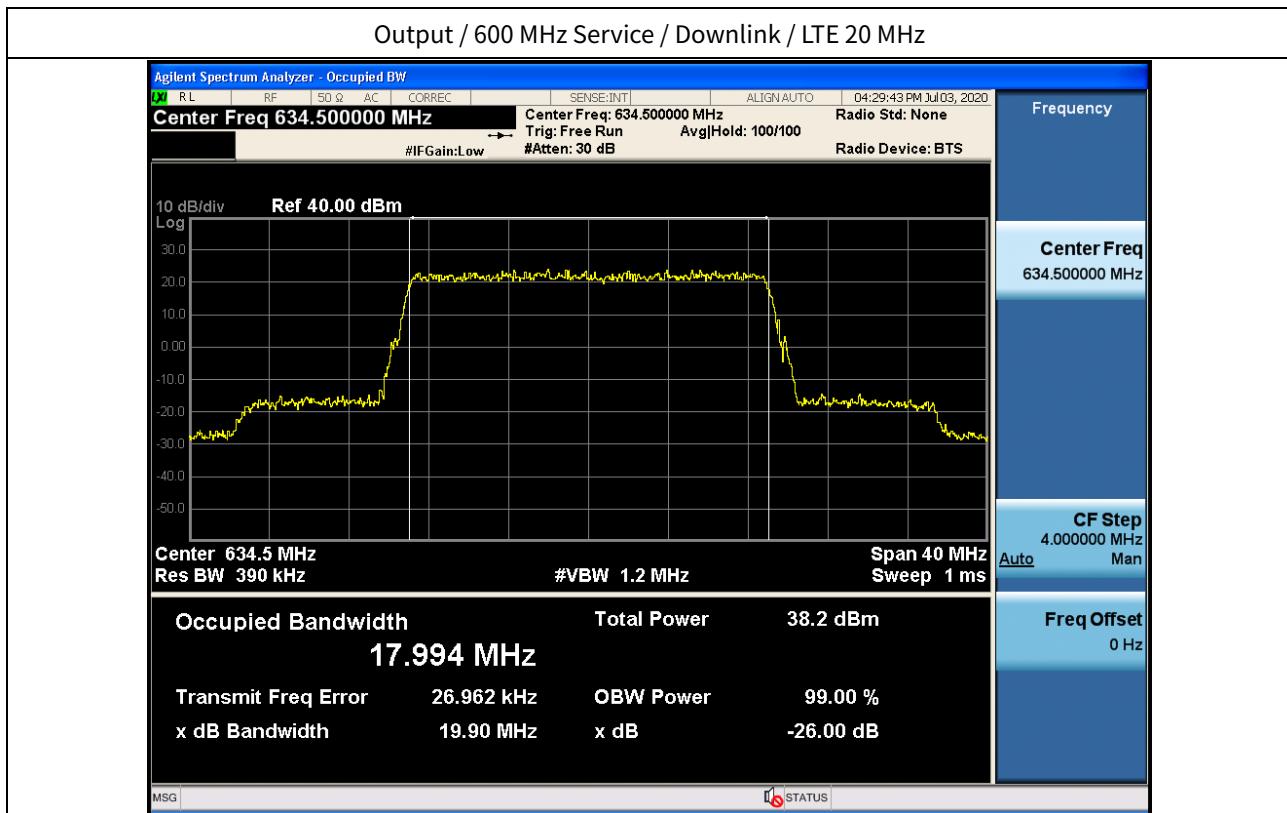


3 dB above the AGC threshold output / 600 MHz Service / Downlink / LTE 20 MHz

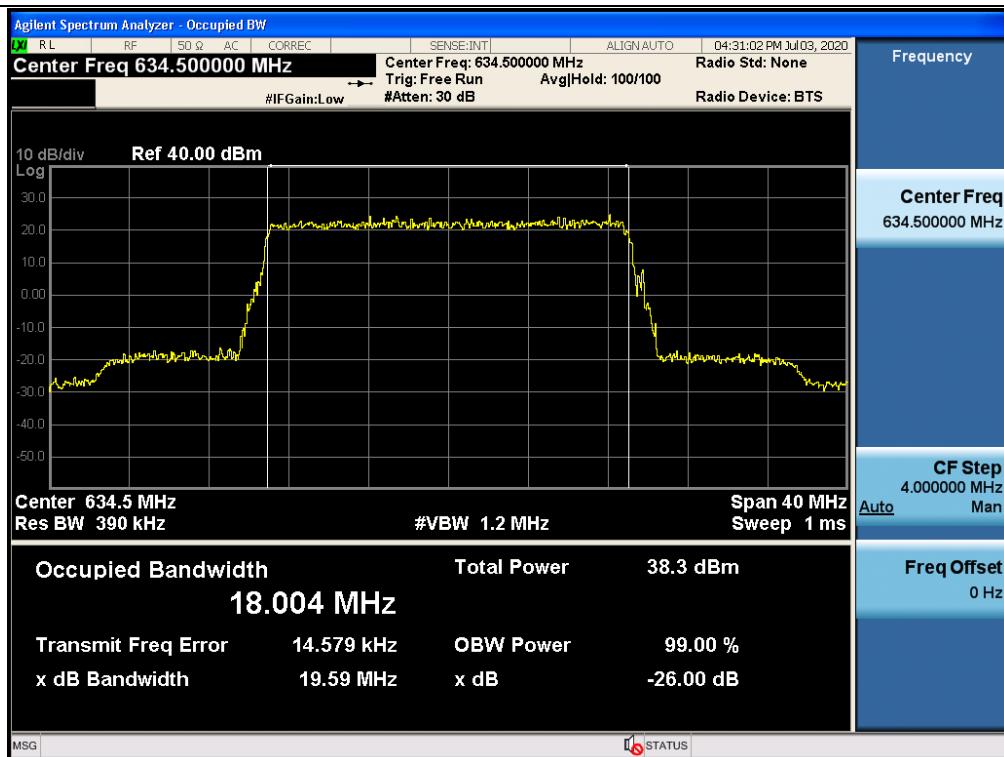


3 dB above the AGC threshold Input / 600 MHz Service / Downlink / LTE 20 MHz

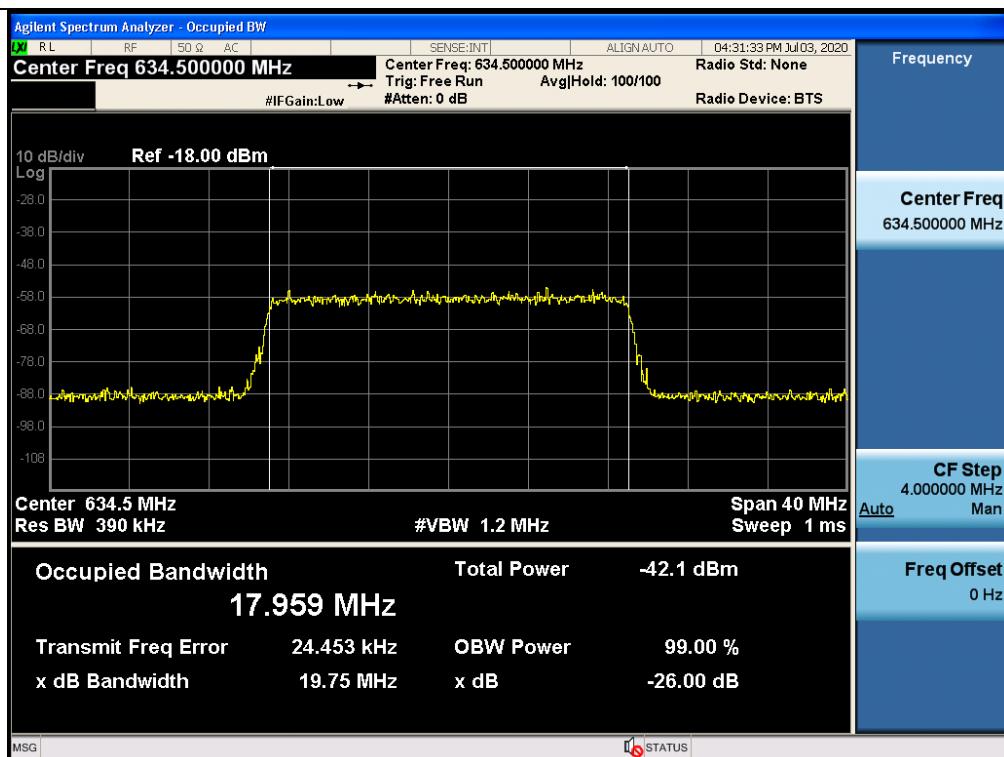


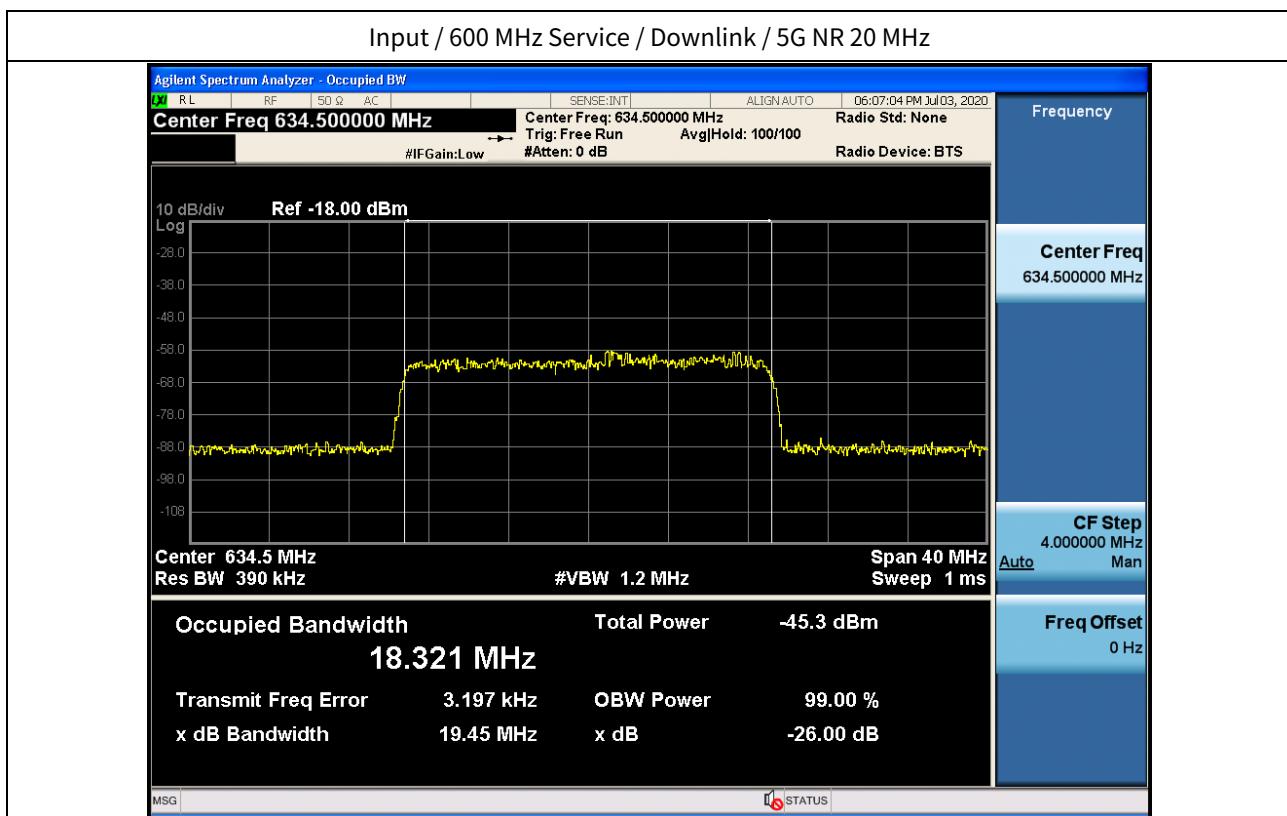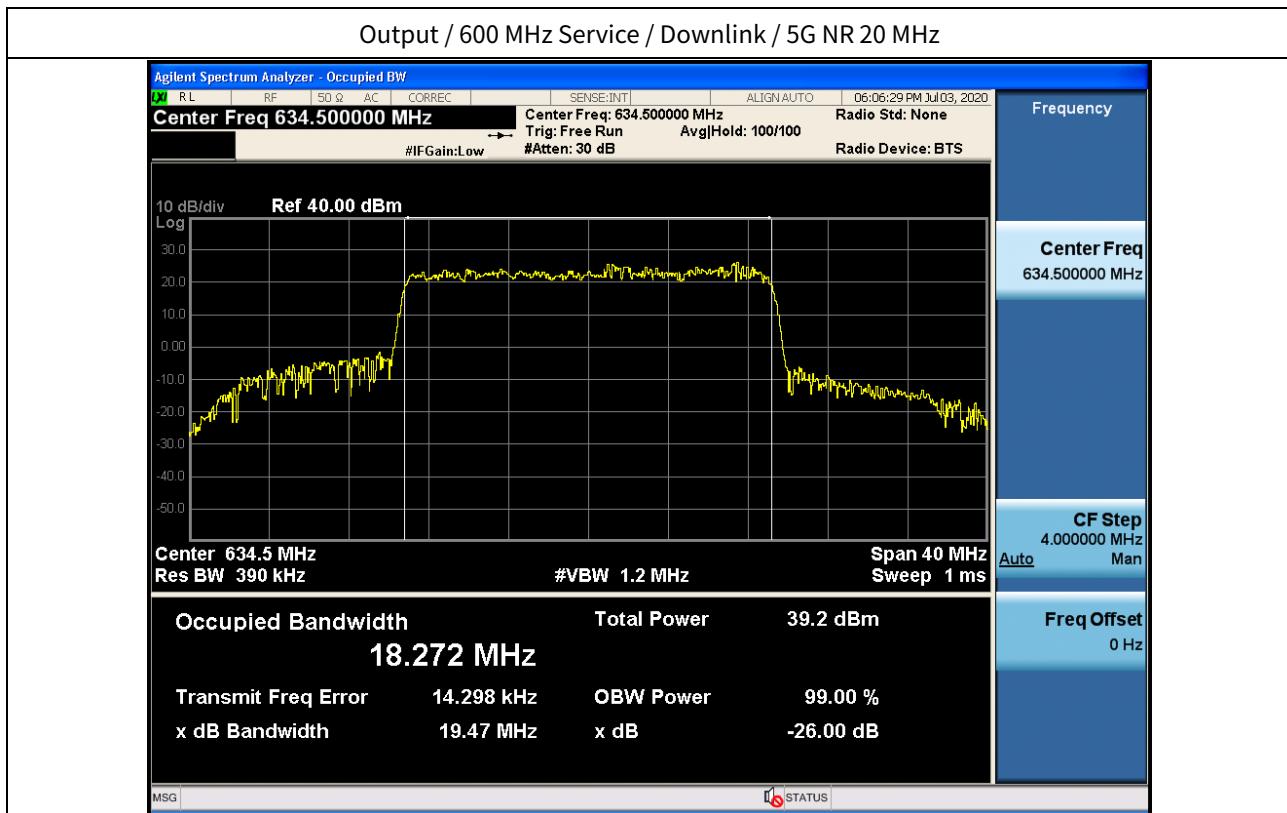

3 dB above the AGC threshold output / 600 MHz Service / Downlink / 5G NR 20 MHz

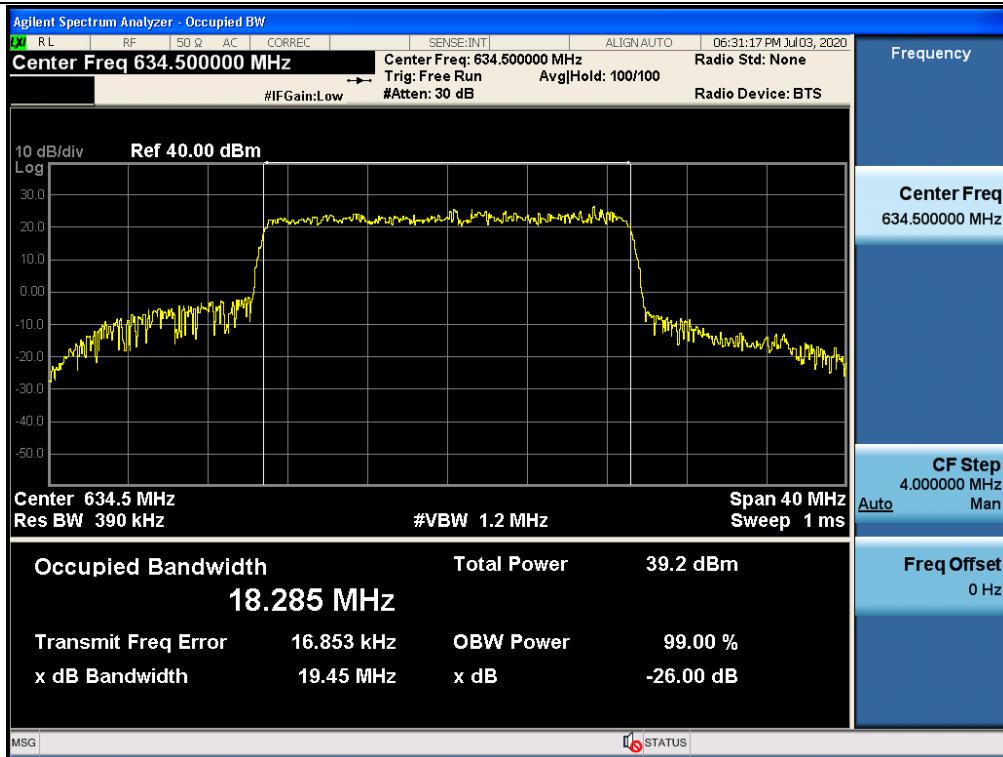

3 dB above the AGC threshold Input / 600 MHz Service / Downlink / 5G NR 20 MHz

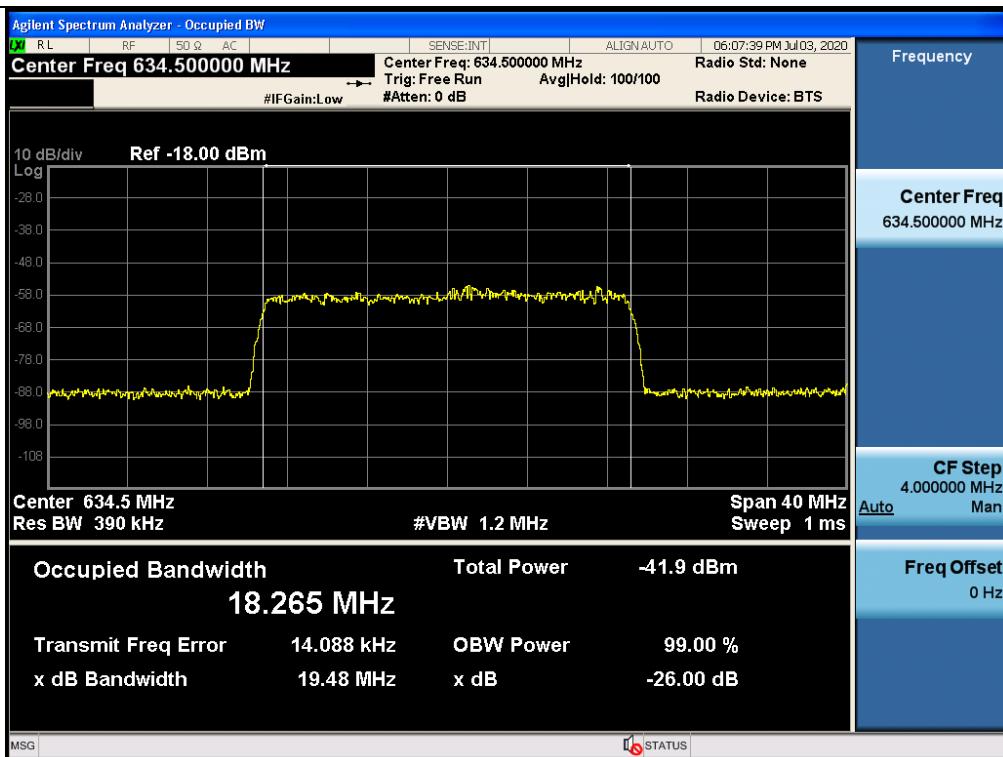

5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

Test Requirement:

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 27.50 Power limits and duty cycle.

(c) The following power and antenna height requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:

(3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;

TABLE 3 TO §27.50—PERMISSIBLE POWER AND ANTENNA HEIGHTS FOR BASE AND FIXED STATIONS IN THE 600 MHz, 698-757 MHz, 758-763 MHz, 776-787 MHz AND 788-793 MHz BANDS TRANSMITTING A SIGNAL WITH AN EMISSION BANDWIDTH GREATER THAN 1 MHz

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) per MHz (watts/MHz)
Above 1372 (4500)	65
Above 1220 (4000) To 1372 (4500)	70
Above 1067 (3500) To 1220 (4000)	75
Above 915 (3000) To 1067 (3500)	100
Above 763 (2500) To 915 (3000)	140
Above 610 (2000) To 763 (2500)	200
Above 458 (1500) To 610 (2000)	350
Above 305 (1000) To 458 (1500)	600
Up to 305 (1000)	1000

Test Procedures:

Measurements were in accordance with the test methods section 3.5 of KDB 935210 D05 v01r04.

Adjust the internal gain control of the EUT to the maximum gain for which the equipment certification is being sought. Any EUT attenuation settings shall be set to their minimum value.

Input power levels (uplink and downlink) should be set to maximum input ratings while confirming that the device is not capable of operating in saturation (non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

3.5.2 Measuring the EUT mean input and output power

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the test signal.
- c) The frequency of the signal generator shall be set to the frequency f_0 as determined from out-of-band rejection test.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold, but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use ANSI C63.26-2015 subclause 5.2.4.4.1, for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

3.5.5 Calculating amplifier, repeater, or industrial booster gain

After the input and output power levels have been measured as described in the preceding subclauses, the gain of the EUT can be determined from:

$$\text{Gain (dB)} = \text{output power (dBm)} - \text{input power (dBm)}.$$

Report the gain for each authorized operating frequency band, and each test signal stimulus.

Note. If f_0 that determined from out-of-band test is smaller or greater than difference of test signal's center frequency and operation band block, test is performed at the lowest or the highest frequency that test signals can be passed.

Test Results:

Tabular data of Input / Output Power and Gain

Test Band	Link	Signal	f ₀ Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Gain (dB)
600 MHz Service	Uplink	LTE 20 MHz	679.87	-59.83	29.64	89.47
		5G NR 20 MHz	679.87	-60.41	29.59	90.00
	Downlink	LTE 20 MHz	627.00	-59.93	30.31	90.24
		5G NR 20 MHz	627.00	-60.58	29.61	90.19



Tabular data of Input / 3 dB above AGC threshold Output Power and Gain



Test Band	Link	Signal	f ₀ Frequency (MHz)	Input Power (dBm)	+3 dB Output Power (dBm)	Gain (dB)
600 MHz Service	Uplink	LTE 20 MHz	679.87	-56.89	29.76	86.65
		5G NR 20 MHz	679.87	-57.52	29.63	87.15
	Downlink	LTE 20 MHz	627.00	-56.98	30.34	87.32
		5G NR 20 MHz	627.00	-57.67	29.86	87.53

Tabular data of PAPR

Test Band	Link	Signal	f ₀ Frequency (MHz)	0.1 % PAPR (dB)
600 MHz Service	Uplink	LTE 20 MHz	679.87	8.48
		5G NR 20 MHz	679.87	12.21
	Downlink	LTE 20 MHz	627.00	8.44
		5G NR 20 MHz	627.00	11.88

Plot data of PAPR

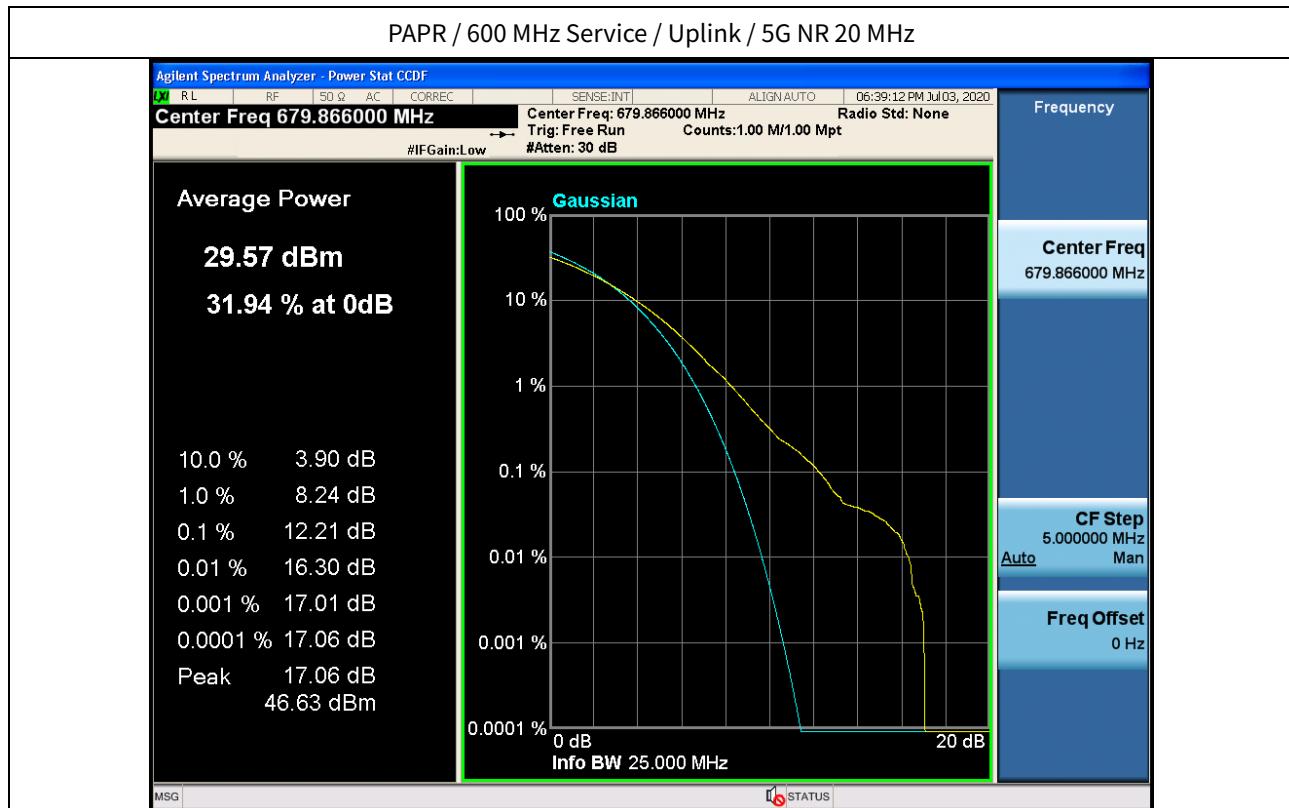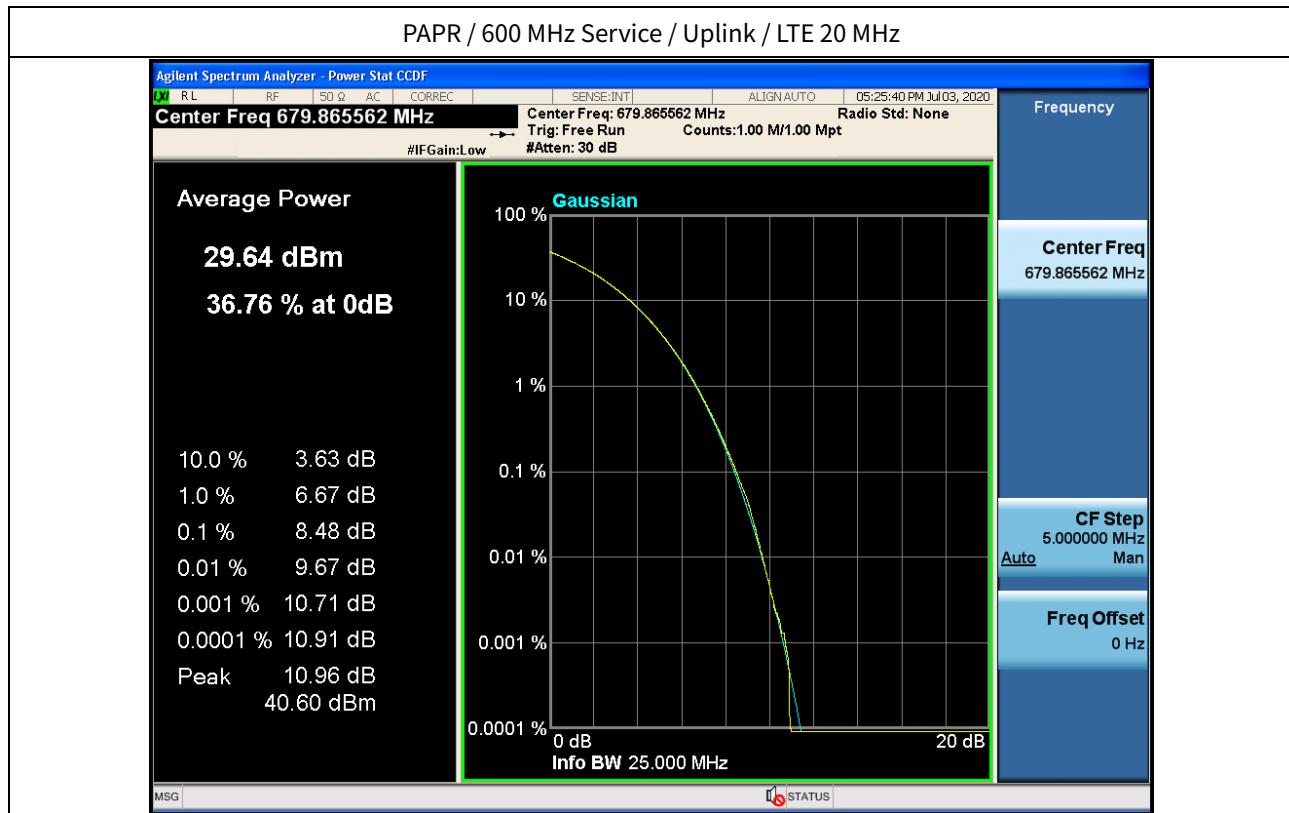

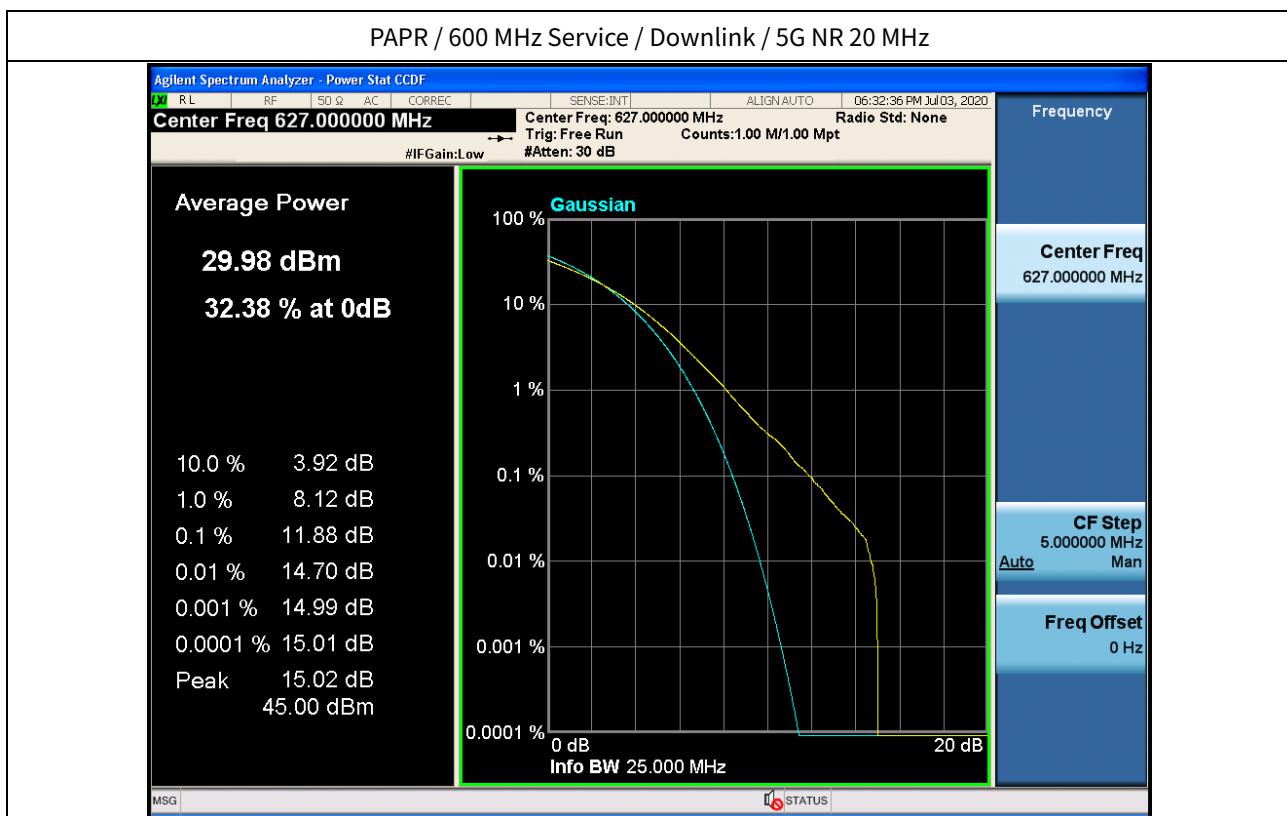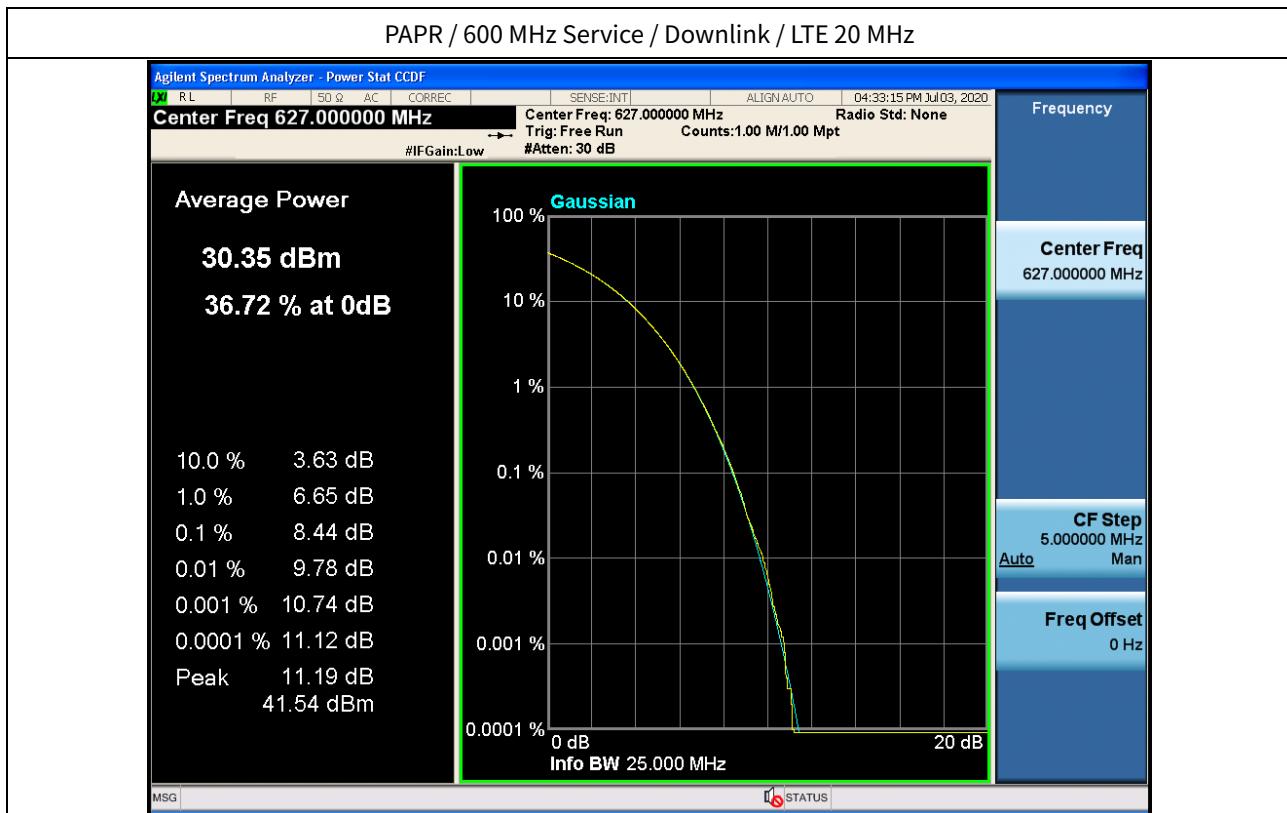

5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS

Test Requirements:

§ 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 27.53 Emission limits.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Test Procedures:

Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01r04.

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;*
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.*

NOTE—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).

3.6.2 Out-of-band/out-of-block emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.

If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.

- b) Set the signal generator to produce two AWGN signals as previously described.
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.
- d) Set the composite power levels such that the input signal is just below the AGC threshold, but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168,

but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels.

- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band.
- g) Set the VBW = $3 \times$ RBW.
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.



3.6.3 Spurious emissions conducted measurements



- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described.
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold, but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation.
- g) Set the VBW $\geq 3 \times$ RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 1 MHz.
The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$, which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range.
Record the frequency and amplitude and capture a plot for inclusion in the test report.



- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 1 MHz, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission. The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$, which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.
- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.

Note: In 9 kHz-150 kHz and 150 kHz-30 MHz bands, RBW was reduced to 1 % and 10 % of the reference bandwidth for measuring unwanted emission level (typically, 1 MHz if the authorized frequency band is above 1 GHz) and power was integrated.(1% = +20 dB, 10% = +10 dB)

Test Results: Plot data of Out-of-band/out-of-block emissions

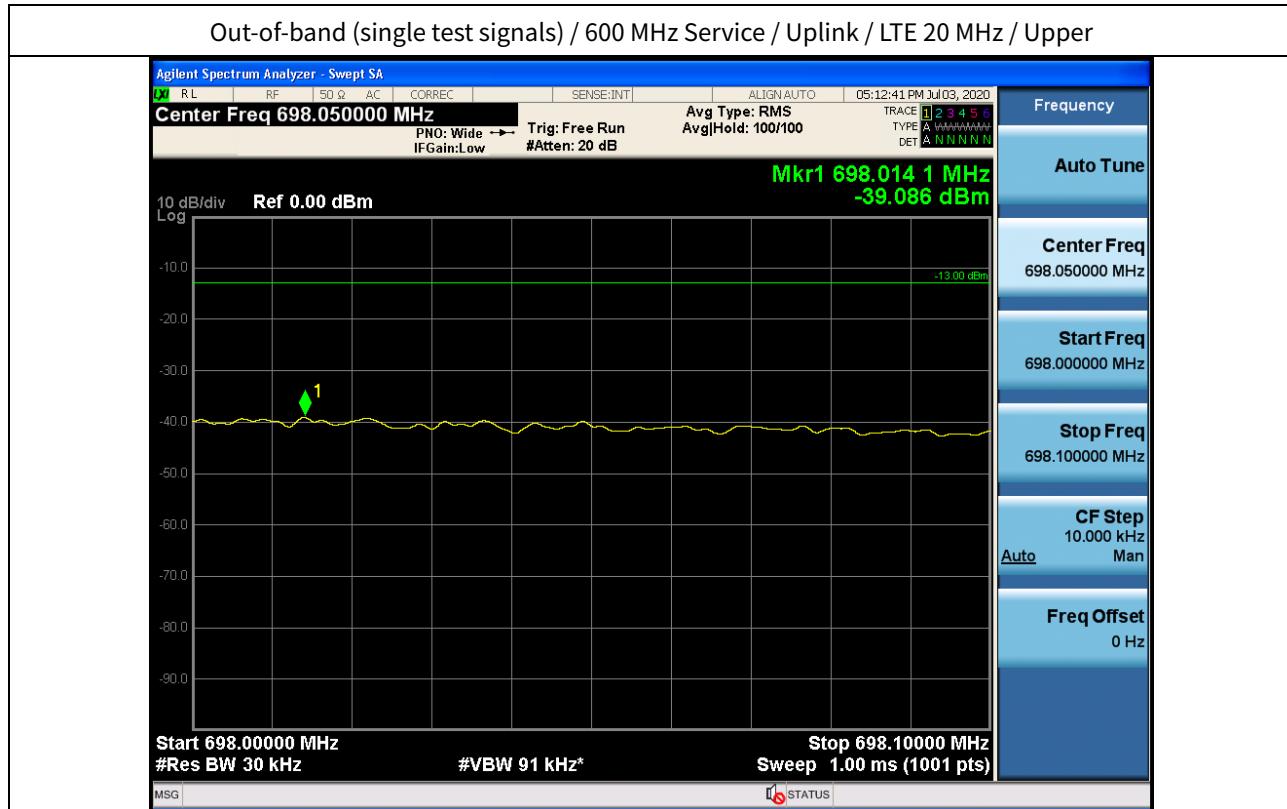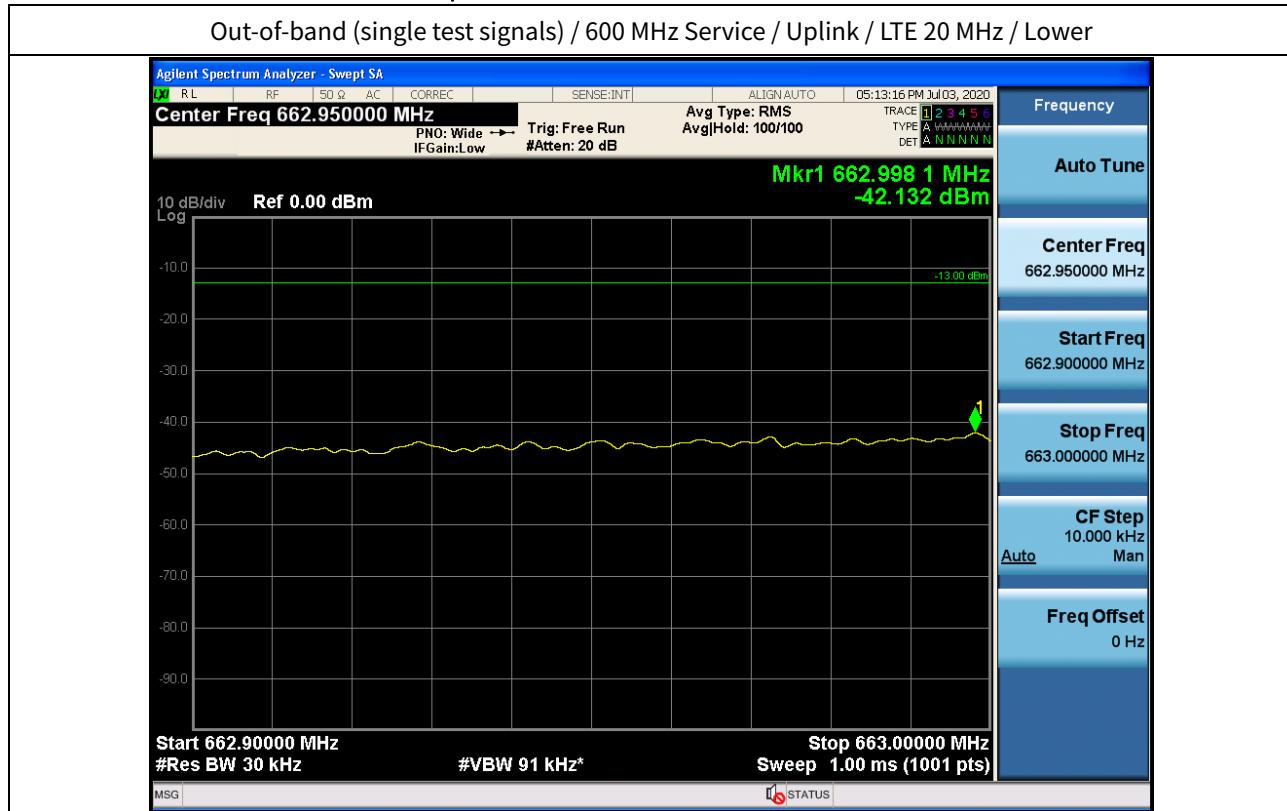

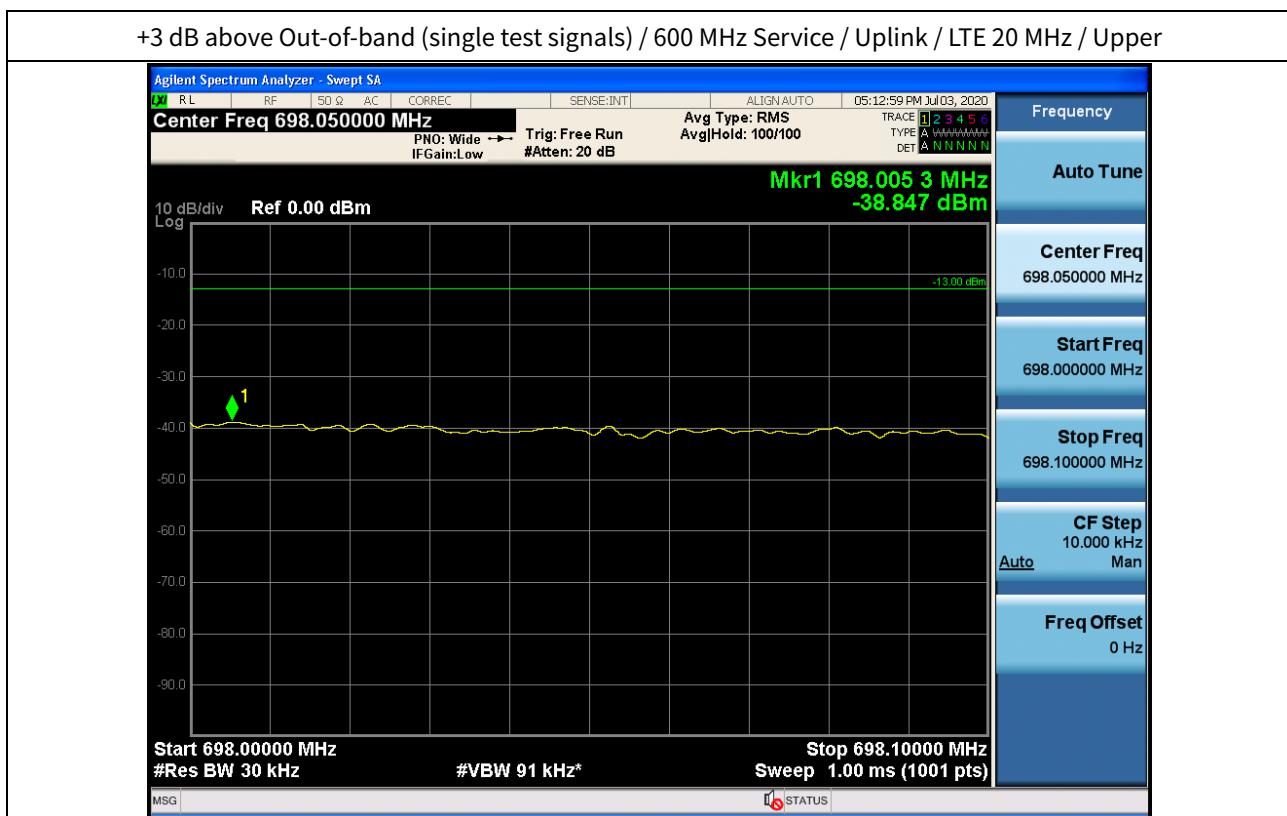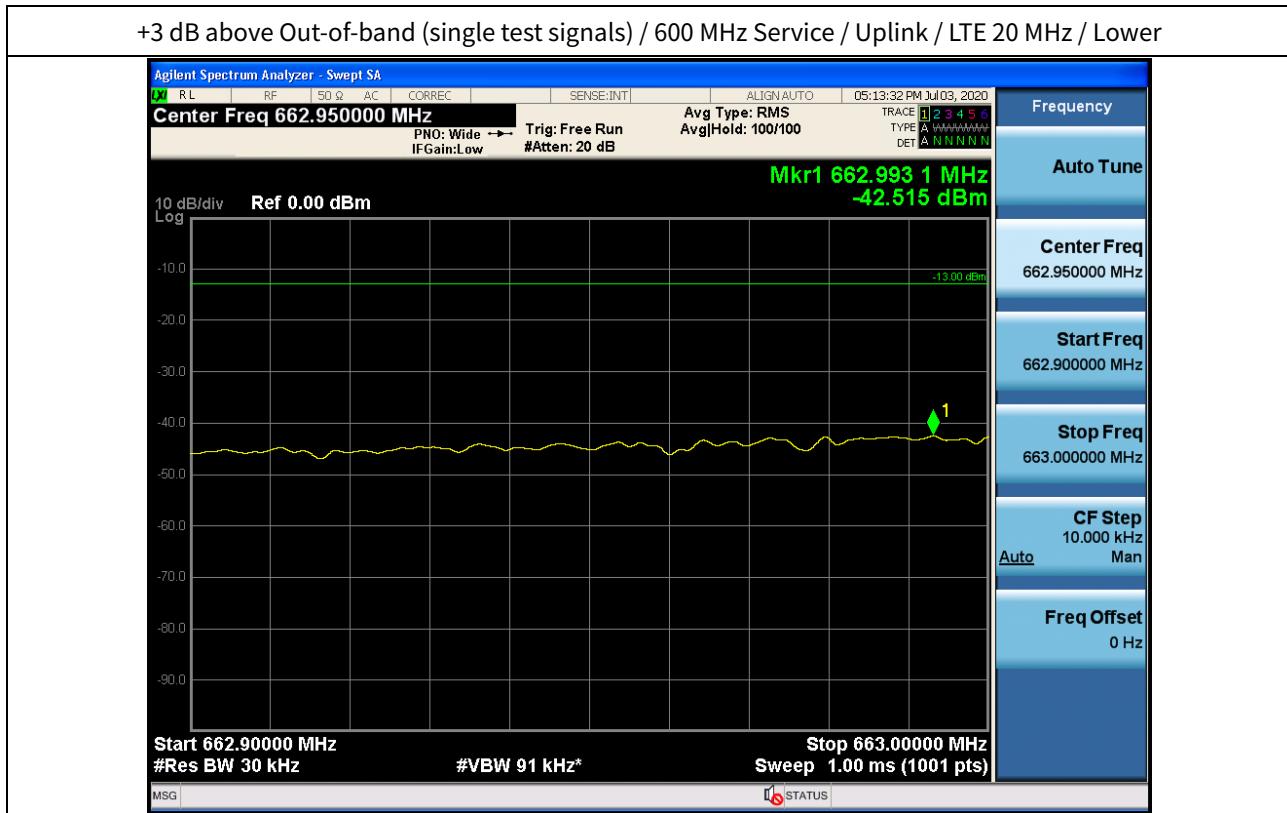


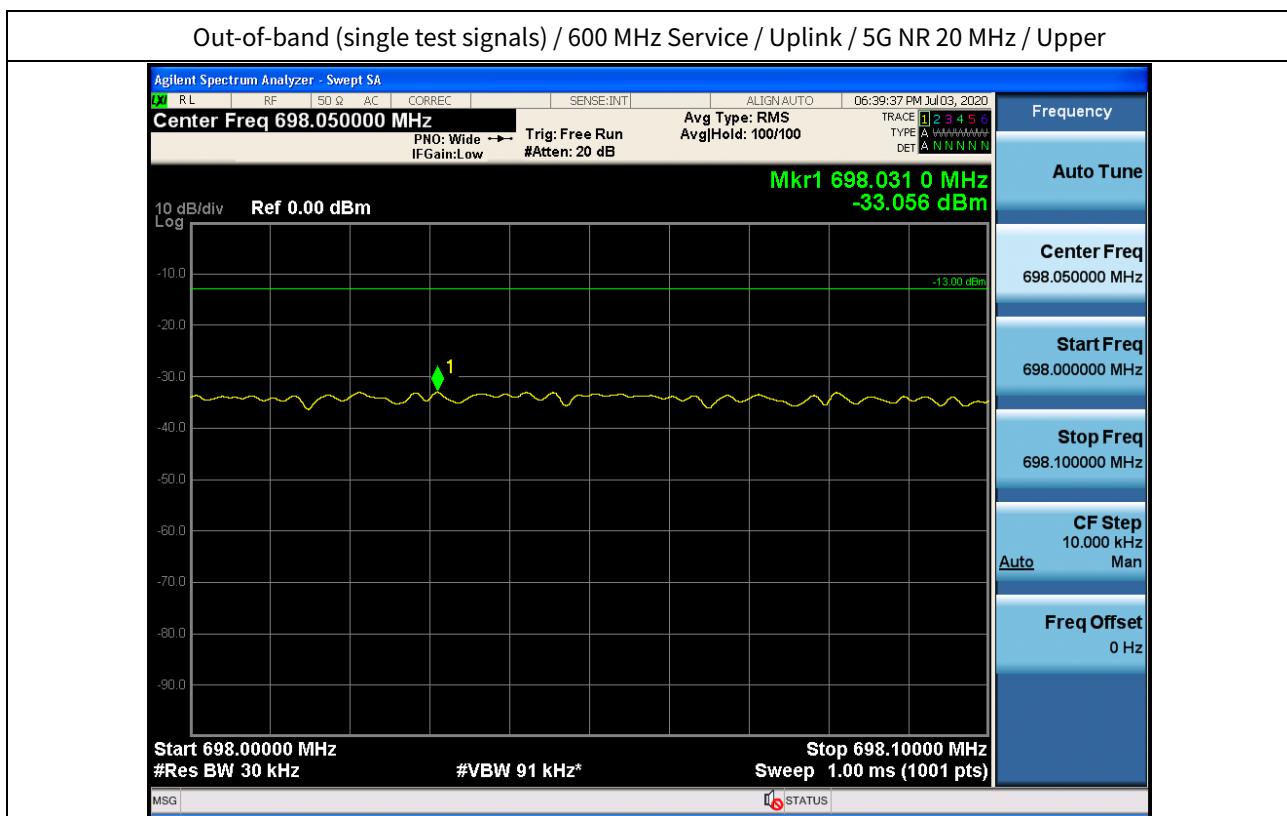
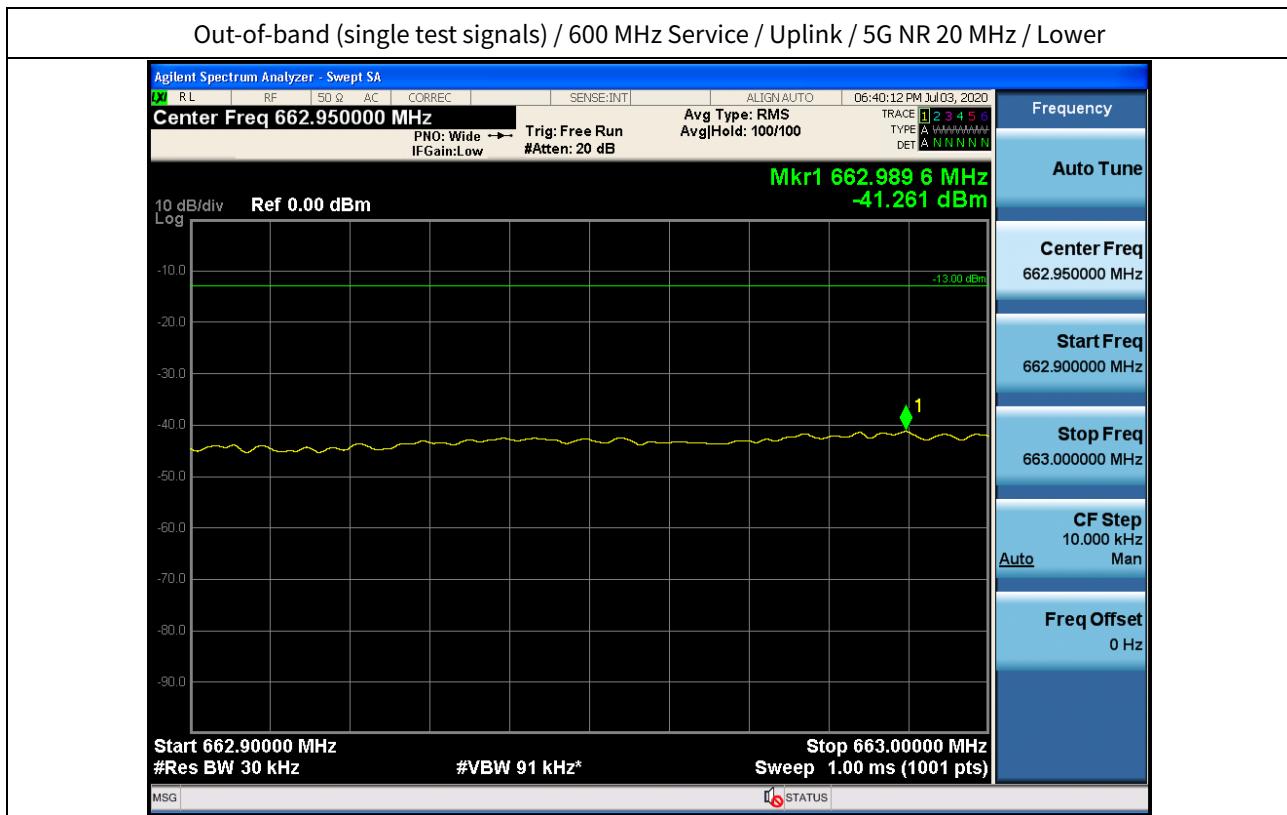




+3 dB above Out-of-band (single test signals) / 600 MHz Service / Uplink / 5G NR 20 MHz / Lower





+3 dB above Out-of-band (single test signals) / 600 MHz Service / Uplink / 5G NR 20 MHz / Upper

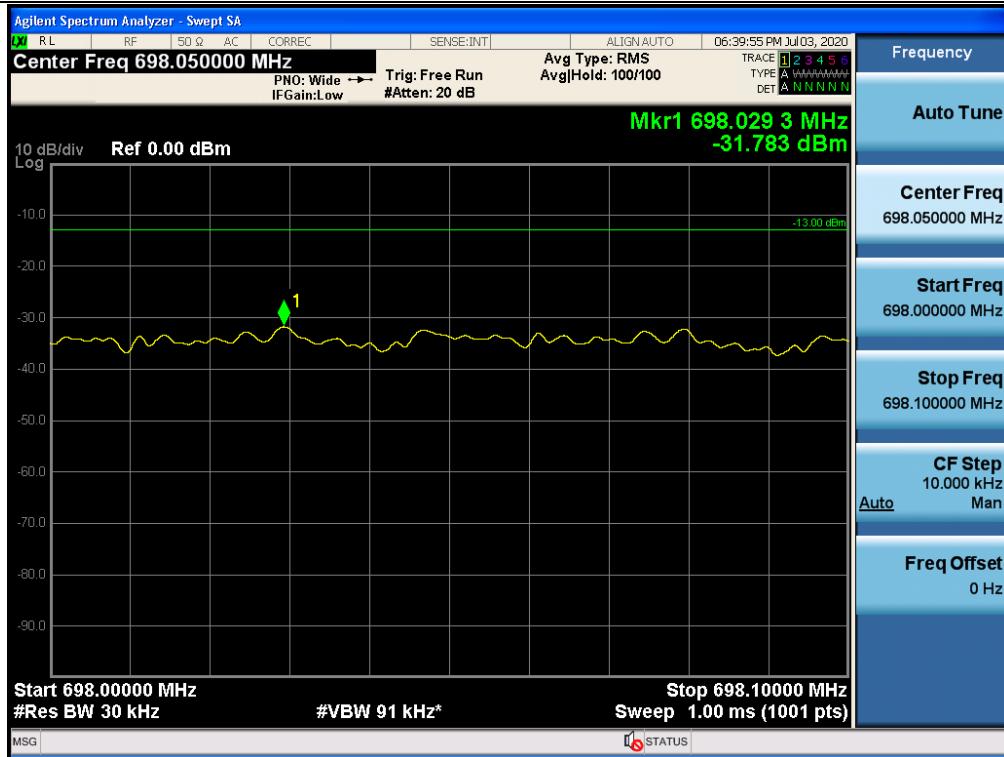

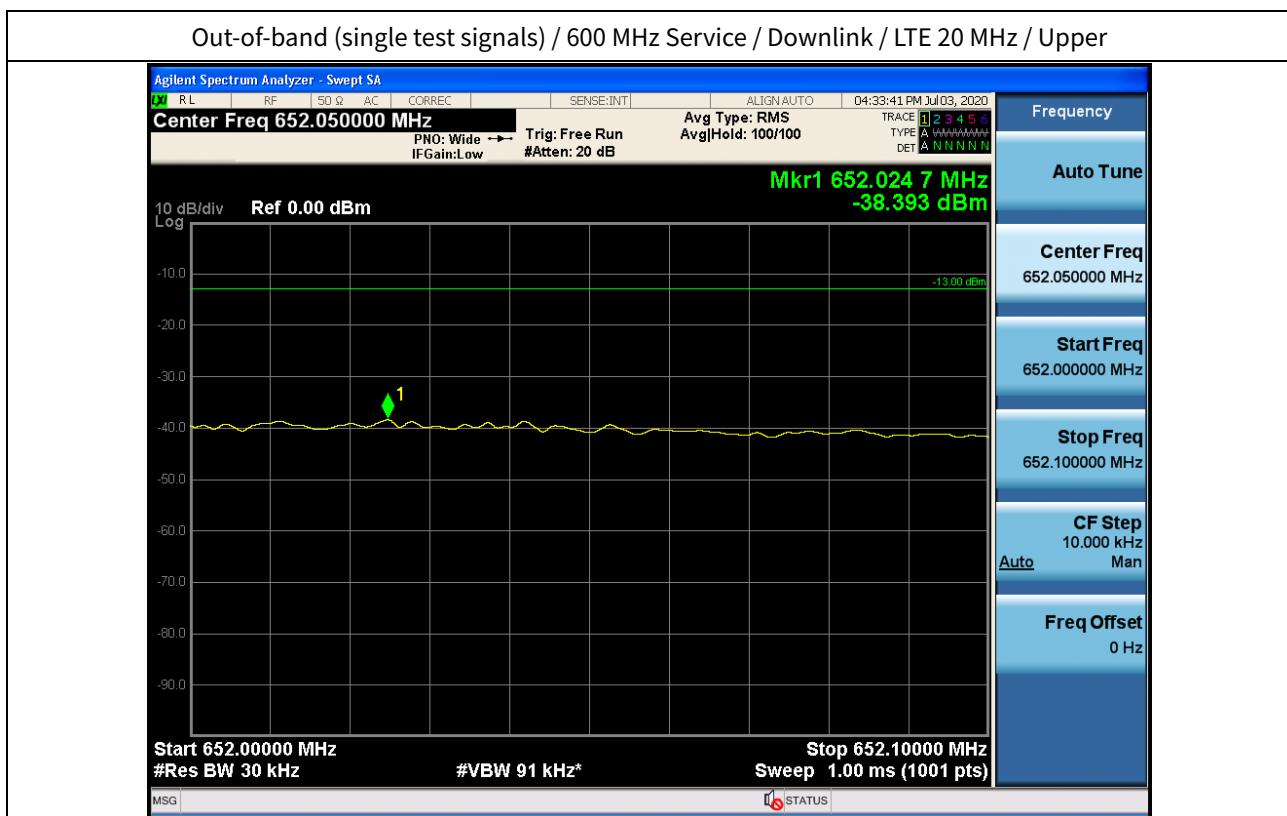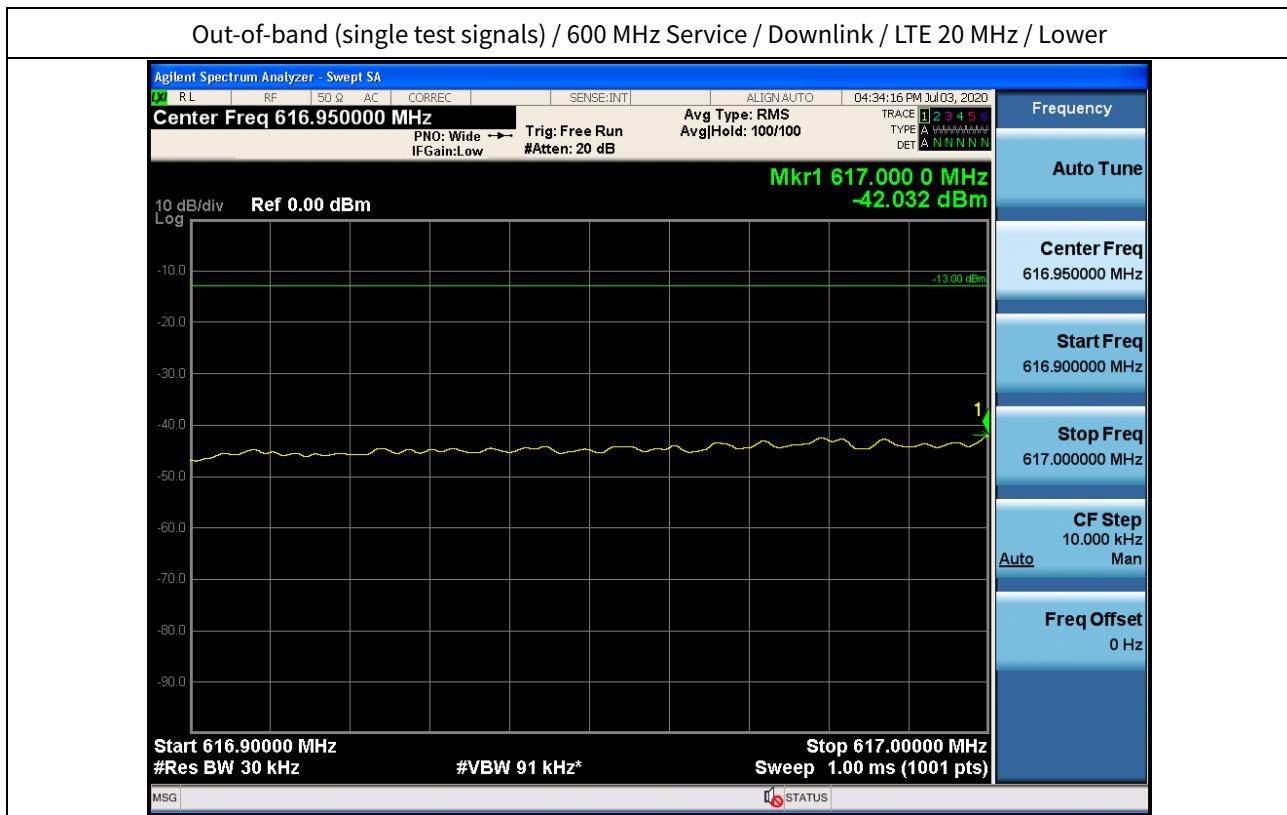

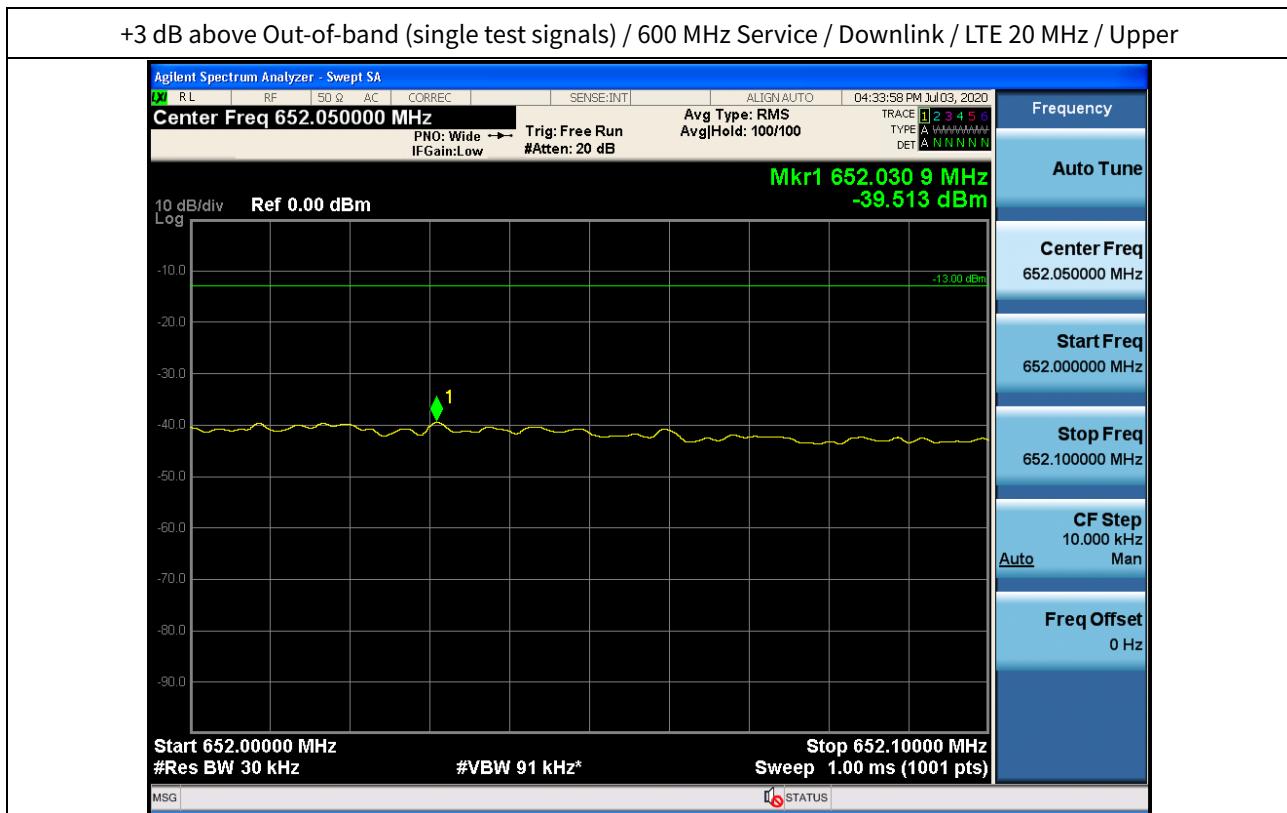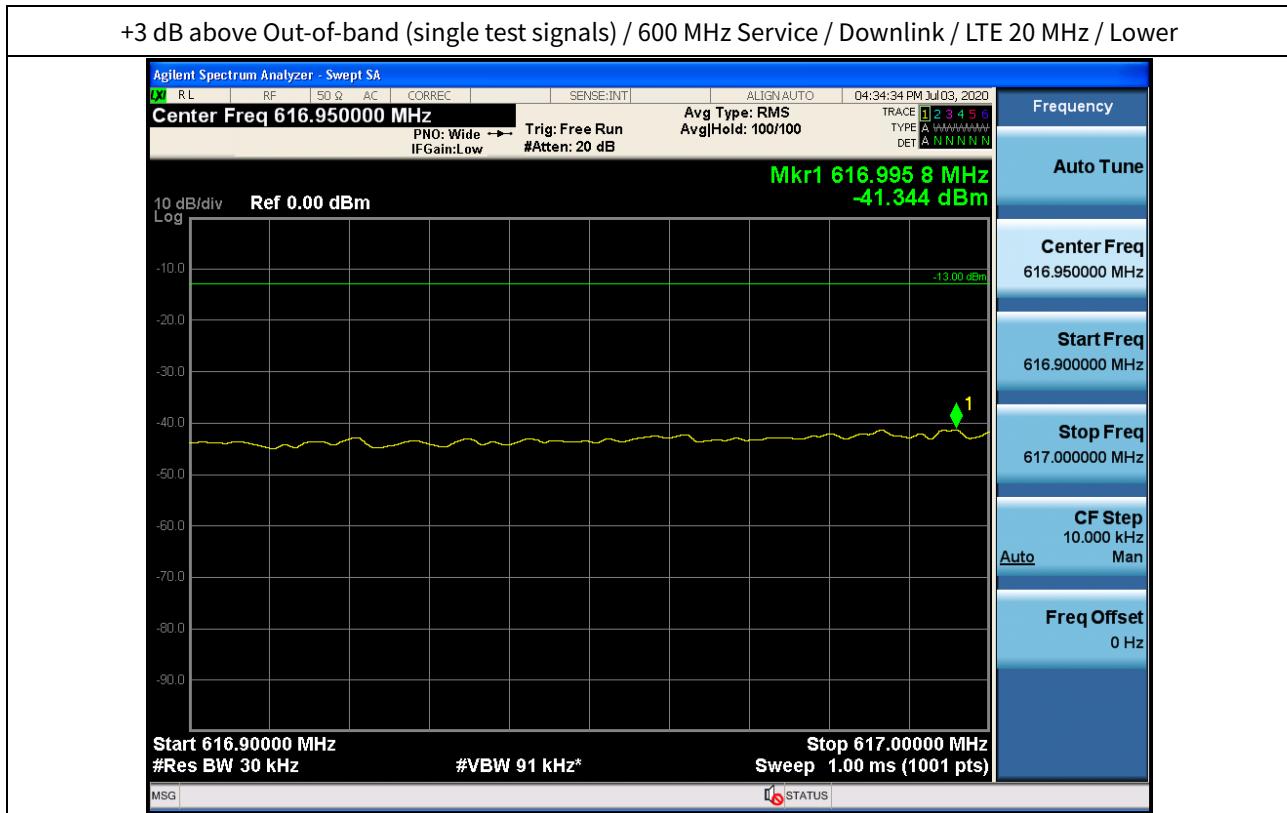

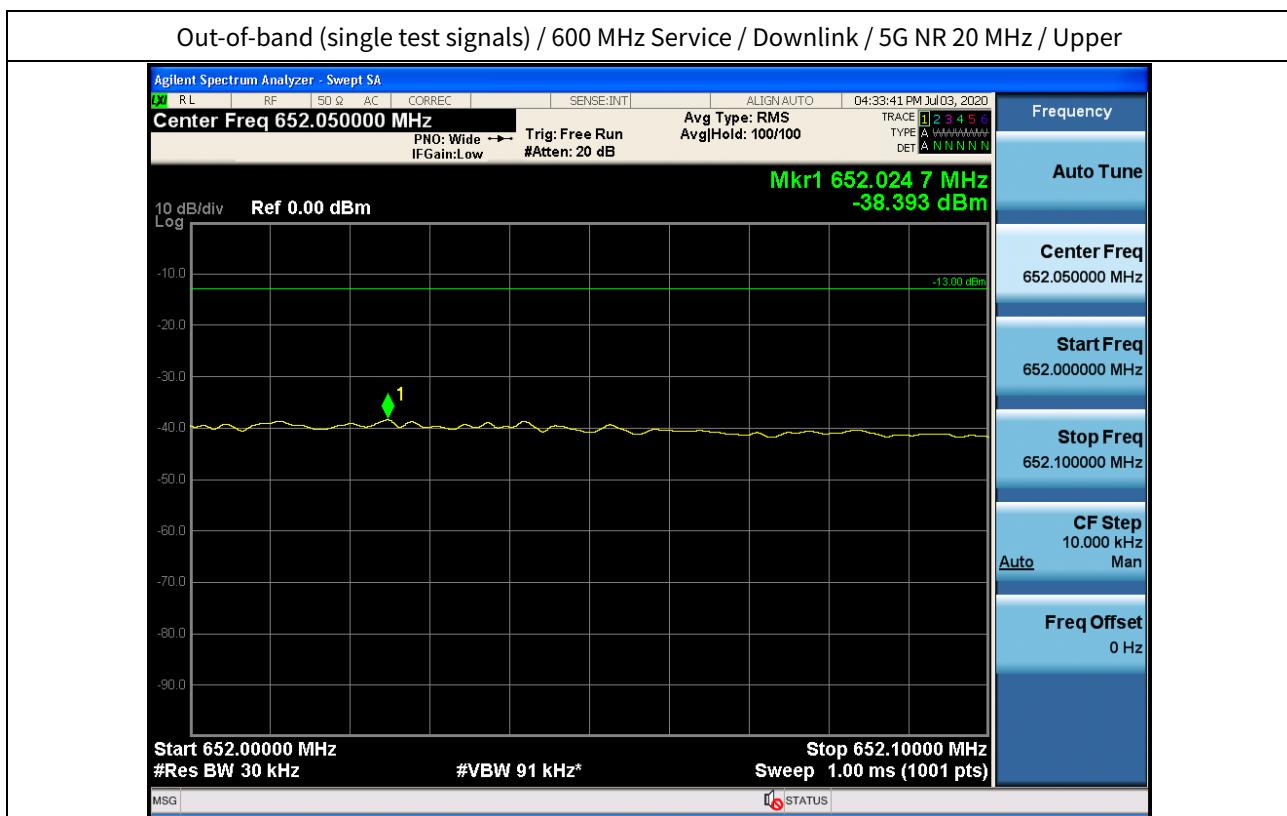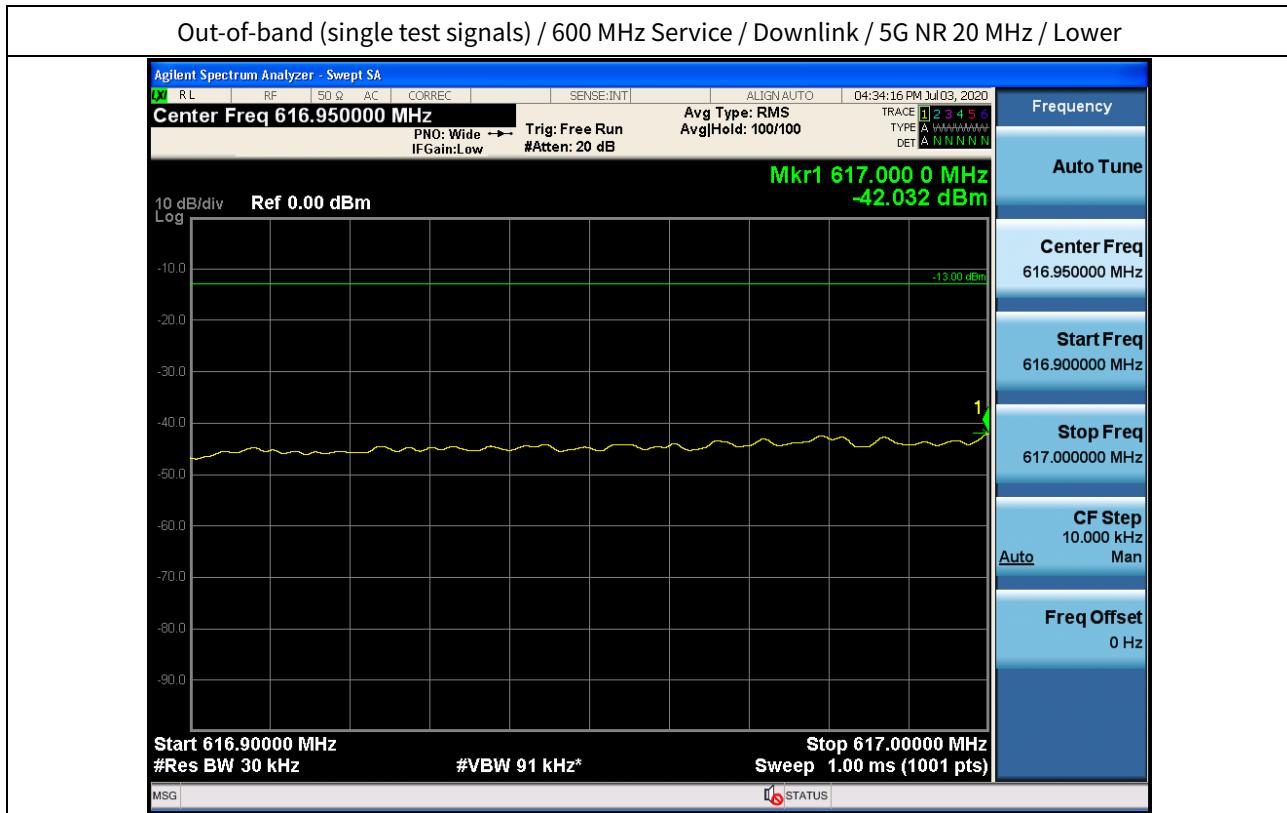



+3 dB above Out-of-band (single test signals) / 600 MHz Service / Downlink / 5G NR 20 MHz / Lower







+3 dB above Out-of-band (single test signals) / 600 MHz Service / Downlink / 5G NR 20 MHz / Upper






Plot data of Spurious Emissions

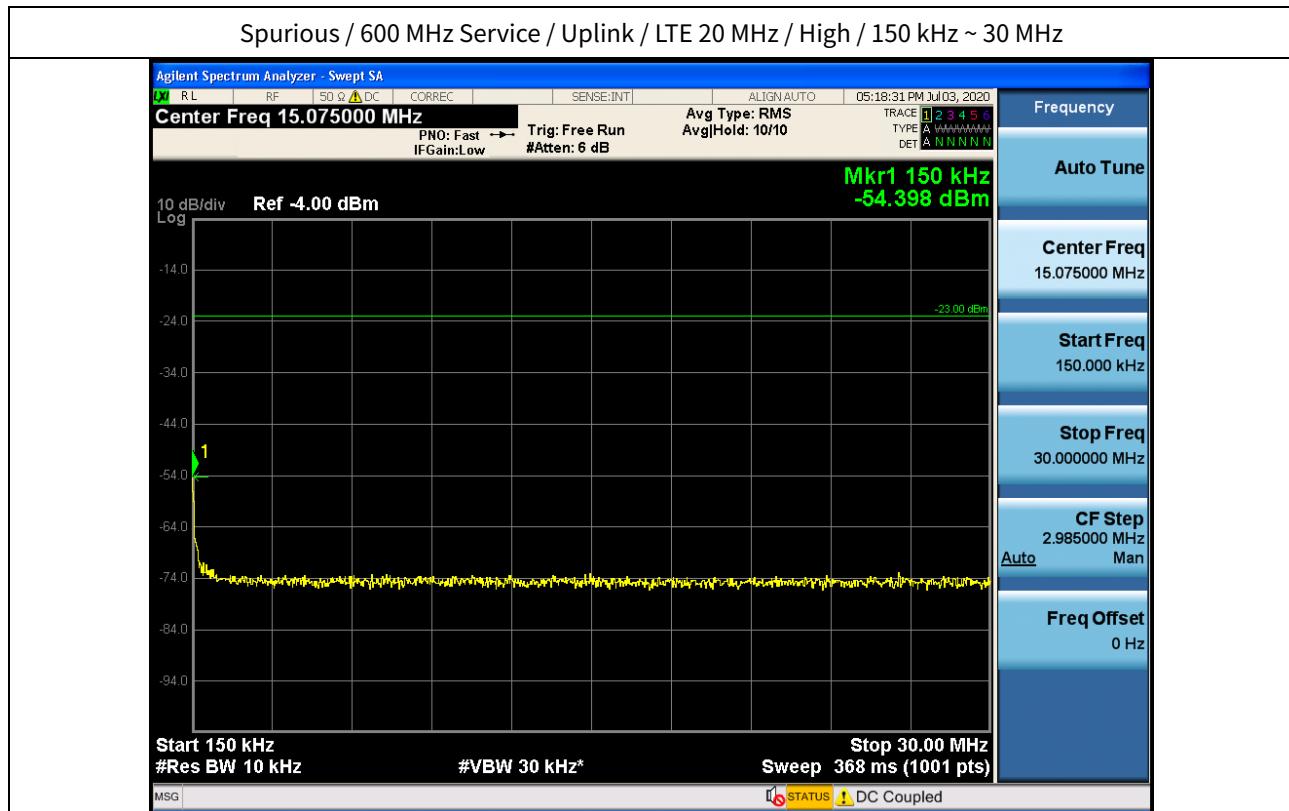
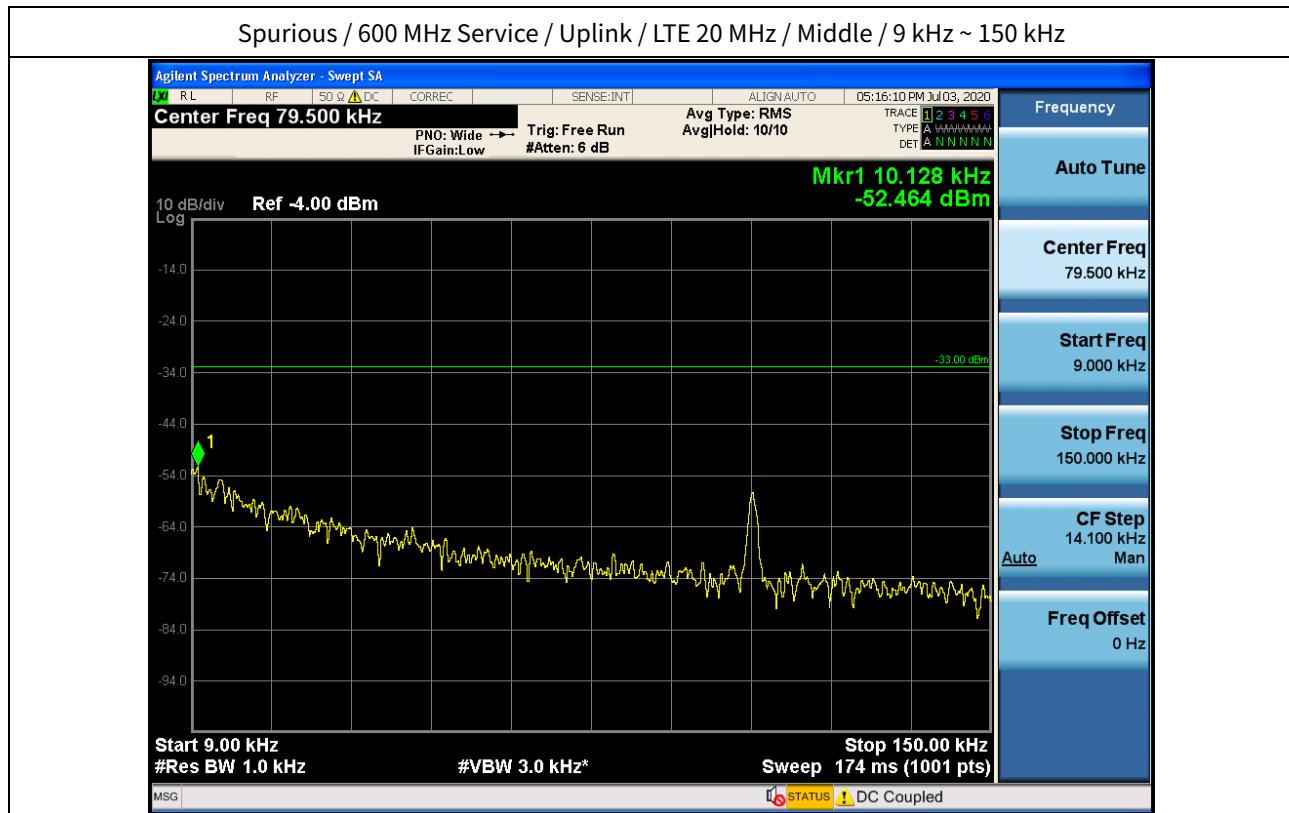


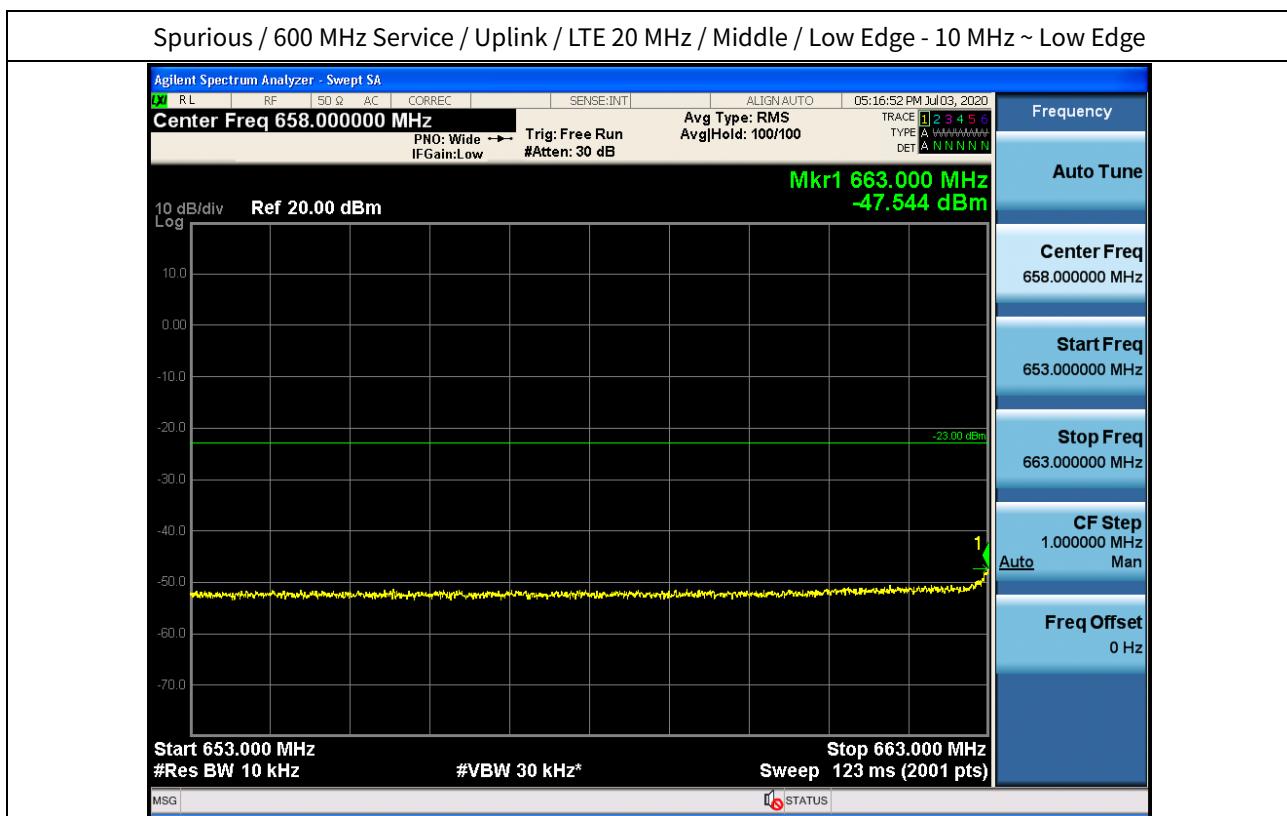
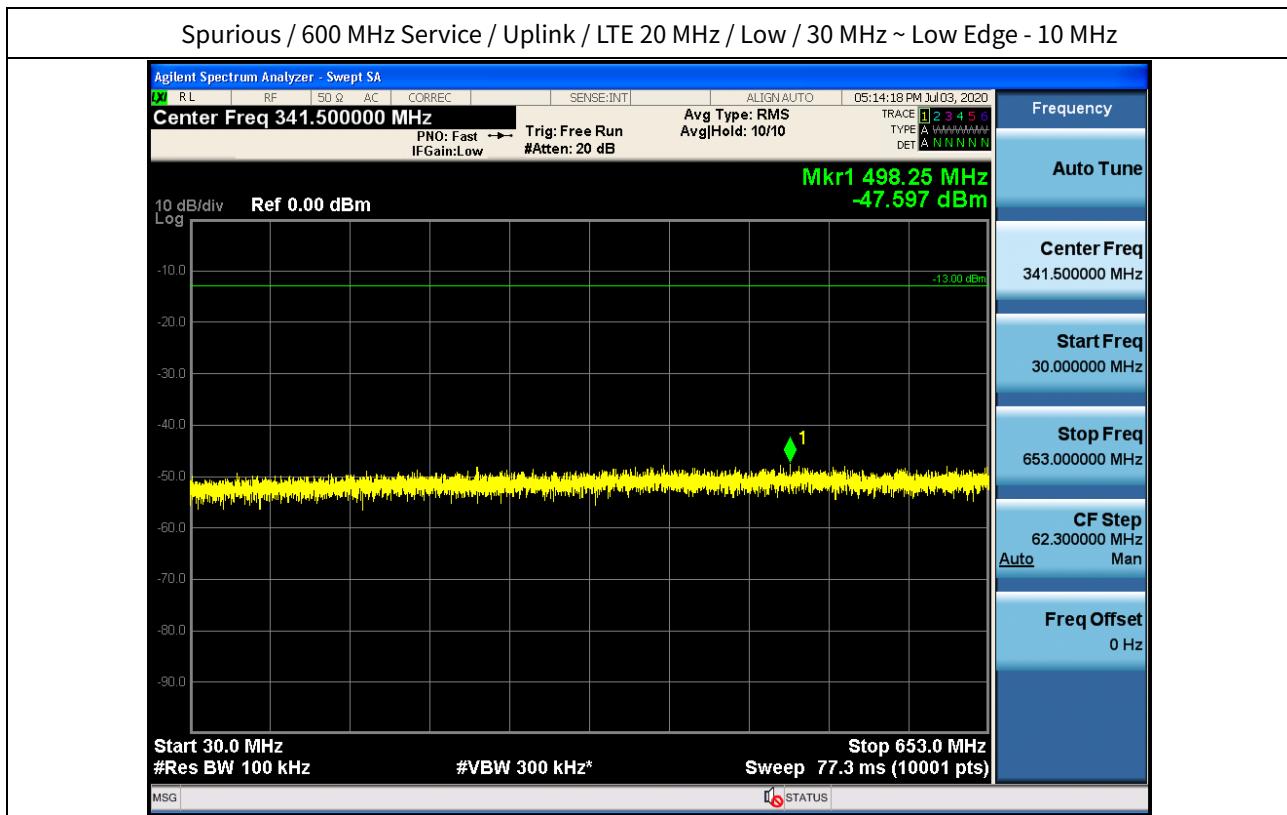


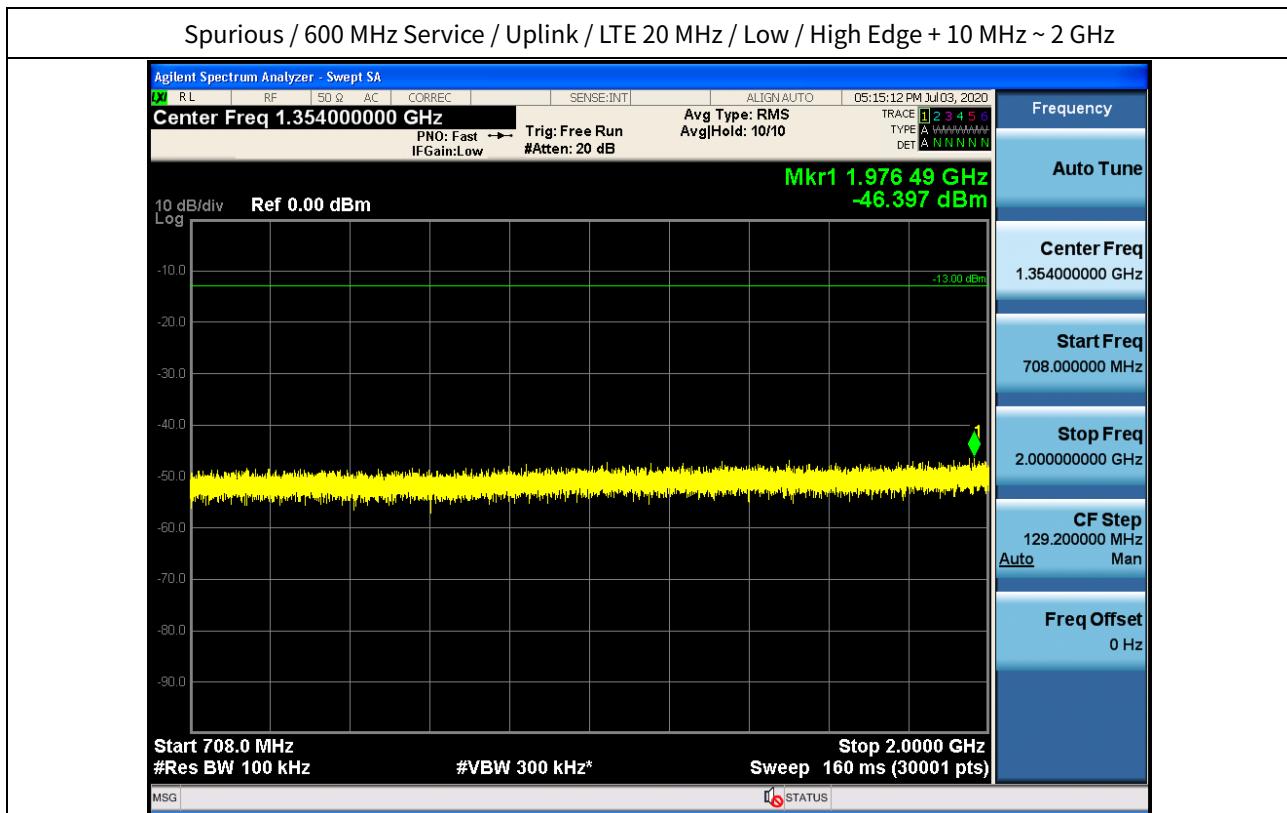
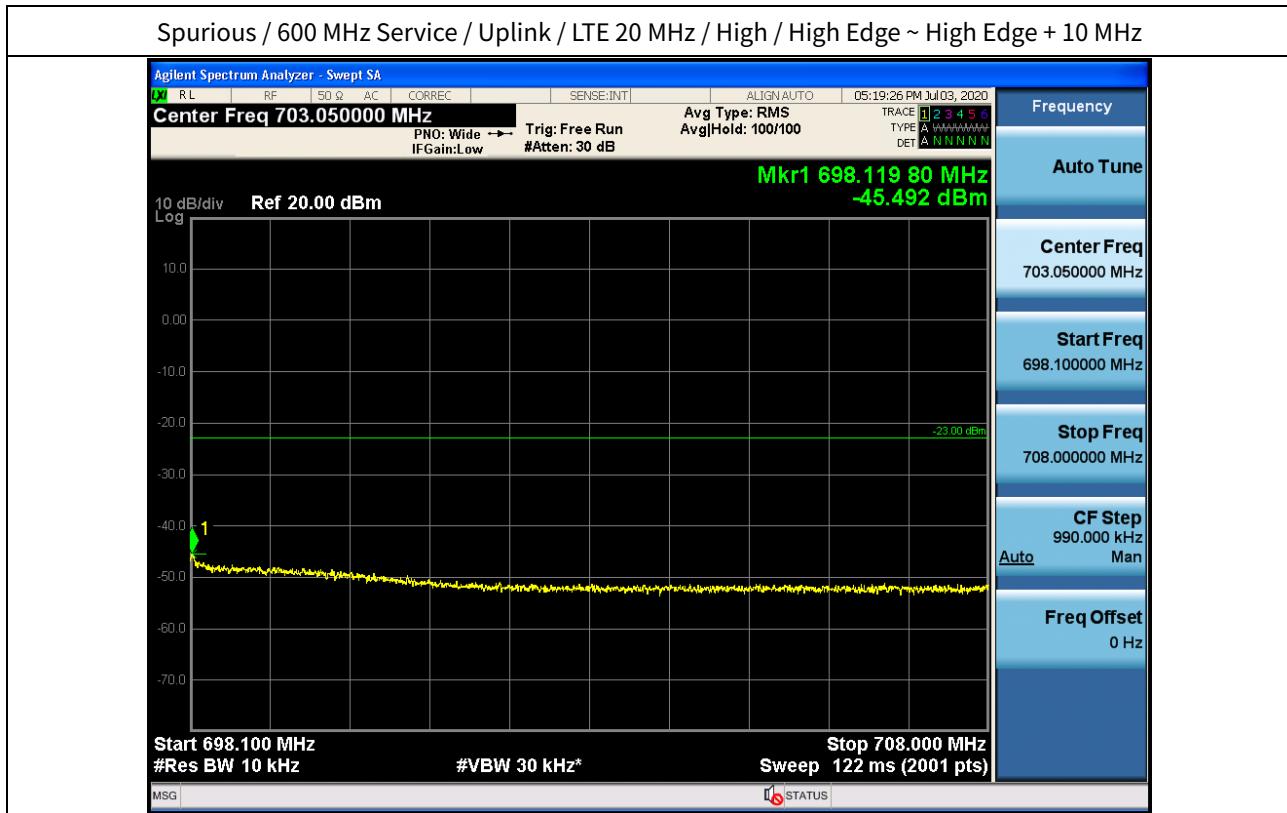


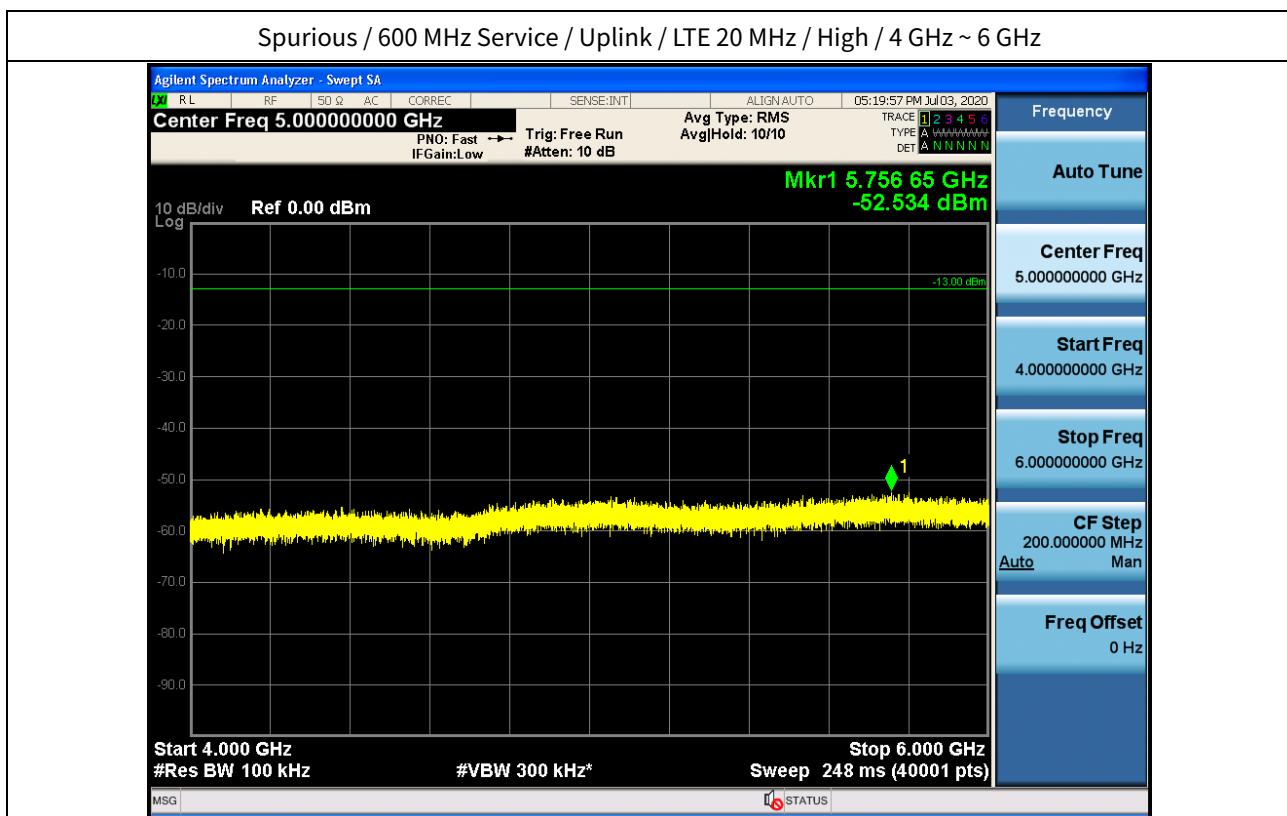
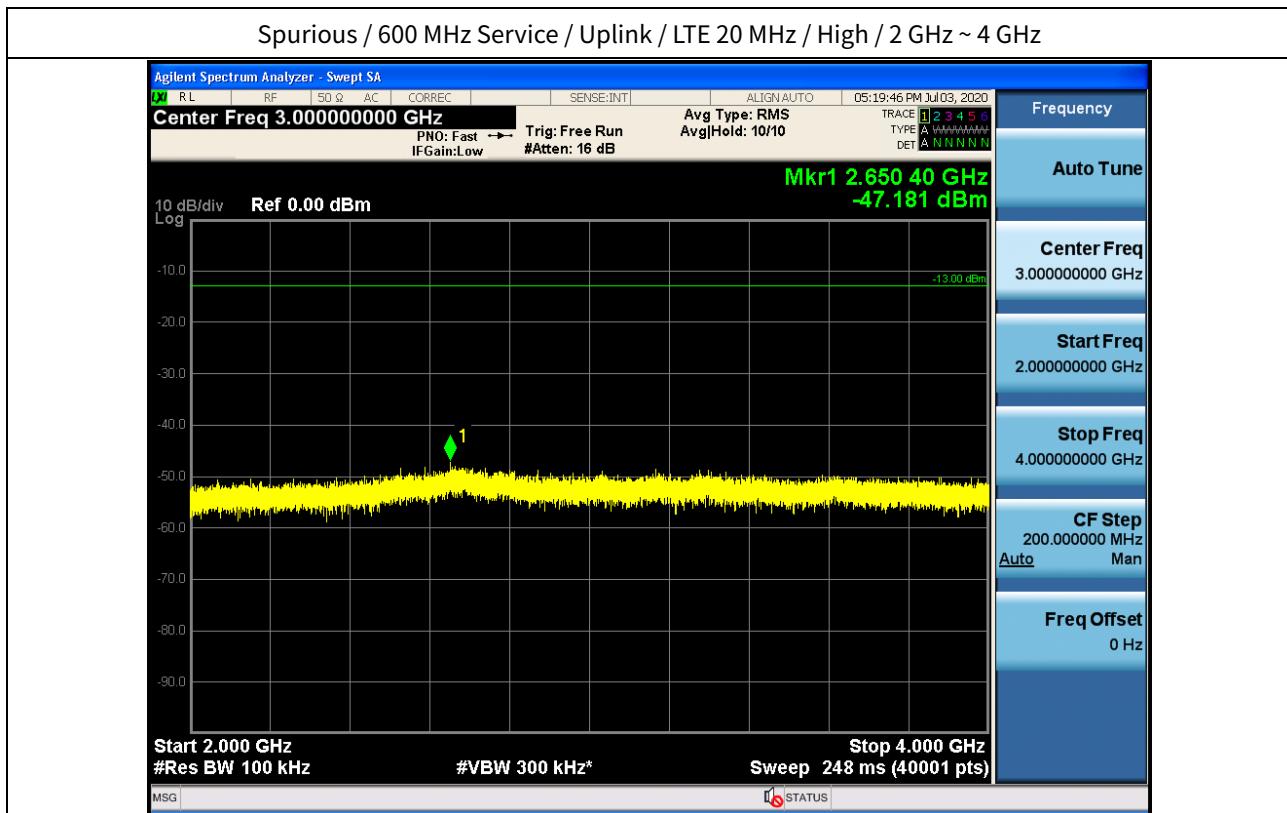


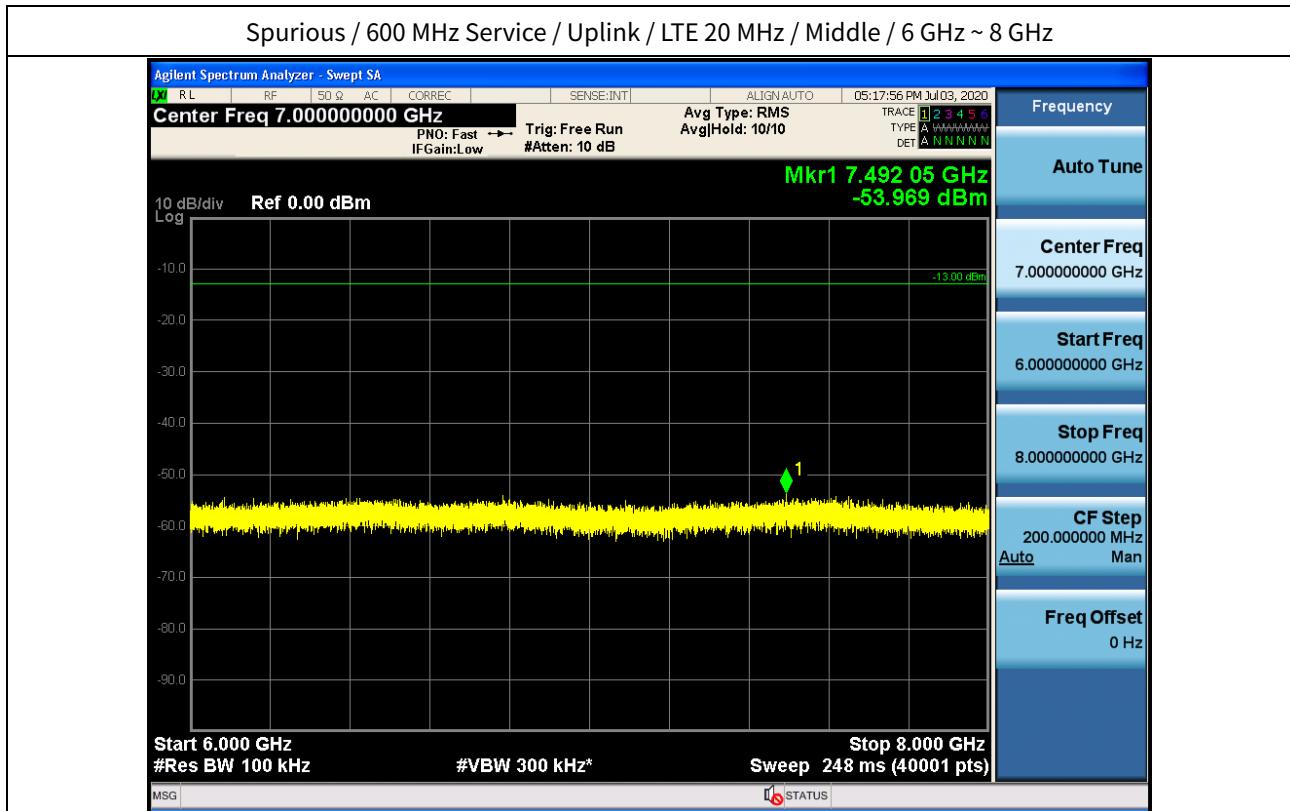


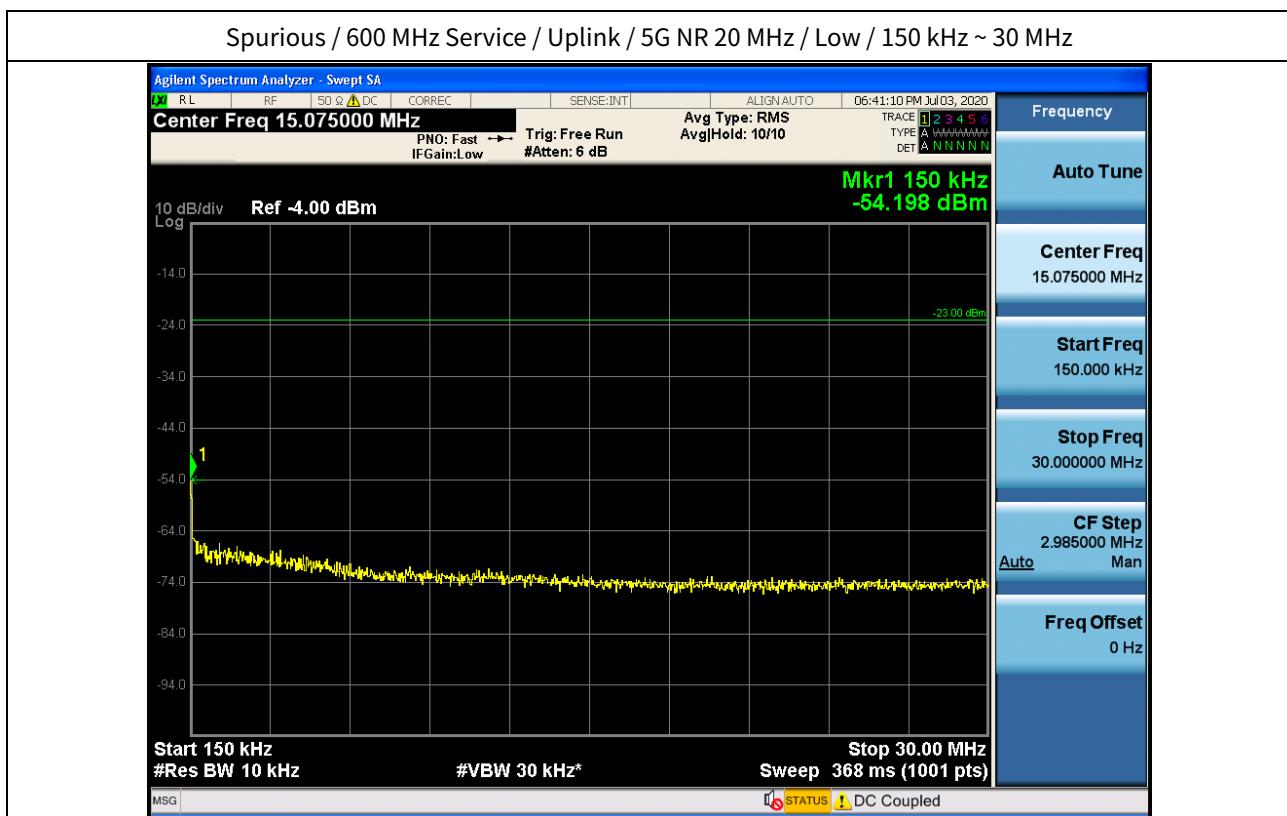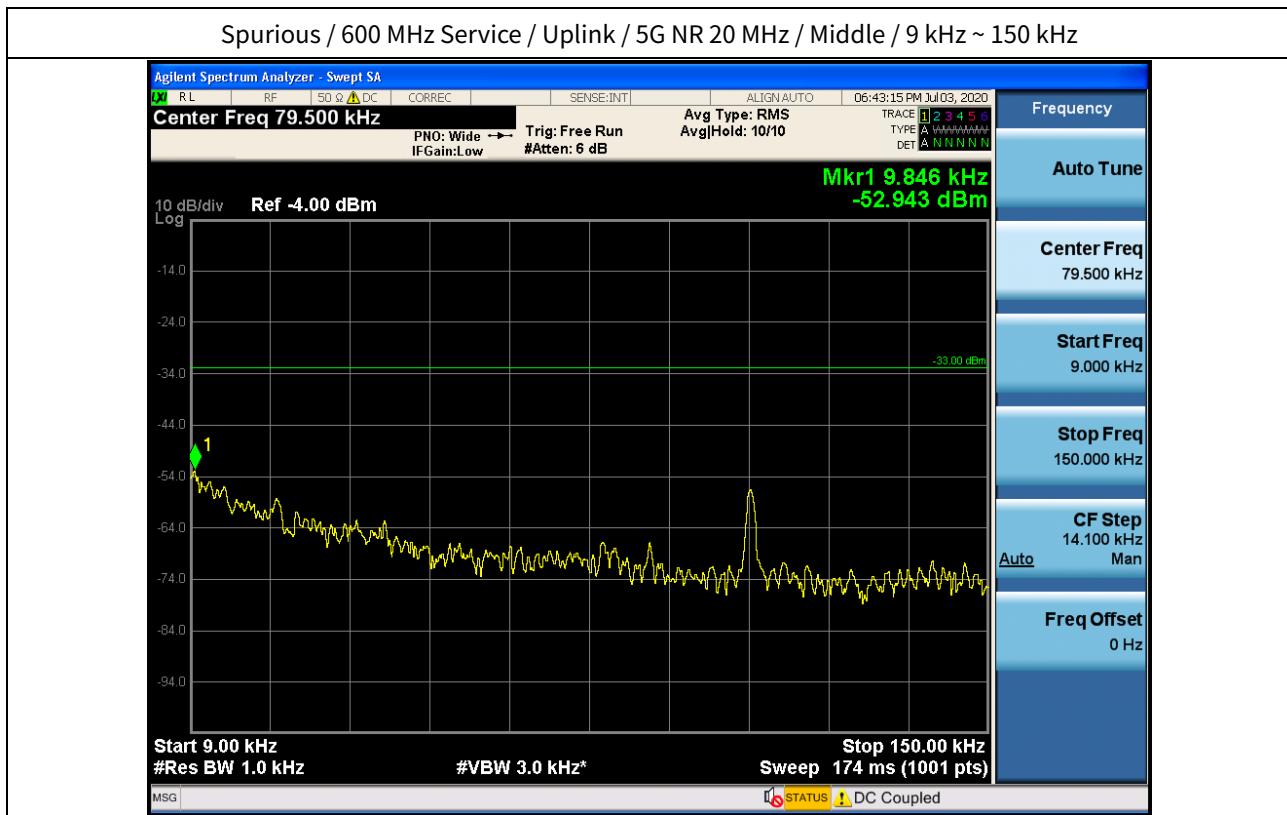

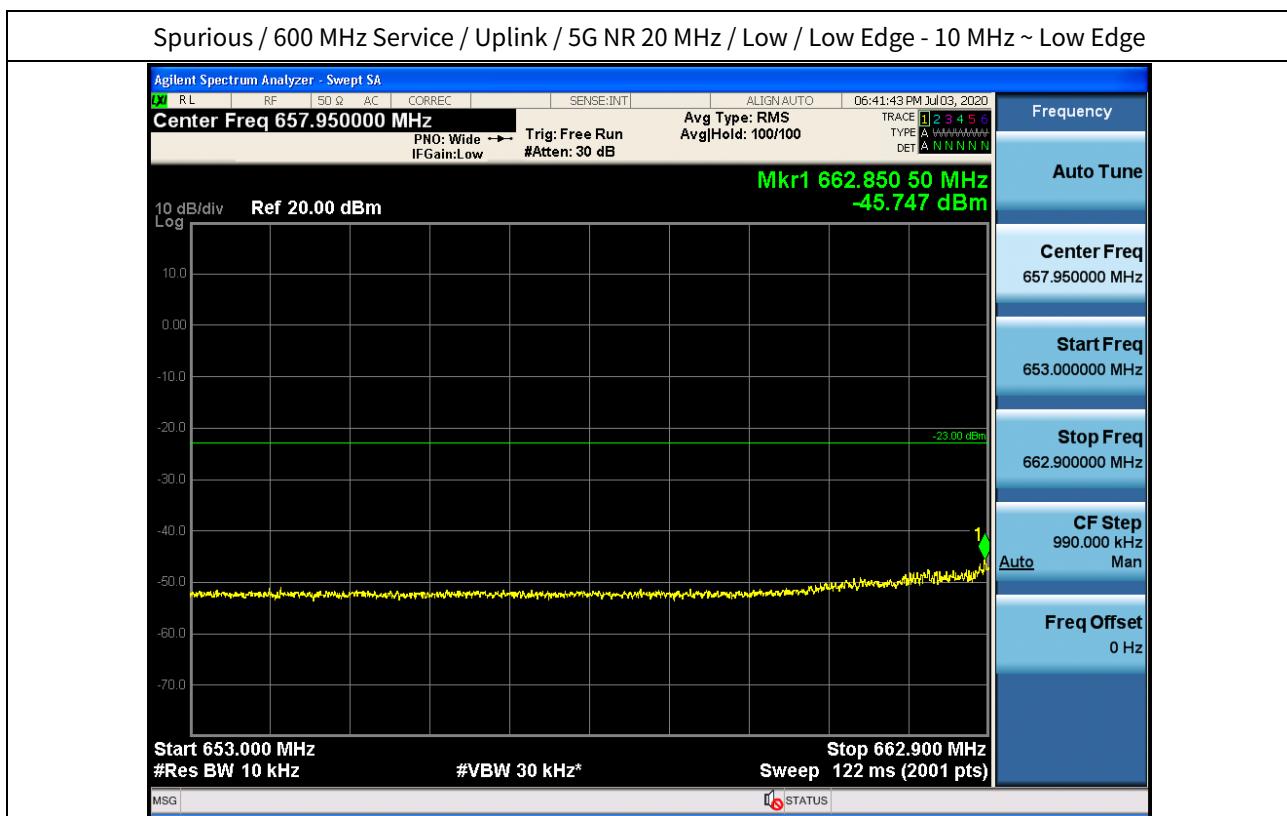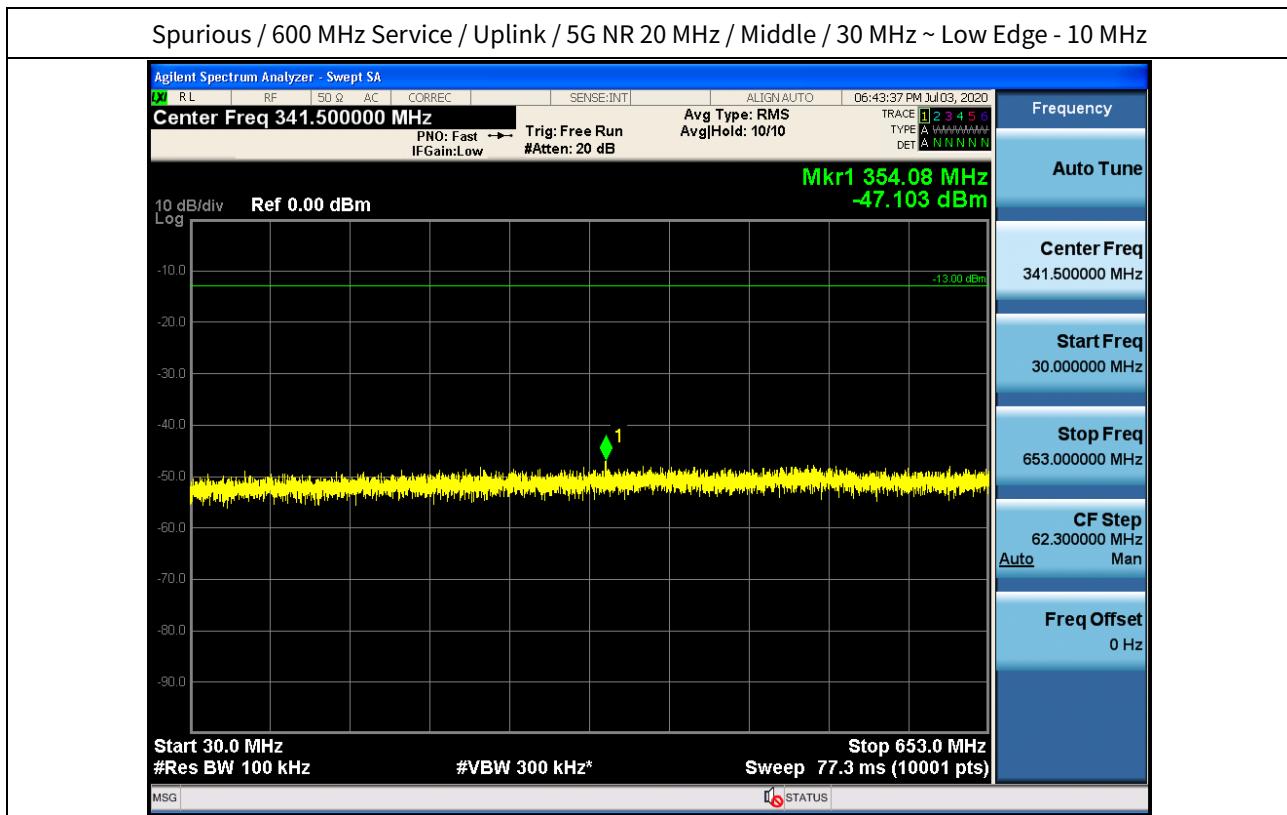

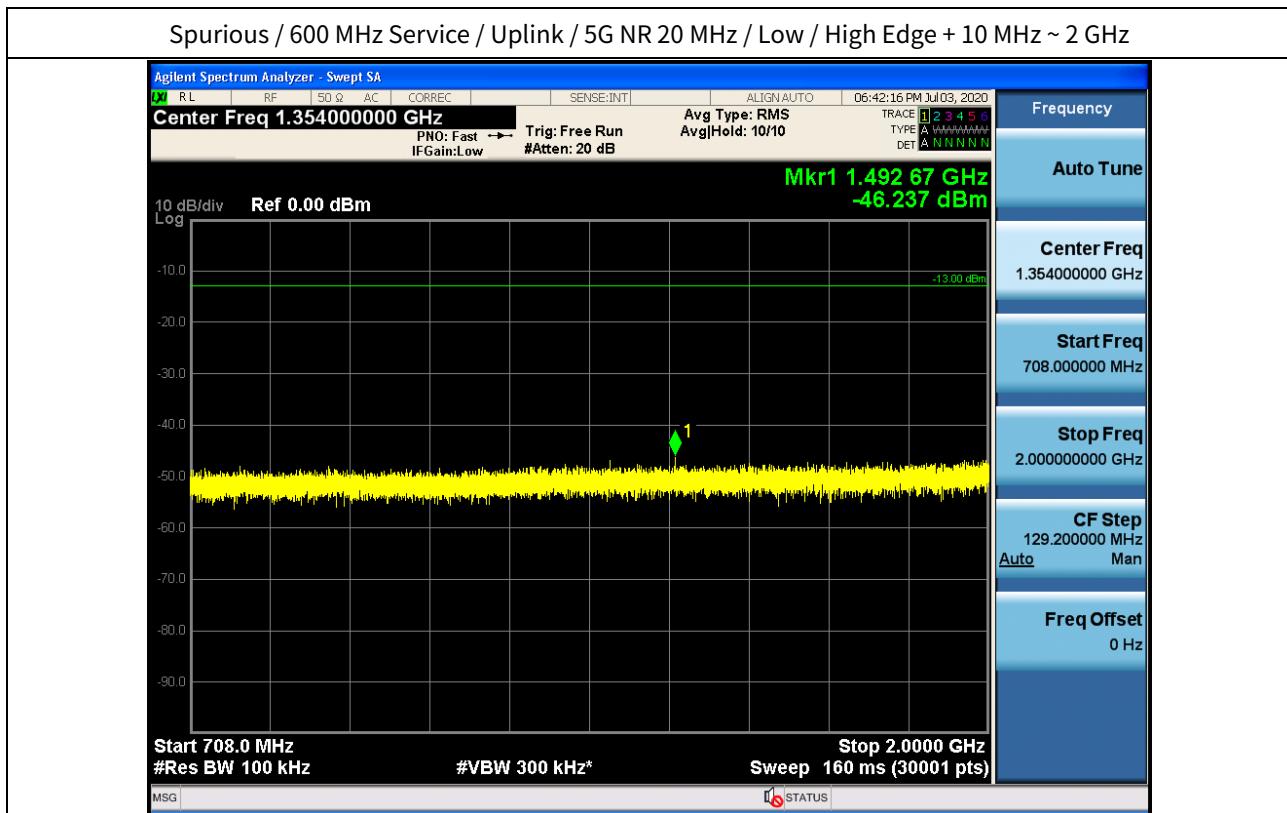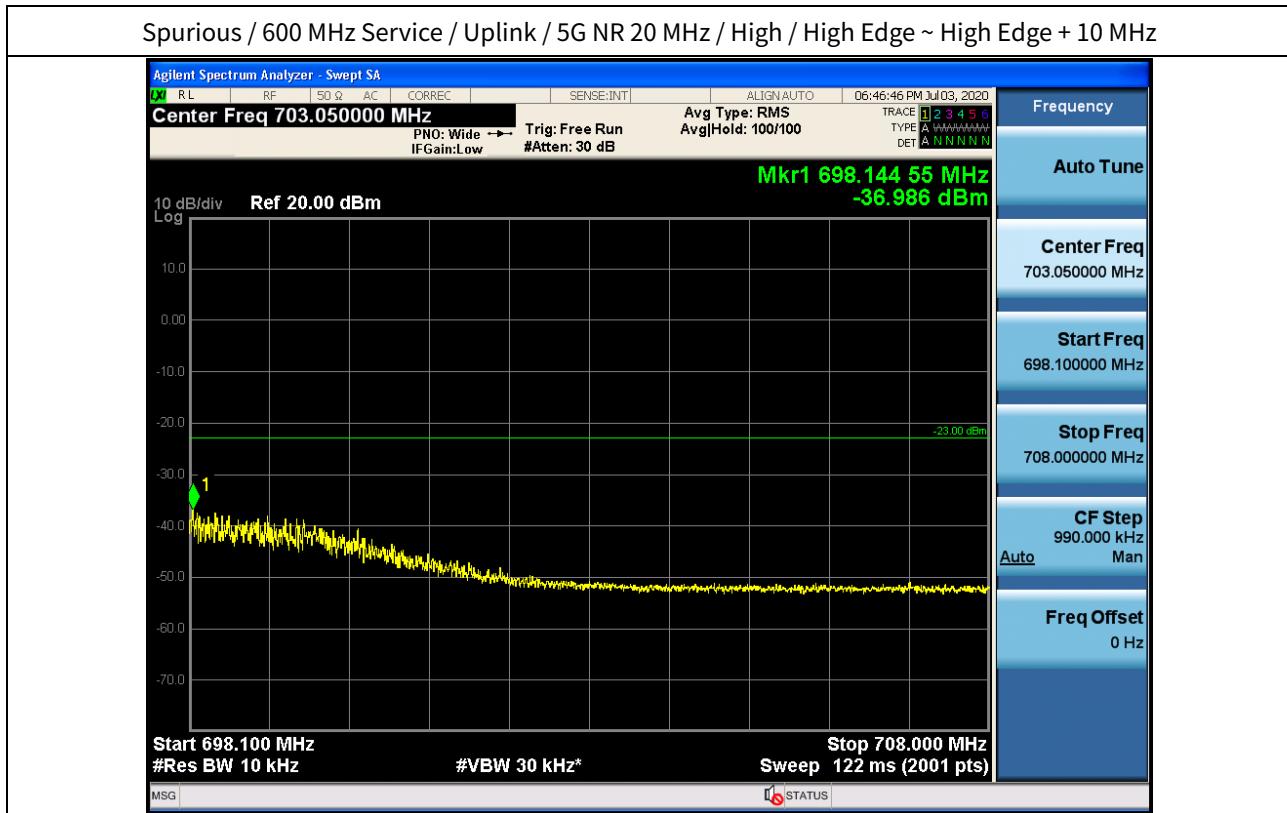

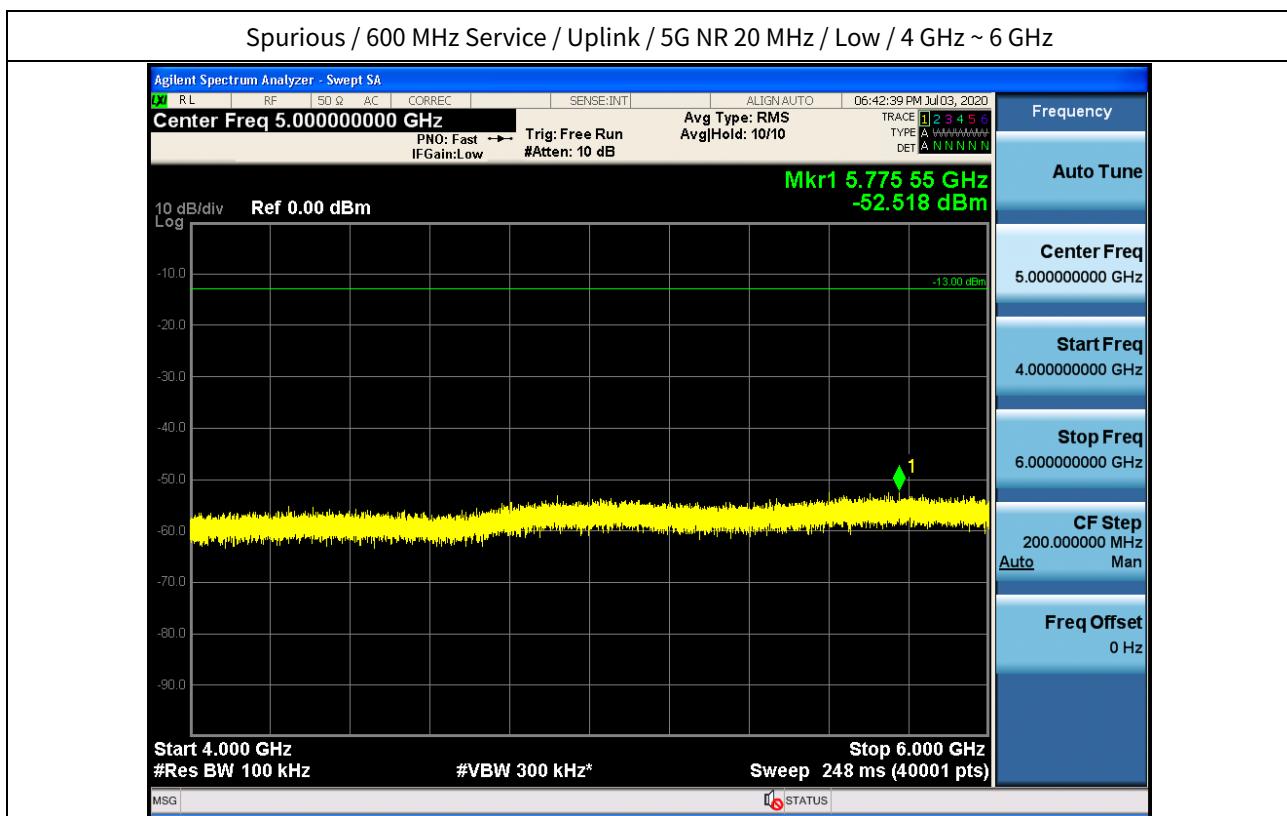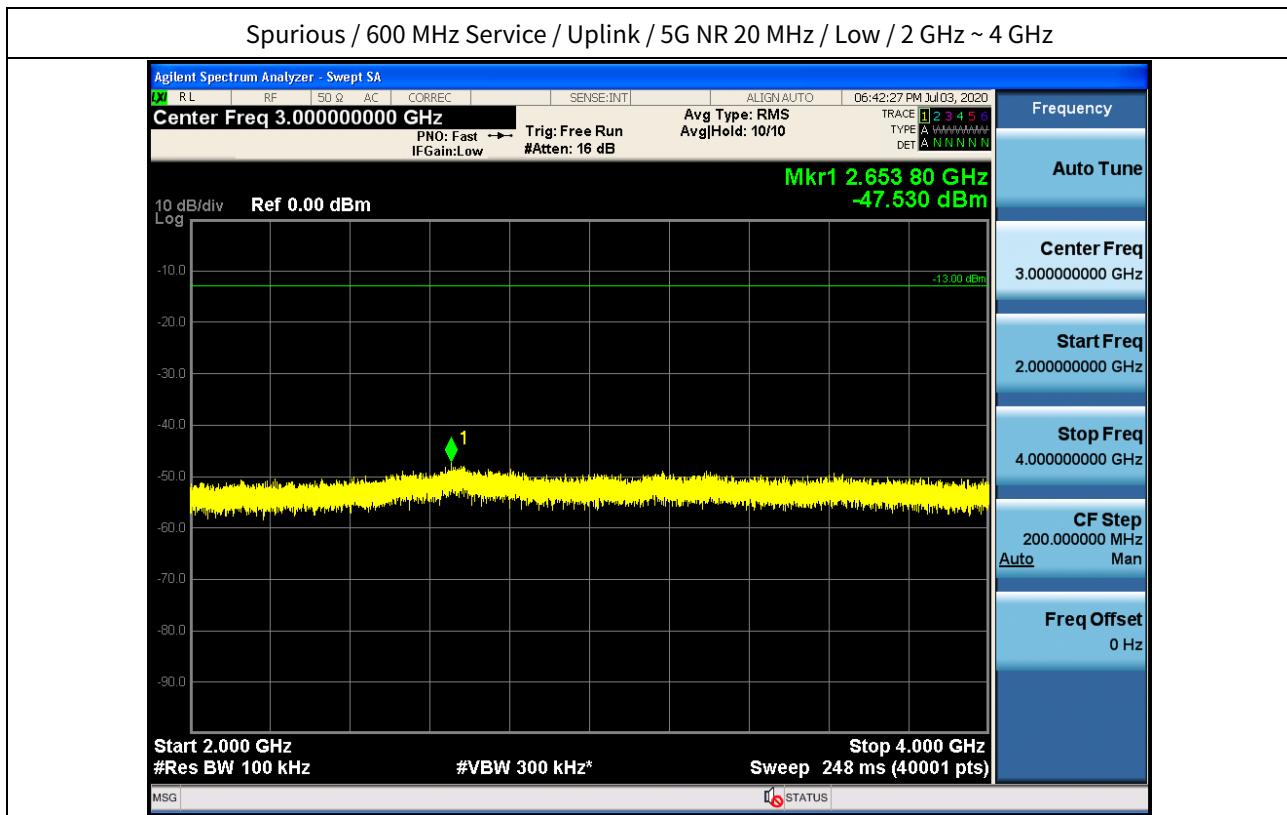


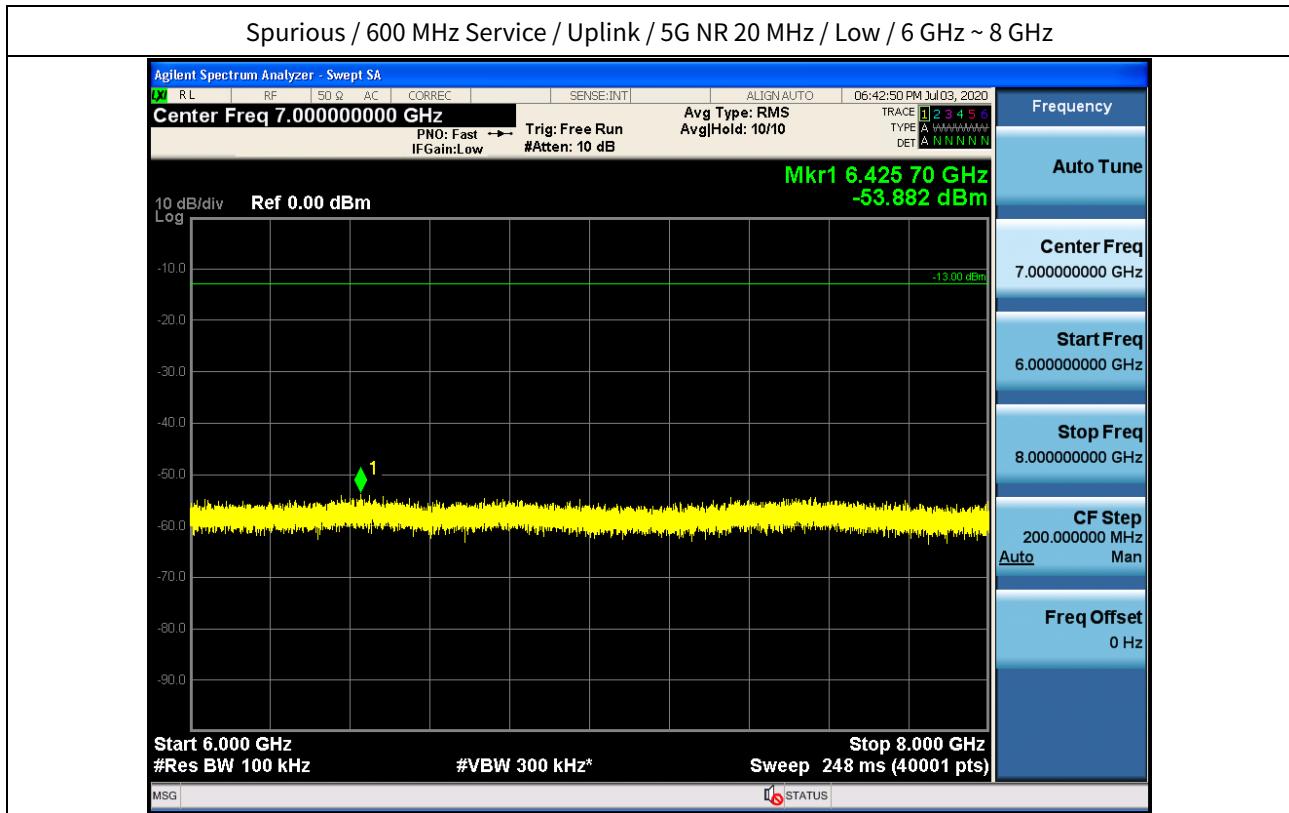




Spurious / 600 MHz Service / Uplink / Simultaneous / High / 9 kHz ~ 150 kHz




Spurious / 600 MHz Service / Uplink / Simultaneous / High / 150 kHz ~ 30 MHz



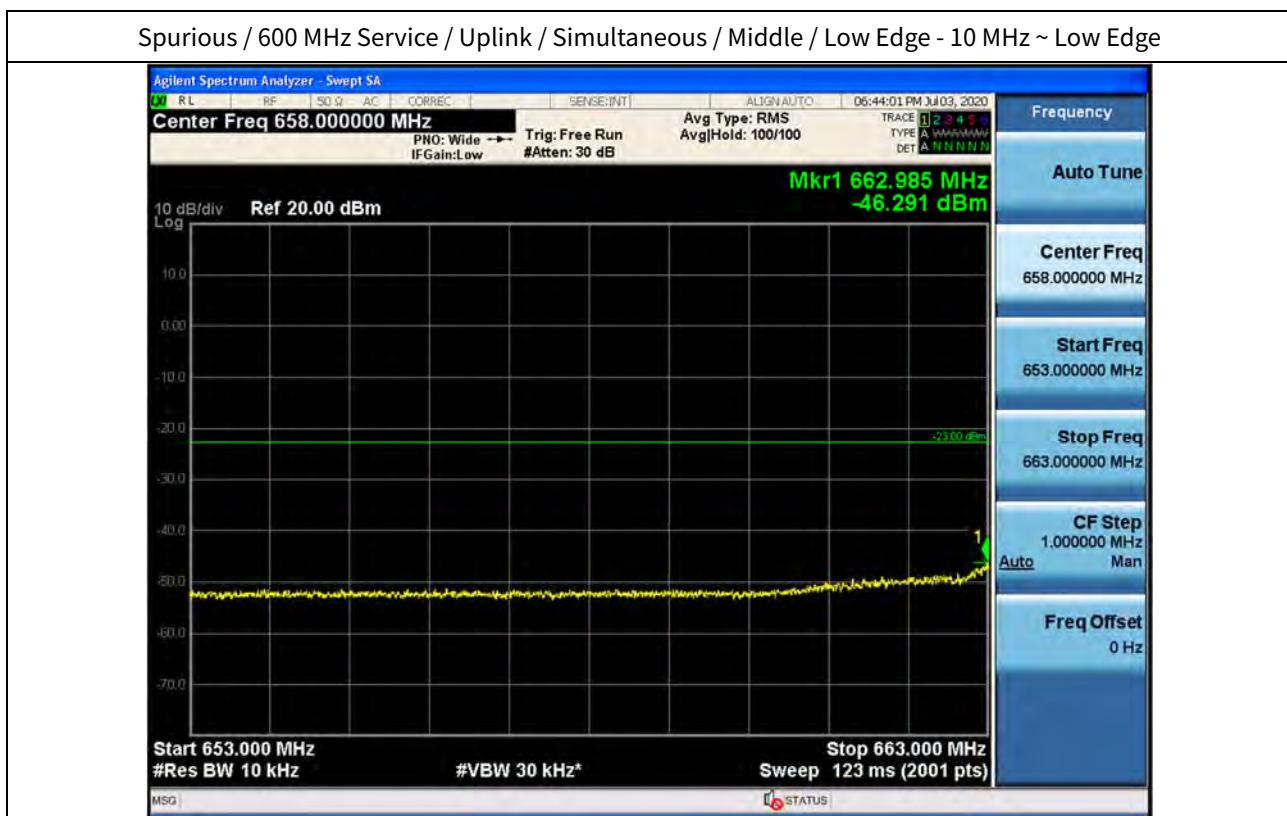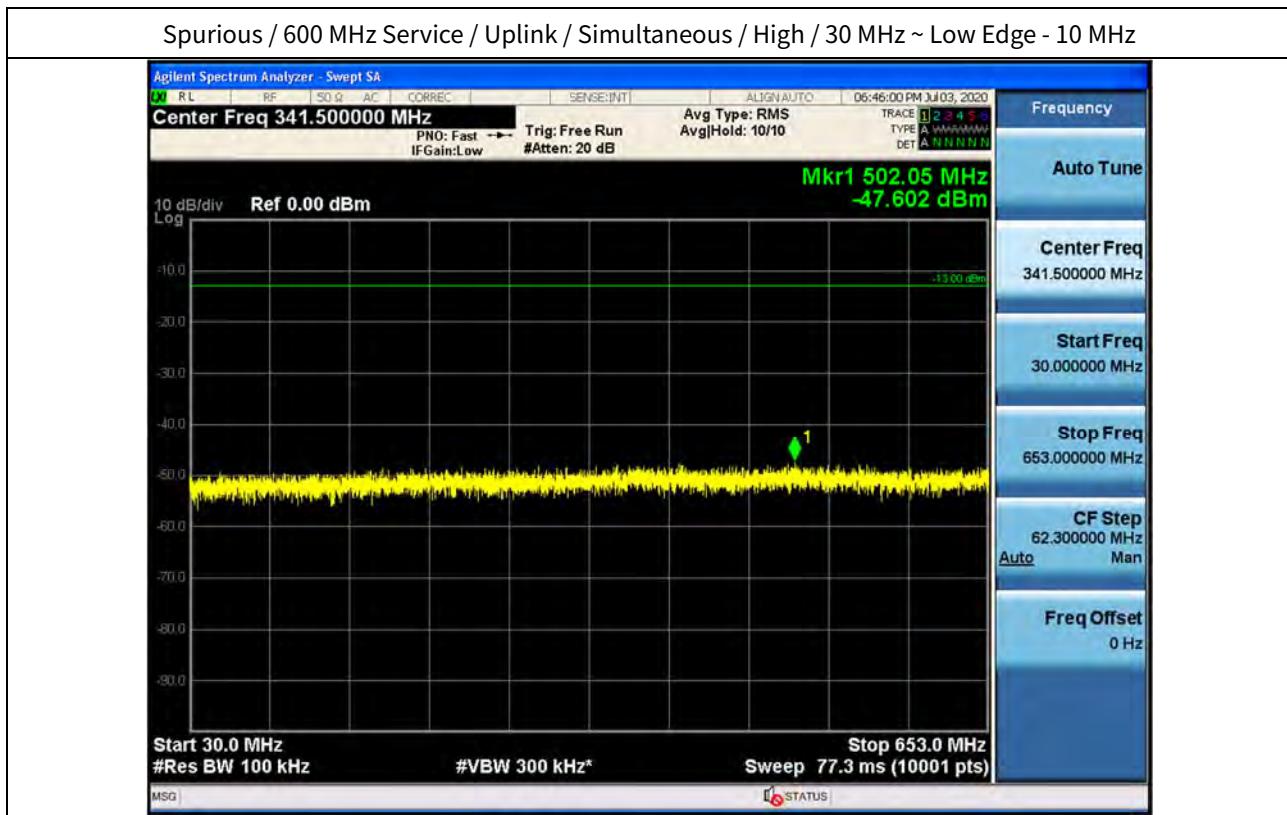


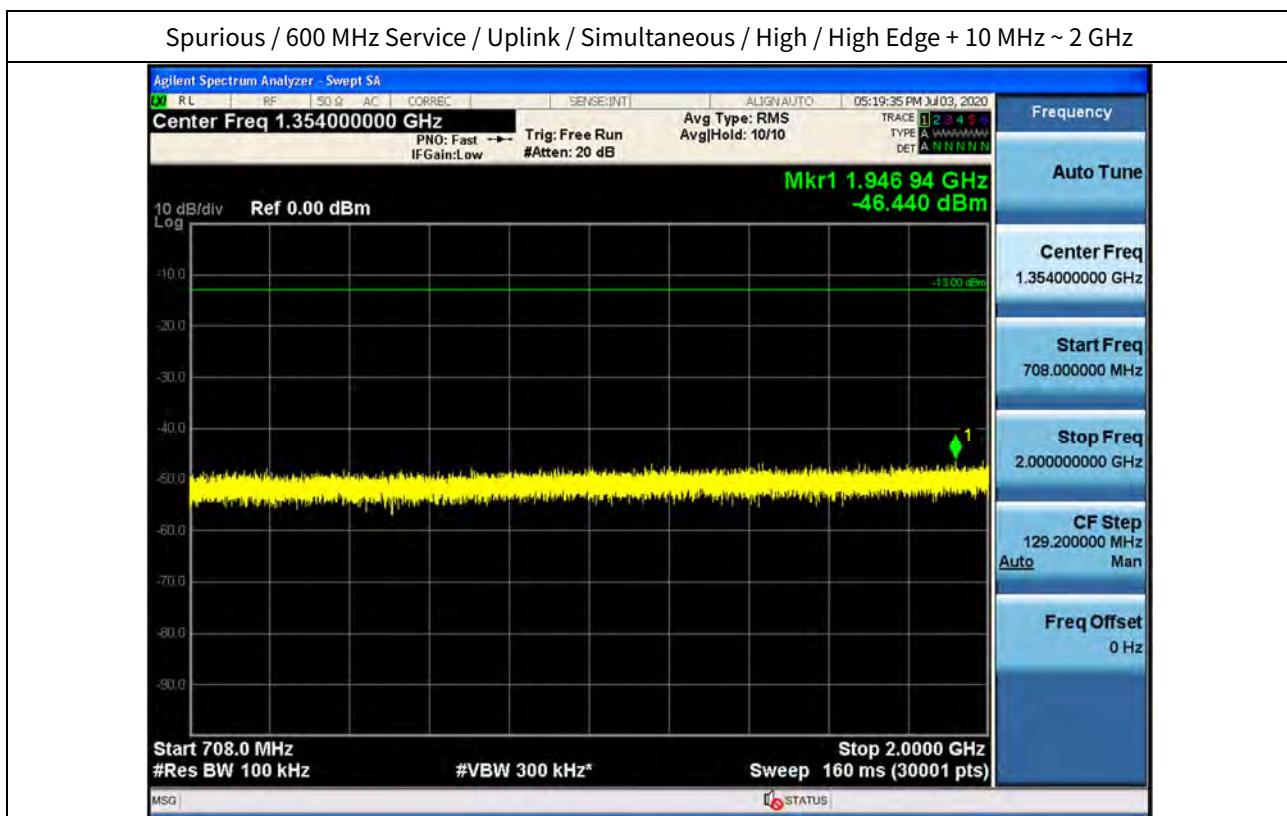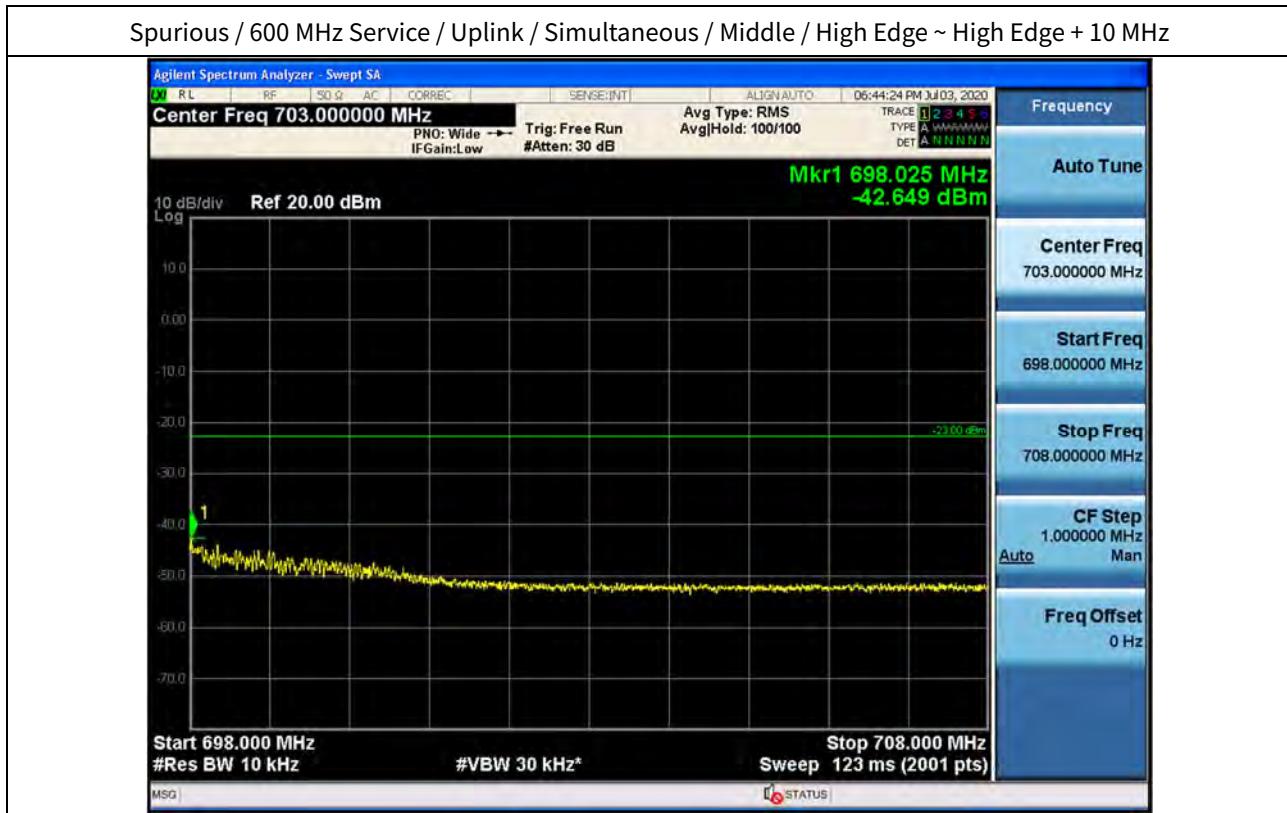


Spurious / 600 MHz Service / Uplink / Simultaneous / Low / 2 GHz ~ 4 GHz

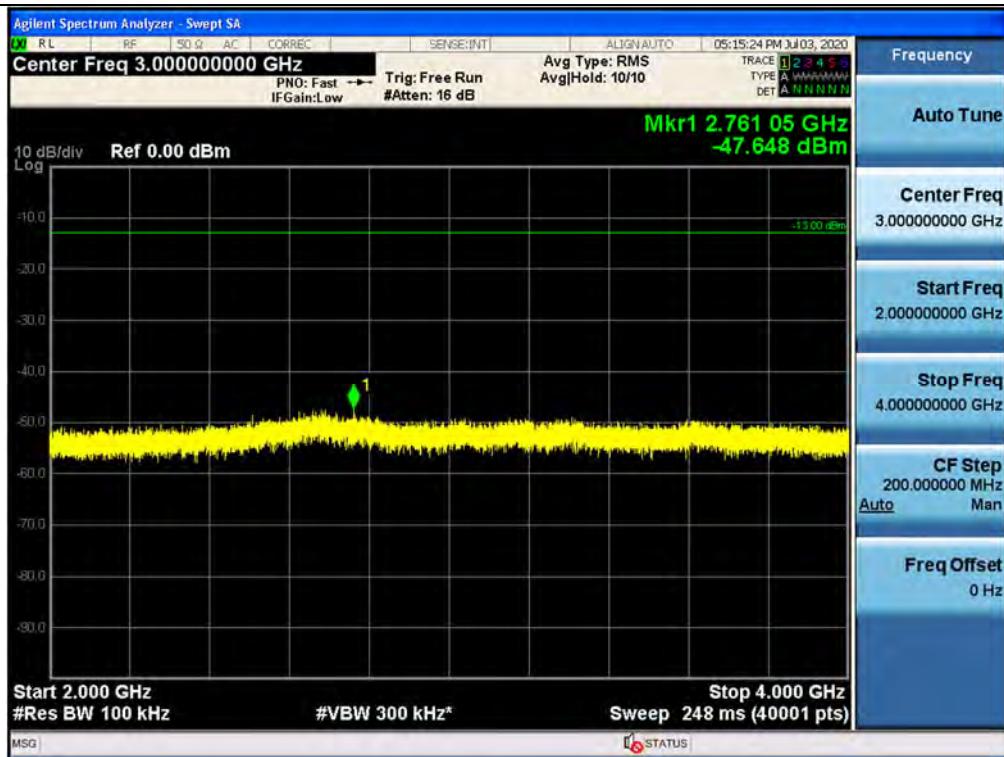

Spurious / 600 MHz Service / Uplink / Simultaneous / Middle / 4 GHz ~ 6 GHz

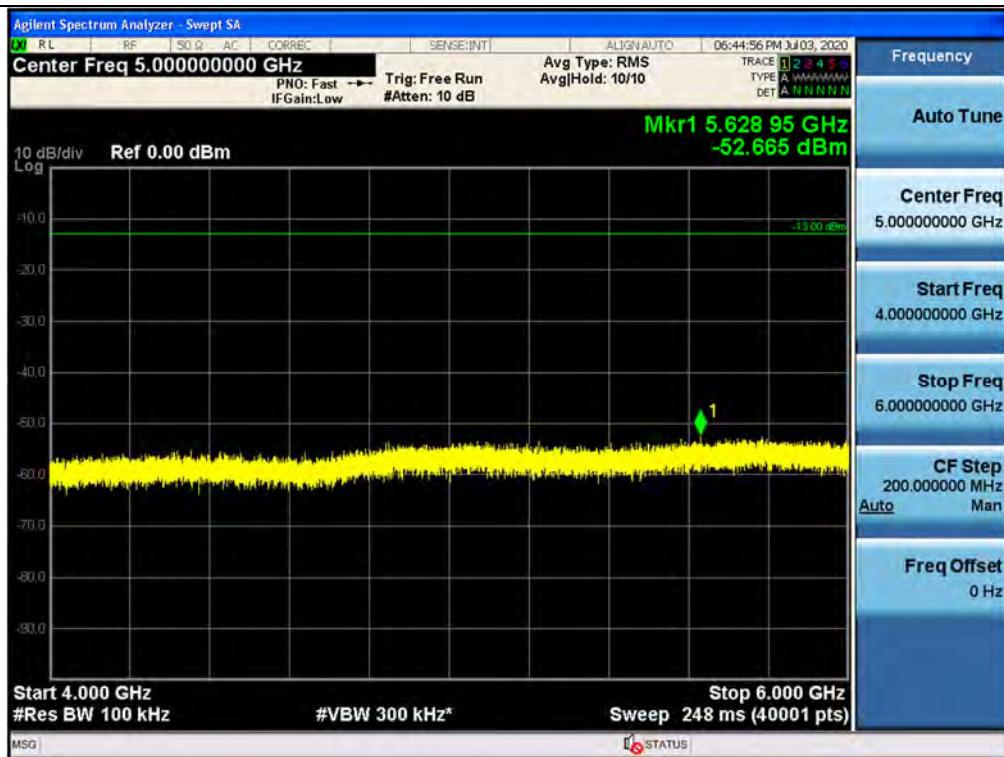


Spurious / 600 MHz Service / Uplink / Simultaneous / Middle / 6 GHz ~ 8 GHz

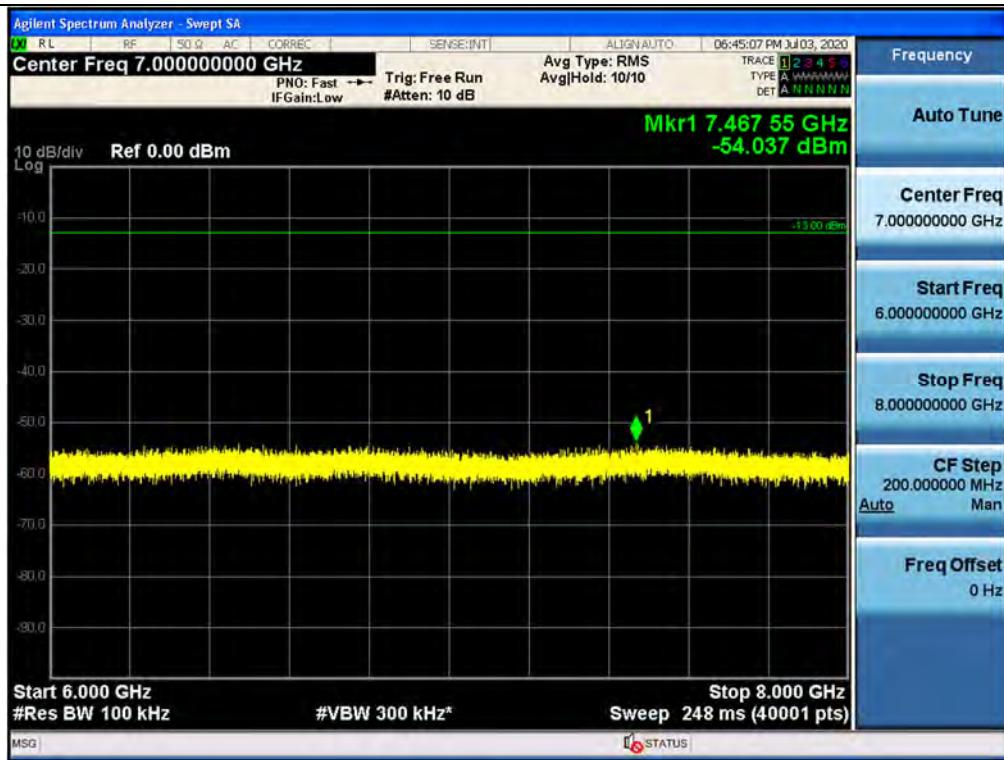


Spurious / 600 MHz Service / Downlink / LTE 20 MHz / High / 9 kHz ~ 150 kHz




Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Low / 150 kHz ~ 30 MHz

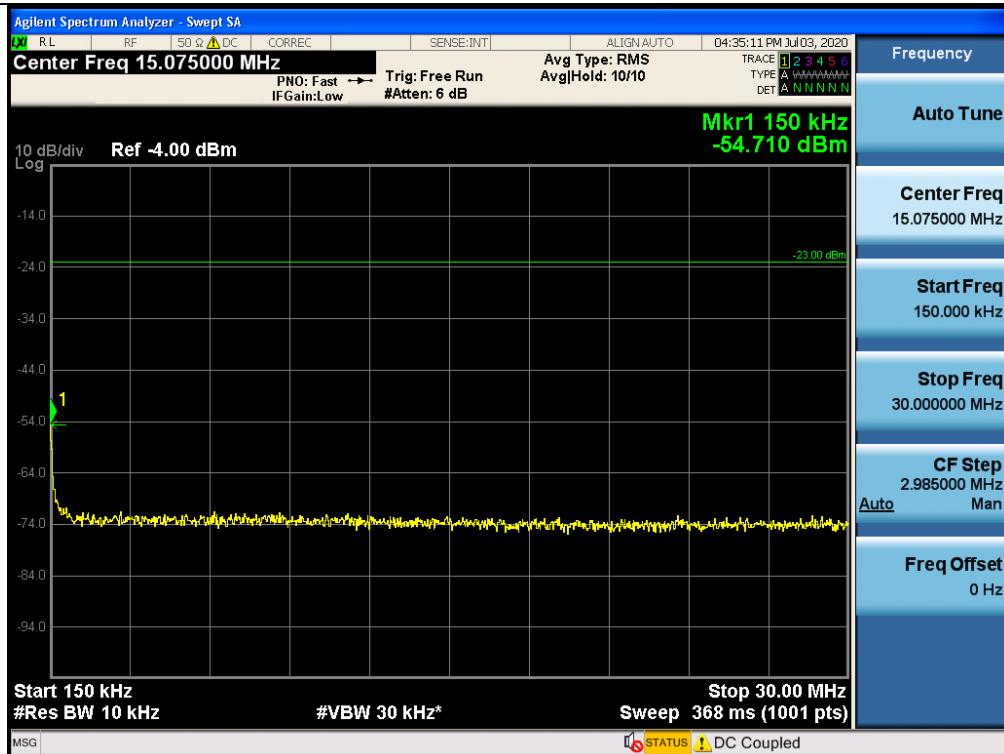

Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Middle / 30 MHz ~ Low Edge - 10 MHz

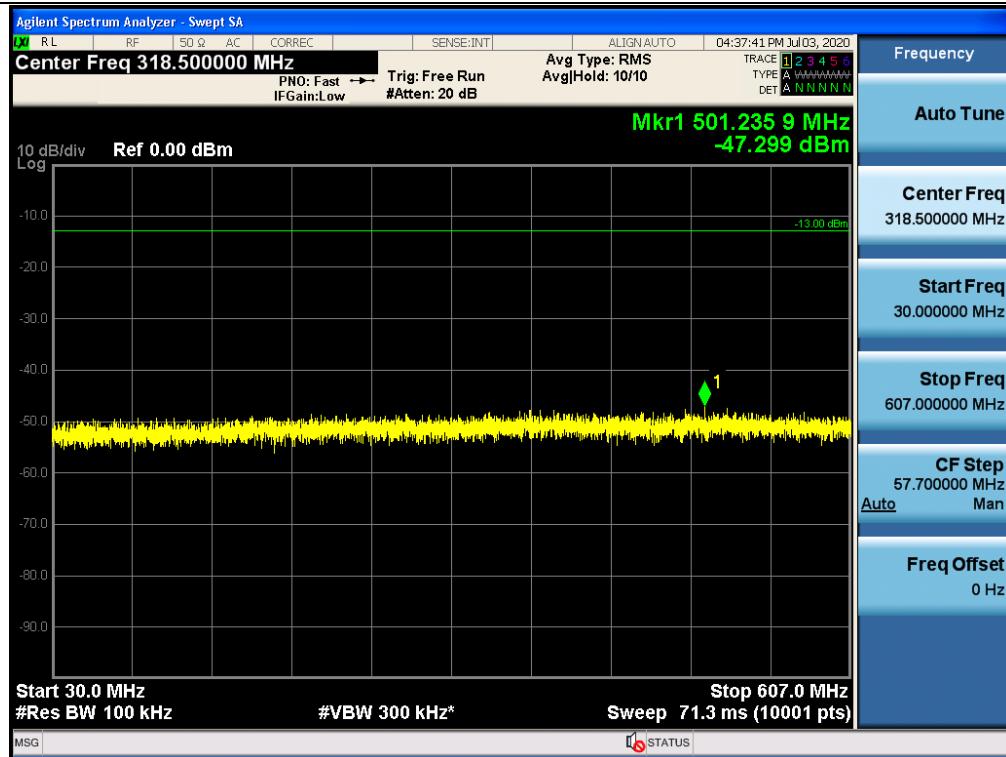


Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Middle / Low Edge - 10 MHz ~ Low Edge

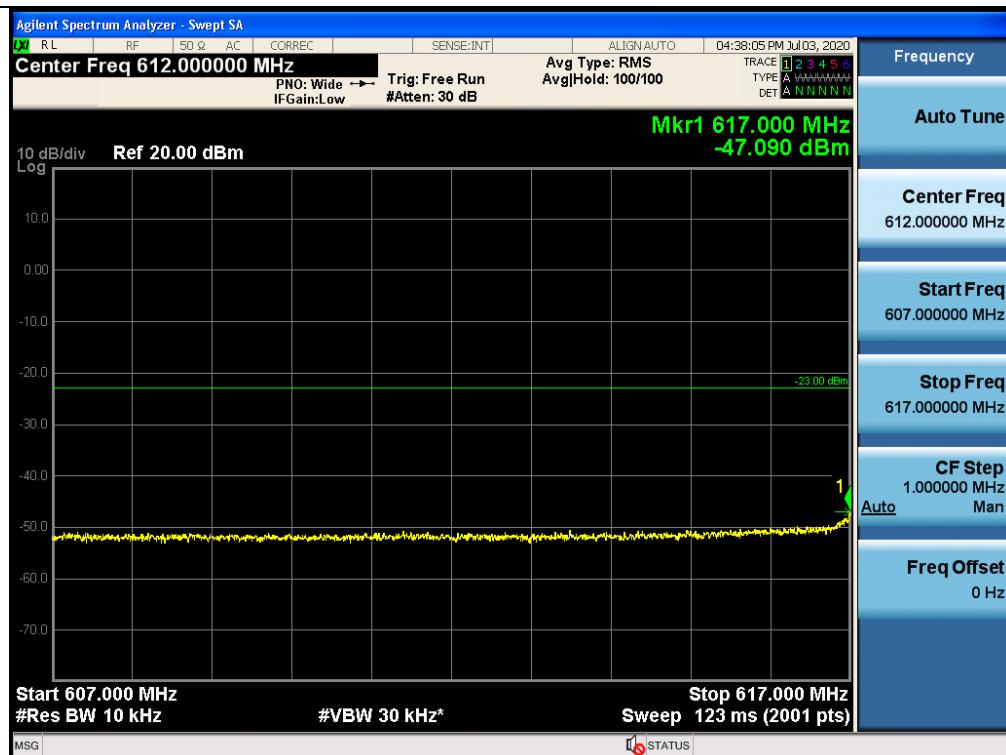


Spurious / 600 MHz Service / Downlink / LTE 20 MHz / High / High Edge ~ High Edge + 10 MHz




Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Middle / High Edge + 10 MHz ~ 2 GHz

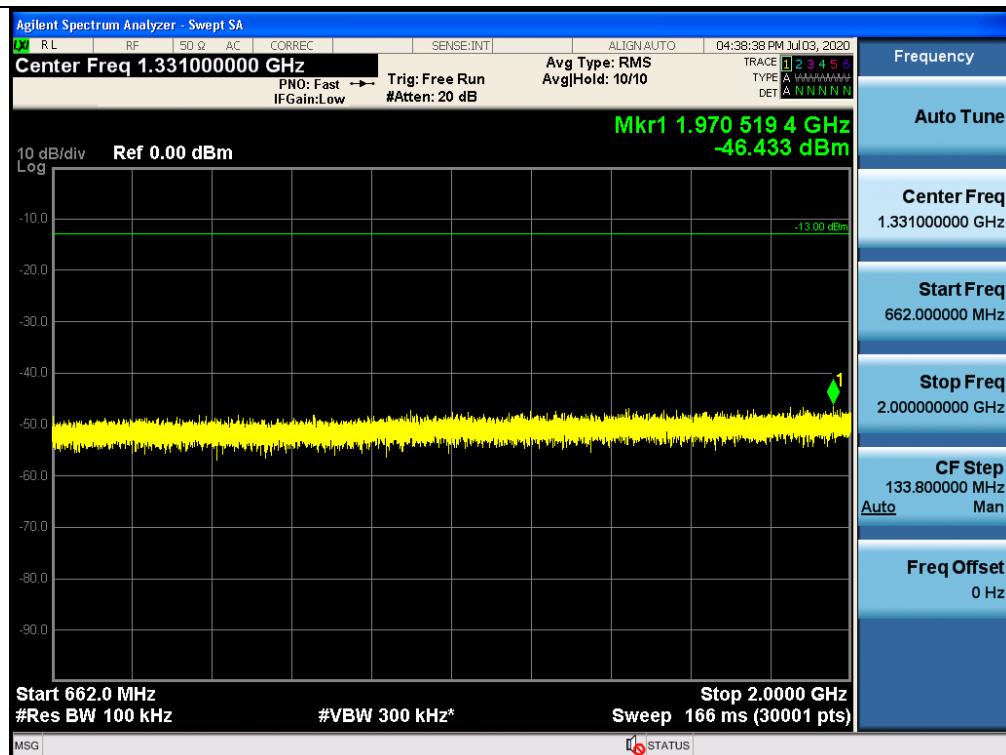


Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Low / 2 GHz ~ 4 GHz

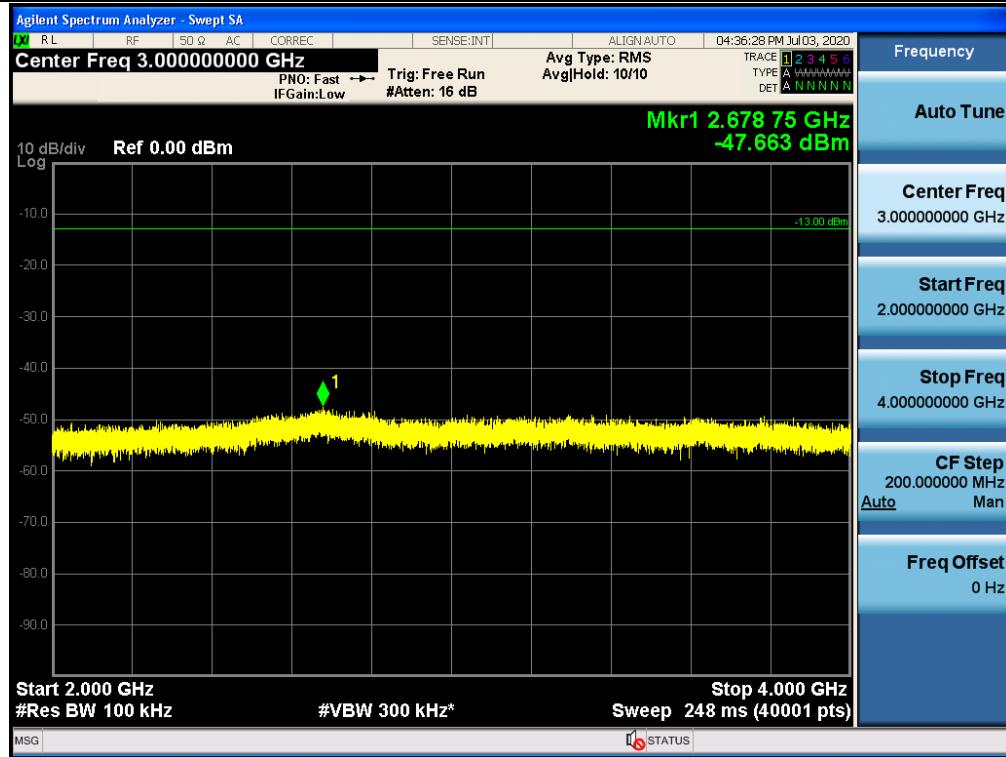


Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Middle / 4 GHz ~ 6 GHz

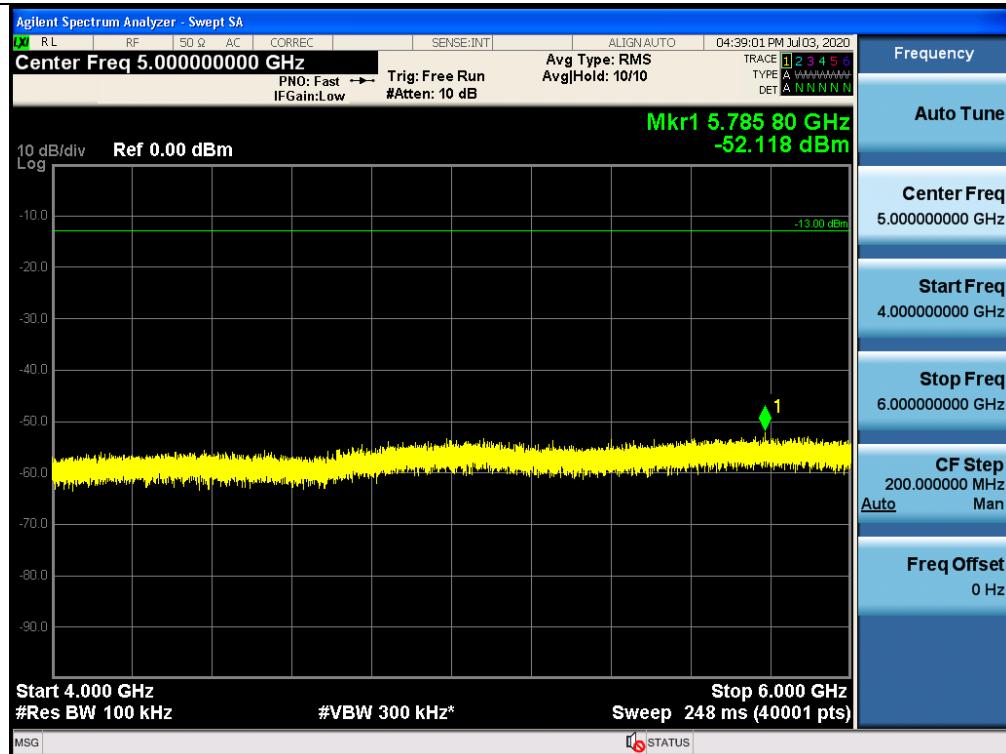

Spurious / 600 MHz Service / Downlink / LTE 20 MHz / Middle / 6 GHz ~ 8 GHz

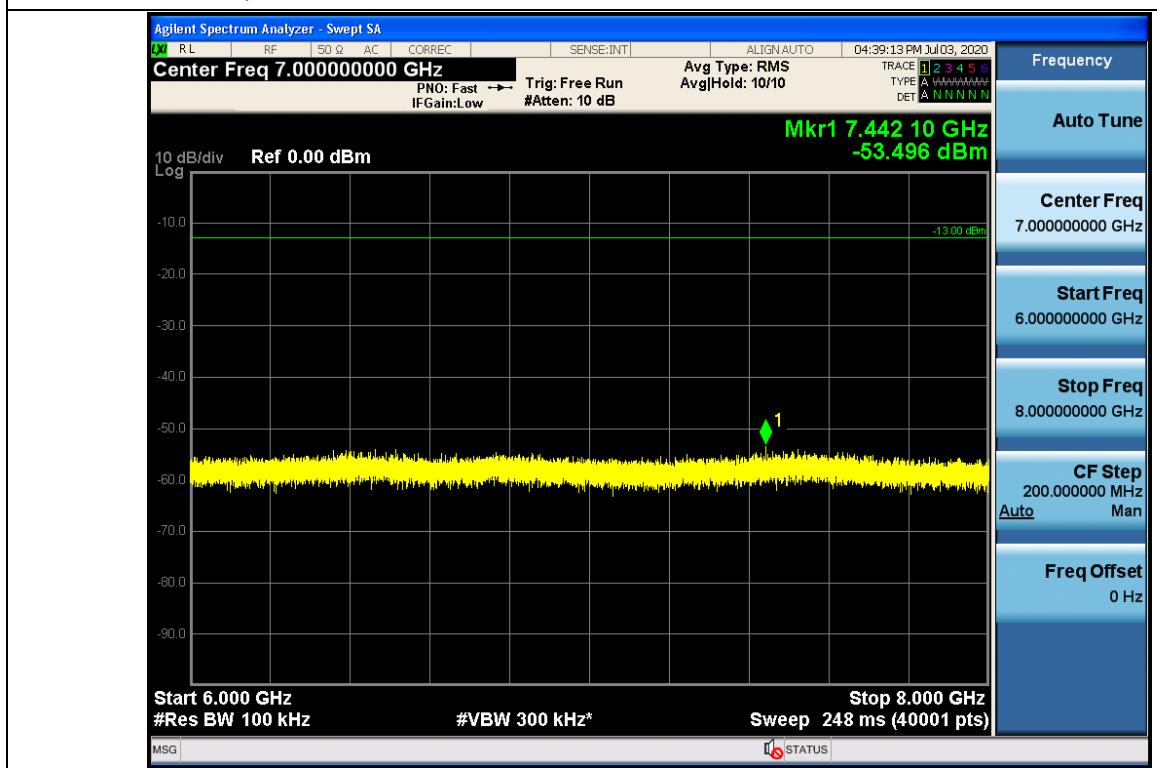


Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / 9 kHz ~ 150 kHz

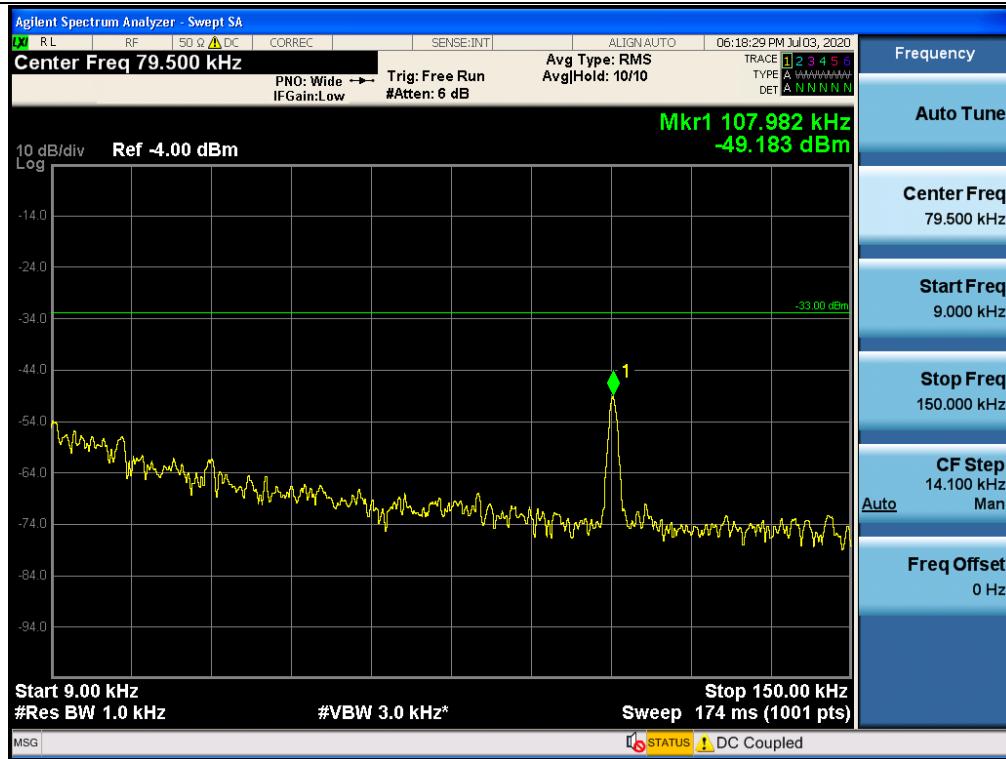

Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / 150 kHz ~ 30 MHz



Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / 30 MHz ~ Low Edge - 10 MHz

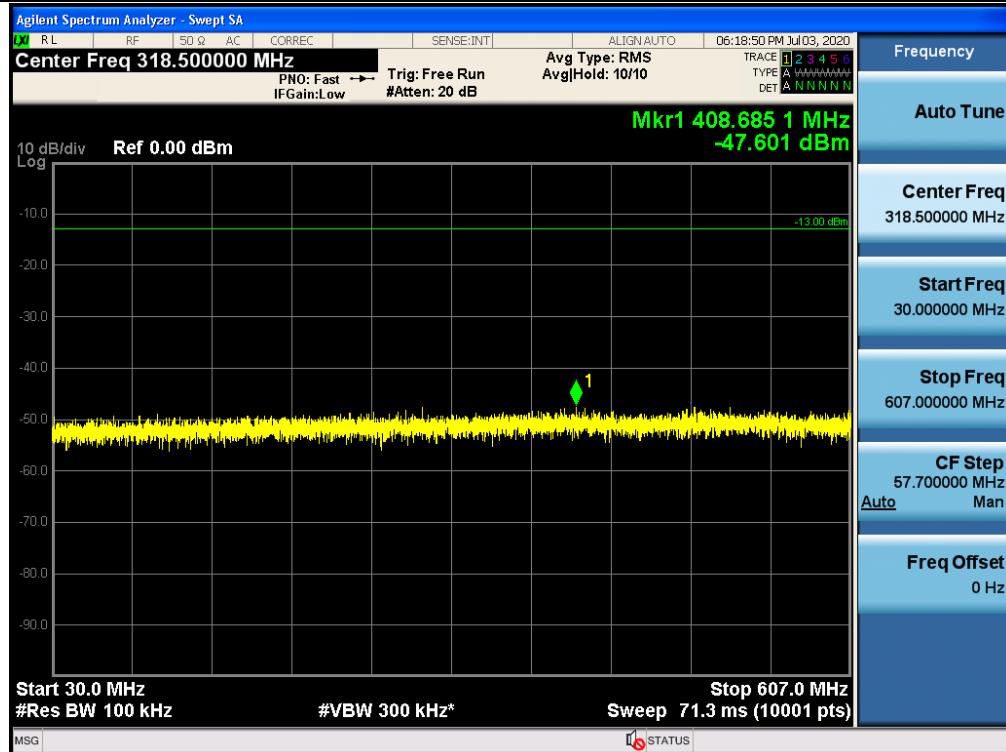


Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / Low / Low Edge - 10 MHz ~ Low Edge




Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / High Edge ~ High Edge + 10 MHz




Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / High Edge + 10 MHz ~ 2 GHz

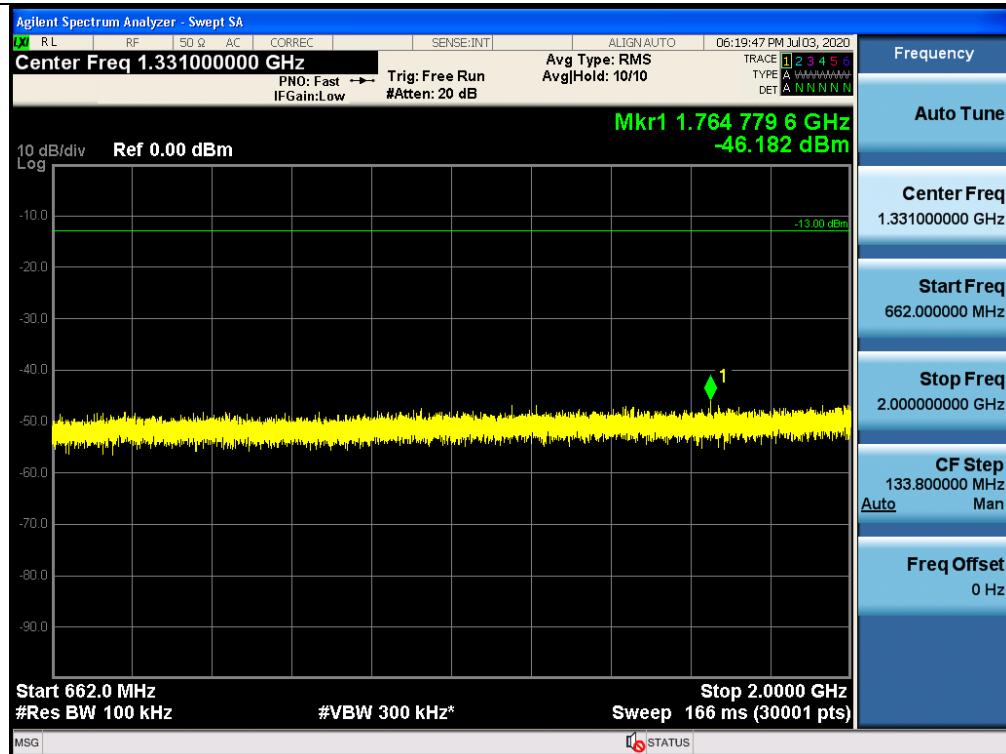


Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / Middle / 2 GHz ~ 4 GHz

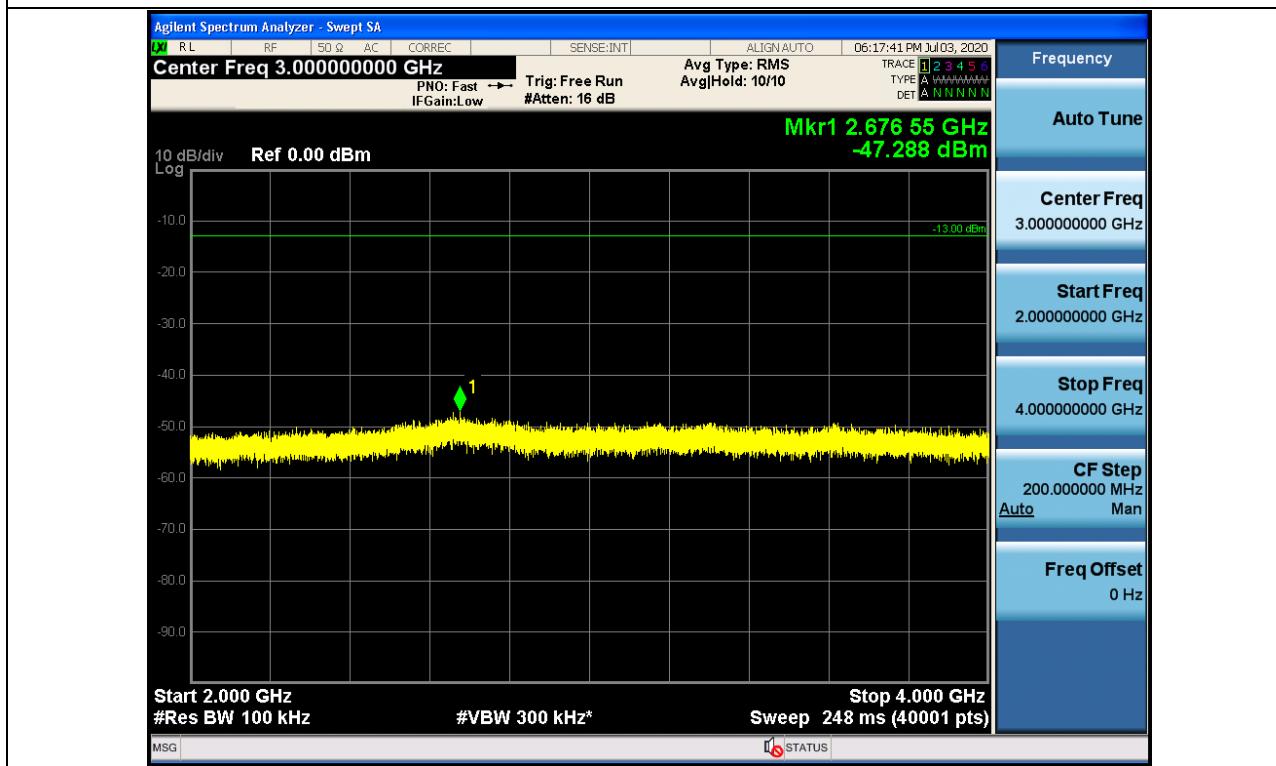


Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / High / 4 GHz ~ 6 GHz

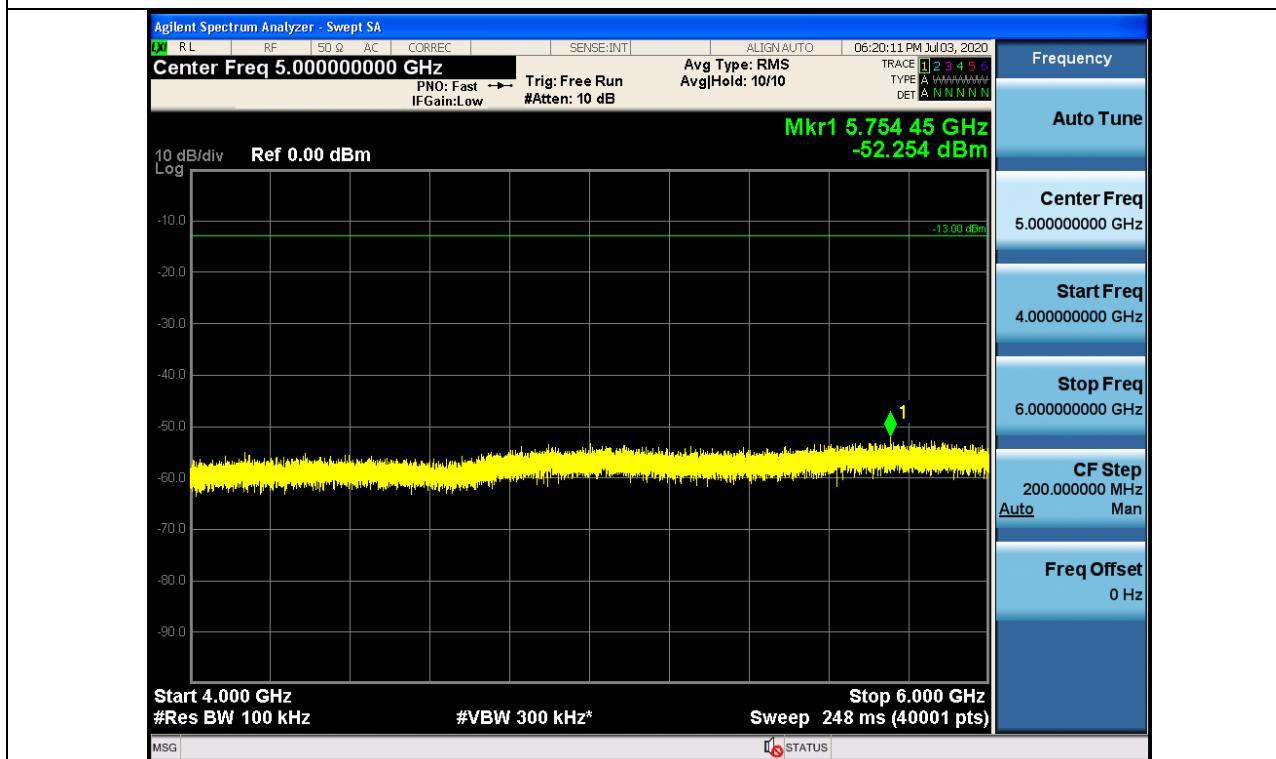


Spurious / 600 MHz Service / Downlink / 5G NR 20 MHz / Low / 6 GHz ~ 8 GHz

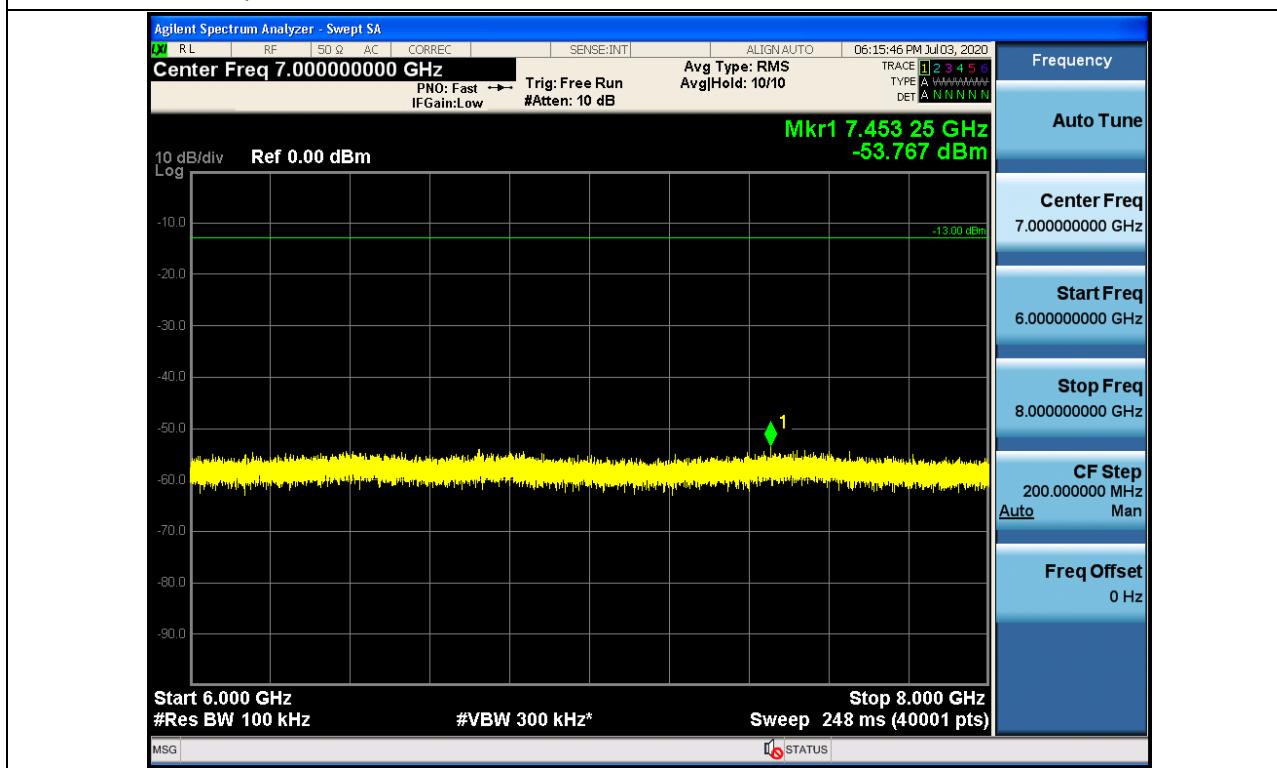


Spurious / 600 MHz Service / Downlink / Simultaneous / Low / 9 kHz ~ 150 kHz

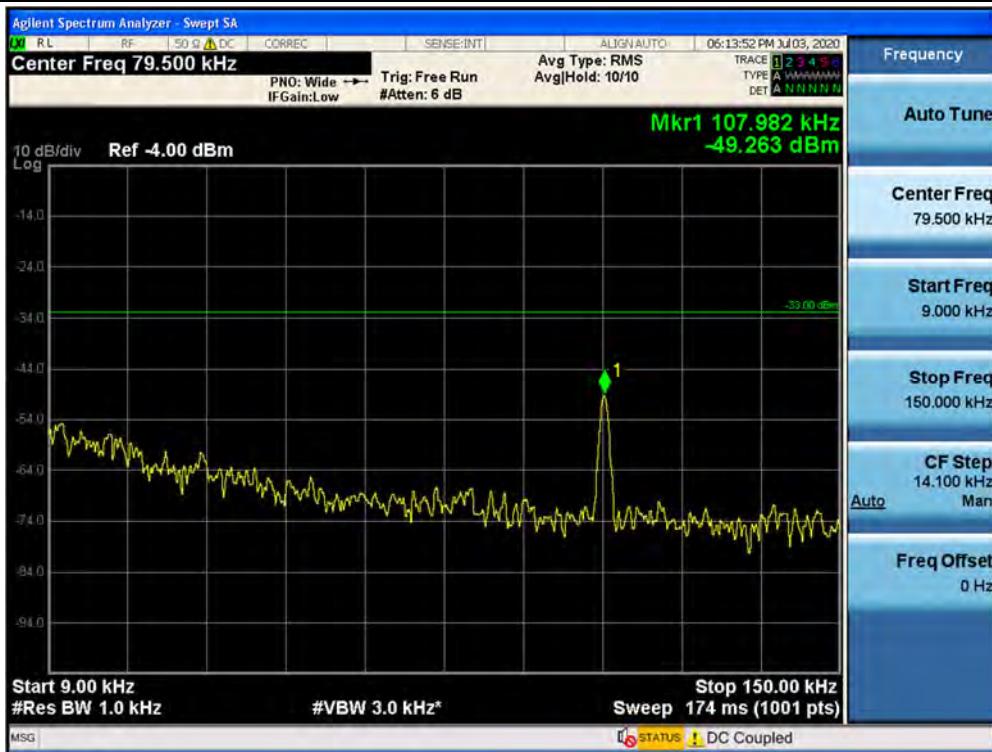

Spurious / 600 MHz Service / Downlink / Simultaneous / Middle / 150 kHz ~ 30 MHz

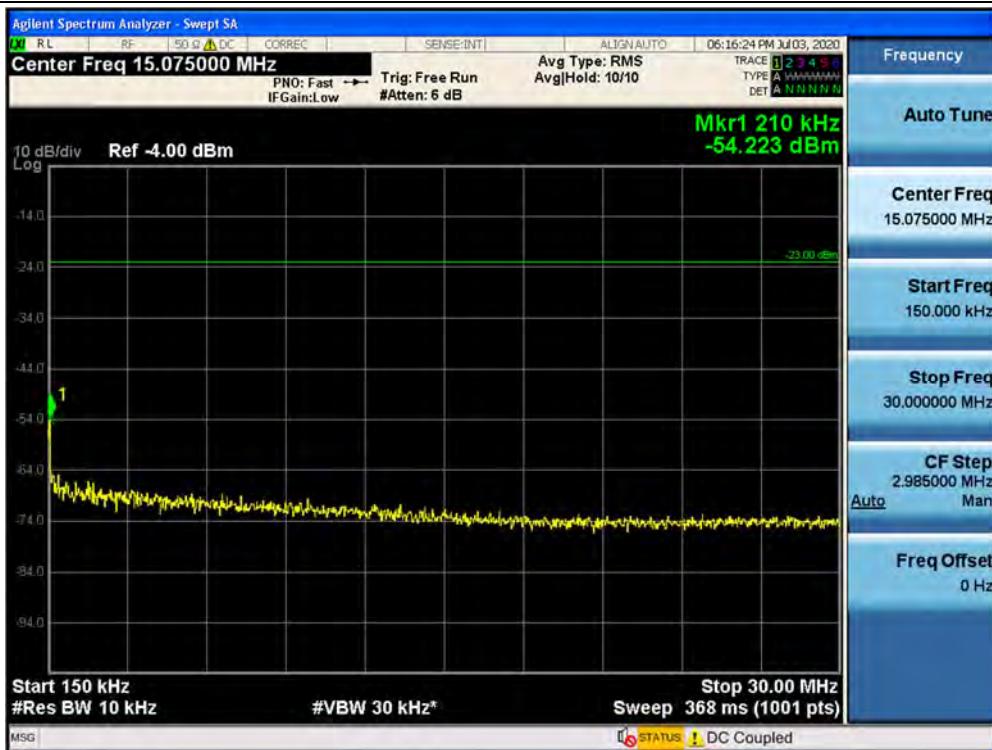

Spurious / 600 MHz Service / Downlink / Simultaneous / High / 30 MHz ~ Low Edge - 10 MHz

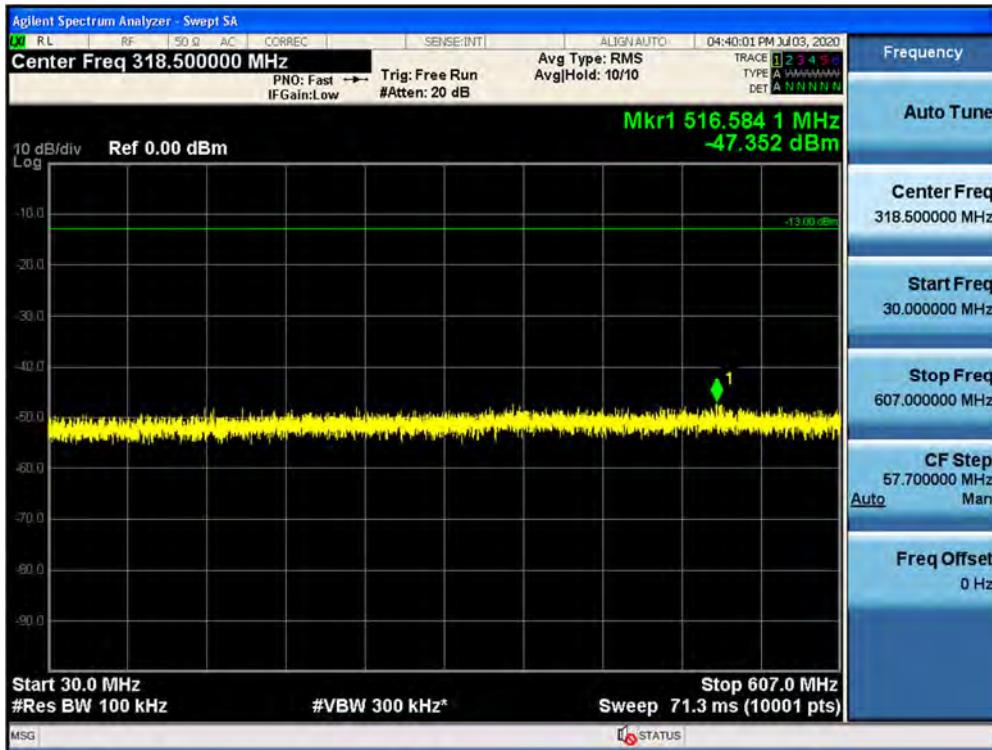


Spurious / 600 MHz Service / Downlink / Simultaneous / Low / Low Edge - 10 MHz ~ Low Edge




Spurious / 600 MHz Service / Downlink / Simultaneous / Middle / High Edge ~ High Edge + 10 MHz




Spurious / 600 MHz Service / Downlink / Simultaneous / Low / High Edge + 10 MHz ~ 2 GHz

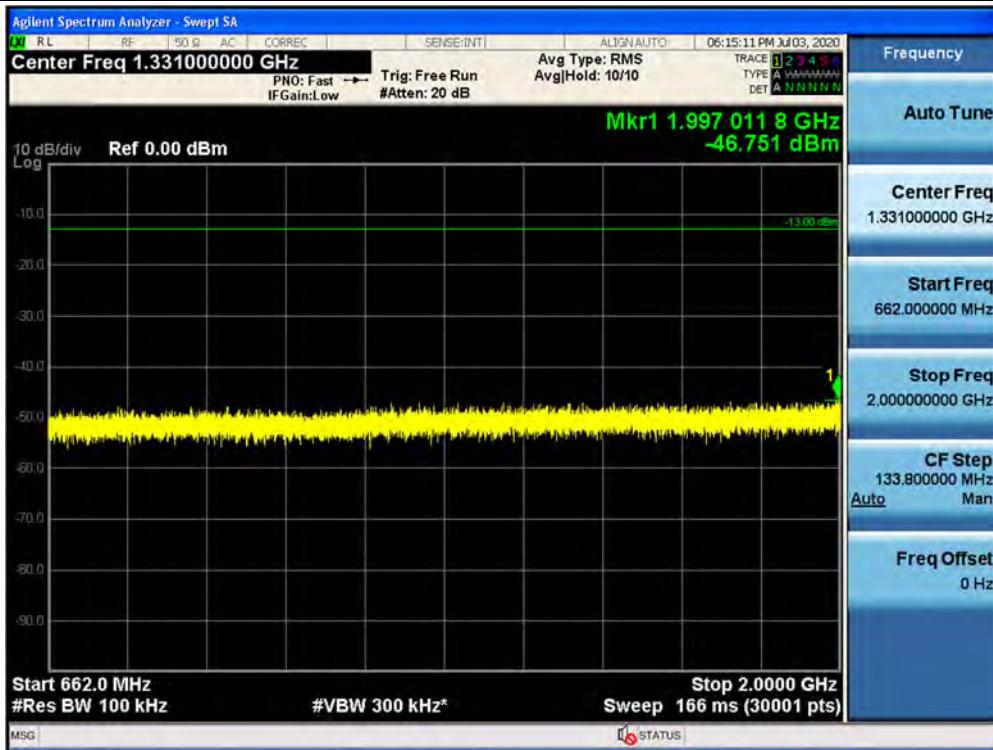


Spurious / 600 MHz Service / Downlink / Simultaneous / Low / 2 GHz ~ 4 GHz

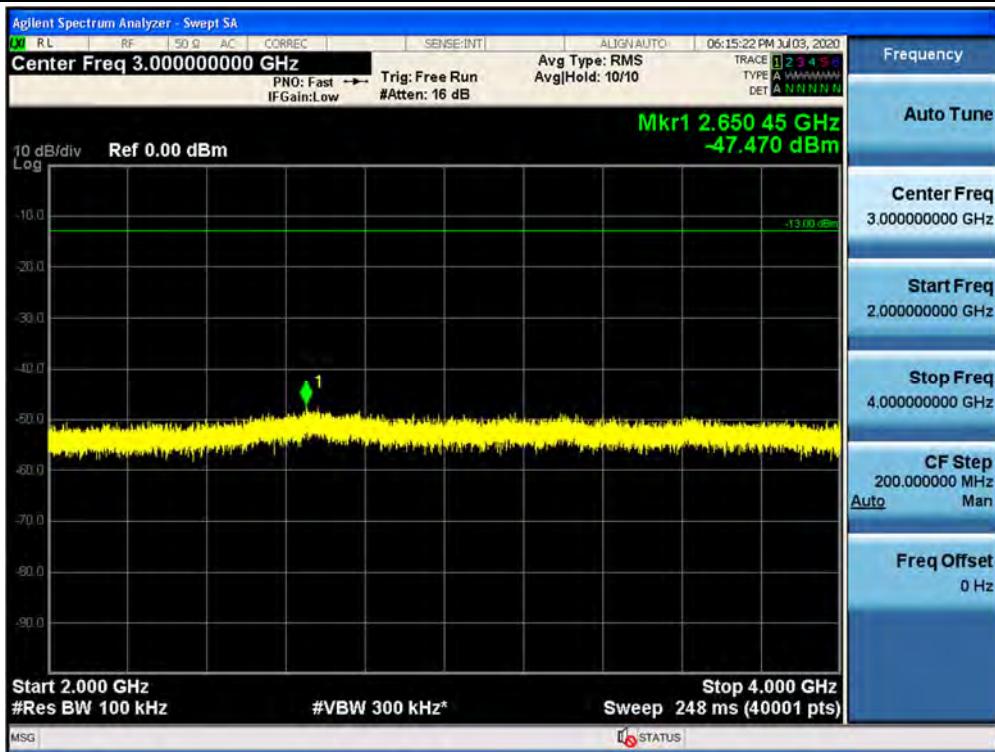

Spurious / 600 MHz Service / Downlink / Simultaneous / Low / 4 GHz ~ 6 GHz

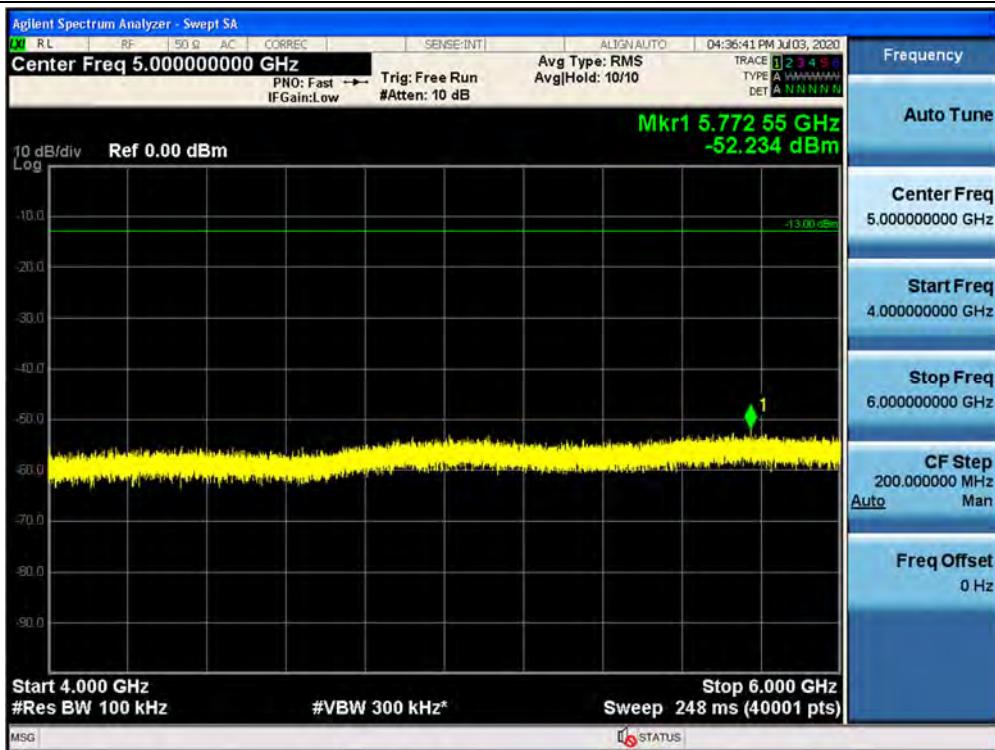

Spurious / 600 MHz Service / Downlink / Simultaneous / High / 6 GHz ~ 8 GHz

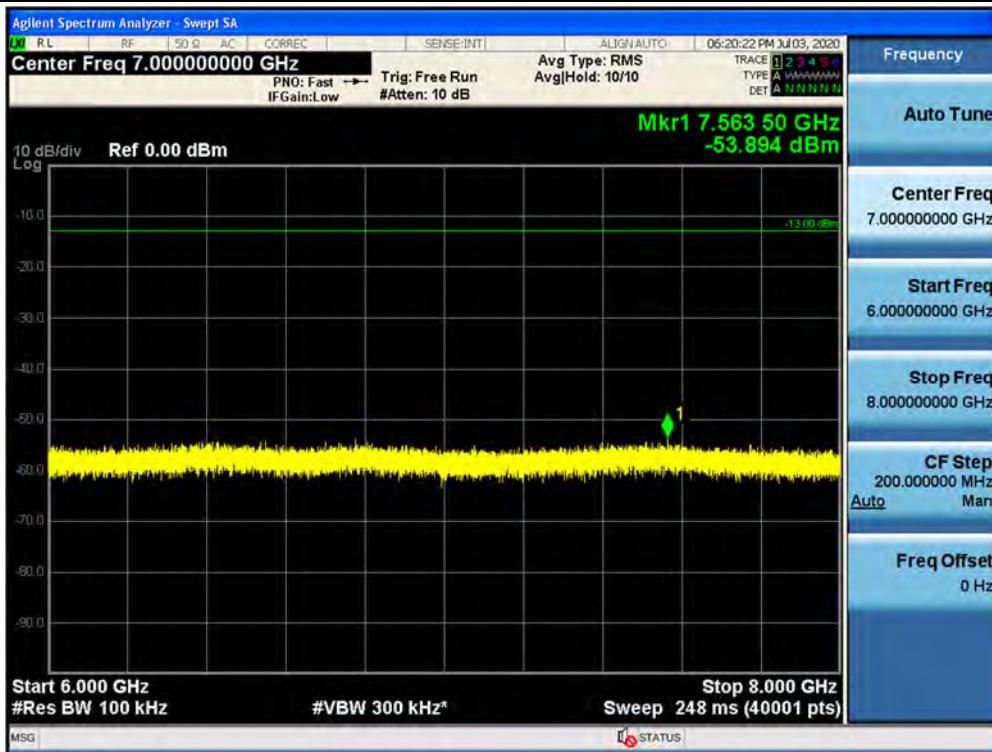

5.6. RADIATED SPURIOUS EMISSIONS

Test Requirements:

§ 2.1053 Measurements required: Field strength of spurious radiation.

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Test Procedures:

Because KDB 935210 D05 procedure does not provide this requirement, measurements were in accordance with the test methods section 5.5 of ANSI C63.26-2015

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

Test Result:**LTE 20 MHz_Uplink**

Frequency (MHz)	Measured Level (dBuV)	Ant. Factor (dB/m)	C.L. (dB)	Amp. Gain (+ 1G H.P.F.) (dB)	Pol.	Measured Power (dBm)	Result (dBm/m)
2,134.39	60.71	27.430	5.85	41.18	V	-34.49	-42.390
2,463.18	59.60	27.400	6.36	40.39	V	-35.60	-42.230
3,465.13	50.42	28.600	7.79	38.22	V	-44.78	-46.610
4,800.60	43.99	31.200	9.44	37.04	V	-51.21	-47.610

* C.L.: Cable Loss / A.G.: Amp. Gain / H.P.F.: High Pass Filter

LTE 20 MHz_Downlink

Frequency (MHz)	Measured Level (dBuV)	Ant. Factor (dB/m)	C.L. (dB)	Amp. Gain (+ 1G H.P.F.) (dB)	Pol.	Measured Power (dBm)	Result (dBm/m)
1,199.94	60.33	25.100	4.25	42.85	H	-34.87	-48.370
2,400.18	57.32	27.400	6.27	40.46	H	-37.88	-44.670
3,600.12	48.11	29.100	7.94	37.96	H	-47.09	-48.010
4,800.36	45.52	31.200	9.44	37.04	H	-49.68	-46.080

* C.L.: Cable Loss / A.G.: Amp. Gain / H.P.F.: High Pass Filter

5G NR 20 MHz_Uplink

Frequency (MHz)	Measured Level (dBuV)	Ant. Factor (dB/m)	C.L. (dB)	Amp. Gain (+ 1G H.P.F.) (dB)	Pol.	Measured Power (dBm)	Result (dBm/m)
1,199.94	59.80	25.100	4.25	42.85	H	-35.40	-48.900
1,644.22	61.19	25.010	5.04	42.01	H	-34.01	-45.970
2,400.18	56.89	27.400	6.27	40.46	H	-38.31	-45.100
3,600.42	49.15	29.100	7.94	37.96	H	-46.05	-46.970

* C.L.: Cable Loss / A.G.: Amp. Gain / H.P.F.: High Pass Filter

5G NR 20 MHz_Downlink

Frequency (MHz)	Measured Level (dBuV)	Ant. Factor (dB/m)	C.L. (dB)	Amp. Gain (+ 1G H.P.F.) (dB)	Pol.	Measured Power (dBm)	Result (dBm/m)
1,199.94	60.10	25.100	4.25	42.85	H	-35.10	-48.600
2,400.18	56.69	27.400	6.27	40.46	H	-38.51	-45.300
3,600.12	48.63	29.100	7.94	37.96	H	-46.57	-47.490
4,800.36	45.52	31.200	9.44	37.04	H	-49.68	-46.080



* C.L.: Cable Loss / A.G.: Amp. Gain / H.P.F.: High Pass Filter

Note1. We have done horizontal and vertical polarization in detecting antenna.

Note2. The amplitude of the spurious domain emission attenuated by more than 20 dB over the permissible value was not recorded according to ANSI C63.26, clause 5.1.1., c).

Note3. Test data were only the worst case.

Plot data of radiated spurious emissions

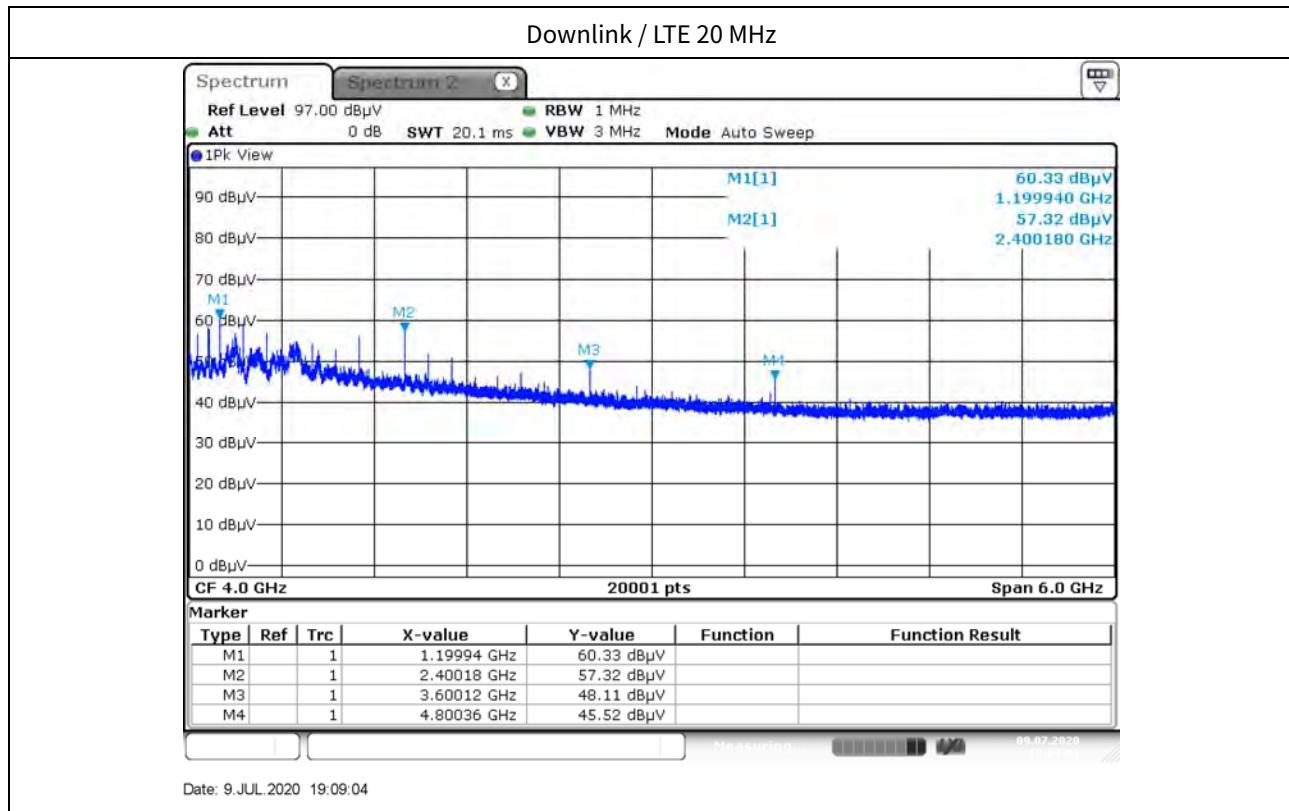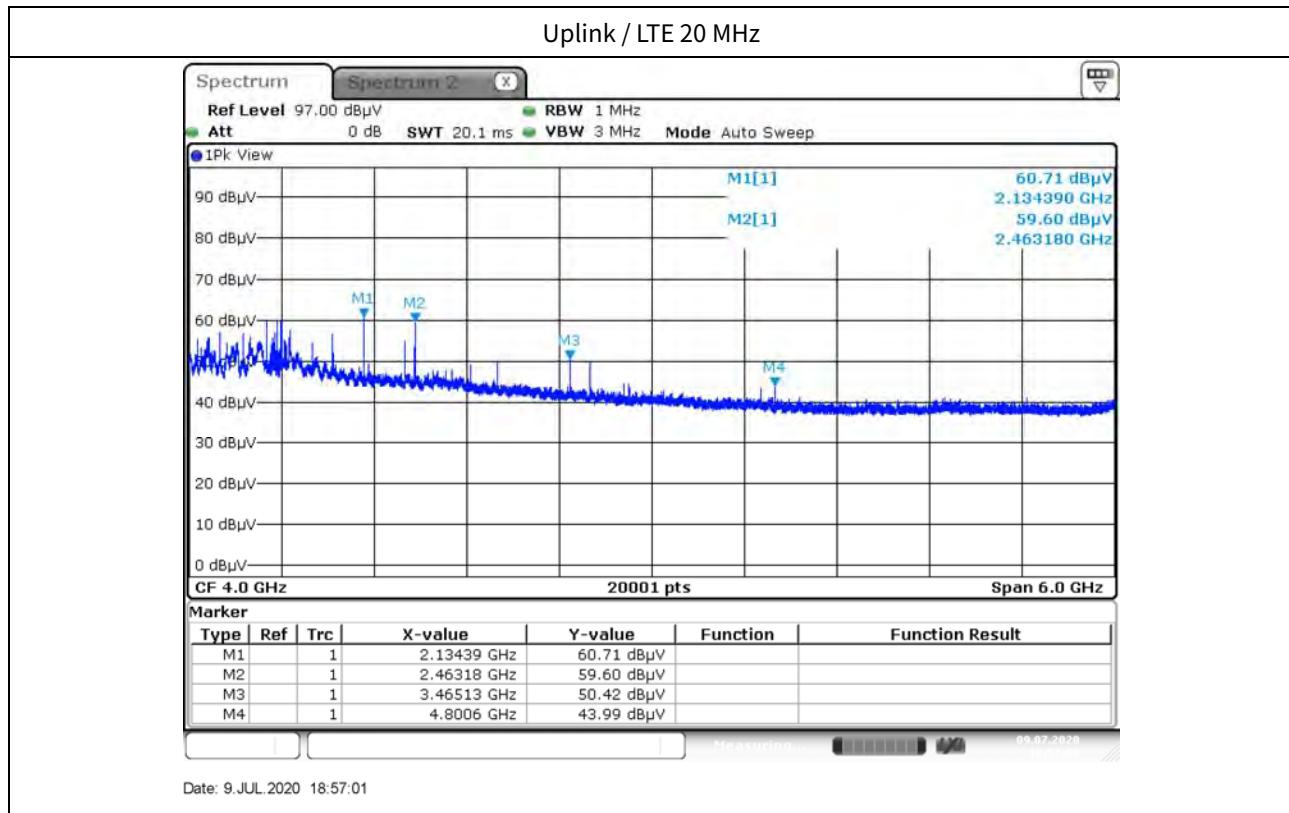

Note : Only the worst case plots for Radiated Spurious Emissions.

6. Annex A_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2007-FC019-P