

## TABLE OF CONTENTS LIST

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01

### TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE  
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED  
PAGE 3.....RF POWER OUTPUT AND MODULATION CHARACTERISTICS  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 6.....FIELD STRENGTH OF SPURIOUS EMISSIONS  
PAGE 7.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 8.....FREQUENCY STABILITY  
PAGE 9-10....TRANSIENT FREQUENCY STABILITY  
PAGE 11..... CERTIFICATION OF TECHNICAL DATA AND  
LIST OF TEST EQUIPMENT

### EXHIBIT CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER  
EXHIBIT 2.....STATEMENT REGARDING CHANNEL PROGRAMMING  
EXHIBIT 3.....FCC ID LABEL SAMPLE  
EXHIBIT 4.....SKETCH OF FCC ID LABEL LOCATION  
EXHIBIT 5A.....EXTERNAL FRONT VIEW PHOTOGRAPH  
EXHIBIT 5B.....EXTERNAL SIDE VIEW PHOTOGRAPH  
EXHIBIT 5C.....EXTERNAL REAR VIEW PHOTOGRAPH  
EXHIBIT 5D.....EXTERNAL TOP VIEW PHOTOGRAPH  
EXHIBIT 5E-5G.....INTERNAL COMPONENT SIDE PHOTOGRAPHS  
EXHIBIT 5H-5J.....INTERNAL SOLDER SIDE PHOTOGRAPHS  
EXHIBIT 6.....BLOCK DIAGRAM  
EXHIBIT 7A.....CONTROL CIRCUIT SCHEMATIC  
EXHIBIT 7B.....RF CIRCUIT SCHEMATIC  
EXHIBIT 8A-8K.....PARTS LIST  
EXHIBIT 9A-9B.....CRYSTAL SPECIFICATION  
EXHIBIT 10A-100...USER'S MANUAL  
EXHIBIT 11A-11C...CIRCUIT DESCRIPTION INCLUDING TUNING PROCEDURE  
EXHIBIT 12.....AUDIO FREQUENCY RESPONSE GRAPH  
EXHIBIT 13A.....MODULATION LIMITING - 300 Hz  
EXHIBIT 13B.....MODULATION LIMITING - 1000 Hz  
EXHIBIT 13C.....MODULATION LIMITING - 3000 Hz  
EXHIBIT 14.....AUDIO LOW PASS FILTER GRAPH  
EXHIBIT 15.....OCCUPIED BANDWIDTH CW PLOT - HIGH POWER  
EXHIBIT 16.....OCCUPIED BANDWIDTH PLOT - 2500 Hz TONE 12.5 KHZ  
EXHIBIT 17A-17D...TRANSIENT FREQUENCY RESPONSE PLOTS

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED  
FOR TYPE ACCEPTANCE

2.983 (a,b,c) AEROTRON-REPCO SYSTEMS, INC. will sell the MODEL NO. N6RVHFHH-01 VHF transmitter in quantity, for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL DESCRIPTION

(1) Type of Emission: 10K0F3E For 25KHz  
10K0F3E For 12.5KHz

For 25KHz

Bn = 2M + 2DK

M = 3000

D = 1.8KHz (Peak Deviation)

K = 1

Bn = 2(3.0K) + 2(1.8K)(1) = 6.0K + 3.6K = 9.6K

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

Bn = 2M + 2DK

M = 3000

D = 1.8KHz (Peak Deviation)

K = 1

Bn = 2(3.0K) + 2(1.8K)(1) = 6.0K + 3.6K = 9.6K

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 148-174 MHz

(3) Power Range and Controls: There are NO user Power controls.

(4) Maximum Output Power Rating:

5.0 & 2.0 Watts,  
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

POWER INPUT

FINAL AMPLIFIER ONLY

Vce = 7.5 Volts

Ice = 2.00A.

Pin = 15.0 Watts

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE #: 1

(6) Function of each electron tube or semiconductor device or other active circuit device: - SEE EXHIBIT 8

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 7A-7B. The block diagram is included as EXHIBIT 6.

(8) Instruction book. The instruction manual is included as EXHIBIT #10A-100.

(9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #11A-11C.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.

2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.

In addition to the interstage filtering the multi-section low pass filter made up of C1004, L1001, C1005, L1002, C1010, C1014 & C1015.

Limiting Modulation:

The transmitter audio limiting circuitry is contained in the loop filter IC01.

Limiting Power: There is no provision for limiting power.

(12) Digital modulation. This unit does NOT use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT


PAGE #: 2

2.985(a) RF power output.

RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.5 VDC, and the transmitter properly adjusted the RF output measures:

POWER HIGH
INPUT POWER: (7.5V)(1.8A) = 13.5 Watts
OUTPUT POWER: 4.8 Watts      Efficiency: 35%
POWER LOW
INPUT POWER: (7.5V)(0.9A) = 6.75 Watts
OUTPUT POWER: 2.0 Watts      Efficiency: 29.6%

#### METHOD OF MEASURING RF POWER OUTPUT

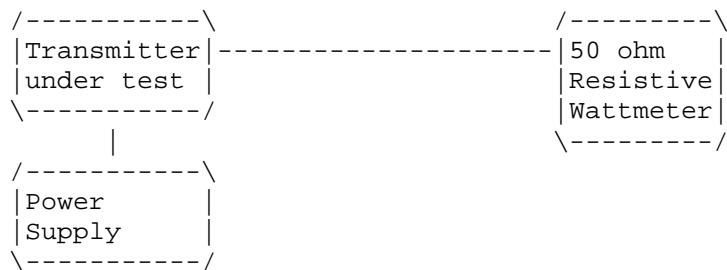

2.987(a) VOICE MODULATION CHARACTERISTICS:

(a) AUDIO FREQUENCY RESPONSE See the EXHIBIT #12.

2.987(a) AUDIO LOW PASS FILTER  
The audio low pass filter is included and the plot is shown as EXHIBIT #14. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.

2.987(b) AUDIO INPUT VERSUS MODULATION A plot of the audio input versus deviation is shown in EXHIBIT #13A-13C.

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE #: 3

2.989(c)

OCCUPIED BANDWIDTH:

90.210(b,)

Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + \log(P)$  dB.

90.210( d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;

(1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625kHz removed from  $f_0$ : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency( $f_d - 2.88$ kHz)dB.


(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency( $f_d$  in kHz  $\log(P)$  or 70dB, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

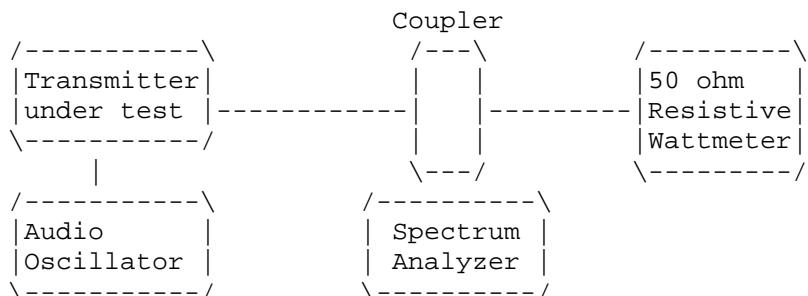

2.991

Spurious emissions at antenna terminals(conducted):  
Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999


REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE #: 4

2.991 Continued Spurious Emissions at the Antenna Terminals:

90.210(d)(3)

Method of Measuring Conducted Spurious Emissions

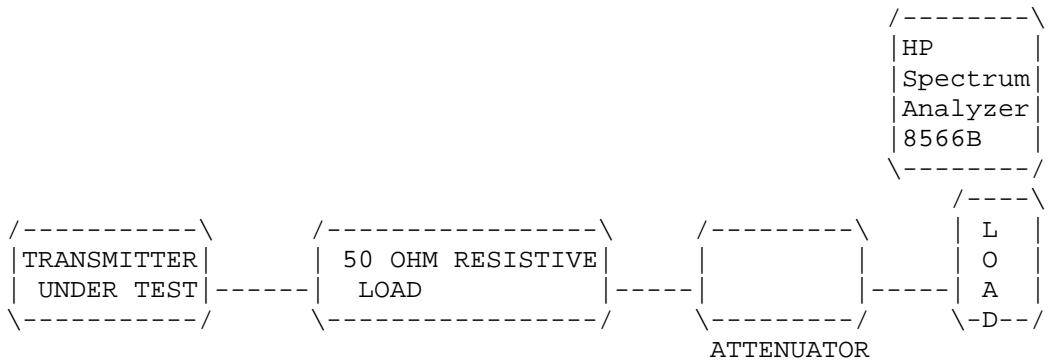

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

For 25KHz  $43 + 10\log(5.1) = 43 + 7.0 = 50.1$  dB

For 12.5KHz  $50 + 10\log(5.0) = 50 + 7.0 = 57.0$

	EMISSION FREQUENCY MHZ	dB BELOW <u>CARRIER</u>
HIGH POWER	174.00	00.0
	348.00	-70.6
	521.98	-64.1
	695.96	-71.7
	869.95	-70.8
	1043.95	-84.5
LOW POWER	174.00	00.0
	348.00	-69.0
	521.98	-61.1
	695.96	-68.2
	869.95	-72.1

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY ROAD, NEWBERRY FLORIDA 32669.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE #: 5

2.993(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be  $50 + 10\log(P_0)$  dB below the mean power output of the transmitter or 70dB, which ever is the lessor.

$$50 + 10\log(50) = 67.0 \text{ dB}$$

EMISSION FREQUENCY MHz	METER READING @ 3 METERS dBuV	METER READING		FIELD			
		COAX LOSS dB	A.C.F. dB	STRENGTH dBuV/m	ATT. dB	MARGIN dB	ANT. POL.
<b>HIGH POWER</b>							
162.00	106.80	0.90	17.00	124.70	0.00	0.00	V
324.00	39.60	1.40	14.84	55.84	68.86	68.86	V
484.00	18.40	1.60	18.93	38.93	85.77	85.77	V
484.00	25.00	1.60	18.93	45.53	79.17	79.17	H
646.00	39.70	1.60	21.11	62.41	62.29	62.29	V
808.00	32.50	2.90	22.42	57.82	66.88	66.88	V
970.00	35.70	2.90	25.10	63.70	61.00	61.00	H
1132.00	35.60	1.00	24.53	61.13	63.57	63.57	V
1294.00	24.80	1.00	25.18	50.98	73.72	73.72	H
1456.00	37.20	1.00	25.82	64.02	60.68	60.68	V
1620.00	31.30	1.00	26.48	58.78	65.92	65.92	V
<b>LOW POWER</b>							
165.02	105.60	0.90	17.60	124.10	0.00	0.00	V
330.04	34.90	1.40	14.97	51.27	72.83	26.82	V
495.06	16.40	1.60	19.19	37.19	86.92	40.91	H
660.08	28.70	2.00	21.42	52.12	71.98	25.97	H
825.10	24.50	2.90	23.30	50.70	73.40	27.39	H
990.12	20.00	2.90	25.12	48.02	76.09	30.08	H
1155.14	13.00	1.00	24.62	38.62	85.48	39.47	V
1320.16	21.20	1.00	25.28	47.48	76.62	30.61	H
1485.18	26.30	1.00	25.94	53.24	70.86	24.85	V
1650.20	10.20	1.00	26.60	37.80	86.30	40.29	H

METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT


PAGE #: 6

2.993(a)(b)

2.993(a)(b) Continued Field strength of spurious emissions:

Method of Measuring Radiated Spurious Emissions

Hewlett Packard  
Spectrum  
Analyzer  
HP8555A

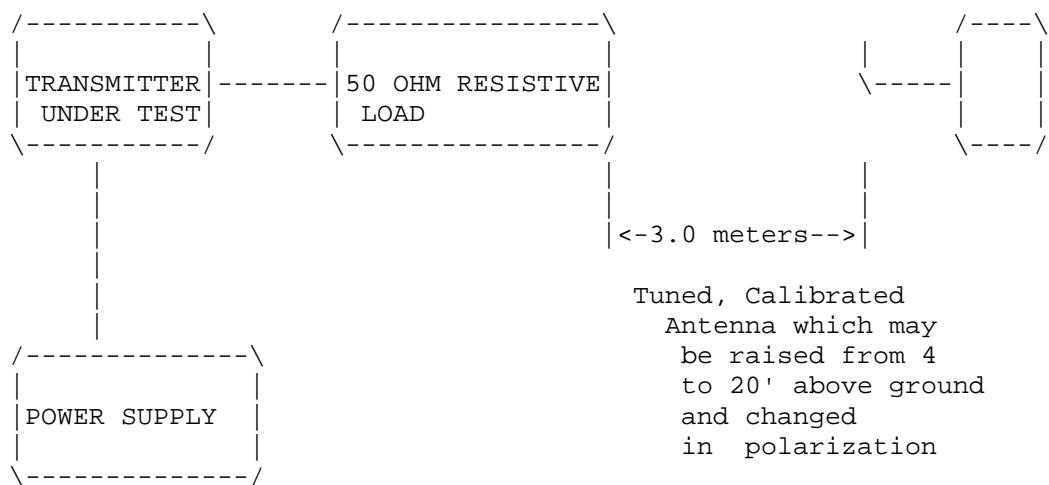

Equipment placed 4' above ground  
on a rotatable platform.

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.  
FCC ID: N6RVHFHH-01  
DATE: SEPTEMBER 17, 1999  
REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT  
PAGE #: 7

2.995(a)(b)(d) Frequency stability:  
90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit, for 25KHz spacing & 0.0005% for 12.5KHz spacing and 0.0001% for 6.25KHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at minus 25% of the battery voltage of 5.4VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 155.024 900MHz

TEMPERATURE C	FREQUENCY MHz	PPM
REFERENCE_____	155.024 900	00.0
-30_____	155.025 670	+4.96
-20_____	155.025 550	+4.19
-10_____	155.025 520	4.00
0_____	155.025 920	4.64
+10_____	155.025 620	4.65
+20_____	155.025 200	1.94
+30_____	155.025 110	1.36
+40_____	155.024 451	-2.89
+50_____	155.024 440	-2.96
20oC Battery End-Point 5.6VDC	155.024 880	-0.12

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.96 to 4.96 ppm. The maximum frequency variation over the voltage range was -0.12ppm.

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.  
FCC ID: N6RVHFHH-01

DATE: SEPTEMBER 17, 1999  
REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT  
PAGE #: 8

2.995(a)(b)(d) Frequency stability:  
90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+6.25kHz	20.0ms
t3, t4	+12.5kHz	5.0ms

TEST PROCEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test receiver's maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.

FCC ID: N6RVHFHH-01


DATE: SEPTEMBER 17, 1999

REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT

PAGE #: 9

#### 2.995(a)(b)(d) Frequency stability:

## 90.214 Transient Frequency Behavior (Continued)

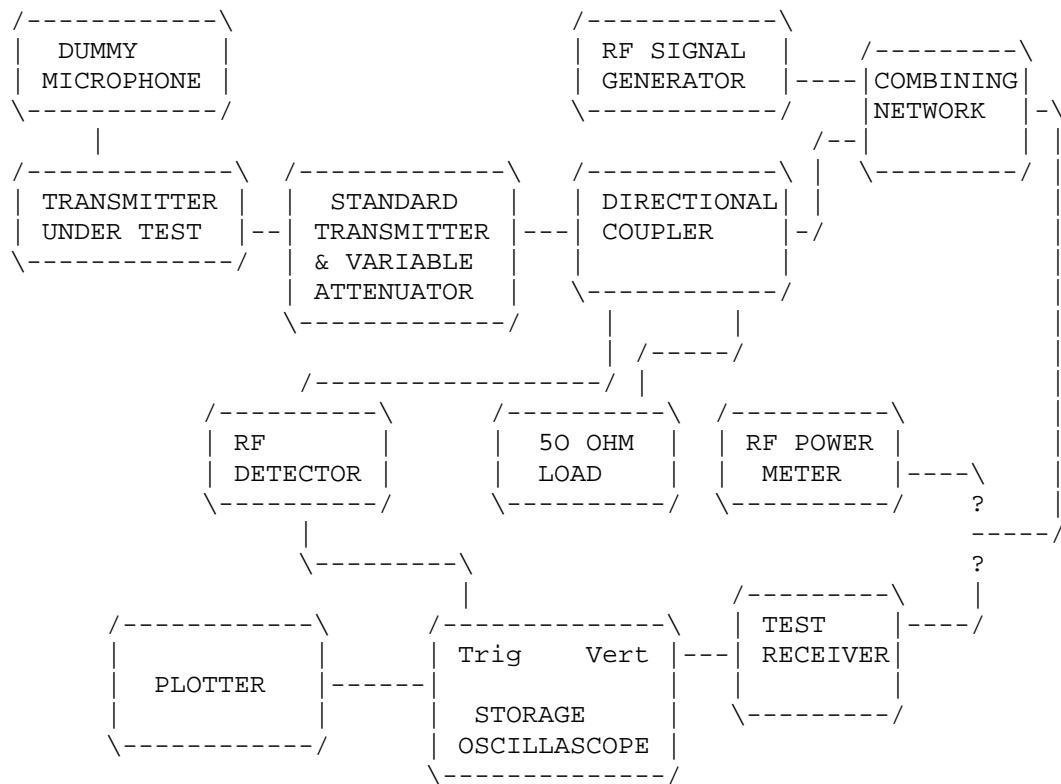

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.  
FCC ID: N6RVHFHH-01  
DATE: SEPTEMBER 17, 1999  
REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT  
PAGE #: 10

2.983(f) Photo or Drawing of Label:  
See Page 3.

2.983(g) Photos of Equipment:  
See Pages 5A-5J.

2.999 Measurement Procedures for Type Acceptance:  
Measurement techniques have been in accordance  
with EIA specifications and the FCC requirements.

2.909 Certification of Technical Data by Engineers  
We, the undersigned, certify that the enclosed  
measurements and enclosed data are true and  
correct.

---

S.S. Sanders  
Engineer

#### LIST OF TEST EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/  
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP  
8449B - OPT H02 Cal. 7/6/99
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 4/27/99
6. Electro-Metric Antennas Model TDA-30/1-4,Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: AEROTRON-REPCO SYSTEMS, INC.  
FCC ID: N6RVHFHH-01  
DATE: SEPTEMBER 17, 1999  
REPORT #: T:\CUS\A\AER\369A9\AER369A9.RPT  
PAGE #: 11