

ANSI/IEEE Std. C95.1-2005

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62



FCC TEST REPORT

For

**PCIe Data Card
(Tested inside of Dell Model T02H)**

Trade Name: AirPrime

Model: EM7455

Issued to

**Sierra Wireless Inc
13811 Wireless Way Richmond, BC, V6V 3A4 Canada**

Issued by

**Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: 2016/02/02**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2015/11/24	Initial Issue	ALL	Tony Liao
01	2016/01/29	Add Collocated Transmitter WLAN FCC ID	6	Tony Liao
02	2016/02/02	Add Simultaneous Transmission SAR Analysis for Bluetooth	186, 187	Tony Liao

Table of Contents

1	Certificate of Compliance (SAR Evaluation)	5
2	Description of Equipment Under Test	6
2.1	Summary of Highest SAR Values	8
3	Requirements for Compliance Testing Defined	9
3.1	Requirements for Compliance Testing Defined by the FCC	9
4	Dosimetric Assessment System	10
4.1	Measurement System Diagram	11
4.2	System Components	12
5	Evaluation Procedures	15
6	SAR Measurement Procedures	17
6.1	Normal SAR Test Procedure	17
7	Device Under Test	19
7.1	Wireless Technologies	19
7.2	Maximum Tune-up Power	20
7.3	Simultaneous Transmission	21
8	General LTE SAR Test and Reporting Considerations	22
9	LTE (TDD) Considerations	25
10	Power Reduction by Proximity Sensing	27
10.1	Procedures for determining proximity sensor triggering distances	27
10.2	Procedures for determining antenna and proximity sensor coverage	28
10.3	Proximity Sensor Status Table of trigger distance	29
10.4	Tilt angle influences to proximity sensor triggering	31
10.5	Power Reduction per Air-interface	32
10.6	Proximity Sensor Coverage Area	57
11	RF Output Power Measurement	58
11.1	WCDMA	58
11.2	LTE	63
11.2.1	LTE Band 2	64
11.2.2	LTE Band 4	74
11.2.3	LTE Band 5	84
11.2.4	LTE Band 7	92
11.2.5	LTE Band 12	100
11.2.6	LTE Band 13	108
11.2.7	LTE Band 25	114
11.2.8	LTE Band 26	124

11.2.9 LTE Band 30	133
11.2.10 LTE Band 41	139
12 Summary of SAR Test Exclusion Configurations	147
12.1 Standalone SAR Test Exclusion Calculations	147
12.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	148
12.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	149
12.1.3 SAR Required Test Configuration	150
13 Exposure Limit	151
14 Tissue Dielectric Properties	152
14.1 Test Liquid Confirmation	152
14.2 Typical Composition of Ingredients for Liquid Tissue Phantoms	153
14.3 Simulating Liquids Parameter Check Results	154
15 Measurement Uncertainty	155
16 System Performance Check	156
16.1 System Performance Check Results	157
17 SAR Measurements Results	158
18 Simultaneous Transmission SAR Analysis	170
18.1 Estimated SAR for Simultaneous Transmission SAR Analysis	171
18.2 Sum of the SAR for Simultaneous Transmission Analysis	172
18.2.1 Sum of the SAR for WLAN & WWAN	172
18.2.2 Sum of the 1g SAR for Body Exposure Condition	179
18.2.3 Sum of the SAR for WLAN & WWAN & Bluetooth	186
18.2.4 Sum of the 1g SAR for Body Exposure Condition	187
19 Equipment List & Calibration Status	188
20 Facilities	189
21 Reference	189
22 Attachments	190

1 Certificate of Compliance (SAR Evaluation)

Applicant Sierra Wireless Inc
13811 Wireless Way Richmond, BC, V6V 3A4 Canada

Equipment Under Test: PCIe Data Card (tested inside of Dell Model T02H)

Trade Name: AirPrime

Model Number: EM7455

Date of Test: November 02 ~ 13, 2015

Device Category: Portable Devices

Exposure Category: General Population/Uncontrolled Exposure

Applicable Standards	
FCC	● IEEE 1528 2013 ● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 ● KDB 447498 D01 General RF Exposure Guidance v06 ● KDB 616217 D04 SAR for laptop and tablets v01r02 ● KDB 248227 D01 SAR measurement for 802 11 a b g v02r02 ● KDB 941225 D05 SAR for LTE Devices v02r05
Limit	
1.6 W/kg	
Test Result	
Pass	


The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Scott Hsu
Section Manager
Compliance Certification Services Inc.

Tested by:

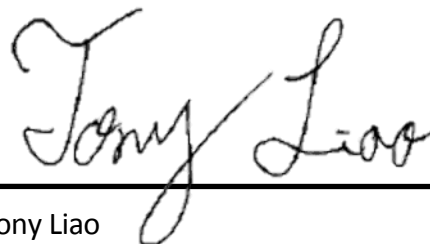

Tony Liao
SAR Engineer
Compliance Certification Services Inc.

2 Description of Equipment Under Test

Product	PCIe Data Card (tested inside of Dell Model T02H)				
Trade Name	AirPrime				
Model Number	EM7455				
RF Module	Sierra Wireless		Model:	EM7455	
Transmitter	UMTS & LTE				
	Operating Mode	TX Freq Range (MHz)	Channel Bandwidth (MHz)	Modulation Technique	Max WWAN TX Ant Gain including cable loss
	WCDMA Band II	1850 ~ 1910	RMC12.2 (Kbps), HSDPA, HSUPA, DC-HSDPA	QPSK	2.76
	WCDMA Band IV	1710 ~ 1755	RMC12.2 (Kbps), HSDPA, HSUPA, DC-HSDPA	QPSK	1.05
	WCDMA Band V	824 ~ 849	RMC12.2 (Kbps), HSDPA, HSUPA, DC-HSDPA	QPSK	-2.06
	LTE Band 2	1850 ~ 1910	1.4,3,5,10,15,20	QPSK & 16QAM	2.76
	LTE Band 4	1710 ~ 1755	1.4,3,5,10,15,20	QPSK & 16QAM	1.05
	LTE Band 5	824 ~ 849	1.4,3,5,10	QPSK & 16QAM	-2.06
	LTE Band 7	2500 ~ 2570	5,10,15,20	QPSK & 16QAM	1.51
	LTE Band 12	698 ~ 716	1.4,3,5,10	QPSK & 16QAM	-0.90
	LTE Band 13	777 ~ 787	5,10	QPSK & 16QAM	-0.95
	LTE Band 25	1850 ~ 1915	1.4,3,5,10,15,20	QPSK & 16QAM	2.76
	LTE Band 26	814 ~ 849	1.4,3,5,10,15	QPSK & 16QAM	-2.06
	LTE Band 30	2305 ~ 2315	5,10	QPSK & 16QAM	0.06
	LTE Band 41	2469 ~ 2690	5,10,15,20	QPSK & 16QAM	1.51
WWAN Antenna Specification	Brand name	Auden			
	Parts Number	Main: A30307-00			
		Aux: A30308-00			
	Type	Monopole			
Collocated Transmitter	Intel		Model:	8260NGW	FCC ID: PD98260NGU
	Wi-Fi & Bluetooth				
Collocated Transmitter Modulation Technique	Bluetooth:GFSK for 1Mbps;π/4-DQPSK for 2Mbps;8DPSK for 3Mbps				
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)				
	802.11b: Direct Sequence Spread Spectrum(DSSS)				
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)				
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)				
	802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)				
WLAN Antenna Specification	Brand name	Auden			
	Parts Number	Main:A30308-00			
		Aux:A30308-00			
	Type	PIFA			
	Freq Range (MHz)	Peak Gain(dBi)			
	2400 ~ 2483.5	-0.31			
	5150 ~ 5250	-0.22			
	5250 ~ 5350	0.32			
	5470 ~ 5725	0.8			
5725 ~ 5850	1.09				

Rechargeable Li-polymer Battery–alternate	Band:DELL Model:7VKV9 Rating:7.6V
---	---

Note:

1. The sample selected for test was prototype that representative to production product and was provided by manufacturer.
2. The Bystander SAR not request because we performed SAR test in tablet mode then rear with LCD back is some of test position so rear test result can cove LCD back.

2.1 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
WCDMA Band II	Rear	RMC 12.2Kbps	1.397
WCDMA band IV	Rear	RMC 12.2Kbps	1.284
WCDMA band V	Rear	RMC 12.2Kbps	1.035
LTE band 2	Rear	QPSK	1.253
LTE band 4	Rear	QPSK	1.286
LTE band 5	Rear	QPSK	1.259
LTE band 7	Edge 1	QPSK	1.385
LTE band 12	Rear	QPSK	1.243
LTE band 13	Rear	QPSK	1.174
LTE band 25	Rear	QPSK	1.306
LTE band 26	Rear	QPSK	1.114
LTE band 30	Edge 1	QPSK	1.260
LTE band 41	Edge 1	QPSK	1.189

Results for highest SAR values of simultaneous transmission

Technology/Band	Test configuration	Mode	Sum of Highest Reported 1g-SAR (W/kg)
WCDMA Band II + 5G Band	Rear	RMC 12.2Kbps	4.047

3 Requirements for Compliance Testing Defined


3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-2005 [6].

4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3665 and EX3DV4-SN: 7351 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

4.1 Measurement System Diagram

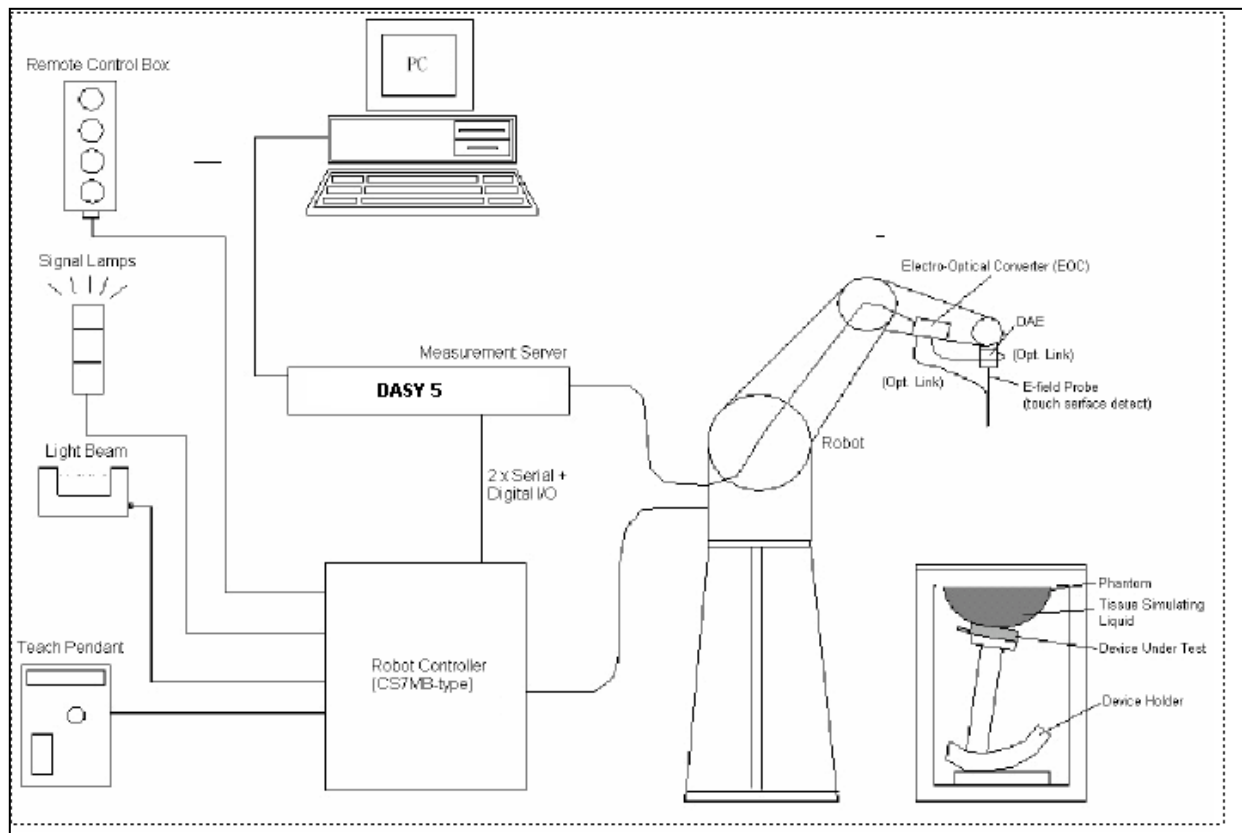

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

4.2 System Components

DASY4/DASY5 Measurement Server	
	The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
	The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.
Data Acquisition Electronics (DAE)	
	The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration:	Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request.
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis)
Dynamic Range:	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions:	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm
Application:	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.


SAM Phantom (V4.0)

Construction:	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.
Shell Thickness:	2 $\pm$ 0.2 mm
Filling Volume:	Approx. 25 liters
Dimensions:	Height: 810mm; Length: 1000mm; Width: 500mm


SAM Phantom (ELI4)

Construction:	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles
Shell Thickness:	2.0 $\pm$ 0.2 mm (sagging: <1%)
Filling Volume:	Approx. 25 liters
Dimensions:	Major ellipse axis: 600 mm
Minor axis:	400 mm 500mm


Device Holder for SAM Twin Phantom

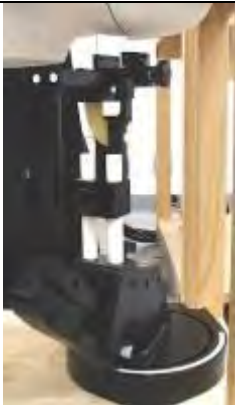	Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).
---	---

System Validation Kits for SAM Phantom (V4.0)

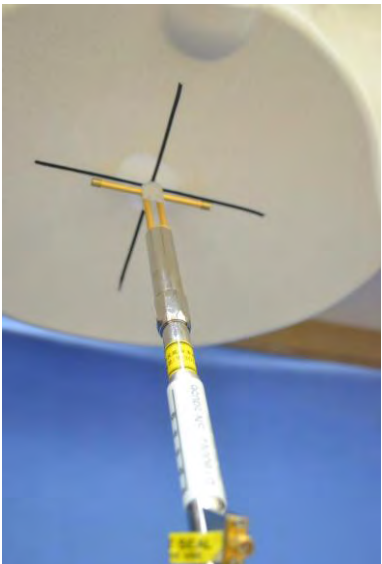	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 750, 835, 1800, 1900, 2300, 2450 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D750V3: dipole length: 178 mm; overall height: 330 mm D835V2: dipole length: 161 mm; overall height: 340 mm D1800V2: dipole length: 72.5 mm; overall height: 300 mm D1900V2: dipole length: 67.7 mm; overall height: 300 mm D2300V2: dipole length: 51.5 mm; overall height: 290 mm D2450V2: dipole length: 51.5 mm; overall height: 290 mm
--	---

System Validation Kits for ELI4 phantom

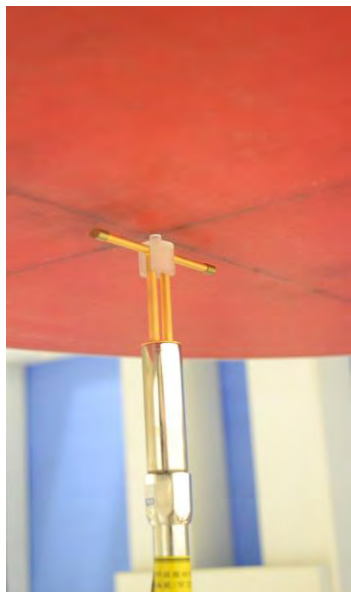	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 750, 835, 1800, 1900, 2300, 2450 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D750V3: dipole length: 178 mm; overall height: 330 mm D835V2: dipole length: 161 mm; overall height: 340 mm D1800V2: dipole length: 72.5 mm; overall height: 300 mm D1900V2: dipole length: 67.7 mm; overall height: 300 mm D2300V2: dipole length: 51.5 mm; overall height: 290 mm D2450V2: dipole length: 51.5 mm; overall height: 290 mm
---	---

5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR	= local specific absorption rate in W/kg
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

P_{pwe}	= Equivalent power density of a plane wave in mW/cm ²
E_{tot}	= total electric field strength in V/m
H_{tot}	= total magnetic field strength in A/m

6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency ≤ 2 GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1) The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2 GHz to 4 GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4 GHz to 6 GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

7 Device Under Test

7.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
WCDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 HSDPA HSUPA	100%
LTE	Band 2 Band 4 Band 5 Band 7 Band 12 Band 13 Band 25 Band 26 Band 30 Band 41	QPSK 16QAM	100%

7.2 Maximum Tune-up Power

Tolerance (dB): ± 1		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
WCDMA Band II	R99	23.0	24.0
	HSDPA	23.0	24.0
	HSUPA	23.0	24.0
WCDMA Band IV	R99	23.0	24.0
	HSDPA	23.0	24.0
	HSUPA	23.0	24.0
WCDMA Band V	R99	23.0	24.0
	HSDPA	23.0	24.0
	HSUPA	23.0	24.0
Tolerance (dB): ± 1		RF Output Power (dBm)	
LTE Band 2	QPSK	23.0	24.0
LTE Band 4	QPSK	23.0	24.0
LTE Band 5	QPSK	23.0	24.0
LTE Band 7	QPSK	22.0	23.0
LTE Band 12	QPSK	23.0	24.0
LTE Band 13	QPSK	23.0	24.0
LTE Band 25	QPSK	23.0	24.0
LTE Band 26	QPSK	23.0	24.0
LTE Band 30	QPSK	22.0	23.0
LTE Band 41	QPSK	22.0	23.0

7.3 Simultaneous Transmission

RF Exposure Condition	Transmit Configurations
WWAN + Wi-Fi	WCDMA + Wi-Fi / BT
	WCDMA Band II/IV/V + BT (Chain 0)
	WCDMA Band II/IV/V + 2.4GHz (Chain 0)
	WCDMA Band II/IV/V + 2.4GHz (Chain 1)
	WCDMA Band II/IV/V + 5GHz (Chain 0) + BT (Chain 0)
	WCDMA Band II/IV/V + 5GHz (Chain 1) + BT (Chain 0)
	WCDMA Band II/IV/V + 2.4GHz (Chain 0+ Chain 1)
	WCDMA Band II/IV/V + 2.4GHz (Chain 1) + BT (Chain 0)
	WCDMA Band II/IV/V + 5GHz (Chain 0+ Chain 1) + BT (Chain 0)
	LTE + Wi-Fi / BT
	LTE Band 2/4/5/12/13/25/26/30/41 + BT (Chain 0)
	LTE Band 2/4/5/12/13/25/26/30/41 + 2.4GHz (Chain 0)
	LTE Band 2/4/5/12/13/25/26/30/41 + 2.4GHz (Chain 1)
	LTE Band 2/4/5/12/13/25/26/30/41 + 5GHz (Chain 0) + BT (Chain 0)
	LTE Band 2/4/5/12/13/25/26/30/41 + 5GHz (Chain 1) + BT (Chain 0)
	LTE Band 2/4/5/12/13/25/26/30/41 + 2.4GHz (Chain 0+ Chain 1)
	LTE Band 2/4/5/12/13/25/26/30/41 + 2.4GHz (Chain 1) + BT (Chain 0)
	LTE Band 2/4/5/12/13/25/26/30/41+ 5GHz (Chain 0+ Chain 1) + BT (Chain 0)
	Wi-Fi/BT
	2.4GHz(Chain 0)
	2.4GHz(Chain 1)
	2.4GHz(Chain 0+ Chain 1)
	2.4GHz(Chain 1) + BT (Chain 0)
	5GHz(Chain 0)
	5GHz(Chain 1)
	5GHz(Chain 0+ Chain 1)
	5GHz(Chain 0) + BT (Chain 0)
	5GHz(Chain 1) + BT (Chain 0)
	5GHz(Chain 0+ Chain 1) + BT (Chain 0)
	BT
	BT (Chain 0)

Note(s):

1. For WWAN mode only Chain 0 can be used as transmitting and Chain 1 only be used as receiving.
2. For WLAN mode can be used as transmitting/receiving on the Chain 0 and Chain 1.
3. For BT mode only Chain 0 can be used as transmitting/receiving.

8 General LTE SAR Test and Reporting Considerations

KDB 941225 D05 SAR for LTE Devices V02

Item	Description	Information					
1	Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	18607/ 1850.7	18615/ 1851.5	18625/ 1852.5	18650/ 1855	18675/ 1857.5
		Mid	18900/1 1880	18900/1 880	18900/ 1880	18900/ 1880	18900/ 1880
		High	19192/ 1909.2	19184/ 1908.4	19175/1 907.5	19150/1 905	19125/ 1902.5
		Band 4	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	19957/ 1710.7	19965/1 711.5	19975/1 712.5	20000/ 1715	20025/ 1717.5
		Mid	20175/ 1732.5	20175/ 1732.5	20175/1 732.5	20175/ 1732.5	20175/ 1732.5
		High	20392/ 1754.2	20384/ 1753.4	20375/ 1752.5	20350/1 750	20325/ 1747.5
		Band 5	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	20407/ 824.7	20415/ 825.5	20425/ 826.5	20450/8 29	
		Mid	20525/ 836.5	20525/ 836.5	20525/8 36.5	20525/ 836.5	
		High	20642/ 848.2	20643/ 847.4	20625/ 846.5	20600/8 44	
		Band 7	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low			20775/ 2502.5	20800/ 2505.5	20825/ 2507.5
		Mid			21100/ 2535.0	21100/ 2535.0	21100/ 2535.0
		High			21425/ 2567.5	21400/ 2565.0	21375/ 2562.5
		Band 12	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	23017 / 699.7	23025 / 700.5	23035 / 701.5	23060 / 704.0	
		Mid	23095 / 707.5	23095 / 707.5	23095 / 707.5	23095 / 707.5	
		High	23173 / 715.3	23165 / 714.5	23155 / 713.5	23130 / 711.0	
		Band 13	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low			23205/ 779.5		
		Mid			23230/ 782	23230/ 782	
		High			23255/ 784.5		

Band	Channel Bandwidth					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
25						
Low	26047 / 1850.7	26055 / 1851.5	26065 / 1852.5	26090 / 1855.0	26115 / 1857.5	26140 / 1860.0
Mid	26365 / 1882.5	26365 / 1882.5	26365 / 1882.5	26365 / 1882.5	26365 / 1882.5	26365 / 1882.5
High	26683 / 1914.3	26675 / 1913.5	26665 / 1912.5	26640 / 1910.0	26615 / 1907.5	26590 / 1905.0
Band	Channel Bandwidth					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
26						
Low	26697 / 814.7	26705 / 815.5	26715 / 816.5	26740 / 819.0	26765 / 821.5	
Mid	26865 / 831.0	26865 / 831.0	26865 / 831.0	26865 / 831.0	26865 / 831.0	
High	27033 / 848.3	27025 / 847.5	27015 / 846.5	26990 / 844.0	26965 / 841.5	
Band	Channel Bandwidth					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
30						
Low			27685 / 2307.5			
Mid			27710 / 2310	27710 / 2310		
High			27735 / 2312.5			
Band	Channel Bandwidth					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
41						
Low			39675 / 2498.5	39700 / 2501	39725 / 2503.5	39750 / 2506
Mid			40620 / 2593	40620 / 2593	40620 / 2593	40620 / 2593
High			41565 / 2687.5	41540 / 2685	41515 / 2682.5	27560 / 2680

KDB 941225 D05 SAR for LTE Devices V02 (Continued)

Item	Description	Information																																						
2	Descriptions of the LTE transmitter and antenna implementation;	A single antenna is used for LTE and other wireless modes (GPRS/EGPRS/UMTS) for both Transmit and Receive. A Secondary antenna is used for LTE and other wireless modes (GPRS/EGPRS/UMTS) for Receive Only.																																						
3	Maximum power reduction (MPR)	As per 3GPP 36.101 v9.11.0 (2012-03), Release 9 Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR is permanently built-in by design A-MPR was disabled	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	
4	Power Reduction	Yes																																						
5	Spectrum plots for RB configurations	Refer to Section 11.3																																						

9 LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS		UpPTS		UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x N of S + N of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Uplink- Downlink Configuration	Calculated Duty Cycle (%)
0	63.33
1	43.33
2	23.33
3	31.67
4	21.67
5	11.67
6	53.33

10 Power Reduction by Proximity Sensing

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r01 6)

10.1 Procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

- (1) The relevant transmitter should be set to operate at its normal maximum output power.
- (2) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
- (3) It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
- (4) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- (5) The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
- (6) The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
- (7) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- (8) The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- (9) The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
- (10) If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
- (11) To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

10.2 Procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

- (1) The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
- (2) The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- (3) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- (4) The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
- (5) The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.
- (6) If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

10.3 Proximity Sensor Status Table of trigger distance

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
30	OFF	OFF
27	OFF	OFF
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	OFF	OFF
19	OFF	OFF
18	ON	ON
17	ON	ON
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


Rear Power Back-off

Edge Power Back-off

Body Phantom


Proximity Sensor Status Table when DUT is moving away the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
0	ON	ON
1	ON	ON
2	ON	ON
3	ON	ON
4	ON	ON
5	ON	ON
6	ON	ON
7	ON	ON
8	ON	ON
9	ON	ON
10	ON	ON
11	ON	ON
12	ON	ON
13	ON	ON
14	ON	ON
15	ON	ON
16	ON	ON
17	ON	ON
18	ON	ON
19	OFF	OFF
20	OFF	OFF
21	OFF	OFF
22	OFF	OFF
23	OFF	OFF
24	OFF	OFF
25	OFF	OFF
27	OFF	OFF
30	OFF	OFF

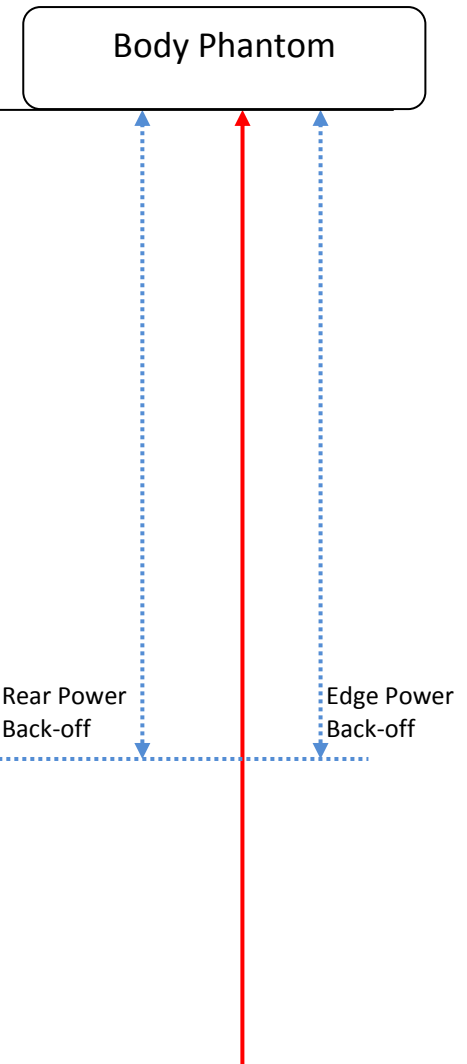

10.4 Tilt angle influences to proximity sensor triggering

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.4, the following procedure is used to determine the tilt angle influences to proximity sensor triggering.


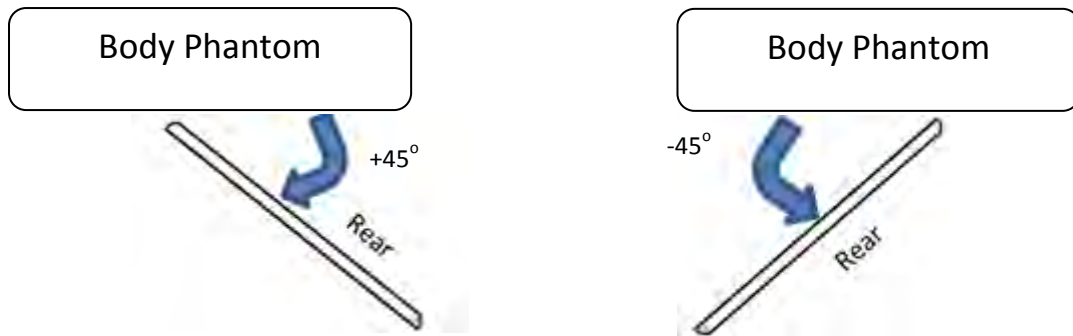


Distance to the DUT (mm)	Proximity Sensor Status 0° to +45°	Proximity Sensor Status 0° to -45°
18	ON	ON
17	ON	ON
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON



10.5 Power Reduction per Air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Top-Edge and Rear Surface.


WCDMA Band II

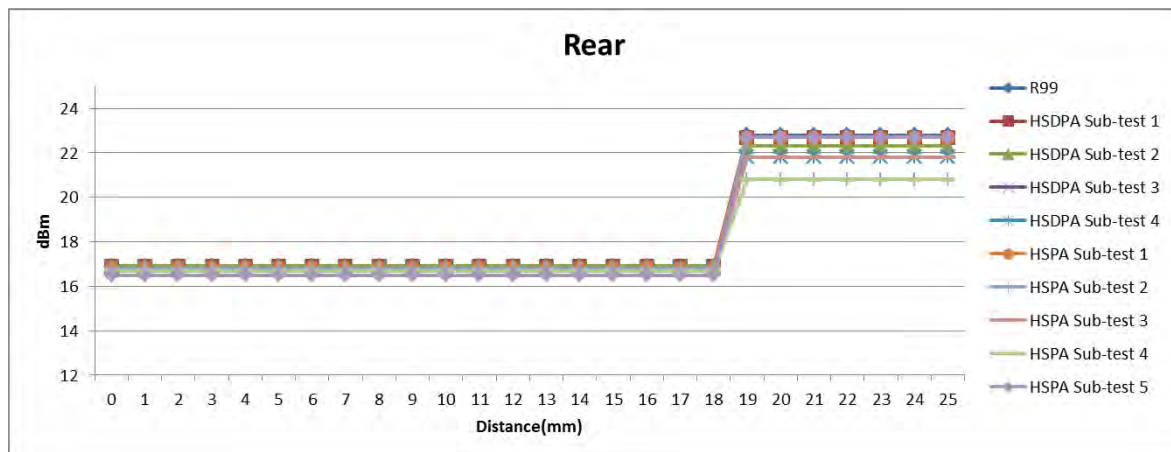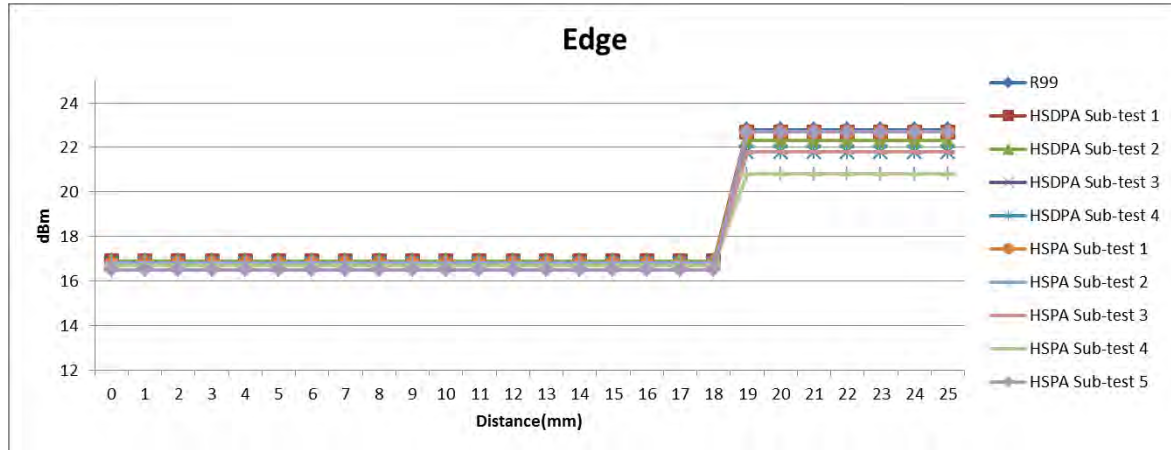


WCDMA Band IV

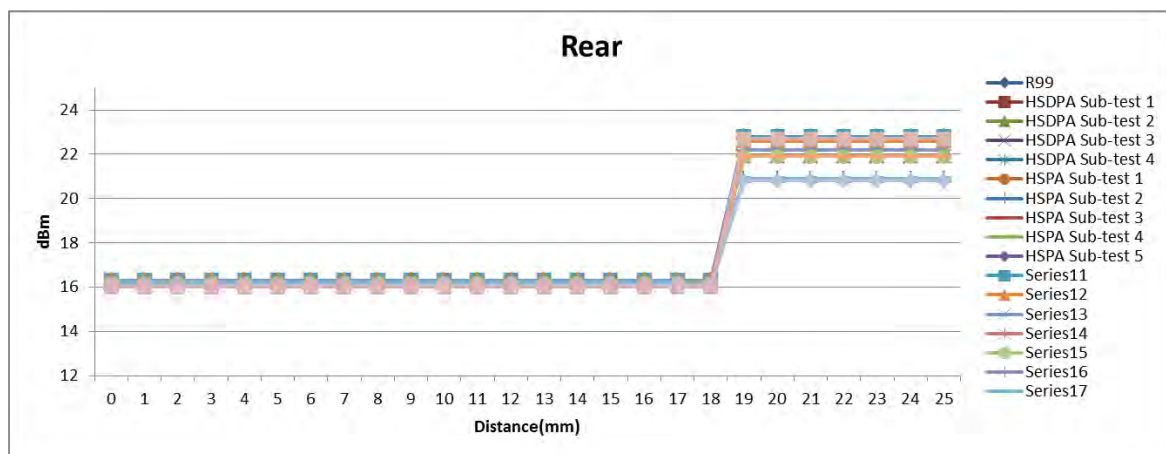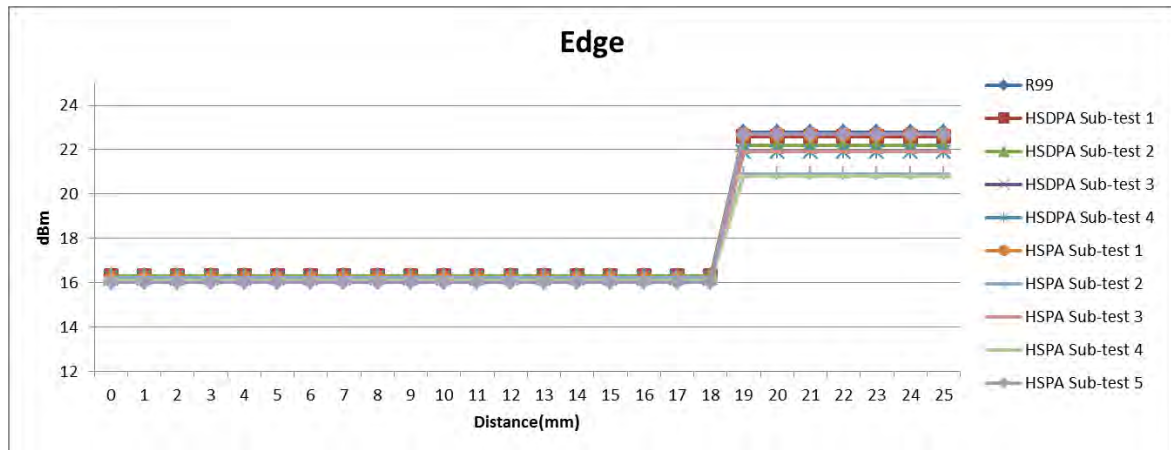



WCDMA Band V

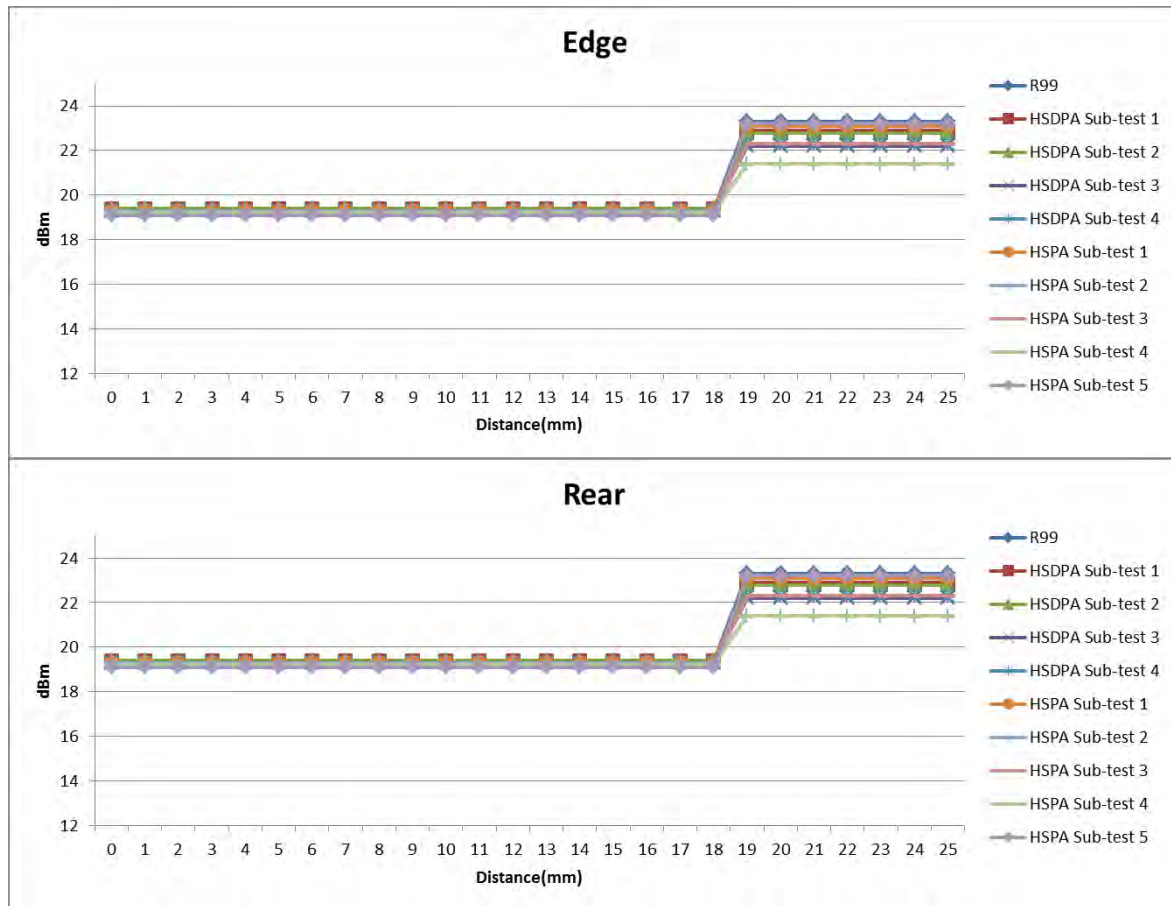


LTE Band 2

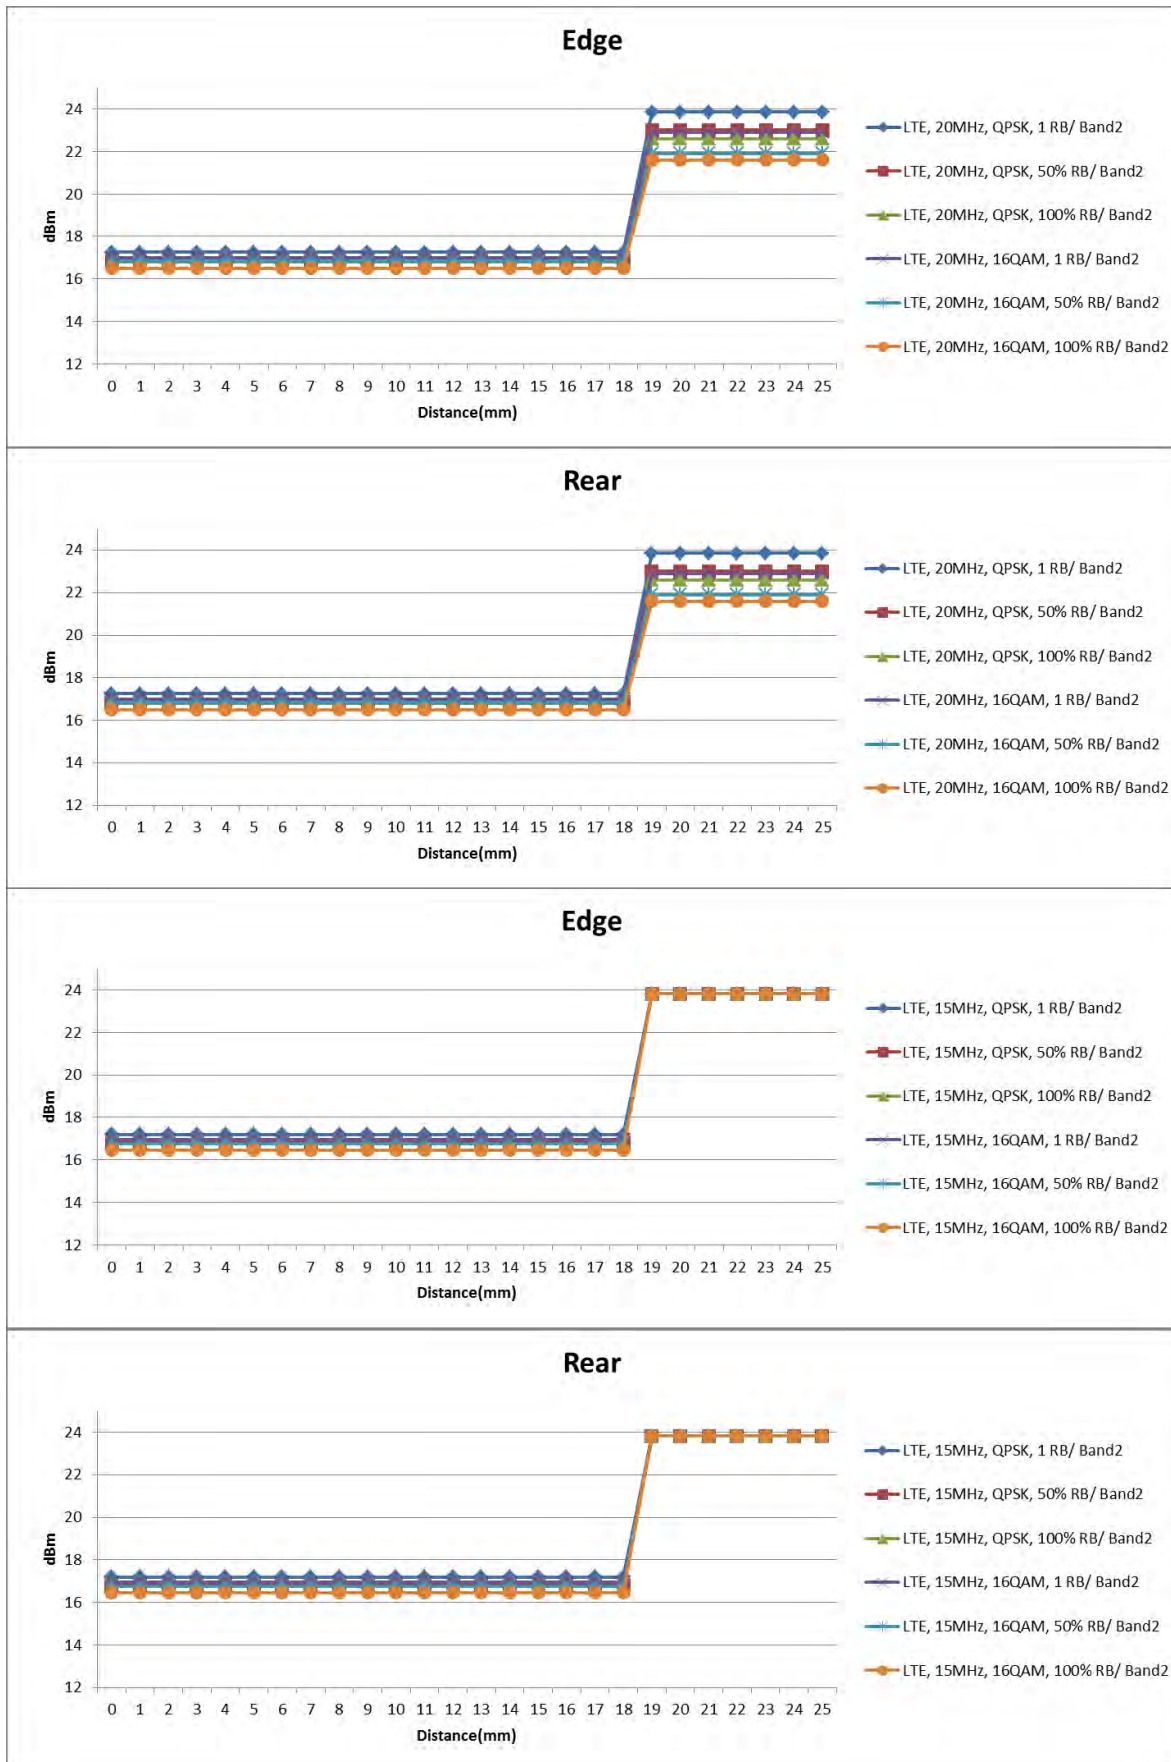


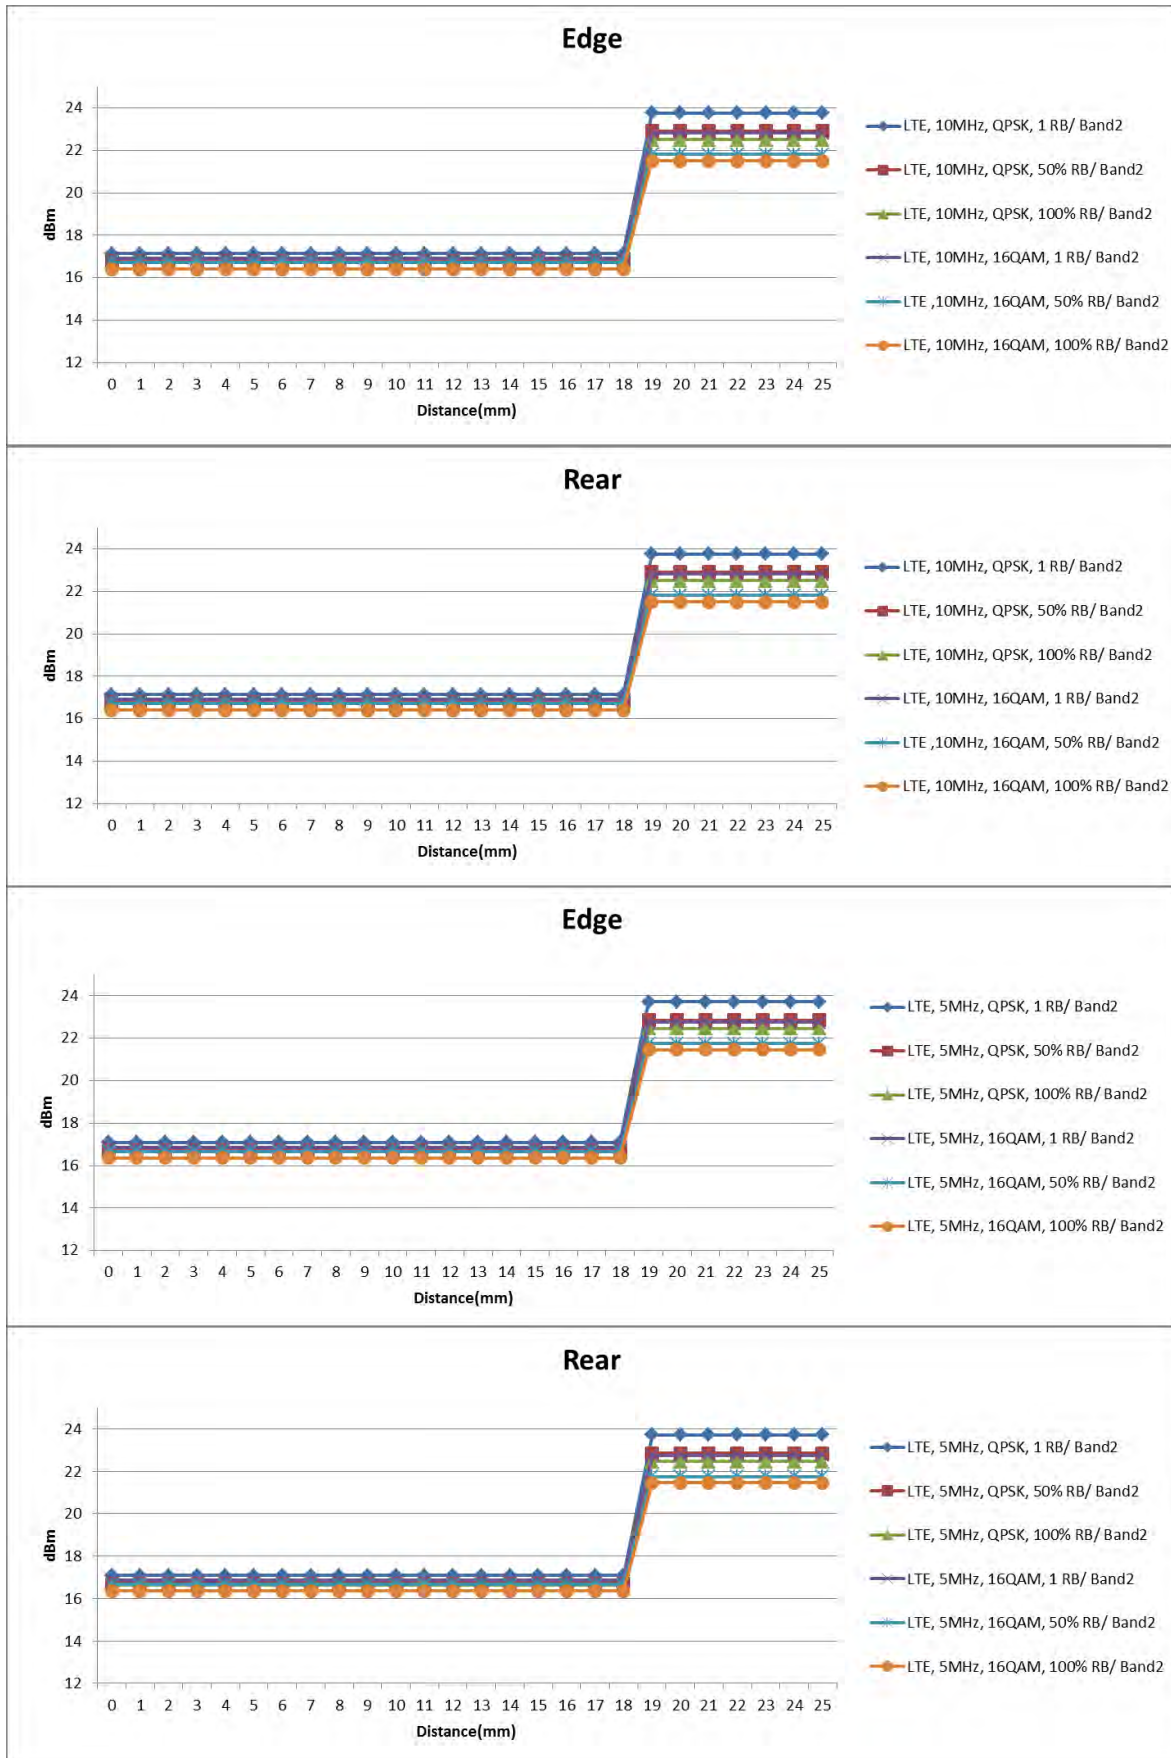


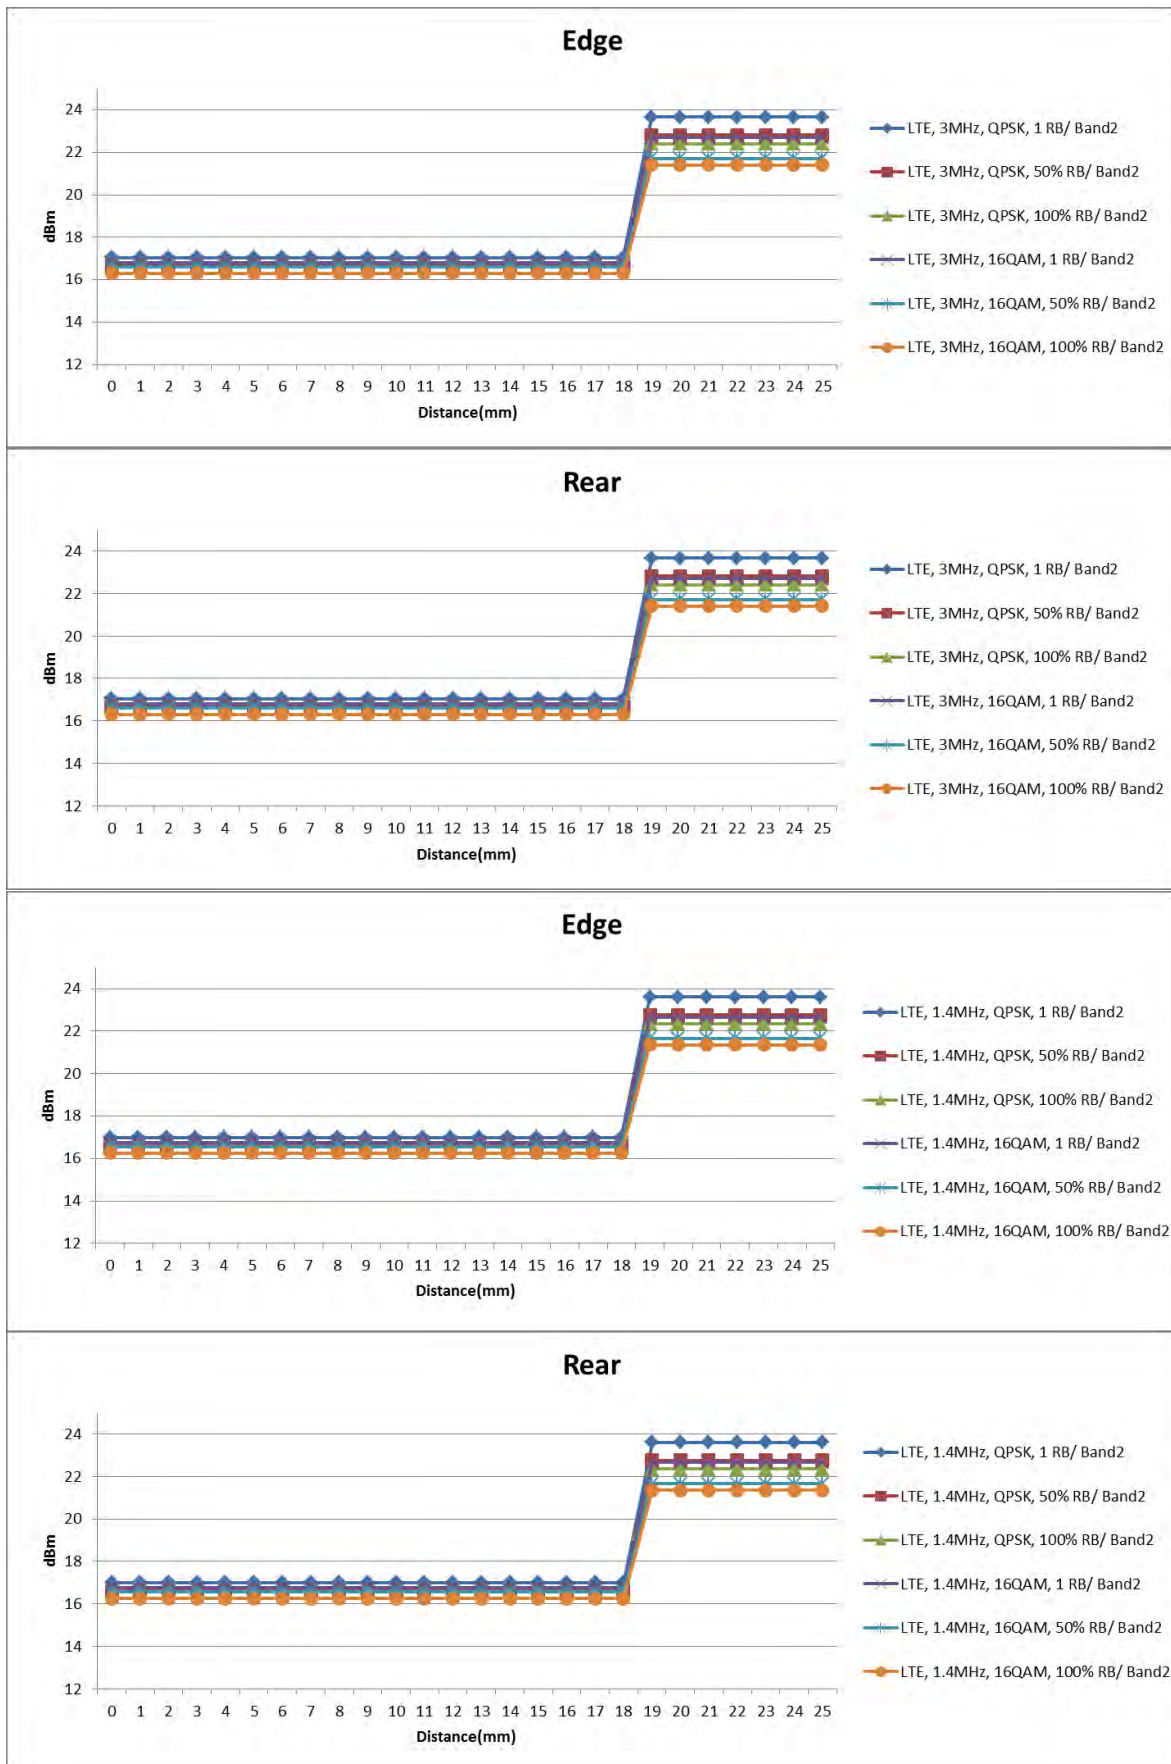


LTE Band 4

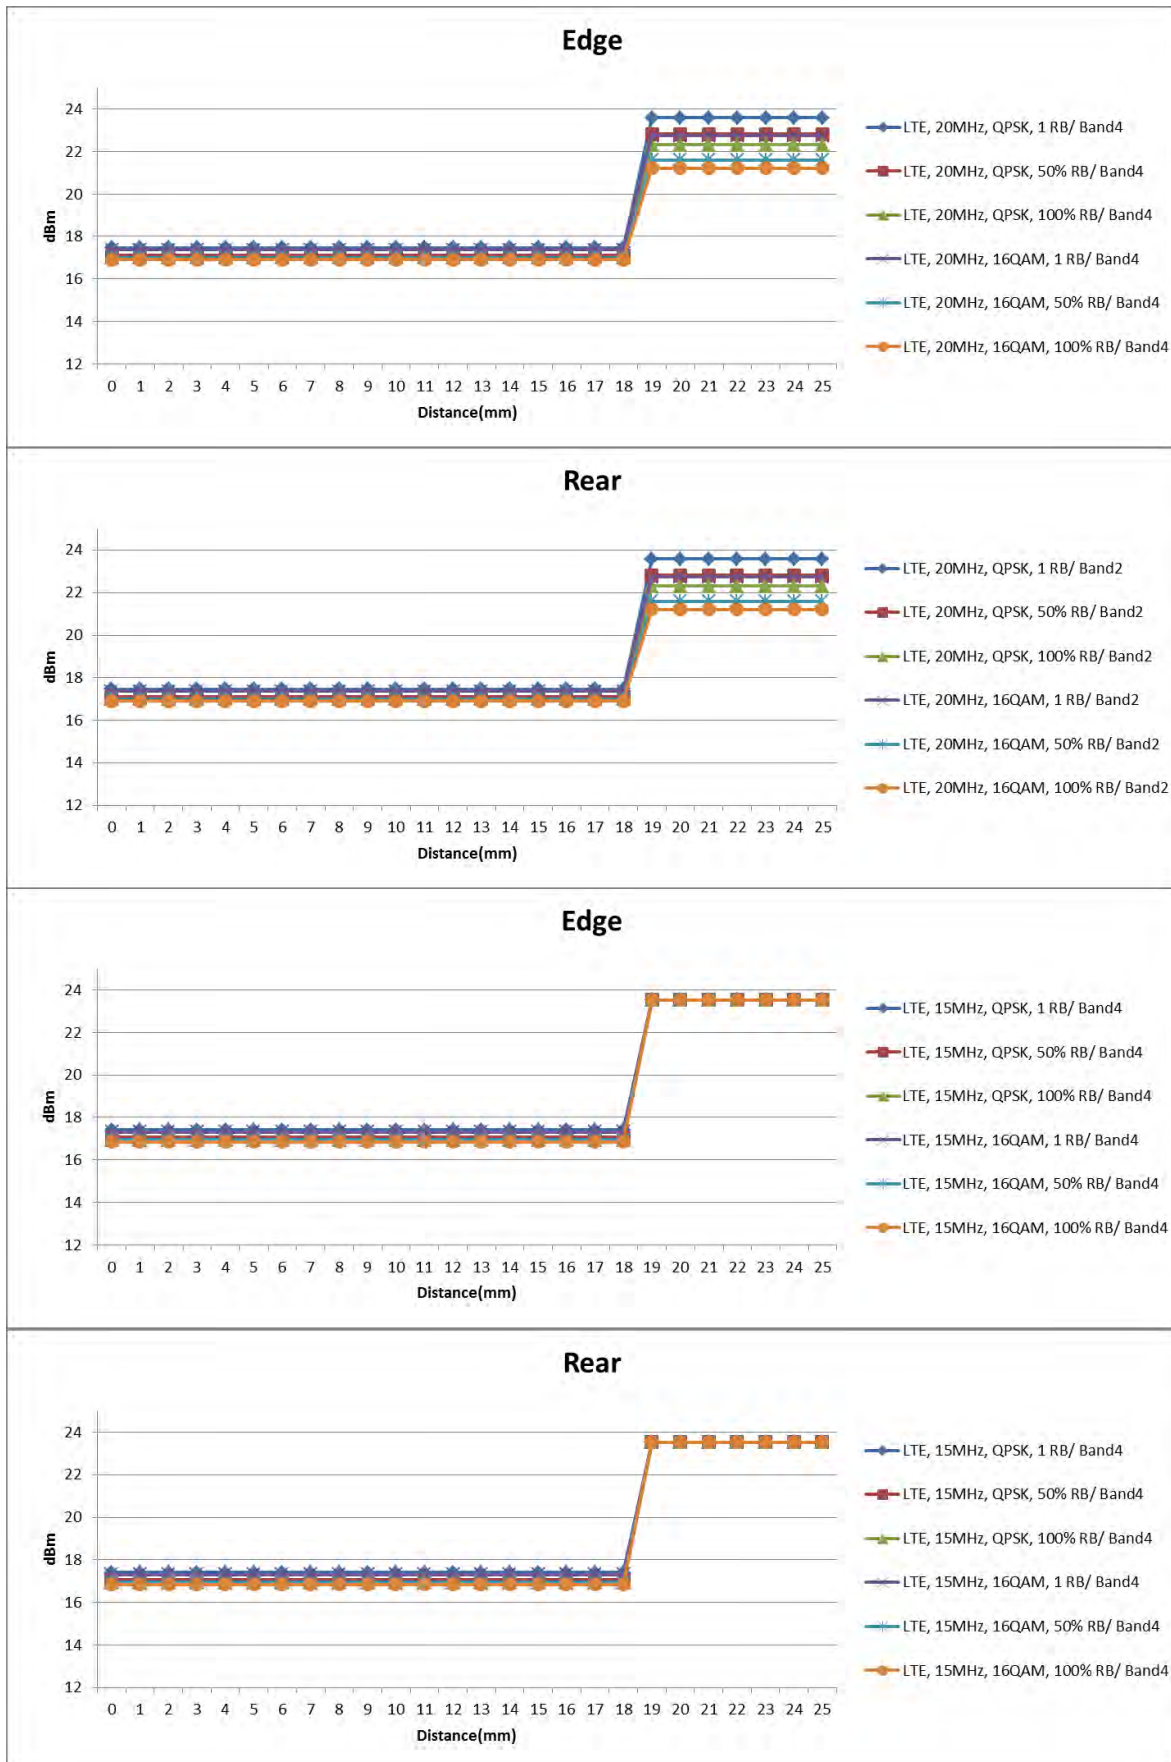


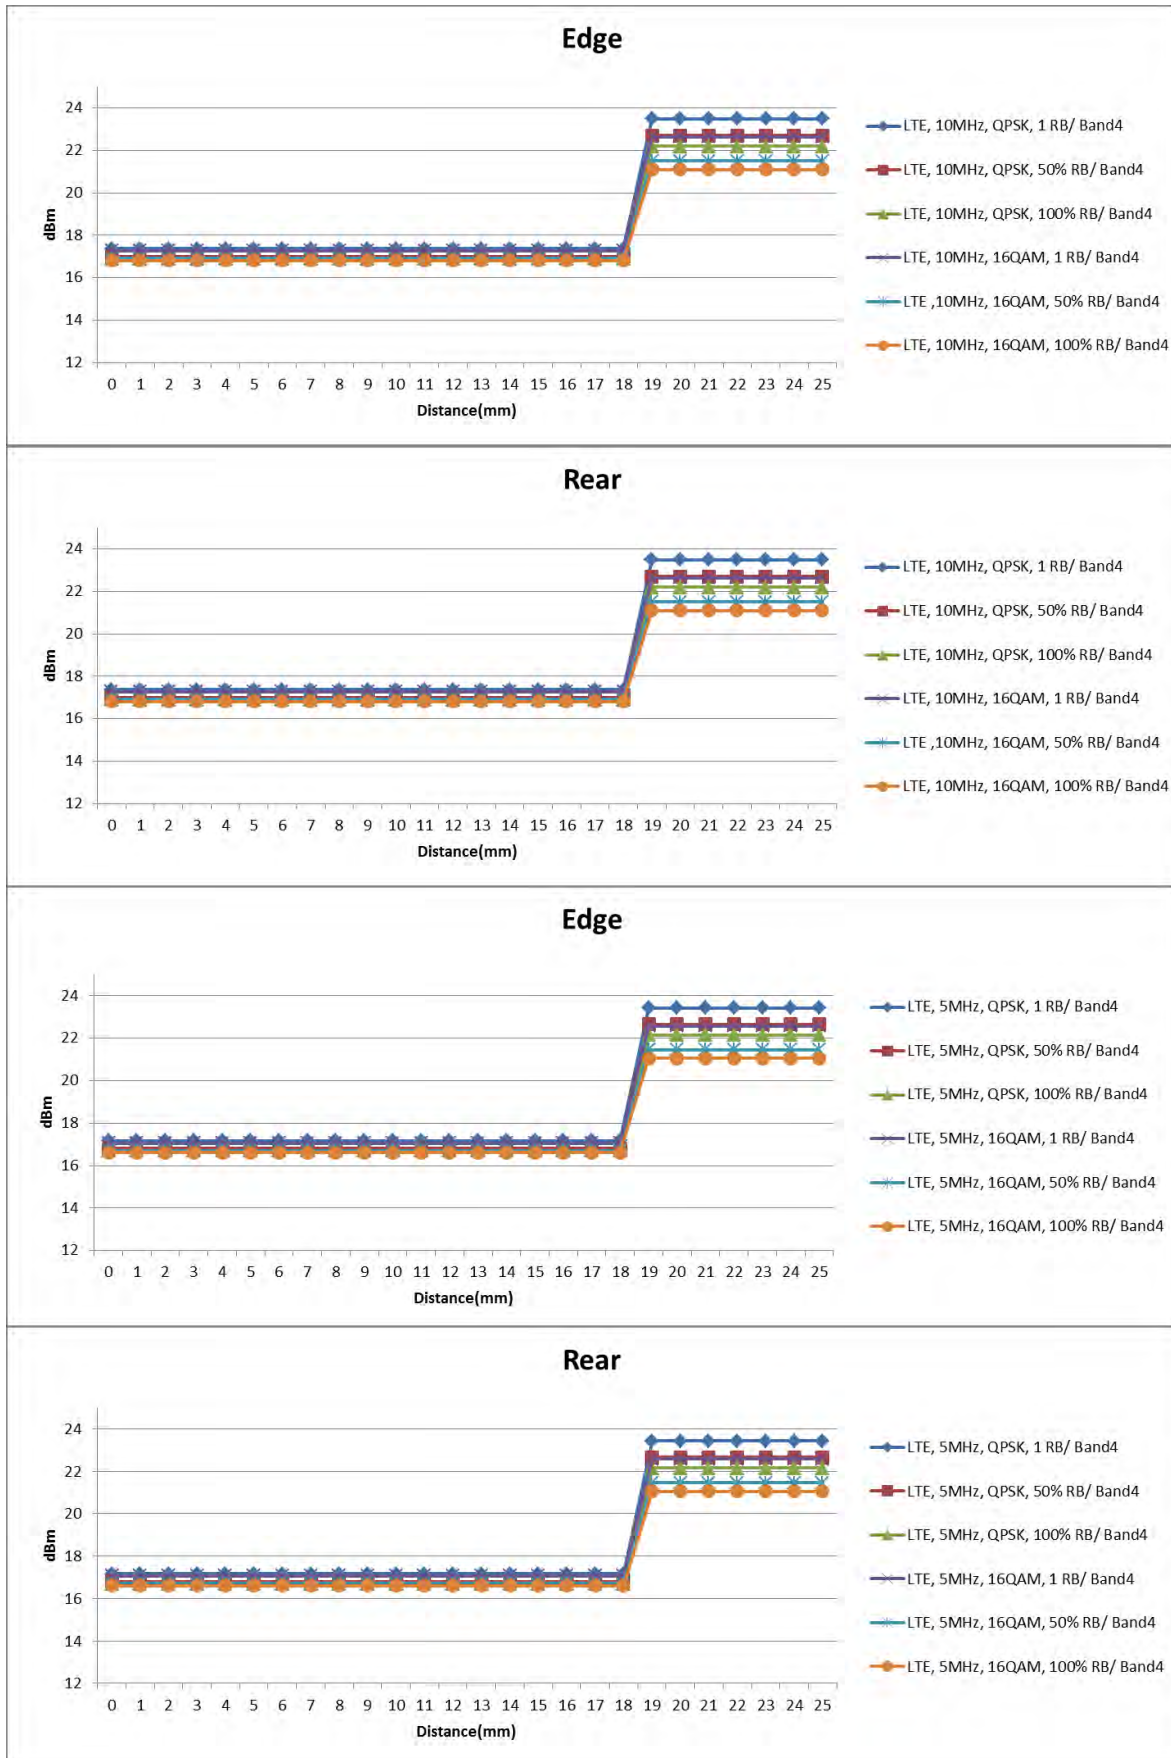

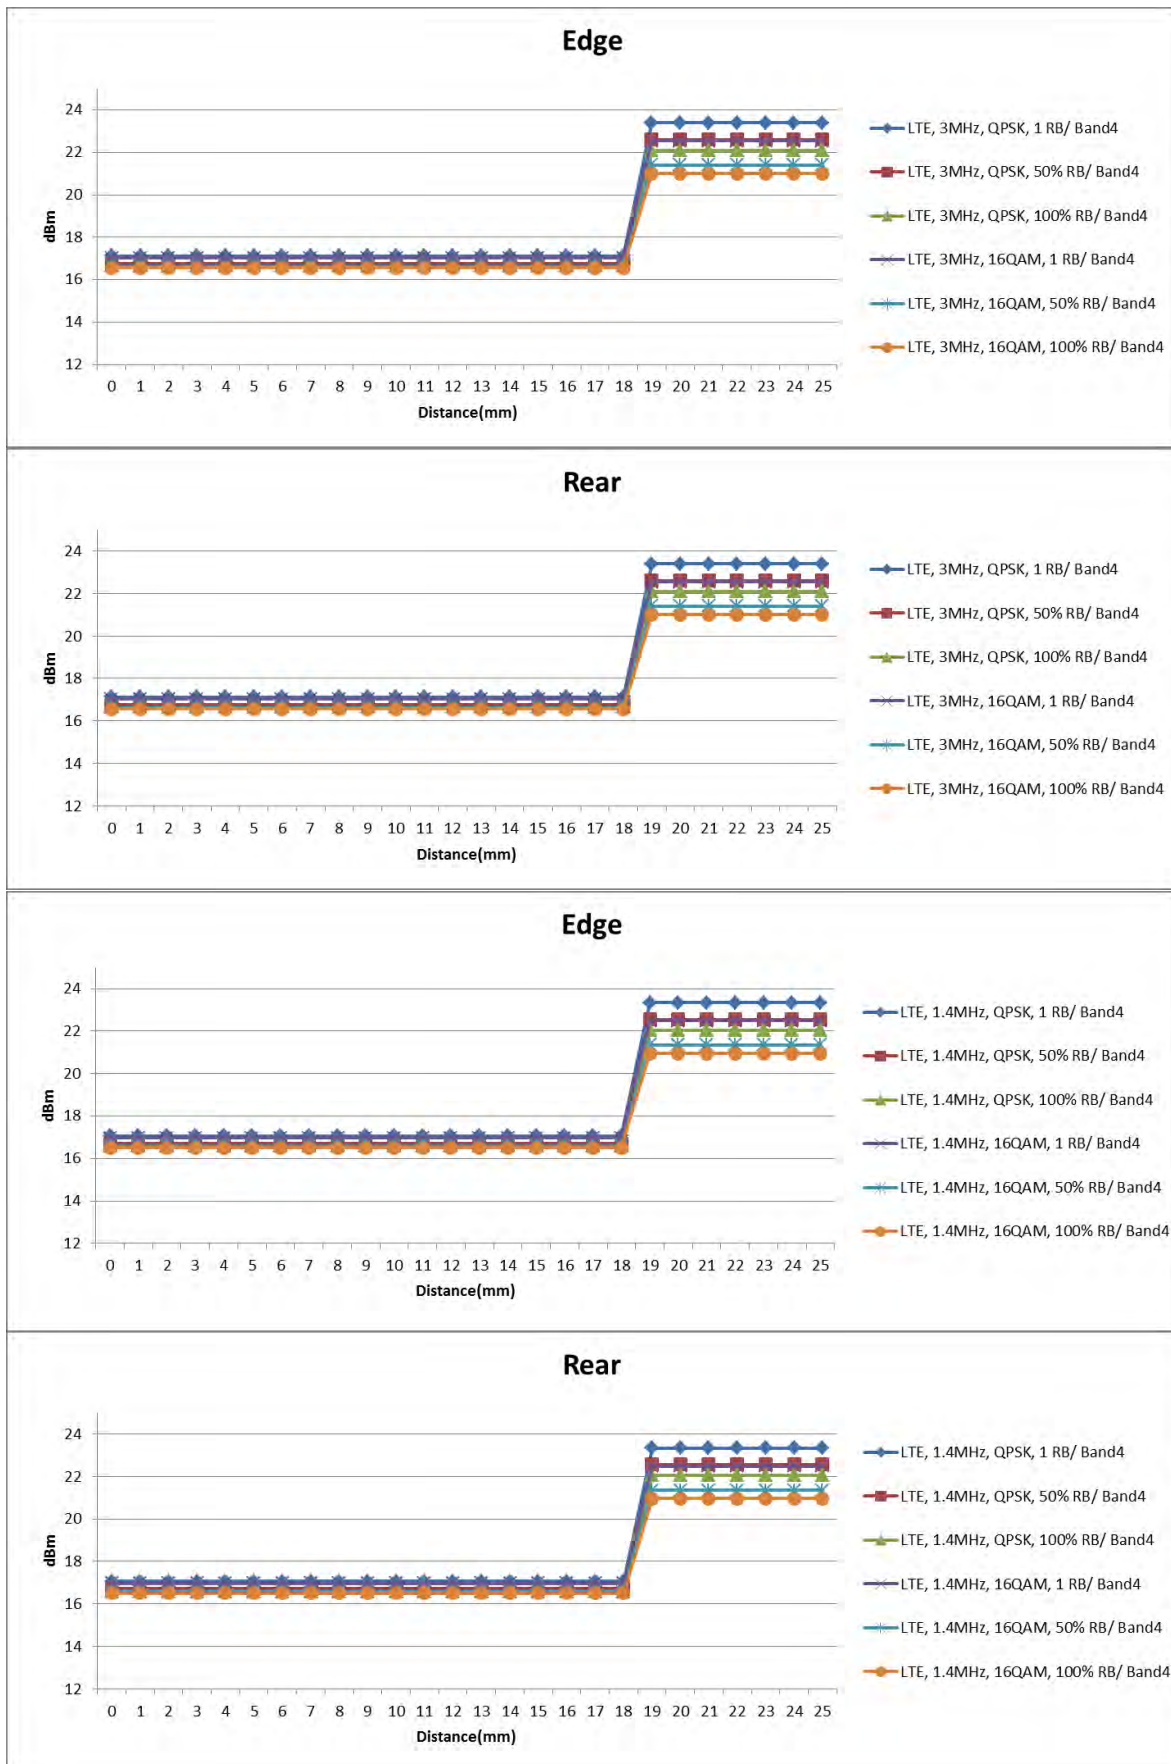



LTE Band 5

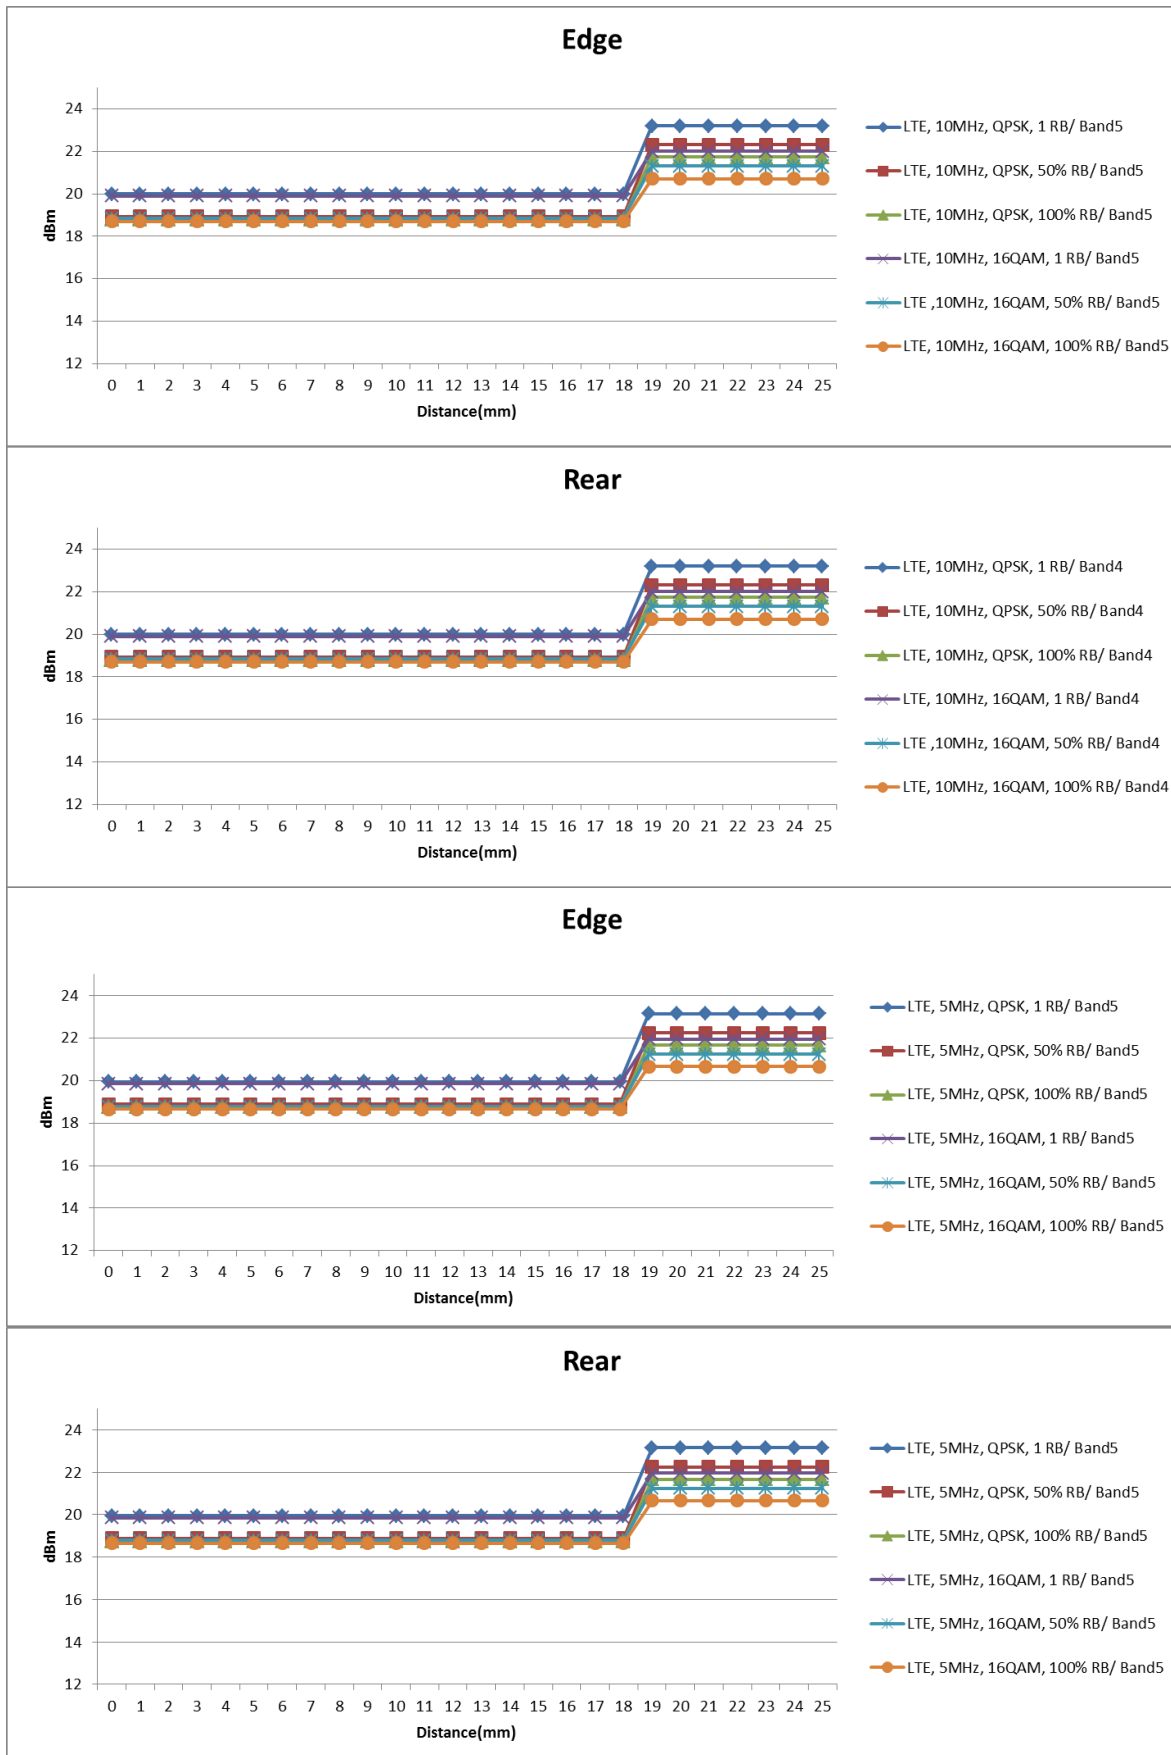

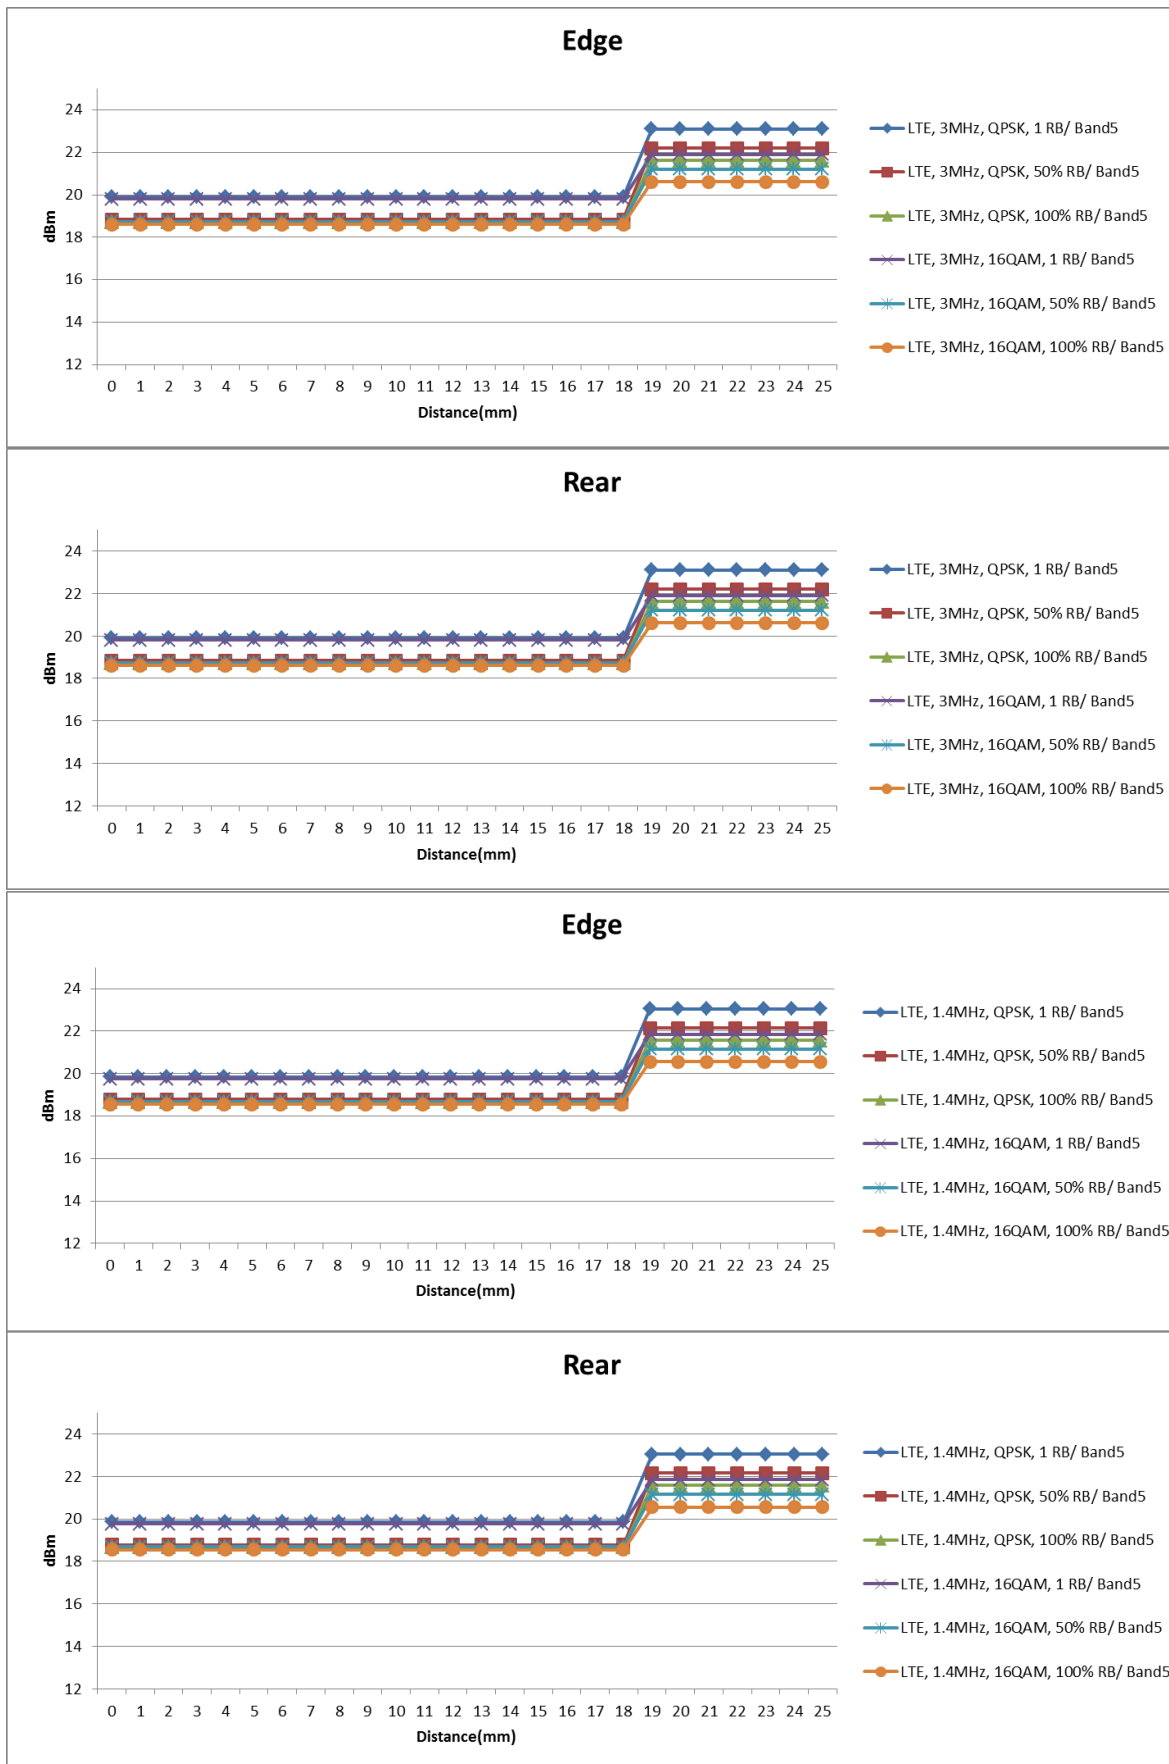



LTE Band 7

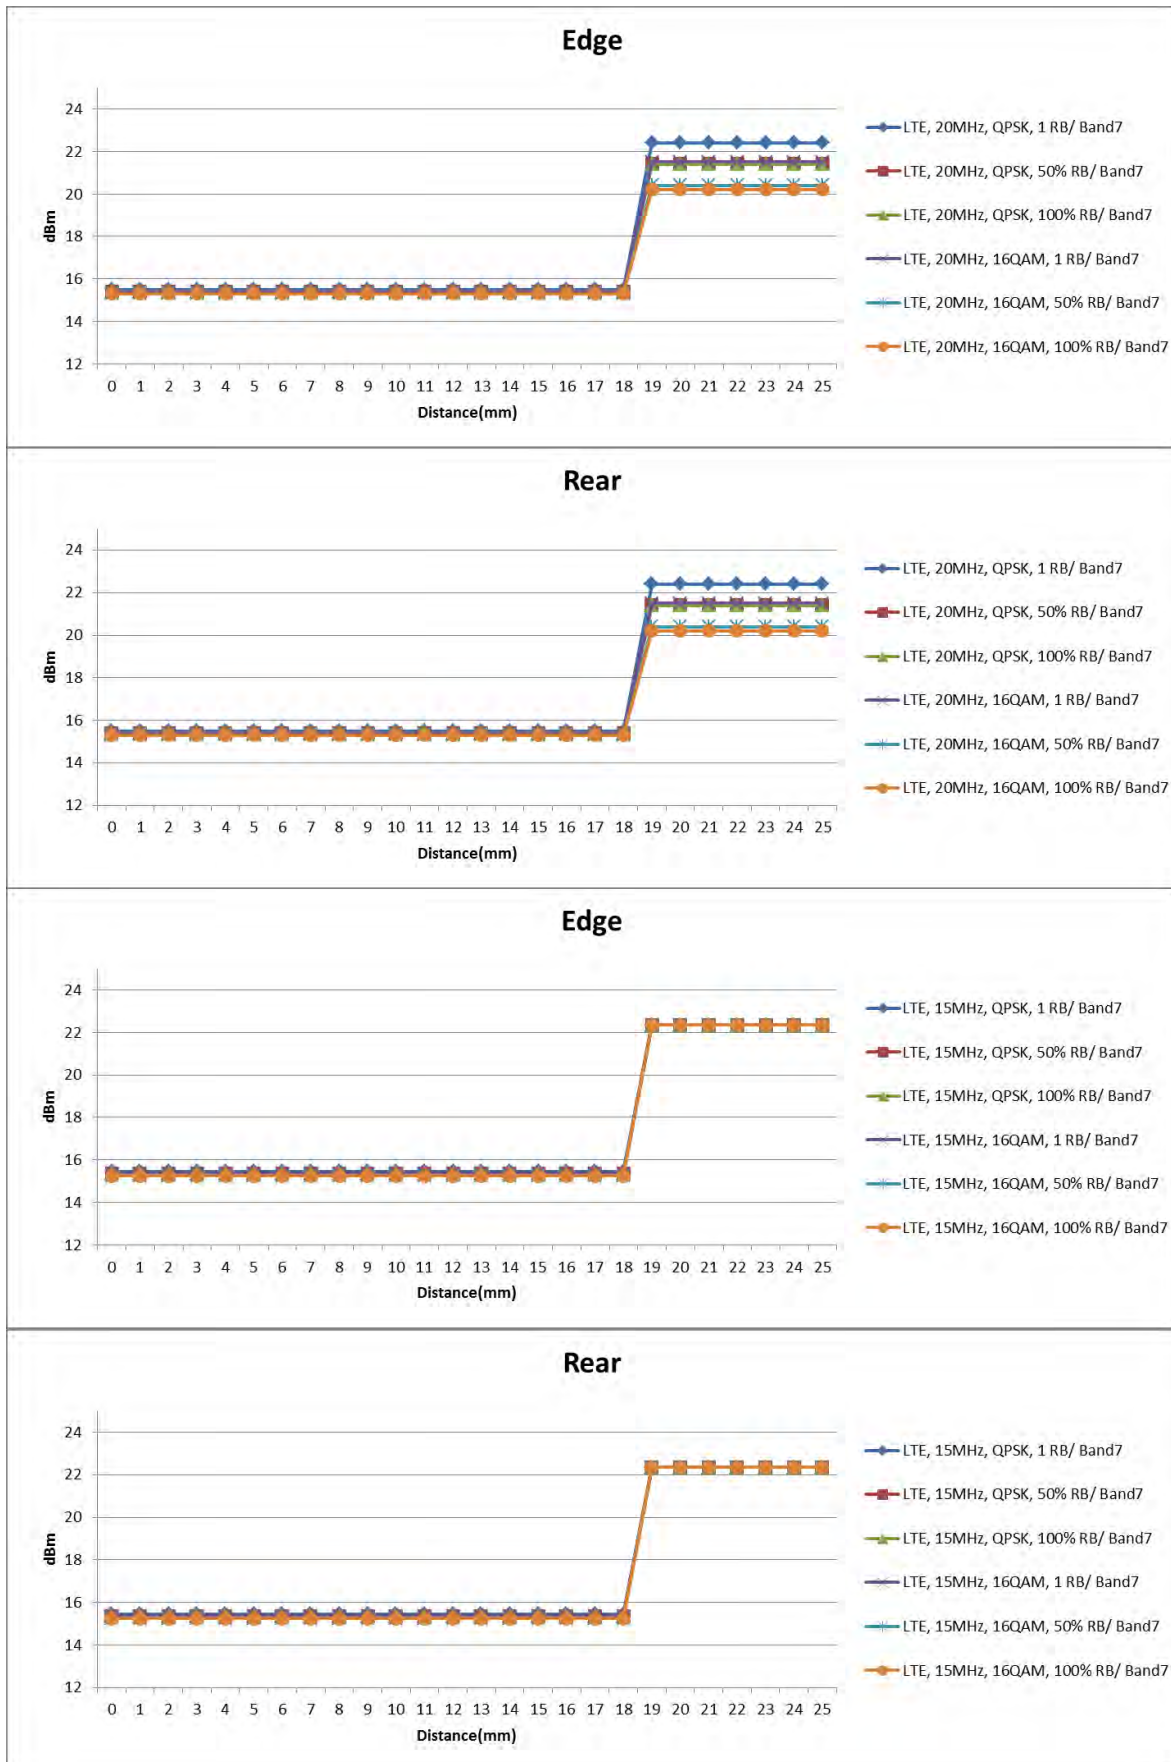

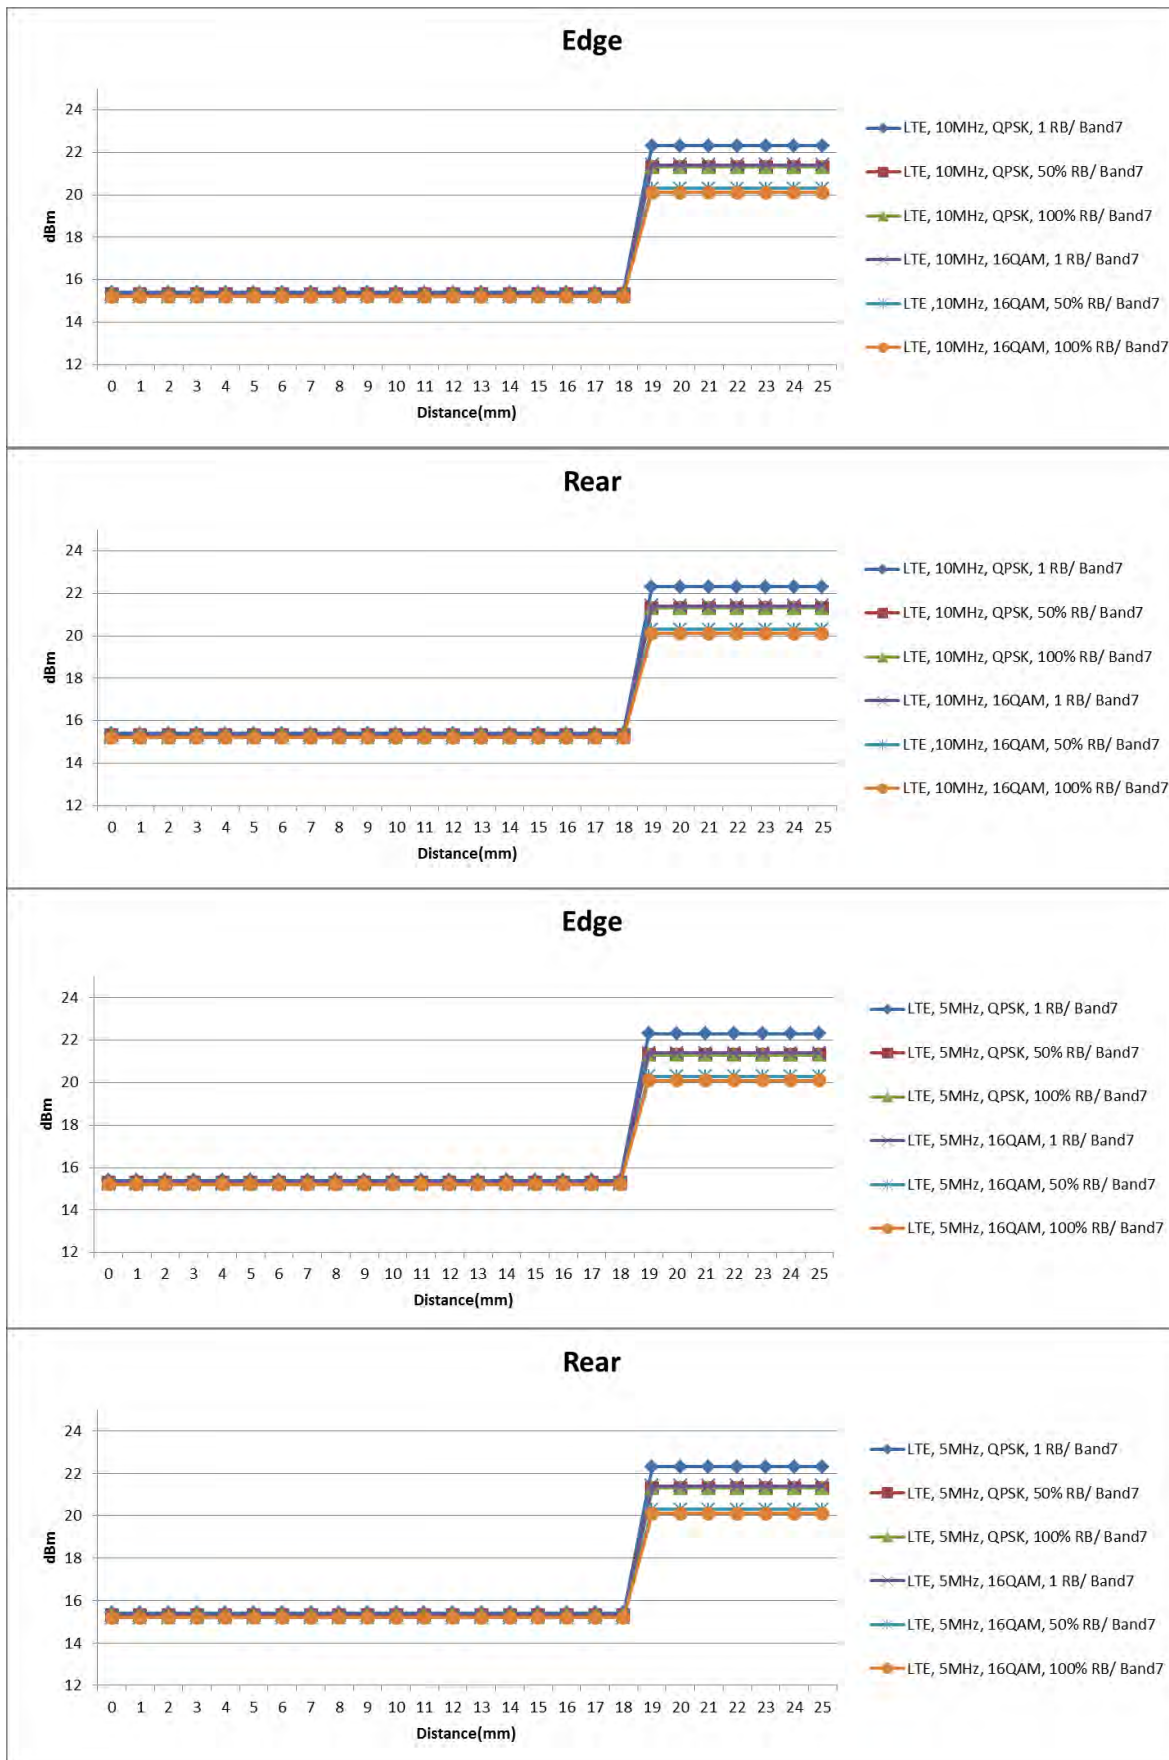


LTE Band 12

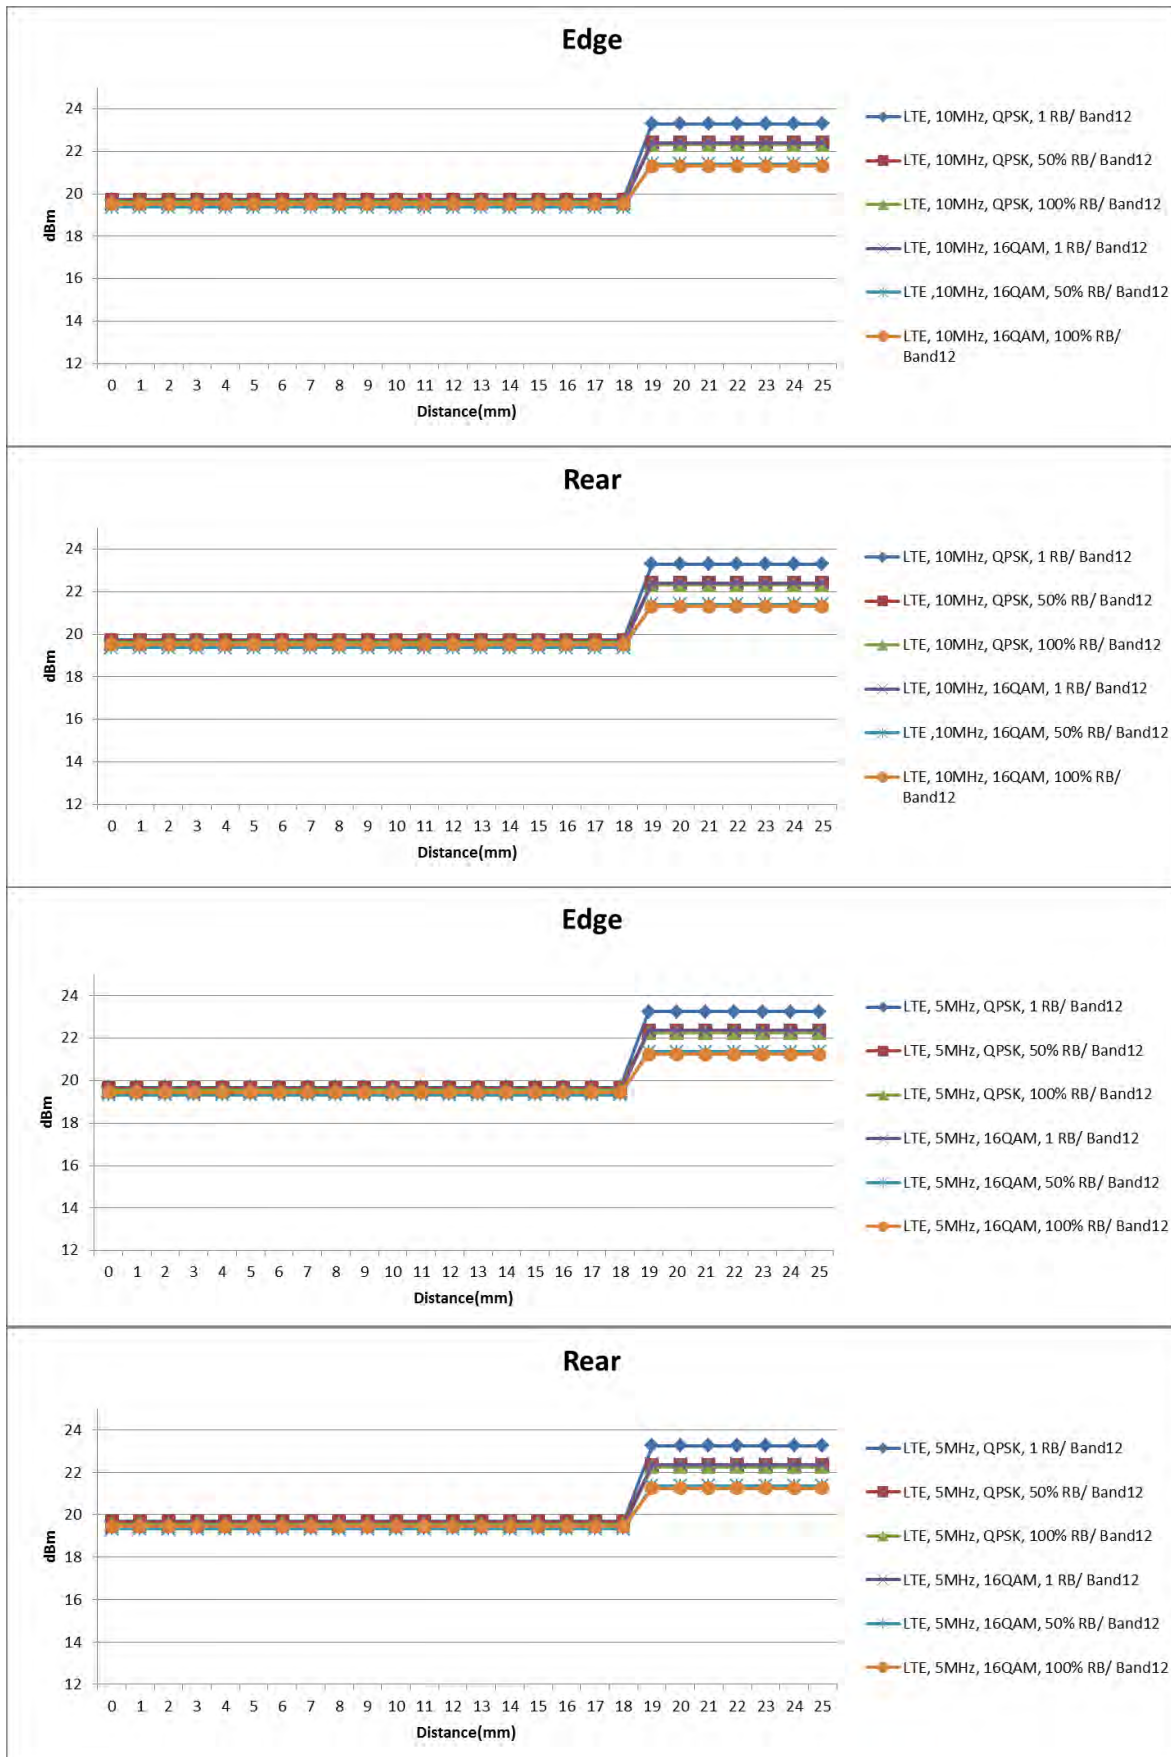


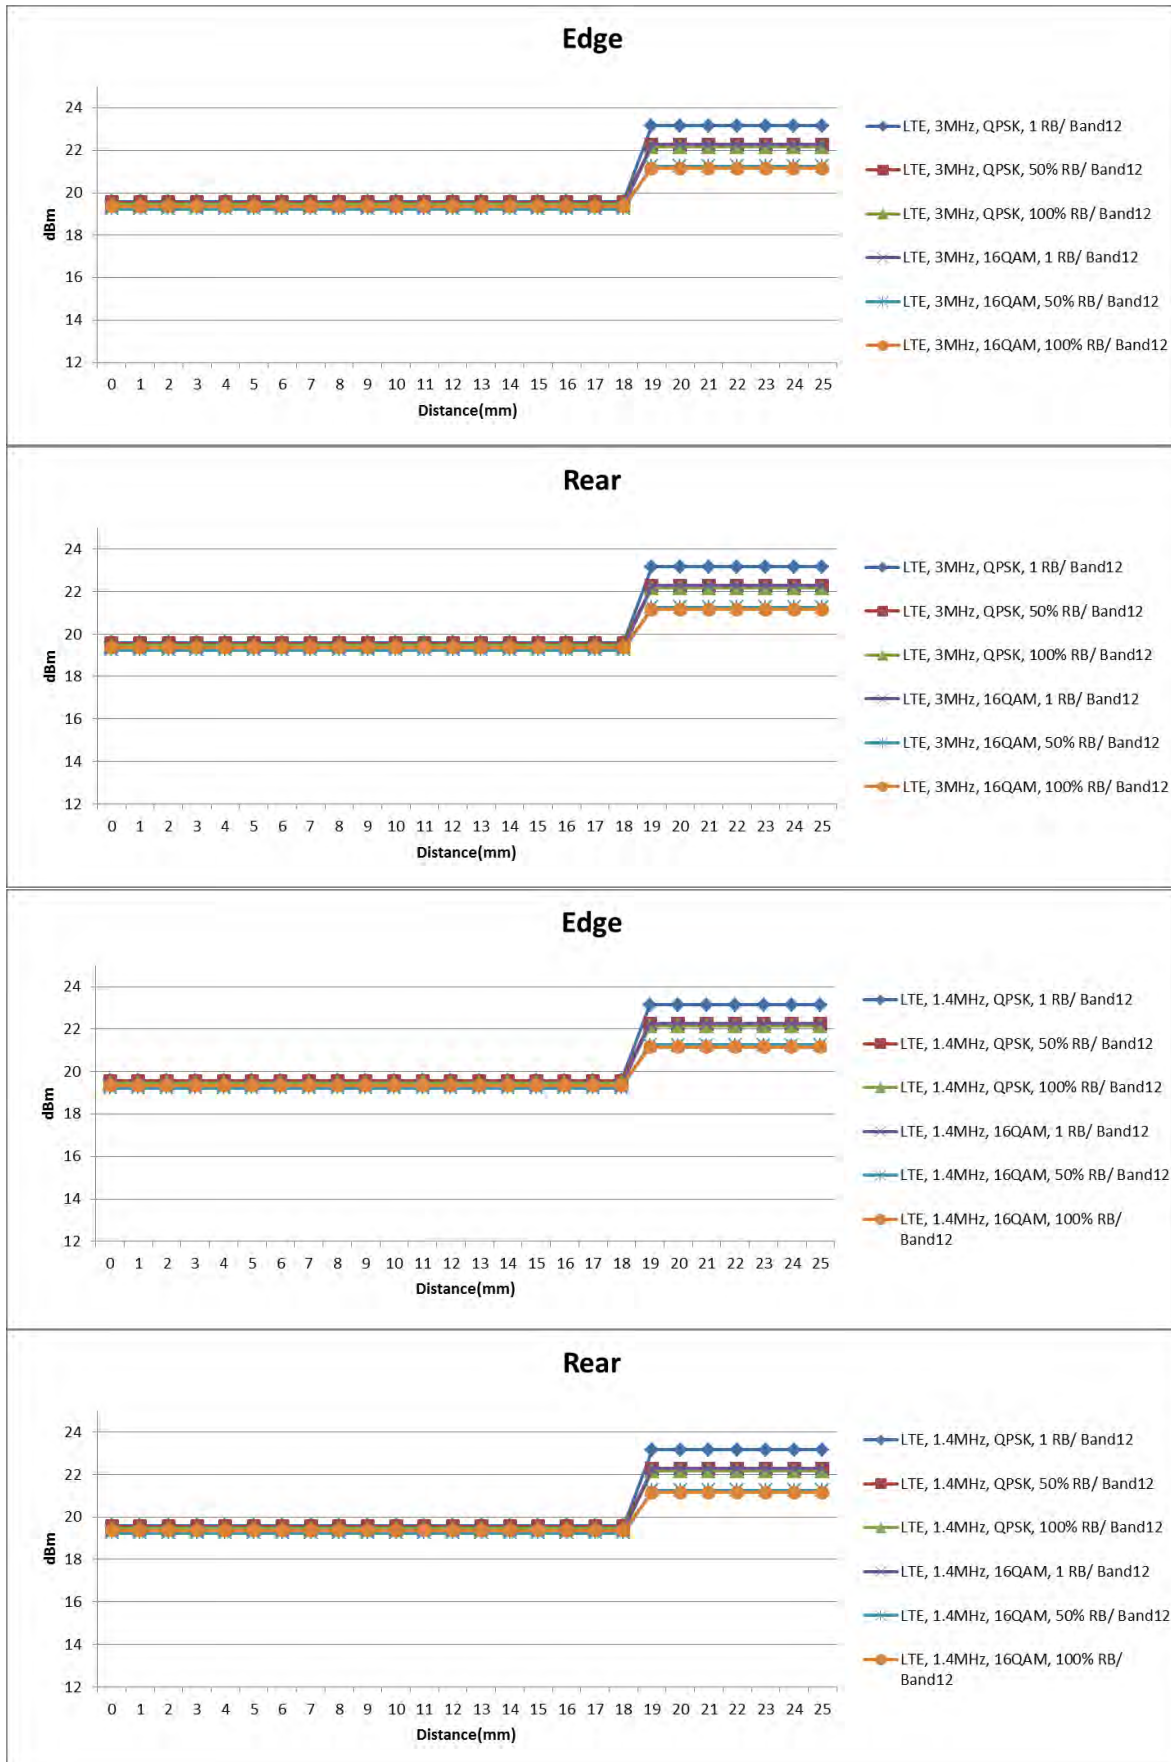






LTE Band 13

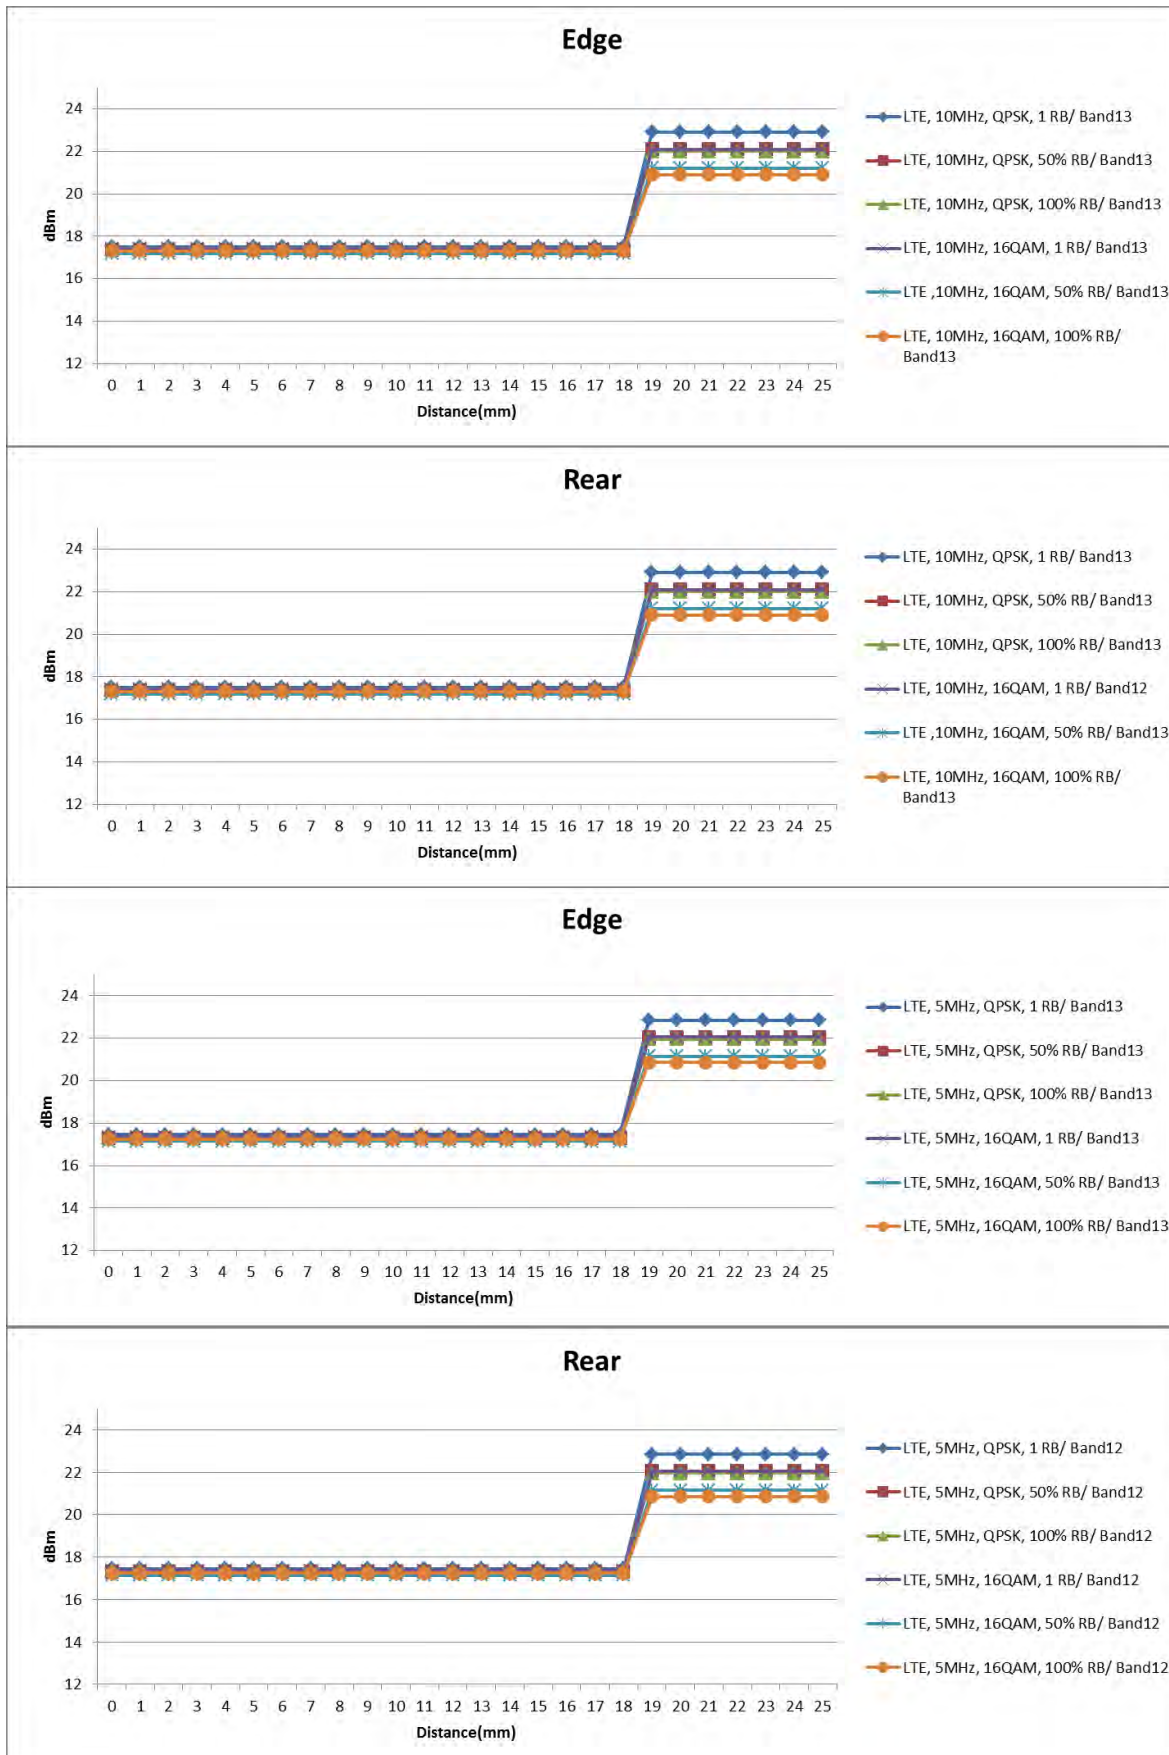


LTE Band 25

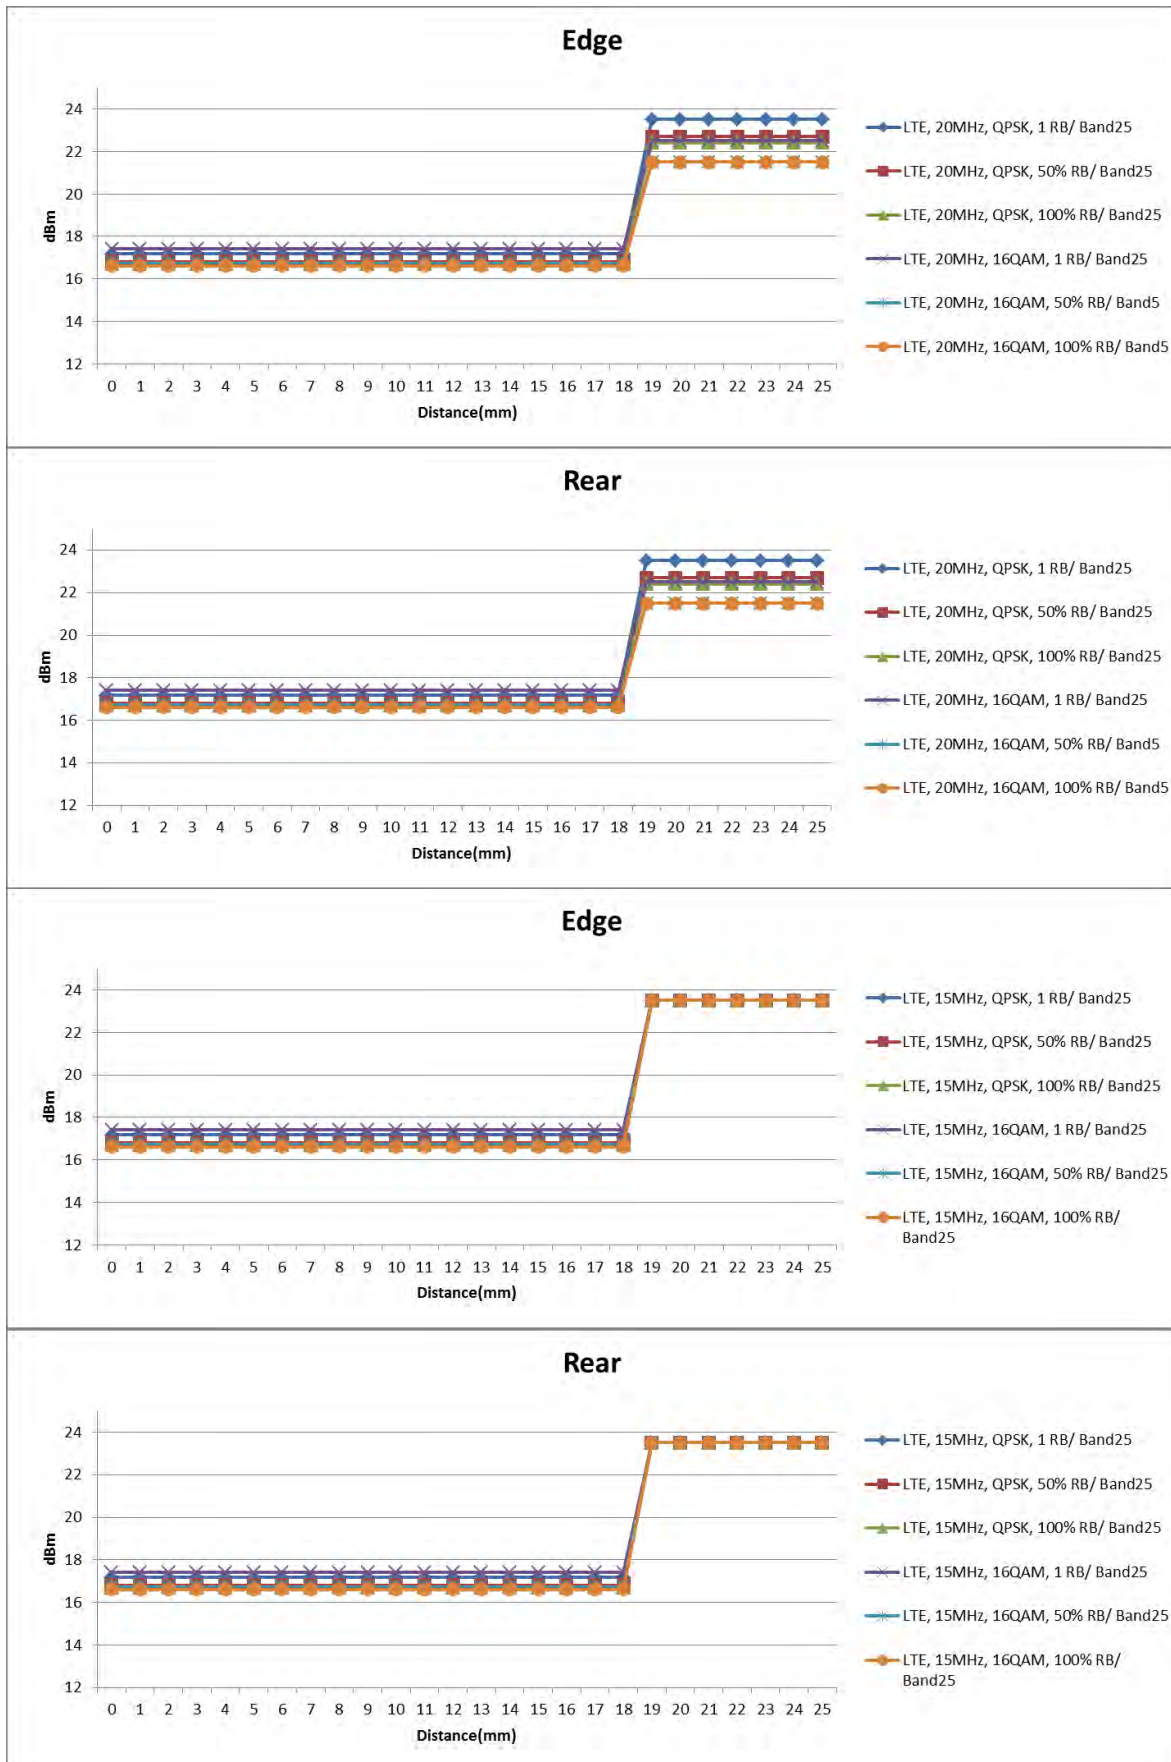


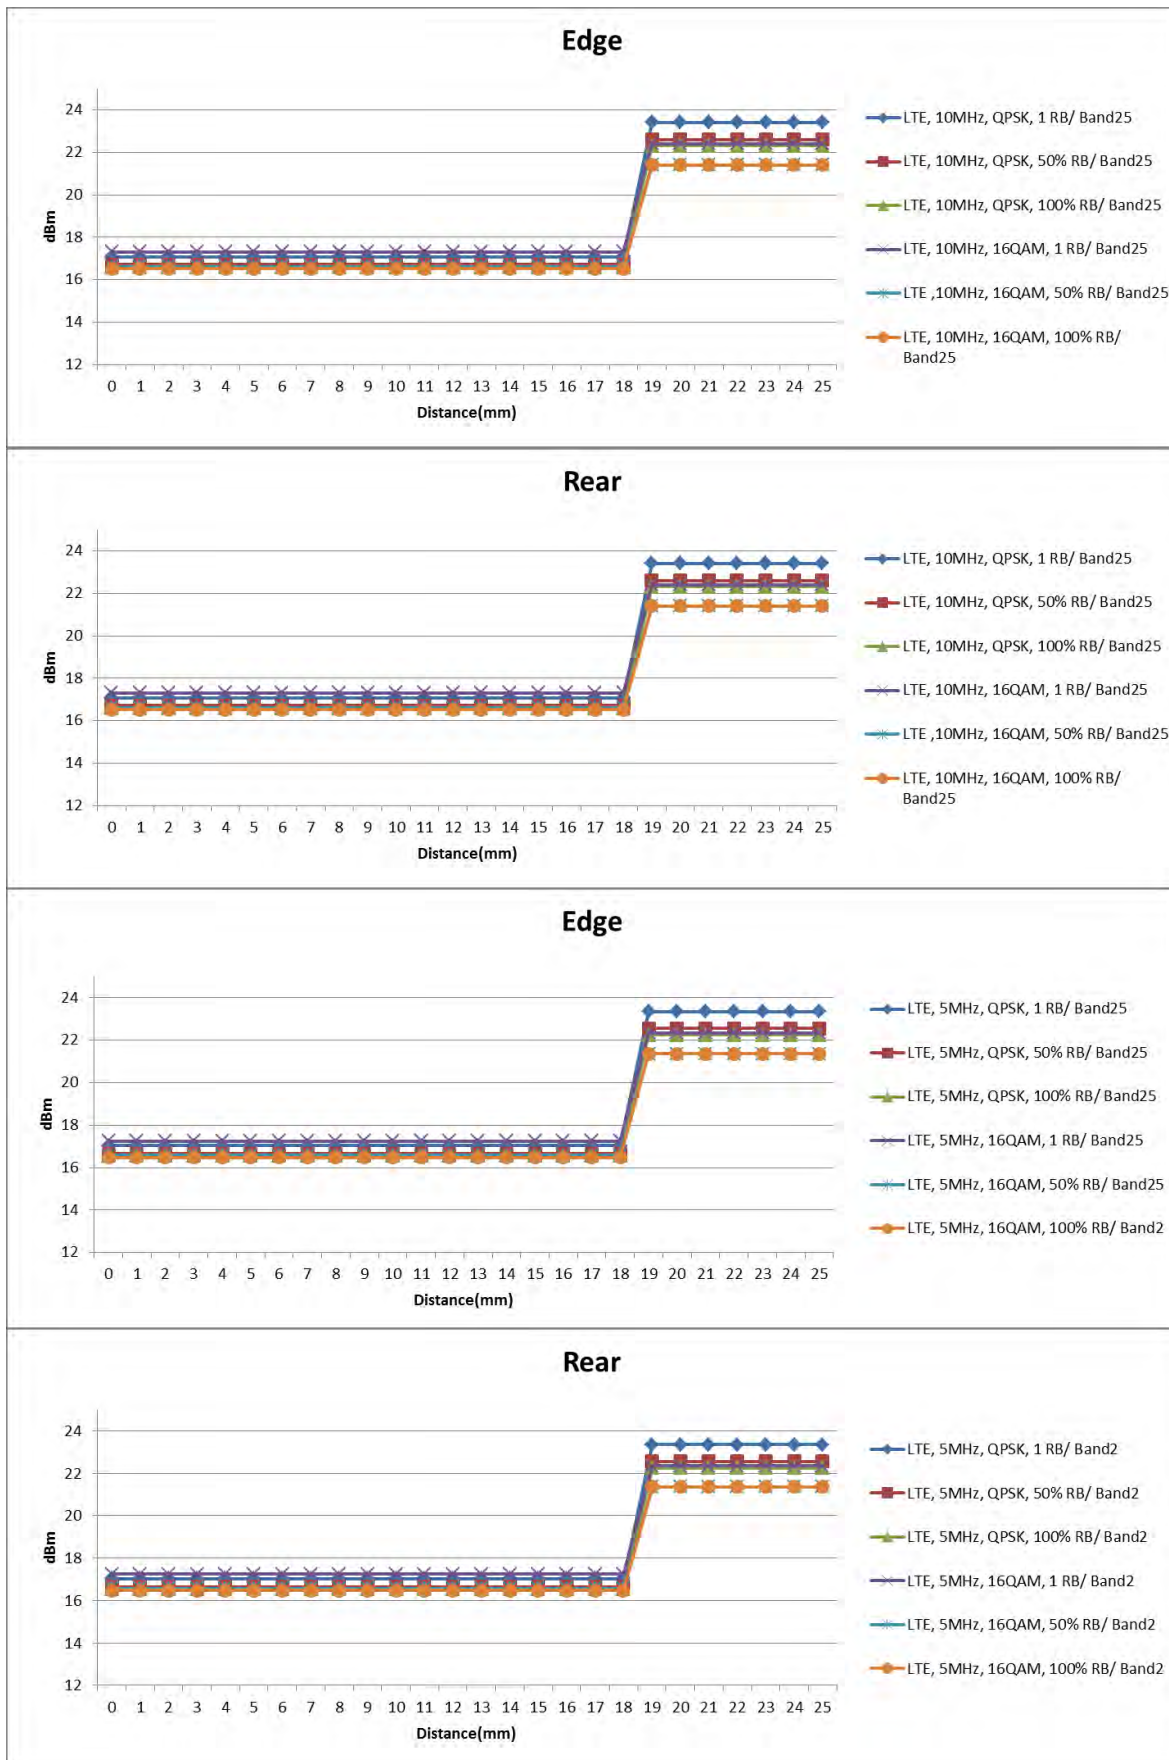


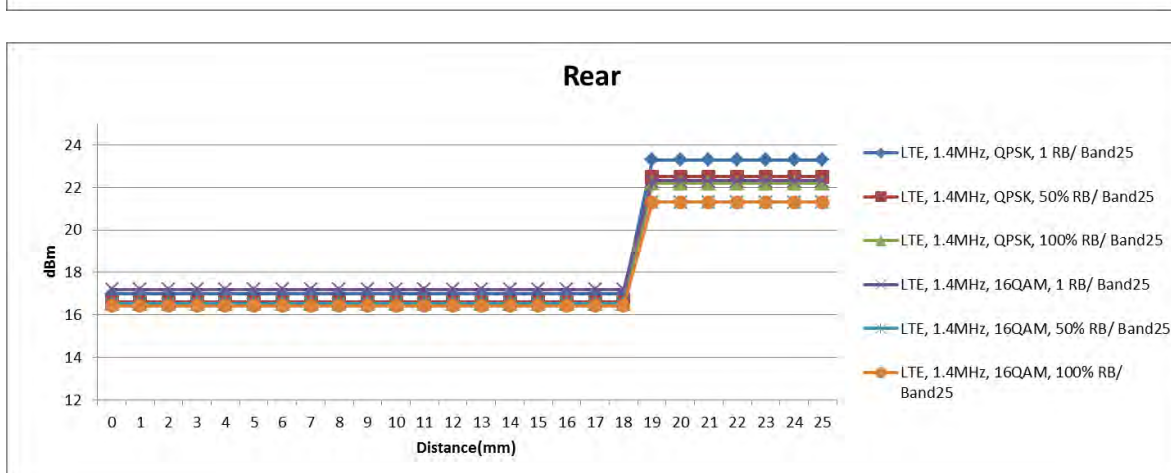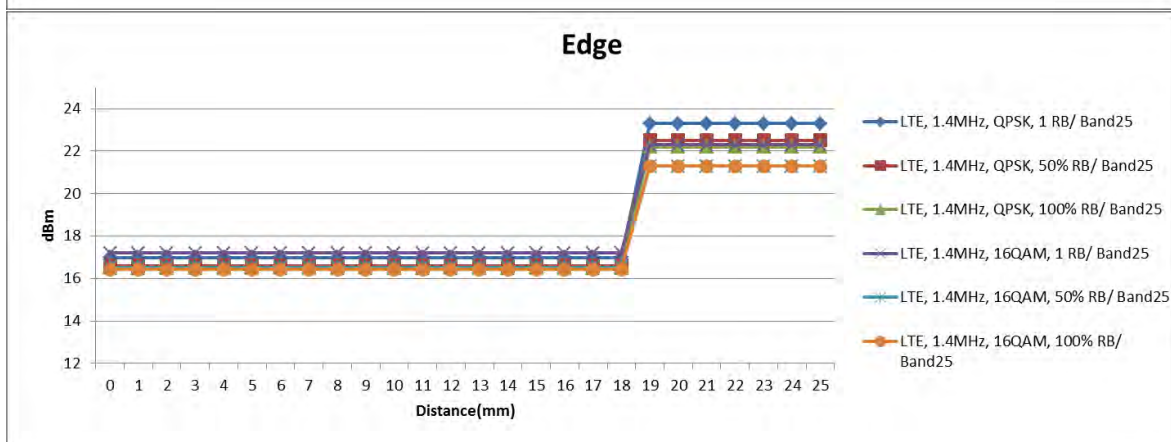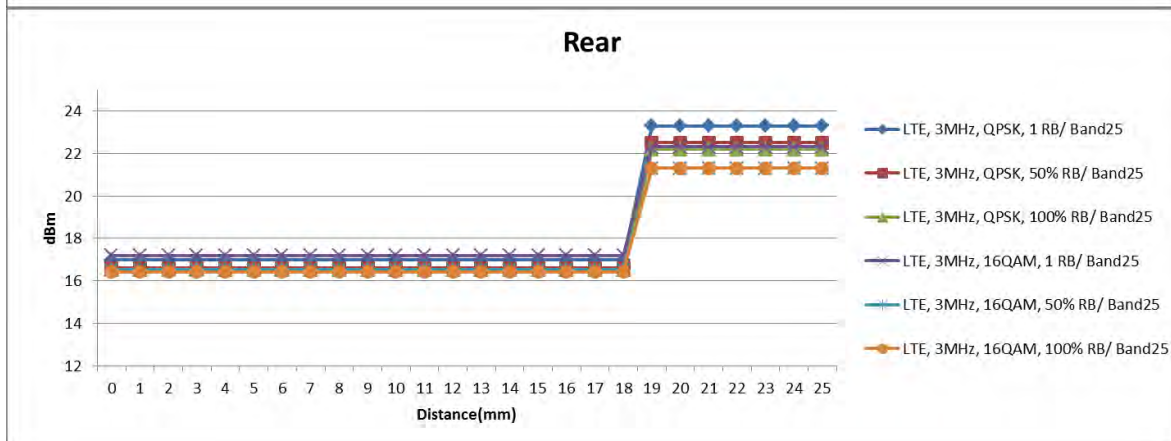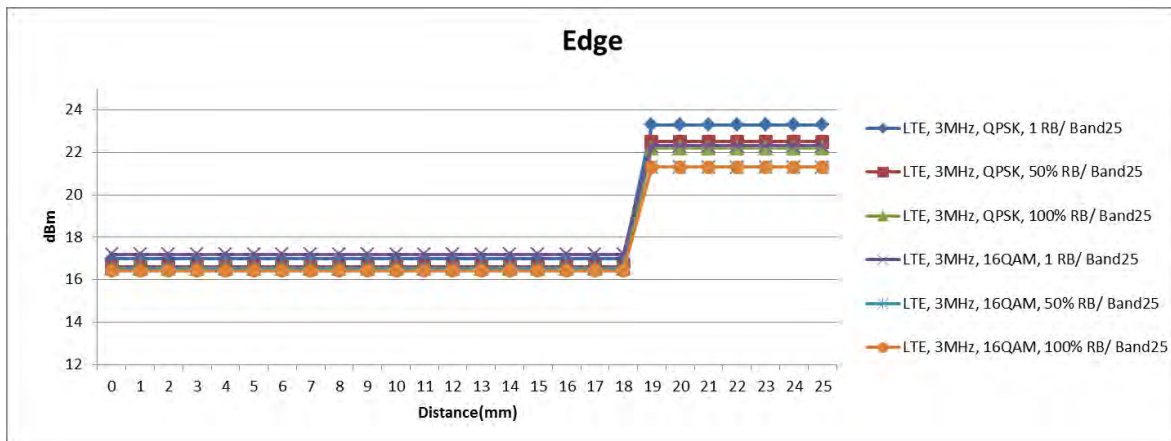


LTE Band 26

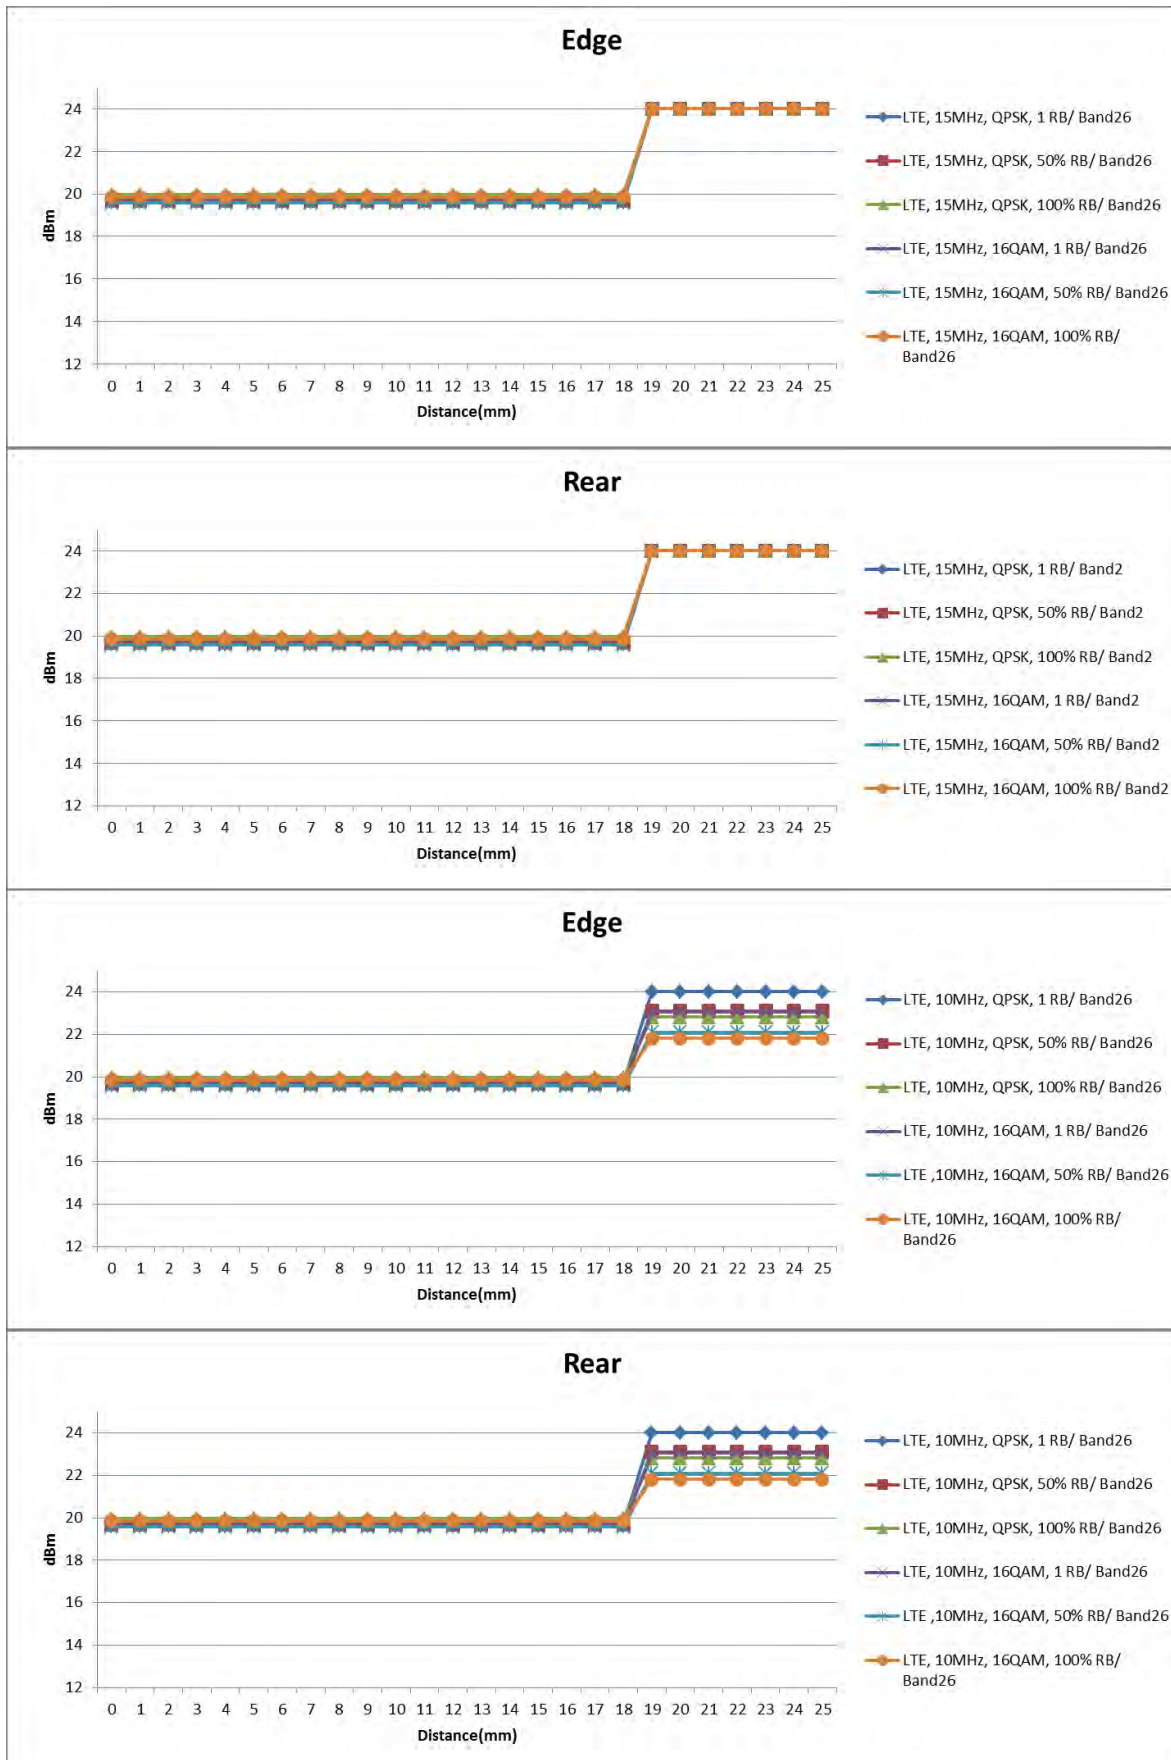

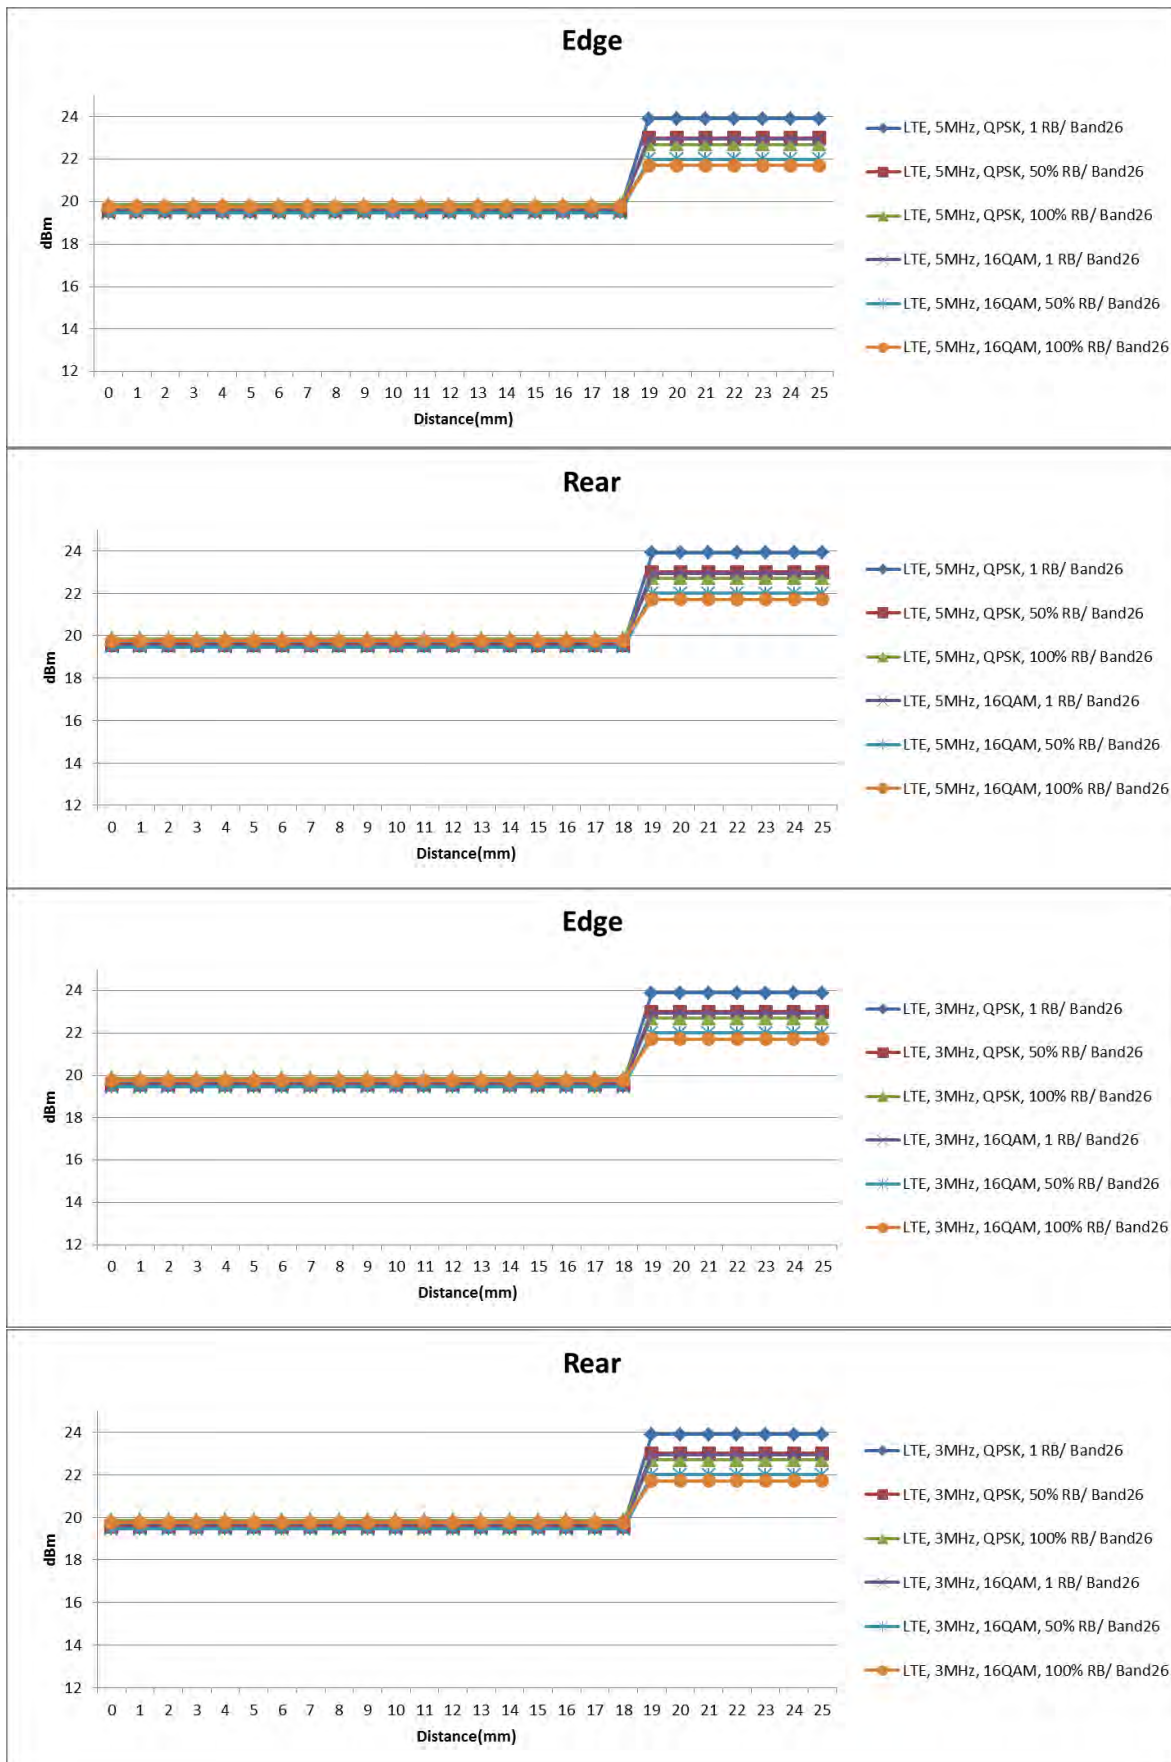


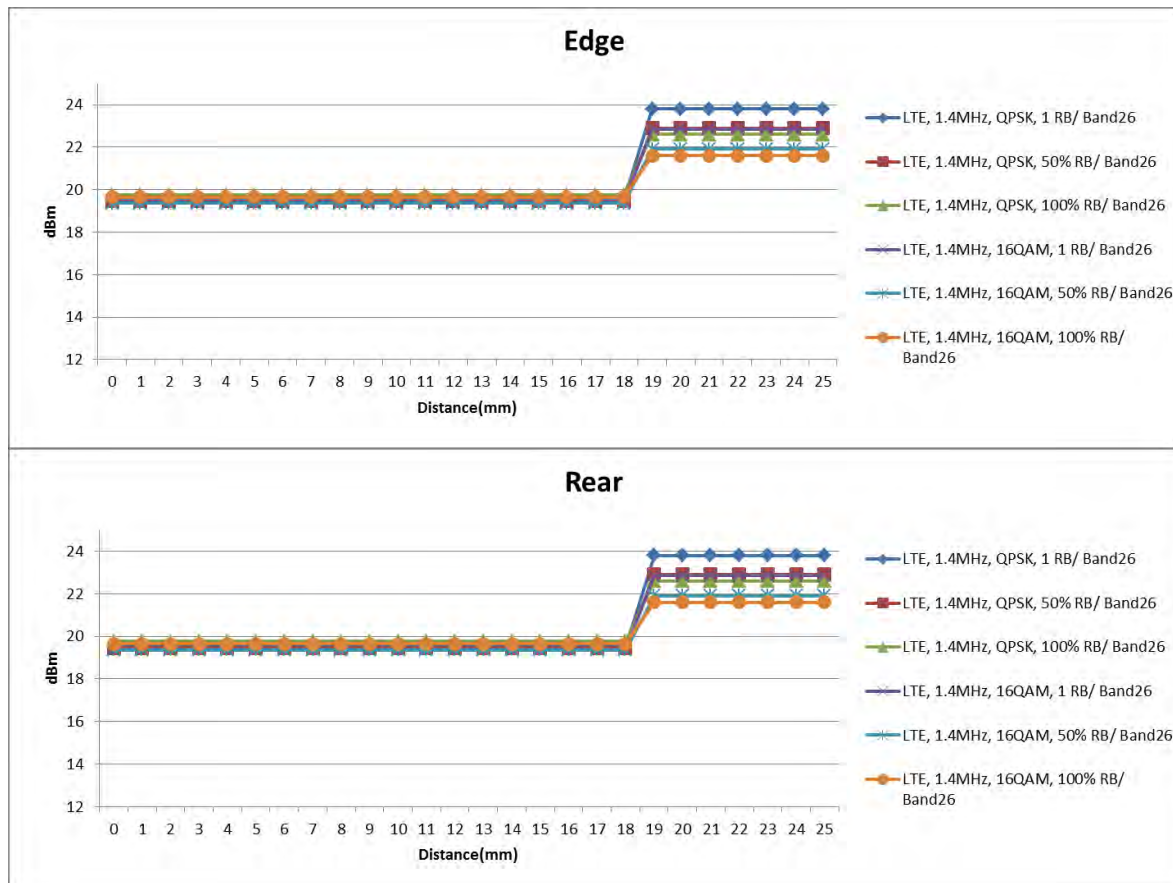


LTE Band 30

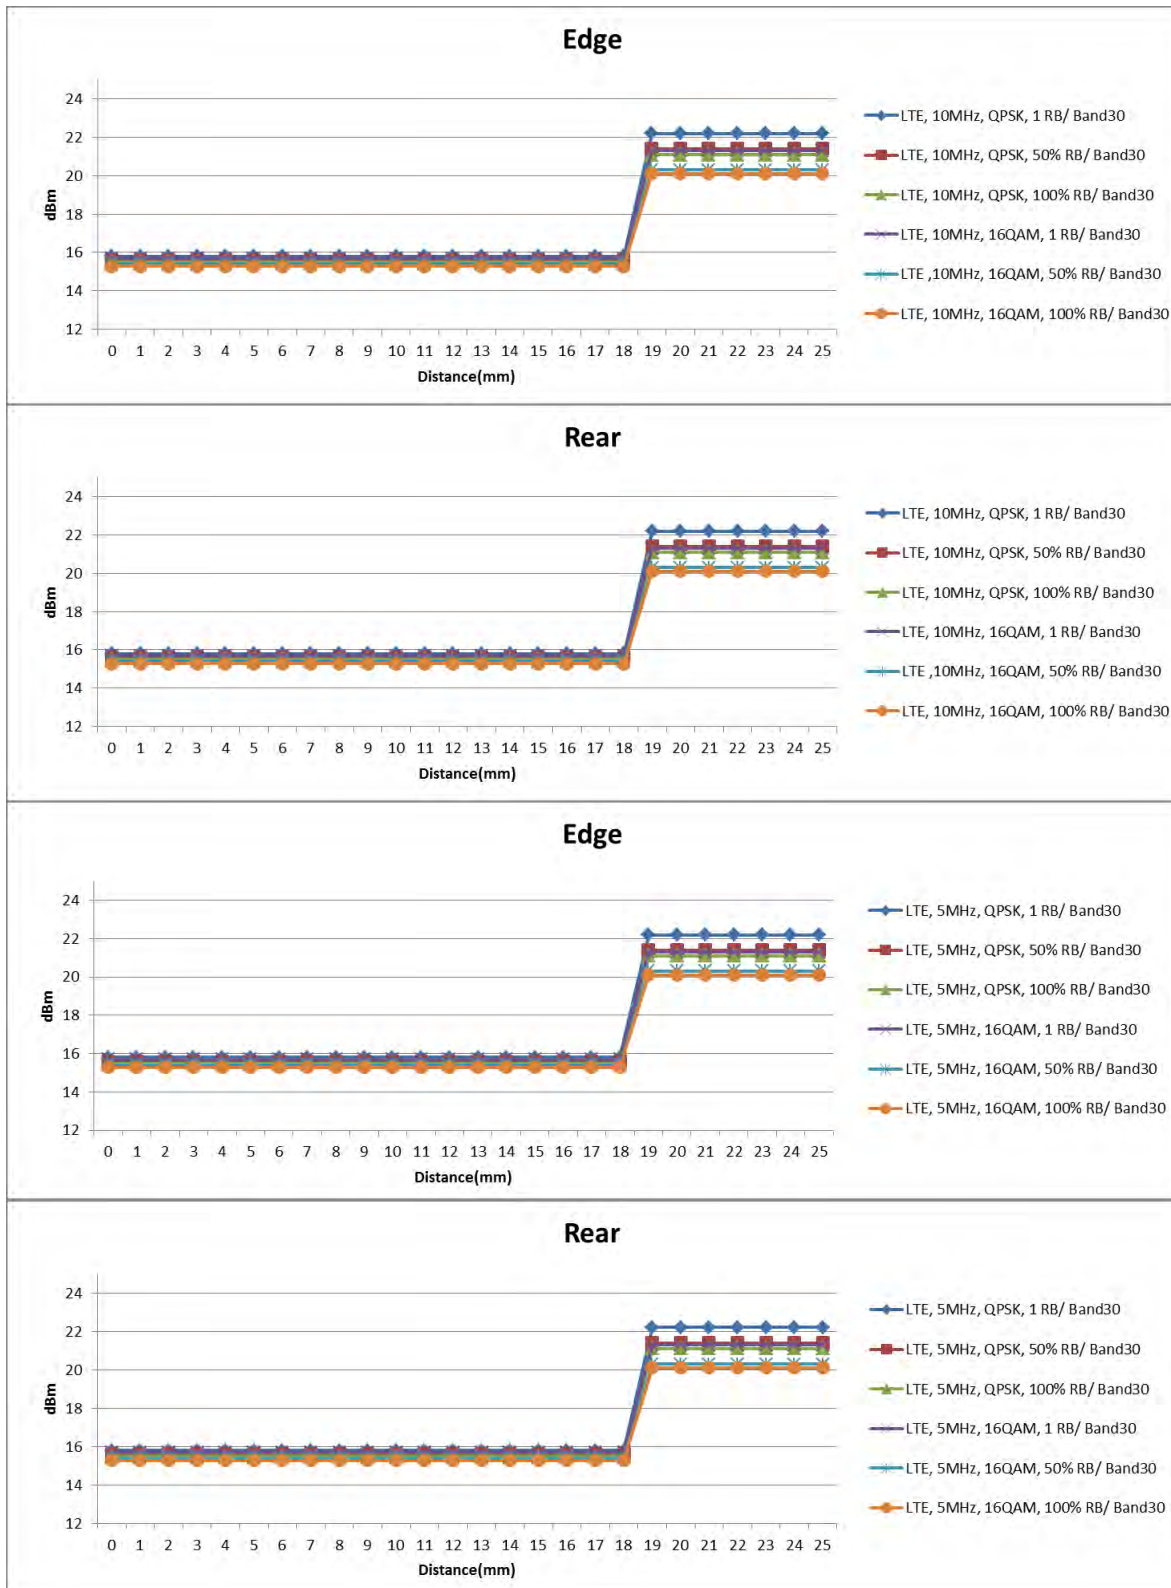

LTE Band 41

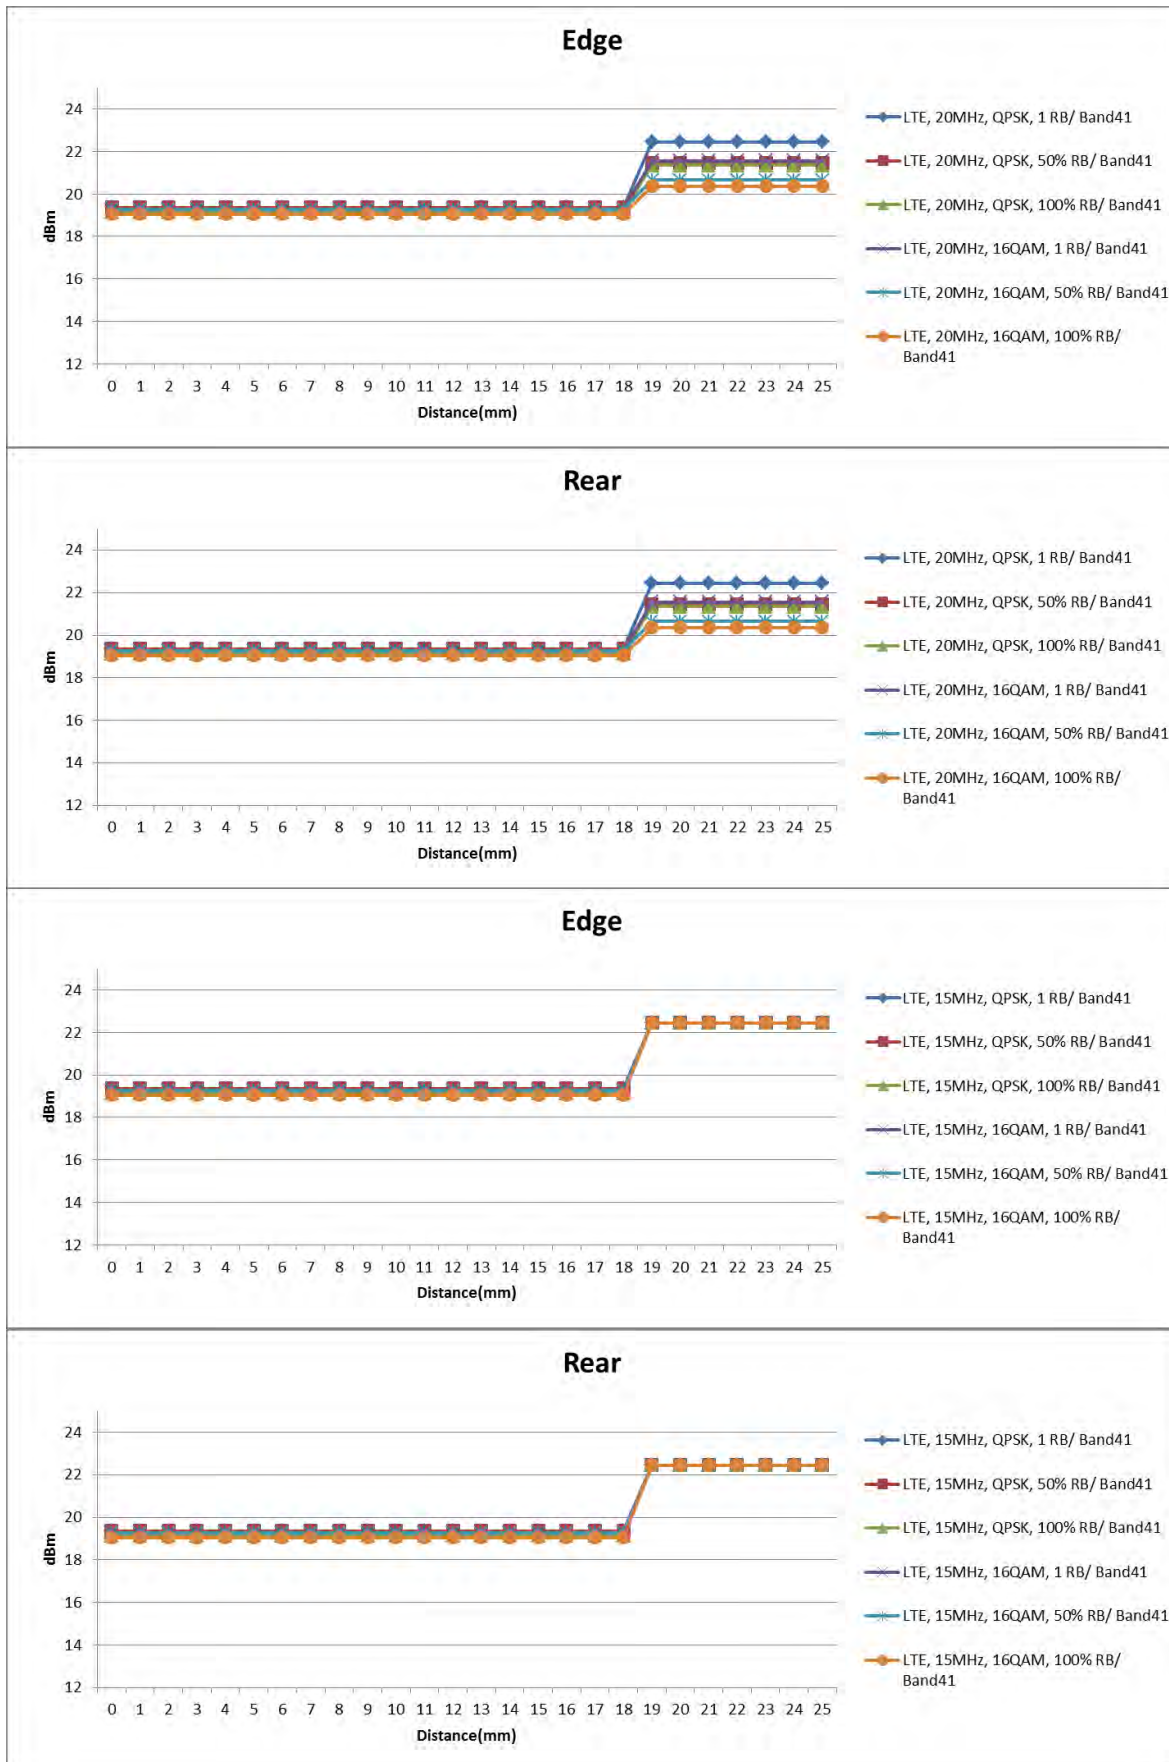

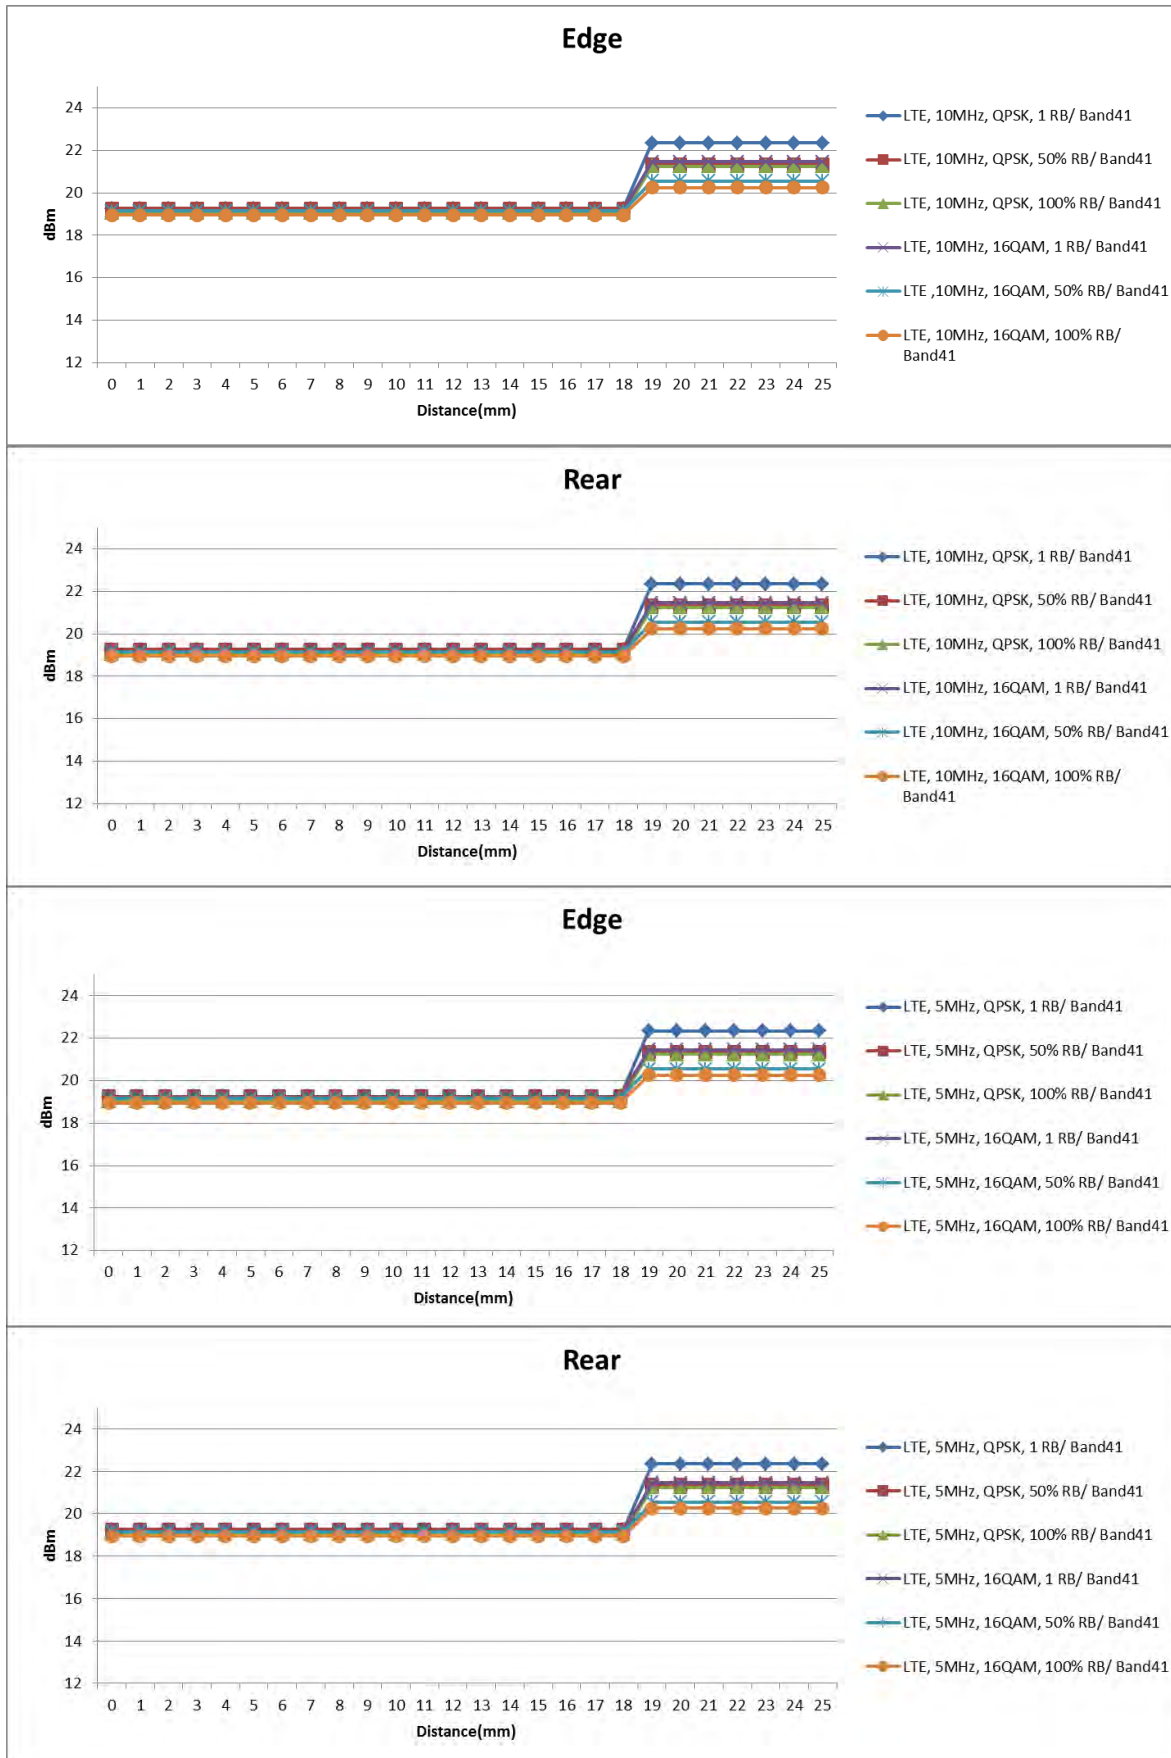

10.6 Proximity Sensor Coverage Area

According to KDB 616217 D04, Proximity Sensor Coverage Area of not request when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

11 RF Output Power Measurement

11.1 WCDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.5.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 23 dBm (+1.0/-1.0) 12.2kps RMC is used for this testing. Power control set to All bits up. A summary of these settings are illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
WCDMA Band II	Rel 99	9262/9662	1852.4	22.8	16.9
		9400/9800	1880.0	22.6	16.8
		9538/9983	1907.6	22.5	16.8
WCDMA Band IV	Rel 99	1312/1537	1712.4	22.7	16.2
		1413/1638	1732.6	22.8	16.3
		1513/1738	1752.6	22.5	16.1
WCDMA Band V	Rel 99	4132/4157	826.4	23.0	19.1
		4182/4407	836.4	23.1	19.1
		4233/4458	846.6	23.3	19.4

HSDPA

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	8/15	4/15
	β_{hs}	4/15	24/15	30/15	30/15
	CM (dB)	0	1	1.5	1.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSDPA II	1	9262/9662	1852.4	22.7	16.9
		9400/9800	1880.0	22.4	16.8
		9538/9983	1907.6	22.4	16.8
	2	9262/9662	1852.4	22.3	16.9
		9400/9800	1880.0	22.0	16.8
		9538/9983	1907.6	22.0	16.8
	3	9262/9662	1852.4	21.8	16.8
		9400/9800	1880.0	21.7	16.7
		9538/9983	1907.6	21.4	16.7
	4	9262/9662	1852.4	21.8	16.8
		9400/9800	1880.0	21.7	16.7
		9538/9983	1907.6	21.5	16.7
HSDPA IV	1	1312/1537	1712.4	22.6	16.2
		1413/1638	1732.6	22.6	16.3
		1513/1738	1752.6	22.4	16.1
	2	1312/1537	1712.4	22.2	16.2
		1413/1638	1732.6	22.2	16.3
		1513/1738	1752.6	22.0	16.1
	3	1312/1537	1712.4	21.7	16.1
		1413/1638	1732.6	21.9	16.2
		1513/1738	1752.6	21.4	16.0
	4	1312/1537	1712.4	21.7	16.1
		1413/1638	1732.6	21.9	16.2
		1513/1738	1752.6	21.5	16.0
HSDPA V	1	4132/4157	826.4	22.9	19.1
		4182/4407	836.4	23.1	19.1
		4233/4458	846.6	22.9	19.4
	2	4132/4157	826.4	22.4	19.1
		4182/4407	836.4	22.6	19.1
		4233/4458	846.6	22.4	19.4
	3	4132/4157	826.4	21.9	19.0
		4182/4407	836.4	22.1	19.0
		4233/4458	846.6	21.9	19.3
	4	4132/4157	826.4	21.9	19.0
		4182/4407	836.4	22.1	19.0
		4233/4458	846.6	21.9	19.3

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	9/15	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11		E-TFCI 11	E-TFCI 11	
		E-TFCI PO 4		E-TFCI PO 4	E-TFCI PO 4	
		E-TFCI 67		E-TFCI 92	E-TFCI 67	
		E-TFCI PO 18		E-TFCI PO 18	E-TFCI PO 18	
		E-TFCI 71		E-TFCI 71	E-TFCI 71	
		E-TFCI PO 23		E-TFCI PO 23	E-TFCI PO 23	
		E-TFCI 75		E-TFCI 75	E-TFCI 75	
		E-TFCI PO 26		E-TFCI PO 26	E-TFCI PO 26	
		E-TFCI 81		E-TFCI 81	E-TFCI 81	
		E-TFCI PO 27		E-TFCI PO 27	E-TFCI PO 27	

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSUPA II	1	9262/9662	1852.4	22.7	16.8
		9400/9800	1880.0	22.5	16.7
		9538/9983	1907.6	22.3	16.6
	2	9262/9662	1852.4	20.8	16.8
		9400/9800	1880.0	20.7	16.7
		9538/9983	1907.6	20.6	16.6
	3	9262/9662	1852.4	21.8	16.7
		9400/9800	1880.0	21.7	16.6
		9538/9983	1907.6	21.5	16.5
	4	9262/9662	1852.4	20.8	16.7
		9400/9800	1880.0	20.6	16.6
		9538/9983	1907.6	20.6	16.5
	5	9262/9662	1852.4	22.7	16.6
		9400/9800	1880.0	22.5	16.5
		9538/9983	1907.6	22.4	16.4
HSUPA IV	1	1312/1537	1712.4	22.6	16.1
		1413/1638	1732.6	22.7	16.2
		1513/1738	1752.6	22.3	16.1
	2	1312/1537	1712.4	20.7	16.1
		1413/1638	1732.6	20.9	16.2
		1513/1738	1752.6	20.6	16.1
	3	1312/1537	1712.4	21.7	16.0
		1413/1638	1732.6	21.9	16.1
		1513/1738	1752.6	21.5	16.0
	4	1312/1537	1712.4	20.7	16.0
		1413/1638	1732.6	20.8	16.1
		1513/1738	1752.6	20.6	16.0
	5	1312/1537	1712.4	22.6	15.9
		1413/1638	1732.6	22.7	16.0
		1513/1738	1752.6	22.4	15.9
HSUPA V	1	4132/4157	826.4	22.9	19.0
		4182/4407	836.4	23.1	19.0
		4233/4458	846.6	22.9	19.3
	2	4132/4157	826.4	20.9	19.0
		4182/4407	836.4	21.1	19.0
		4233/4458	846.6	20.9	19.3
	3	4132/4157	826.4	21.9	18.9
		4182/4407	836.4	22.1	18.9
		4233/4458	846.6	21.9	19.2
	4	4132/4157	826.4	20.9	18.9
		4182/4407	836.4	21.1	18.9
		4233/4458	846.6	20.9	19.2
	5	4132/4157	826.4	22.9	18.8
		4182/4407	836.4	23.1	18.8
		4233/4458	846.6	22.9	19.1

11.2 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

11.2.1 LTE Band 2

Output power table

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	20	18700	1860.0	QPSK	1	0	0	23.9	17.2
					1	49	0	23.7	16.6
					1	99	0	23.6	16.7
					50	0	1	23.0	16.9
					50	24	1	22.9	16.6
					50	49	1	22.8	16.7
					100	0	1	22.6	16.8
				16QAM	1	0	1	22.9	17.0
					1	49	1	22.8	17.0
					1	99	1	22.7	16.9
					50	0	2	21.9	16.8
					50	24	2	21.8	16.7
					50	49	2	21.8	16.5
					100	0	2	21.6	16.5
		18900	1880.0	QPSK	1	0	0	23.6	17.0
					1	49	0	23.4	16.5
					1	99	0	23.2	16.3
					50	0	1	22.6	16.4
					50	24	1	22.5	16.0
					50	49	1	22.3	16.0
					100	0	1	22.2	16.1
				16QAM	1	0	1	22.6	16.9
					1	49	1	22.5	16.8
					1	99	1	22.4	16.8
					50	0	2	21.7	16.4
					50	24	2	21.6	16.3
					50	49	2	21.4	16.3
					100	0	2	21.2	16.1
		19100	1900.0	QPSK	1	0	0	23.3	16.8
					1	49	0	23.2	16.7
					1	99	0	23.1	16.6
					50	0	1	22.4	16.3
					50	24	1	22.2	16.1
					50	49	1	22.2	16.1
					100	0	1	22.1	16.3
				16QAM	1	0	1	22.4	16.7
					1	49	1	22.2	16.7
					1	99	1	22.1	16.6
					50	0	2	21.4	16.3
					50	24	2	21.3	16.0
					50	49	2	21.2	16.0
					100	0	2	21.1	16.2


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	15	18675	1857.5	QPSK	1	0	0	23.8	17.2
					1	37	0	23.7	16.6
					1	74	0	23.6	16.7
					36	0	1	23.0	16.8
					36	18	1	22.9	16.6
					36	35	1	22.8	16.7
					75	0	1	22.6	16.8
				16QAM	1	0	1	22.9	17.0
					1	37	1	22.8	17.0
					1	74	1	22.7	16.9
					36	0	2	21.9	16.8
					36	18	2	21.8	16.7
					36	35	2	21.8	16.5
					75	0	2	21.6	16.5
		18900	1880.0	QPSK	1	0	0	23.5	16.9
					1	37	0	23.4	16.5
					1	74	0	23.2	16.3
					36	0	1	22.6	16.3
					36	18	1	22.5	15.9
					36	35	1	22.3	16.0
					75	0	1	22.2	16.1
				16QAM	1	0	1	22.6	16.9
					1	37	1	22.5	16.8
					1	74	1	22.4	16.8
					36	0	2	21.7	16.3
					36	18	2	21.6	16.3
					36	35	2	21.4	16.3
					75	0	2	21.2	16.1
		19125	1902.5	QPSK	1	0	0	23.3	16.7
					1	37	0	23.2	16.7
					1	74	0	23.1	16.6
					36	0	1	22.4	16.3
					36	18	1	22.2	16.1
					36	35	1	22.2	16.1
					75	0	1	22.1	16.2
				16QAM	1	0	1	22.4	16.7
					1	37	1	22.2	16.7
					1	74	1	22.1	16.6
					36	0	2	21.4	16.2
					36	18	2	21.3	16.0
					36	35	2	21.2	16.0
					75	0	2	21.1	16.2

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	10	18650	1855.0	QPSK	1	0	0	23.8	17.1
					1	24	0	23.6	16.5
					1	49	0	23.5	16.6
					25	0	1	22.9	16.8
					25	12	1	22.8	16.5
					25	24	1	22.7	16.6
					50	0	1	22.5	16.7
				16QAM	1	0	1	22.8	16.9
					1	24	1	22.7	16.9
					1	49	1	22.6	16.8
					25	0	2	21.8	16.7
					25	12	2	21.7	16.6
					25	24	2	21.7	16.4
					50	0	2	21.5	16.4
		18900	1880.0	QPSK	1	0	0	23.5	16.9
					1	24	0	23.3	16.4
					1	49	0	23.1	16.2
					25	0	1	22.5	16.3
					25	12	1	22.4	15.9
					25	24	1	22.2	15.9
					50	0	1	22.1	16.0
				16QAM	1	0	1	22.5	16.8
					1	24	1	22.4	16.7
					1	49	1	22.3	16.7
					25	0	2	21.6	16.3
					25	12	2	21.5	16.2
					25	24	2	21.3	16.2
					50	0	2	21.1	16.0
		19150	1905.0	QPSK	1	0	0	23.2	16.7
					1	24	0	23.1	16.6
					1	49	0	23.0	16.5
					25	0	1	22.3	16.2
					25	12	1	22.1	16.0
					25	24	1	22.1	16.0
					50	0	1	22.0	16.2
				16QAM	1	0	1	22.3	16.6
					1	24	1	22.1	16.6
					1	49	1	22.0	16.5
					25	0	2	21.3	16.2
					25	12	2	21.2	15.9
					25	24	2	21.1	15.9
					50	0	2	21.0	16.1


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	5	18625	1852.5	QPSK	1	0	0	23.7	17.1
					1	12	0	23.6	16.5
					1	24	0	23.5	16.6
					12	0	1	22.9	16.7
					12	6	1	22.8	16.5
					12	11	1	22.7	16.6
					25	0	1	22.5	16.7
				16QAM	1	0	1	22.8	16.9
					1	12	1	22.7	16.9
					1	24	1	22.6	16.8
					12	0	2	21.8	16.7
					12	6	2	21.7	16.6
					12	11	2	21.7	16.4
					25	0	2	21.5	16.4
		18900	1880.0	QPSK	1	0	0	23.4	16.8
					1	12	0	23.3	16.4
					1	24	0	23.1	16.2
					12	0	1	22.5	16.2
					12	6	1	22.4	15.8
					12	11	1	22.2	15.9
					25	0	1	22.1	16.0
				16QAM	1	0	1	22.5	16.8
					1	12	1	22.4	16.7
					1	24	1	22.3	16.7
					12	0	2	21.6	16.2
					12	6	2	21.5	16.2
					12	11	2	21.3	16.2
					25	0	2	21.1	16.0
		19175	1907.5	QPSK	1	0	0	23.2	16.6
					1	12	0	23.1	16.6
					1	24	0	23.0	16.5
					12	0	1	22.3	16.2
					12	6	1	22.1	16.0
					12	11	1	22.1	16.0
					25	0	1	22.0	16.1
				16QAM	1	0	1	22.3	16.6
					1	12	1	22.1	16.6
					1	24	1	22.0	16.5
					12	0	2	21.3	16.1
					12	6	2	21.2	15.9
					12	11	2	21.1	15.9
					25	0	2	21.0	16.1

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	3	18615	1851.5	QPSK	1	0	0	23.7	17.0
					1	7	0	23.5	16.4
					1	14	0	23.4	16.5
					8	0	1	22.8	16.7
					8	4	1	22.7	16.4
					8	7	1	22.6	16.5
					15	0	1	22.4	16.6
				16QAM	1	0	1	22.7	16.8
					1	7	1	22.6	16.8
					1	14	1	22.5	16.7
					8	0	2	21.7	16.6
					8	4	2	21.6	16.5
					8	7	2	21.6	16.3
					15	0	2	21.4	16.3
		18900	1880.0	QPSK	1	0	0	23.4	16.8
					1	7	0	23.2	16.3
					1	14	0	23.0	16.1
					8	0	1	22.4	16.2
					8	4	1	22.3	15.8
					8	7	1	22.1	15.8
					15	0	1	22.0	15.9
				16QAM	1	0	1	22.4	16.7
					1	7	1	22.3	16.6
					1	14	1	22.2	16.6
					8	0	2	21.5	16.2
					8	4	2	21.4	16.1
					8	7	2	21.2	16.1
					15	0	2	21.3	15.9
		19184	1908.4	QPSK	1	0	0	23.1	16.6
					1	7	0	23.0	16.5
					1	14	0	22.9	16.4
					8	0	1	22.2	16.1
					8	4	1	22.0	15.9
					8	7	1	22.0	15.9
					15	0	1	21.9	16.1
				16QAM	1	0	1	22.2	16.5
					1	7	1	22.0	16.5
					1	14	1	21.9	16.4
					8	0	2	21.2	16.1
					8	4	2	21.1	15.8
					8	7	2	21.0	15.8
					15	0	2	21.1	16.0


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	1.4	18607	1850.7	QPSK	1	0	0	23.6	17.0
					1	2	0	23.5	16.4
					1	5	0	23.4	16.5
					3	0	1	22.8	16.6
					3	1	1	22.7	16.4
					3	2	1	22.6	16.5
					6	0	1	22.4	16.6
				16QAM	1	0	1	22.7	16.8
					1	2	1	22.6	16.8
					1	5	1	22.5	16.7
					3	0	2	21.7	16.6
					3	1	2	21.6	16.5
					3	2	2	21.6	16.3
					6	0	2	21.4	16.3
		18900	1880.0	QPSK	1	0	0	23.3	16.7
					1	2	0	23.2	16.3
					1	5	0	23.0	16.1
					3	0	1	22.4	16.1
					3	1	1	22.3	15.7
					3	2	1	22.1	15.8
					6	0	1	22.0	15.9
				16QAM	1	0	1	22.4	16.7
					1	2	1	22.3	16.6
					1	5	1	22.2	16.6
					3	0	2	21.5	16.1
					3	1	2	21.4	16.1
					3	2	2	21.2	16.1
					6	0	2	21.1	15.9
		19192	1909.2	QPSK	1	0	0	23.1	16.5
					1	2	0	23.0	16.5
					1	5	0	22.9	16.4
					3	0	1	22.2	16.1
					3	1	1	22.0	15.9
					3	2	1	22.0	15.9
					6	0	1	21.9	16.0
				16QAM	1	0	1	22.2	16.5
					1	2	1	22.0	16.5
					1	5	1	21.9	16.4
					3	0	2	21.2	16.0
					3	1	2	21.1	15.8
					3	2	2	21.0	15.8
					6	0	2	20.9	16.0

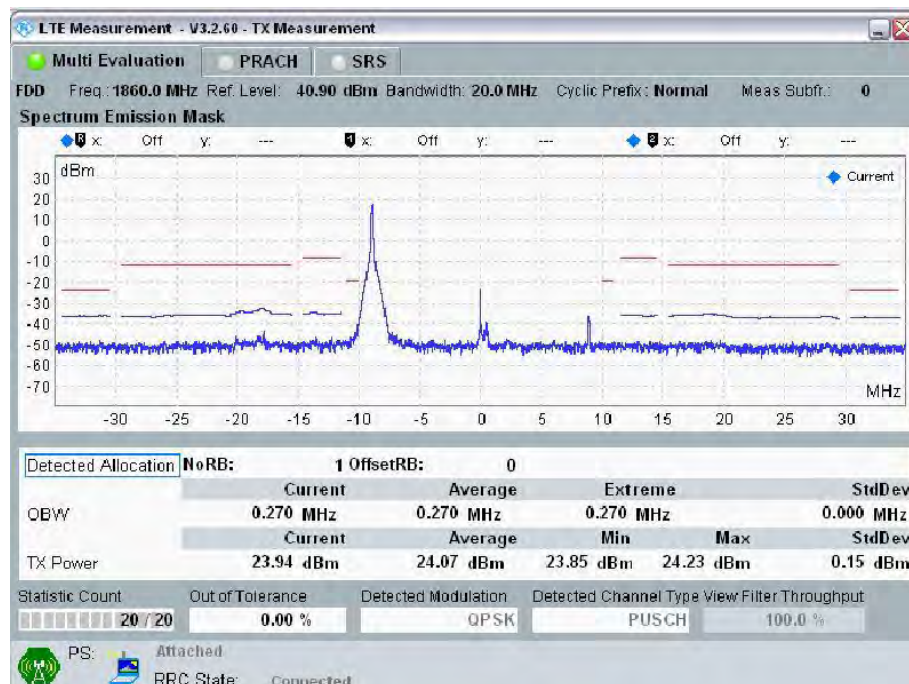Spectrum Plots for the Test RB allocations


20MHz Band Width: Ch 18700, RB Size=1; RB Offset = 0

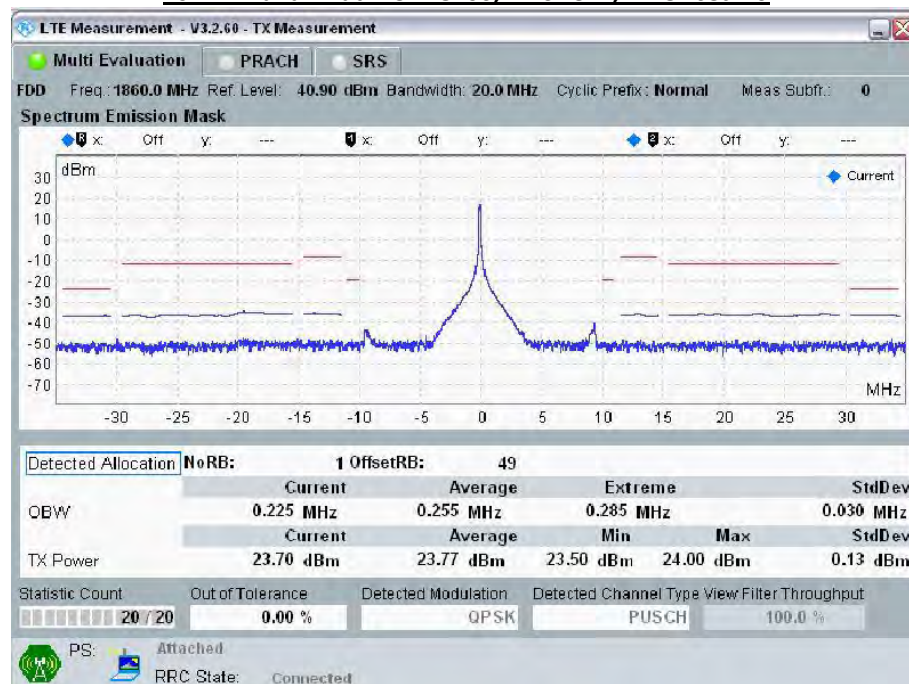



20MHz Band Width: Ch 18700, RB Size=1; RB Offset = 49

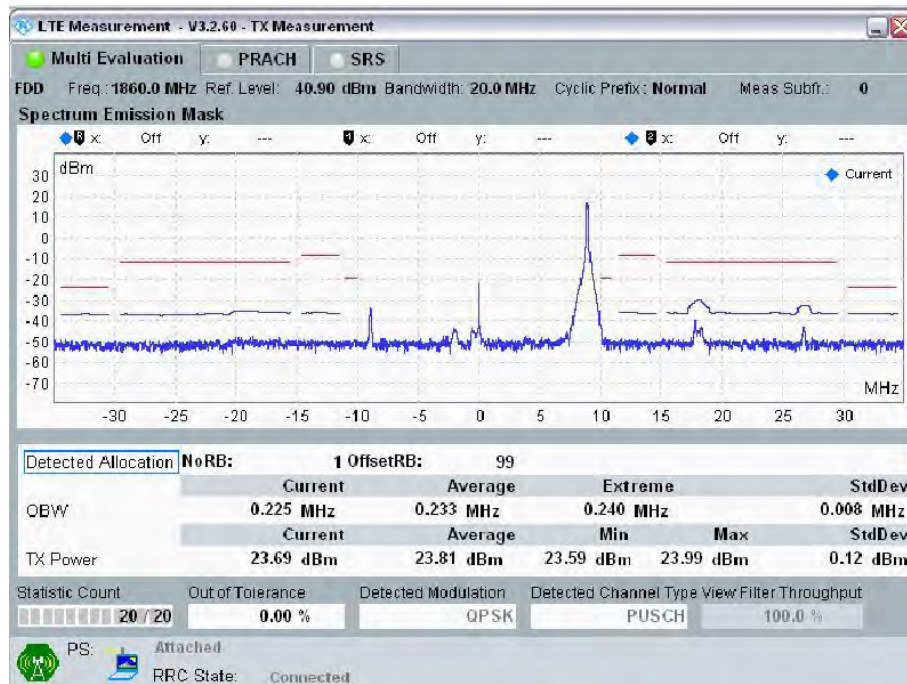


20MHz Band Width: Ch 18700, RB Size=1; RB Offset = 99

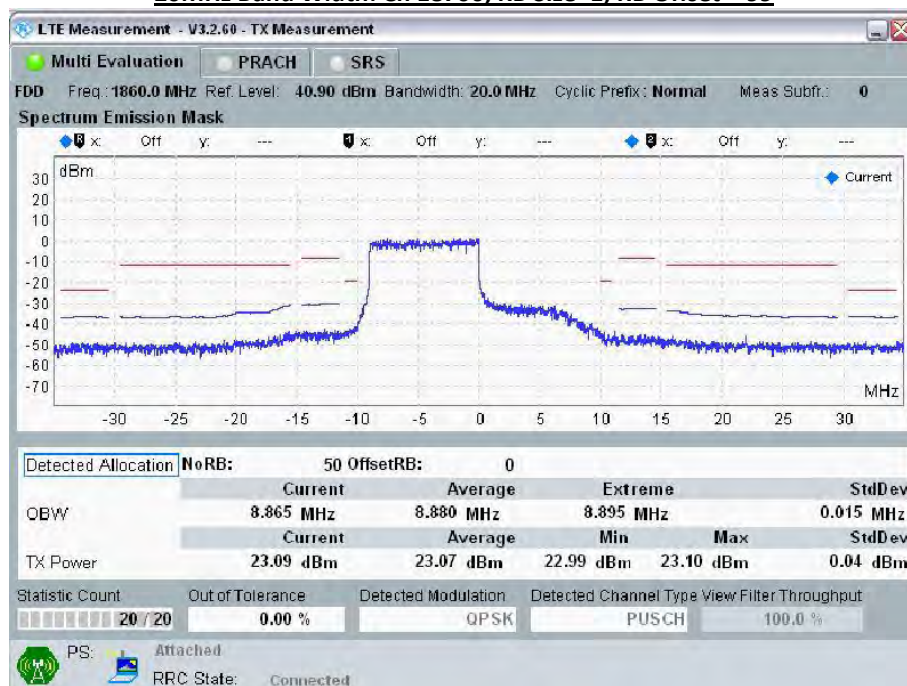

20MHz Band Width: Ch 18700, RB Size=50; RB Offset = 0

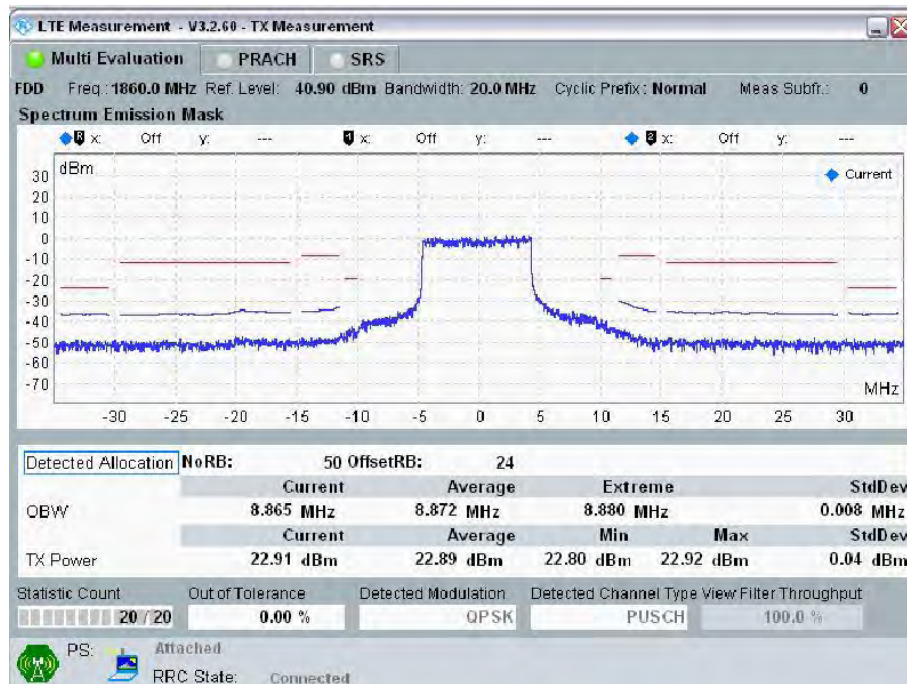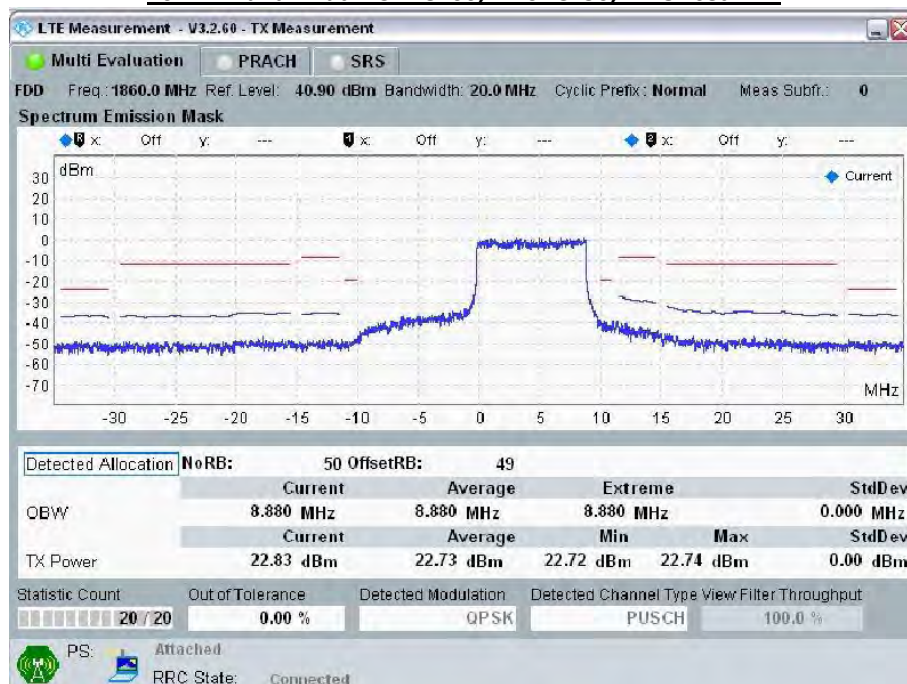**20MHz Band Width: Ch 18700, RB Size=50; RB Offset = 24****20MHz Band Width: Ch 18700, RB Size=50; RB Offset = 49**

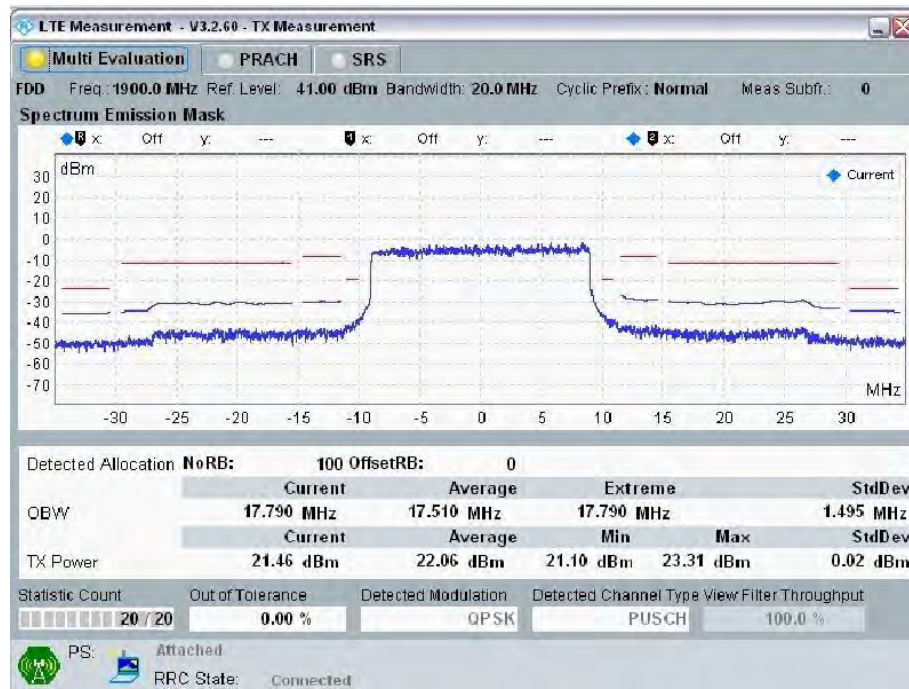

20MHz Band Width: Ch 18700, RB Size=100; RB Offset = 0

11.2.2 LTE Band 4

Output power table

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	20	20050	1720.0	QPSK	1	0	0	23.6	17.5
					1	49	0	23.0	17.1
					1	99	0	23.0	17.0
					50	0	1	22.8	17.1
					50	24	1	22.0	16.9
					50	49	1	22.3	16.9
					100	0	1	22.1	17.0
				16QAM	1	0	1	22.7	17.4
					1	49	1	22.2	17.0
					1	99	1	22.0	16.9
					50	0	2	21.6	17.0
					50	24	2	21.0	16.8
					50	49	2	21.1	16.8
					100	0	2	21.0	16.9
		20175	1732.5	QPSK	1	0	0	23.5	17.4
					1	49	0	23.3	16.8
					1	99	0	22.0	16.8
					50	0	1	22.5	17.0
					50	24	1	22.3	16.8
					50	49	1	21.0	16.8
					100	0	1	21.1	16.9
				16QAM	1	0	1	22.7	17.3
					1	49	1	22.3	16.7
					1	99	1	21.0	16.7
					50	0	2	21.5	16.9
					50	24	2	21.3	16.7
					50	49	2	20.1	16.7
					100	0	2	20.0	16.8
		20300	1745.0	QPSK	1	0	0	23.5	17.4
					1	49	0	23.3	16.5
					1	99	0	23.2	16.6
					50	0	1	22.5	17.0
					50	24	1	22.3	16.5
					50	49	1	22.2	16.6
					100	0	1	22.3	16.7
				16QAM	1	0	1	22.7	17.3
					1	49	1	22.4	16.4
					1	99	1	22.2	16.5
					50	0	2	21.5	16.9
					50	24	2	21.3	16.4
					50	49	2	21.2	16.5
					100	0	2	21.2	16.6



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	15	20025	1717.5	QPSK	1	0	0	23.5	17.4
					1	37	0	23.0	17.1
					1	74	0	23.0	17.0
					36	0	1	22.8	17.1
					36	18	1	22.0	16.9
					36	35	1	22.3	16.9
					75	0	1	22.1	17.0
				16QAM	1	0	1	22.6	17.3
					1	37	1	22.2	17.0
					1	74	1	22.0	16.9
					36	0	2	21.6	17.0
					36	18	2	21.0	16.8
					36	35	2	21.1	16.8
					75	0	2	21.0	16.9
		20175	1732.5	QPSK	1	0	0	23.5	17.4
					1	37	0	23.3	16.7
					1	74	0	22.0	16.7
					36	0	1	22.5	17.0
					36	18	1	22.3	16.7
					36	35	1	21.0	16.7
					75	0	1	21.1	16.9
				16QAM	1	0	1	22.7	17.3
					1	37	1	22.3	16.6
					1	74	1	21.0	16.6
					36	0	2	21.5	16.9
					36	18	2	21.3	16.6
					36	35	2	20.1	16.6
					75	0	2	20.0	16.8
		20325	1747.5	QPSK	1	0	0	23.4	17.3
					1	37	0	23.3	16.4
					1	74	0	23.2	16.6
					36	0	1	22.5	17.0
					36	18	1	22.3	16.5
					36	35	1	22.2	16.5
					75	0	1	22.3	16.7
				16QAM	1	0	1	22.6	17.2
					1	37	1	22.4	16.3
					1	74	1	22.2	16.5
					36	0	2	21.5	16.9
					36	18	2	21.3	16.4
					36	35	2	21.2	16.4
					75	0	2	21.2	16.6


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	10	20000	1715.0	QPSK	1	0	0	23.5	17.4
					1	24	0	22.9	17.0
					1	49	0	22.9	16.9
					25	0	1	22.7	17.0
					25	12	1	21.9	16.8
					25	24	1	22.2	16.8
					50	0	1	22.0	16.9
				16QAM	1	0	1	22.6	17.3
					1	24	1	22.1	16.9
					1	49	1	21.9	16.8
					25	0	2	21.5	16.9
					25	12	2	20.9	16.7
					25	24	2	21.0	16.7
					50	0	2	20.9	16.8
		20175	1732.5	QPSK	1	0	0	23.4	17.3
					1	24	0	23.2	16.7
					1	49	0	21.9	16.7
					25	0	1	22.4	16.9
					25	12	1	22.2	16.7
					25	24	1	20.9	16.7
					50	0	1	21.0	16.8
				16QAM	1	0	1	22.6	17.2
					1	24	1	22.2	16.6
					1	49	1	20.9	16.6
					25	0	2	21.4	16.8
					25	12	2	21.2	16.6
					25	24	2	20.0	16.6
					50	0	2	19.9	16.7
		20350	1750.0	QPSK	1	0	0	23.4	17.3
					1	24	0	23.2	16.4
					1	49	0	23.1	16.5
					25	0	1	22.4	16.9
					25	12	1	22.2	16.4
					25	24	1	22.1	16.5
					50	0	1	22.2	16.6
				16QAM	1	0	1	22.6	17.2
					1	24	1	22.3	16.3
					1	49	1	22.1	16.4
					25	0	2	21.4	16.8
					25	12	2	21.2	16.3
					25	24	2	21.1	16.4
					50	0	2	21.1	16.5

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	5	19975	1712.5	QPSK	1	0	0	23.4	17.2
					1	12	0	22.9	17.3
					1	24	0	22.9	16.7
					12	0	1	22.7	16.8
					12	6	1	21.9	16.6
					12	11	1	22.2	16.6
					25	0	1	22.0	16.7
				16QAM	1	0	1	22.5	17.1
					1	12	1	22.1	16.7
					1	24	1	21.9	16.6
					12	0	2	21.5	16.7
					12	6	2	20.9	16.5
					12	11	2	21.0	16.5
					25	0	2	20.9	16.6
		20175	1732.5	QPSK	1	0	0	23.4	17.1
					1	12	0	23.2	16.5
					1	24	0	21.9	16.5
					12	0	1	22.4	16.7
					12	6	1	22.2	16.5
					12	11	1	20.9	16.5
					25	0	1	21.0	16.6
				16QAM	1	0	1	22.6	17.0
					1	12	1	22.2	16.4
					1	24	1	20.9	16.4
					12	0	2	21.4	16.6
					12	6	2	21.2	16.4
					12	11	2	20.0	16.4
					25	0	2	19.9	16.5
		20375	1752.5	QPSK	1	0	0	23.3	17.1
					1	12	0	23.2	16.2
					1	24	0	23.1	16.3
					12	0	1	22.4	16.7
					12	6	1	22.2	16.2
					12	11	1	22.1	16.3
					25	0	1	22.2	16.4
				16QAM	1	0	1	22.5	17.0
					1	12	1	22.3	16.1
					1	24	1	22.1	16.2
					12	0	2	21.4	16.6
					12	6	2	21.2	16.1
					12	11	2	21.1	16.2
					25	0	2	21.1	16.3


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	3	19965	1711.5	QPSK	1	0	0	23.4	17.1
					1	7	0	22.8	17.3
					1	14	0	22.8	16.7
					8	0	1	22.6	16.8
					8	4	1	21.8	16.6
					8	7	1	22.1	16.6
					15	0	1	21.9	16.7
				16QAM	1	0	1	22.5	17.0
					1	7	1	22.0	16.7
					1	14	1	21.8	16.6
					8	0	2	21.4	16.7
					8	4	2	20.8	16.5
					8	7	2	20.9	16.5
					15	0	2	20.8	16.6
		20175	1732.5	QPSK	1	0	0	23.3	17.1
					1	7	0	23.1	16.4
					1	14	0	21.8	16.4
					8	0	1	22.3	16.7
					8	4	1	22.1	16.4
					8	7	1	20.8	16.4
					15	0	1	20.9	16.6
				16QAM	1	0	1	22.5	17.0
					1	7	1	22.1	16.3
					1	14	1	20.8	16.3
					8	0	2	21.3	16.6
					8	4	2	21.1	16.3
					8	7	2	19.9	16.3
					15	0	2	19.8	16.5
		20384	1753.4	QPSK	1	0	0	23.3	17.0
					1	7	0	23.1	16.1
					1	14	0	23.0	16.3
					8	0	1	22.3	16.7
					8	4	1	22.1	16.2
					8	7	1	22.0	16.2
					15	0	1	22.1	16.4
				16QAM	1	0	1	22.5	16.9
					1	7	1	22.2	16.0
					1	14	1	22.0	16.2
					8	0	2	21.3	16.6
					8	4	2	21.1	16.1
					8	7	2	21.0	16.1
					15	0	2	21.0	16.3

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	1.4	19957	1710.7	QPSK	1	0	0	23.3	17.1
					1	2	0	22.8	17.2
					1	5	0	22.8	16.6
					3	0	1	22.6	16.7
					3	1	1	21.8	16.5
					3	2	1	22.1	16.5
					6	0	1	21.9	16.6
				16QAM	1	0	1	22.4	17.0
					1	2	1	22.0	16.6
					1	5	1	21.8	16.5
					3	0	2	21.4	16.6
					3	1	2	20.8	16.4
					3	2	2	20.9	16.4
					6	0	2	20.8	16.5
		20175	1732.5	QPSK	1	0	0	23.3	17.0
					1	2	0	23.1	16.4
					1	5	0	21.8	16.4
					3	0	1	22.3	16.6
					3	1	1	22.1	16.4
					3	2	1	20.8	16.4
					6	0	1	20.9	16.5
				16QAM	1	0	1	22.5	16.9
					1	2	1	22.1	16.3
					1	5	1	20.8	16.3
					3	0	2	21.3	16.5
					3	1	2	21.1	16.3
					3	2	2	19.9	16.3
					6	0	2	19.8	16.4
		20392	1754.2	QPSK	1	0	0	23.2	17.0
					1	2	0	23.1	16.1
					1	5	0	23.0	16.2
					3	0	1	22.3	16.6
					3	1	1	22.1	16.1
					3	2	1	22.0	16.2
					6	0	1	22.1	16.3
				16QAM	1	0	1	22.4	16.9
					1	2	1	22.2	16.0
					1	5	1	22.0	16.1
					3	0	2	21.3	16.5
					3	1	2	21.1	16.0
					3	2	2	21.0	16.1
					6	0	2	21.0	16.2

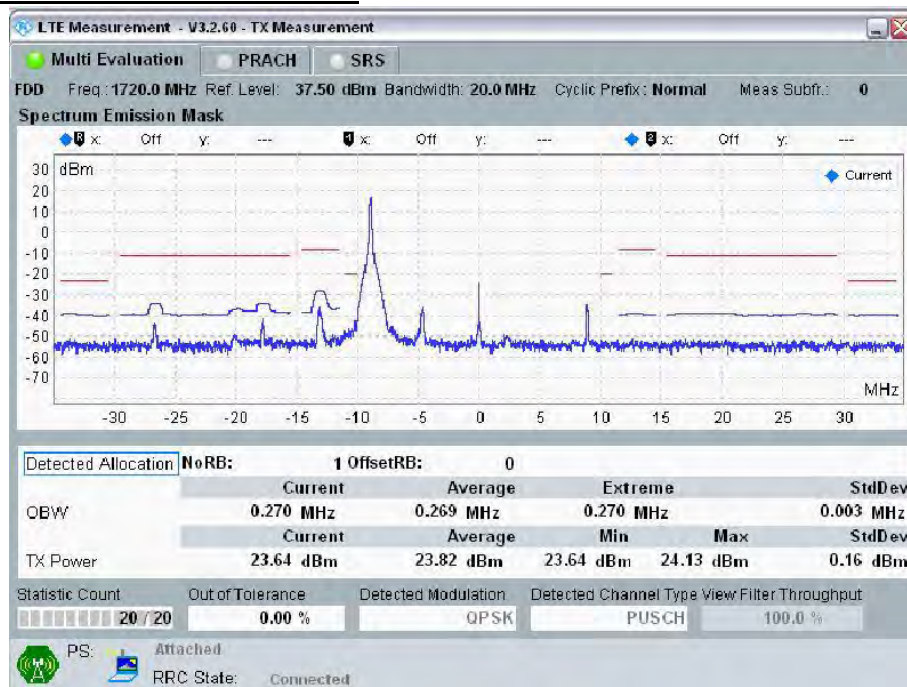
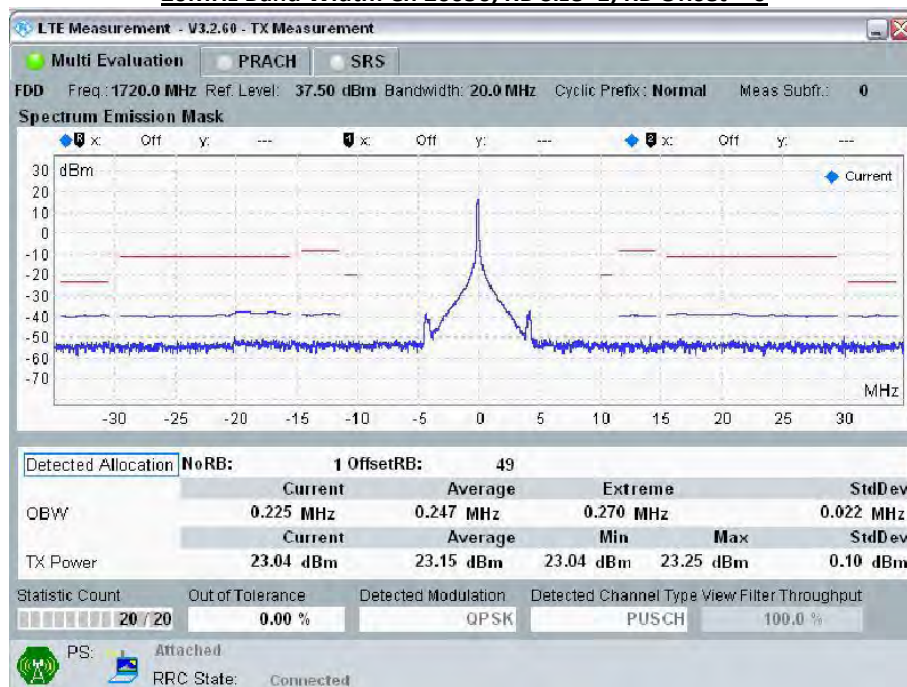
Spectrum Plots for the Test RB allocations**20MHz Band Width: Ch 20050, RB Size=1; RB Offset = 0****20MHz Band Width: Ch 20050, RB Size=1; RB Offset = 49**

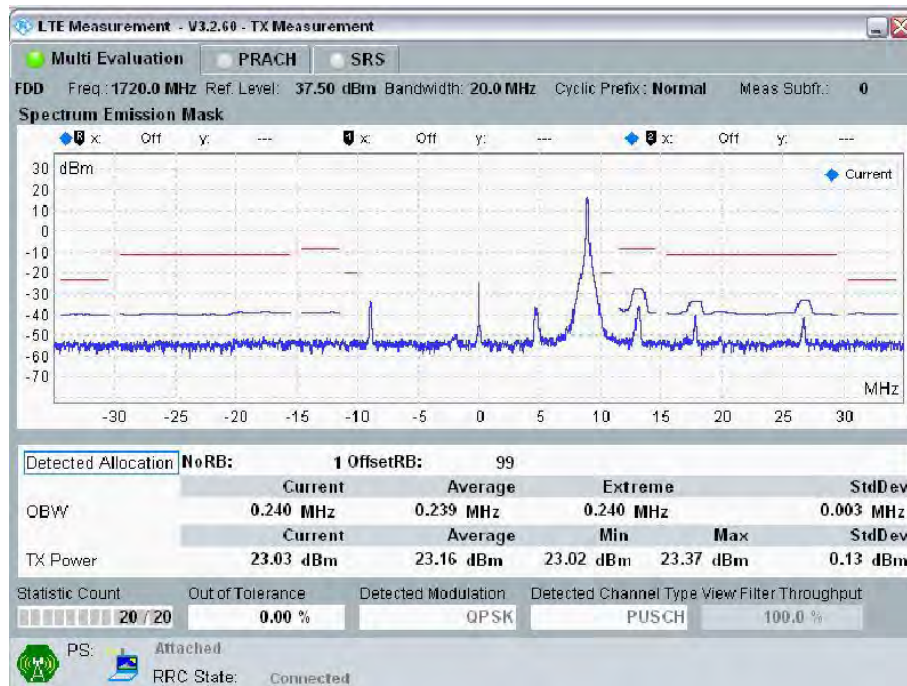


20MHz Band Width: Ch 20050, RB Size=1; RB Offset = 99

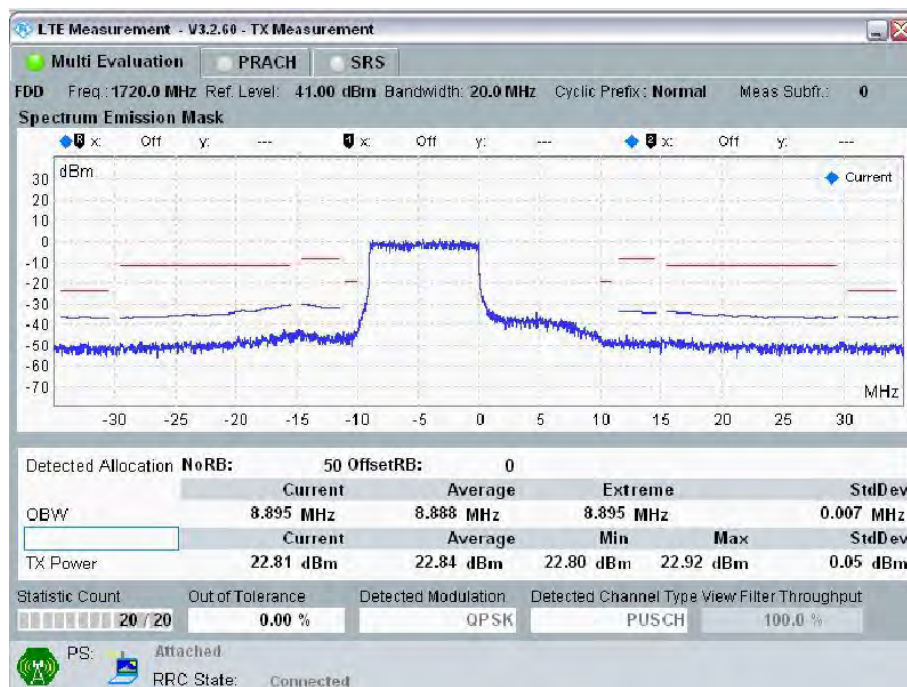

20MHz Band Width: Ch 20050, RB Size=50; RB Offset = 0

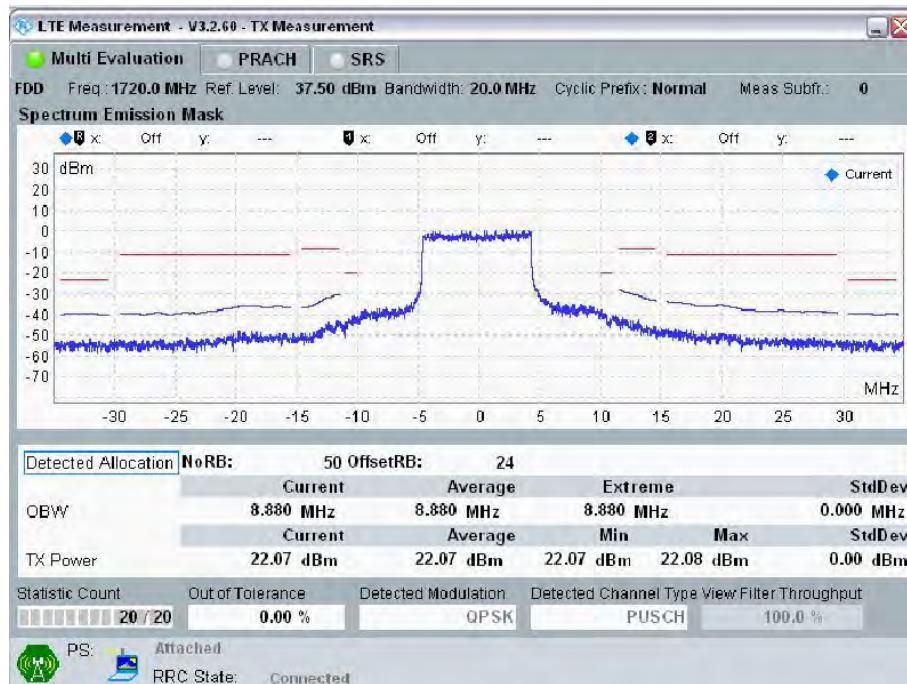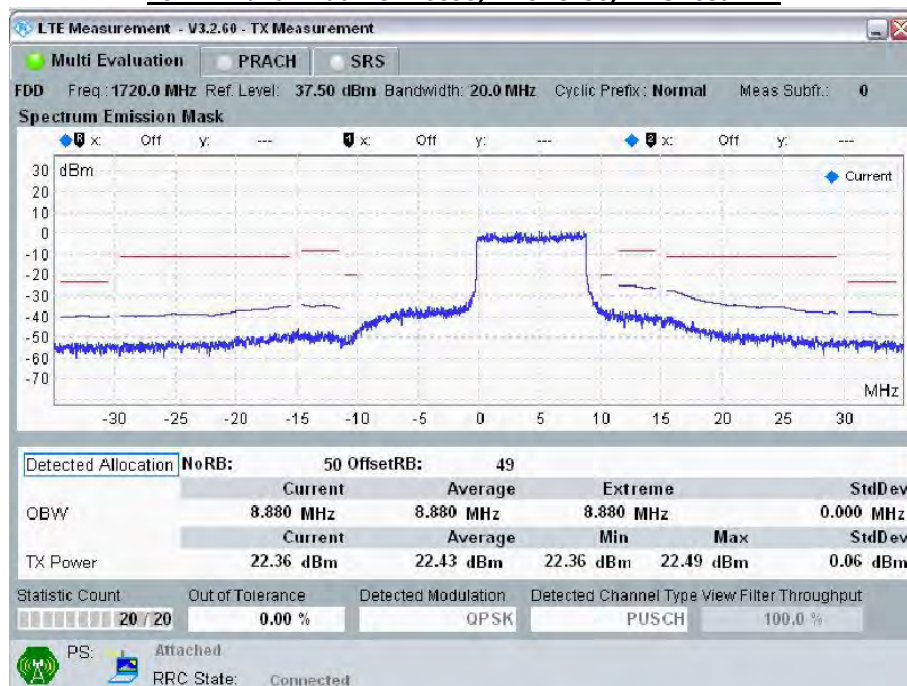**20MHz Band Width: Ch 20050, RB Size=50; RB Offset = 24****20MHz Band Width: Ch 20050, RB Size=50; RB Offset = 49**

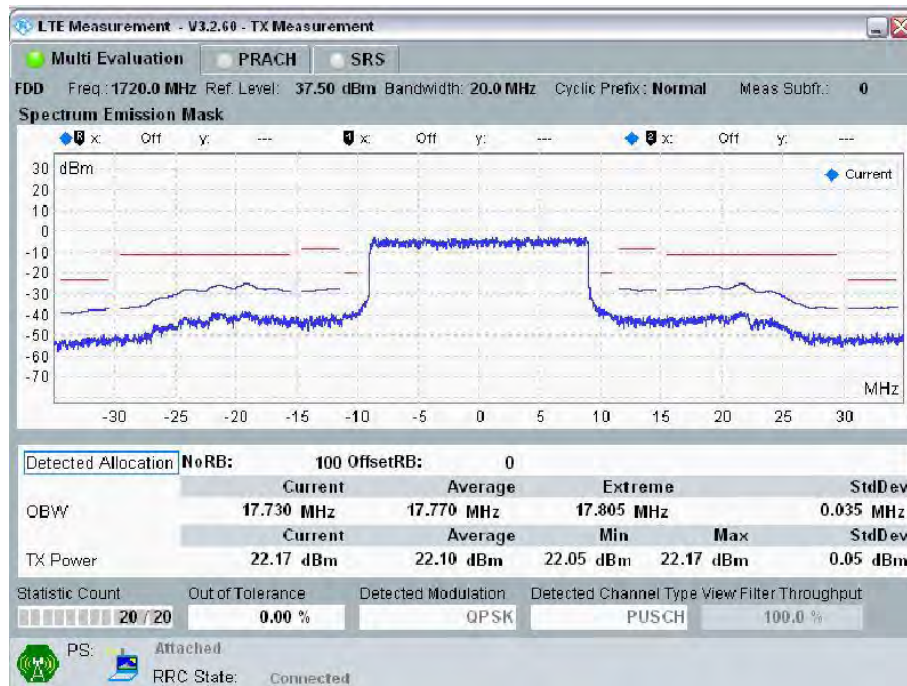

20MHz Band Width: Ch 20050, RB Size=100; RB Offset = 0



11.2.3 LTE Band 5Output power table



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
5	10	20450	829.0	QPSK	1	0	0	22.7	18.7
					1	24	0	22.5	18.7
					1	49	0	22.5	18.6
					25	0	1	21.7	18.5
					25	12	1	21.5	18.4
					25	24	1	21.6	18.4
					50	0	1	21.6	18.5
				16QAM	1	0	1	21.7	18.6
					1	24	1	21.6	18.6
					1	49	1	21.5	18.5
					25	0	2	20.7	18.4
					25	12	2	20.6	18.3
					25	24	2	20.5	18.3
					50	0	2	20.6	18.4
		20525	836.5	QPSK	1	0	0	22.8	18.7
					1	24	0	22.6	18.7
					1	49	0	22.7	18.6
					25	0	1	21.9	18.6
					25	12	1	21.6	18.6
					25	24	1	21.7	18.6
					50	0	1	21.7	18.5
				16QAM	1	0	1	21.9	19.9
					1	24	1	21.7	18.6
					1	49	1	21.7	18.5
					25	0	2	20.9	18.5
					25	12	2	20.7	18.5
					25	24	2	20.8	18.5
					50	0	2	20.7	18.4
		20600	844.0	QPSK	1	0	0	23.2	19.0
					1	24	0	22.8	19.0
					1	49	0	22.6	19.2
					25	0	1	22.3	18.9
					25	12	1	21.8	18.9
					25	24	1	21.6	18.9
					50	0	1	21.6	18.8
				16QAM	1	0	1	22.0	18.9
					1	24	1	21.8	18.9
					1	49	1	21.6	19.1
					25	0	2	21.3	18.8
					25	12	2	20.9	18.8
					25	24	2	20.7	18.8
					50	0	2	20.6	18.7


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
5	5	20425	826.5	QPSK	1	0	0	22.6	18.6
					1	12	0	22.5	18.6
					1	24	0	22.5	18.5
					12	0	1	21.7	18.4
					12	6	1	21.5	18.3
					12	11	1	21.6	18.4
					25	0	1	21.5	18.4
				16QAM	1	0	1	21.7	18.5
					1	12	1	21.6	18.5
					1	24	1	21.5	18.4
					12	0	2	20.7	18.3
					12	6	2	20.6	18.2
					12	11	2	20.5	18.3
					25	0	2	20.5	18.3
		20525	836.5	QPSK	1	0	0	22.8	20.0
					1	12	0	22.6	18.7
					1	24	0	22.7	18.6
					12	0	1	21.9	18.6
					12	6	1	21.6	18.6
					12	11	1	21.7	18.5
					25	0	1	21.7	18.5
				16QAM	1	0	1	21.8	19.9
					1	12	1	21.7	18.6
					1	24	1	21.7	18.5
					12	0	2	20.9	18.5
					12	6	2	20.7	18.5
					12	11	2	20.8	18.4
					25	0	2	20.7	18.4
		20625	846.5	QPSK	1	0	0	23.2	19.0
					1	12	0	22.8	19.0
					1	24	0	22.6	19.2
					12	0	1	22.3	18.9
					12	6	1	21.8	18.9
					12	11	1	21.6	18.9
					25	0	1	21.6	18.8
				16QAM	1	0	1	22.0	18.9
					1	12	1	21.8	18.9
					1	24	1	21.6	19.1
					12	0	2	21.3	18.8
					12	6	2	20.9	18.8
					12	11	2	20.7	18.8
					25	0	2	20.6	18.7

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
5	3	20415	825.5	QPSK	1	0	0	22.6	18.6
					1	7	0	22.4	18.6
					1	14	0	22.4	18.5
					8	0	1	21.6	18.4
					8	4	1	21.4	18.3
					8	7	1	21.5	18.3
					15	0	1	21.5	18.4
				16QAM	1	0	1	21.6	18.5
					1	7	1	21.5	18.5
					1	14	1	21.4	18.4
					8	0	2	20.6	18.3
					8	4	2	20.5	18.2
					8	7	2	20.4	18.2
					15	0	2	20.5	18.3
		20525	836.5	QPSK	1	0	0	22.7	19.9
					1	7	0	22.5	18.6
					1	14	0	22.6	18.5
					8	0	1	21.8	18.5
					8	4	1	21.5	18.5
					8	7	1	21.6	18.5
					15	0	1	21.6	18.4
				16QAM	1	0	1	21.8	19.8
					1	7	1	21.6	18.5
					1	14	1	21.6	18.4
					8	0	2	20.8	18.4
					8	4	2	20.6	18.4
					8	7	2	20.7	18.4
					15	0	2	20.6	18.3
		20634	847.4	QPSK	1	0	0	23.1	18.9
					1	7	0	22.7	18.9
					1	14	0	22.5	19.1
					8	0	1	22.2	18.8
					8	4	1	21.7	18.8
					8	7	1	21.5	18.8
					15	0	1	21.5	18.7
				16QAM	1	0	1	21.9	18.8
					1	7	1	21.7	18.8
					1	14	1	21.5	19.0
					8	0	2	21.2	18.7
					8	4	2	20.8	18.7
					8	7	2	20.6	18.7
					15	0	2	20.5	18.6


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
5	1.4	20407	824.7	QPSK	1	0	0	22.5	18.5
					1	2	0	22.4	18.5
					1	5	0	22.4	18.4
					3	0	1	21.6	18.3
					3	1	1	21.4	18.2
					3	2	1	21.5	18.3
					6	0	1	21.4	18.3
				16QAM	1	0	1	21.6	18.4
					1	2	1	21.5	18.4
					1	5	1	21.4	18.3
					3	0	2	20.6	18.2
					3	1	2	20.5	18.1
					3	2	2	20.4	18.2
					6	0	2	20.4	18.2
		20525	836.5	QPSK	1	0	0	22.7	19.9
					1	2	0	22.5	18.6
					1	5	0	22.6	18.5
					3	0	1	21.8	18.5
					3	1	1	21.5	18.5
					3	2	1	21.6	18.4
					6	0	1	21.6	18.4
				16QAM	1	0	1	21.7	19.8
					1	2	1	21.6	18.5
					1	5	1	21.6	18.4
					3	0	2	20.8	18.4
					3	1	2	20.6	18.4
					3	2	2	20.7	18.3
					6	0	2	20.6	18.3
		20642	848.2	QPSK	1	0	0	23.1	18.9
					1	2	0	22.7	18.9
					1	5	0	22.5	19.1
					3	0	1	22.2	18.8
					3	1	1	21.7	18.8
					3	2	1	21.5	18.8
					6	0	1	21.5	18.7
				16QAM	1	0	1	21.9	18.8
					1	2	1	21.7	18.8
					1	5	1	21.5	19.0
					3	0	2	21.2	18.7
					3	1	2	20.8	18.7
					3	2	2	20.6	18.7
					6	0	2	20.5	18.6

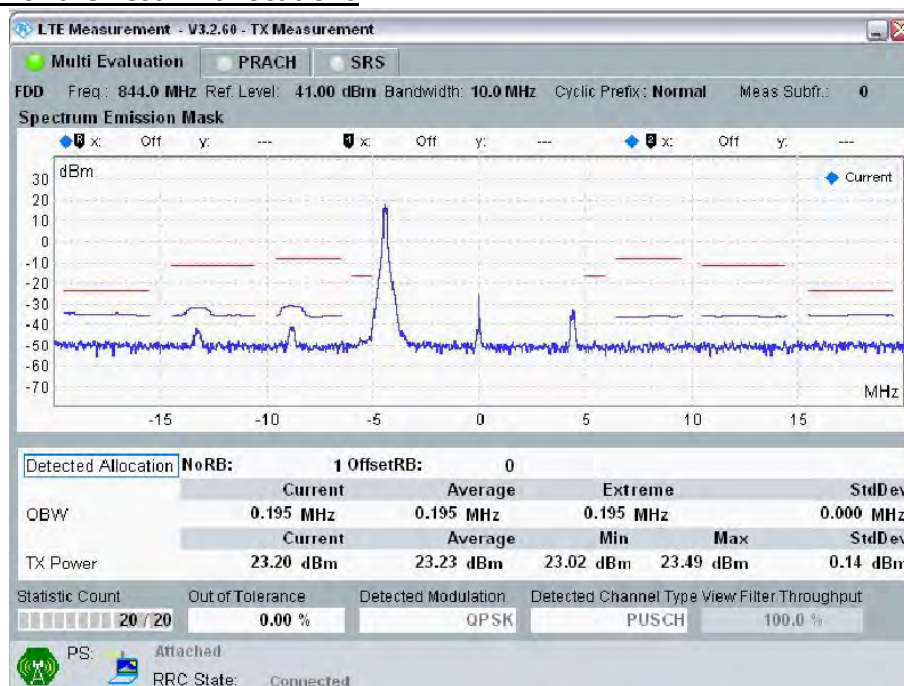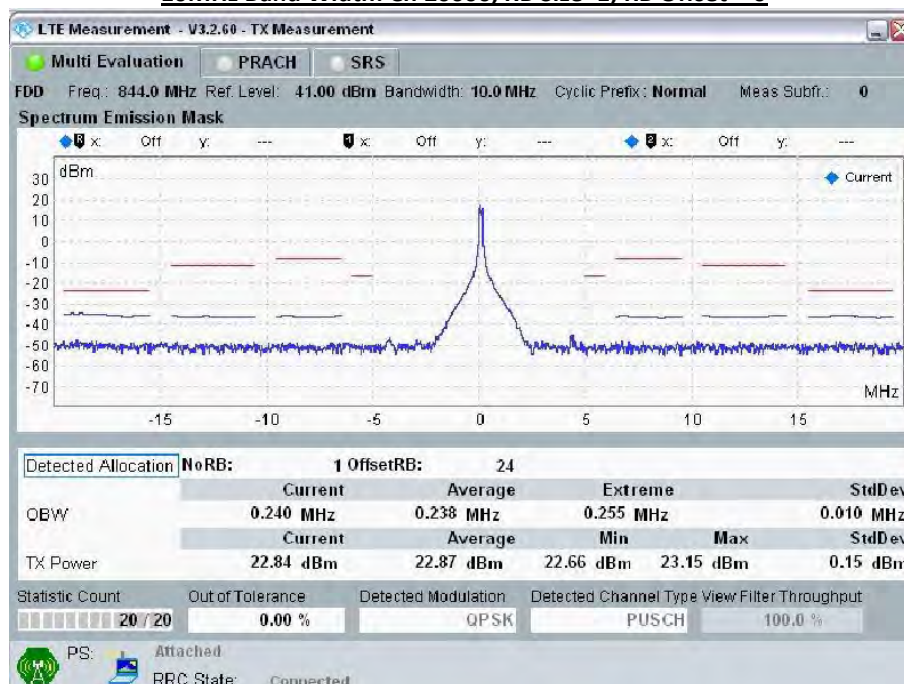Spectrum Plots for the Test RB allocations**10MHz Band Width: Ch 20600, RB Size=1; RB Offset = 0****10MHz Band Width: Ch 20600, RB Size=1; RB Offset = 24**

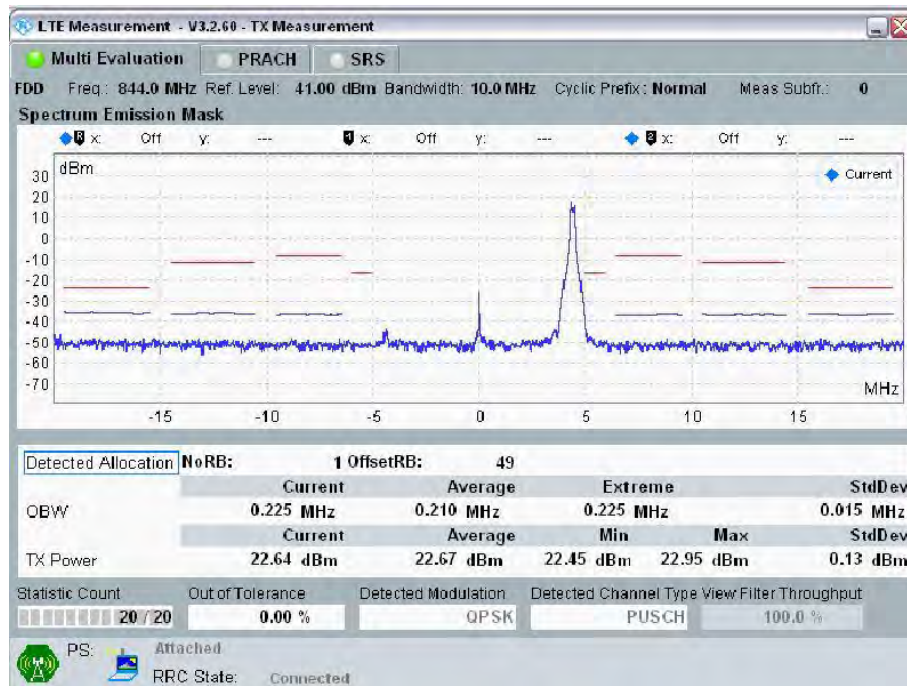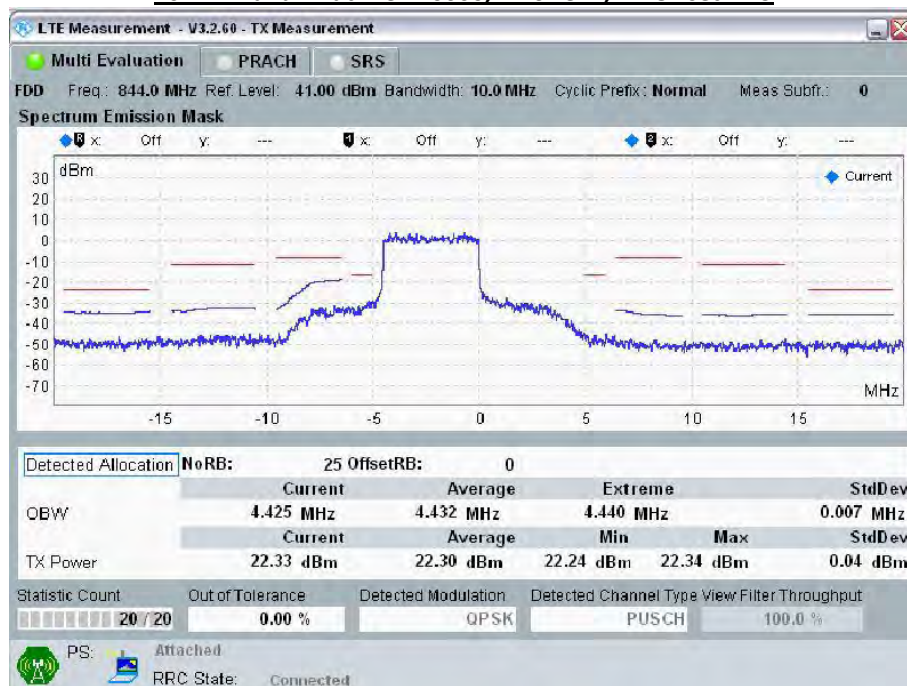
**10MHz Band Width: Ch 20600, RB Size=1; RB Offset = 49****10MHz Band Width: Ch 20600, RB Size=25; RB Offset = 0**

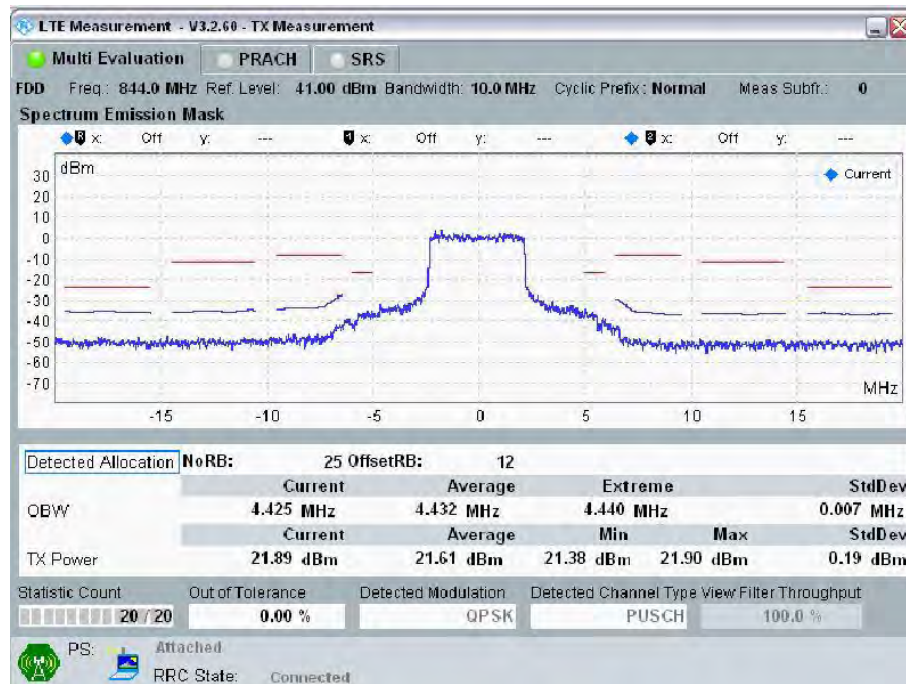

10MHz Band Width: Ch 20600, RB Size=25; RB Offset = 12

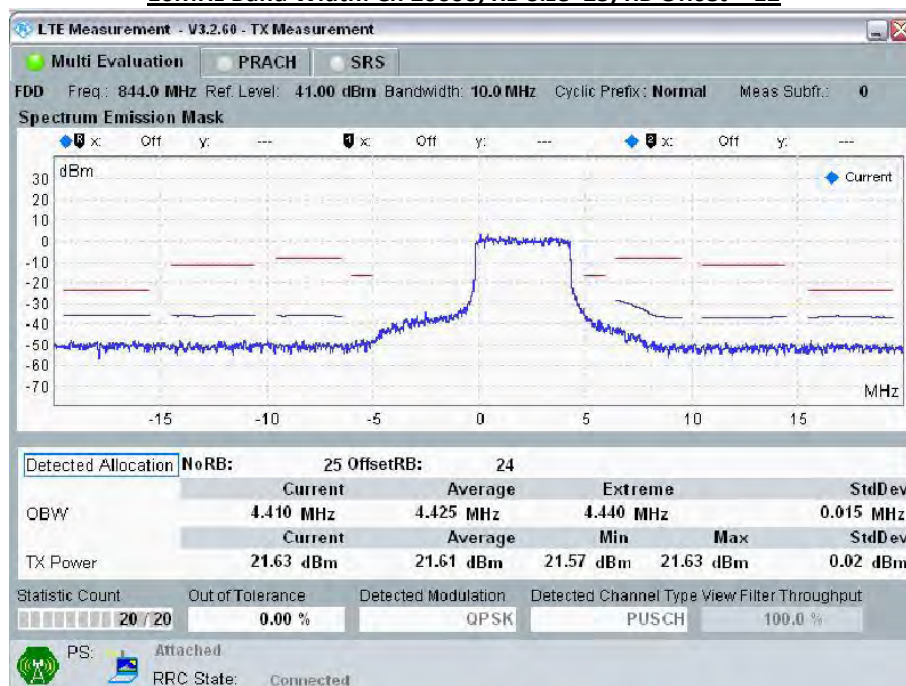

10MHz Band Width: Ch 20600, RB Size=25; RB Offset = 24

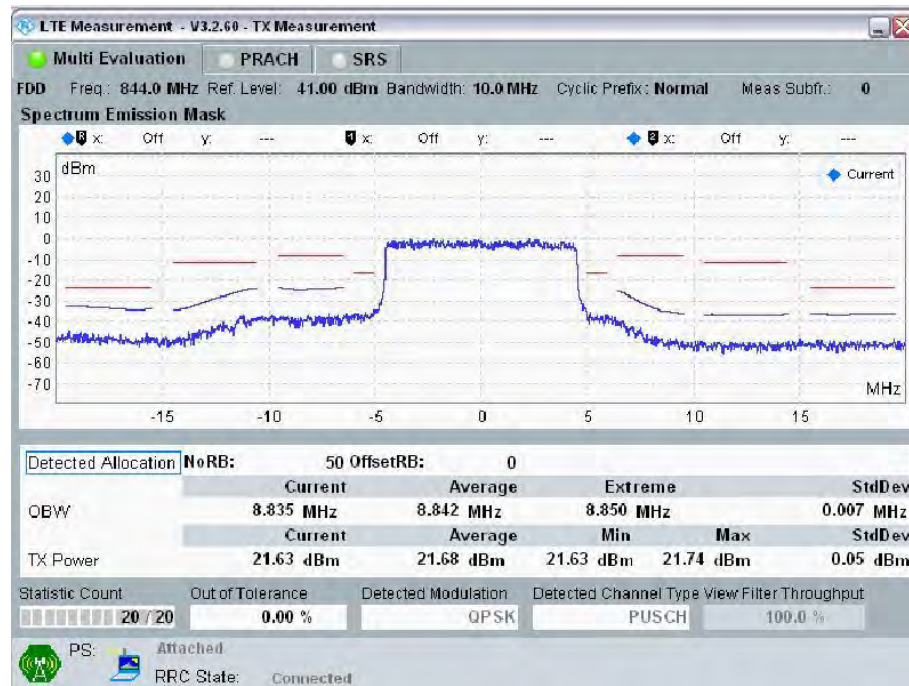

10MHz Band Width: Ch 20600, RB Size=50; RB Offset = 0

11.2.4 LTE Band 7



Output power table



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	20	20850	2510.0	QPSK	1	0	0	22.3	15.3
					1	49	0	22.1	14.5
					1	99	0	22.1	14.0
					50	0	1	21.3	14.8
					50	24	1	21.1	14.6
					50	49	1	21.2	14.3
					100	0	1	21.4	14.5
				16QAM	1	0	1	21.5	15.2
					1	49	1	21.1	14.4
					1	99	1	21.2	13.9
					50	0	2	20.4	14.7
					50	24	2	20.2	14.5
					50	49	2	20.2	14.2
					100	0	2	20.2	14.4
		21100	2535.0	QPSK	1	0	0	22.4	15.5
					1	49	0	22.3	15.4
					1	99	0	22.2	15.0
					50	0	1	21.4	15.4
					50	24	1	21.3	15.3
					50	49	1	21.3	15.3
					100	0	1	21.4	15.4
				16QAM	1	0	1	21.4	15.4
					1	49	1	21.4	15.3
					1	99	1	21.4	14.9
					50	0	2	20.4	15.3
					50	24	2	20.3	15.2
					50	49	2	20.3	15.2
					100	0	2	20.2	15.3
		21350	2560.0	QPSK	1	0	0	22.3	15.5
					1	49	0	22.2	14.5
					1	99	0	22.1	13.9
					50	0	1	21.3	14.8
					50	24	1	21.2	14.4
					50	49	1	21.2	14.2
					100	0	1	21.3	14.4
				16QAM	1	0	1	21.3	15.4
					1	49	1	21.3	14.4
					1	99	1	21.3	13.8
					50	0	2	20.3	14.7
					50	24	2	20.2	14.3
					50	49	2	20.2	14.1
					100	0	2	20.1	14.3


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	15	20825	2507.5	QPSK	1	0	0	22.3	15.3
					1	37	0	22.1	14.5
					1	74	0	22.1	14.0
					36	0	1	21.3	14.8
					36	18	1	21.1	14.5
					36	35	1	21.2	14.2
					75	0	1	21.4	14.5
				16QAM	1	0	1	21.5	15.2
					1	37	1	21.1	14.4
					1	74	1	21.2	13.9
					36	0	2	20.4	14.7
					36	18	2	20.2	14.4
					36	35	2	20.2	14.1
					75	0	2	20.2	14.4
		21100	2535.0	QPSK	1	0	0	22.4	15.5
					1	37	0	22.3	15.4
					1	74	0	22.2	15.0
					36	0	1	21.4	15.4
					36	18	1	21.3	15.3
					36	35	1	21.3	15.3
					75	0	1	21.4	15.4
				16QAM	1	0	1	21.4	15.4
					1	37	1	21.4	15.3
					1	74	1	21.4	14.9
					36	0	2	20.4	15.3
					36	18	2	20.3	15.2
					36	35	2	20.3	15.2
					75	0	2	20.2	15.3
		21375	2562.5	QPSK	1	0	0	22.3	15.5
					1	37	0	22.2	14.4
					1	74	0	22.1	13.8
					36	0	1	21.3	14.8
					36	18	1	21.2	14.4
					36	35	1	21.2	14.2
					75	0	1	21.3	14.4
				16QAM	1	0	1	21.3	15.4
					1	37	1	21.3	14.3
					1	74	1	21.3	13.7
					36	0	2	20.3	14.7
					36	18	2	20.2	14.3
					36	35	2	20.2	14.1
					75	0	2	20.1	14.3

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	10	20800	2505.0	QPSK	1	0	0	22.2	15.3
					1	24	0	22.0	14.5
					1	49	0	22.0	14.0
					25	0	1	21.2	14.8
					25	12	1	21.0	14.5
					25	24	1	21.1	14.2
					50	0	1	21.3	14.5
				16QAM	1	0	1	21.4	15.2
					1	24	1	21.0	14.4
					1	49	1	21.1	13.9
					25	0	2	20.3	14.7
					25	12	2	20.1	14.4
					25	24	2	20.1	14.1
					50	0	2	20.1	14.4
		21100	2535.0	QPSK	1	0	0	22.3	15.5
					1	24	0	22.2	15.4
					1	49	0	22.1	15.0
					25	0	1	21.3	15.4
					25	12	1	21.2	15.3
					25	24	1	21.2	15.3
					50	0	1	21.3	15.4
				16QAM	1	0	1	21.3	15.4
					1	24	1	21.3	15.3
					1	49	1	21.3	14.9
					25	0	2	20.3	15.3
					25	12	2	20.2	15.2
					25	24	2	20.2	15.2
					50	0	2	20.1	15.3
		21400	2565.0	QPSK	1	0	0	22.2	15.5
					1	24	0	22.1	14.4
					1	49	0	22.0	13.8
					25	0	1	21.2	14.8
					25	12	1	21.1	14.4
					25	24	1	21.1	14.2
					50	0	1	21.2	14.4
				16QAM	1	0	1	21.2	15.4
					1	24	1	21.2	14.3
					1	49	1	21.2	13.7
					25	0	2	20.2	14.7
					25	12	2	20.1	14.3
					25	24	2	20.1	14.1
					50	0	2	20.0	14.3


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	5	20775	2502.5	QPSK	1	0	0	22.2	15.3
					1	12	0	22.0	14.5
					1	24	0	22.0	14.0
					12	0	1	21.2	14.8
					12	6	1	21.0	14.5
					12	11	1	21.1	14.2
					25	0	1	21.3	14.5
				16QAM	1	0	1	21.4	15.2
					1	12	1	21.0	14.4
					1	24	1	21.1	13.9
					12	0	2	20.3	14.7
					12	6	2	20.1	14.4
					12	11	2	20.1	14.1
					25	0	2	20.1	14.4
		21100	2535.0	QPSK	1	0	0	22.3	15.5
					1	12	0	22.2	15.4
					1	24	0	22.1	15.0
					12	0	1	21.3	15.4
					12	6	1	21.2	15.3
					12	11	1	21.2	15.3
					25	0	1	21.3	15.4
				16QAM	1	0	1	21.3	15.4
					1	12	1	21.3	15.3
					1	24	1	21.3	14.9
					12	0	2	20.3	15.3
					12	6	2	20.2	15.2
					12	11	2	20.2	15.2
					25	0	2	20.1	15.3
		21425	2567.5	QPSK	1	0	0	22.2	15.5
					1	12	0	22.1	14.4
					1	24	0	22.0	13.8
					12	0	1	21.2	14.8
					12	6	1	21.1	14.4
					12	11	1	21.1	14.2
					25	0	1	21.2	14.4
				16QAM	1	0	1	21.2	15.4
					1	12	1	21.2	14.3
					1	24	1	21.2	13.7
					12	0	2	20.2	14.7
					12	6	2	20.1	14.3
					12	11	2	20.1	14.1
					25	0	2	20.0	14.3

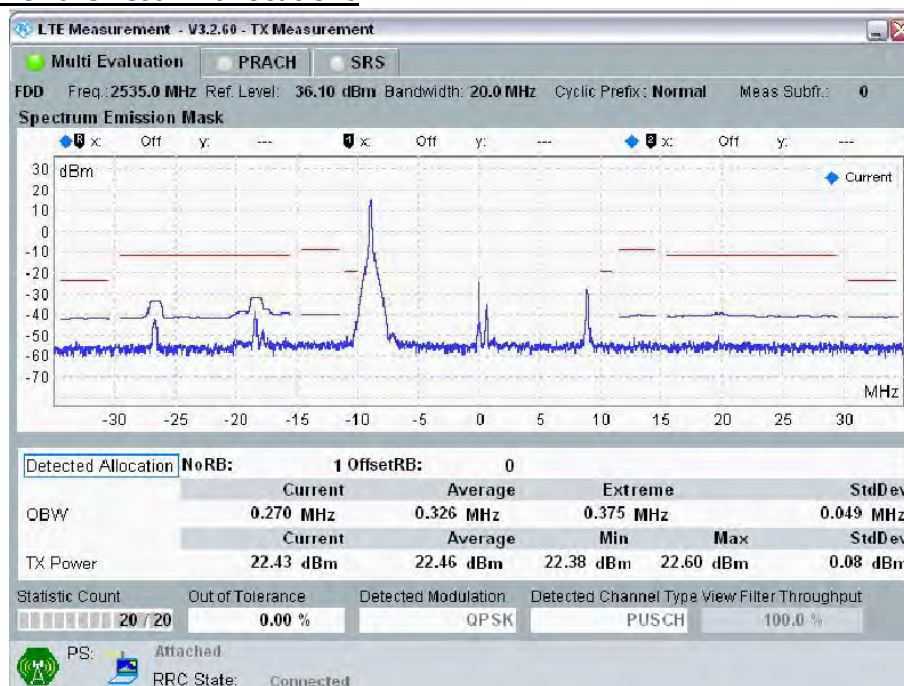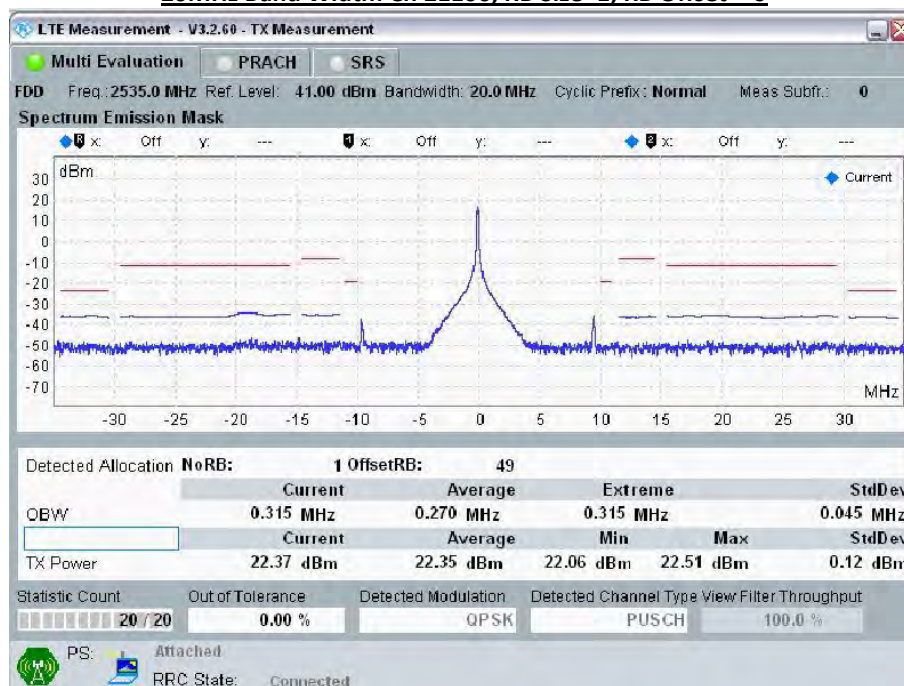Spectrum Plots for the Test RB allocations**20MHz Band Width: Ch 21100, RB Size=1; RB Offset = 0****20MHz Band Width: Ch 21100, RB Size=1; RB Offset = 49**

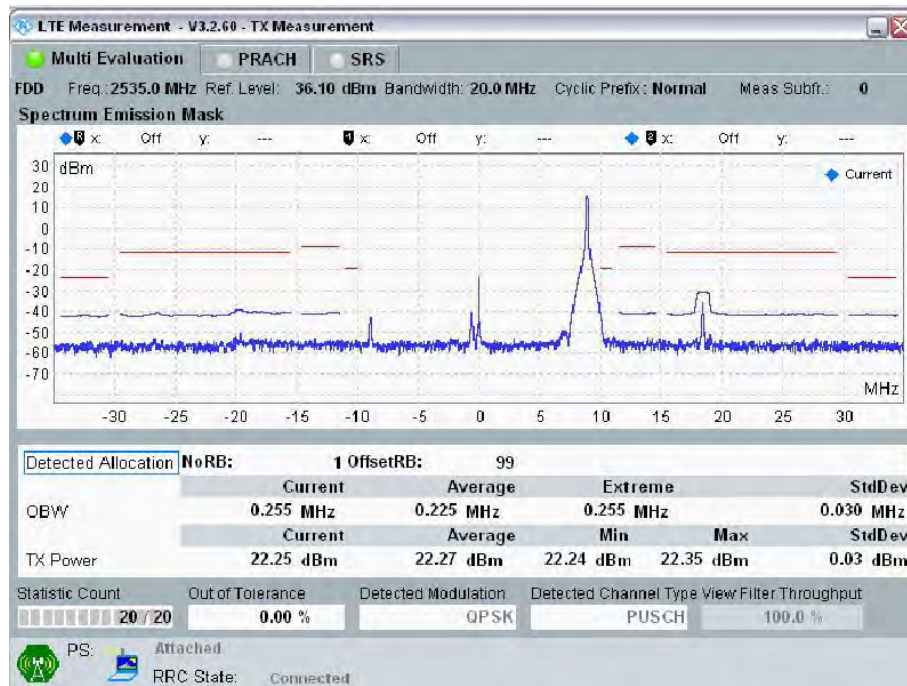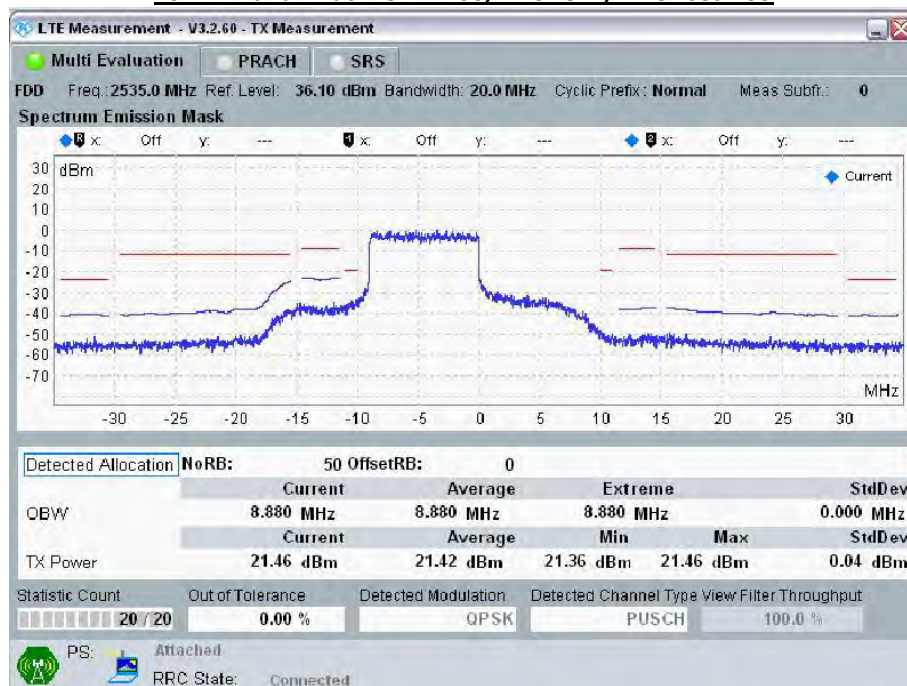
**20MHz Band Width: Ch 21100, RB Size=1; RB Offset = 99****20MHz Band Width: Ch 21100, RB Size=50; RB Offset = 0**

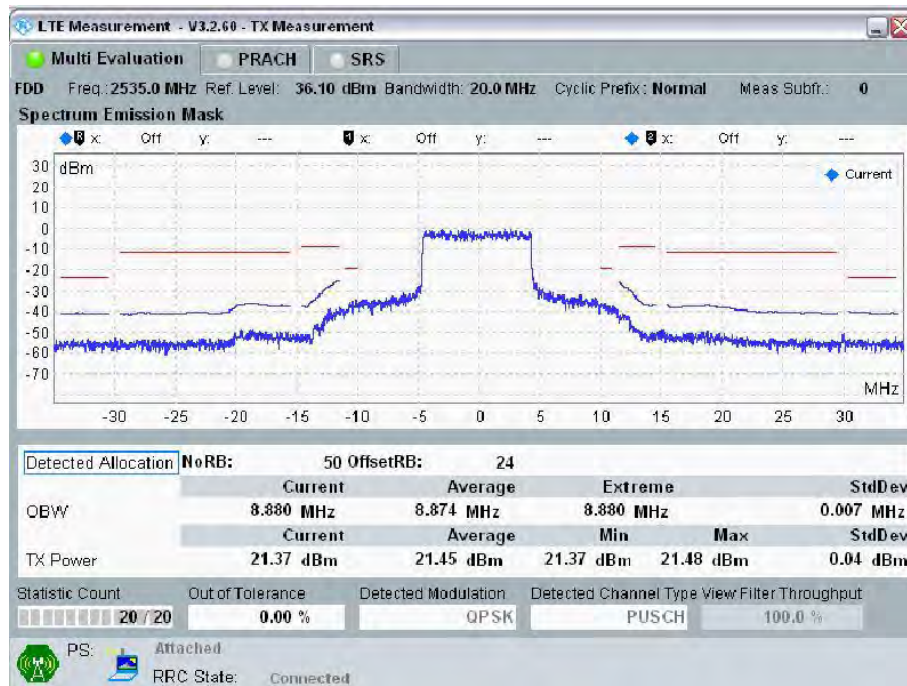

20MHz Band Width: Ch 21100, RB Size=50; RB Offset = 24

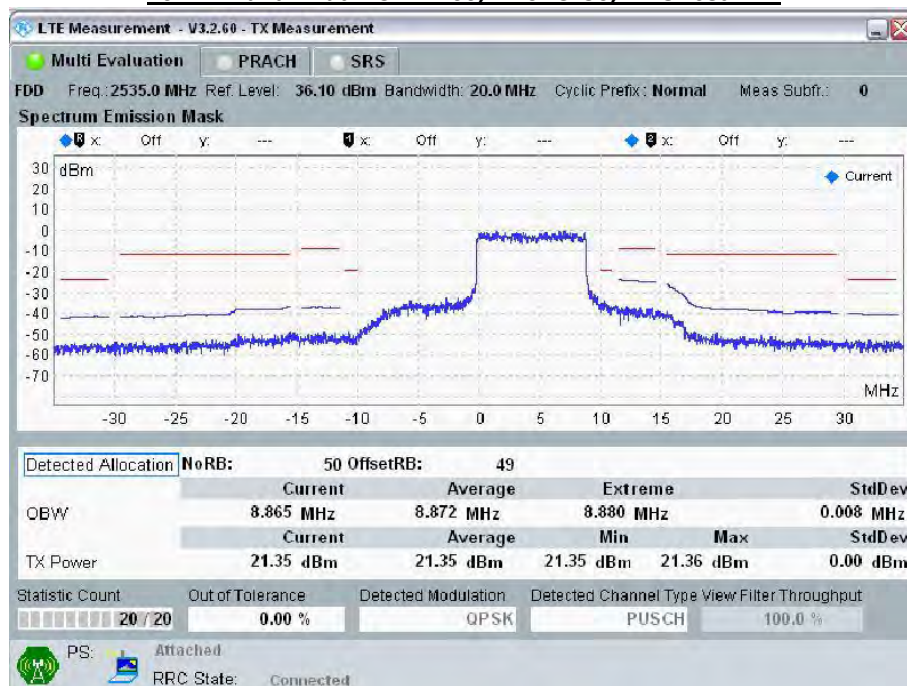

20MHz Band Width: Ch 21100, RB Size=50; RB Offset = 49

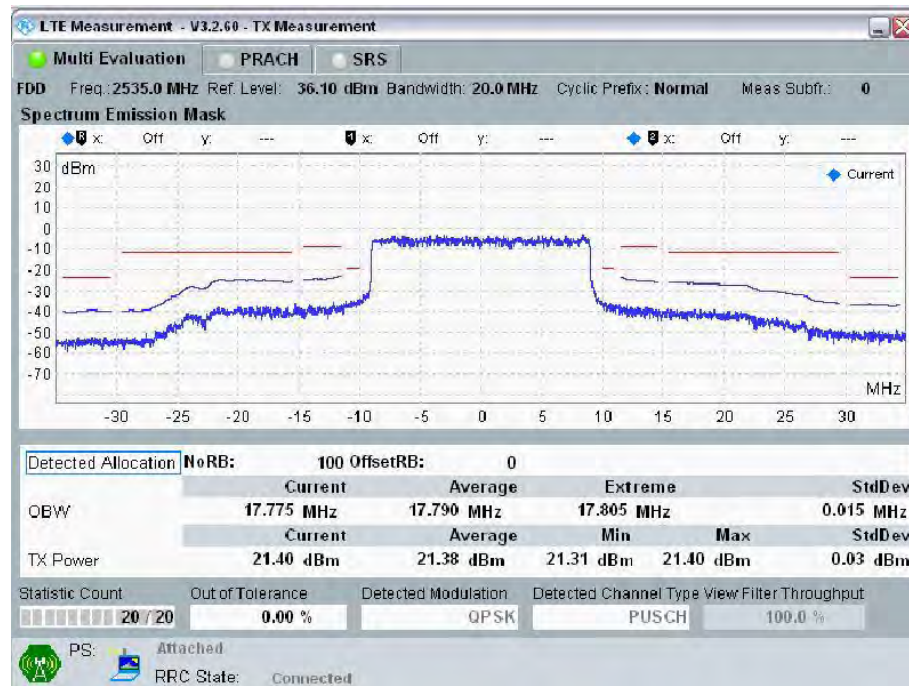

20MHz Band Width: Ch 21100, RB Size=100; RB Offset = 0

11.2.5 LTE Band 12

Output power table

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
12	10	23060	704.0	QPSK	1	0	0	23.3	19.7
					1	24	0	23.2	19.6
					1	49	0	23.2	19.5
					25	0	1	22.4	19.7
					25	12	1	22.3	19.5
					25	24	1	22.2	19.5
					50	0	1	22.3	19.6
				16QAM	1	0	1	22.4	19.5
					1	24	1	22.2	19.4
					1	49	1	22.3	19.4
					25	0	2	21.4	19.4
					25	12	2	21.4	19.3
					25	24	2	21.3	19.4
					50	0	2	21.3	19.5
		23095	707.5	QPSK	1	0	0	23.2	19.6
					1	24	0	23.1	19.5
					1	49	0	23.0	19.3
					25	0	1	22.3	19.6
					25	12	1	22.2	19.3
					25	24	1	22.0	19.2
					50	0	1	22.0	19.3
				16QAM	1	0	1	22.4	19.4
					1	24	1	22.3	19.5
					1	49	1	22.2	19.5
					25	0	2	21.2	19.4
					25	12	2	21.2	19.1
					25	24	2	21.2	19.2
					50	0	2	21.1	19.4
		23130	711.0	QPSK	1	0	0	23.1	19.6
					1	24	0	23.0	19.3
					1	49	0	23.0	19.4
					25	0	1	22.2	19.5
					25	12	1	22.1	19.2
					25	24	1	22.0	19.1
					50	0	1	22.1	16.2
				16QAM	1	0	1	22.2	19.4
					1	24	1	22.0	19.2
					1	49	1	22.0	19.2
					25	0	2	21.2	19.2
					25	12	2	21.1	19.2
					25	24	2	21.0	19.1
					50	0	2	21.0	19.2