


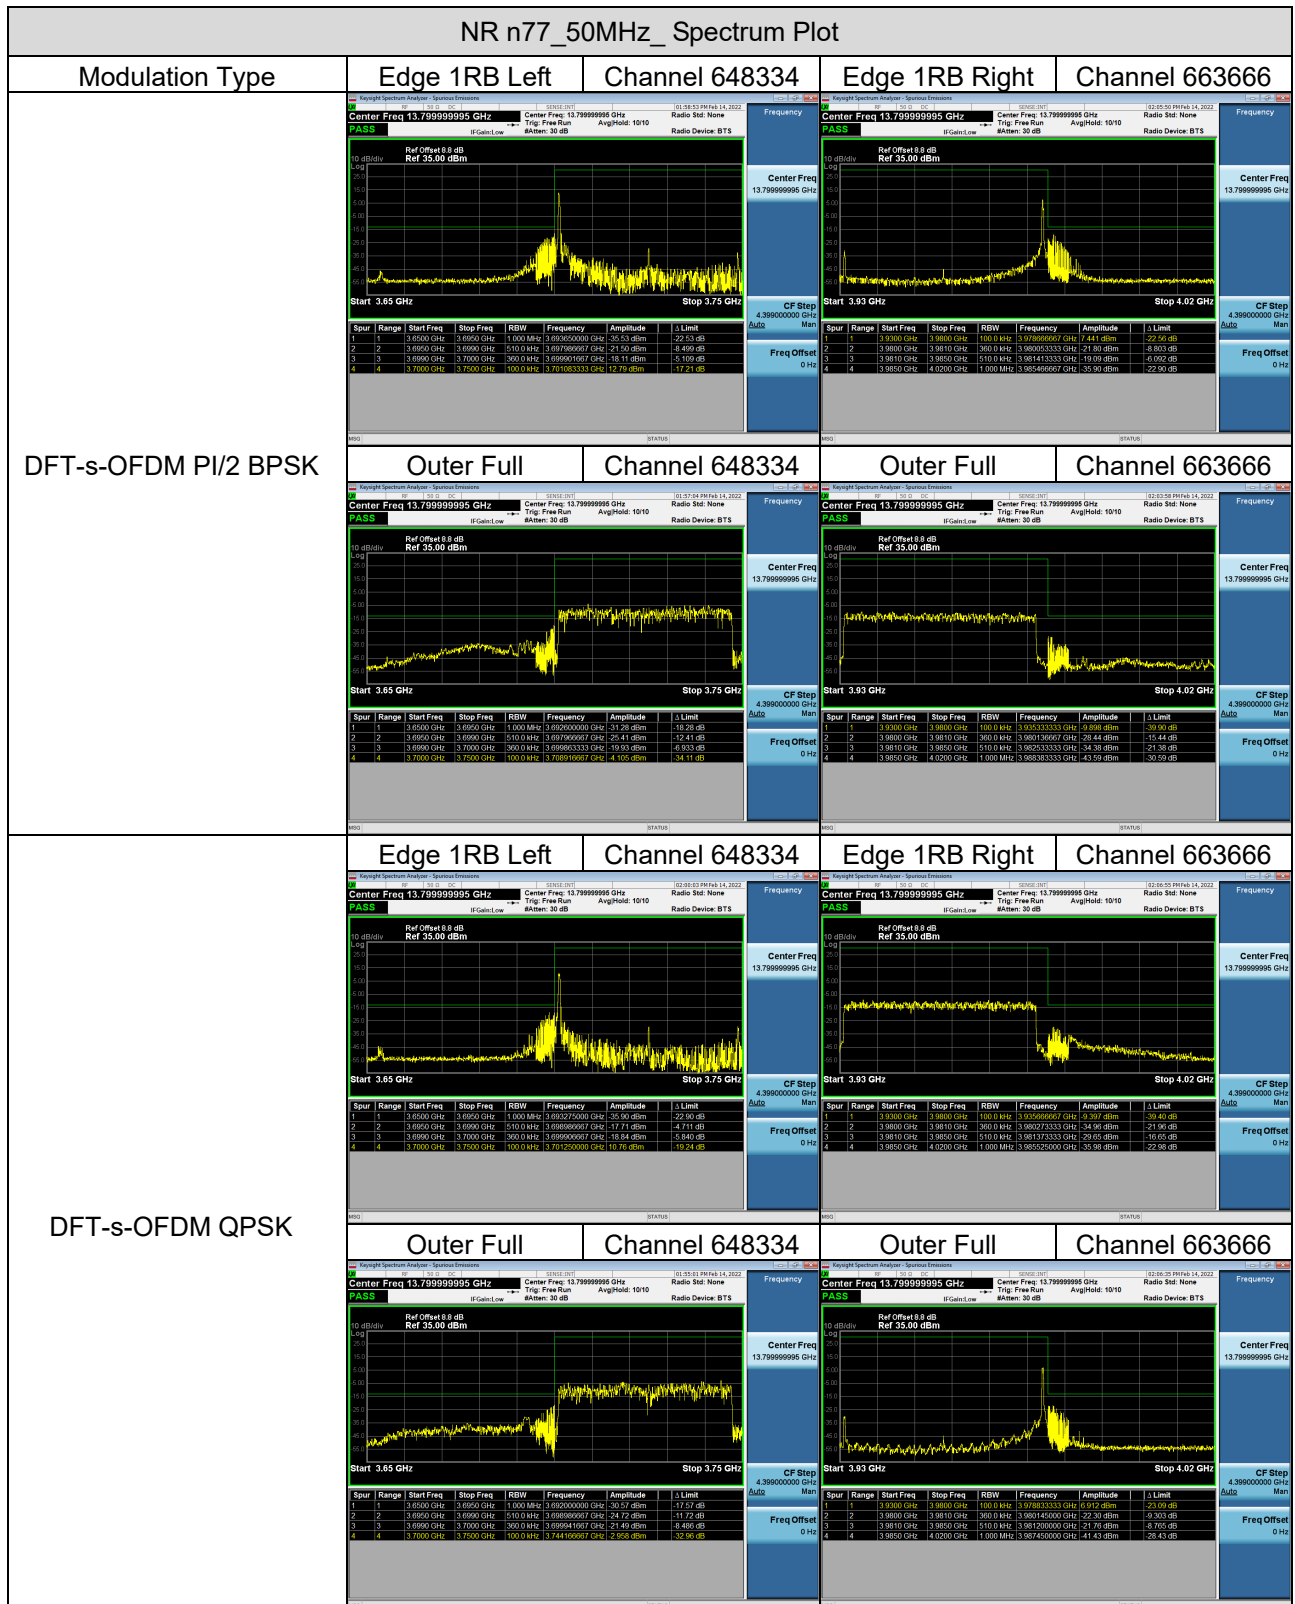


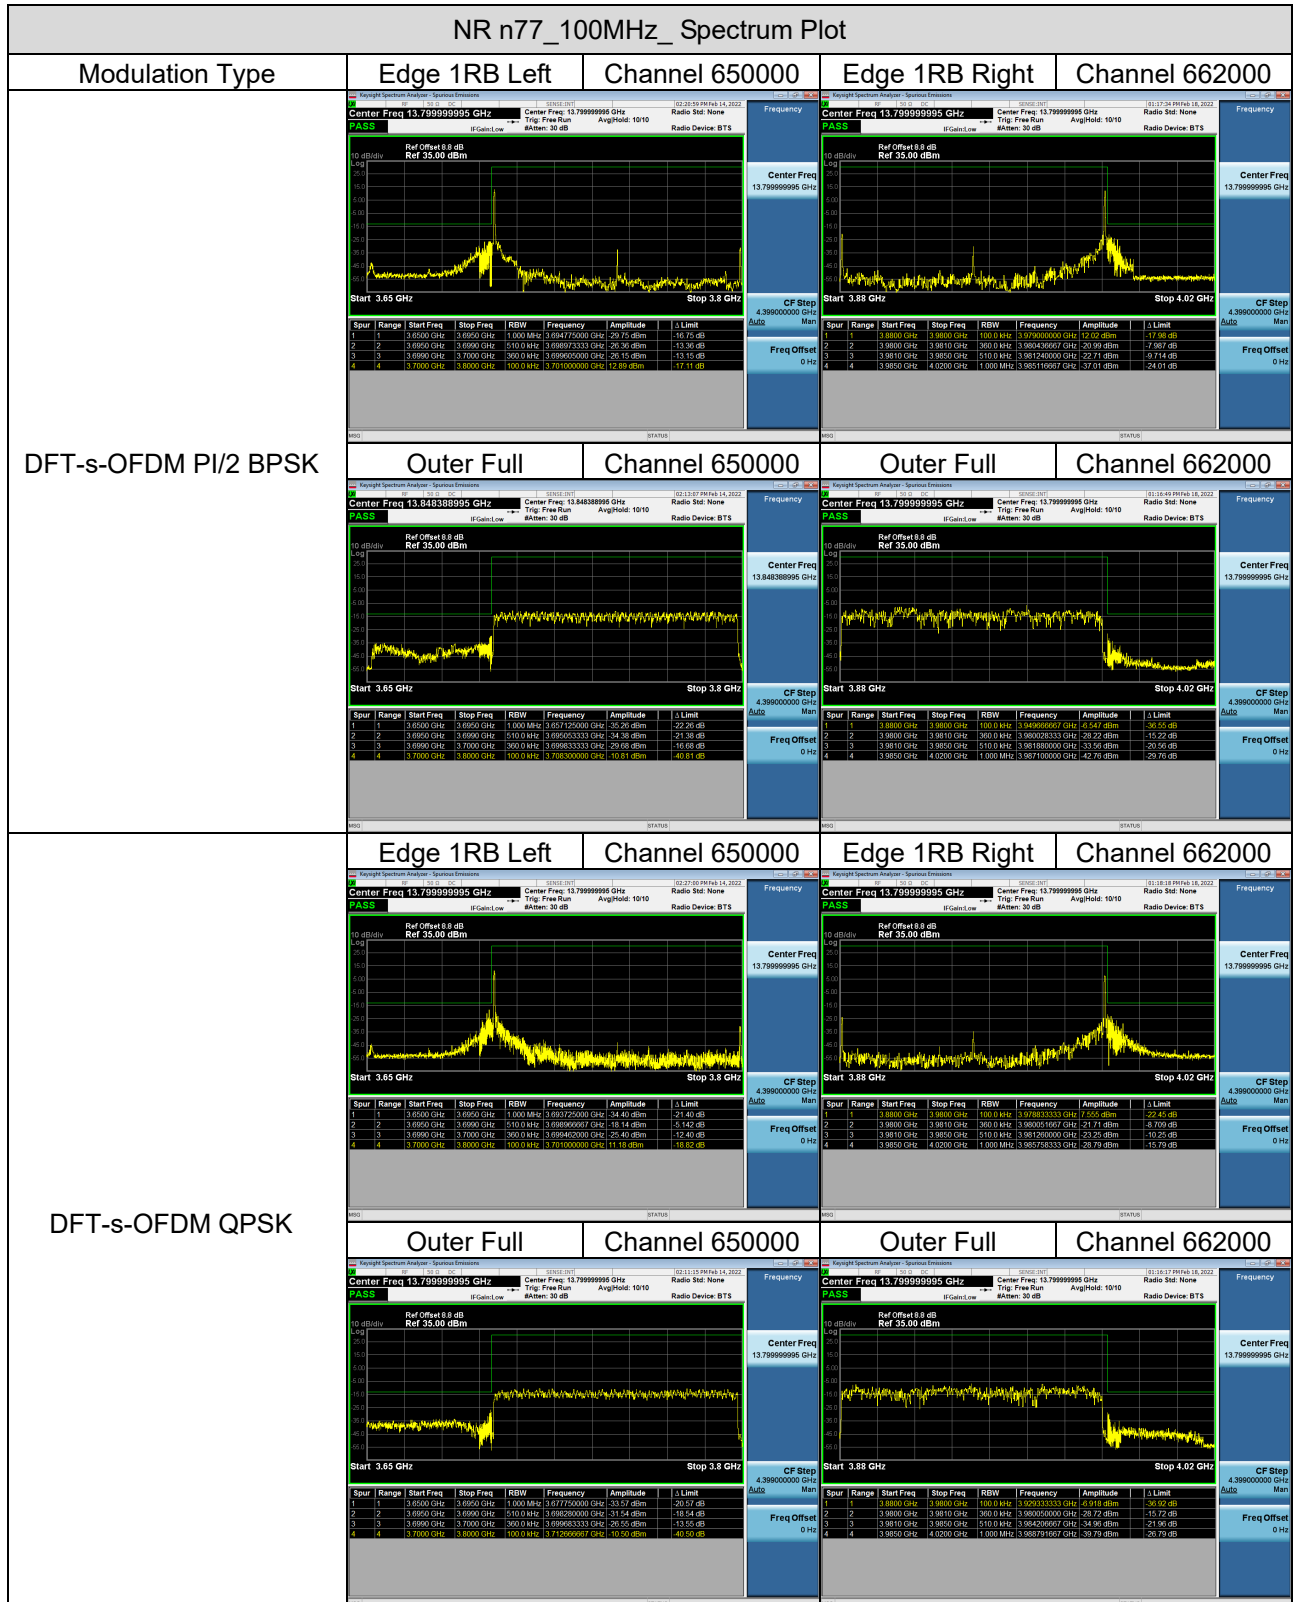

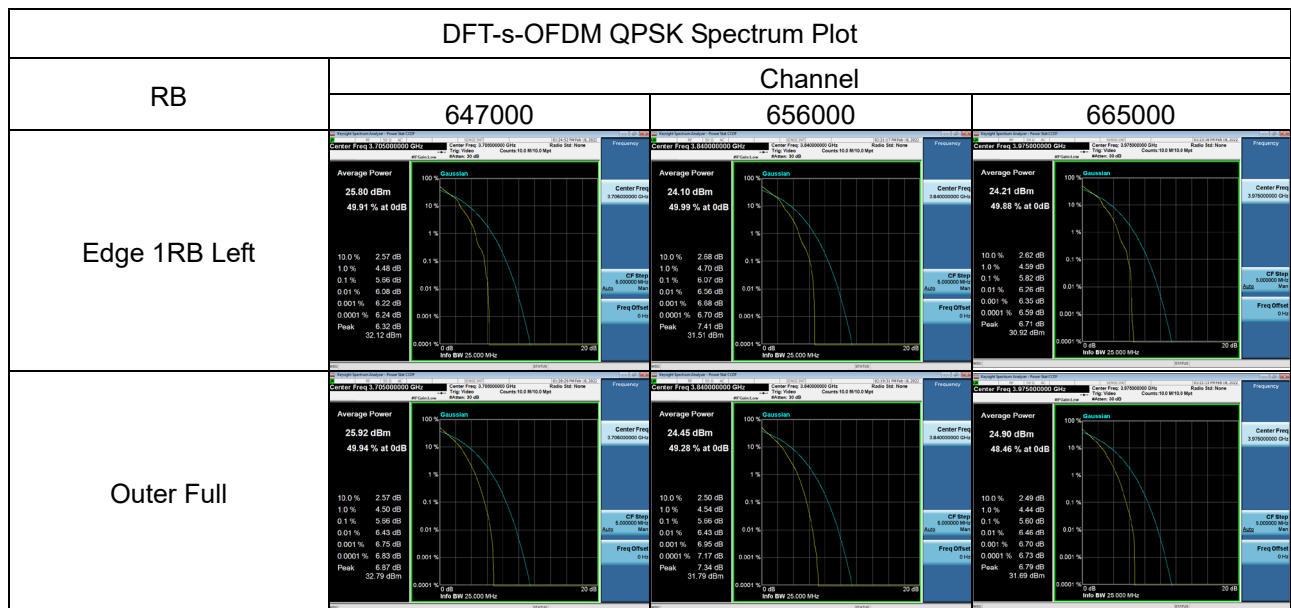

APPENDIX H - PEAK TO AVERAGE RATIO

NR n77_10MHz							
Channel	Frequency (MHz)	Peak To Average Ratio (dB)				Max. Limit (dB)	Result
		DFT-s-OFDM PI/2 BPSK		DFT-s-OFDM QPSK			
		Edge 1RB Left	Outer Full	Edge 1RB Left	Outer Full		
647000	3705	4.07	4.57	5.66	5.66	13	Pass
656000	3840	4.21	4.60	6.07	5.66	13	Pass
665000	3975	4.26	4.57	5.82	5.60	13	Pass

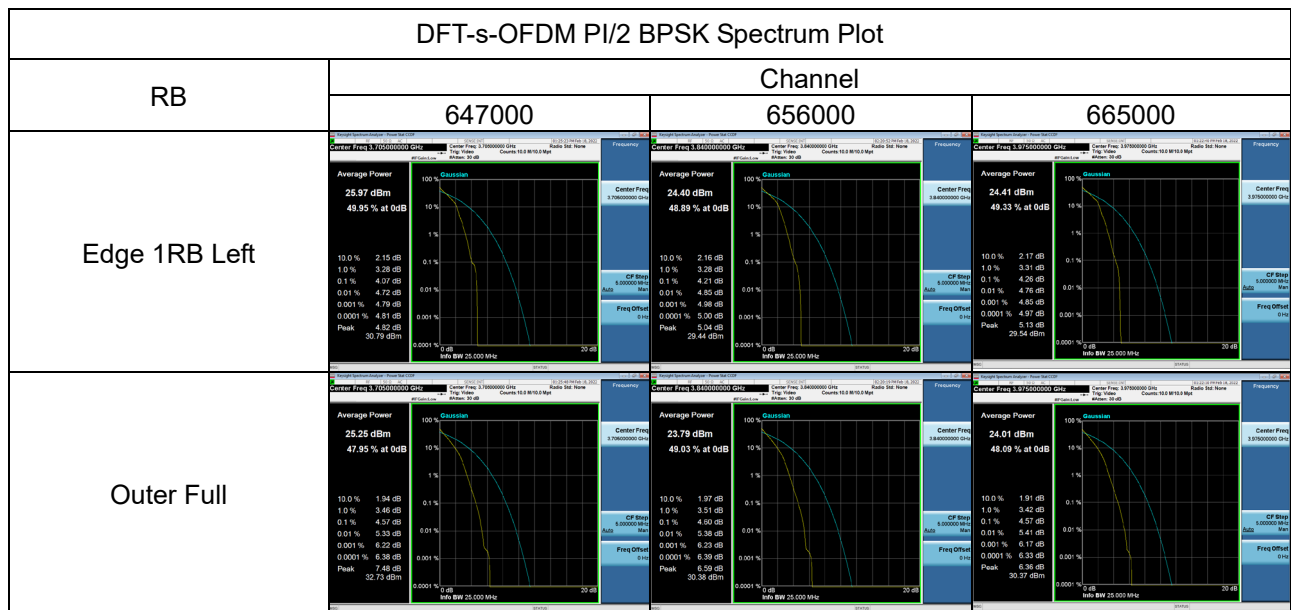

APPENDIX I - FREQUENCY STABILITY

Test Mode	NR n77_10MHz
-----------	--------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency (MHz)		worst ppm
	Low channel limit: 3700 Reference point -13dBm	High channel limit: 3980 Reference point -13dBm	Record only
50	3700.600000	3979.380000	162.1621622
40	3700.600000	3979.380000	162.1621622
30	3700.600000	3979.380000	162.1621622
20	3700.600000	3979.380000	162.1621622
10	3700.600000	3979.380000	162.1621622
0	3700.600000	3979.380000	162.1621622
-10	3700.600000	3979.380000	162.1621622
-20	3700.600000	3979.380000	162.1621622
-30	3700.600000	3979.380000	162.1621622
Minimum voltage	3700.600000	3979.380000	162.1621622
Maximum voltage	3700.600000	3979.380000	162.1621622
Nominal voltage	3700.600000	3979.380000	162.1621622

Note: Nominal voltage= 12V, Maximum voltage= 12.6V, Minimum voltage= 11.4V.

End of Test Report