

TEST REPORT

Product : Voice Lighted Mirror
Trade mark : Kohler
Model/Type reference : 99571-VLAN-NA,
99572-VLAN-NA,
99573-VLAN-NA
Serial Number : N/A
Report Number : EED32K00040202
FCC ID : N82-KOHLER026
Date of Issue : Apr. 13, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:
Kohler Co.
444 Highland Drive, Kohler, Wisconsin 53044 USA

Prepared by:
Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom-chen

Tom chen (Test Project)

Compiled by:

Kevin Ian

Kevin Ian (Project Engineer)

Reviewed by:

Kevin Yang

Kevin yang (Reviewer)

Approved by:

Sheek, Luo

Sheek Luo (Lab supervisor)

Date:

Apr. 13, 2018

Check No.:3096379408



2 Version

Version No.	Date	Description
00	Apr. 13, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.:99571-VLAN-NA, 99572-VLAN-NA, 99573-VLAN-NA

Only the model 99571-VLAN-NA was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being the appearance and size.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	7
6.5 TEST LOCATION.....	7
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	8
7 EQUIPMENT LIST	9
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
Appendix A): 20dB Occupied Bandwidth.....	12
Appendix B): Carrier Frequency Separation.....	16
Appendix C): Dwell Time.....	20
Appendix D): Hopping Channel Number.....	24
Appendix E): Conducted Peak Output Power.....	26
Appendix F): Band-edge for RF Conducted Emissions.....	30
Appendix G): RF Conducted Spurious Emissions.....	35
Appendix H): Pseudorandom Frequency Hopping Sequence.....	42
Appendix I): Antenna Requirement.....	43
Appendix J): AC Power Line Conducted Emission.....	44
Appendix K): Restricted bands around fundamental frequency (Radiated).....	47
Appendix L): Radiated Spurious Emissions.....	60
PHOTOGRAPHS OF TEST SETUP	68
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	70

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

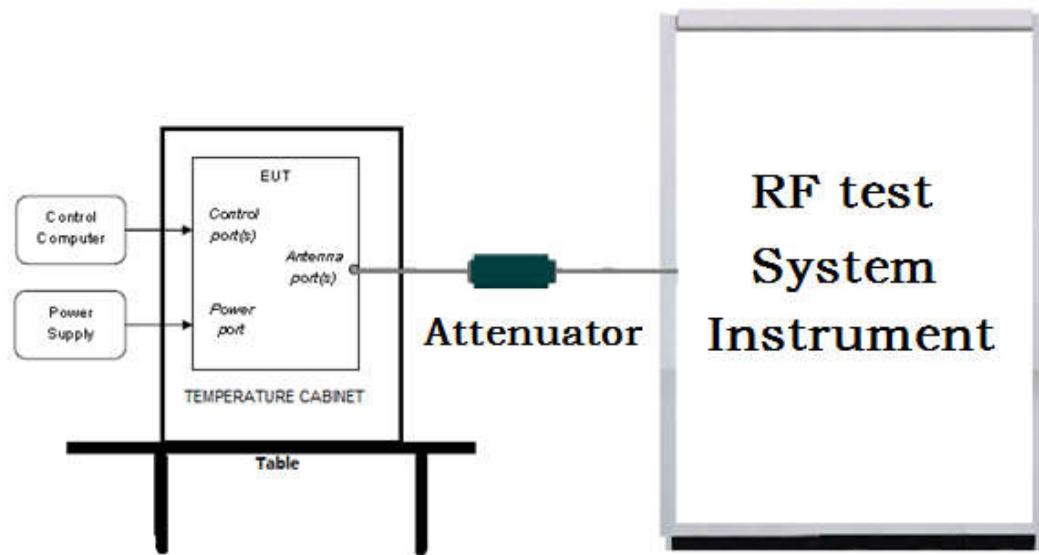

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

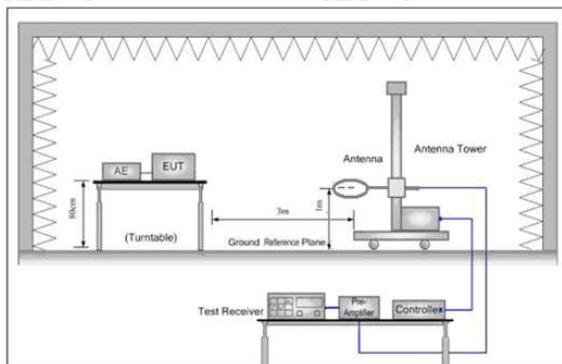


Figure 1. Below 30MHz

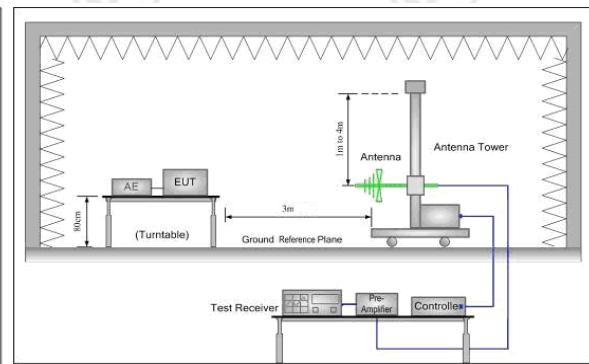


Figure 2. 30MHz to 1GHz


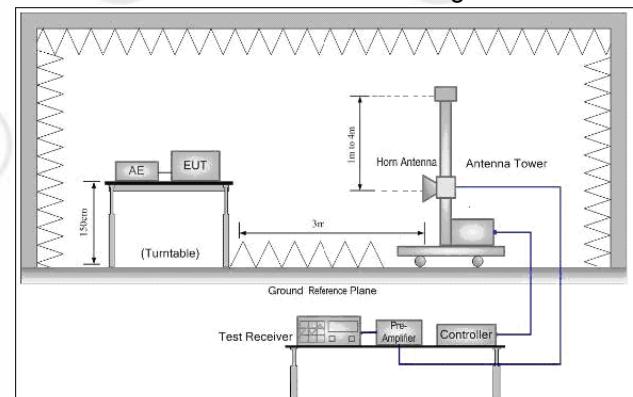


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

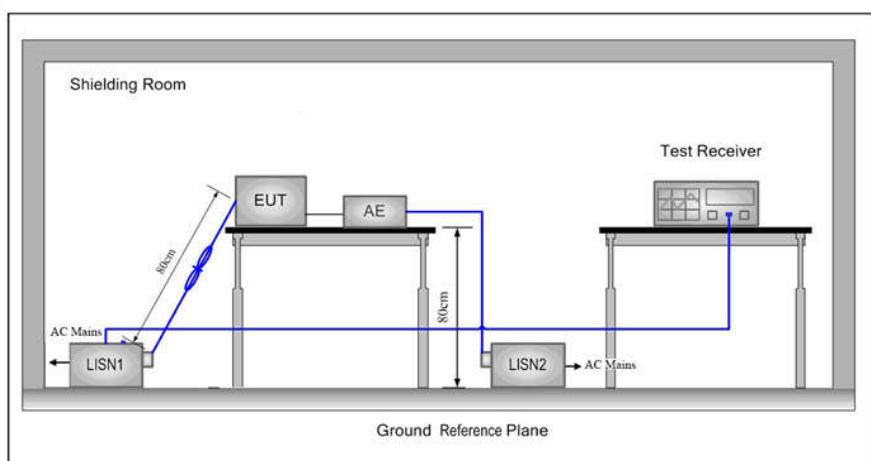

5.2 Test Environment

Operating Environment:	
Temperature:	24.1 °C
Humidity:	58 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ $\pi/4$ DQPSK/ 8DPSK(DH1,DH3,DH5)	402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
		2402MHz	2441MHz	2480MHz

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
EIRP(dBm)	4.145	4.184	4.496
Mode	$\pi/4$ DQPSK		
packets	2-DH1	2-DH3	2-DH5
EIRP(dBm)	5.456	5.482	5.951
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
EIRP(dBm)	5.456	5.785	6.189

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of $\pi/4$ DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	Kohler Co.
Address of Applicant:	444 Highland Drive, Kohler, Wisconsin 53044 USA
Manufacturer:	Kohler Co.
Address of Manufacturer:	444 Highland Drive, Kohler, Wisconsin 53044 USA

6.2 General Description of EUT

Product Name:	Voice Lighted Mirror
Model No.(EUT):	99571-VLAN-NA, 99572-VLAN-NA, 99573-VLAN-NA
Test Model No.:	99571-VLAN-NA
Trade mark:	Kohler
EUT Supports Radios application:	BT 4.0 Dual mode, 2402-2480MHz; WiFi 802.11b/g/n(20MHz)/n(40MHz) ,2412-2462MHz;
Hardware Version:	V02A(manufacturer declare)
Firmware version:	V29(manufacturer declare)
Power Supply:	AC 120V, 60Hz
Sample Received Date:	Mar. 02, 2018
Sample tested Date:	Mar. 02, 2018 to Apr. 12, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	N/A
Test Software of EUT:	(manufacturer declare)RTLBTAPP.exe
Antenna Type and Gain:	Type: Balun antenna; Gain:2.5dBi
Test Voltage:	AC 120V, 60Hz

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12-0398-002	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
power meter & power sensor	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	158060006	03-13-2018	03-12-2019
Temperature / Humidity Indicator	Defu	TH128	---	07-08-2017	07-07-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3MChamber&Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
Spectrum Analyzer	Agilent	E4443A	MY45300910	11-16-2017	11-15-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-618	08-15-2017	08-14-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Microwave Preamplifier	JS Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Loop Antenna	ETS-LINDGREN	6502	00071730	06-22-2017	06-21-2019
Horn Antenna	ETS-LINGREN	3117	00057407	07-20-2015	07-18-2018
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	6042	06-30-2015	06-28-2018
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041	06-30-2015	06-28-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-14-2017	06-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	06-14-2017	06-13-2018
LISN	schwarzbeck	NNLK8121	8121-529	06-13-2017	06-12-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)


Appendix A): 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9850	0.91385	PASS
GFSK	MCH	0.9836	0.91169	PASS
GFSK	HCH	0.9866	0.91446	PASS
$\pi/4$ DQPSK	LCH	1.284	1.1780	PASS
$\pi/4$ DQPSK	MCH	1.290	1.1764	PASS
$\pi/4$ DQPSK	HCH	1.287	1.1819	PASS
8DPSK	LCH	1.287	1.1719	PASS
8DPSK	MCH	1.289	1.1730	PASS
8DPSK	HCH	1.289	1.1735	PASS

Test Graph

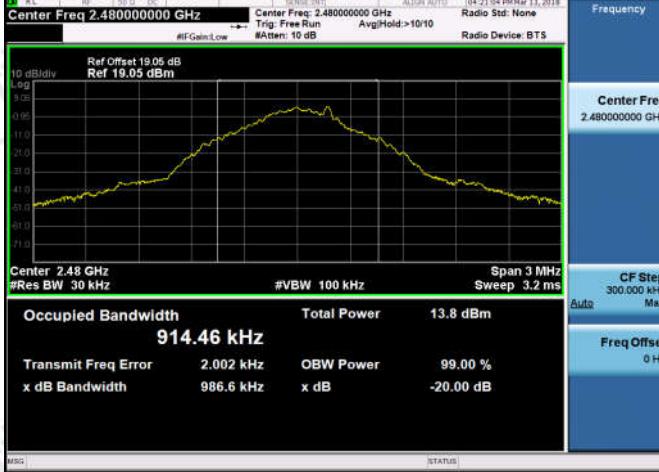Graphs	
GFSK/LCH	 <p>Occupied Bandwidth: 913.85 kHz</p> <p>Total Power: 12.1 dBm</p>
GFSK/MCH	 <p>Occupied Bandwidth: 911.69 kHz</p> <p>Total Power: 13.2 dBm</p>
GFSK/HCH	 <p>Occupied Bandwidth: 914.46 kHz</p> <p>Total Power: 13.8 dBm</p>

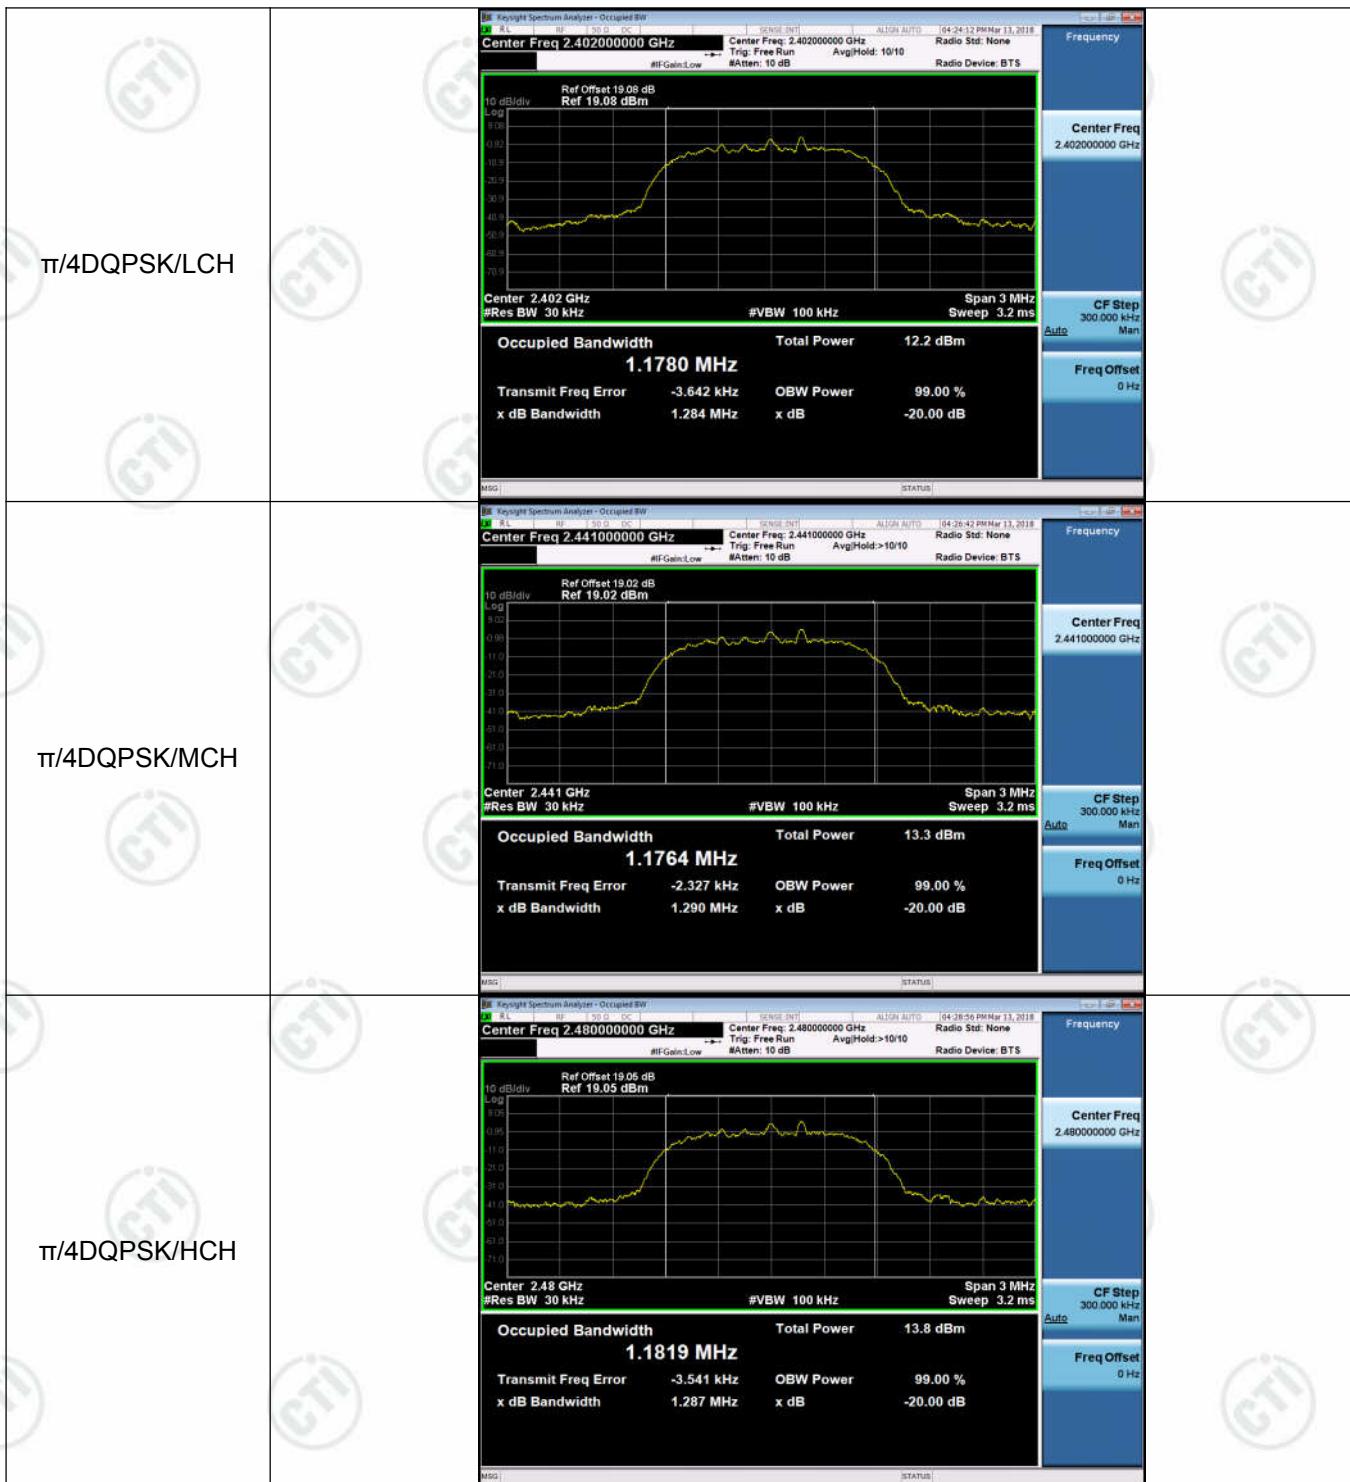

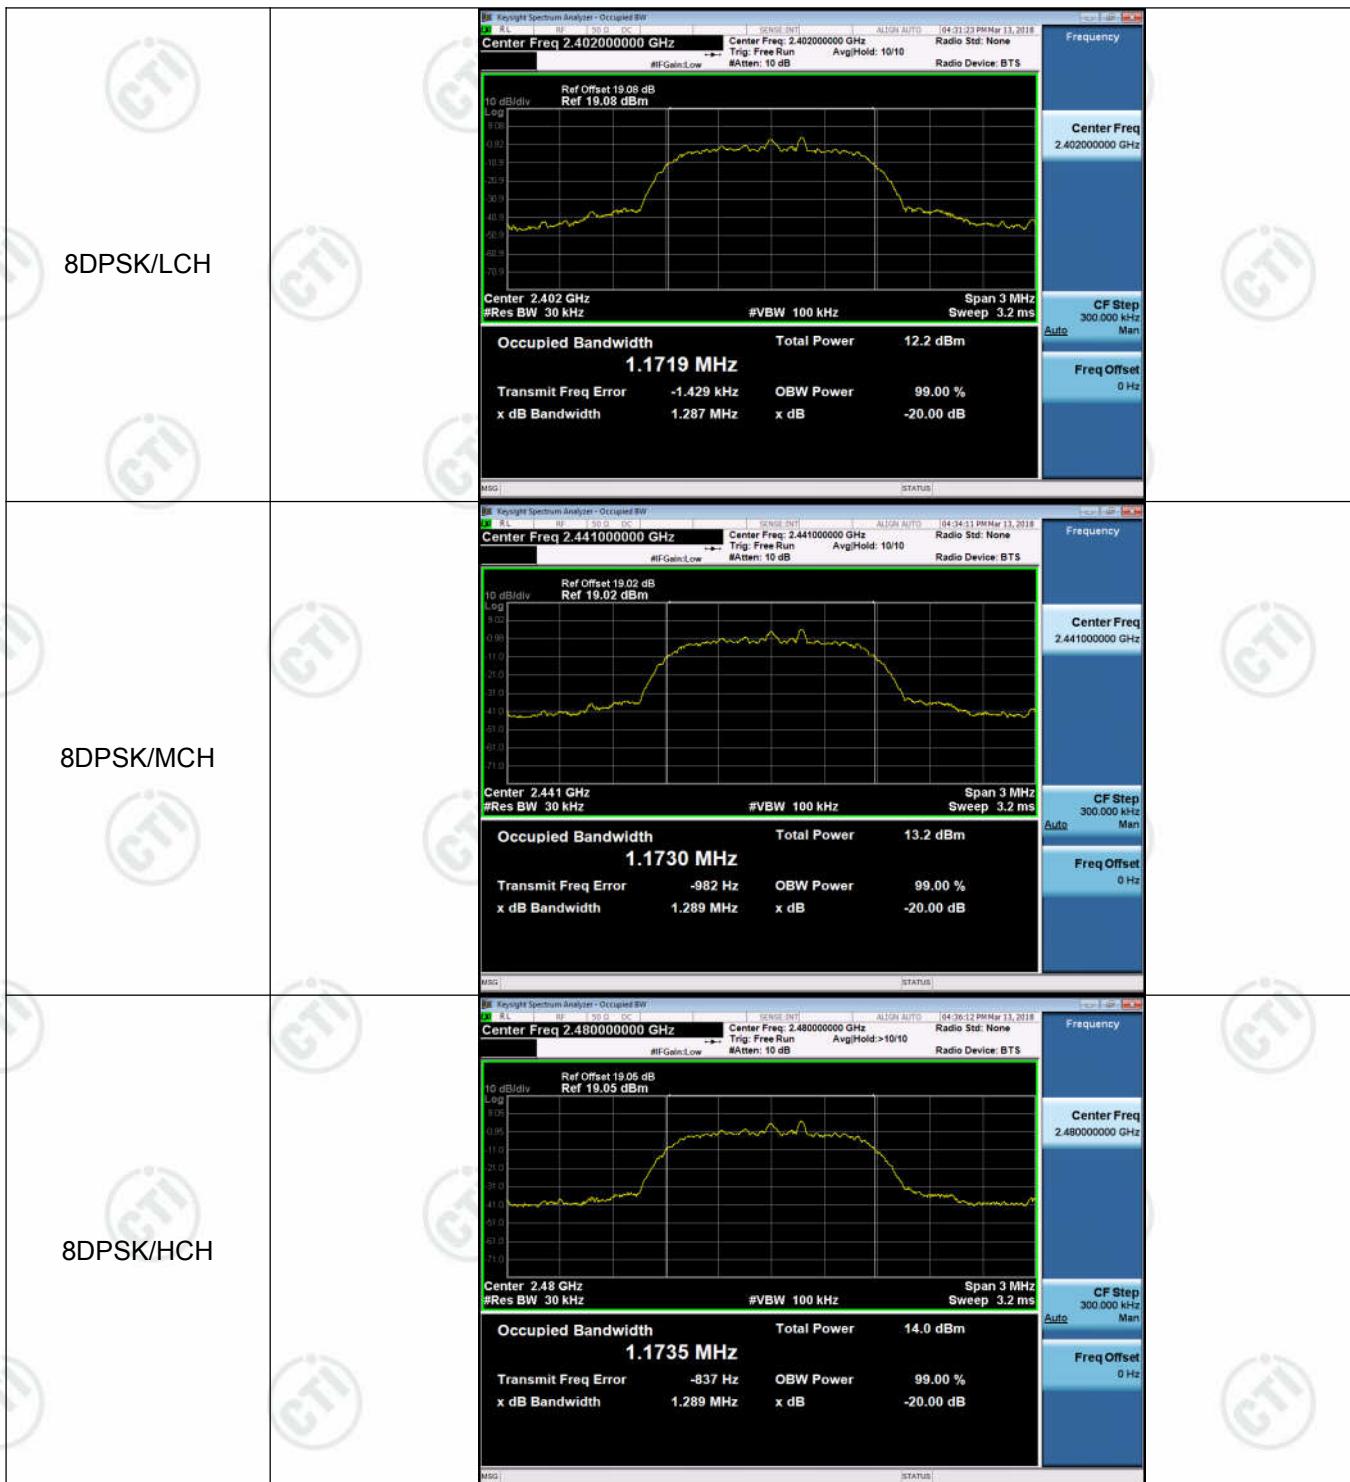


Appendix B): Carrier Frequency Separation


Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.146	PASS
GFSK	MCH	0.906	PASS
GFSK	HCH	1.016	PASS
$\pi/4$ DQPSK	LCH	1.068	PASS
$\pi/4$ DQPSK	MCH	1.016	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS
8DPSK	LCH	0.996	PASS
8DPSK	MCH	1.004	PASS
8DPSK	HCH	1.022	PASS

Test Graph



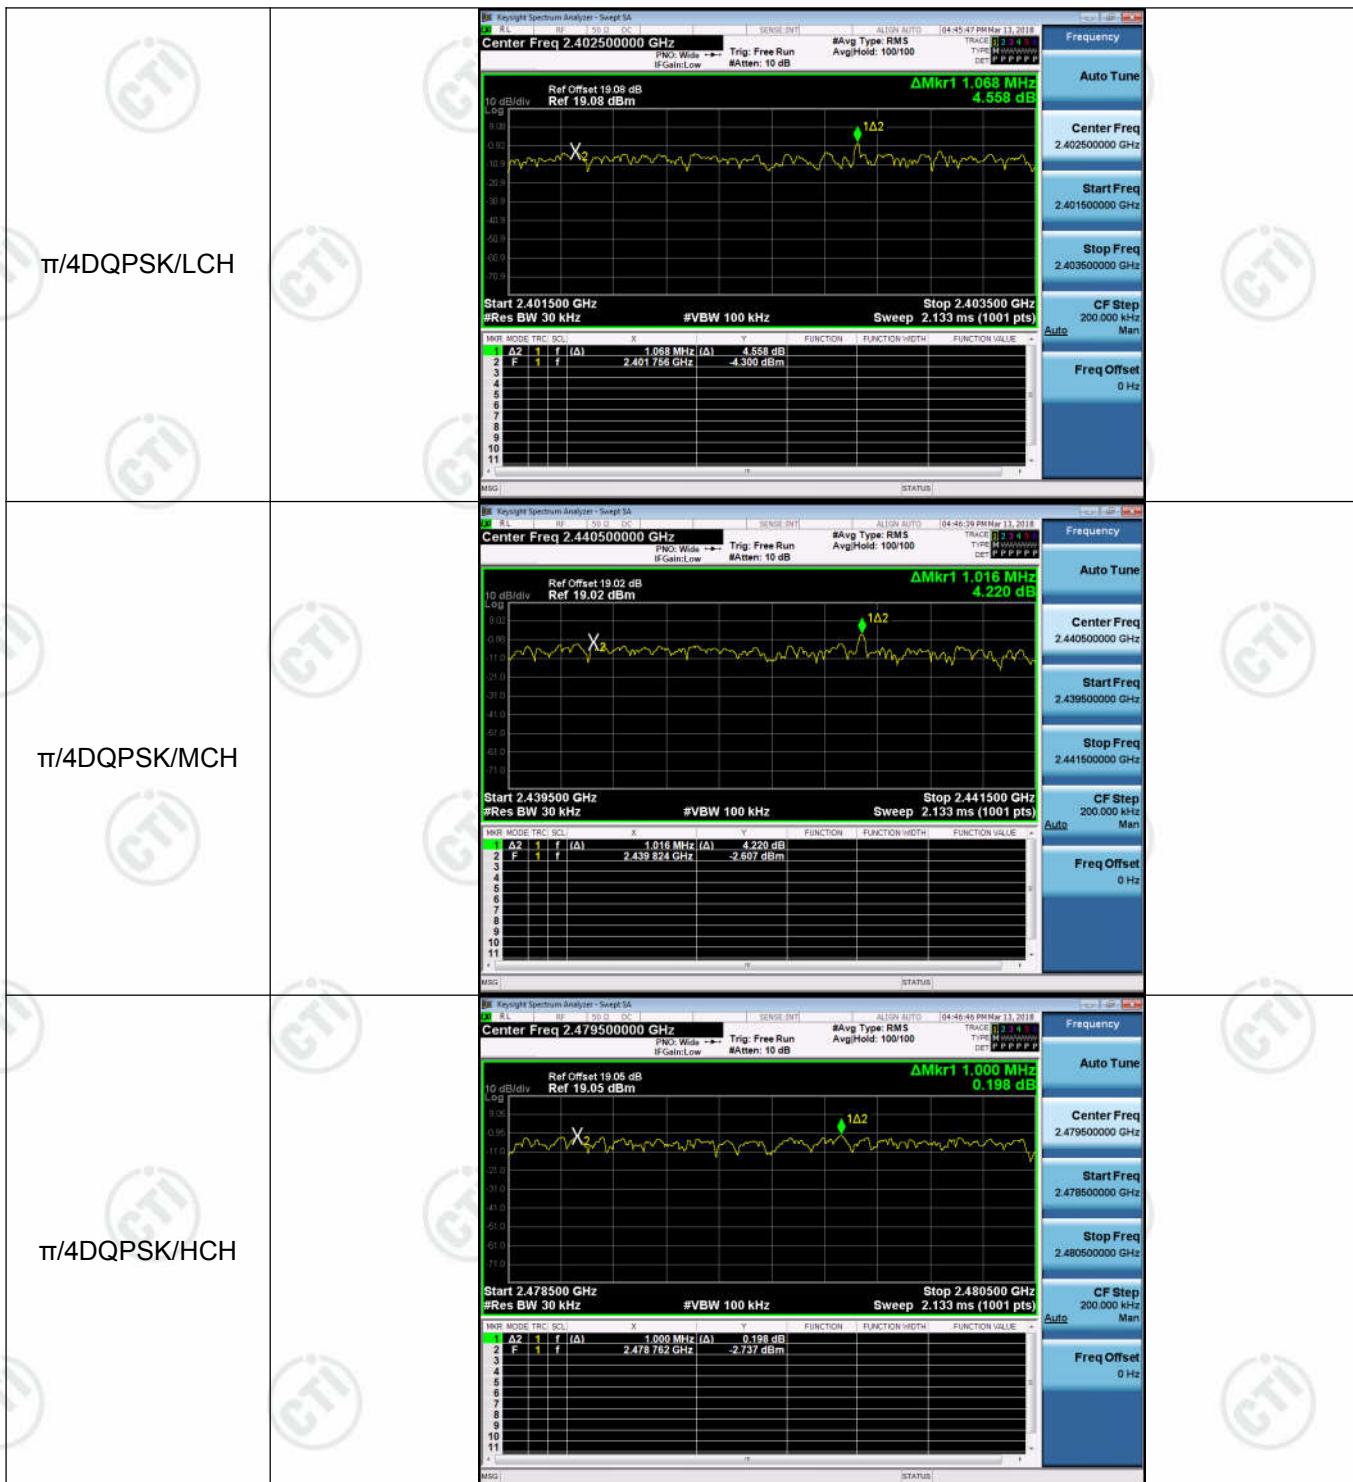

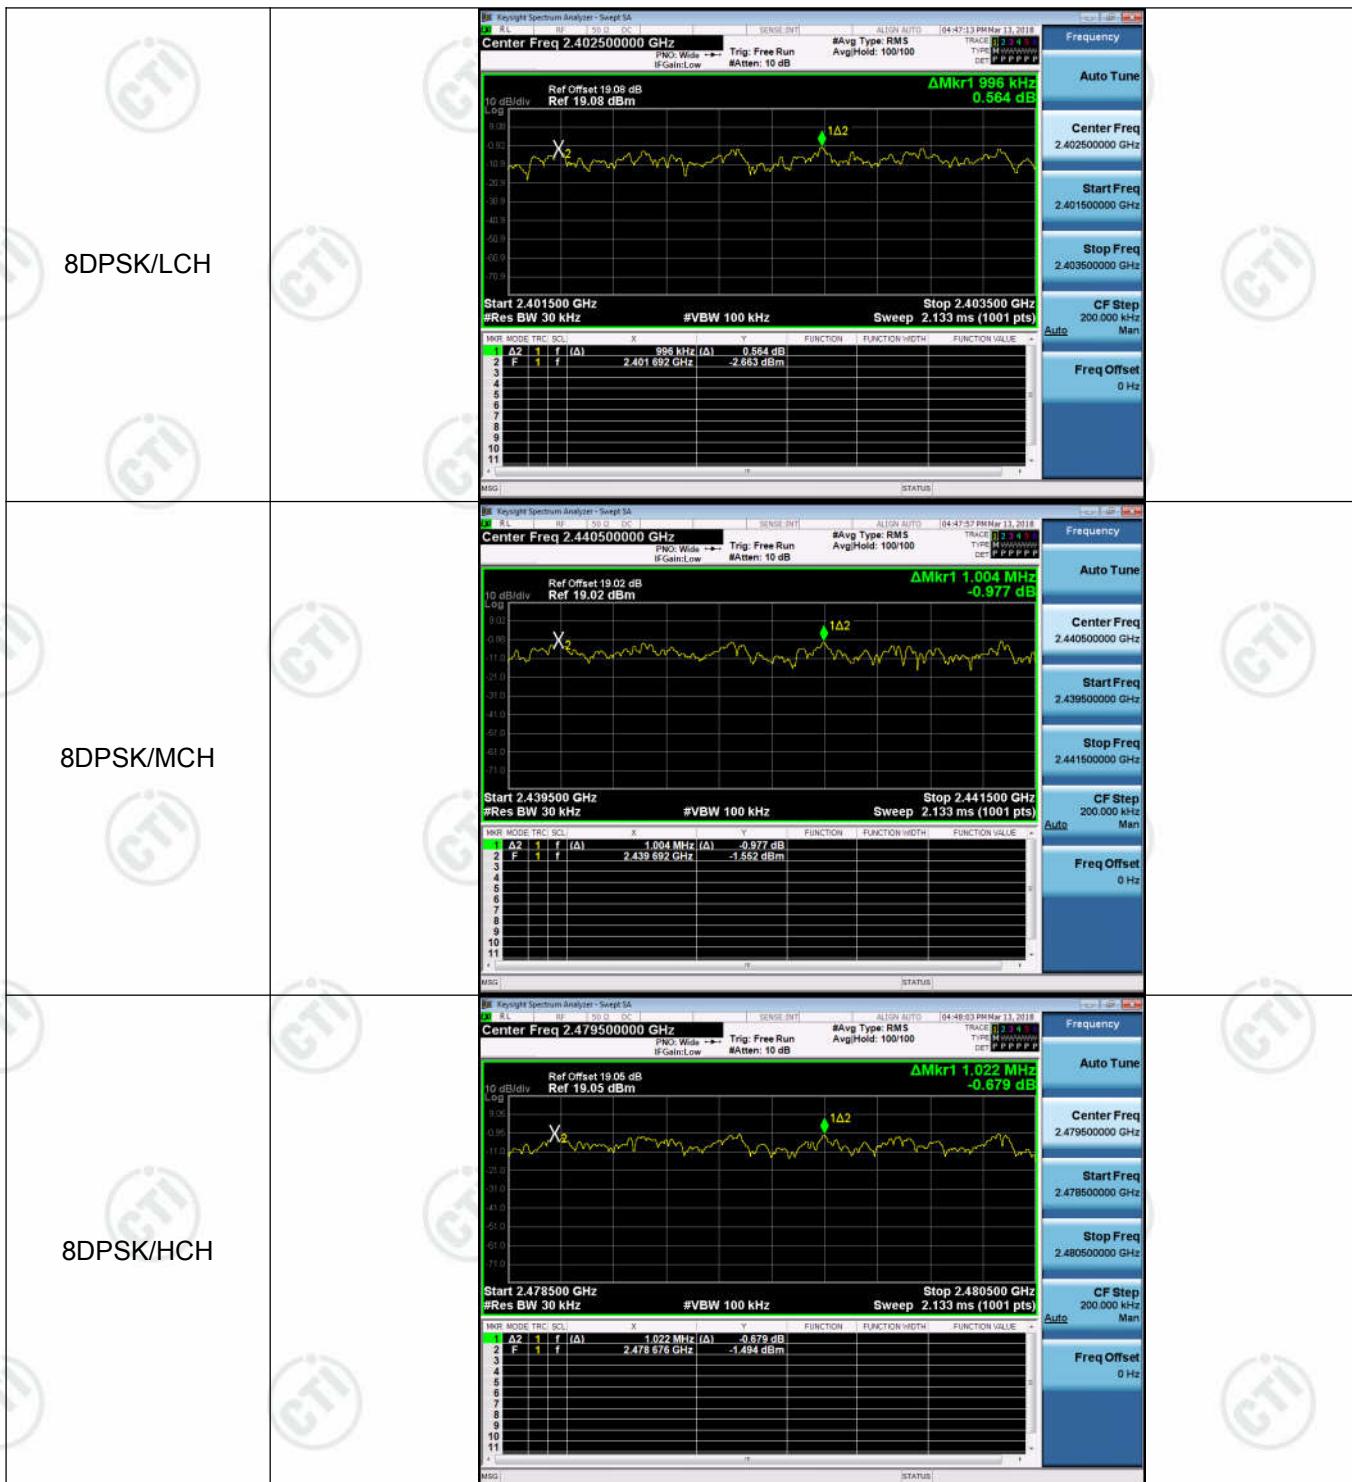


Appendix C): Dwell Time


Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.3635333	320	0.116	0.64	PASS
GFSK	DH1	MCH	0.363533	320	0.116	0.64	PASS
GFSK	DH1	HCH	0.363533	320	0.116	0.64	PASS
GFSK	DH3	LCH	1.618803	160	0.259	0.89	PASS
GFSK	DH3	MCH	1.6188	160	0.259	0.89	PASS
GFSK	DH3	HCH	1.6188	160	0.259	0.89	PASS
GFSK	DH5	LCH	2.852	106.7	0.304	0.93	PASS
GFSK	DH5	MCH	2.852	106.7	0.304	0.93	PASS
GFSK	DH5	HCH	2.852	106.7	0.304	0.93	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph

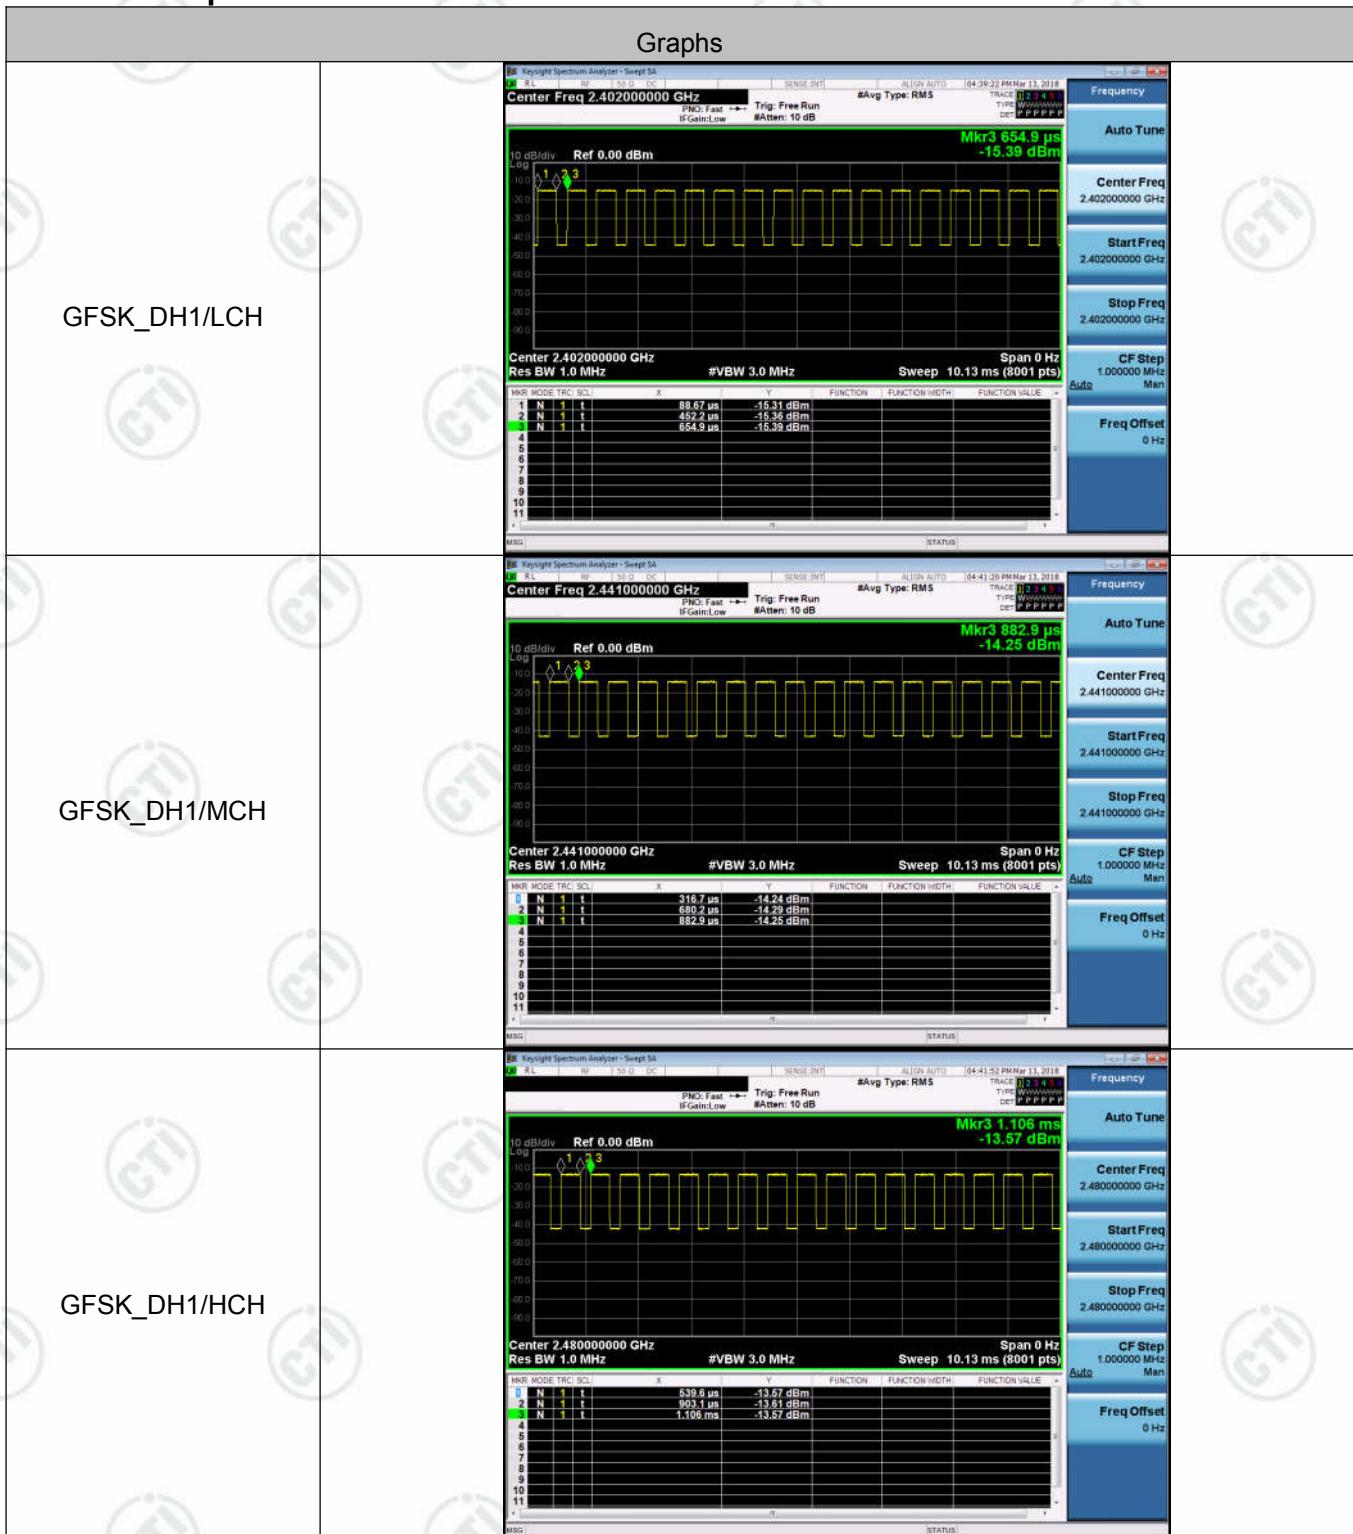

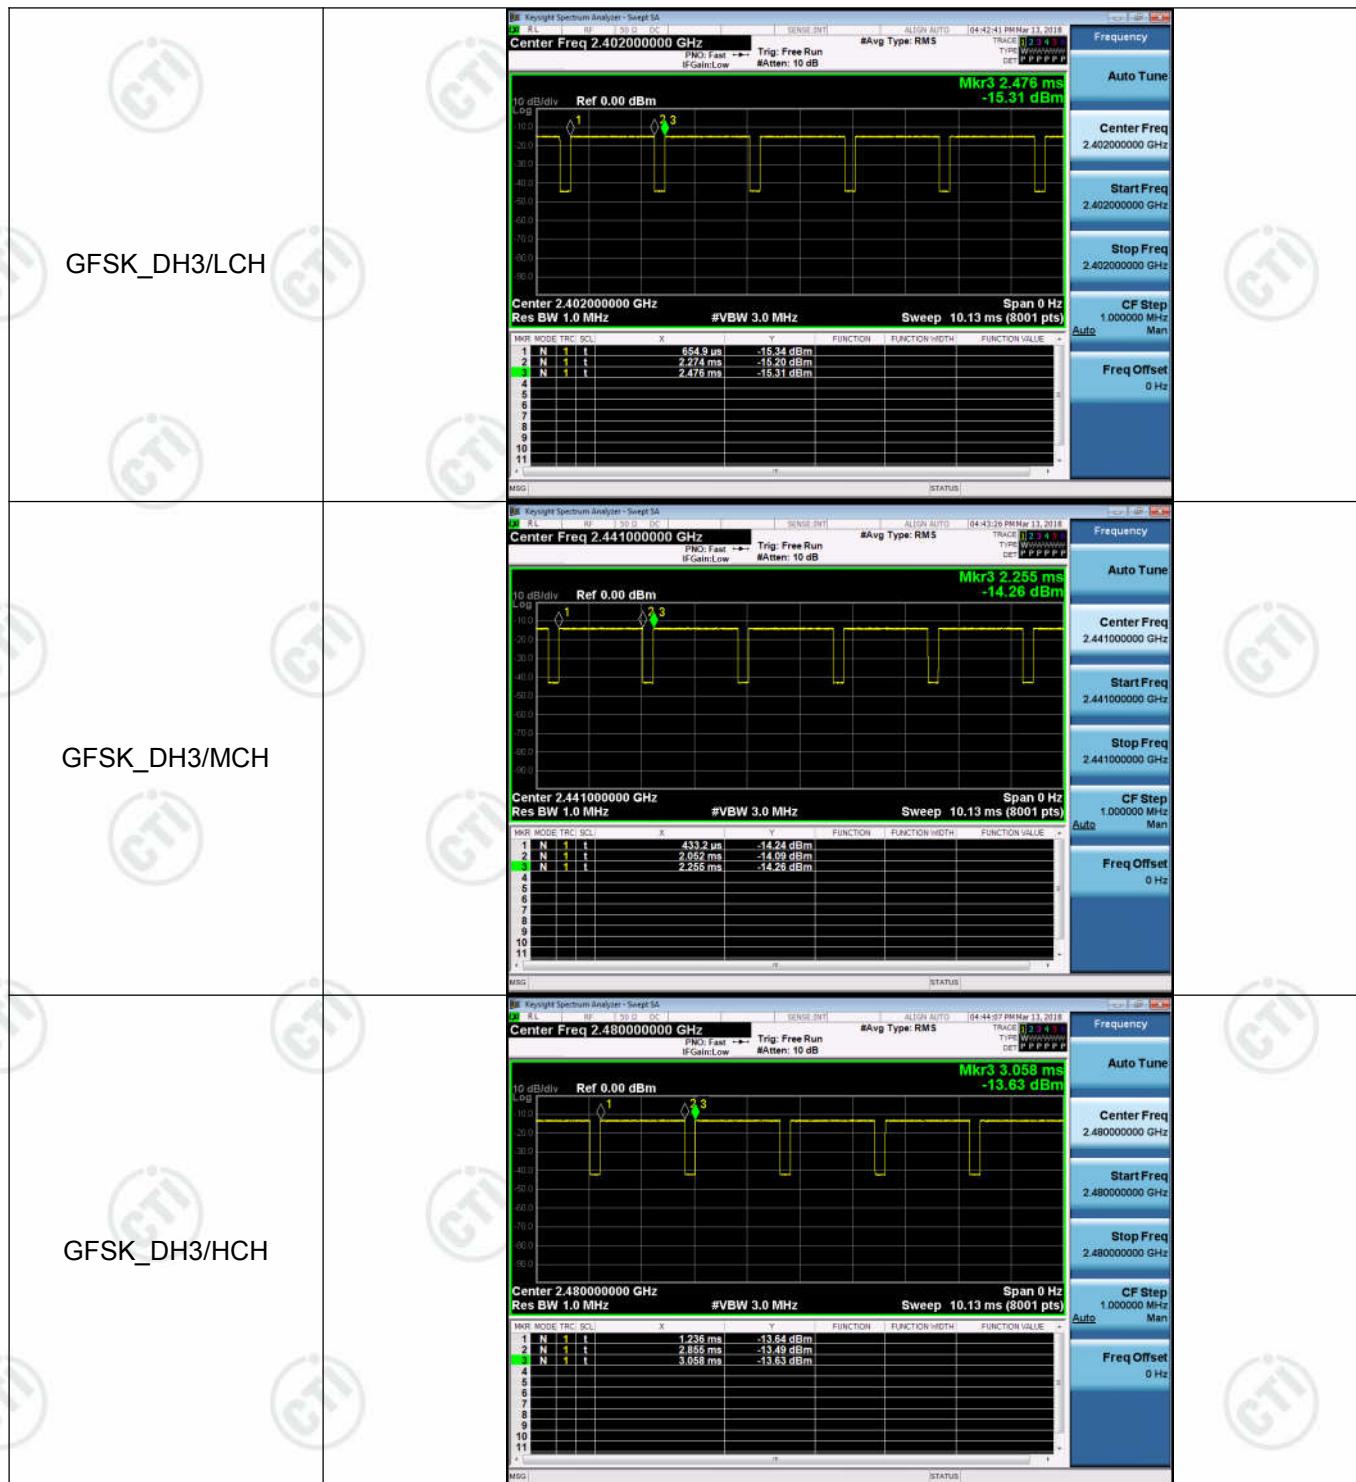


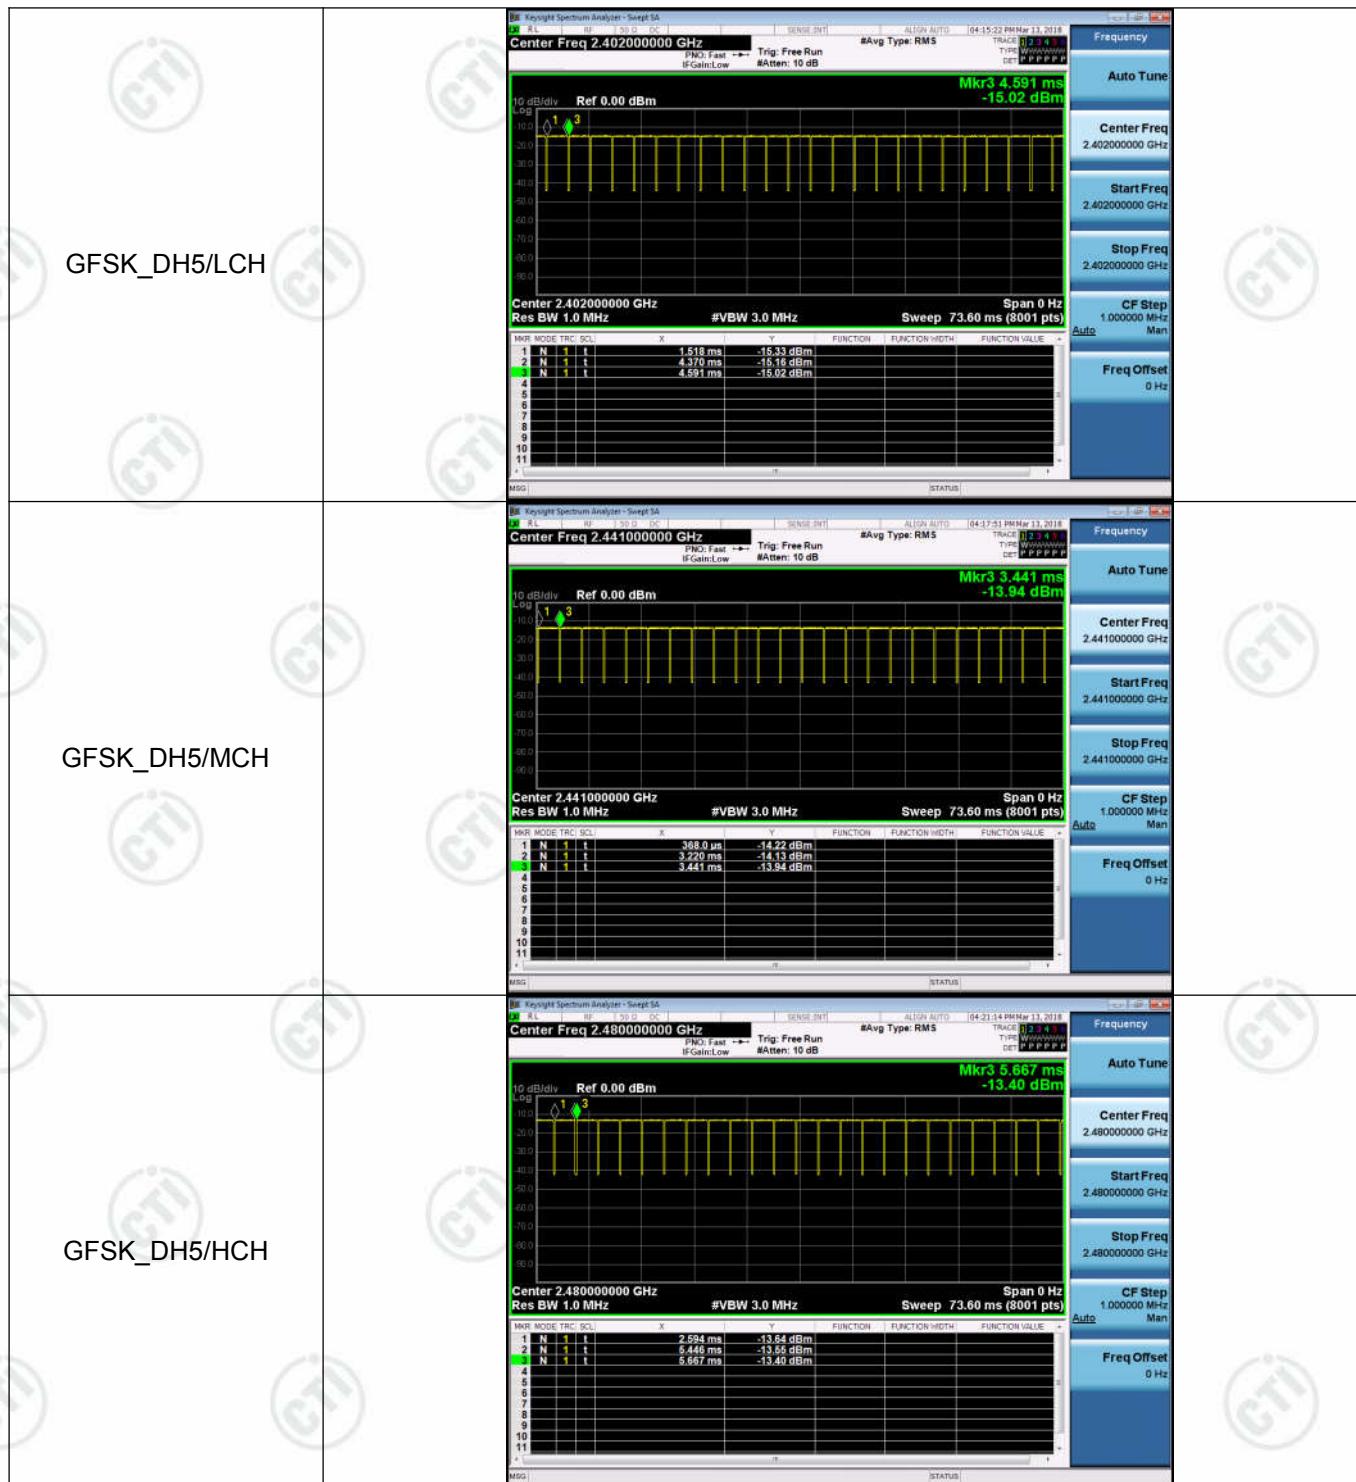

Appendix D): Hopping Channel Number**Result Table**

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

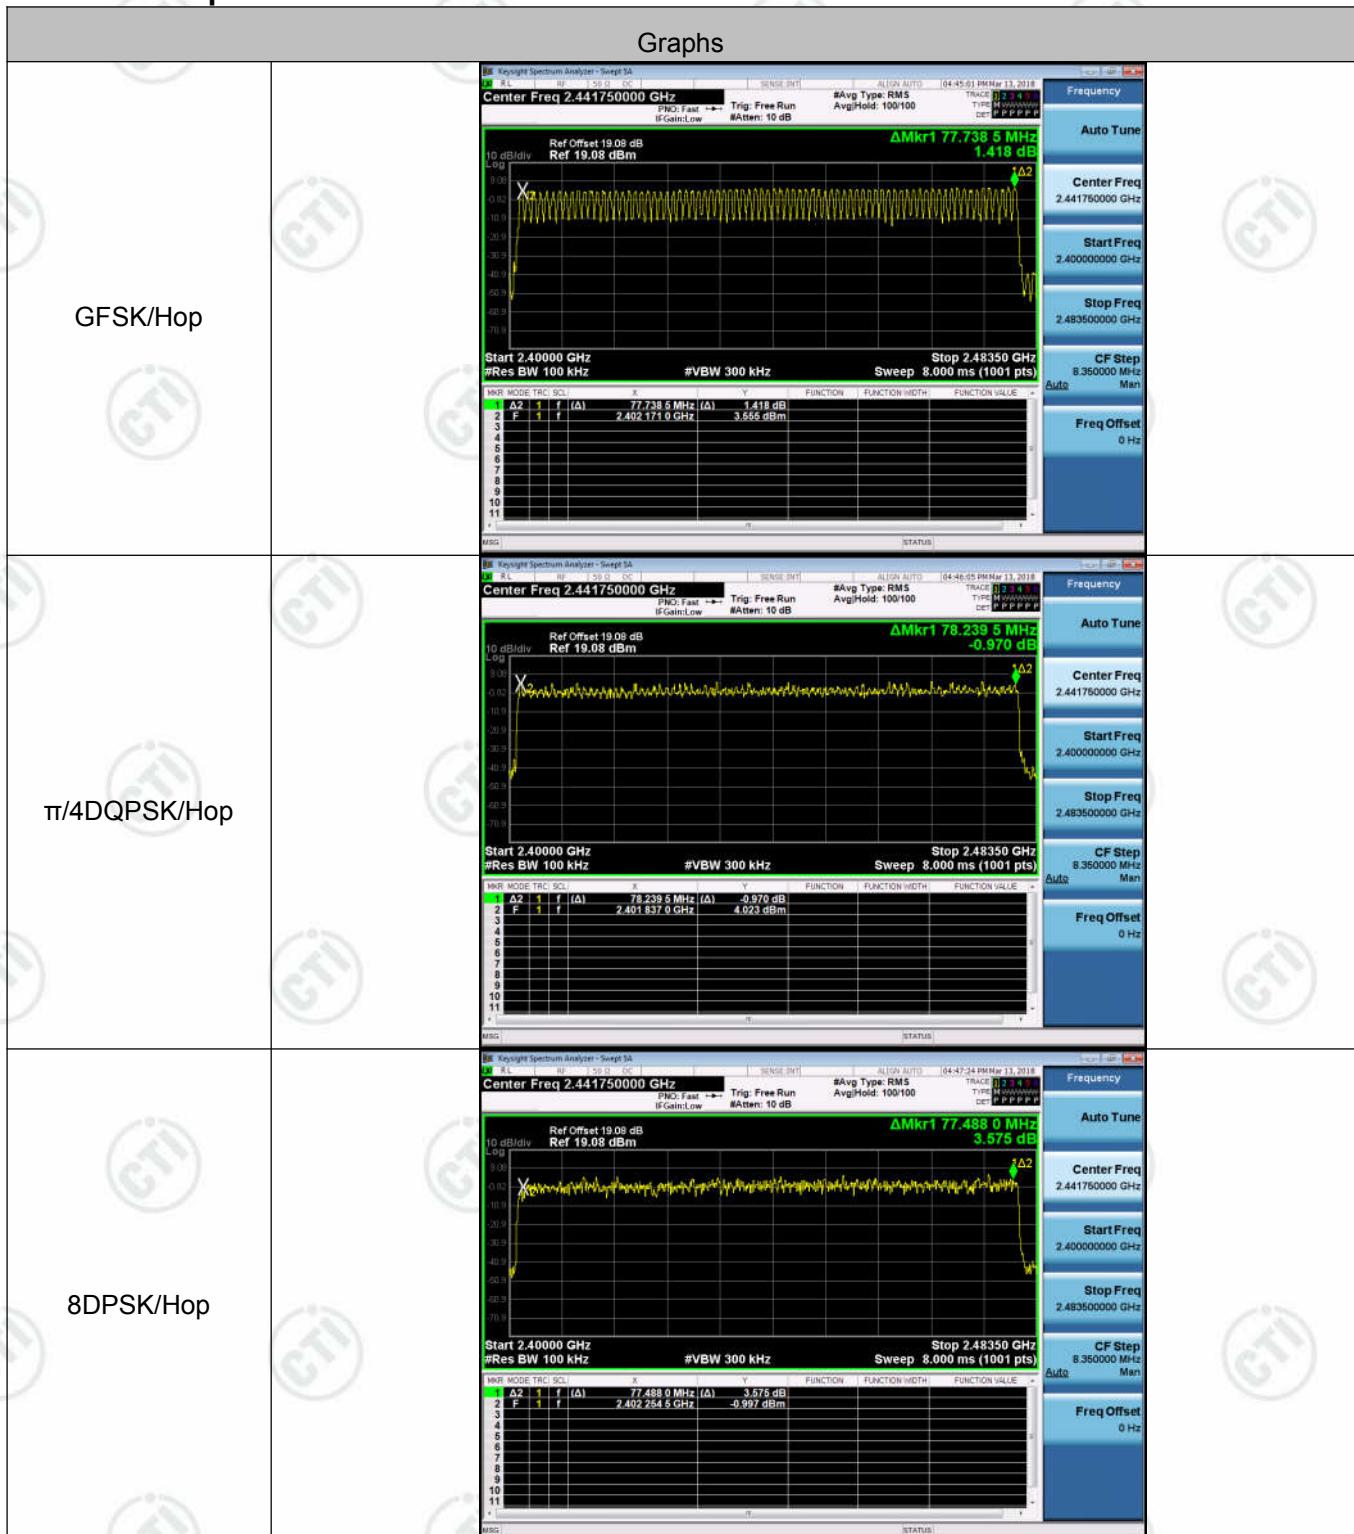



Appendix E): Conducted Peak Output Power


Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	4.496	PASS
GFSK	MCH	5.540	PASS
GFSK	HCH	6.164	PASS
$\pi/4$ DQPSK	LCH	5.951	PASS
$\pi/4$ DQPSK	MCH	6.898	PASS
$\pi/4$ DQPSK	HCH	7.430	PASS
8DPSK	LCH	6.189	PASS
8DPSK	MCH	7.186	PASS
8DPSK	HCH	7.791	PASS

Test Graph

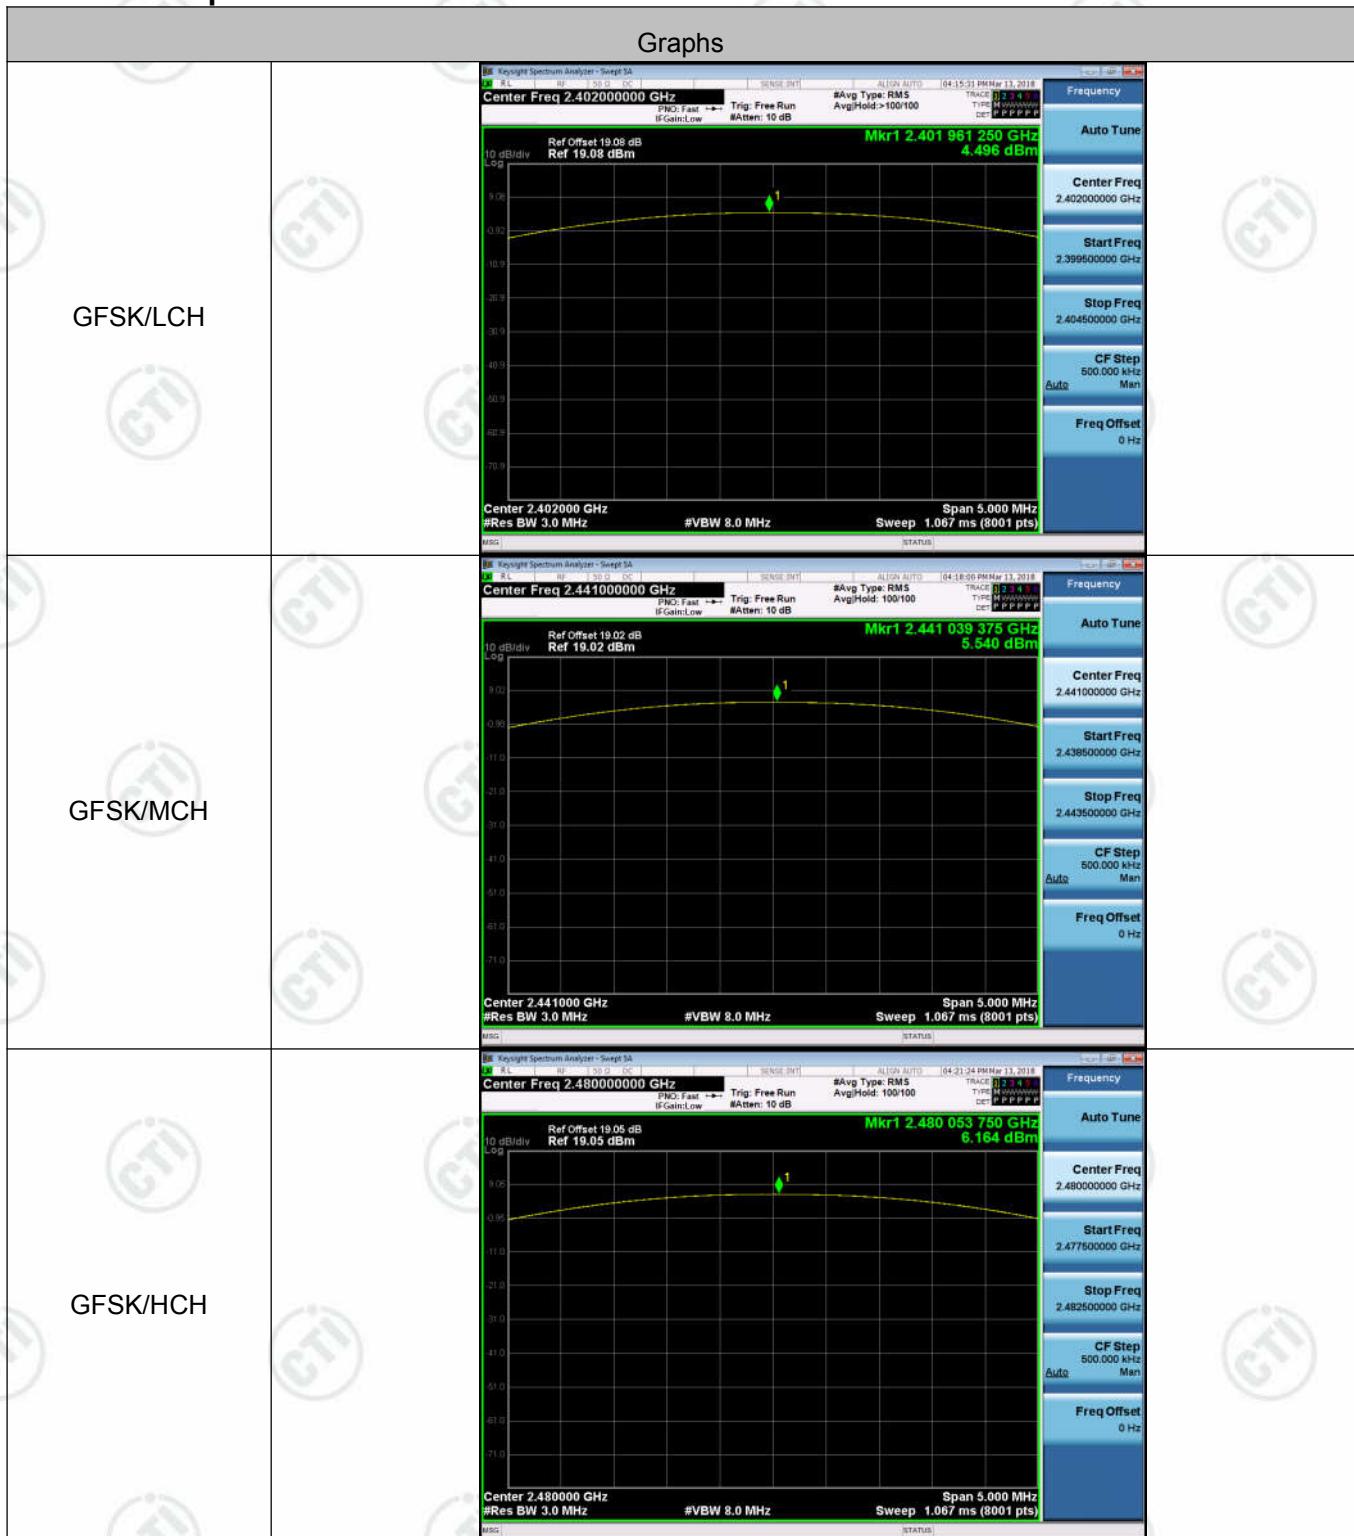

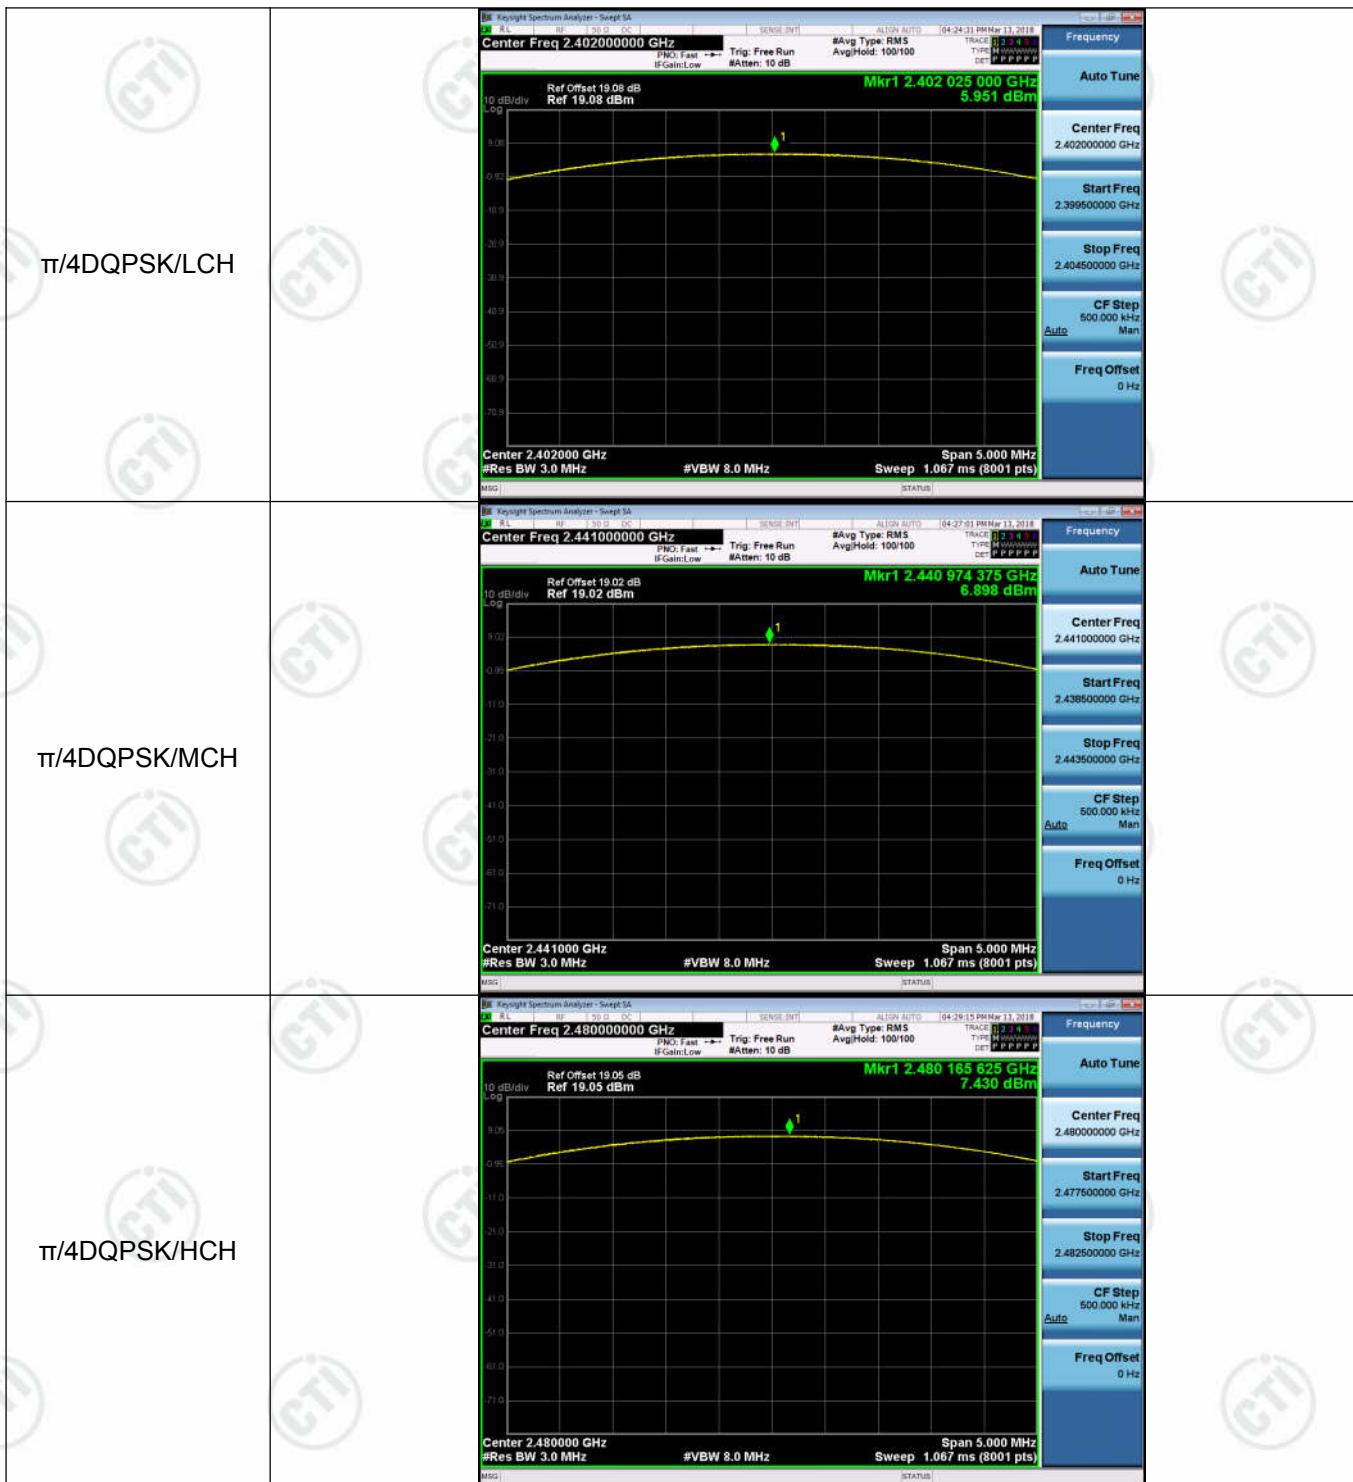

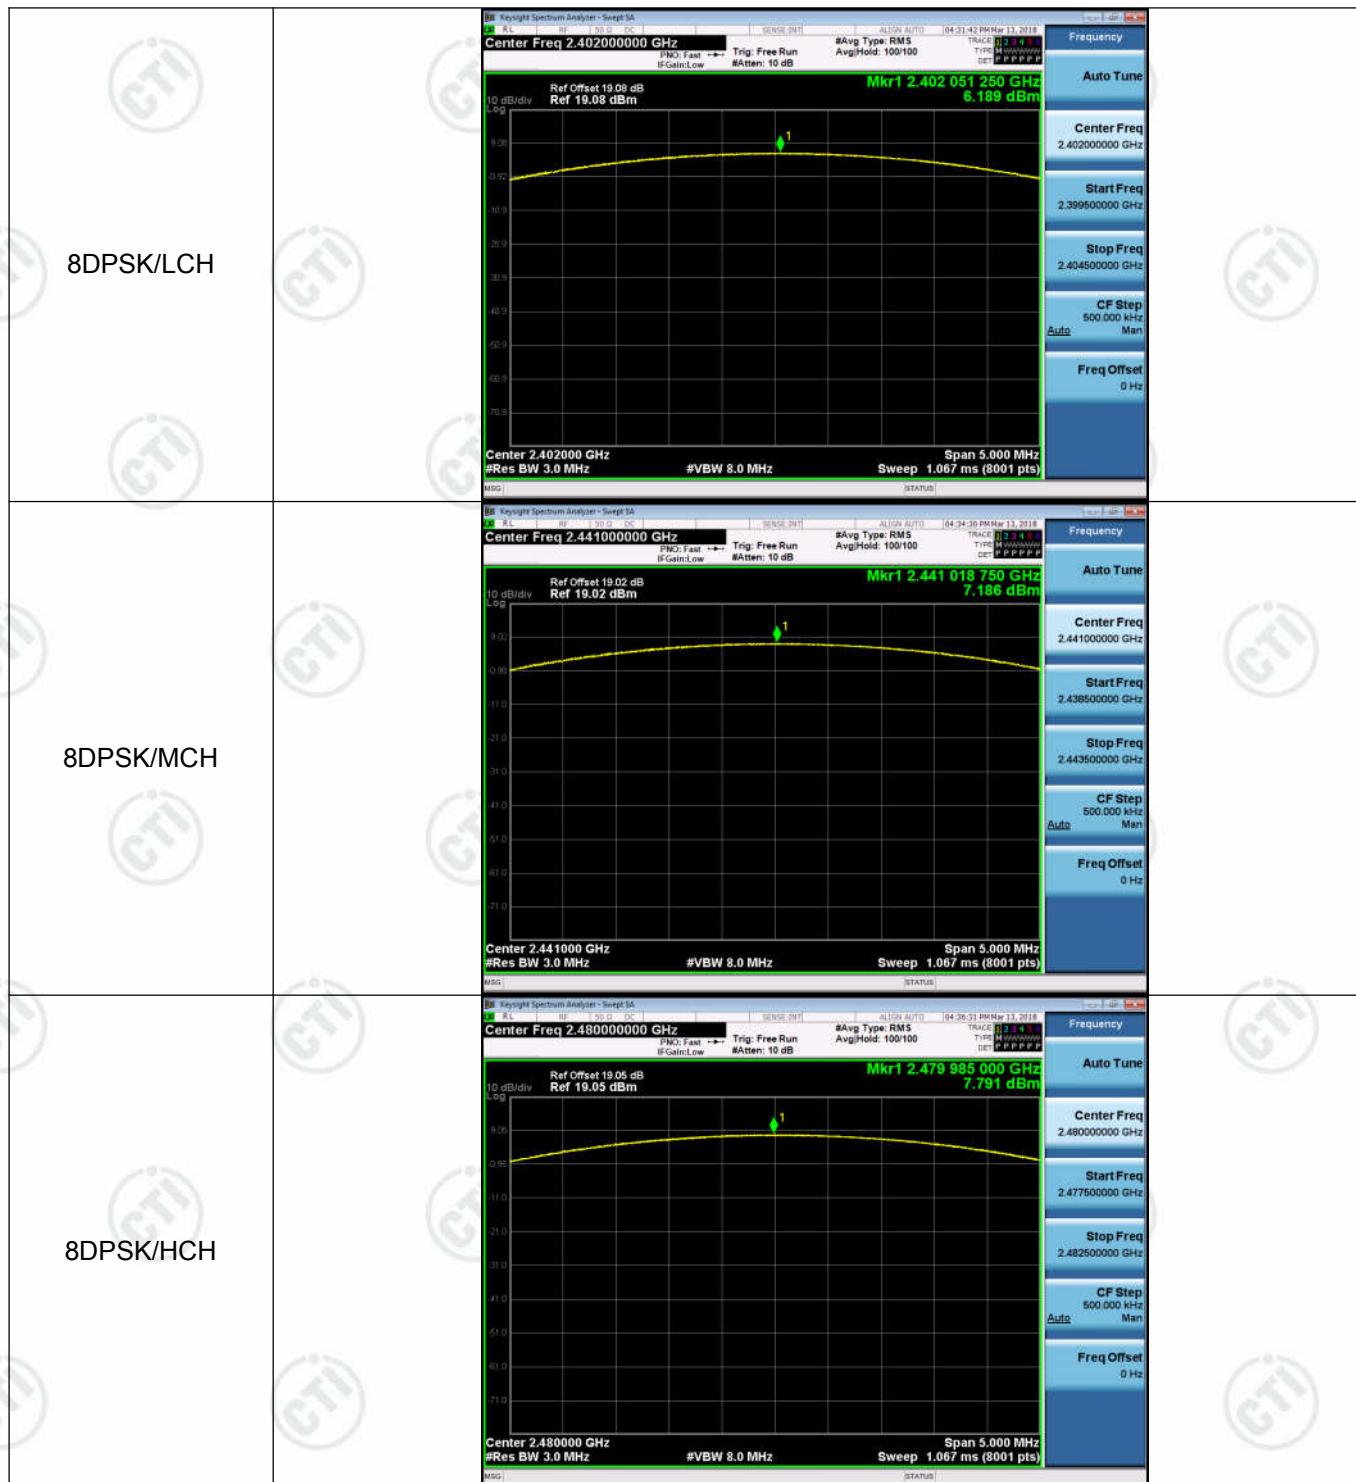


Appendix F): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	4.066	Off	-58.900	-15.93	PASS
			3.637	On	-42.272	-16.36	PASS
GFSK	HCH	2480	5.714	Off	-54.205	-14.29	PASS
			5.187	On	-38.648	-14.81	PASS
π/4DQPSK	LCH	2402	3.950	Off	-58.179	-16.05	PASS
			3.205	On	-44.391	-16.8	PASS
π/4DQPSK	HCH	2480	5.582	Off	-54.256	-14.42	PASS
			5.732	On	-40.411	-14.27	PASS
8DPSK	LCH	2402	3.877	Off	-59.198	-16.12	PASS
			2.399	On	-41.440	-17.6	PASS
8DPSK	HCH	2480	5.580	Off	-55.684	-14.42	PASS
			5.159	On	-39.820	-14.84	PASS


Test Graph

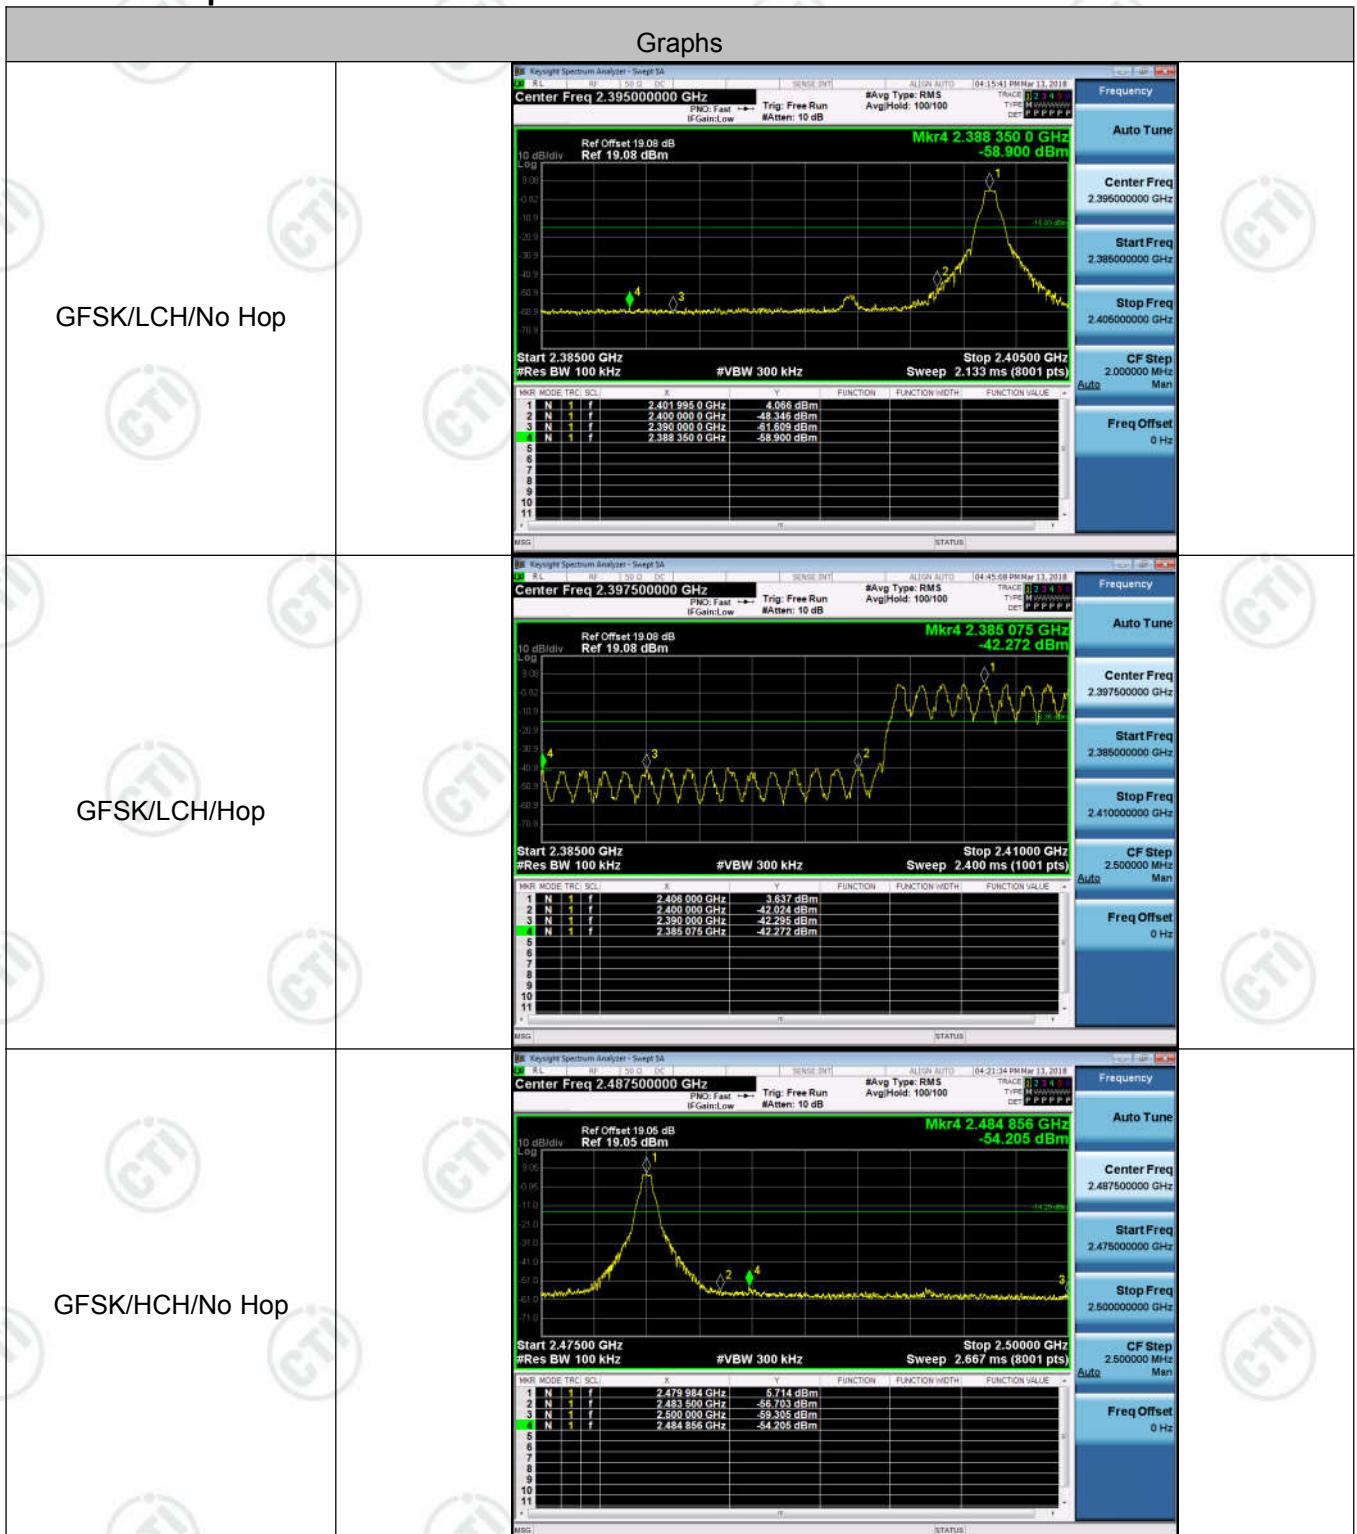


GFSK/HCH/Hop

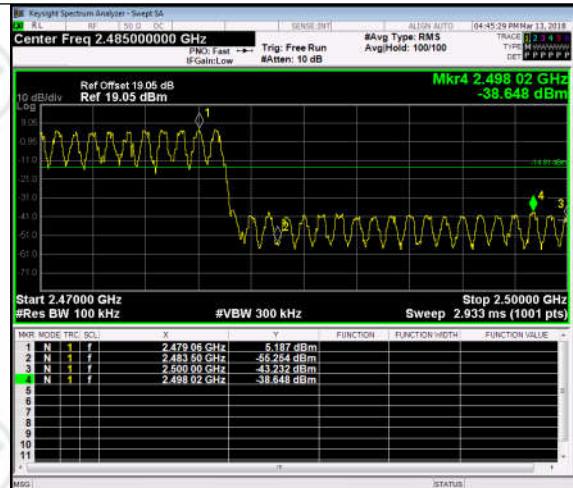



$\pi/4$ DQPSK/LCH/No Hop

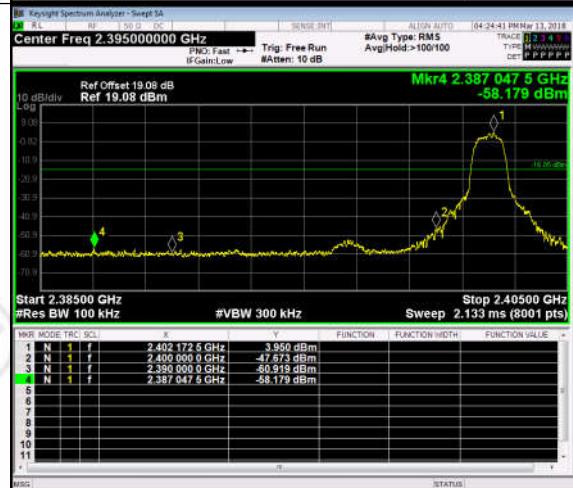

$\pi/4$ DQPSK/LCH/Hop

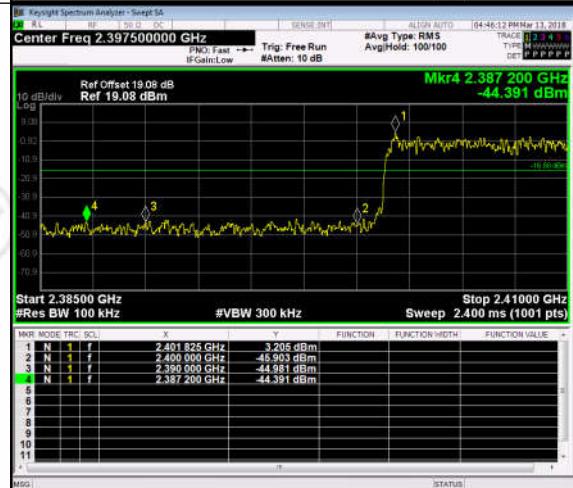

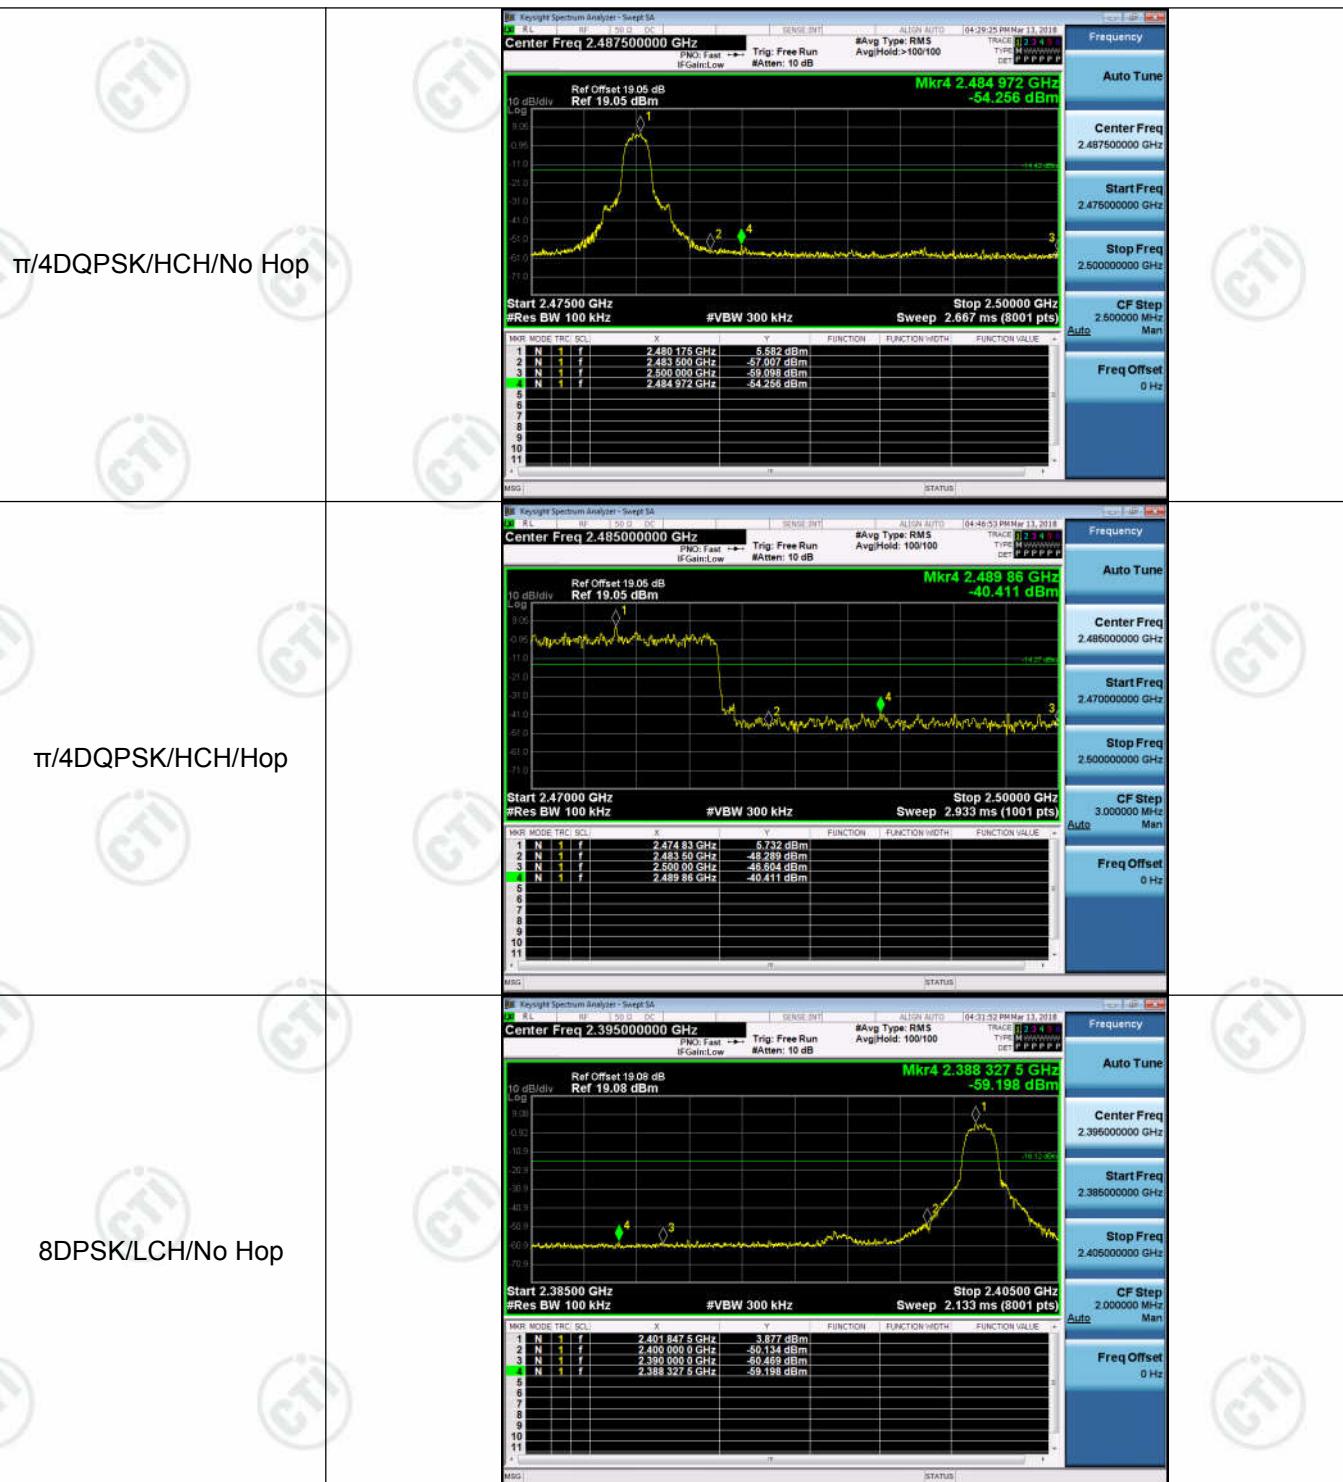

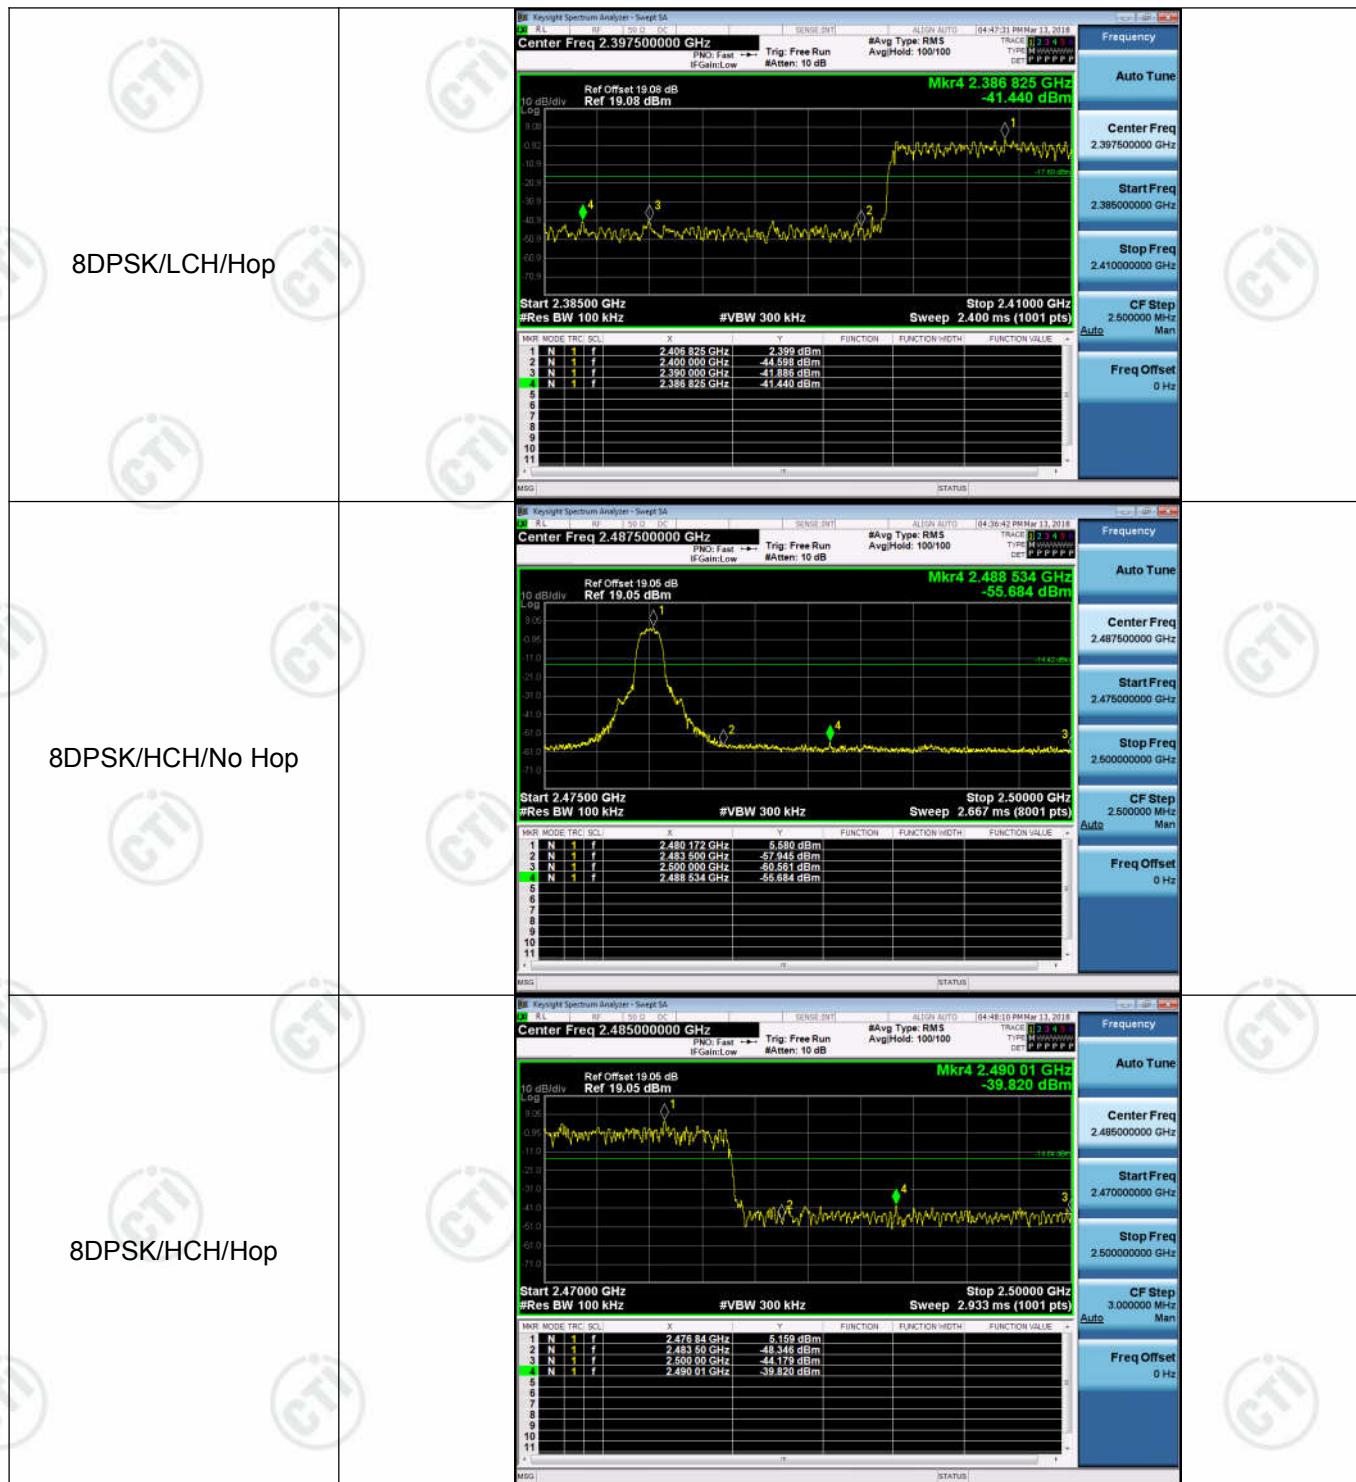



Appendix G): RF Conducted Spurious Emissions



Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	3.949	<Limit	PASS
GFSK	MCH	4.965	<Limit	PASS
GFSK	HCH	5.604	<Limit	PASS
$\pi/4$ DQPSK	LCH	3.888	<Limit	PASS
$\pi/4$ DQPSK	MCH	4.908	<Limit	PASS
$\pi/4$ DQPSK	HCH	5.524	<Limit	PASS
8DPSK	LCH	3.964	<Limit	PASS
8DPSK	MCH	4.873	<Limit	PASS
8DPSK	HCH	5.564	<Limit	PASS



Test Graph


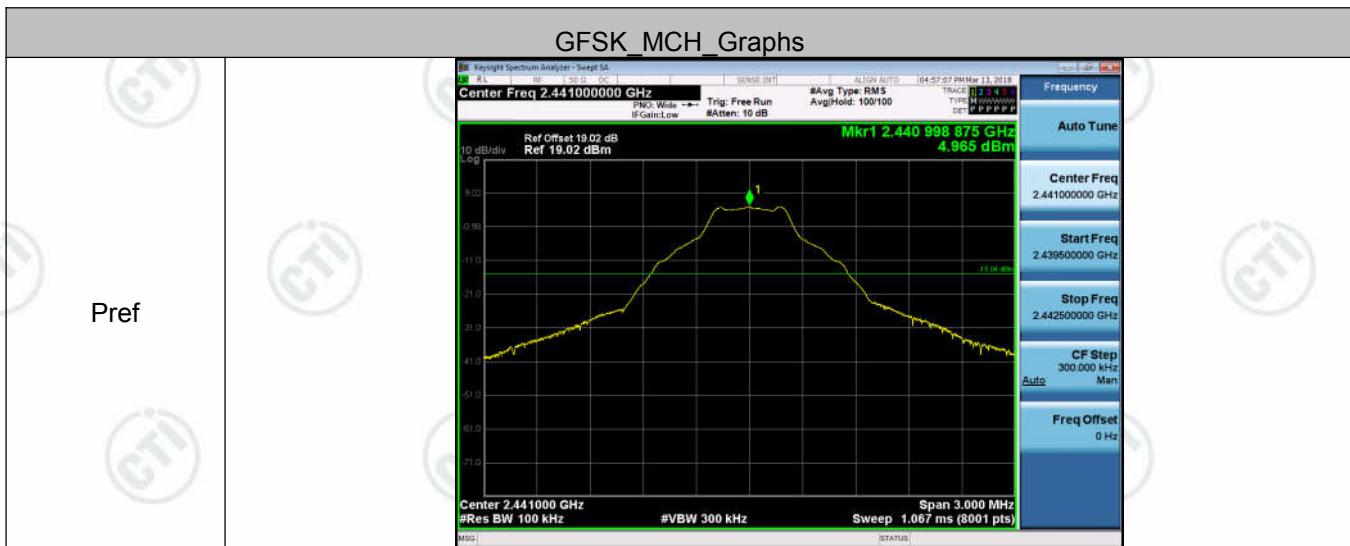


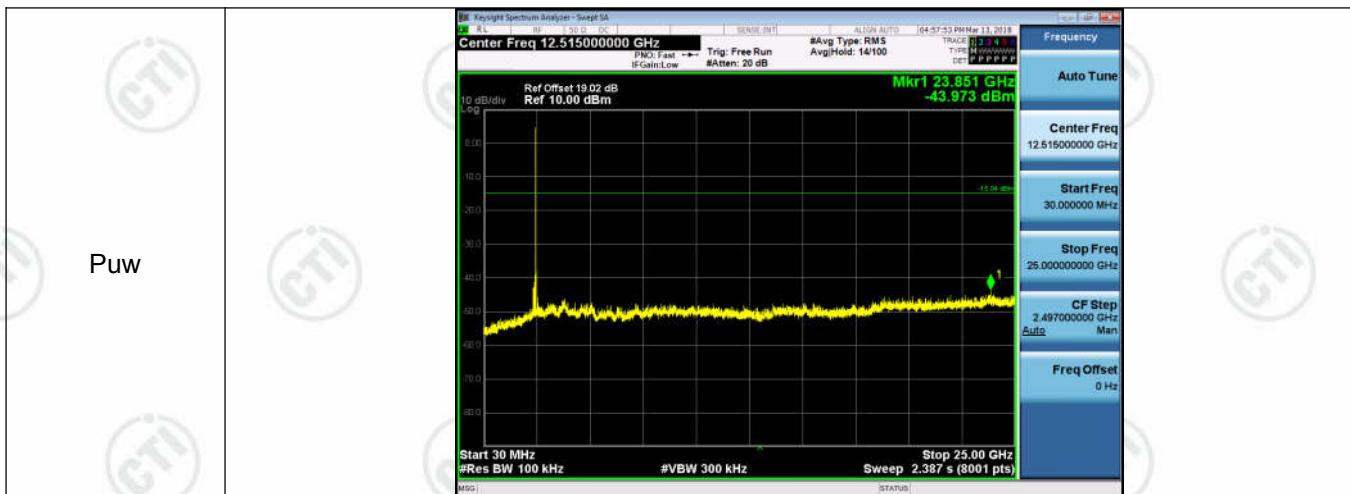

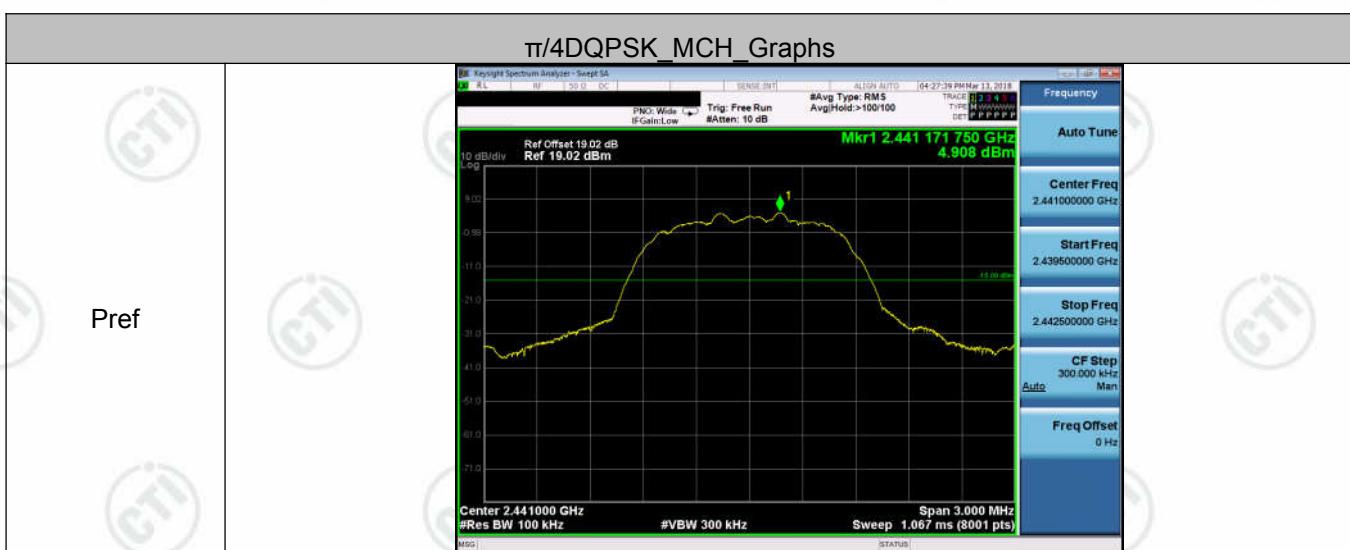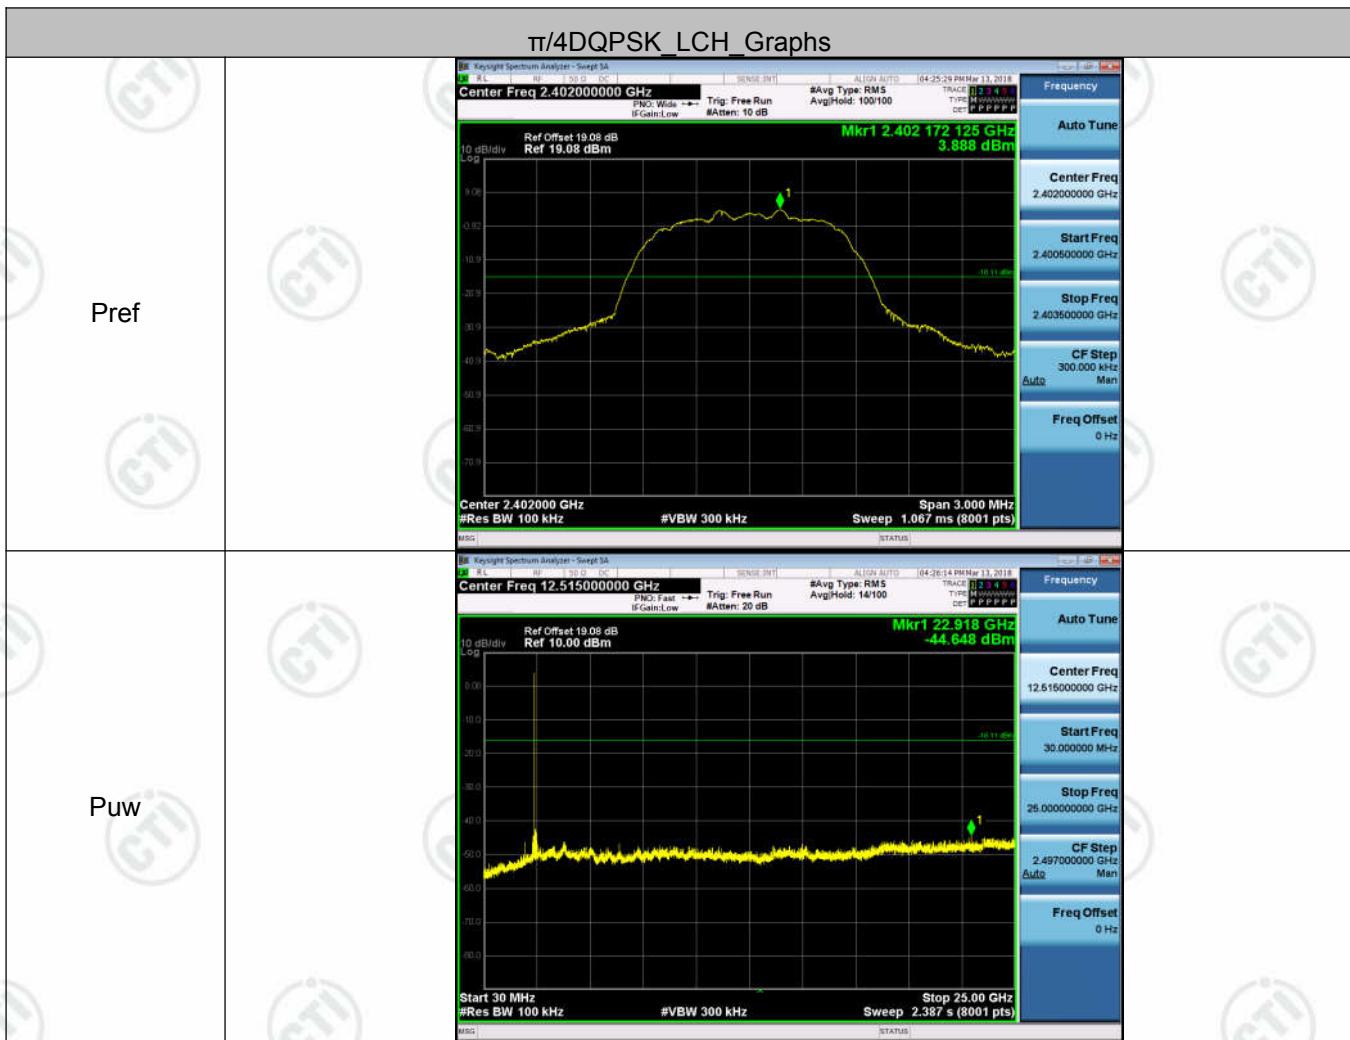

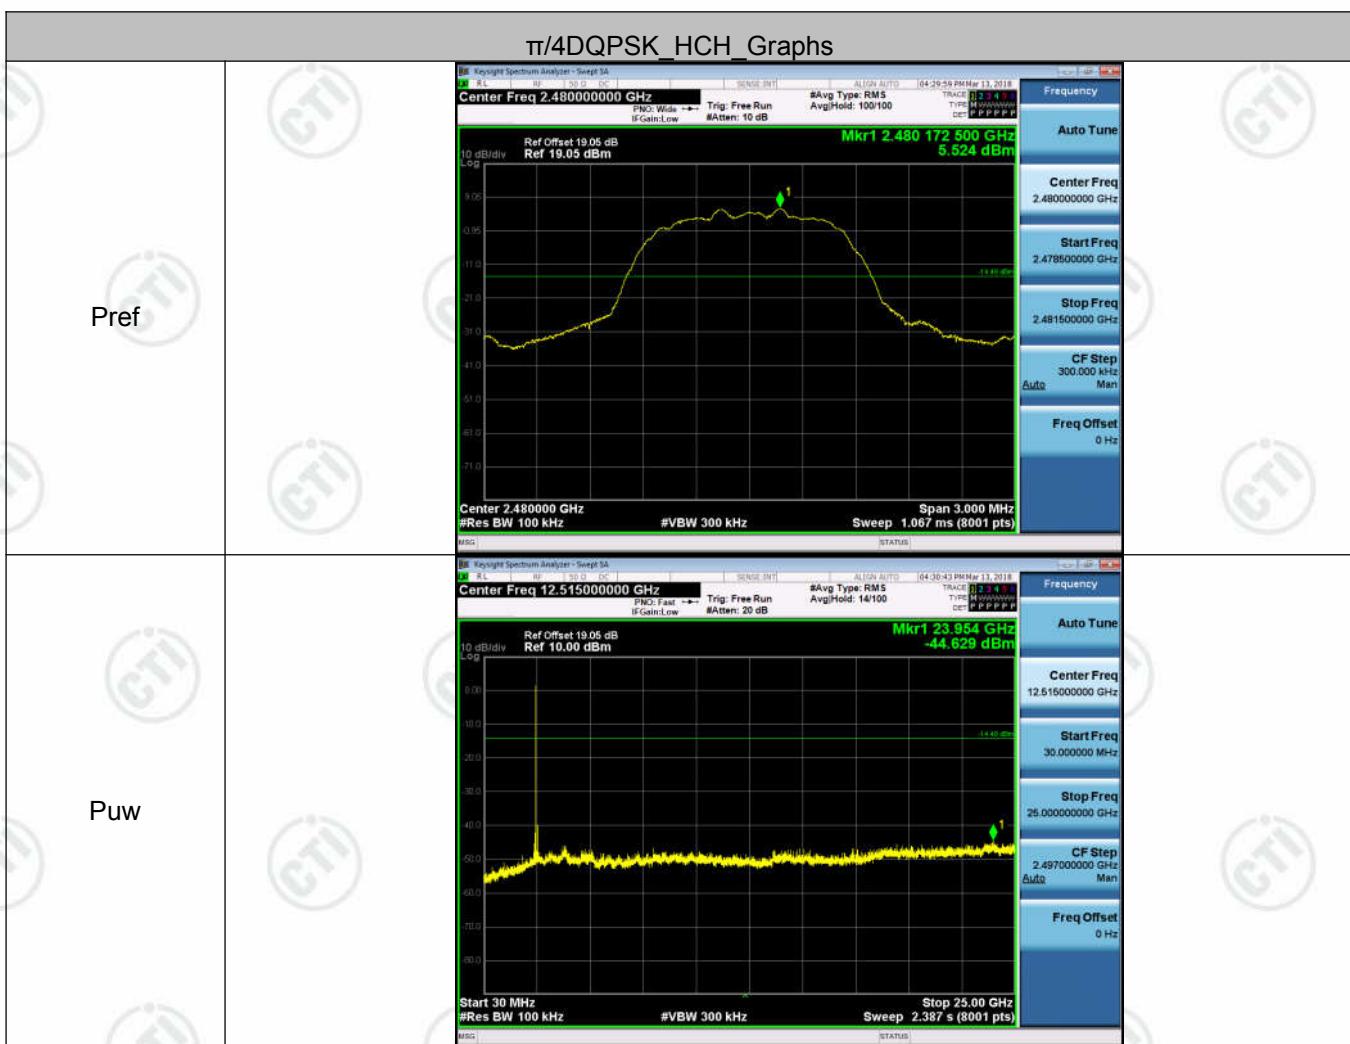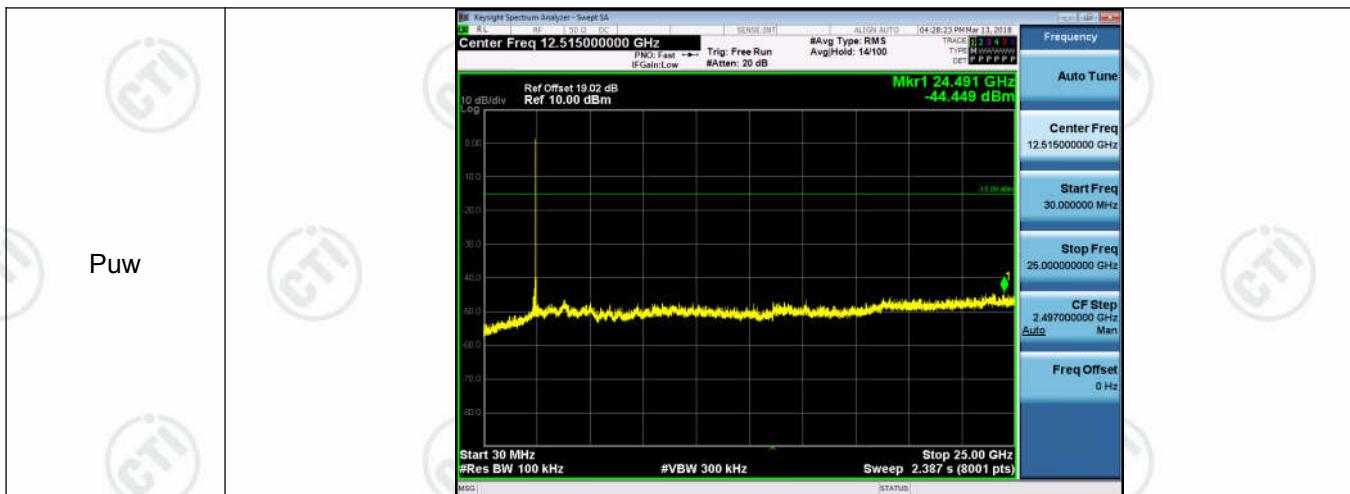

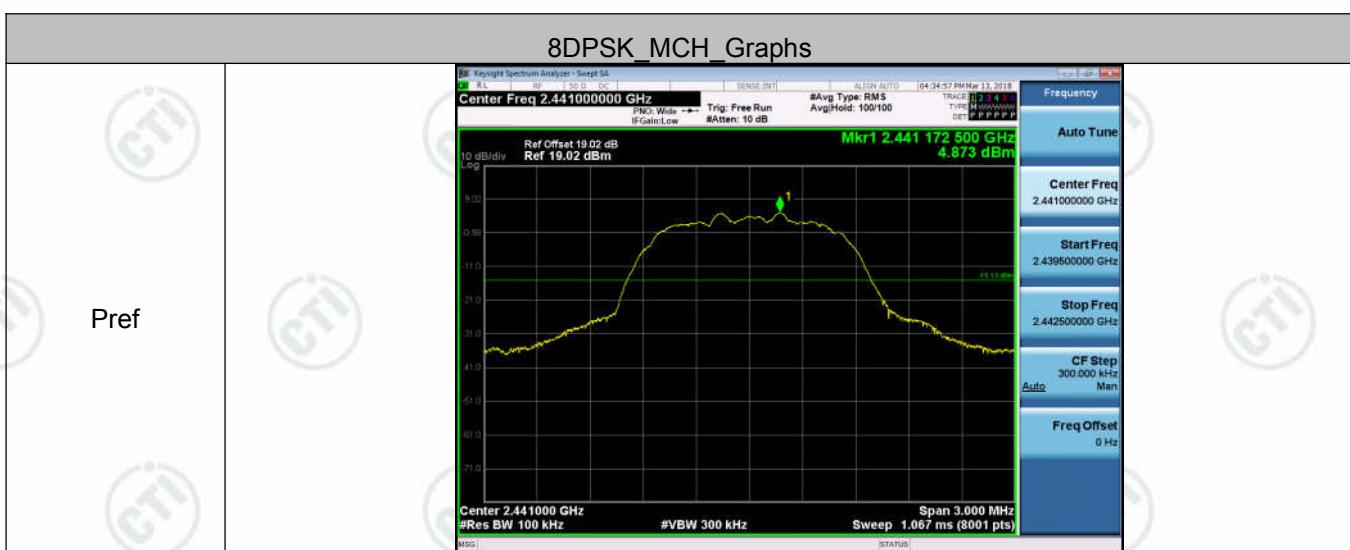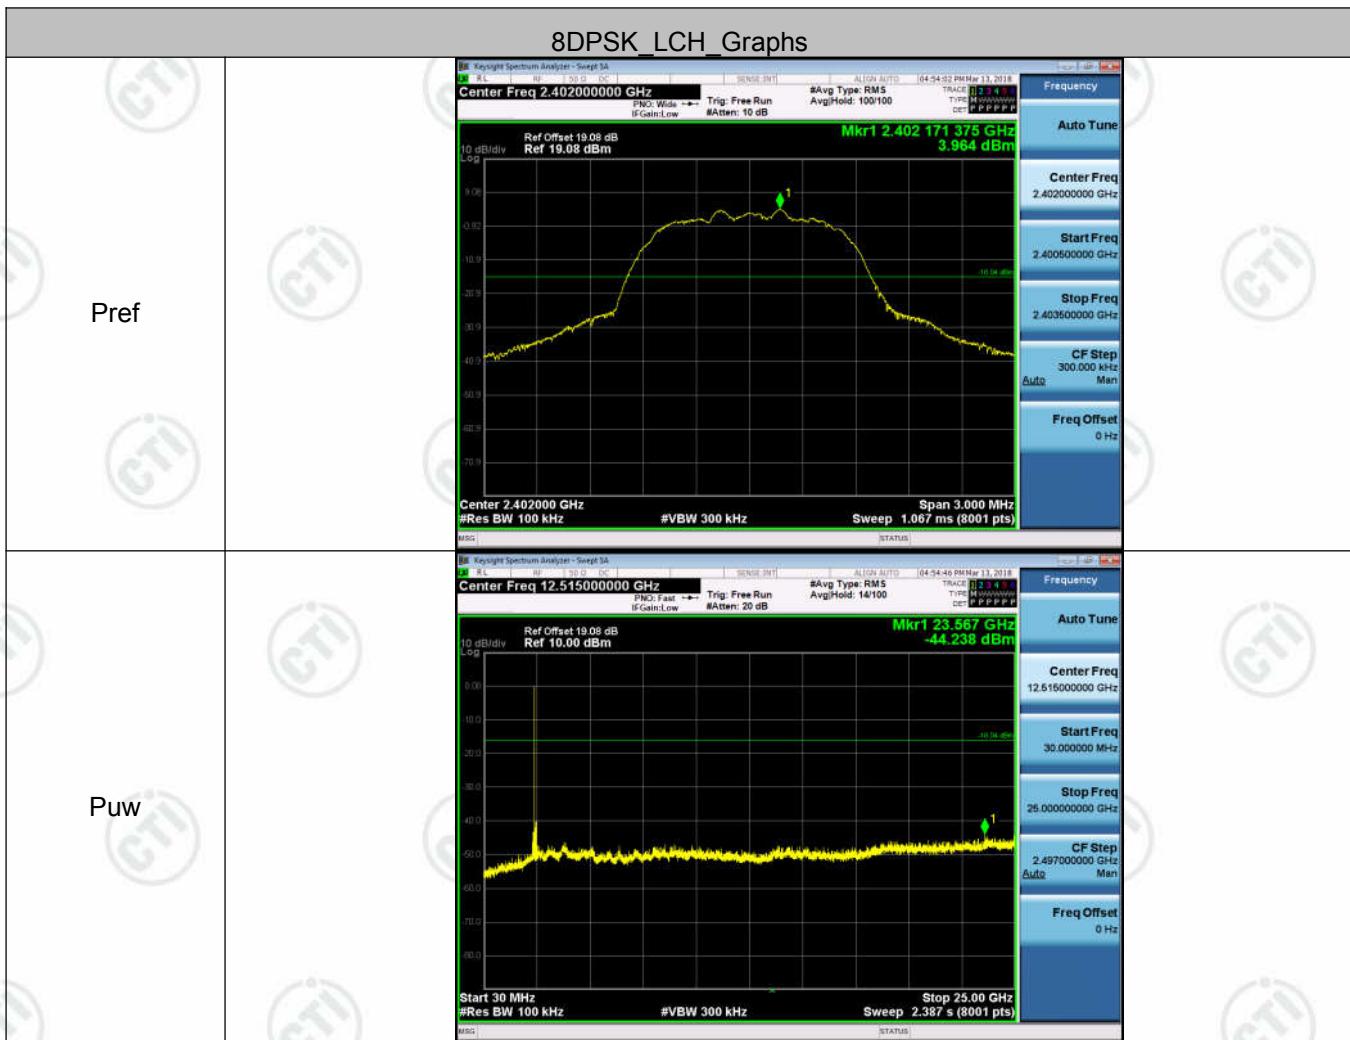

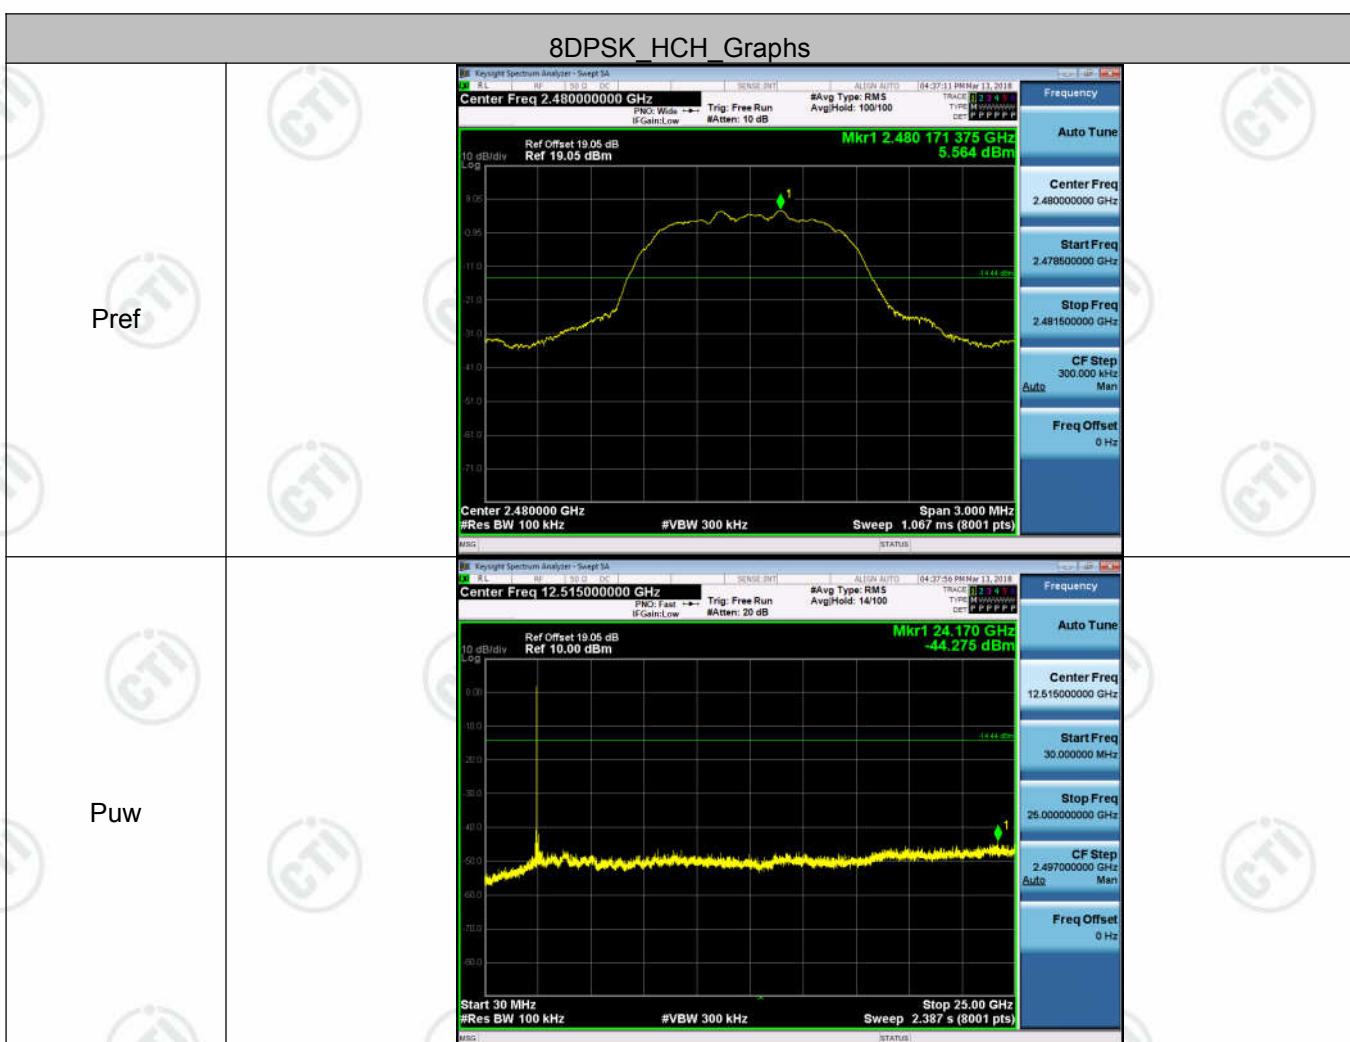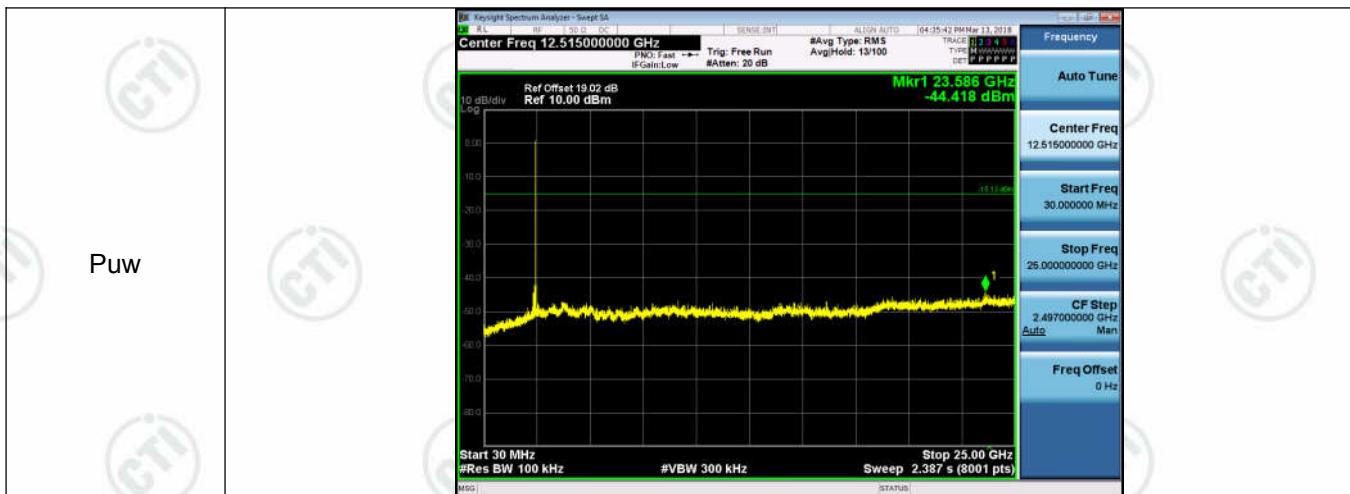

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

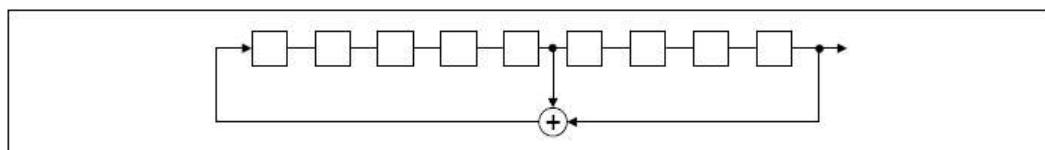

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

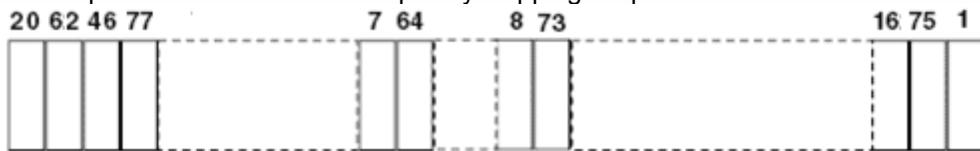

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Appendix I): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

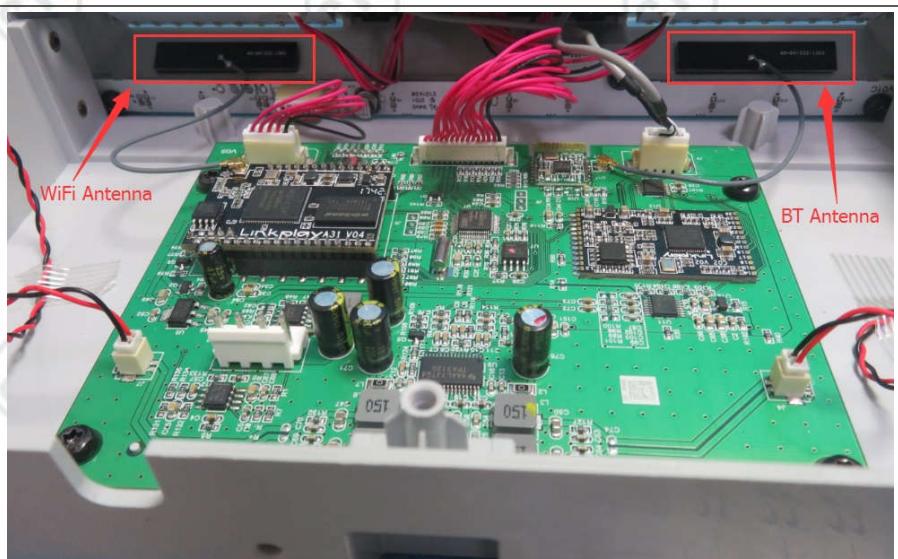

The antenna is attached to the inner shell of the EUT and no consideration of replacement. The best case gain of the antenna is 2.5dBi.

Appendix J): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>																
Limit:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

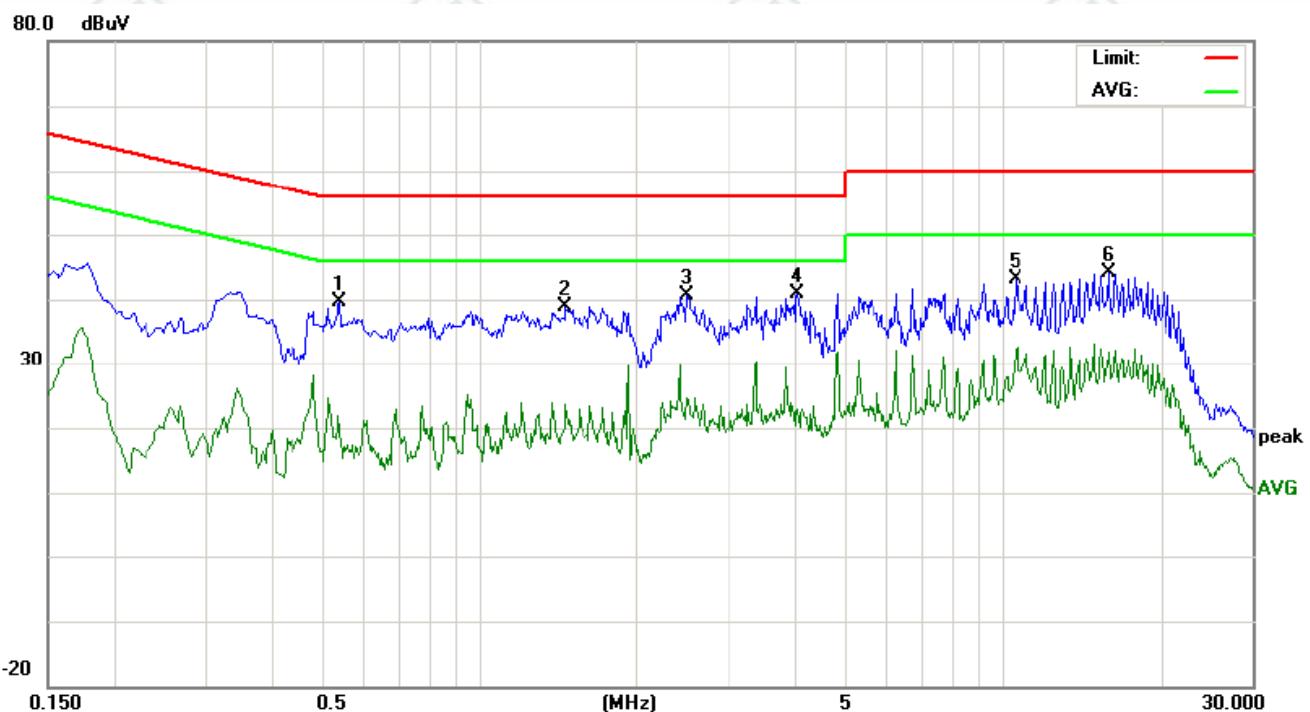

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	peak	QP	Avg	QP	Avg	QP	Avg		
1	0.5420	29.91	25.14	9.81	9.73	39.64	34.87	19.54	56.00	46.00	-21.13	-26.46	P	
2	1.4620	29.17	24.95	13.78	9.72	38.89	34.67	23.50	56.00	46.00	-21.33	-22.50	P	
3	2.4980	30.84	26.38	14.92	9.70	40.54	36.08	24.62	56.00	46.00	-19.92	-21.38	P	
4	4.0540	31.17	27.04	13.27	9.65	40.82	36.69	22.92	56.00	46.00	-19.31	-23.08	P	
5	10.6140	33.20	28.60	22.27	9.82	43.02	38.42	32.09	60.00	50.00	-21.58	-17.91	P	
6	15.9620	34.16	29.64	21.66	10.02	44.18	39.66	31.68	60.00	50.00	-20.34	-18.32	P	

Neutral line:

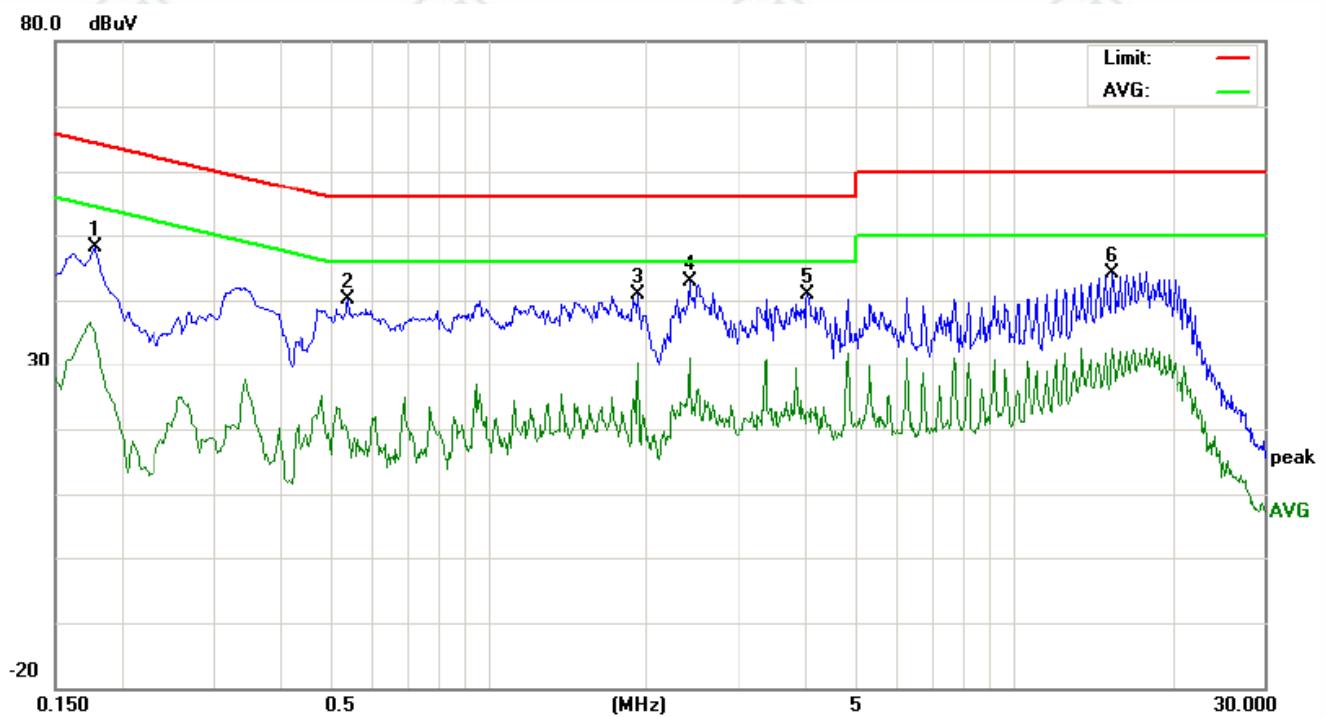

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)			Margin (dB)		
		MHz	Peak	QP	Avg	peak	QP	Avg	QP	Avg	QP	Avg	P/F	Comment
1	0.1780	38.34	34.26	25.46	9.73	48.07	43.99	35.19	64.57	54.57	-20.58	-19.38	P	
2	0.5420	30.41	35.69	10.00	9.73	40.14	45.42	19.73	56.00	46.00	-10.58	-26.27	P	
3	1.9380	31.07	27.34	20.59	9.72	40.79	37.06	30.31	56.00	46.00	-18.94	-15.69	P	
4	2.4180	33.21	29.09	19.41	9.71	42.92	38.80	29.12	56.00	46.00	-17.20	-16.88	P	
5	4.0500	31.23	27.95	13.01	9.65	40.88	37.60	22.66	56.00	46.00	-18.40	-23.34	P	
6	15.4660	34.17	30.17	22.65	10.01	44.18	40.18	32.66	60.00	50.00	-19.82	-17.34	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz	Average	
Test Procedure:	Below 1GHz test procedure as below: <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 					
Limit:	Frequency	Limit (dB μ V/m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1GHz	54.0	Average Value			
		74.0	Peak Value			

Test plot as follows:


GFSK:

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

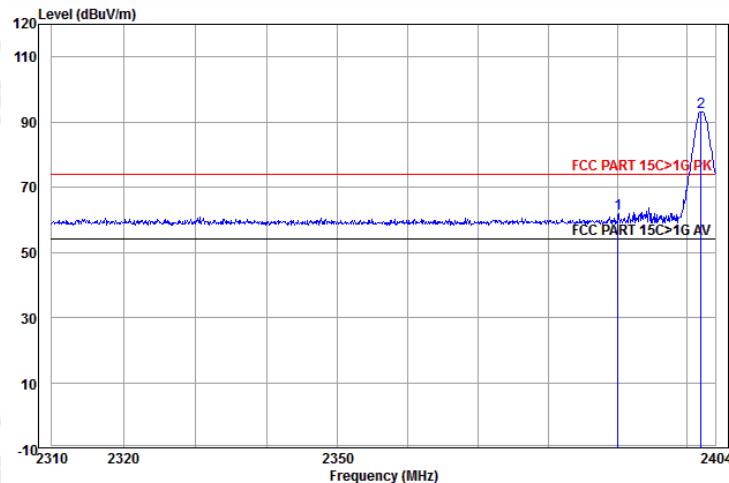


Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		dB/m	dB	dBuV	dBuV/m	dBuV/m	
1	2390.000	32.53	3.07	26.22	61.82	74.00	-12.18 Vertical
2 pp	2401.987	32.56	3.07	57.60	93.23	74.00	19.23 Vertical

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

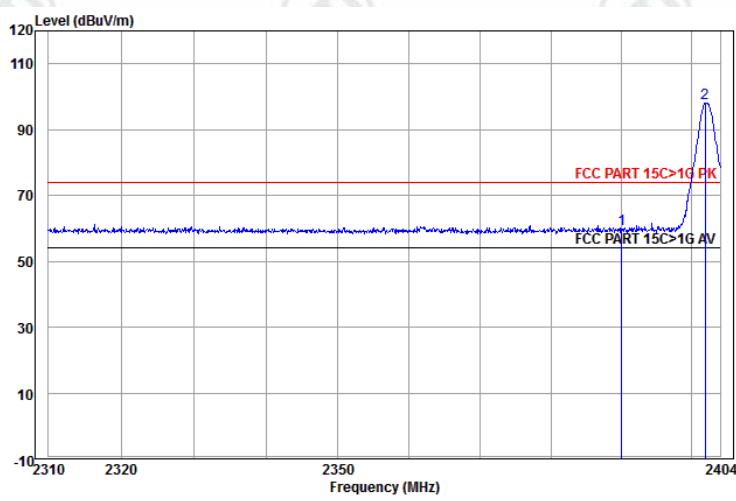


Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		dB/m	dB	dBuV	dBuV/m	dBuV/m	
1	2390.000	32.53	3.07	24.35	59.95	74.00	-14.05 Horizontal
2 pp	2401.891	32.56	3.07	62.35	97.98	74.00	23.98 Horizontal

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

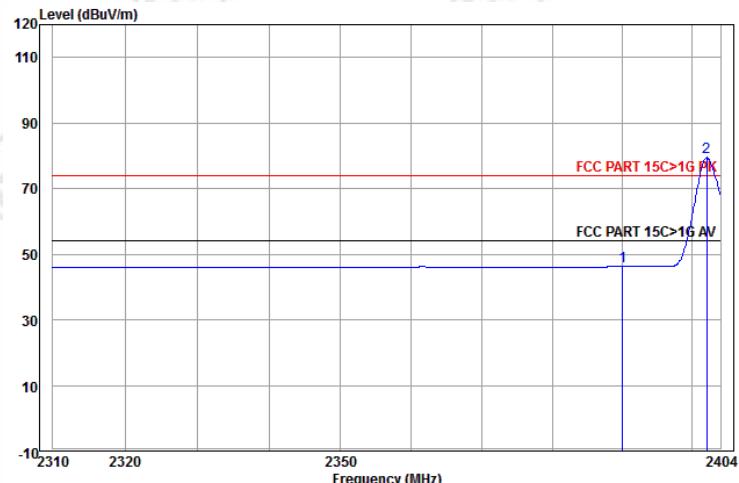


	Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	10.58	46.18	54.00	-7.82	Vertical	Average
2	pp 2402.083	32.56	3.07	43.86	79.49	54.00	25.49	Vertical	Average

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	------------	---------------	--------	---------	---------	------------

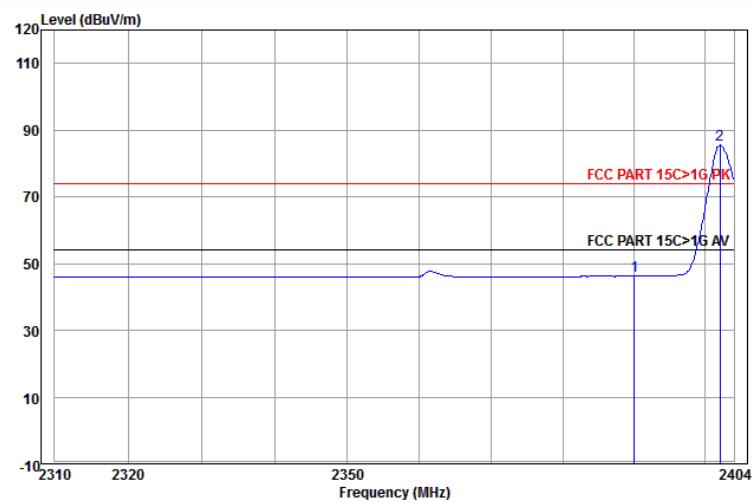


	Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	10.62	46.22	54.00	-7.78	Horizontal	Average
2	pp 2402.083	32.56	3.07	50.03	85.66	54.00	31.66	Horizontal	Average

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	------------	---------------	---------	---------	------	----------

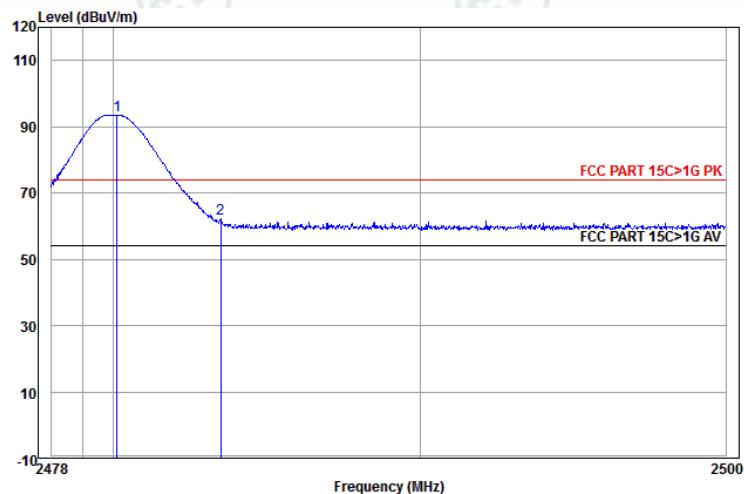


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Line Limit	Over Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.125	32.71	3.12	57.77	93.60	74.00	19.60	Vertical
2	2483.500	32.71	3.12	26.46	62.29	74.00	-11.71	Vertical

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

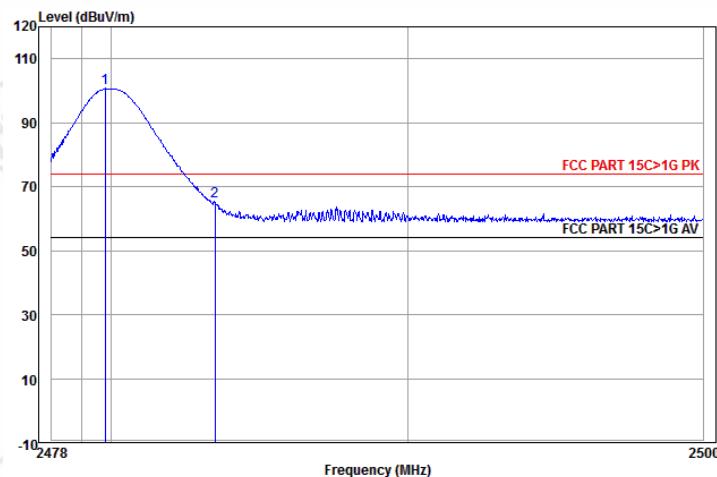


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Line Limit	Over Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.797	32.71	3.12	64.87	100.70	74.00	26.70	Horizontal
2	2483.500	32.71	3.12	29.45	65.28	74.00	-8.72	Horizontal

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	------------	---------------	---------	---------	---------	----------

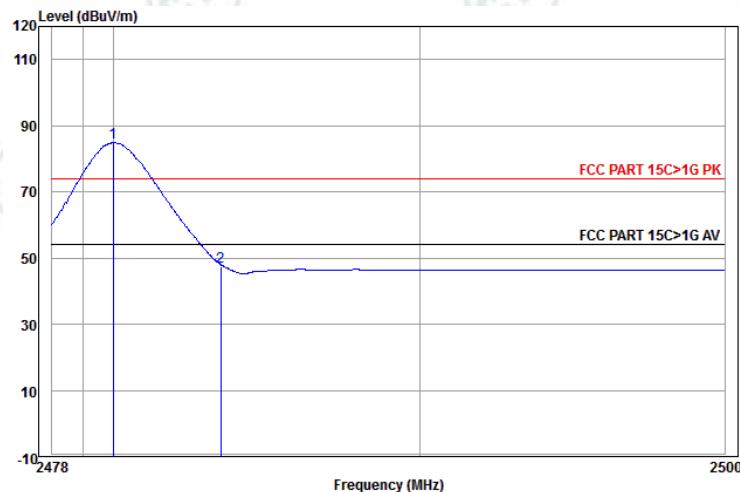

Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1 pp	2479.994	32.71	3.12	49.13	84.96	54.00	30.96	Vertical Average
2	2483.500	32.71	3.12	11.73	47.56	54.00	-6.44	Vertical Average


Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

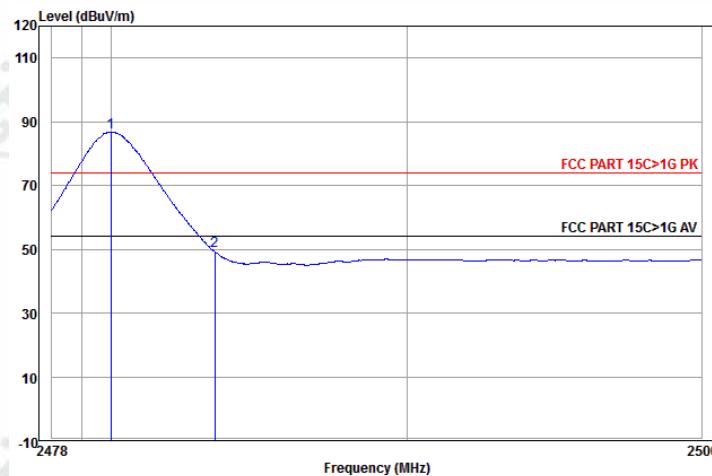

Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1 pp	2479.994	32.71	3.12	50.99	86.82	54.00	32.82	Horizontal Average
2	2483.500	32.71	3.12	13.52	49.35	54.00	-4.65	Horizontal Average


$\pi/4$ DQPSK:

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	-------------------------	---------------	--------	---------	------	----------

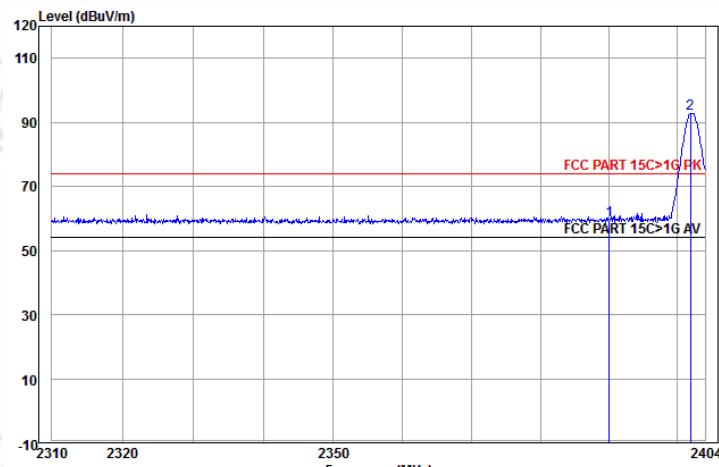


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Limit Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	23.68	59.28	74.00	-14.72	Vertical
2 pp	2401.891	32.56	3.07	57.27	92.90	74.00	18.90	Vertical

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	-------------------------	---------------	--------	---------	------	------------

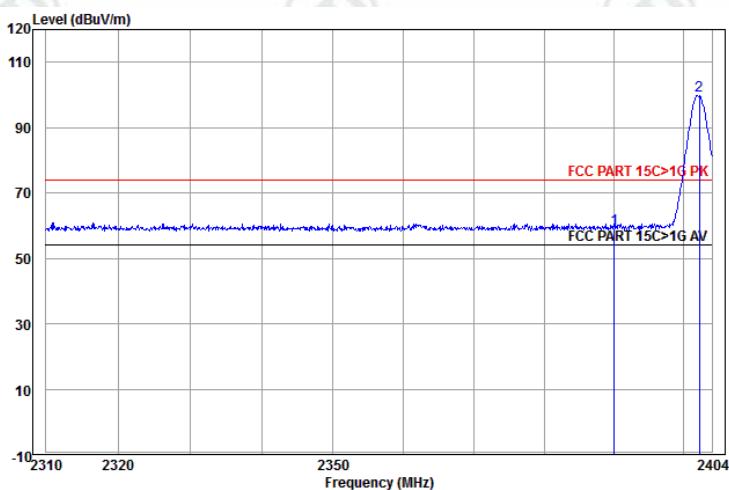


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Limit Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	23.51	59.11	74.00	-14.89	Horizontal
2 pp	2402.179	32.56	3.07	64.20	99.83	74.00	25.83	Horizontal

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	-------------------------	---------------	--------	---------	---------	----------

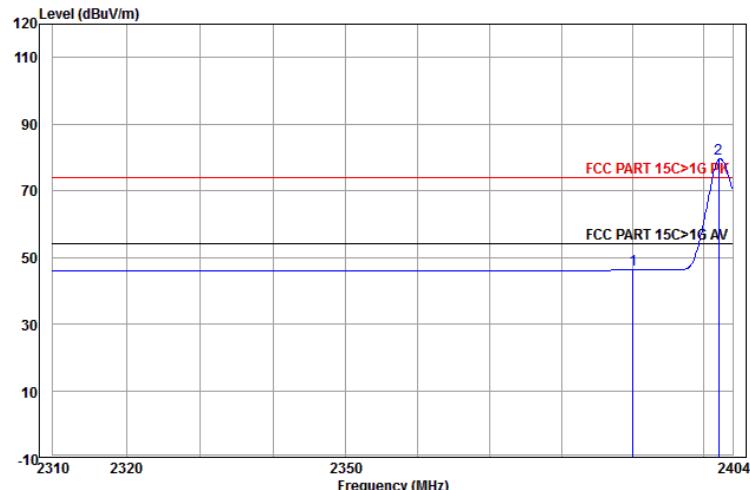


	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	32.53	3.07	10.63	46.23	54.00	-7.77 Vertical Average
2 pp	2402.083	32.56	3.07	43.89	79.52	54.00	25.52 Vertical Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	-------------------------	---------------	--------	---------	---------	------------

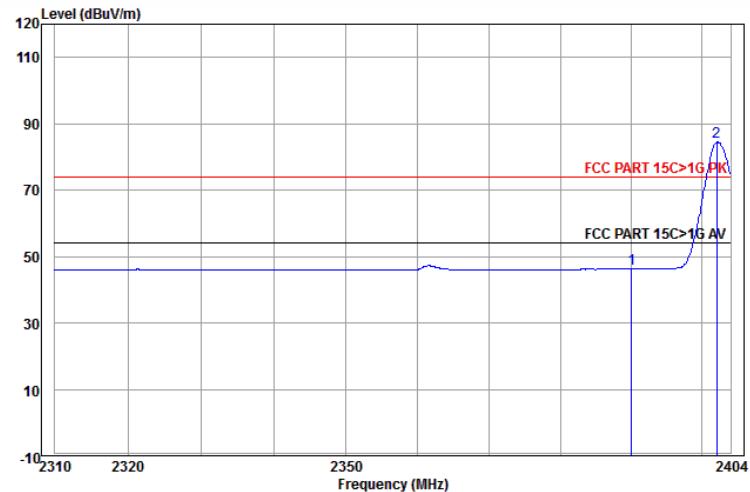


	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	32.53	3.07	10.63	46.23	54.00	-7.77 Horizontal Average
2 pp	2402.083	32.56	3.07	48.99	84.62	54.00	30.62 Horizontal Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	-------------------------	---------------	---------	---------	------	----------

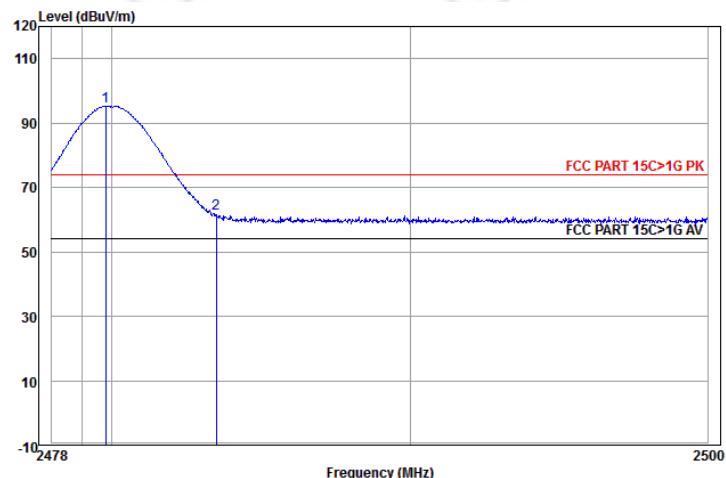


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Line Limit	Over Limit	Over Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1 pp	2479.797	32.71	3.12	59.41	95.24	74.00	21.24	Vertical
2	2483.500	32.71	3.12	26.13	61.96	74.00	-12.04	Vertical

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-------------------------	---------------	---------	---------	------	------------

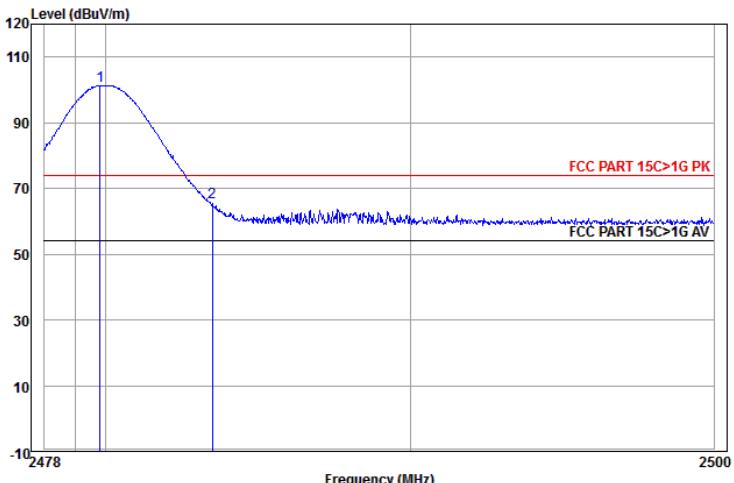


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Line Limit	Over Limit	Over Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1 pp	2479.819	32.71	3.12	65.52	101.35	74.00	27.35	Horizontal
2	2483.500	32.71	3.12	29.92	65.75	74.00	-8.25	Horizontal

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	-------------------------	---------------	---------	---------	---------	----------

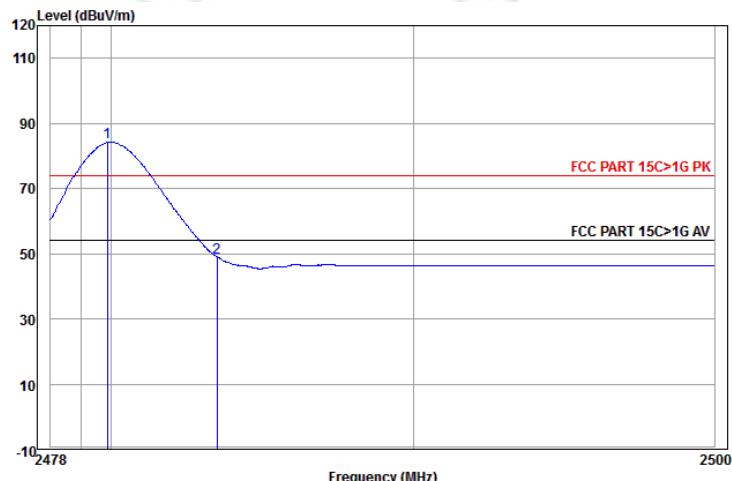

	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.884	32.71	3.12	48.37	84.20	54.00	30.20	Vertical Average
2	2483.500	32.71	3.12	12.80	48.63	54.00	-5.37	Vertical Average


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	-------------------------	---------------	---------	---------	---------	------------

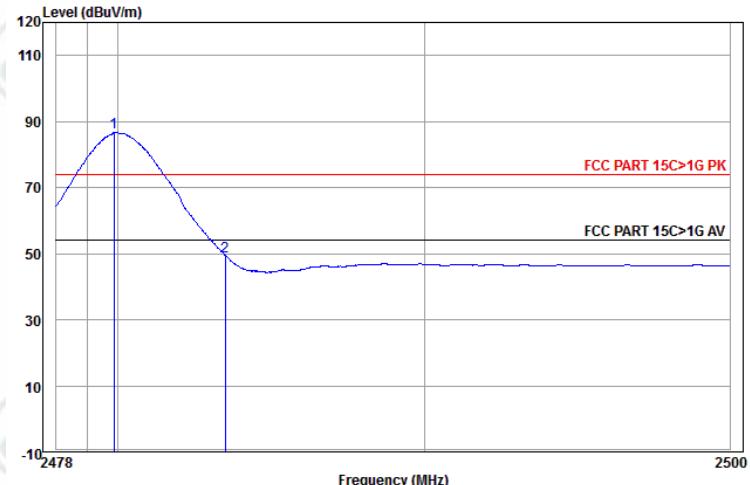

	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.884	32.71	3.12	50.77	86.60	54.00	32.60	Horizontal Average
2	2483.500	32.71	3.12	13.39	49.22	54.00	-4.78	Horizontal Average


8DPSK:

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	--------------	---------------	--------	---------	------	----------

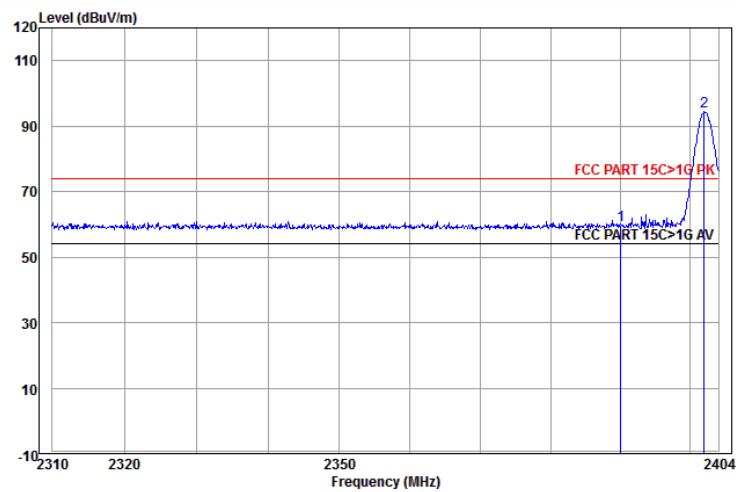

	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	24.33	59.93	74.00	-14.07	Vertical
2 pp	2401.987	32.56	3.07	58.73	94.36	74.00	20.36	Vertical

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	--------------	---------------	--------	---------	------	------------

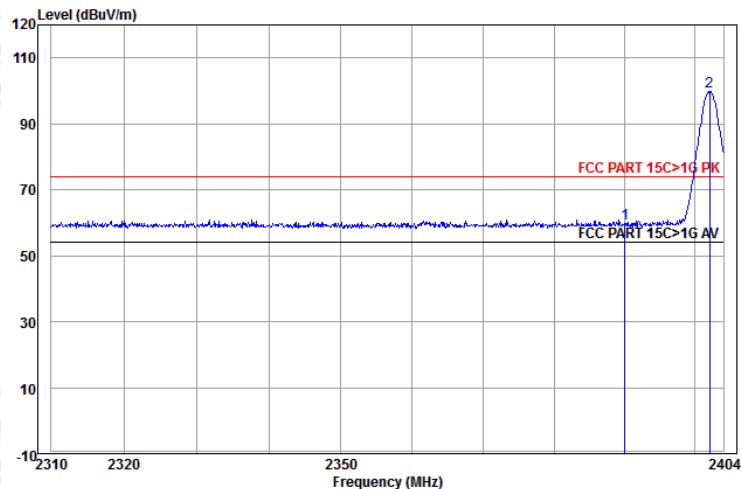


	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	24.34	59.94	74.00	-14.06	Horizontal
2 pp	2402.083	32.56	3.07	64.22	99.85	74.00	25.85	Horizontal

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	--------------	---------------	--------	---------	---------	----------




Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	
1		2390.000	32.53	3.07	10.59	46.19	54.00 -7.81 Vertical Average
2 pp		2402.083	32.56	3.07	42.76	78.39	54.00 24.39 Vertical Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	--------------	---------------	--------	---------	---------	------------

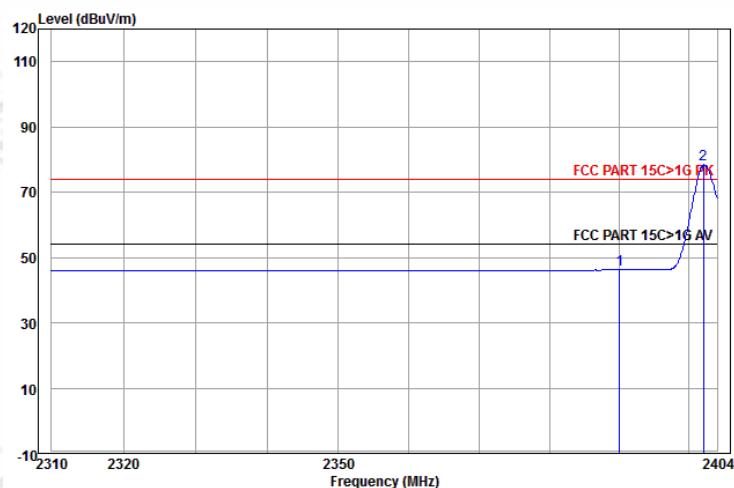


Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	
1		2390.000	32.53	3.07	10.59	46.19	54.00 -7.81 Vertical Average
2 pp		2402.083	32.56	3.07	42.76	78.39	54.00 24.39 Vertical Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	--------------	---------------	---------	---------	------	----------

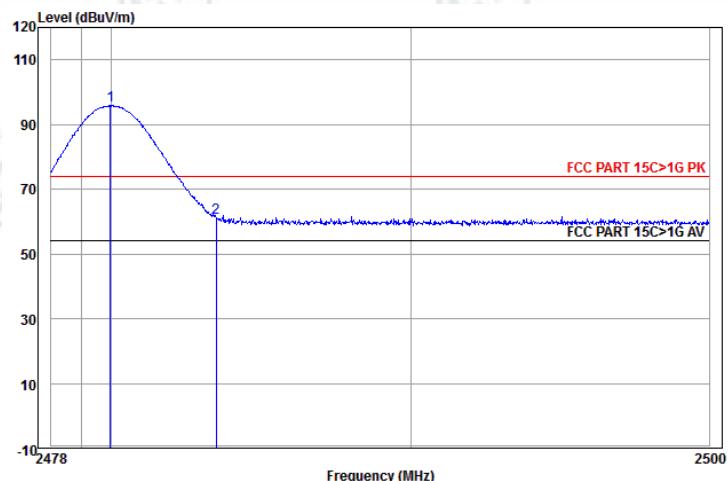


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Line Limit	Over Limit Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.972	32.71	3.12	60.04	95.87	74.00	21.87 Vertical
2	2483.500	32.71	3.12	25.37	61.20	74.00	-12.80 Vertical

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	--------------	---------------	---------	---------	------	------------

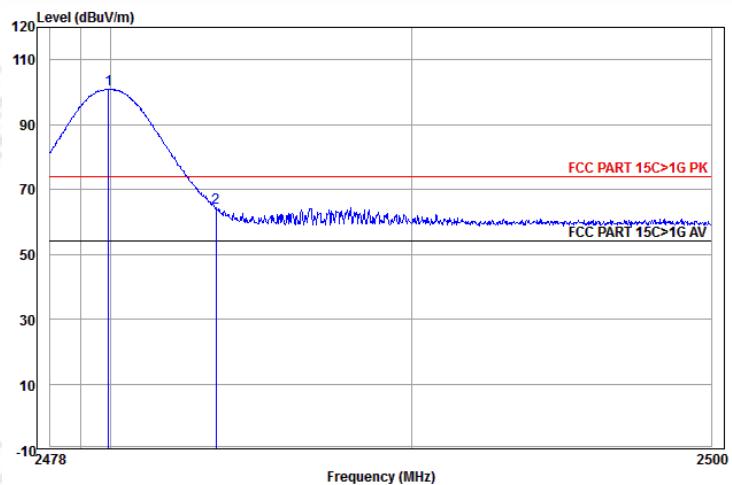


Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Line Limit	Over Limit Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.928	32.71	3.12	65.16	100.99	74.00	26.99 Horizontal
2	2483.500	32.71	3.12	28.41	64.24	74.00	-9.76 Horizontal

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	--------------	---------------	---------	---------	---------	----------

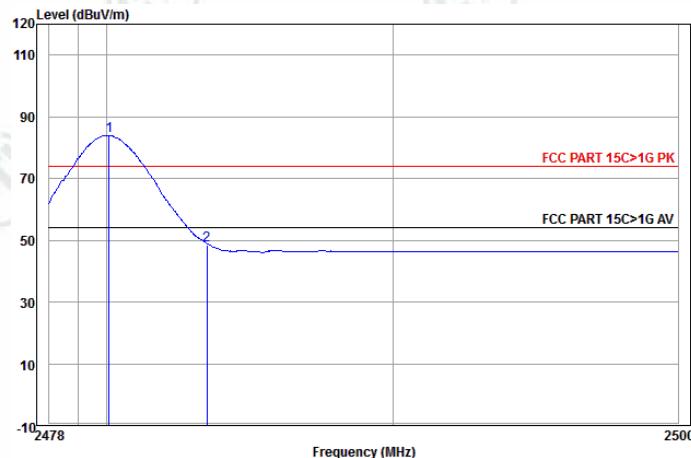

Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	
1	pp	2480.082	32.71	3.12	48.17	84.00	54.00 30.00 Vertical Average
2		2483.500	32.71	3.12	12.70	48.53	54.00 -5.47 Vertical Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	--------------	---------------	---------	---------	---------	------------

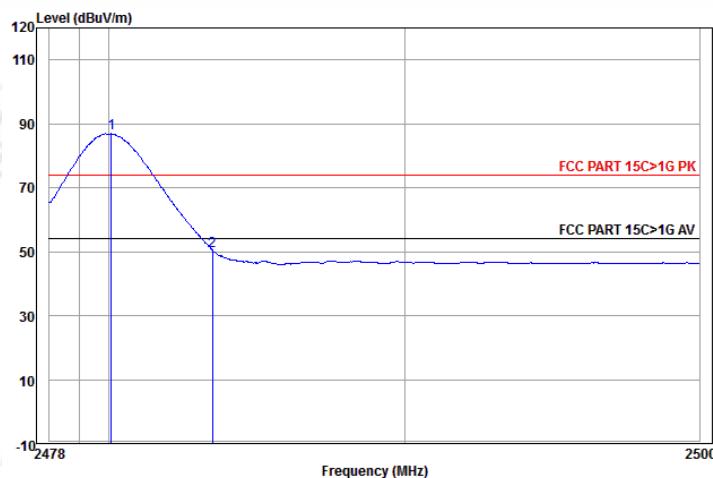

Freq	Ant Factor	Ant	Cable	Read	Limit	Over	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	
1	pp	2480.082	32.71	3.12	51.06	86.89	54.00 32.89 Horizontal Average
2		2483.500	32.71	3.12	14.38	50.21	54.00 -3.79 Horizontal Average

Note:1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor


Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark					
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak					
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average					
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak					
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average					
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak					
	Above 1GHz	Peak	1MHz	3MHz	Peak					
		Peak	1MHz	10Hz	Average					
Test Procedure:										
Below 1GHz test procedure as below:										
<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 										
Above 1GHz test procedure as below:										
<ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel ,the middle channel ,the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 										
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)					
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300					
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30					
	1.705MHz-30MHz	30	-	-	30					
	30MHz-88MHz	100	40.0	Quasi-peak	3					
	88MHz-216MHz	150	43.5	Quasi-peak	3					
	216MHz-960MHz	200	46.0	Quasi-peak	3					
	960MHz-1GHz	500	54.0	Quasi-peak	3					
	Above 1GHz	500	54.0	Average	3					
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.									

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**


30MHz~1GHz (QP)

Test mode:	Transmitting	Vertical
------------	--------------	----------

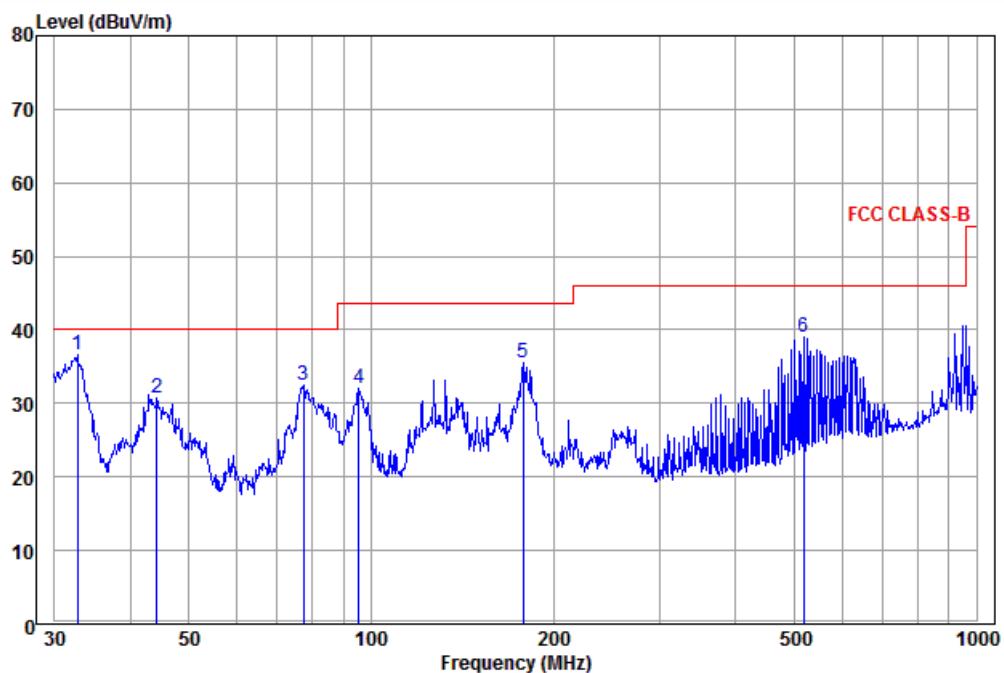

Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Line Limit	Over Pol/Phase	Remark
				Level	dBuV/m			
1 pp	32.749	12.48	0.08	24.03	36.59	40.00	-3.41	Vertical QP
2	44.275	14.16	0.08	16.46	30.70	40.00	-9.30	Vertical QP
3	77.321	9.06	0.38	23.00	32.44	40.00	-7.56	Vertical QP
4	95.427	11.79	0.51	19.72	32.02	43.50	-11.48	Vertical QP
5	178.133	10.41	0.90	24.24	35.55	43.50	-7.95	Vertical QP
6	519.065	17.25	1.53	20.19	38.97	46.00	-7.03	Vertical QP

Test mode:	Transmitting	Horizontal
------------	--------------	------------

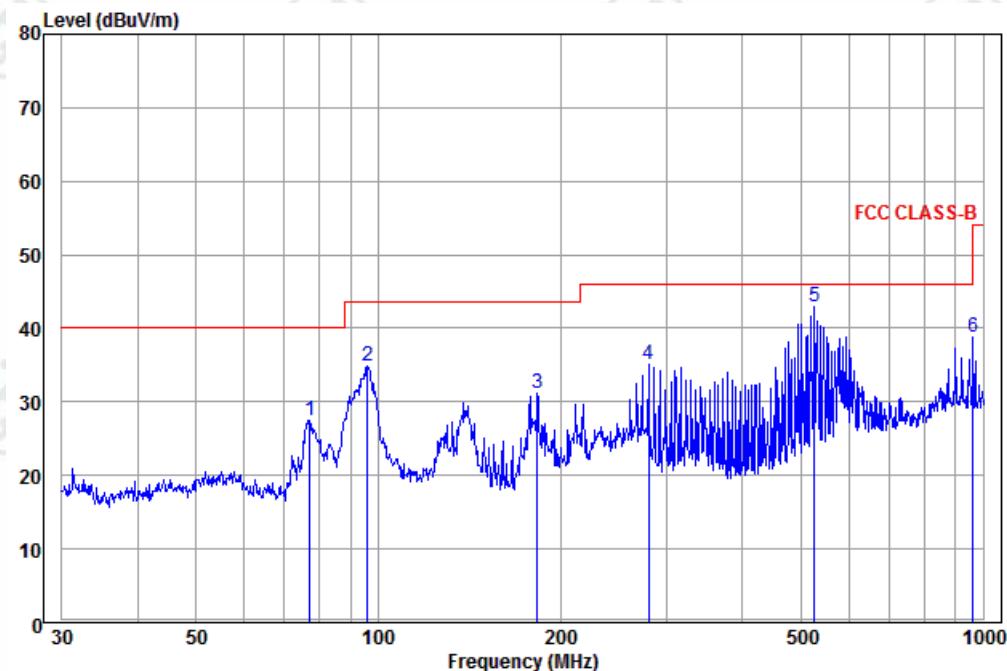

Freq	Ant Factor	Cable Loss	Read	Limit	Over	Pol/Phase	Remark	
			Level	Level	Line			
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	77.051	9.11	0.37	18.01	27.49	40.00	-12.51	Horizontal QP
2	96.099	11.90	0.52	22.53	34.95	43.50	-8.55	Horizontal QP
3	183.201	10.68	0.95	19.51	31.14	43.50	-12.36	Horizontal QP
4	280.024	13.10	1.17	20.86	35.13	46.00	-10.87	Horizontal QP
5 pp	526.397	17.39	1.53	23.99	42.91	46.00	-3.09	Horizontal QP
6	962.162	21.95	2.14	14.65	38.74	54.00	-15.26	Horizontal QP

Transmitter Emission above 1GHz
GFSK:

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1267.104	30.38	1.96	44.29	48.80	36.85	74.00	-37.15	Pass	H
1832.785	31.45	2.67	43.65	48.52	38.99	74.00	-35.01	Pass	H
4804.000	34.69	5.98	44.60	48.73	44.80	74.00	-29.20	Pass	H
6032.401	35.92	7.43	44.50	49.62	48.47	74.00	-25.53	Pass	H
7206.000	36.42	6.97	44.77	47.75	46.37	74.00	-27.63	Pass	H
9608.000	37.88	6.98	45.58	46.60	45.88	74.00	-28.12	Pass	H
1273.572	30.40	1.97	44.28	48.91	37.00	74.00	-37.00	Pass	V
1638.585	31.12	2.46	43.85	48.77	38.50	74.00	-35.50	Pass	V
4804.000	34.69	5.98	44.60	48.39	44.46	74.00	-29.54	Pass	V
5986.509	35.89	7.43	44.50	48.93	47.75	74.00	-26.25	Pass	V
7206.000	36.42	6.97	44.77	47.66	46.28	74.00	-27.72	Pass	V
9608.000	37.88	6.98	45.58	46.25	45.53	74.00	-28.47	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1276.818	30.41	1.98	44.28	48.96	37.07	74.00	-36.93	Pass	H
1549.344	30.96	2.35	43.94	49.28	38.65	74.00	-35.35	Pass	H
4882.000	34.85	6.14	44.60	48.06	44.45	74.00	-29.55	Pass	H
6001.768	35.90	7.44	44.50	49.06	47.90	74.00	-26.10	Pass	H
7323.000	36.43	6.85	44.87	47.39	45.80	74.00	-28.20	Pass	H
9764.000	38.05	7.12	45.55	47.61	47.23	74.00	-26.77	Pass	H
1263.883	30.38	1.96	44.29	48.37	36.42	74.00	-37.58	Pass	V
1549.344	30.96	2.35	43.94	49.05	38.42	74.00	-35.58	Pass	V
4882.000	34.85	6.14	44.60	48.28	44.67	74.00	-29.33	Pass	V
5806.408	35.76	7.25	44.52	48.95	47.44	74.00	-26.56	Pass	V
7323.000	36.43	6.85	44.87	47.88	46.29	74.00	-27.71	Pass	V
9764.000	38.05	7.12	45.55	46.69	46.31	74.00	-27.69	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1319.777	30.50	2.04	44.22	48.40	36.72	74.00	-37.28	Pass	H
1768.619	31.35	2.60	43.71	48.82	39.06	74.00	-34.94	Pass	H
4960.000	35.02	6.29	44.60	47.51	44.22	74.00	-29.78	Pass	H
5806.408	35.76	7.25	44.52	49.49	47.98	74.00	-26.02	Pass	H
7440.000	36.45	6.73	44.97	48.53	46.74	74.00	-27.26	Pass	H
9920.000	38.22	7.26	45.52	47.28	47.24	74.00	-26.76	Pass	H
1267.104	30.38	1.96	44.29	48.62	36.67	74.00	-37.33	Pass	V
1805.005	31.40	2.64	43.68	48.35	38.71	74.00	-35.29	Pass	V
4960.000	35.02	6.29	44.60	47.42	44.13	74.00	-29.87	Pass	V
6611.326	36.21	7.28	44.56	50.53	49.46	74.00	-24.54	Pass	V
7440.000	36.45	6.73	44.97	48.09	46.30	74.00	-27.70	Pass	V
9920.000	38.22	7.26	45.52	48.44	48.40	74.00	-25.60	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1260.670	30.37	1.95	44.30	48.89	36.91	74.00	-37.09	Pass	H
1755.164	31.32	2.59	43.73	48.32	38.50	74.00	-35.50	Pass	H
4804.000	34.69	5.98	44.60	48.88	44.95	74.00	-29.05	Pass	H
6412.427	36.12	7.33	44.54	50.09	49.00	74.00	-25.00	Pass	H
7206.000	36.42	6.97	44.77	47.71	46.33	74.00	-27.67	Pass	H
9608.000	37.88	6.98	45.58	46.39	45.67	74.00	-28.33	Pass	H
1273.572	30.40	1.97	44.28	49.31	37.40	74.00	-36.60	Pass	V
1800.416	31.40	2.64	43.68	47.88	38.24	74.00	-35.76	Pass	V
4804.000	34.69	5.98	44.60	49.03	45.10	74.00	-28.90	Pass	V
5986.509	35.89	7.43	44.50	49.54	48.36	74.00	-25.64	Pass	V
7206.000	36.42	6.97	44.77	47.61	46.23	74.00	-27.77	Pass	V
9608.000	37.88	6.98	45.58	45.98	45.26	74.00	-28.74	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1399.353	30.67	2.15	44.12	49.20	37.90	74.00	-36.10	Pass	H
1860.992	31.49	2.70	43.62	48.13	38.70	74.00	-35.30	Pass	H
4882.000	34.85	6.14	44.60	48.67	45.06	74.00	-28.94	Pass	H
5986.509	35.89	7.43	44.50	49.16	47.98	74.00	-26.02	Pass	H
7323.000	36.43	6.85	44.87	48.15	46.56	74.00	-27.44	Pass	H
9764.000	38.05	7.12	45.55	47.66	47.28	74.00	-26.72	Pass	H
1283.335	30.42	1.99	44.27	48.96	37.10	74.00	-36.90	Pass	V
1759.638	31.33	2.59	43.72	47.59	37.79	74.00	-36.21	Pass	V
4882.000	34.85	6.14	44.60	48.15	44.54	74.00	-29.46	Pass	V
6379.864	36.10	7.34	44.54	48.78	47.68	74.00	-26.32	Pass	V
7323.000	36.43	6.85	44.87	48.36	46.77	74.00	-27.23	Pass	V
9764.000	38.05	7.12	45.55	46.34	45.96	74.00	-28.04	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1267.104	30.38	1.96	44.29	48.30	36.35	74.00	-37.65	Pass	H
1814.218	31.42	2.65	43.67	48.07	38.47	74.00	-35.53	Pass	H
4960.000	35.02	6.29	44.60	47.38	44.09	74.00	-29.91	Pass	H
6187.929	36.00	7.39	44.52	48.94	47.81	74.00	-26.19	Pass	H
7440.000	36.45	6.73	44.97	46.54	44.75	74.00	-29.25	Pass	H
9920.000	38.22	7.26	45.52	47.26	47.22	74.00	-26.78	Pass	H
1273.572	30.40	1.97	44.28	48.29	36.38	74.00	-37.62	Pass	V
1875.258	31.51	2.72	43.61	48.44	39.06	74.00	-34.94	Pass	V
4960.000	35.02	6.29	44.60	47.47	44.18	74.00	-29.82	Pass	V
6611.326	36.21	7.28	44.56	50.73	49.66	74.00	-24.34	Pass	V
7440.000	36.45	6.73	44.97	48.73	46.94	74.00	-27.06	Pass	V
9920.000	38.22	7.26	45.52	46.89	46.85	74.00	-27.15	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1251.079	30.35	1.94	44.31	49.25	37.23	74.00	-36.77	Pass	H
1514.252	30.90	2.31	43.98	48.31	37.54	74.00	-36.46	Pass	H
4804.000	34.69	5.98	44.60	48.84	44.91	74.00	-29.09	Pass	H
6017.064	35.91	7.44	44.50	49.05	47.90	74.00	-26.10	Pass	H
7206.000	36.42	6.97	44.77	47.88	46.50	74.00	-27.50	Pass	H
9608.000	37.88	6.98	45.58	45.97	45.25	74.00	-28.75	Pass	H
1254.268	30.35	1.94	44.31	48.05	36.03	74.00	-37.97	Pass	V
1899.278	31.55	2.74	43.59	48.13	38.83	74.00	-35.17	Pass	V
4804.000	34.69	5.98	44.60	48.33	44.40	74.00	-29.60	Pass	V
6494.564	36.16	7.31	44.55	49.31	48.23	74.00	-25.77	Pass	V
7206.000	36.42	6.97	44.77	48.48	47.10	74.00	-26.90	Pass	V
9608.000	37.88	6.98	45.58	45.76	45.04	74.00	-28.96	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1270.334	30.39	1.97	44.29	48.10	36.17	74.00	-37.83	Pass	H
1634.419	31.12	2.45	43.85	48.05	37.77	74.00	-36.23	Pass	H
4882.000	34.85	6.14	44.60	47.69	44.08	74.00	-29.92	Pass	H
6078.644	35.94	7.42	44.51	49.21	48.06	74.00	-25.94	Pass	H
7323.000	36.43	6.85	44.87	47.57	45.98	74.00	-28.02	Pass	H
9764.000	38.05	7.12	45.55	47.76	47.38	74.00	-26.62	Pass	H
1257.465	30.36	1.95	44.30	47.82	35.83	74.00	-38.17	Pass	V
1746.251	31.31	2.58	43.73	47.43	37.59	74.00	-36.41	Pass	V
4882.000	34.85	6.14	44.60	48.47	44.86	74.00	-29.14	Pass	V
6511.117	36.17	7.31	44.55	49.26	48.19	74.00	-25.81	Pass	V
7323.000	36.43	6.85	44.87	47.19	45.60	74.00	-28.40	Pass	V
9764.000	38.05	7.12	45.55	47.36	46.98	74.00	-27.02	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1260.670	30.37	1.95	44.30	48.46	36.48	74.00	-37.52	Pass	H
1818.842	31.43	2.66	43.66	47.80	38.23	74.00	-35.77	Pass	H
4960.000	35.02	6.29	44.60	46.85	43.56	74.00	-30.44	Pass	H
5940.967	35.86	7.38	44.51	48.82	47.55	74.00	-26.45	Pass	H
7440.000	36.45	6.73	44.97	46.17	44.38	74.00	-29.62	Pass	H
9920.000	38.22	7.26	45.52	47.03	46.99	74.00	-27.01	Pass	H
1263.883	30.38	1.96	44.29	49.72	37.77	74.00	-36.23	Pass	V
1777.646	31.36	2.61	43.70	48.44	38.71	74.00	-35.29	Pass	V
4960.000	35.02	6.29	44.60	47.31	44.02	74.00	-29.98	Pass	V
5588.881	35.59	7.02	44.54	49.42	47.49	74.00	-26.51	Pass	V
7440.000	36.45	6.73	44.97	46.56	44.77	74.00	-29.23	Pass	V
9920.000	38.22	7.26	45.52	47.19	47.15	74.00	-26.85	Pass	V

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: 99571-VLAN-NA

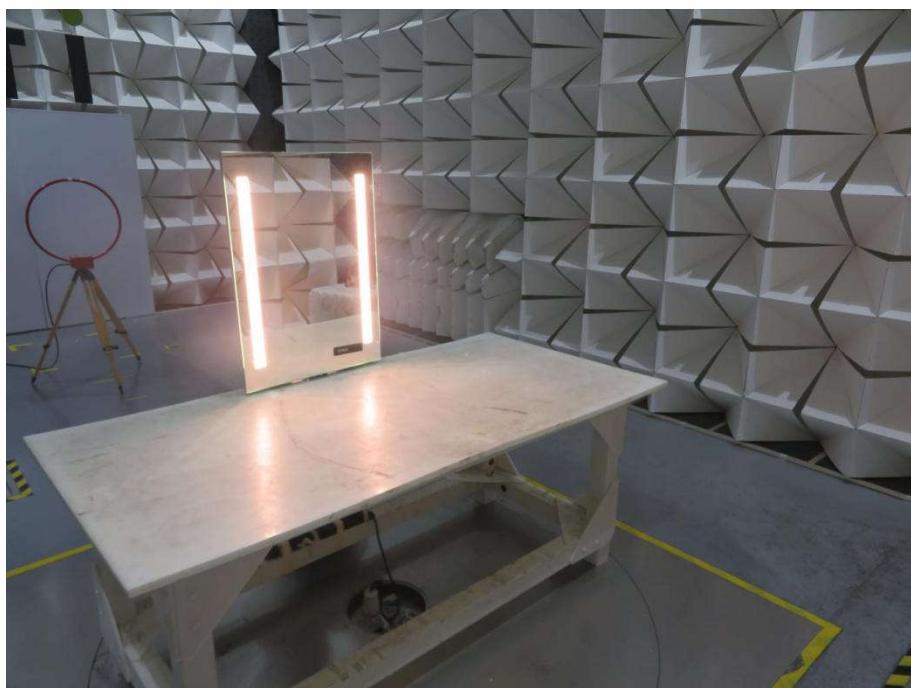

Radiated spurious emission Test Setup-1(Below 30MHz)



Radiated emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32K00040201 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

