

# Gantner Electronic **TEST REPORT**

**SCOPE OF WORK**

EMC TESTING – GAT ECO.LOCK 7100 F/ISO

**REPORT NUMBER**

2230758KAU-007a

**ISSUE DATE**

**07-February-2018**

**PAGES**

18

**DOCUMENT CONTROL NUMBER**

EMC\_FCCpart15\_ICES003 (12-September-2017)

© 2017 INTERTEK



**MODEL:** GAT ECO.Lock 7100  
**TYPE:** F/ISO  
**DESCRIPTION:** Battery Powered RFID Lock  
**SERIAL NO:** 1744000004

All measurement results refer to the equipment which was tested

**MANUFACTURER:** Gantner Electronic GmbH  
**CUSTOMER NAME:** Gantner Electronic GmbH  
**ADDRESS (CUSTOMER):** Montafonerstrasse 8  
AT-6780 SCHRUNS  
AUSTRIA

**REPORT NO:** 2230758KAU-007a

**TEST RESULT:** The FCC, part 15 B, Class B, verification and ICES-003, Class B requirements are fulfilled.

**TEST LABORATORY:** Intertek Deutschland GmbH  
Innovapark 20, 87600 Kaufbeuren  
Germany

**FCC DESIGNATION NUMBER:** DE0014

**FCC TEST FIRM REGISTRATION NUMBER.** 359260

**INDUSTRY CANADA REGISTRATION.** 8882A-1; 8882A-2

**COMPILED BY:** R. Dressler  
Technical Manager EMC/Radio

**APPROVED BY:** U. Gronert  
Senior Project Engineer

*P. Dressler*  
*Uwe Gronert*



Intertek Deutschland GmbH  
Innovapark 20, D-87600 Kaufbeuren, Germany

## Details about Accreditations/Acceptances

### EMC / Radio National



The Intertek Deutschland EMC-Lab is accredited by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

Registration Number (EMC general): **D-PL-12085-01-01**

Registration Number (EMC Med): **D-PL-12085-01-03**

### International



The Intertek Deutschland EMC-Lab is accepted to participate in the IECEE (IEC Conformity assessment for Electrotechnical Equipment and Components) CB-Scheme

CB Test Laboratory: **TL118**



The Intertek Deutschland EMC-Lab is listed at the Federal Communications Commission (FCC)

Designation Number: **DE0014**

Test Firm Registration Number: **359260**



BNetzA-CAB-16/21-10

The *Bundesnetzagentur* recognizes Intertek Deutschland GmbH as Conformity Assessment Body in the sector electromagnetic compatibility (EMC).



The Intertek Deutschland EMC-Lab is listed at Industry Canada

No.**8882A-1** (OATS) and **8882A-2** (3 m alternative test site)

### Automotive



Anerkennungsstelle

Anerkannt unter  
**KBA-P 00046-03**

The Intertek Deutschland EMC-Lab is recognized as technical service of the Kraftfahrt-Bundesamt (KBA)

Registration Number: **KBA-P 00046-03**

**SECTION 1****CONTENTS**

<b>SECTION 2</b>	<b>MEASUREMENT AND TEST SPECIFICATION</b>	<b>5</b>
<b>SECTION 3</b>	<b>GENERAL INFORMATION</b>	<b>6</b>
<b>SECTION 4</b>	<b>SUMMARY OF TESTING</b>	<b>7</b>
4.1	General annotation.....	7
4.2	Measurement uncertainty.....	7
4.3	Document History.....	7
<b>SECTION 5</b>	<b>TEST RESULTS – OVERVIEW</b>	<b>8</b>
<b>SECTION 6</b>	<b>INFORMATION ABOUT THE EUT</b>	<b>9</b>
6.1	Description of the EUT .....	9
6.2	Power interface .....	9
6.3	Configuration mode .....	9
6.4	Operation mode.....	10
6.5	Peripheral devices used for testing .....	10
6.6	Supply and interconnecting cables used for testing.....	10
6.7	Block diagram with clock frequencies of the EUT.....	10
<b>SECTION 7</b>	<b>EMISSIONS.....</b>	<b>11</b>
7.1	Radiated emissions – Electric field strength .....	11
<b>SECTION 8</b>	<b>Product labelling .....</b>	<b>15</b>

## SECTION 2

### MEASUREMENT AND TEST SPECIFICATION

FCC, Part 15 B, Class B, verification

The test setup and test was done according to: **ANSI C63.4: 2014**  
American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

#### ISED Canada

ICES-003, Issue 6, January 2016

Information Technology Equipment (Including digital apparatus) – Limits and methods of measurement

Tests according to:

ANSI C63.4

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, ANSI C63.4-2014 (Revision of ANSI C63.4-2009).

The test results detailed in this report apply only to the GAT ECO Lock 7100 F/ISO with the test setup described. Any modification such as a change, addition to or inclusion of another device into this product will require an additional evaluation. The support equipment listed as part of the emission tests is required to properly exercise and test the device under test.

**SECTION 3**  
**GENERAL INFORMATION**

---

Possible test case verdicts:

Test case does not apply to the test object: N/A (Not Applicable)

Test object does meet the requirement: P (Pass)

Test object does not meet the requirements: F (Fail)

---

Samples arrived: 2017-11-13

Testing: 2018-01-15

---

Decimal separator:  Point  Comma

---

Temperature: 15 °C - 35 °C

Humidity: 20 % - 60 %

Atmospheric pressure: 900 mbar - 1000 mbar

Environmental conditions during testing:

If explicitly required by a basic standard the measured climatic conditions are documented in the corresponding test section.

---

**SECTION 4**  
**SUMMARY OF TESTING****4.1 General annotation**

The tests were performed in the order of the right column in the “Test Results – Overview” table.

**4.2 Measurement uncertainty**

For each test method, an uncertainty evaluation was carried out. The results of the evaluation can be provided upon request from Intertek Deutschland GmbH.

**4.3 Document History**

REVISION	DATE	REPORT	CHANGES	AUTHOR
Initial release	2018-02-07	2230758KAU-007a	Initial issue	RDR

**SECTION 5**  
**TEST RESULTS – OVERVIEW**

EMISSION	REQUESTED	VERDICT	DATE	NO
Radiated emissions (30 MHz - 1 GHz)	Class B	P	2018-01-15	1

**Omission of tests:**

Conducted emissions is not applicable, because the EUT is battery operated.


## SECTION 6

### INFORMATION ABOUT THE EUT

#### 6.1 Description of the EUT

<input checked="" type="checkbox"/> table-top EUT	<input type="checkbox"/> floor-standing EUT		
Dimensions:	Height: 109 mm	Width: 109 mm	Length: 33 mm
Software version:	A special test firmware was written for the EMC/Radio tests, to have a continuous transmission with a 100 ms interval. In reality the RFID and Bluetooth modules are just transmitting, when the lock button is pushed. They are never transmitting at the same time.		
Product version:	4.2		
Description: With the GAT ECO.Lock 7xxx (NW) F/ISO, lockers and depot boxes can be electronically locked and unlocked. The user simply presses the lock button in using their data carrier while the locker door is closed. This action activates the lock electronics and the authorization of the user's data carrier is checked. If the authorization is valid, the locker door is locked or unlocked by the GAT ECO.Lock 7xxx F/ISO accordingly. System users are identified at the lock using contactless RFID data carriers (Radio Frequency Identification).			

#### 6.1.1 Photo of the rating plate

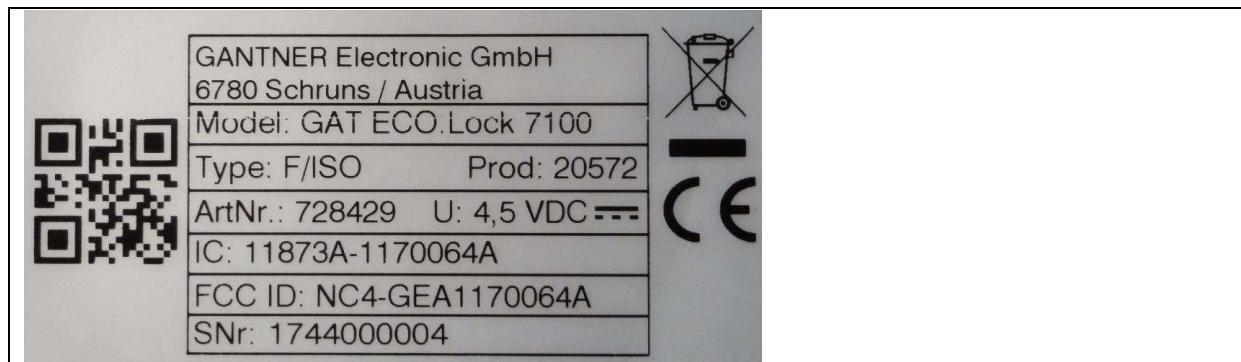

#### 6.2 Power interface

MODE	VOLTAGE (V)	FREQUENCY (Hz)	COMMENT
1	3x 1.5 V	DC	Battery, Mignon AA

#### 6.3 Configuration mode

MODE	DESCRIPTION
1	A tag card was placed in front of the RFID reader

## 6.4 Operation mode

MODE	DESCRIPTION
1	The RFID reader was pulsing and reading the tag card every 100 ms


## 6.5 Peripheral devices used for testing

DEVICE	MANUFACTURER	TYPE	FID	FCC ID
GAT Testcard	Gantner	Mifare	99999999	-

## 6.6 Supply and interconnecting cables used for testing

LINE	LENGTH (cm)	SHIELDING
none		

## 6.7 Block diagram with clock frequencies of the EUT

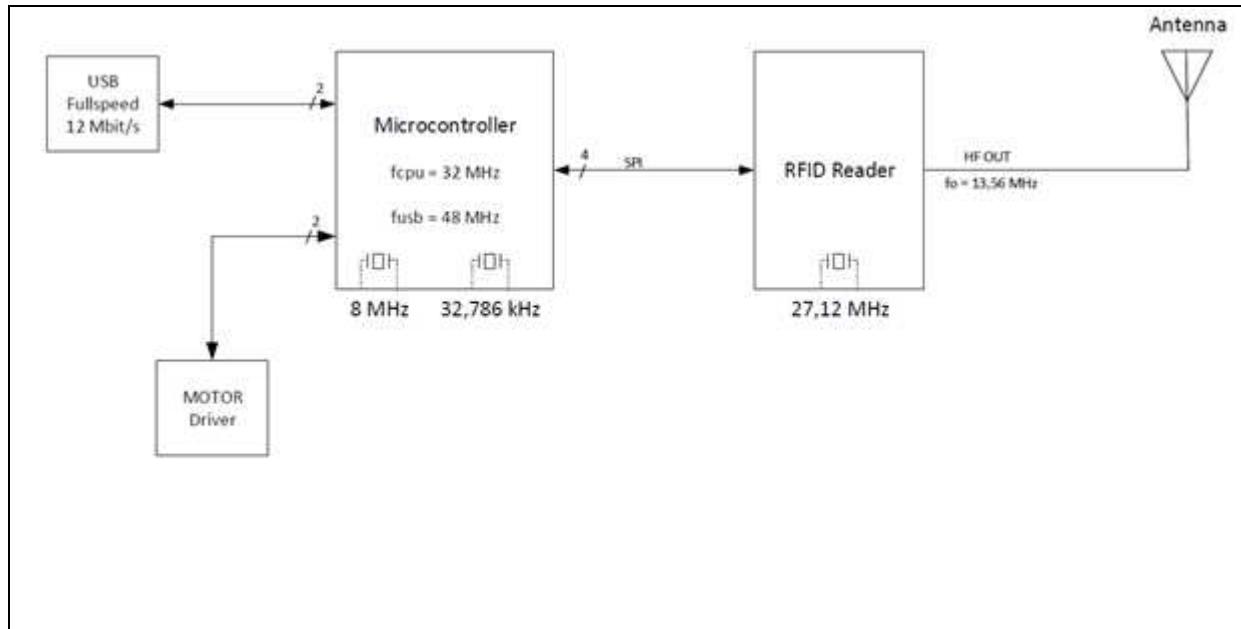

## SECTION 7

### EMISSIONS

#### 7.1 Radiated emissions – Electric field strength

NORMATIVE REFERENCES		RESULT	
Limits according to:	<b>CISPR 22 (identical to CISPR 32 limits)</b>		P
Methods of measurement according to:	<b>ANSI C63.4</b>		
Equipment mode	Power interface	1	P
	EUT configuration mode	1	
	Operation mode	1	
Test requirements	Frequency range	30 MHz - 1 GHz	P
	Antenna distance	3 m	
	Class	B	


#### Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber	Siepel	REF W460SLB	-	PM KF 1150-01	2016-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 10 Hz - 7 GHz	Rohde & Schwarz	ESR7	101095	PM KF 2441	2017-10 (1 year)
Antenna 30 MHz - 3GHz	Rohde & Schwarz	HL 562	100354	PM KF 1123	2016-02 (2 years)
Test software	Rohde & Schwarz	EMC 32 V.10.01.00	-	PM KF 2983-2	-

## Measurement results – Radiated emissions:

EUT:	GAT ECO Lock 7100 F/ISO
Test Verdict:	pass
Test Description:	EN 55032 / CISPR 32
Operating Conditions:	pulse mode
Operator Name:	RDR
Project Number:	30758
Date:	2018-01-15
Comment:	SNr.: 1744000004


The EN 55032/CISPR 32 limits in this diagram are identical to the EN 55022/CISPR 22 limits, mentioned under Title 47 (CFR) § 15.109

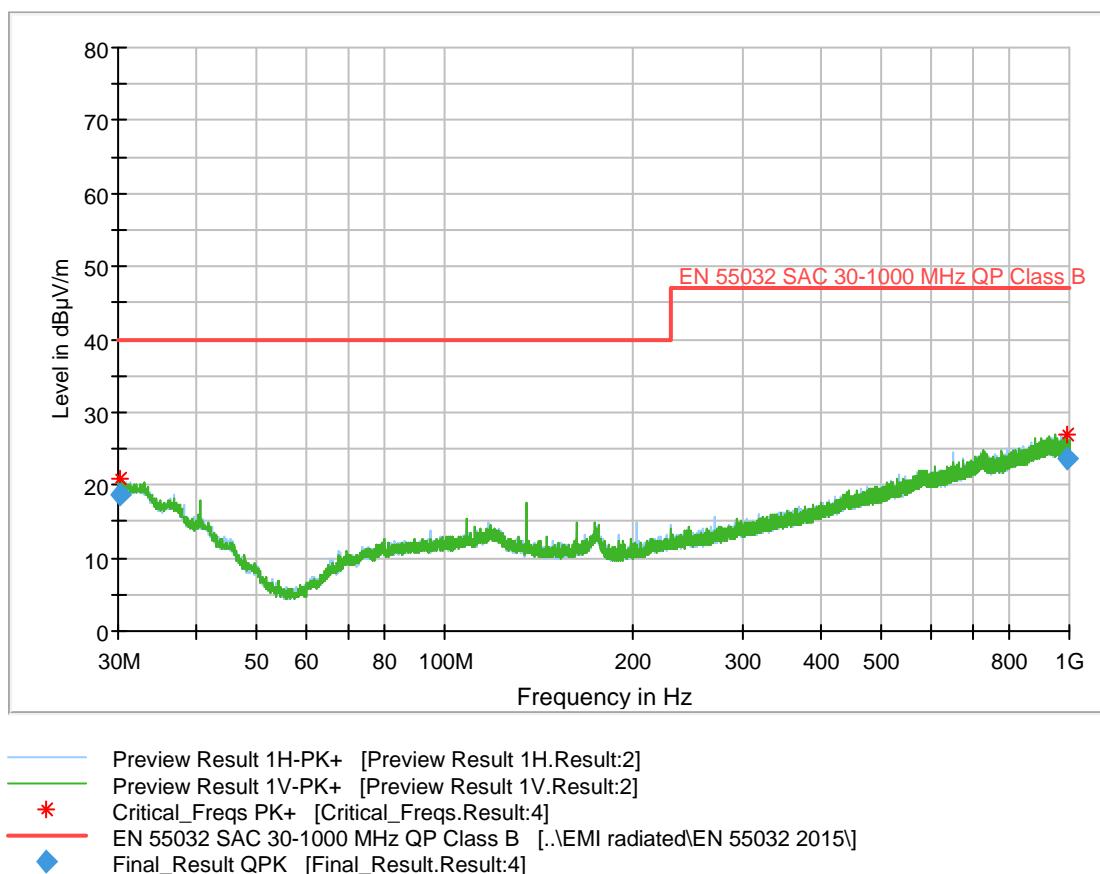

## Final Result

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.180000	18.73	40.00	21.27	1000.0	120.000	308.0	V	175.0	19.7
990.000000	23.60	47.00	23.40	1000.0	120.000	245.0	H	104.0	24.0

## Photos of the test setup:

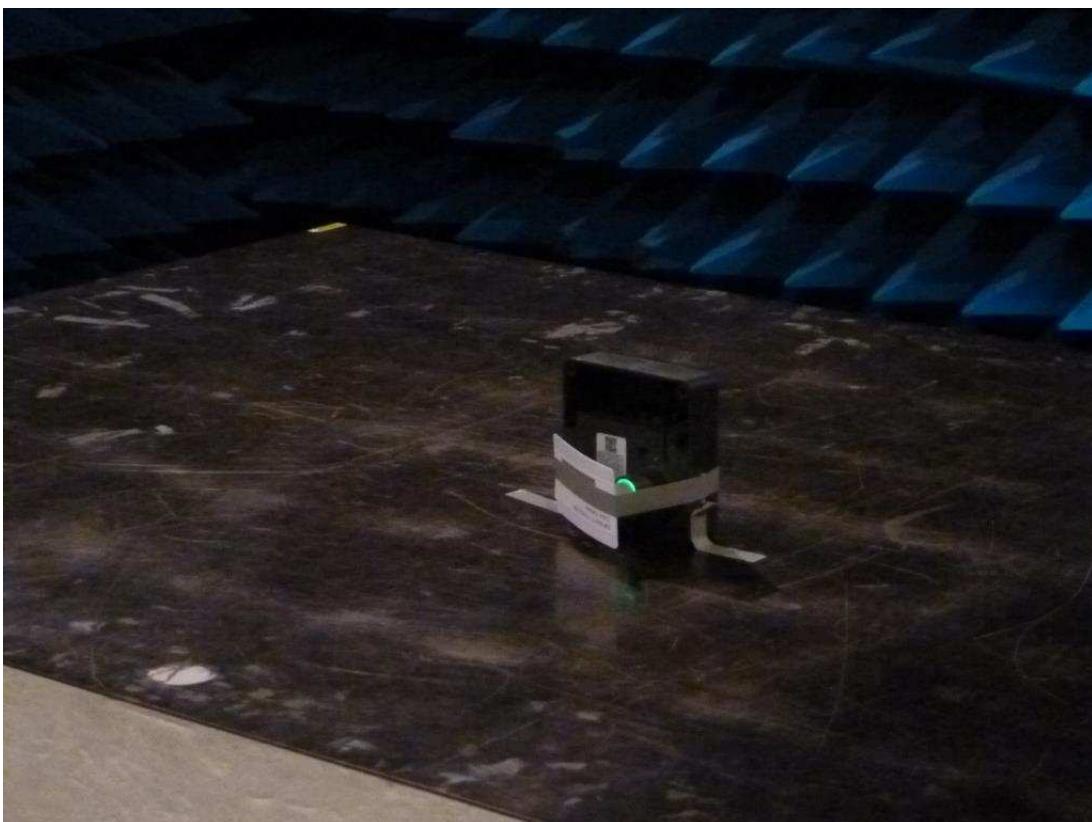

## Anechoic chamber

### Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 30 MHz – 18 GHz (26 GHz). It includes automatic antenna mast of height 4 m and turntable of radius 2 m. It enables both manual and fully automatic measurements. To find the highest level of radiation

- the height of the antenna is scanned in range 1m to 4 m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

### Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dB $\mu$ V)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dB $\mu$ V/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$

## SECTION 8

### Product labelling

#### FCC, Part 15 B, Class A/ B verification

##### Information to the user:

For a **Class A** digital device or peripheral, the instructions furnished the user shall include the following or similar statement, **placed in a prominent location in the text of the manual**:

NOTE: This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of these equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

For a **Class B** digital device or peripheral, the instructions furnished the user shall include the following or similar statement, **placed in a prominent location in the text of the manual**:

NOTE: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/ TV technician for help

**Systems incorporating several digital devices:**

For systems incorporating several digital devices, the statement mentioned above needs to be contained only in the instruction manual for the main control unit.

**Manual is provided in a form other than paper:**

In cases where the manual is provided only in a form other than paper, such as on a computer disk or over the internet, the information required by this section may be included in the manual in that alternative form, provided the user can reasonably be expected to have the capability to access information in that form.

**Label on the device:**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

*(Where a device is constructed in two or more sections connected by wires and marketed together, the statement of this section is required to be affixed only on the main control unit.)*

**Small devices:**

When the device is so small or for such use that it is not practicable to place the statement specified under paragraph "Label on the device" of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.

## Canadian ICES-003, Labelling Requirements

### **Self-Declaration of Compliance (SDoC):**

ITE subject to ICES-003 is approved through the method of Self-Declaration of Compliance (SDoC) by the manufacturer, importer or distributor of ITE who shall ensure that compliance with all technical requirements prescribed by ICES-003 has been demonstrated and the results compiled into a test report.

### **Test Report:**

The test report shall be **retained** by the manufacturer or importer **for a minimum period of five years** from the date the model of ITE is first offered for sale, distributed and/or leased in Canada, and shall be made available to Industry Canada upon request.

### **Industry Canada ICES-003 Compliance Label:**

*CAN ICES-3 (\*)/NMB-3(\*)*

\* Insert either "A" or "B" but not both to identify the applicable Class of ITE.

The label shall be permanently affixed to the ITE or displayed electronically and its text must be clearly legible. When the dimension of the device is too small or it is otherwise not practical to place the label on the ITE, the label shall be placed in a prominent location in the user manual supplied with the ITE. The user manual may be in an electronic format and must be readily available.

The manufacturer, importer or supplier shall meet the labelling requirements set out in this section for every ITE unit <sup>3</sup>:

- (i) Prior to marketing in Canada, for ITE manufactured in Canada, and;
- (ii) Prior to importation into Canada, for imported ITE.

The presence of the label on the ITE represents the manufacturer's or importer's Self-Declaration of Compliance (SDoC) to Industry Canada ICES-003.

Each unit of an ITE model shall bear a label indicating the model's compliance with ICES-003.

<sup>3</sup> The labelling requirements apply to new models. Existing models may continue with the requirements in Issue 4 or adopt the requirements in Issue 5.

**End of test report**