


Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2422MHz


Horizontal

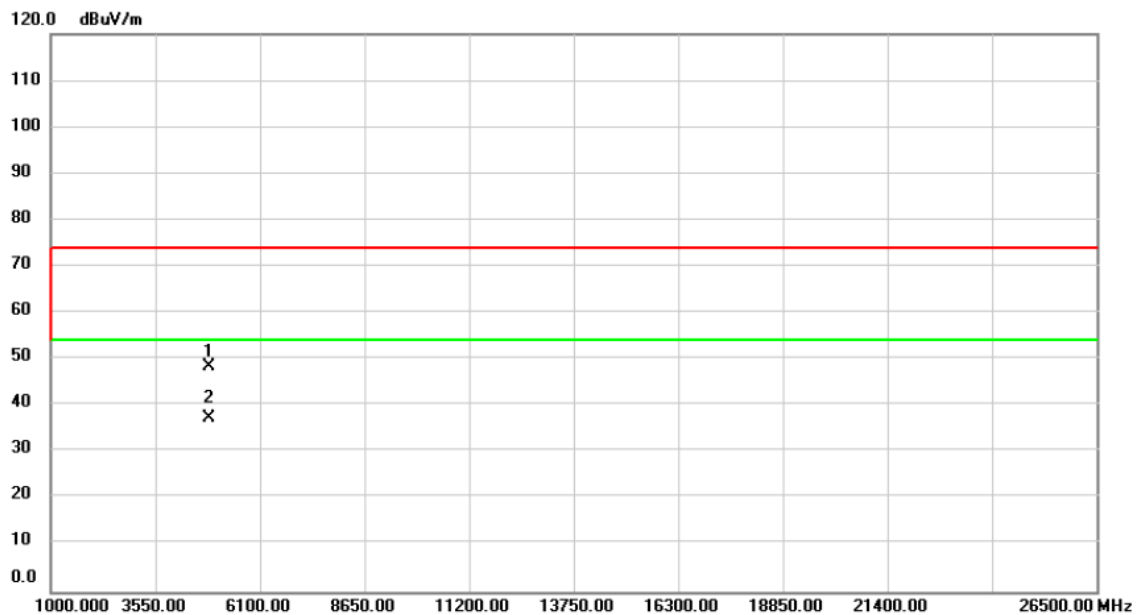

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4844.000	59.67	-11.34	48.33	74.00	-25.67	peak	
2	*	4844.000	48.79	-11.34	37.45	54.00	-16.55	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Vertical

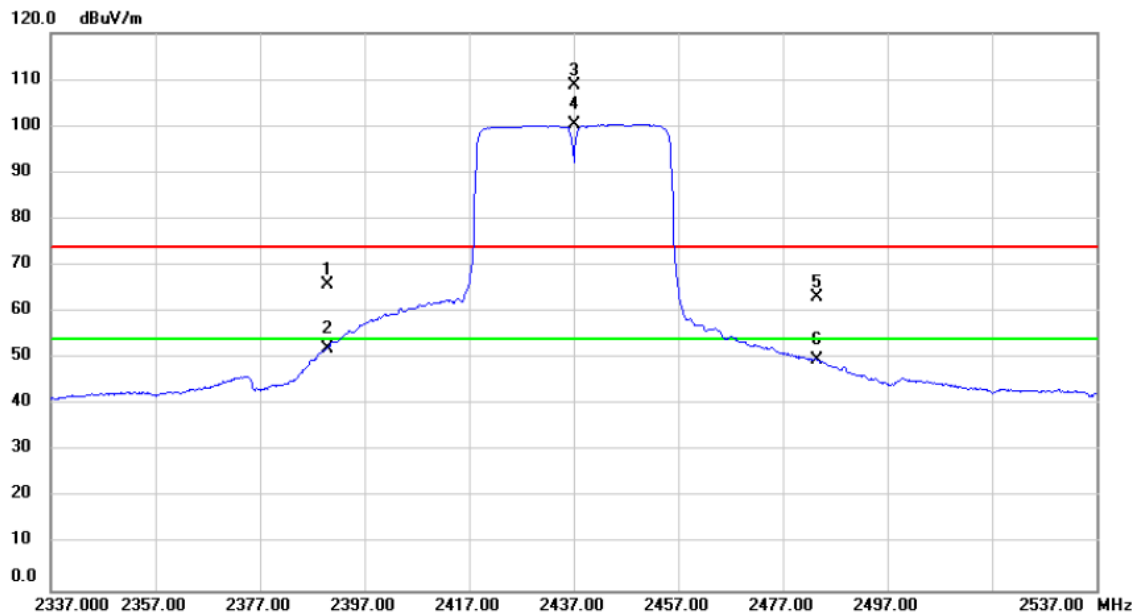

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	34.80	31.06	65.86	74.00	-8.14	peak	
2		2390.000	20.99	31.06	52.05	54.00	-1.95	AVG	
3	X	2437.000	77.58	31.23	108.81	74.00	34.81	peak	No Limit
4	*	2437.000	69.13	31.23	100.36	54.00	46.36	AVG	No Limit
5		2483.500	31.67	31.41	63.08	74.00	-10.92	peak	
6		2483.500	18.28	31.41	49.69	54.00	-4.31	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Vertical

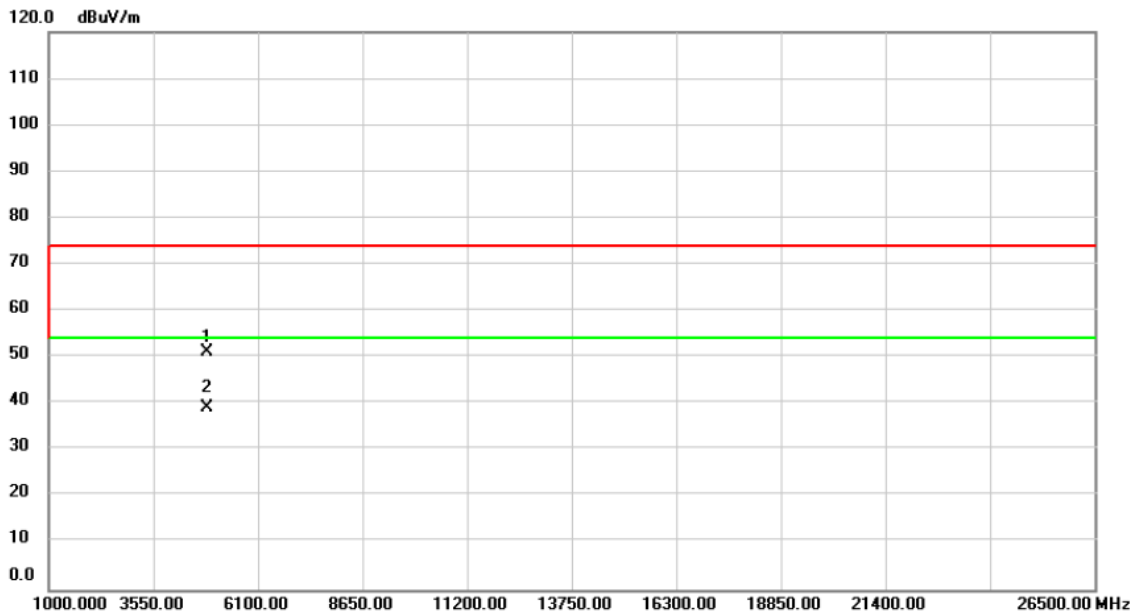

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	62.38	-11.29	51.09	74.00	-22.91	peak	
2	*	4874.000	50.48	-11.29	39.19	54.00	-14.81	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Horizontal

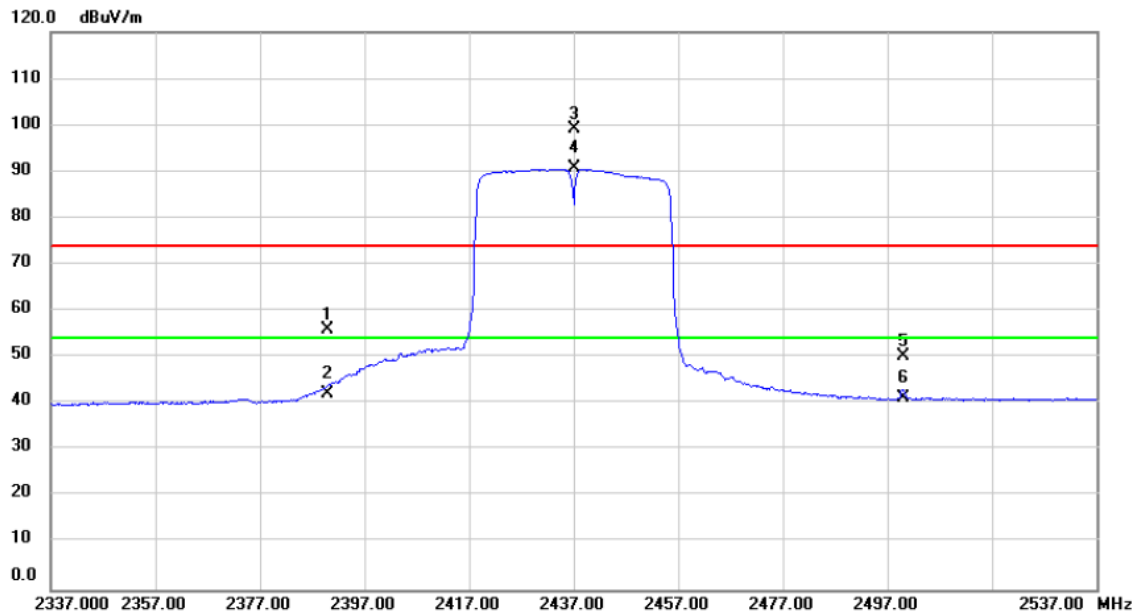

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.04	31.06	56.10	74.00	-17.90	peak	
2		2390.000	11.08	31.06	42.14	54.00	-11.86	AVG	
3	X	2437.000	67.80	31.23	99.03	74.00	25.03	peak	No Limit
4	*	2437.000	59.38	31.23	90.61	54.00	36.61	AVG	No Limit
5		2500.000	18.87	31.47	50.34	74.00	-23.66	peak	
6		2500.000	9.64	31.47	41.11	54.00	-12.89	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Horizontal

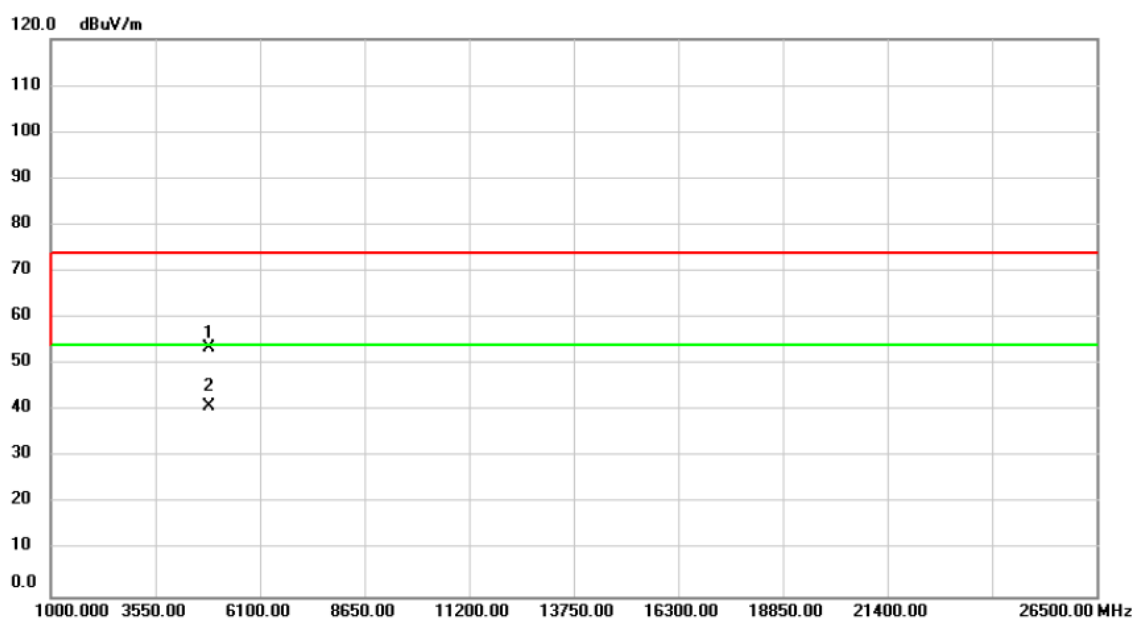

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	64.76	-11.29	53.47	74.00	-20.53	peak	
2	*	4874.000	52.23	-11.29	40.94	54.00	-13.06	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Vertical

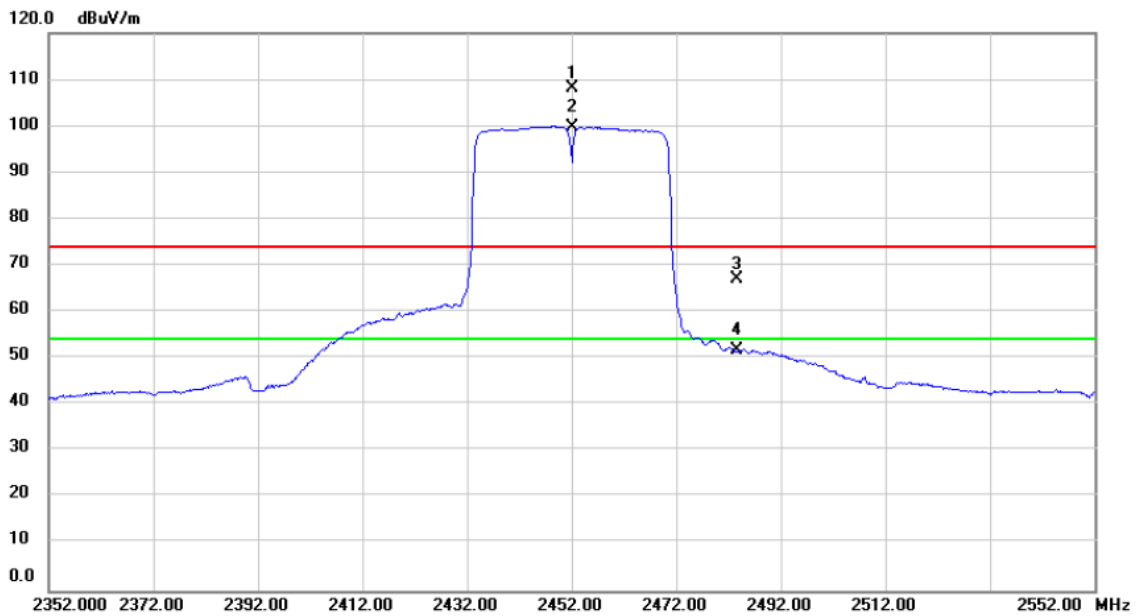

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.000	76.85	31.30	108.15	74.00	34.15	peak	No Limit
2	*	2452.000	68.46	31.30	99.76	54.00	45.76	AVG	No Limit
3		2483.500	35.49	31.41	66.90	74.00	-7.10	peak	
4		2483.500	20.29	31.41	51.70	54.00	-2.30	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Vertical

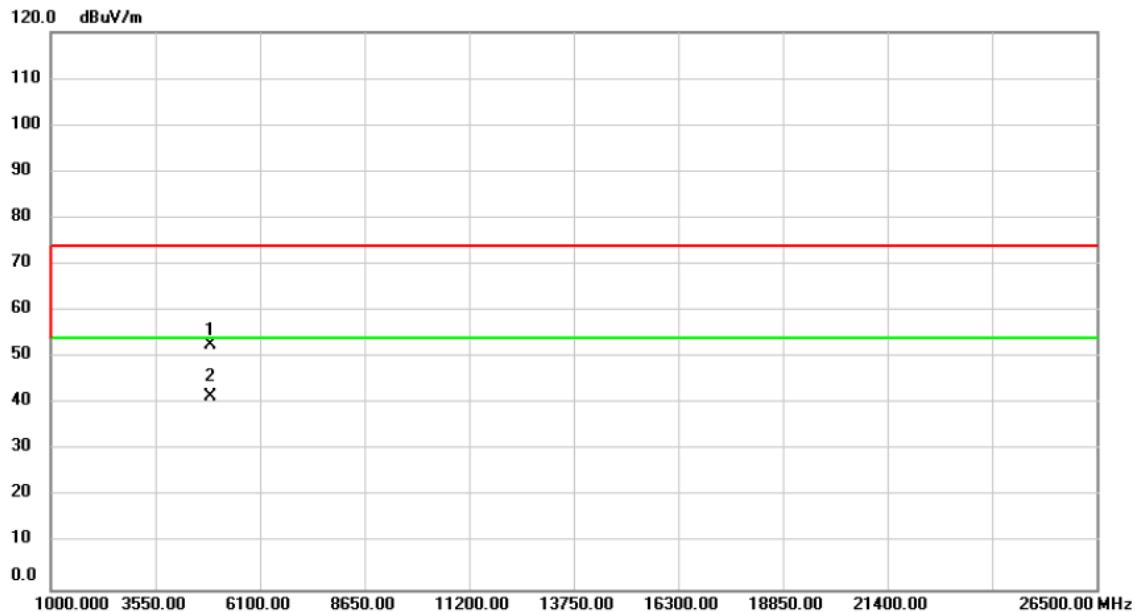

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4904.000	63.80	-11.24	52.56	74.00	-21.44	peak	
2 *	4904.000	52.86	-11.24	41.62	54.00	-12.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Horizontal

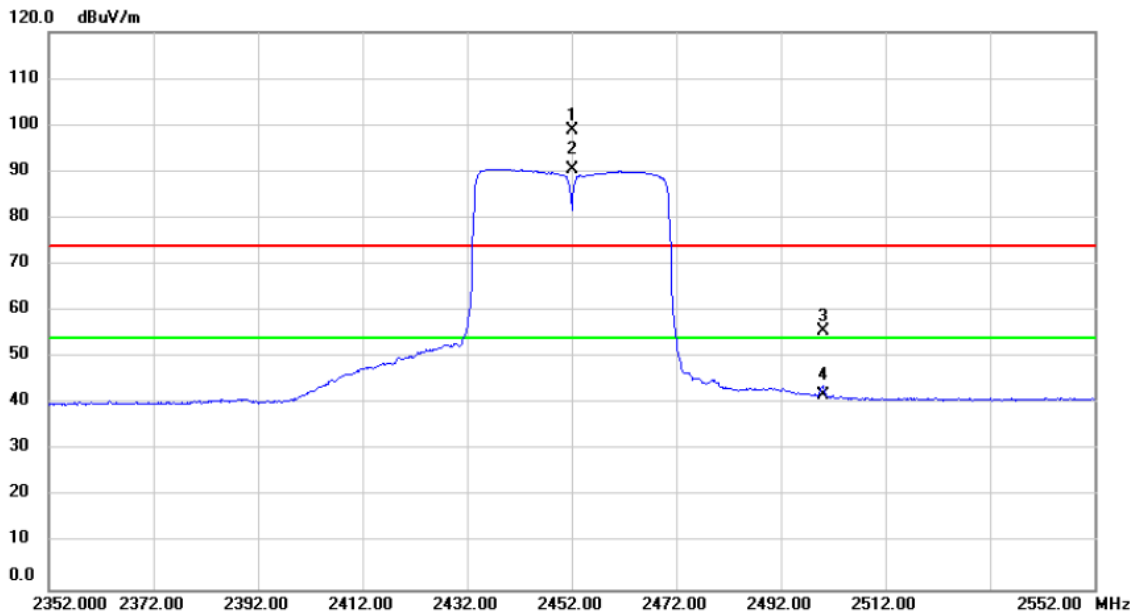

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.000	67.70	31.30	99.00	74.00	25.00	peak	No Limit
2	*	2452.000	59.28	31.30	90.58	54.00	36.58	AVG	No Limit
3		2500.000	24.06	31.47	55.53	74.00	-18.47	peak	
4		2500.000	10.51	31.47	41.98	54.00	-12.02	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz

Horizontal

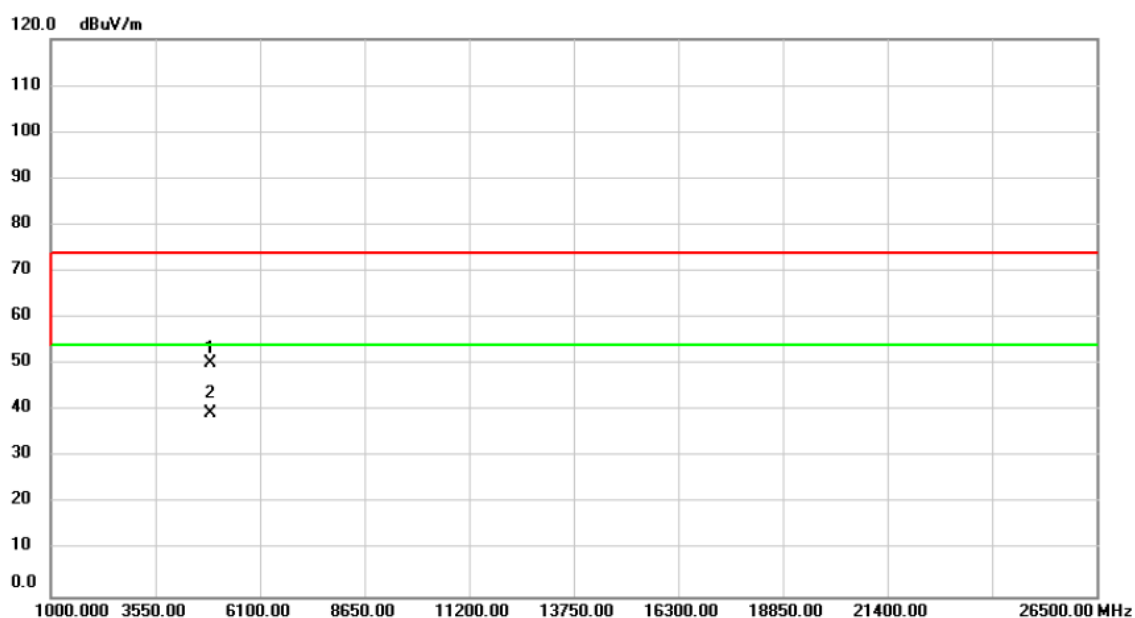


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4904.000	61.51	-11.24	50.27	74.00	-23.73	peak	
2	*	4904.000	50.72	-11.24	39.48	54.00	-14.52	AVG	

Beamforming

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz


Vertical

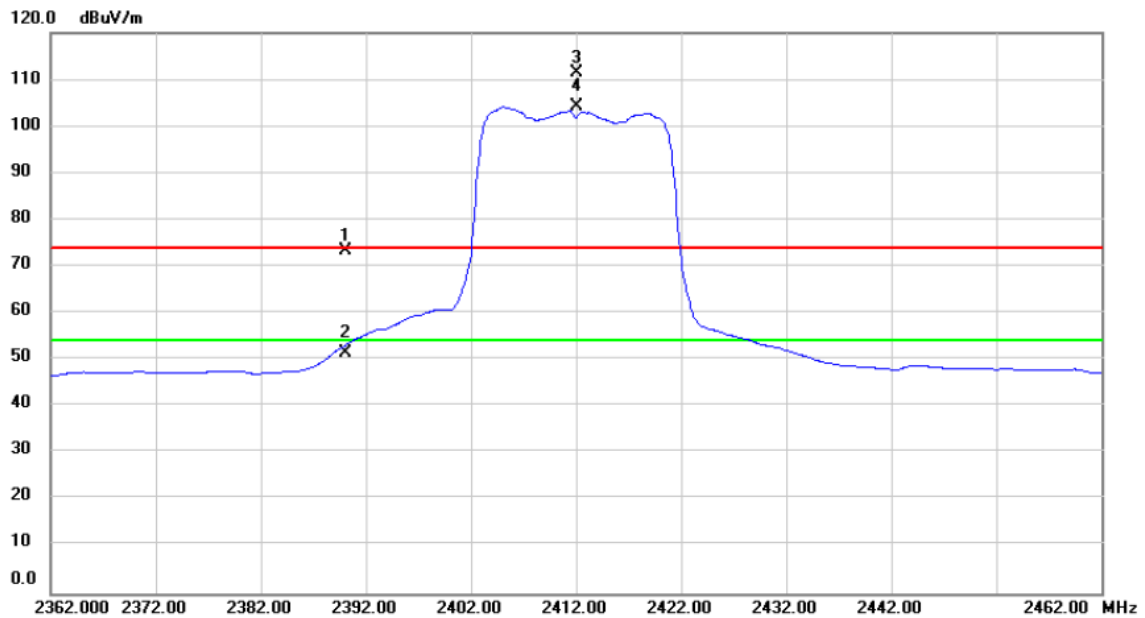

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.30	31.06	73.36	74.00	-0.64	peak	
2		2390.000	20.49	31.06	51.55	54.00	-2.45	AVG	
3	X	2412.000	80.38	31.14	111.52	74.00	37.52	peak	No Limit
4	*	2412.000	72.98	31.14	104.12	54.00	50.12	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz


Vertical

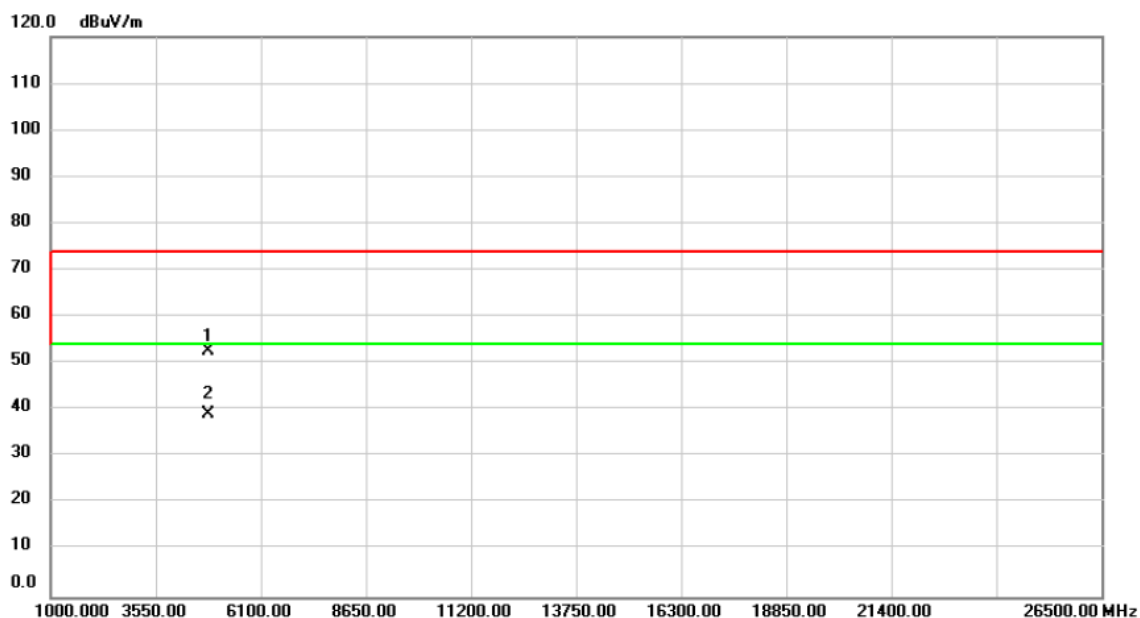

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.000	64.03	-11.37	52.66	74.00	-21.34	peak	
2 *	4824.000	50.49	-11.37	39.12	54.00	-14.88	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz


Horizontal

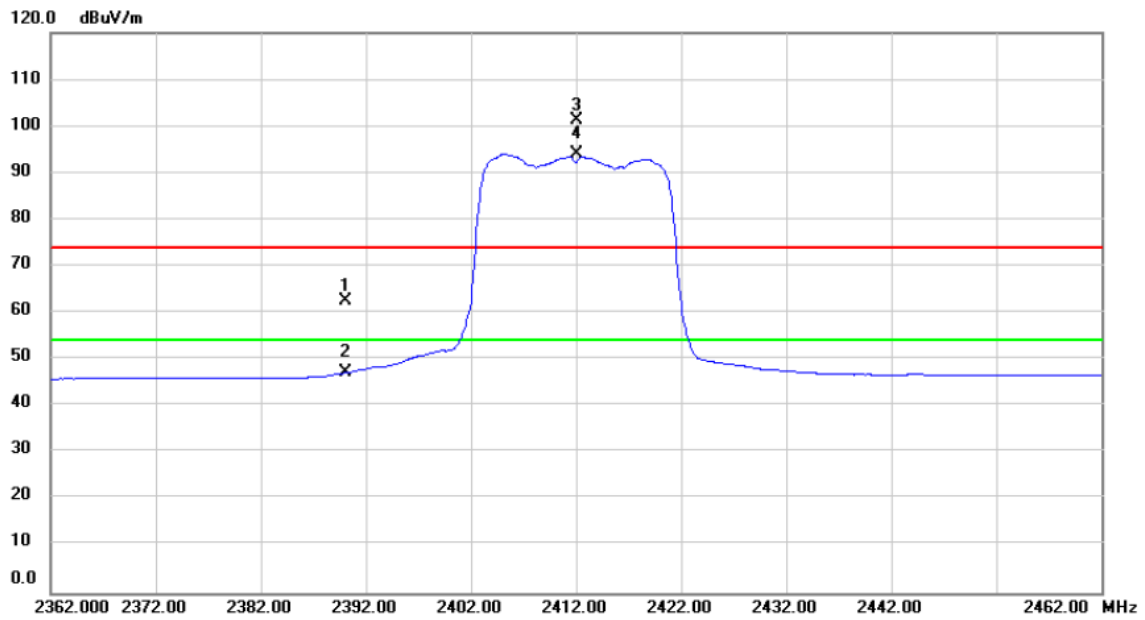

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	31.38	31.06	62.44	74.00	-11.56	peak	
2		2390.000	16.08	31.06	47.14	54.00	-6.86	AVG	
3	X	2412.000	70.17	31.14	101.31	74.00	27.31	peak	No Limit
4	*	2412.000	62.86	31.14	94.00	54.00	40.00	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz


Horizontal

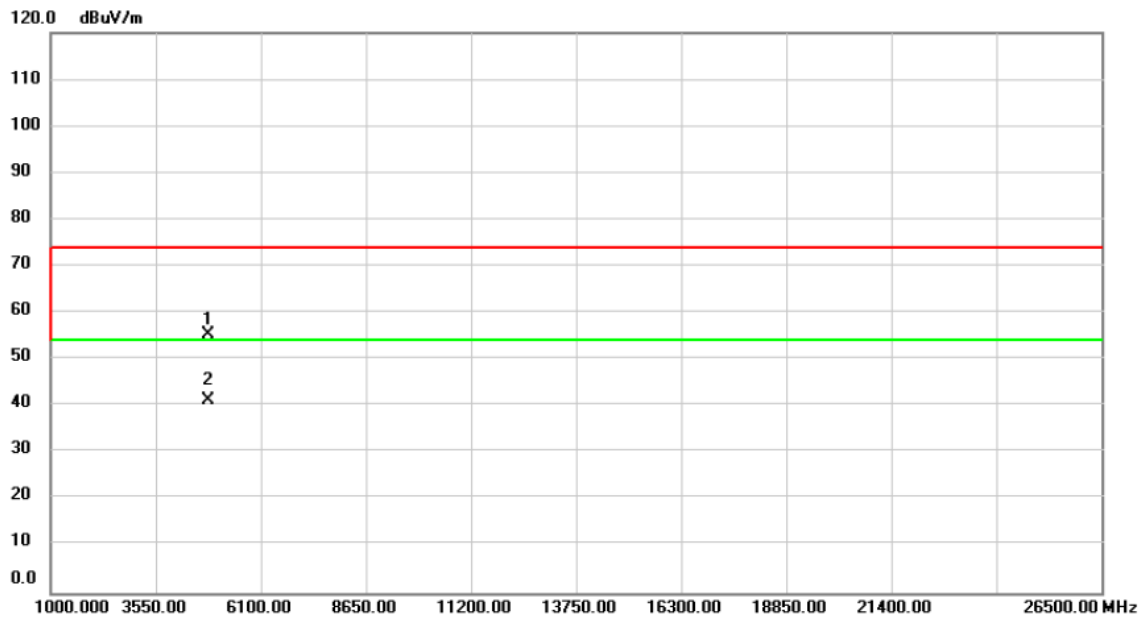

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	66.72	-11.37	55.35	74.00	-18.65	peak	
2	*	4824.000	52.65	-11.37	41.28	54.00	-12.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2437MHz


Vertical

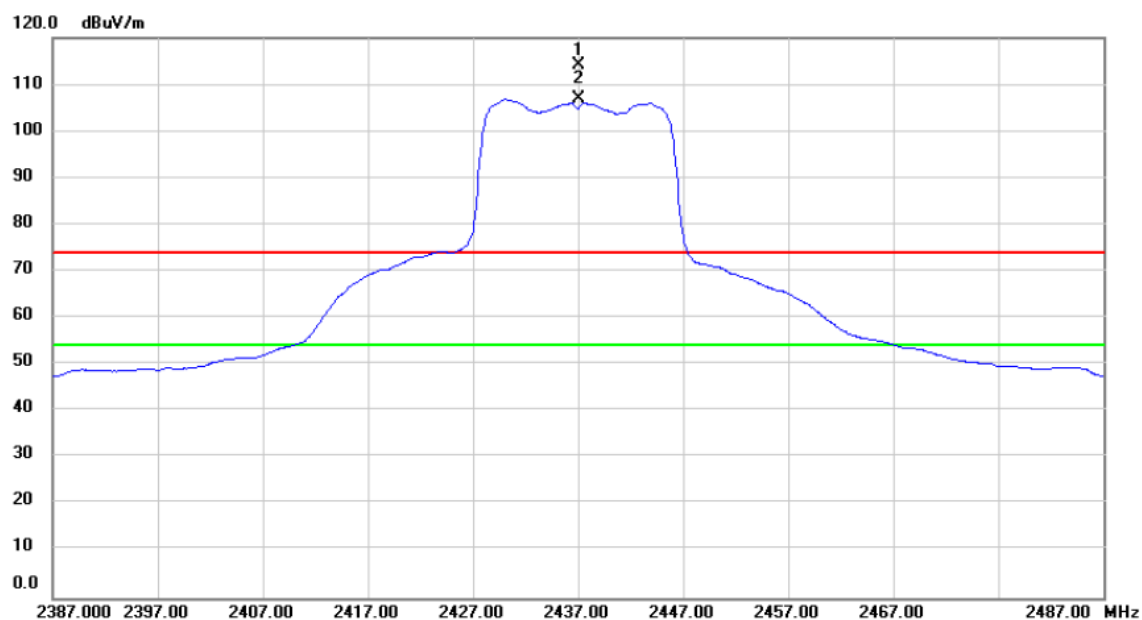

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	82.90	31.23	114.13	74.00	40.13	peak	No Limit
2	*	2437.000	75.60	31.23	106.83	54.00	52.83	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2437MHz


Vertical

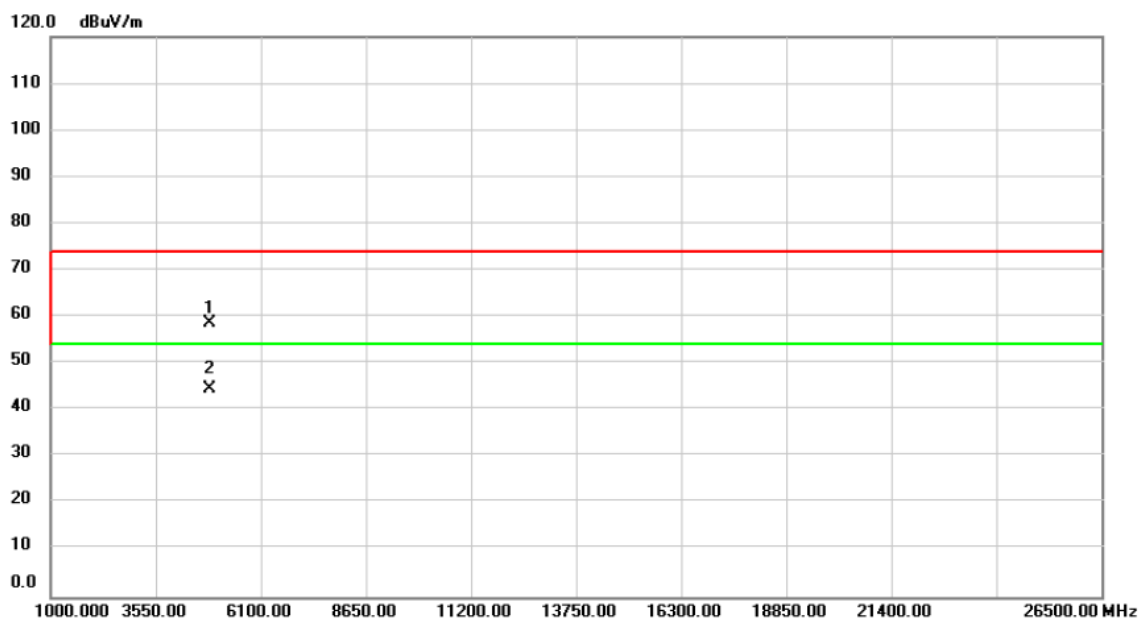

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	69.91	-11.29	58.62	74.00	-15.38	peak	
2	*	4874.000	55.79	-11.29	44.50	54.00	-9.50	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2437MHz


Horizontal

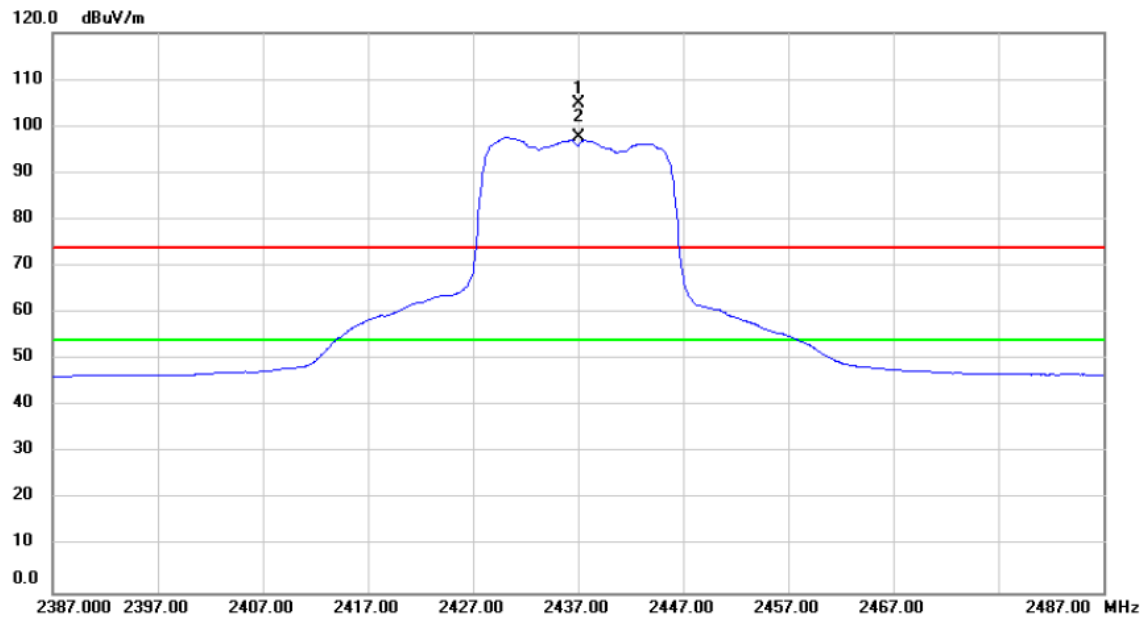

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2437.000	73.61	31.23	104.84	74.00	30.84	peak	No Limit
2	*	2437.000	66.31	31.23	97.54	54.00	43.54	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2437MHz


Horizontal

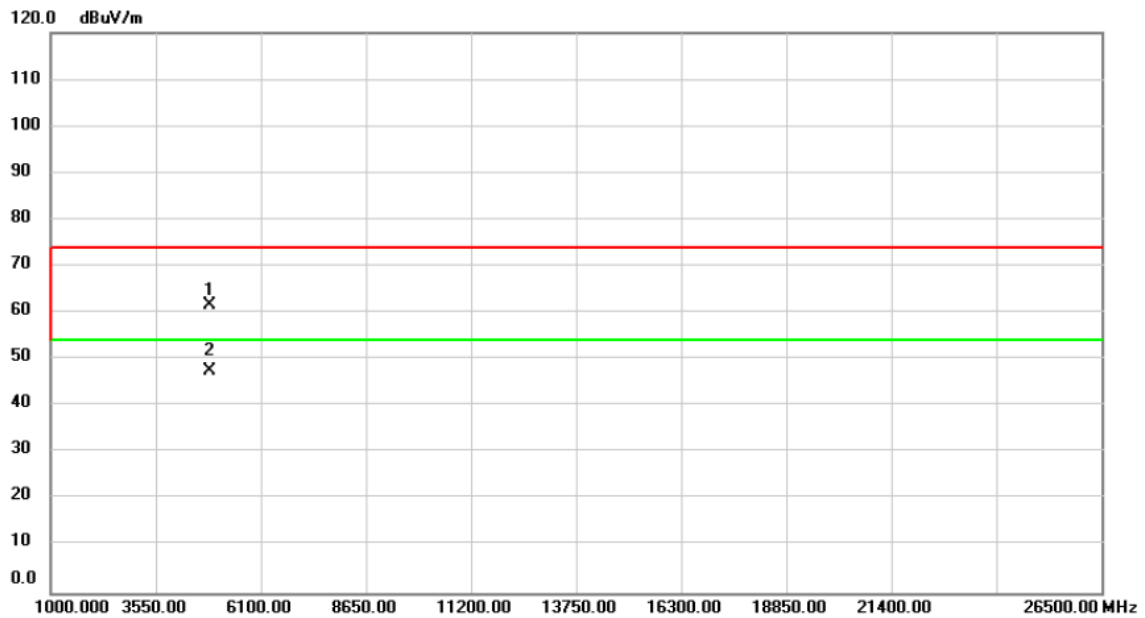

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	72.87	-11.29	61.58	74.00	-12.42	peak	
2 *	4874.000	58.72	-11.29	47.43	54.00	-6.57	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2462MHz


Vertical

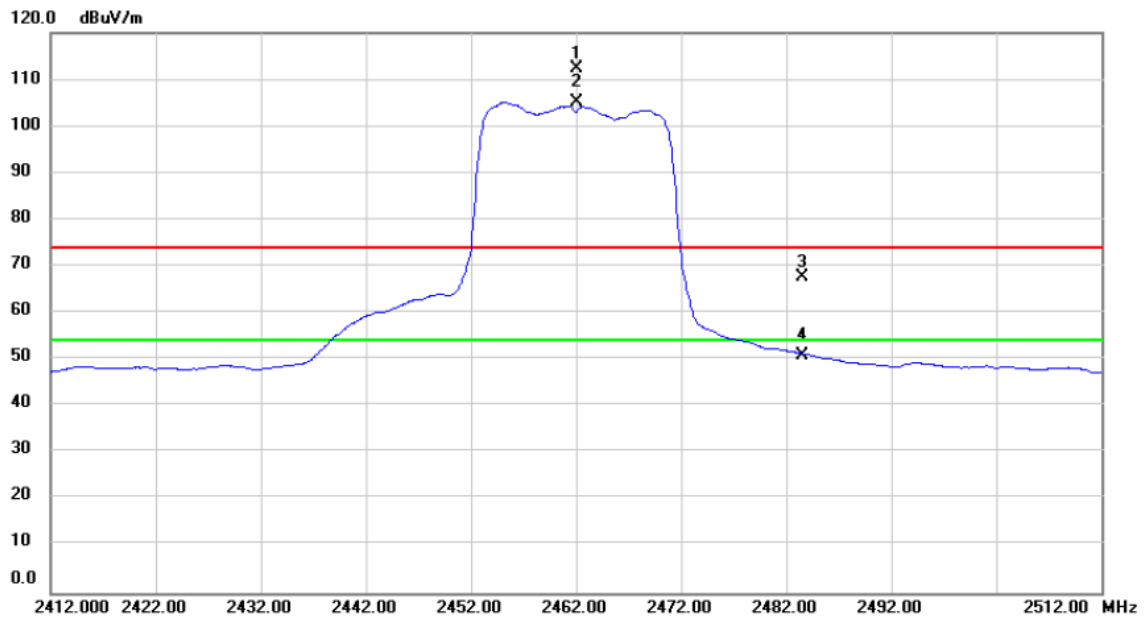

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	81.01	31.33	112.34	74.00	38.34	peak	No Limit
2	*	2462.000	73.76	31.33	105.09	54.00	51.09	AVG	No Limit
3		2483.500	36.26	31.41	67.67	74.00	-6.33	peak	
4		2483.500	19.47	31.41	50.88	54.00	-3.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2462MHz


Vertical

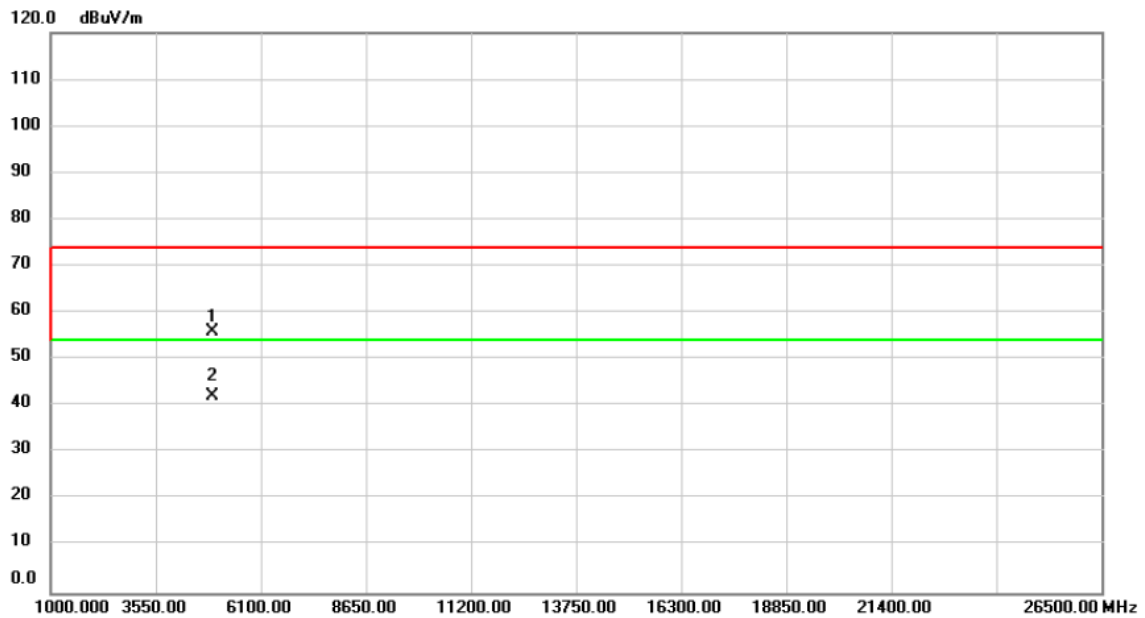

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	67.29	-11.22	56.07	74.00	-17.93	peak	
2	*	4924.000	53.49	-11.22	42.27	54.00	-11.73	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2462MHz


Horizontal

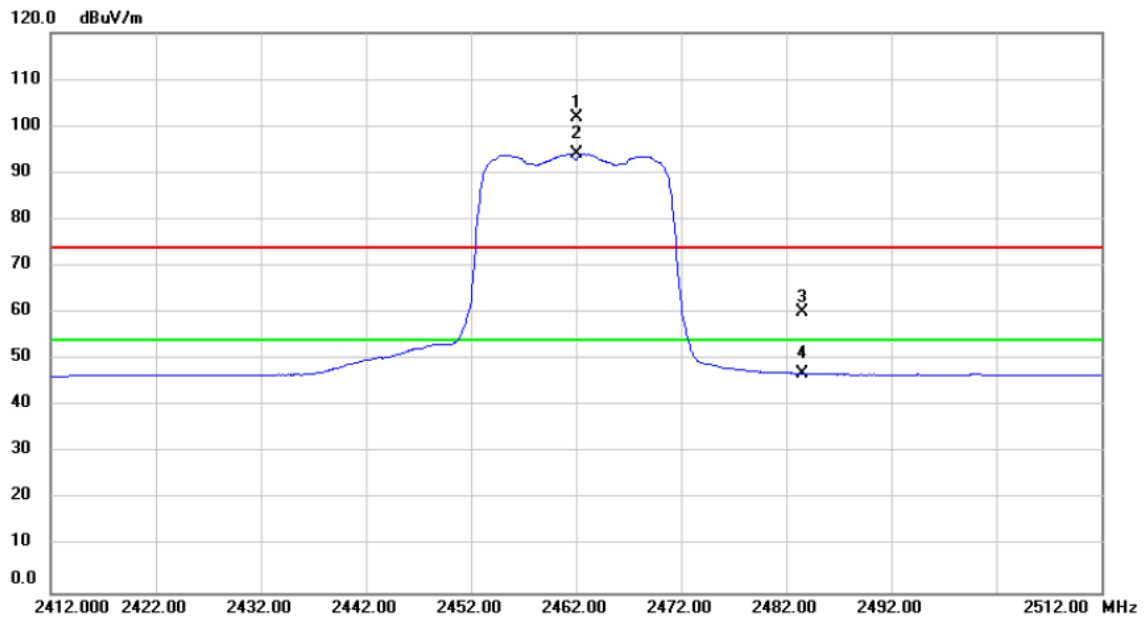

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	70.60	31.33	101.93	74.00	27.93	peak	No Limit
2	*	2462.000	62.86	31.33	94.19	54.00	40.19	AVG	No Limit
3		2483.566	28.67	31.41	60.08	74.00	-13.92	peak	
4		2483.566	15.62	31.41	47.03	54.00	-6.97	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2462MHz


Horizontal

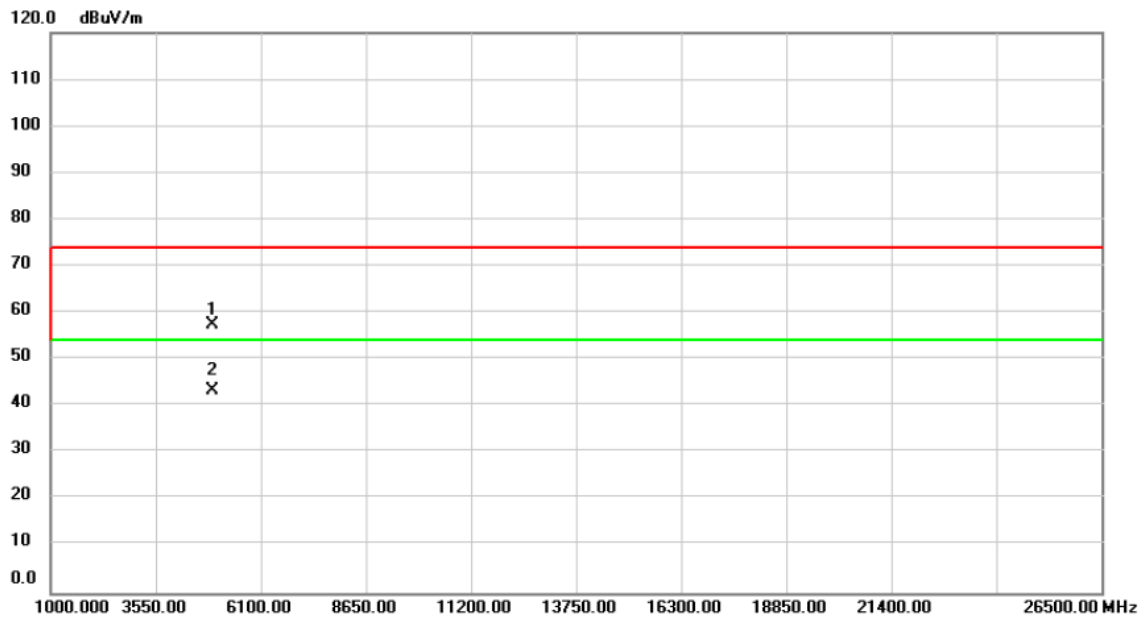

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	68.57	-11.22	57.35	74.00	-16.65	peak	
2	*	4924.000	54.45	-11.22	43.23	54.00	-10.77	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2422MHz


Vertical

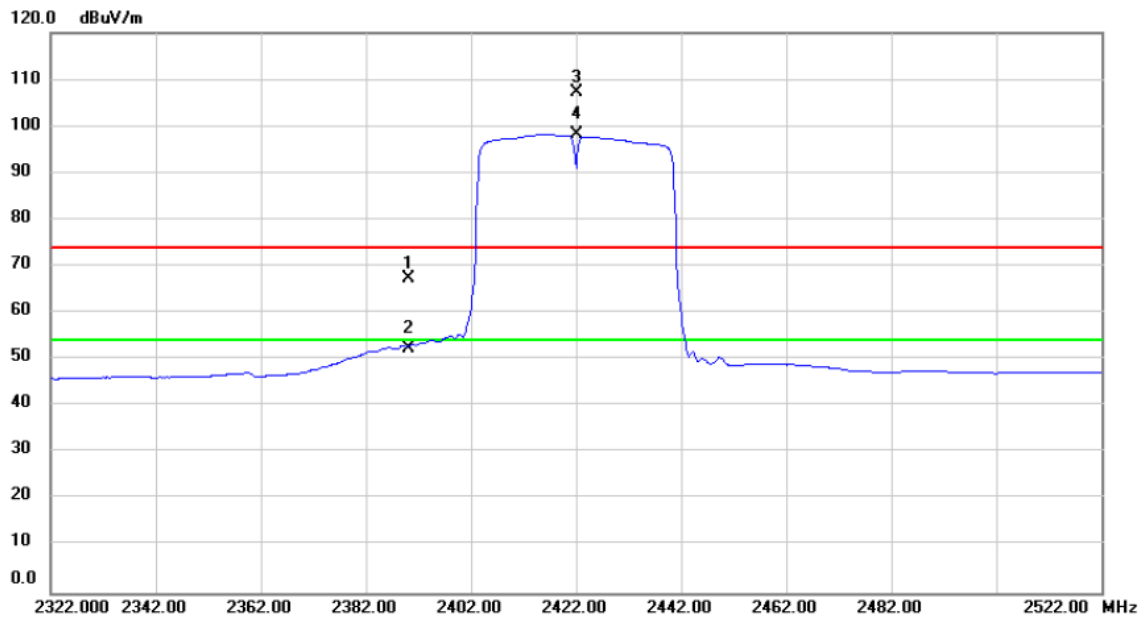

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	36.18	31.06	67.24	74.00	-6.76	peak	
2		2390.000	21.43	31.06	52.49	54.00	-1.51	AVG	
3	X	2422.000	75.93	31.18	107.11	74.00	33.11	peak	No Limit
4	*	2422.000	67.08	31.18	98.26	54.00	44.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2422MHz


Vertical

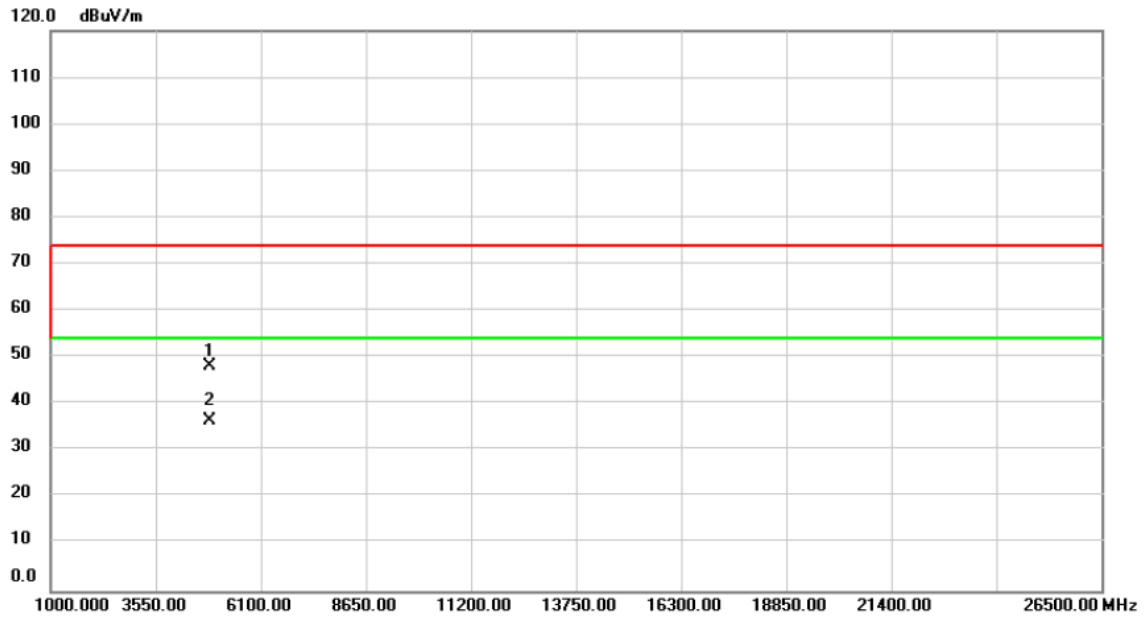

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4844.000	59.35	-11.34	48.01	74.00	-25.99	peak	
2	*	4844.000	47.72	-11.34	36.38	54.00	-17.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2422MHz


Horizontal

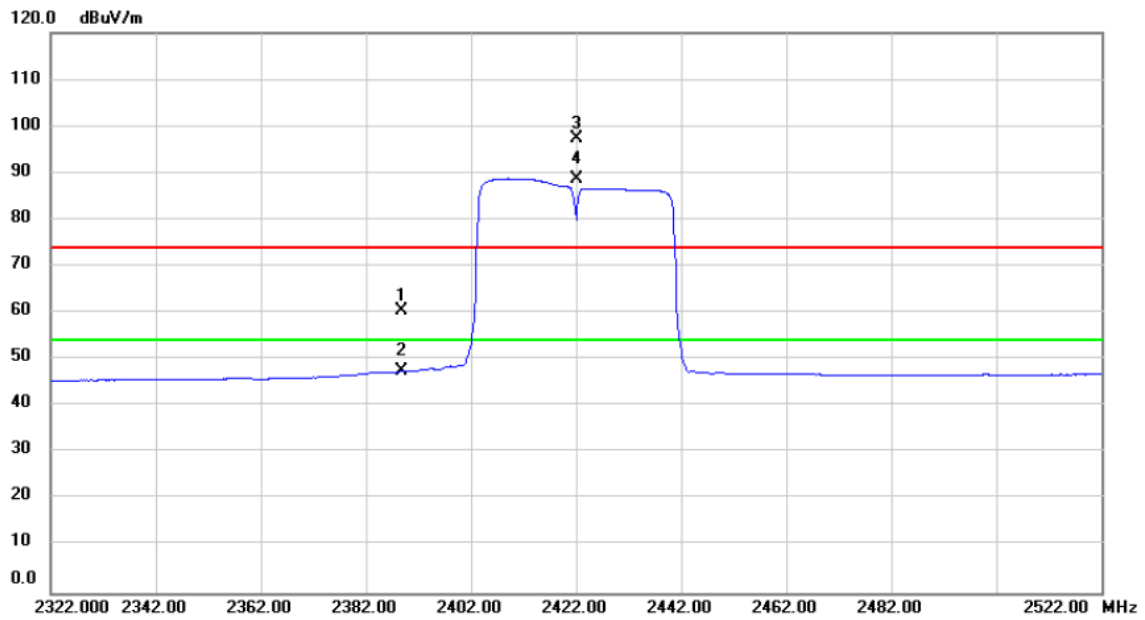

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.912	29.46	31.06	60.52	74.00	-13.48	peak	
2		2388.912	16.51	31.06	47.57	54.00	-6.43	AVG	
3	X	2422.000	66.25	31.18	97.43	74.00	23.43	peak	No Limit
4	*	2422.000	57.62	31.18	88.80	54.00	34.80	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2422MHz


Horizontal

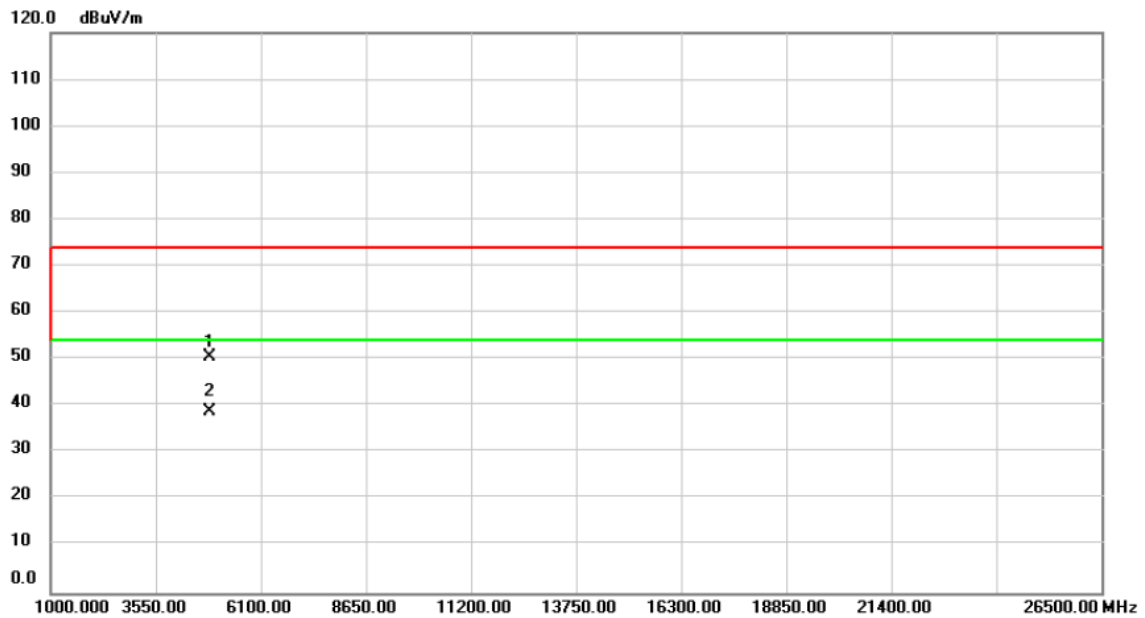

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4844.000	61.85	-11.34	50.51	74.00	-23.49	peak	
2	*	4844.000	50.09	-11.34	38.75	54.00	-15.25	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Vertical

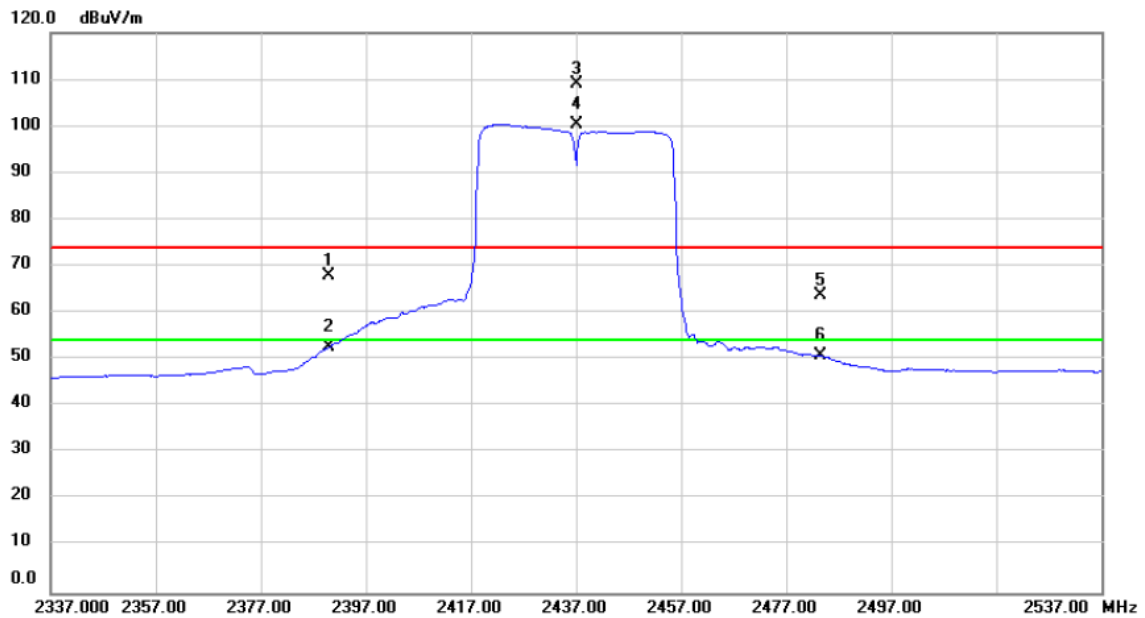

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	36.78	31.06	67.84	74.00	-6.16	peak	
2		2390.000	21.66	31.06	52.72	54.00	-1.28	AVG	
3	X	2437.000	77.97	31.23	109.20	74.00	35.20	peak	No Limit
4	*	2437.000	69.11	31.23	100.34	54.00	46.34	AVG	No Limit
5		2483.500	32.35	31.41	63.76	74.00	-10.24	peak	
6		2483.500	19.40	31.41	50.81	54.00	-3.19	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Vertical

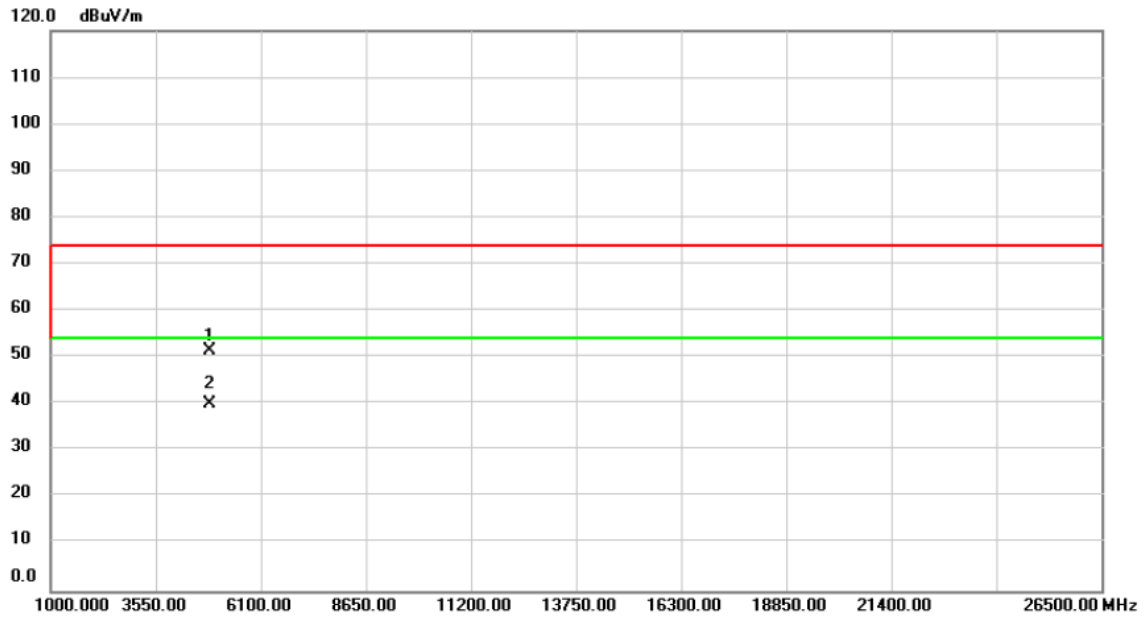

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	62.78	-11.29	51.49	74.00	-22.51	peak	
2	*	4874.000	51.38	-11.29	40.09	54.00	-13.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Horizontal

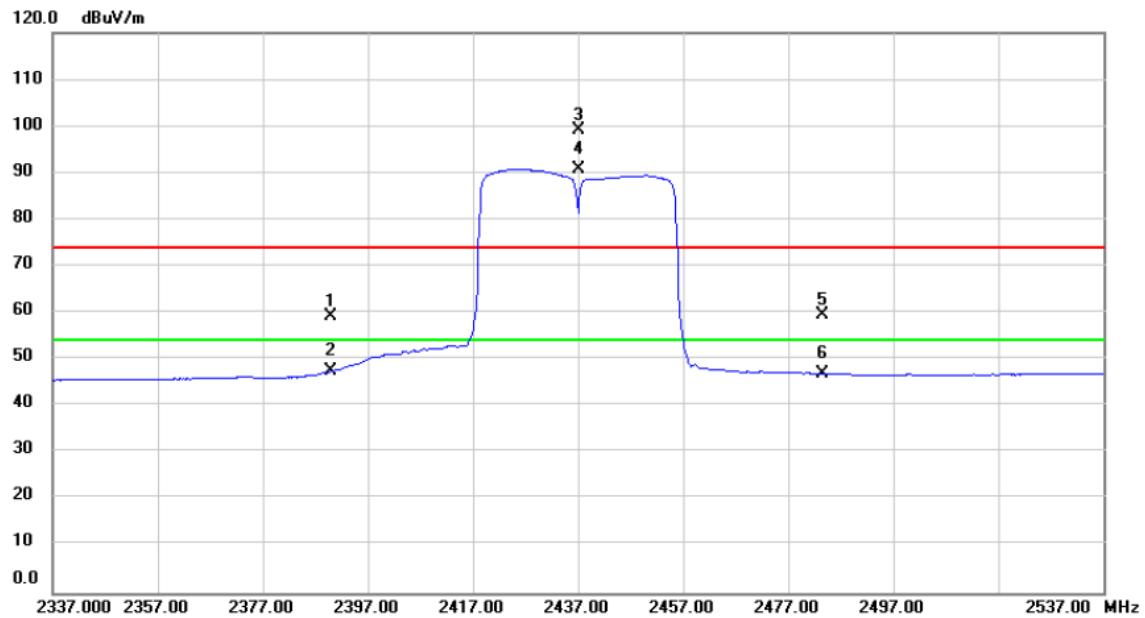

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.947	28.29	31.06	59.35	74.00	-14.65	peak	
2		2389.947	16.45	31.06	47.51	54.00	-6.49	AVG	
3	X	2437.000	68.06	31.23	99.29	74.00	25.29	peak	No Limit
4	*	2437.000	59.47	31.23	90.70	54.00	36.70	AVG	No Limit
5		2483.632	28.05	31.41	59.46	74.00	-14.54	peak	
6		2483.632	15.65	31.41	47.06	54.00	-6.94	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2437MHz


Horizontal

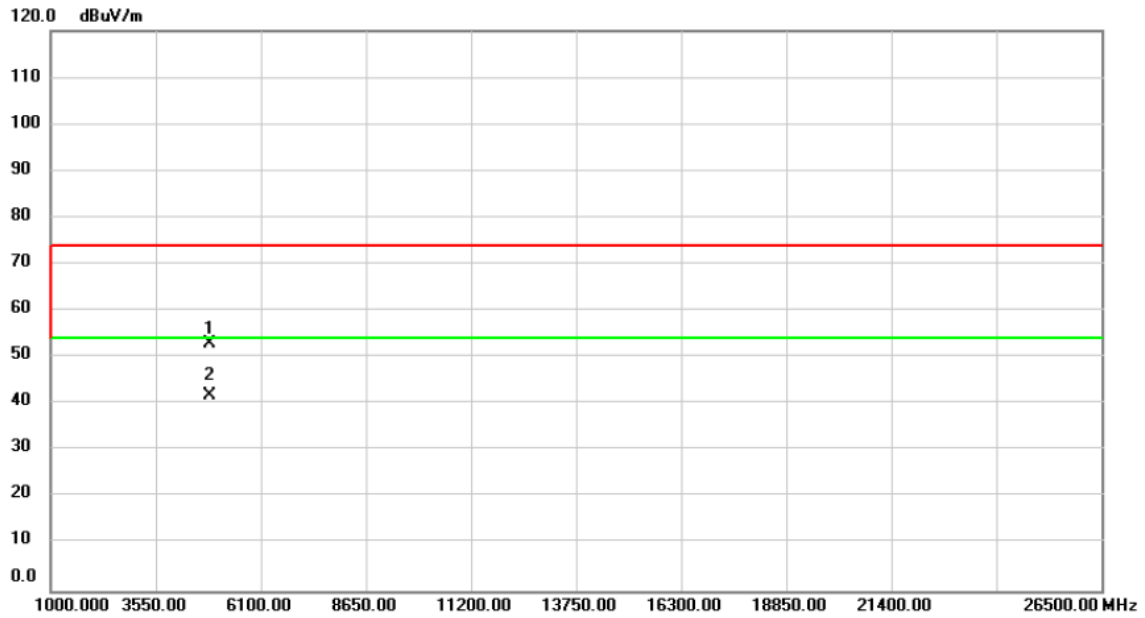

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	64.32	-11.29	53.03	74.00	-20.97	peak	
2	*	4874.000	53.06	-11.29	41.77	54.00	-12.23	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Vertical

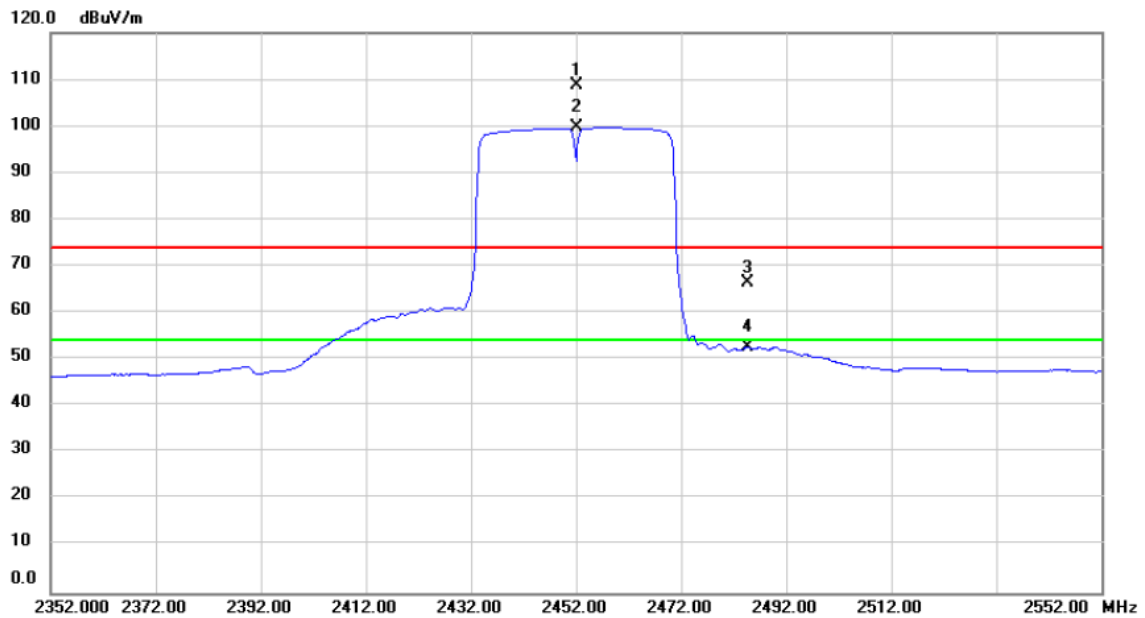

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.000	77.53	31.30	108.83	74.00	34.83	peak	No Limit
2	*	2452.000	68.50	31.30	99.80	54.00	45.80	AVG	No Limit
3		2484.606	35.04	31.42	66.46	74.00	-7.54	peak	
4		2484.606	21.26	31.42	52.68	54.00	-1.32	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Vertical

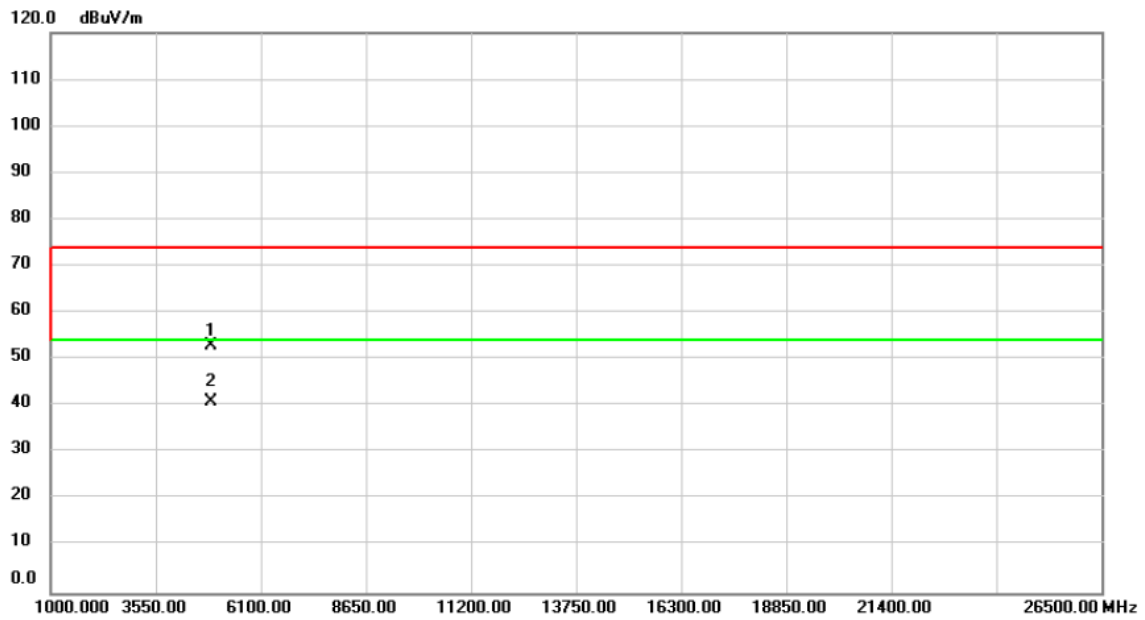

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4904.000	64.12	-11.24	52.88	74.00	-21.12	peak	
2 *	4904.000	52.17	-11.24	40.93	54.00	-13.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Horizontal

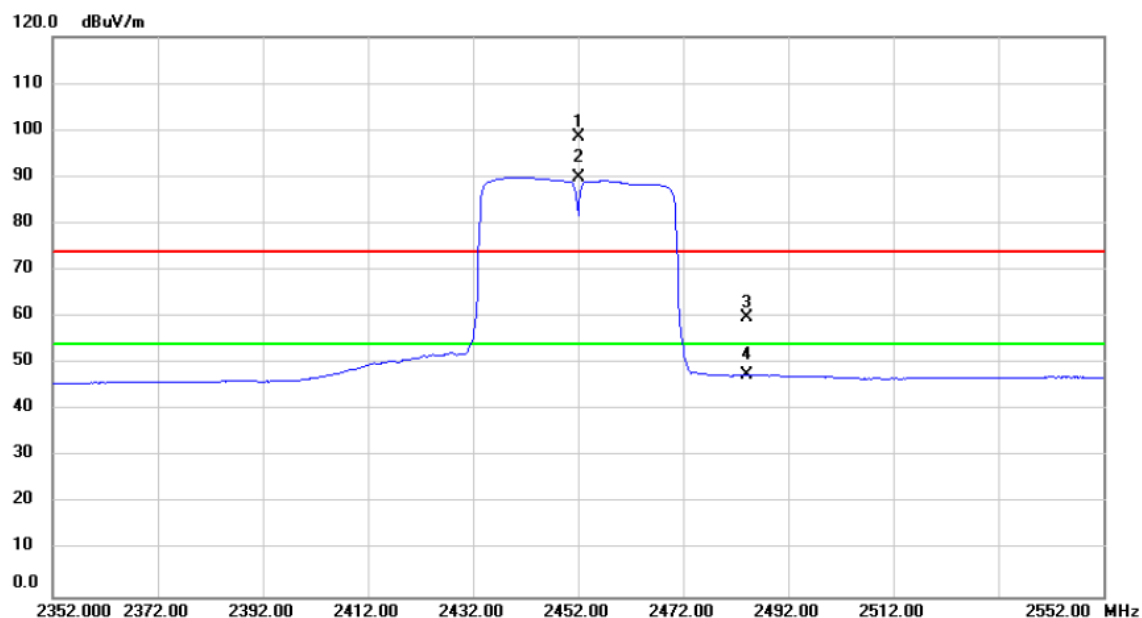

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.000	67.10	31.30	98.40	74.00	24.40	peak	No Limit
2	*	2452.000	58.59	31.30	89.89	54.00	35.89	AVG	No Limit
3		2484.177	28.54	31.42	59.96	74.00	-14.04	peak	
4		2484.177	16.17	31.42	47.59	54.00	-6.41	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2452MHz


Horizontal

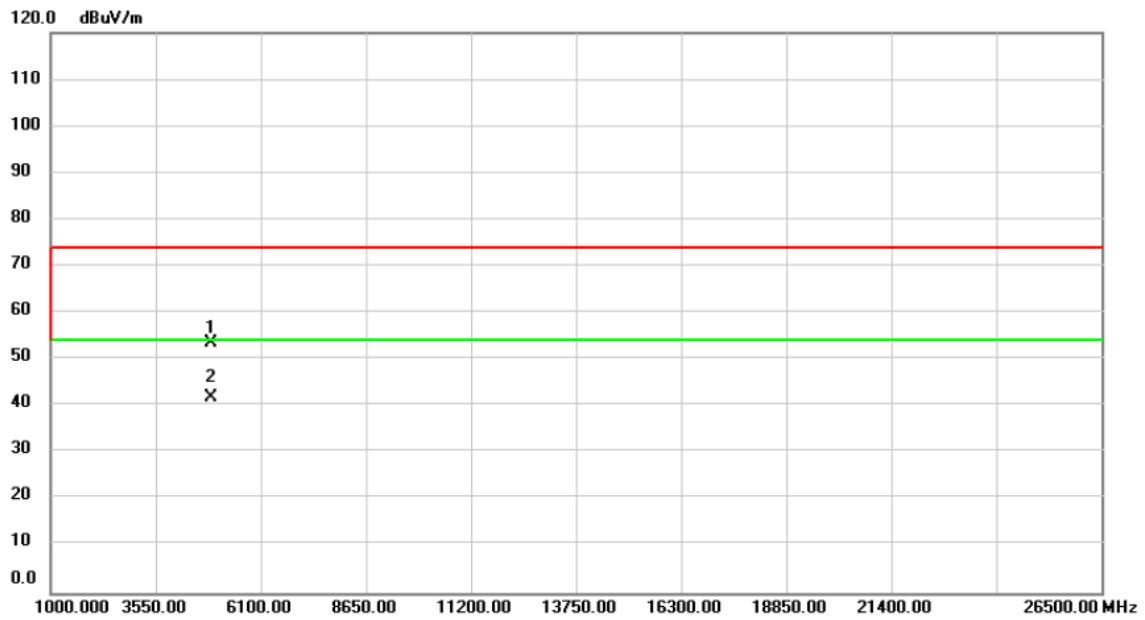

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4904.000	64.72	-11.24	53.48	74.00	-20.52	peak	
2	*	4904.000	52.94	-11.24	41.70	54.00	-12.30	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz(Beamforming)_Co-location


Vertical

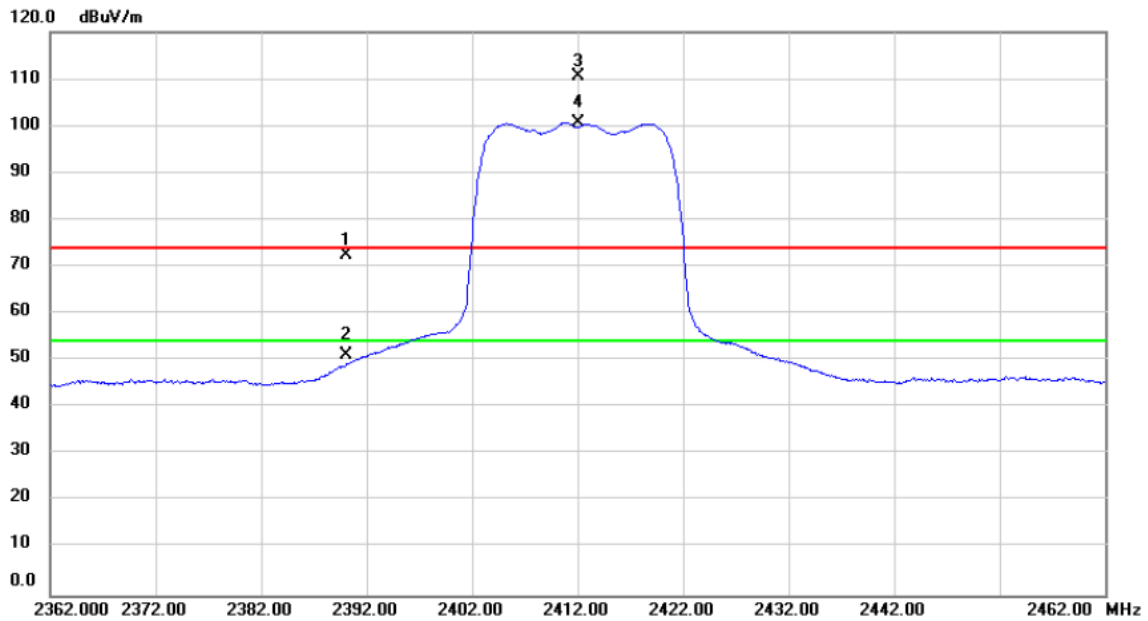

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	41.37	31.06	72.43	74.00	-1.57	peak	
2		2390.000	20.11	31.06	51.17	54.00	-2.83	AVG	
3	X	2412.000	79.42	31.14	110.56	74.00	36.56	peak	No Limit
4	*	2412.000	69.49	31.14	100.63	54.00	46.63	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX A Mode 5180MHz_Co-location


Vertical

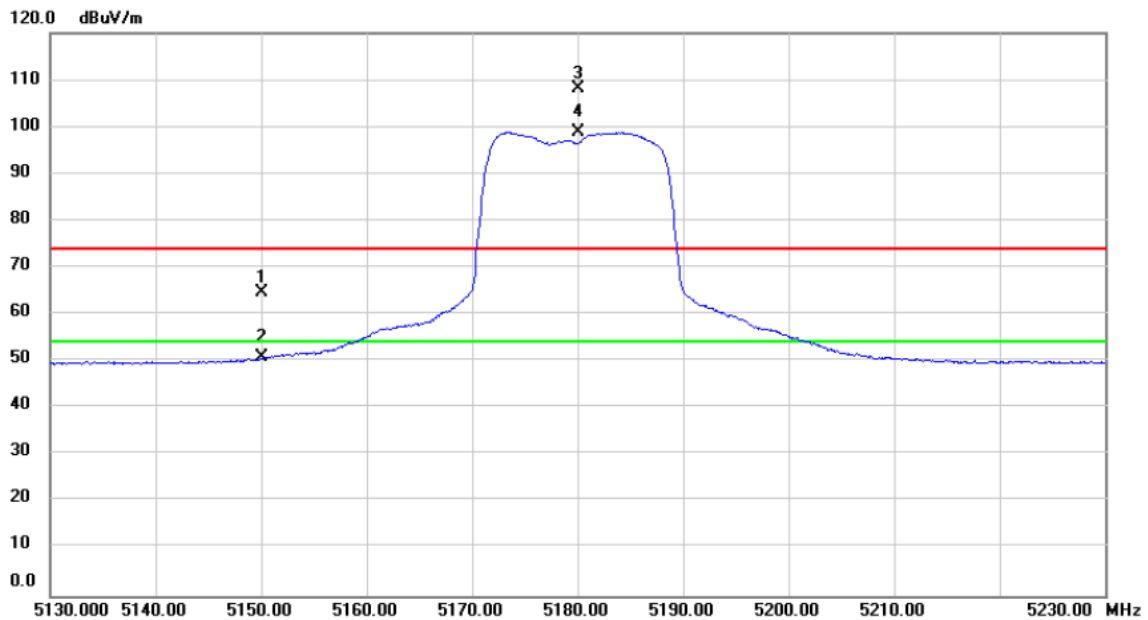

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	27.14	37.54	64.68	74.00	-9.32	peak	
2		5150.000	13.36	37.54	50.90	54.00	-3.10	AVG	
3	X	5180.000	70.55	37.58	108.13	74.00	34.13	peak	No Limit
4	*	5180.000	61.36	37.58	98.94	54.00	44.94	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz(Beamforming) & TX A Mode 5180MHz_Co-location


Vertical

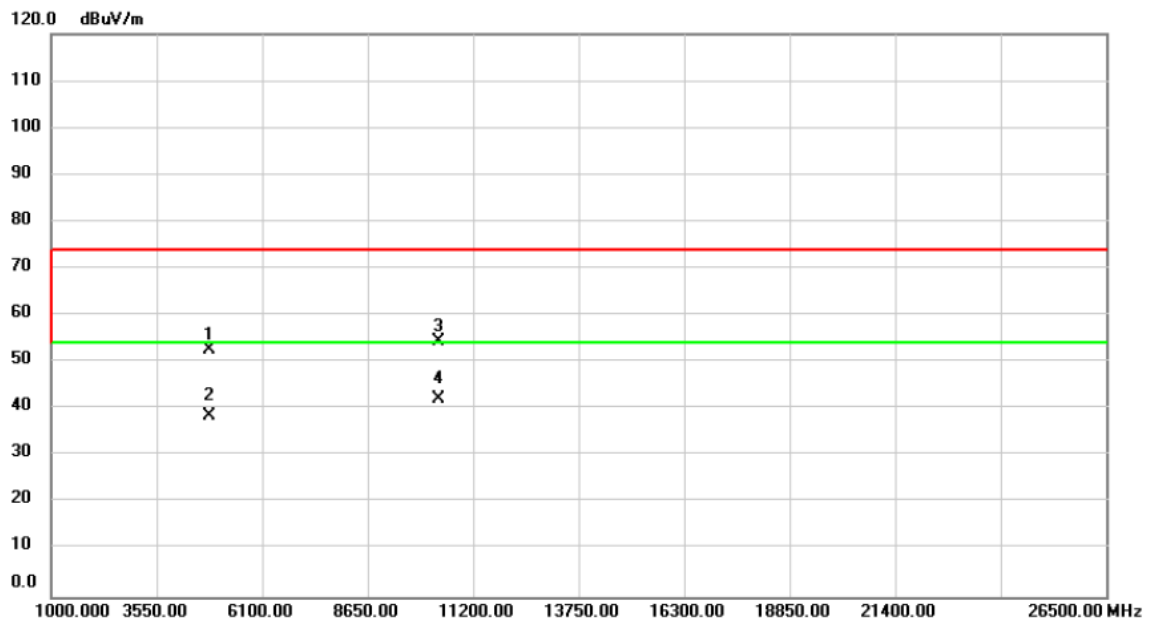

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	64.15	-11.37	52.78	74.00	-21.22	peak	
2		4824.000	49.88	-11.37	38.51	54.00	-15.49	AVG	
3		10360.00	52.64	1.92	54.56	74.00	-19.44	peak	
4	*	10360.00	40.26	1.92	42.18	54.00	-11.82	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz(Beamforming)_Co-location


Horizontal

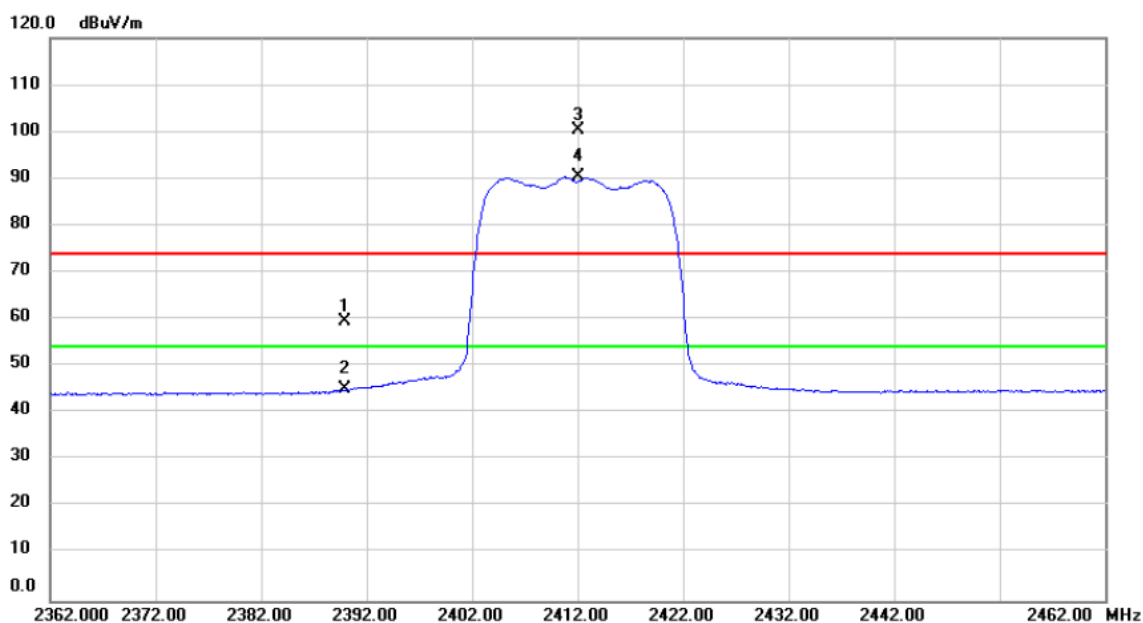

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.972	28.52	31.06	59.58	74.00	-14.42	peak	
2		2389.972	14.02	31.06	45.08	54.00	-8.92	AVG	
3	X	2412.000	69.26	31.14	100.40	74.00	26.40	peak	No Limit
4	*	2412.000	59.20	31.14	90.34	54.00	36.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX A Mode 5180MHz_Co-location


Horizontal

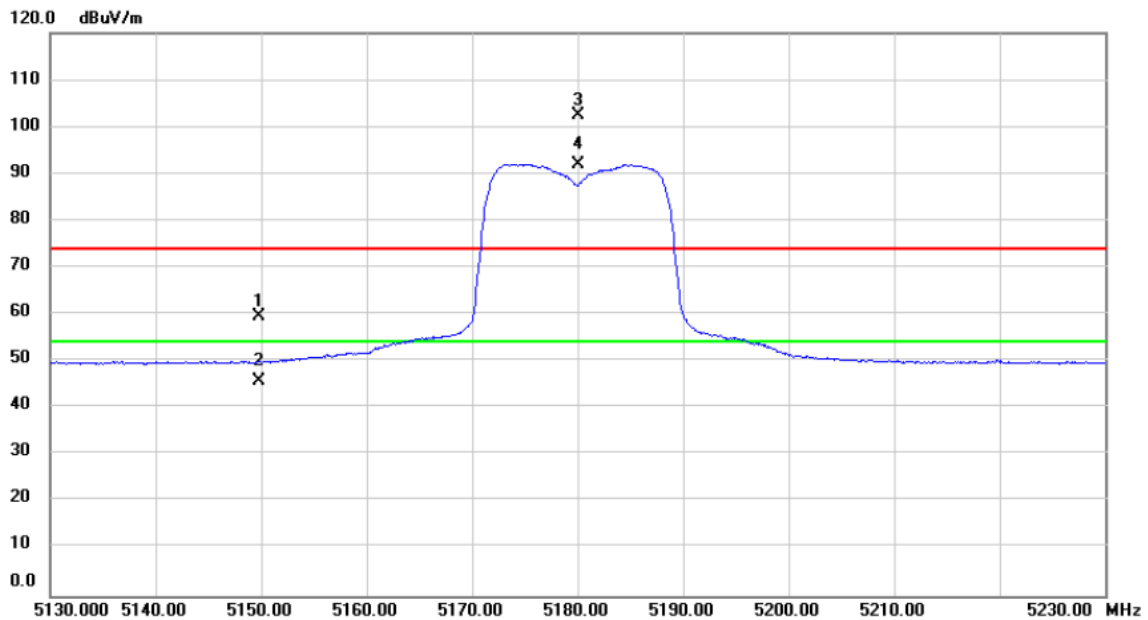

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.820	22.10	37.54	59.64	74.00	-14.36	peak	
2		5149.820	8.27	37.54	45.81	54.00	-8.19	AVG	
3	X	5180.000	64.83	37.58	102.41	74.00	28.41	peak	No Limit
4	*	5180.000	54.46	37.58	92.04	54.00	38.04	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2412MHz(Beamforming) & TX A Mode 5180MHz_Co-location

Horizontal

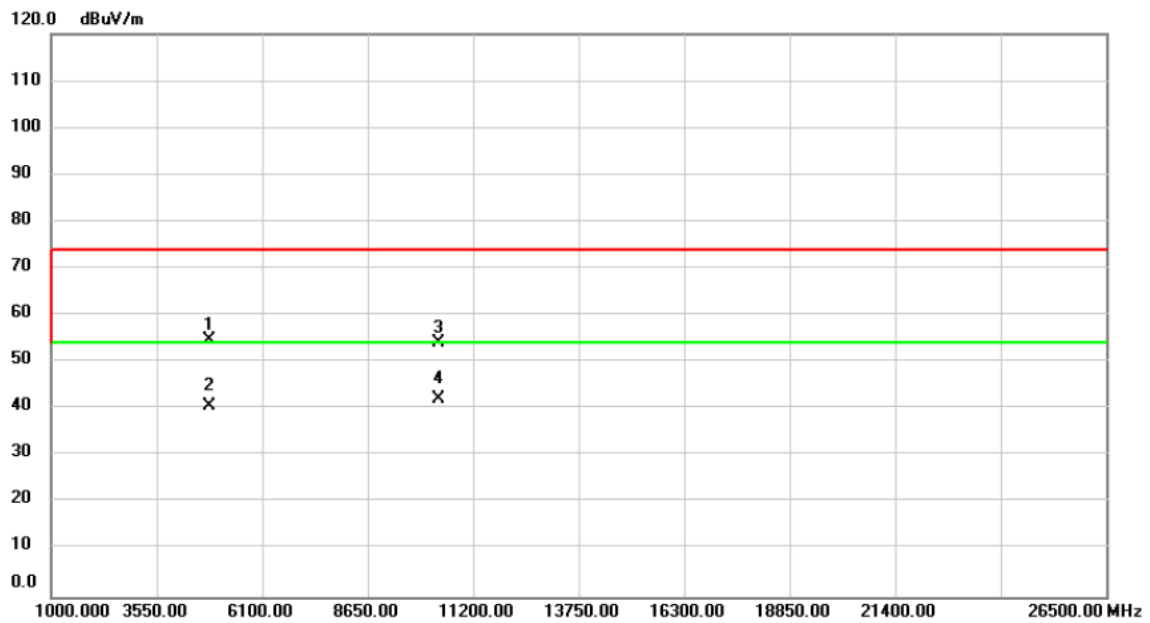

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	66.25	-11.37	54.88	74.00	-19.12	peak	
2		4824.000	51.92	-11.37	40.55	54.00	-13.45	AVG	
3		10360.00	52.24	1.92	54.16	74.00	-19.84	peak	
4	*	10360.00	40.14	1.92	42.06	54.00	-11.94	AVG	


ATTACHMENT E - BANDWIDTH

Non-Beamforming

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.09	14.8	500	Complies
2437	10.10	14.8	500	Complies
2462	10.10	14.8	500	Complies

TX CH01

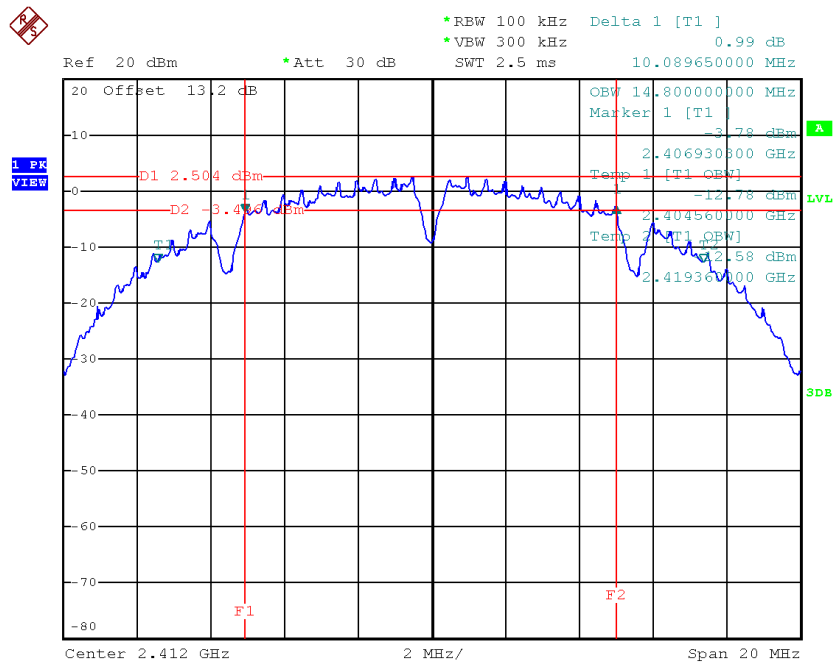


Date: 11.MAY.2017 12:22:14

TX CH06

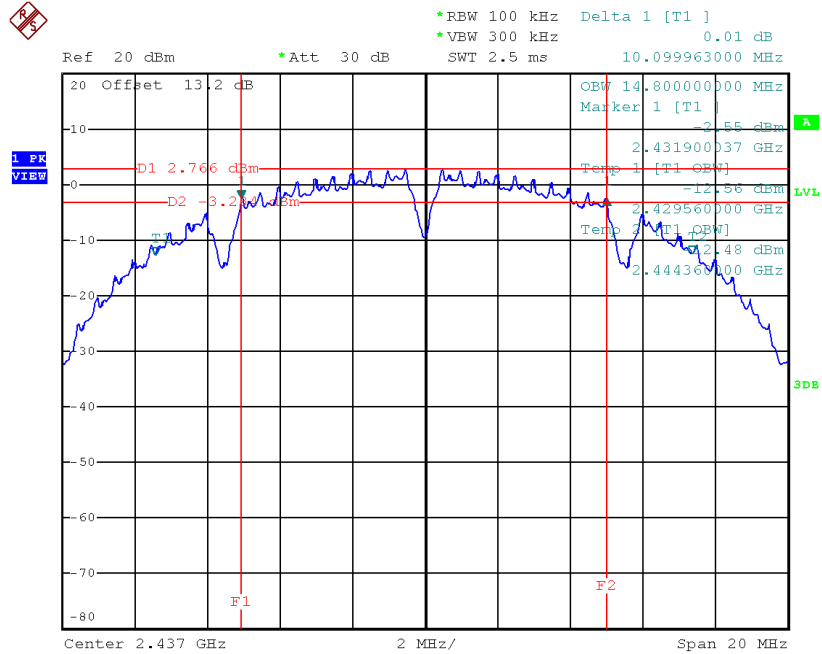

Date: 11.MAY.2017 12:26:57

TX CH11

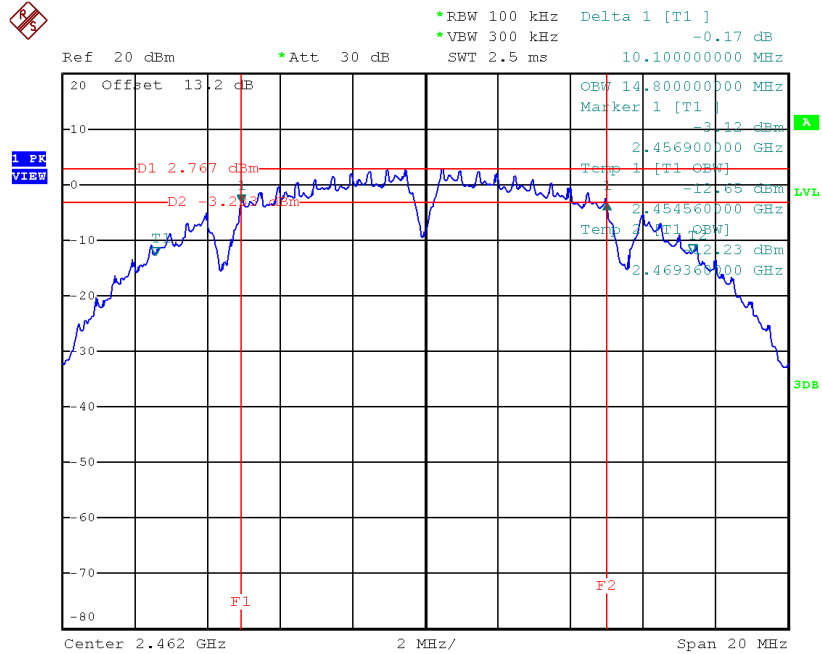


Date: 11.MAY.2017 12:29:57

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.57	16.44	500	Complies
2437	16.57	16.48	500	Complies
2462	16.58	16.40	500	Complies

TX CH01

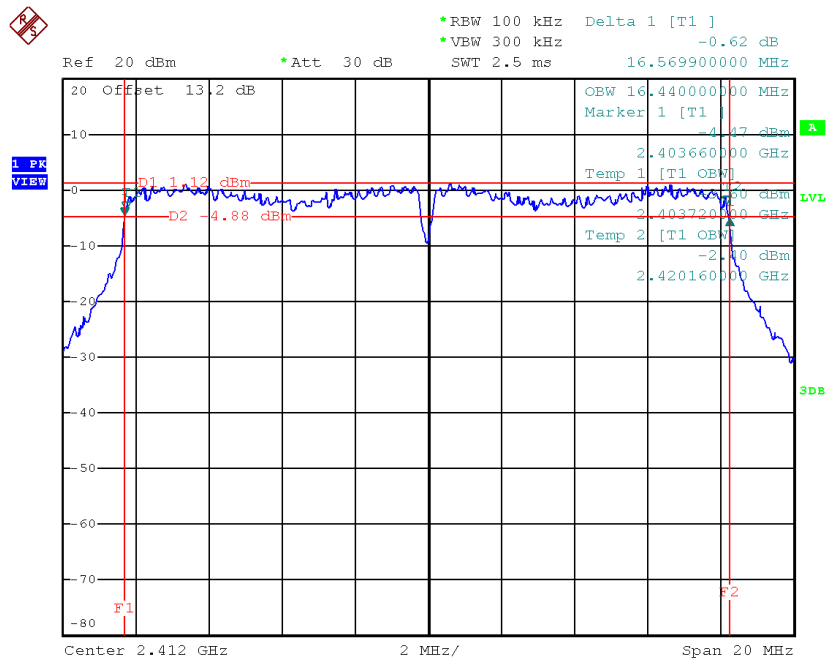


Date: 11.MAY.2017 12:35:15

TX CH06

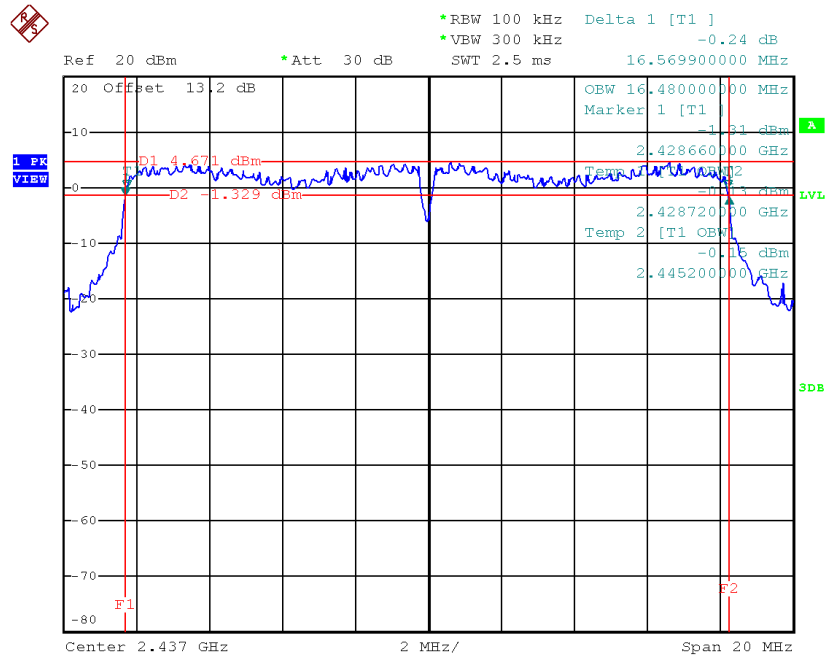

Date: 11.MAY.2017 12:40:00

TX CH11

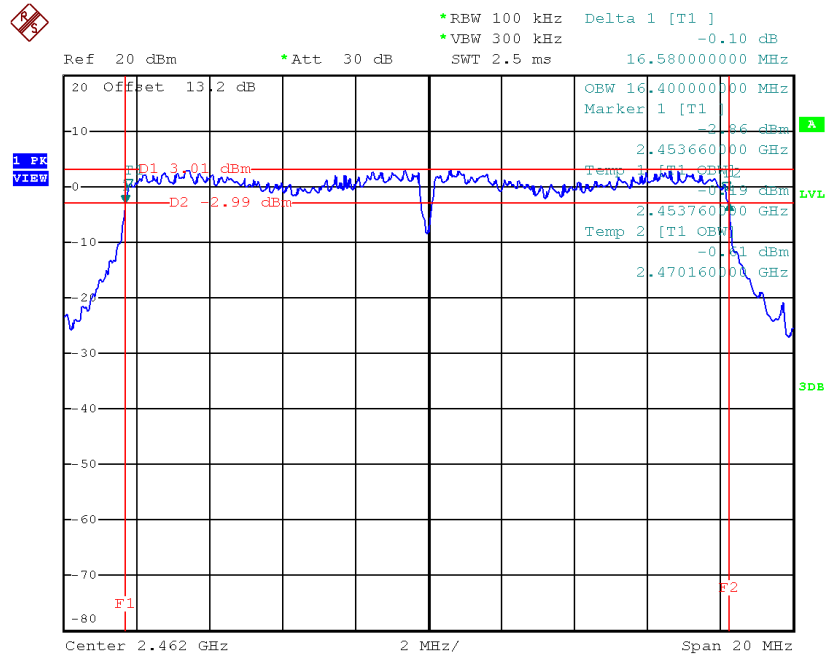


Date: 11.MAY.2017 12:43:45

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.66	17.56	500	Complies
2437	17.63	17.56	500	Complies
2462	17.65	17.56	500	Complies

TX CH01

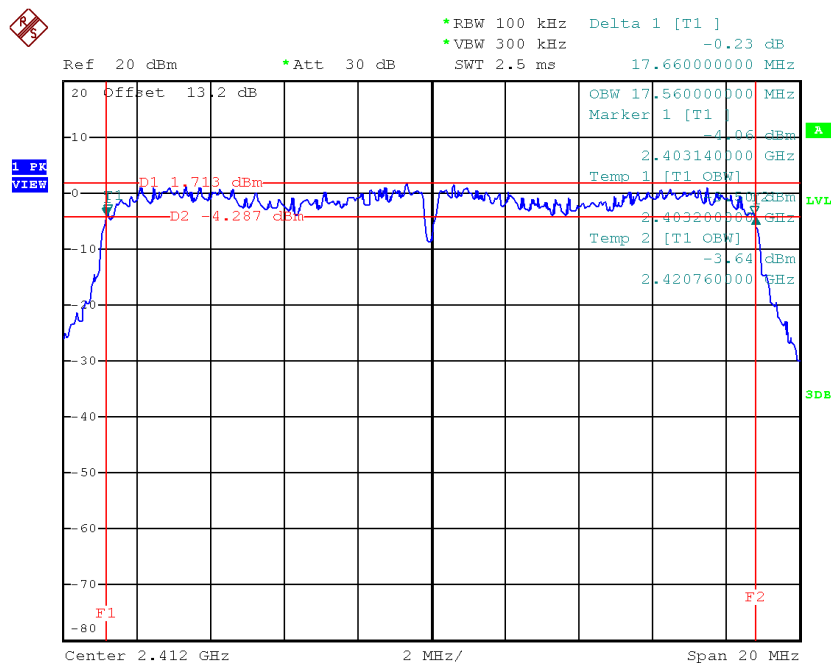


Date: 11.MAY.2017 12:56:42

TX CH06

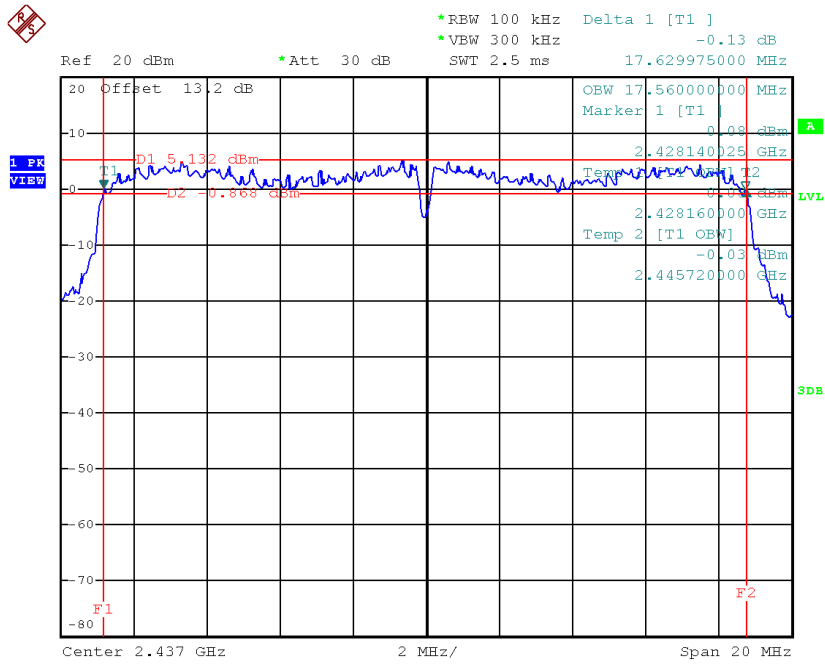

Date: 11.MAY.2017 13:01:55

TX CH11

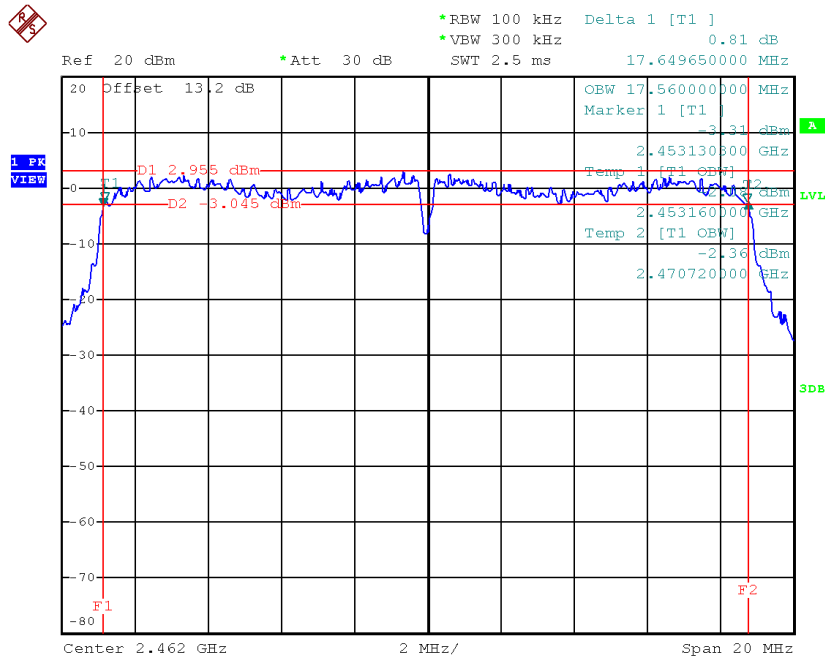


Date: 11.MAY.2017 13:04:50

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.47	36.08	500	Complies
2437	36.47	36.16	500	Complies
2452	36.52	36.16	500	Complies

TX CH03

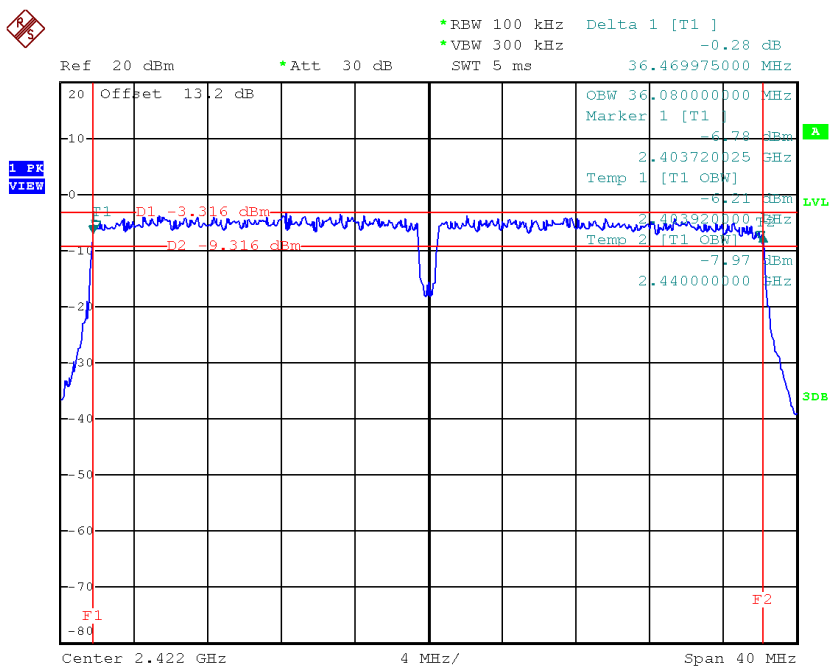


Date: 11.MAY.2017 15:21:49

TX CH06

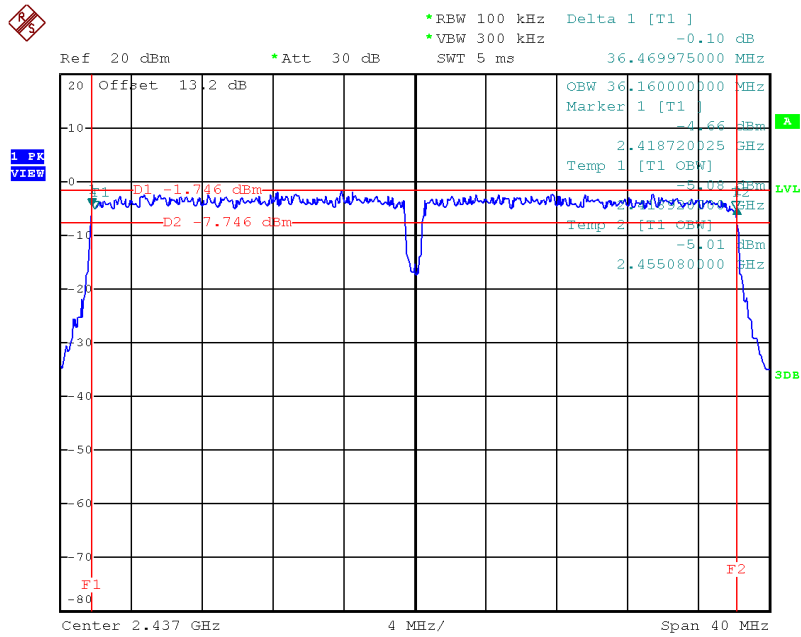



Date: 11.MAY.2017 15:25:46

TX CH09

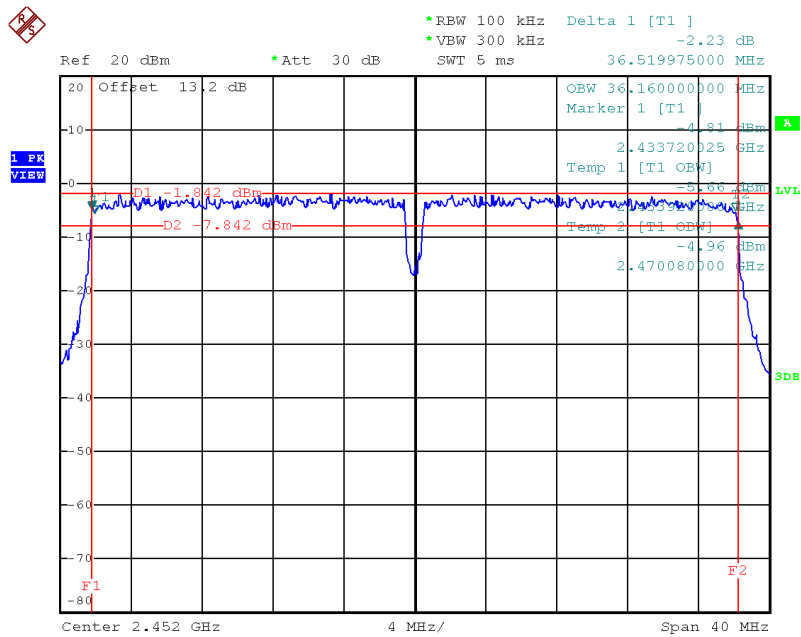


Date: 11.MAY.2017 15:28:13

Test Mode : TX N-20MHz Mode_CH01/06/11

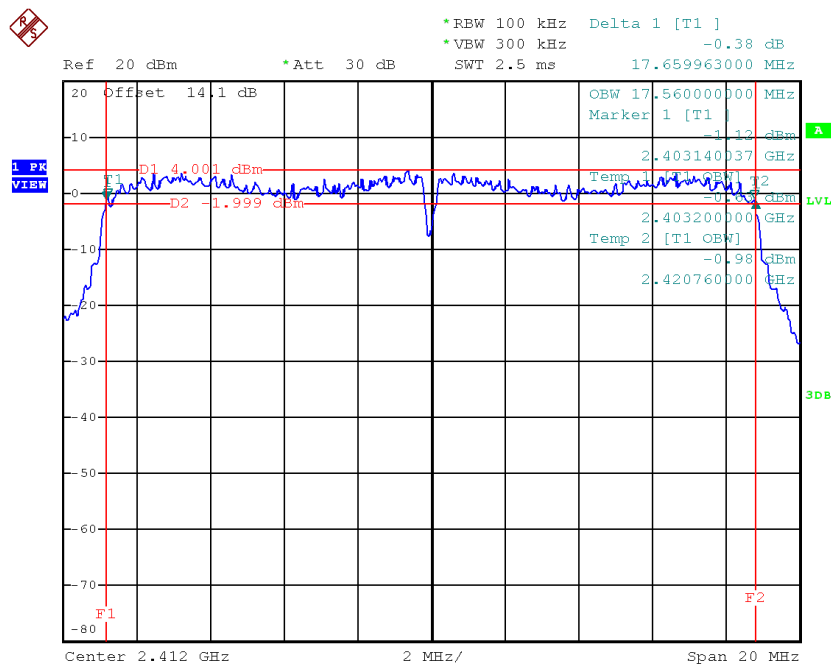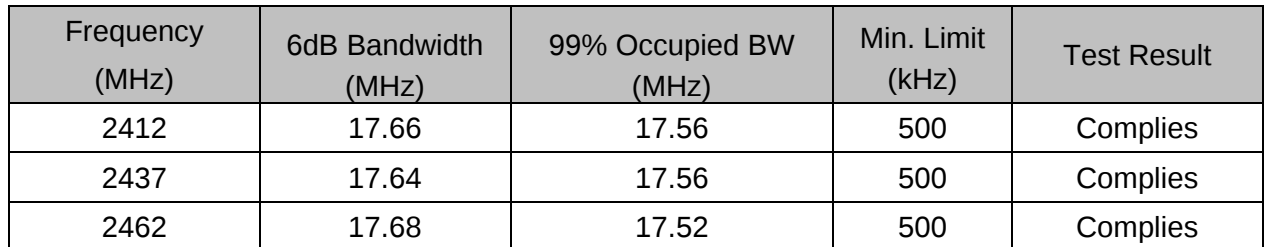


TX CH06

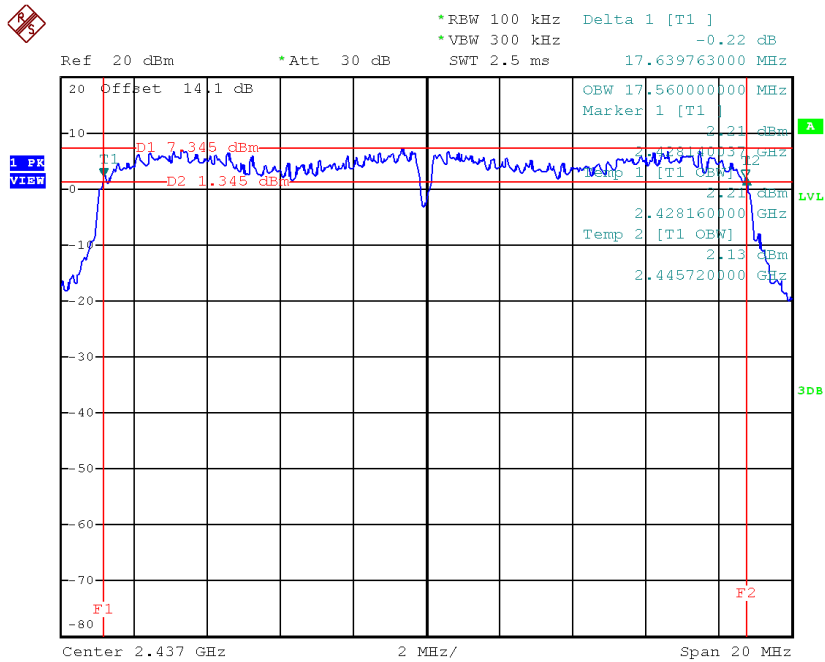

Date: 26.MAY.2017 16:53:24

TX CH11

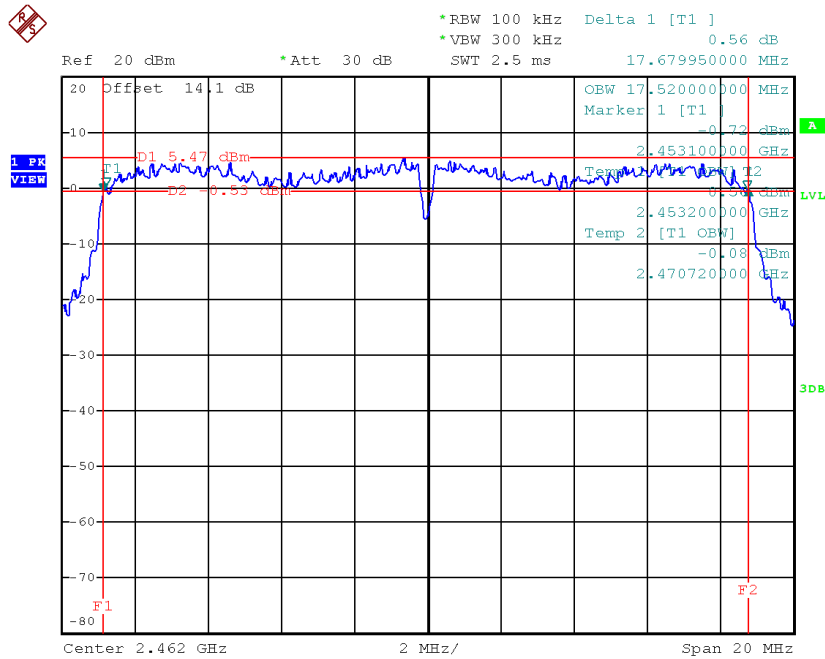


Date: 26.MAY.2017 16:54:55

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.50	36.16	500	Complies
2437	36.48	36.24	500	Complies
2452	36.57	36.16	500	Complies

TX CH03

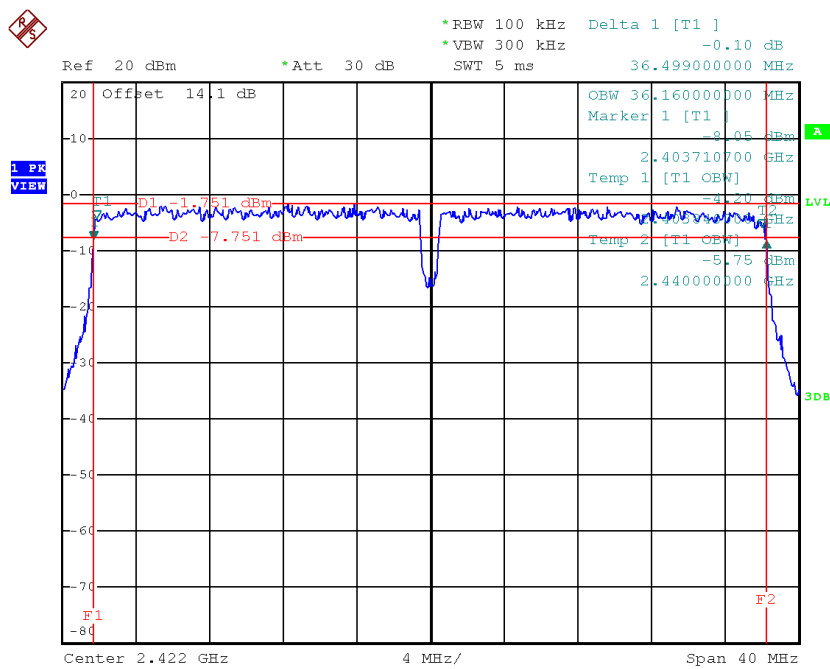


Date: 26.MAY.2017 17:00:26

TX CH06

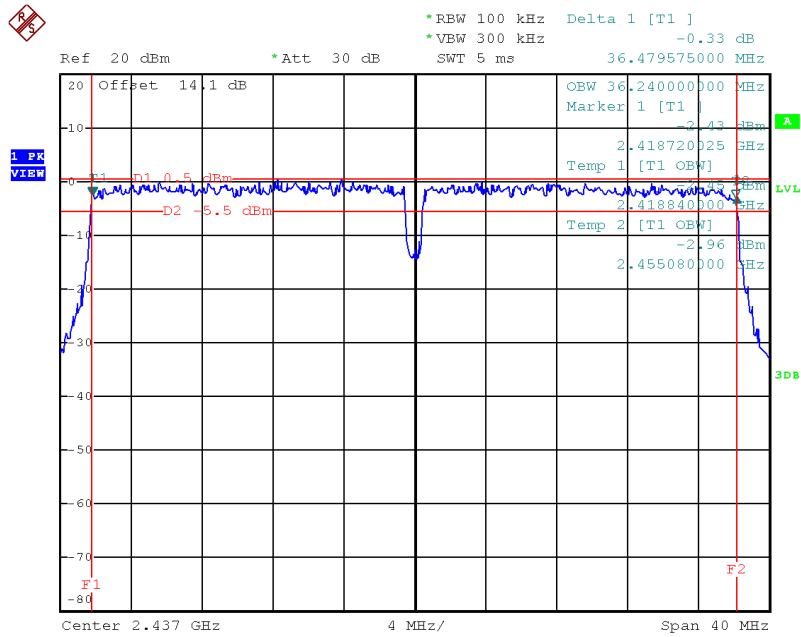

Date: 26.MAY.2017 17:03:59

TX CH09

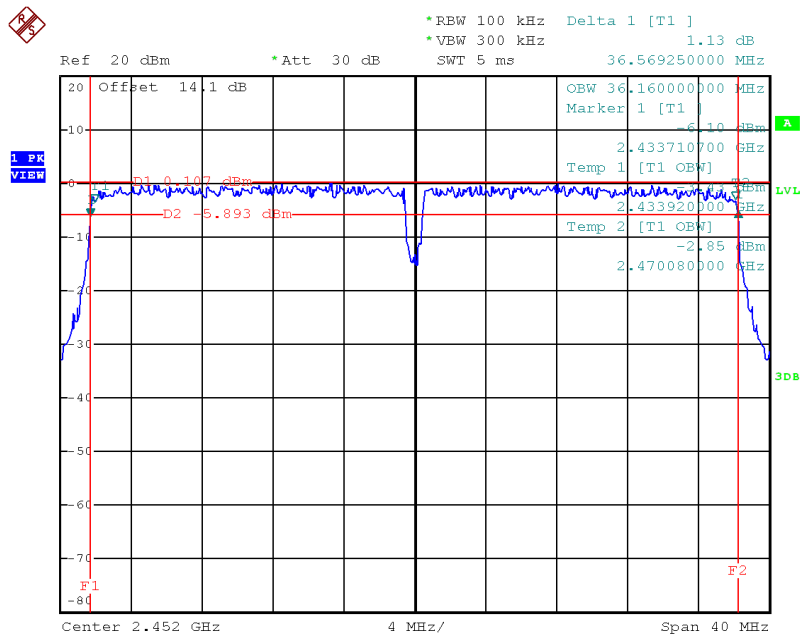

Date: 26.MAY.2017 17:06:02

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Non-Beamforming

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.40	0.04	30.00	1.00	Complies
2437	16.53	0.04	30.00	1.00	Complies
2462	16.40	0.04	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.06	0.05	30.00	1.00	Complies
2437	17.01	0.05	30.00	1.00	Complies
2462	16.77	0.05	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.75	0.09	30.00	1.00	Complies
2437	19.79	0.10	30.00	1.00	Complies
2462	19.60	0.09	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.61	0.29	30.00	1.00	Complies
2437	26.18	0.41	30.00	1.00	Complies
2462	25.77	0.38	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.49	0.35	30.00	1.00	Complies
2437	26.92	0.49	30.00	1.00	Complies
2462	26.60	0.46	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	28.08	0.64	30.00	1.00	Complies
2437	29.58	0.91	30.00	1.00	Complies
2462	29.22	0.83	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.17	0.26	30.00	1.00	Complies
2437	26.05	0.40	30.00	1.00	Complies
2462	25.13	0.33	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.02	0.32	30.00	1.00	Complies
2437	26.78	0.48	30.00	1.00	Complies
2462	25.95	0.39	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	27.63	0.58	30.00	1.00	Complies
2437	29.44	0.88	30.00	1.00	Complies
2462	28.57	0.72	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	23.06	0.20	30.00	1.00	Complies
2437	24.61	0.29	30.00	1.00	Complies
2452	24.50	0.28	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	23.77	0.24	30.00	1.00	Complies
2437	25.27	0.34	30.00	1.00	Complies
2452	25.12	0.33	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	26.44	0.44	30.00	1.00	Complies
2437	27.96	0.63	30.00	1.00	Complies
2452	27.83	0.61	30.00	1.00	Complies

Beamforming

Test Mode :TX N20 Mode_CH01/06/11_ANT 1

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.06	0.32	29.13	1.00	Complies
2437	25.90	0.39	29.13	1.00	Complies
2462	25.86	0.39	29.13	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.91	0.39	29.13	1.00	Complies
2437	26.30	0.43	29.13	1.00	Complies
2462	26.19	0.42	29.13	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	28.52	0.71	29.13	1.00	Complies
2437	29.12	0.82	29.13	1.00	Complies
2462	29.04	0.80	29.13	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	23.95	0.25	29.13	1.00	Complies
2437	25.50	0.35	29.13	1.00	Complies
2452	25.39	0.35	29.13	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	24.66	0.29	29.13	1.00	Complies
2437	26.16	0.41	29.13	1.00	Complies
2452	26.01	0.40	29.13	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	27.34	0.54	29.13	1.00	Complies
2437	28.86	0.77	29.13	1.00	Complies
2452	28.73	0.75	29.13	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION

Non-Beamforming


Test Mode : TX B Mode_ANT 1

TX B mode CH01

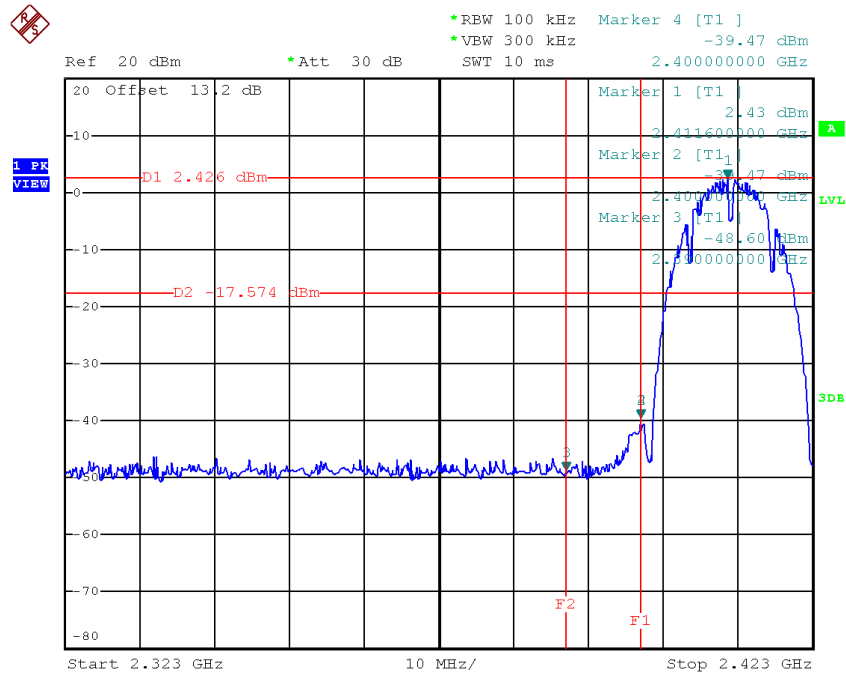


Date: 11.MAY.2017 12:23:04

TX B mode CH11

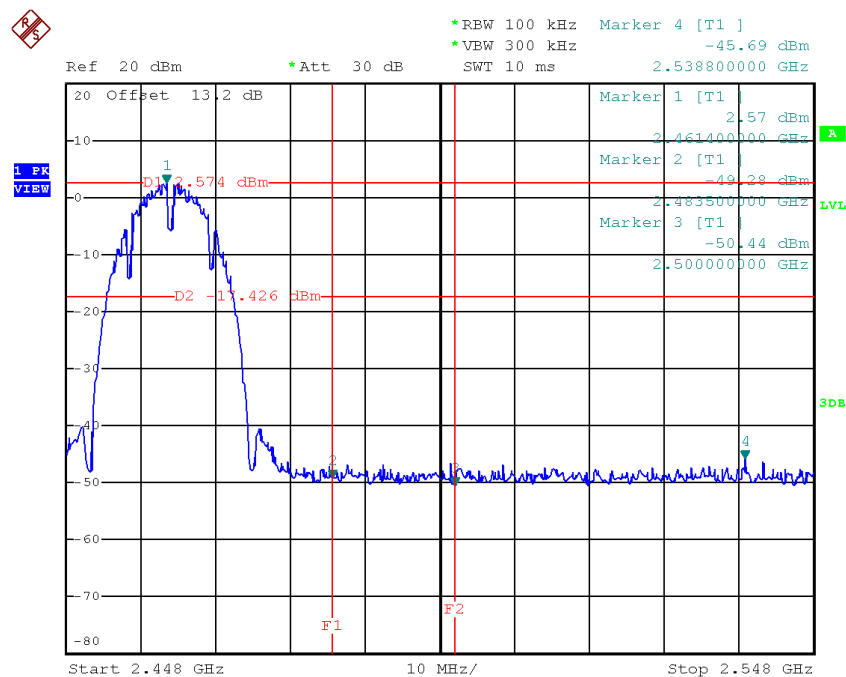


Date: 11.MAY.2017 12:30:47


TX B mode CH01 (10 Harmonic of the frequency)

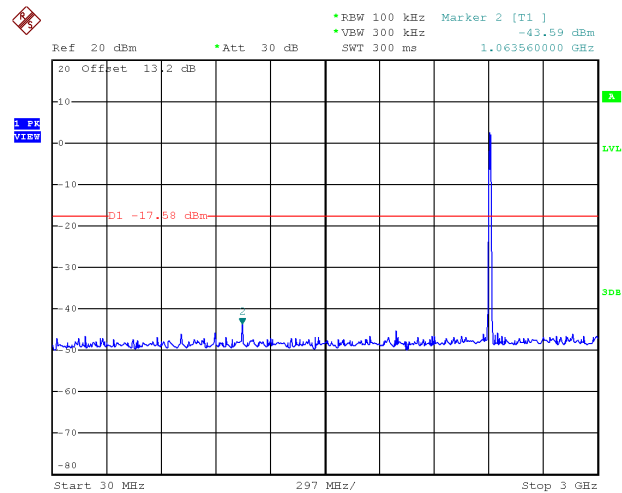

Date: 11.MAY.2017 12:22:27

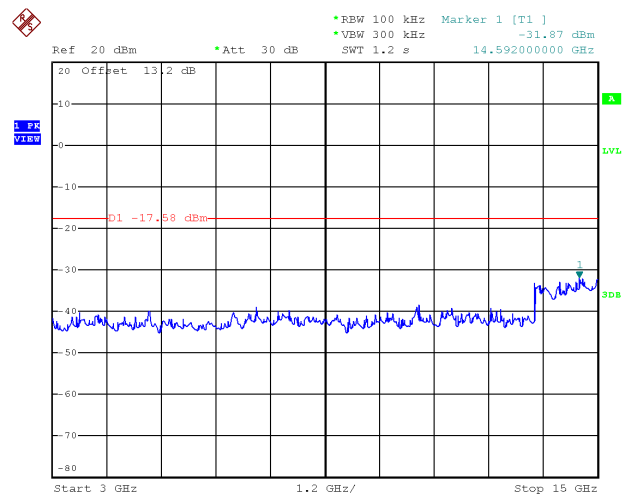


Date: 11.MAY.2017 12:22:34

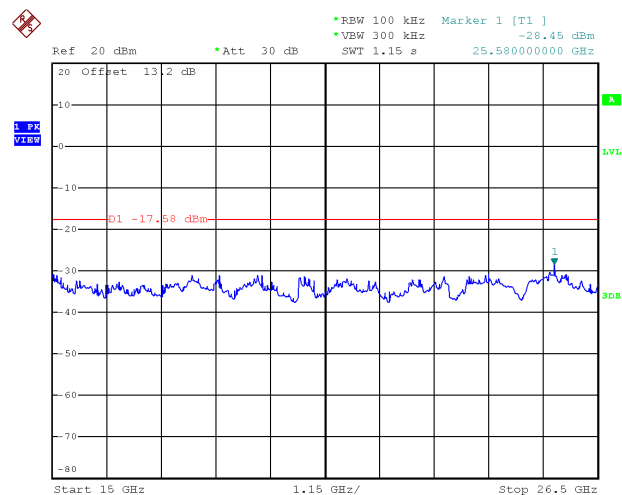


Date: 11.MAY.2017 12:22:40


TX B mode CH06 (10 Harmonic of the frequency)

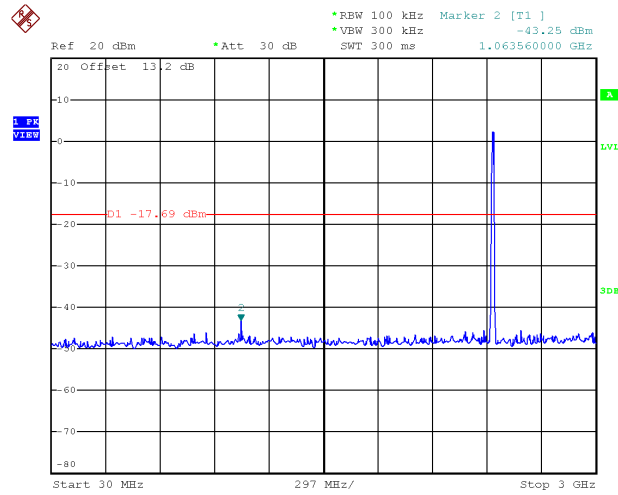

Date: 11.MAY.2017 12:27:11

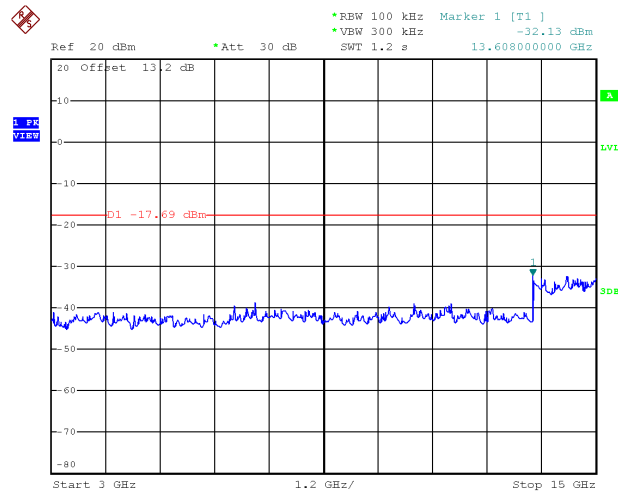


Date: 11.MAY.2017 12:27:18

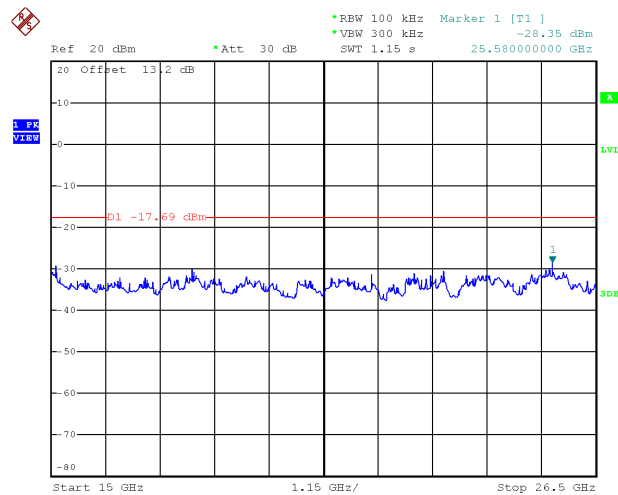


Date: 11.MAY.2017 12:27:24


TX B mode CH11 (10 Harmonic of the frequency)

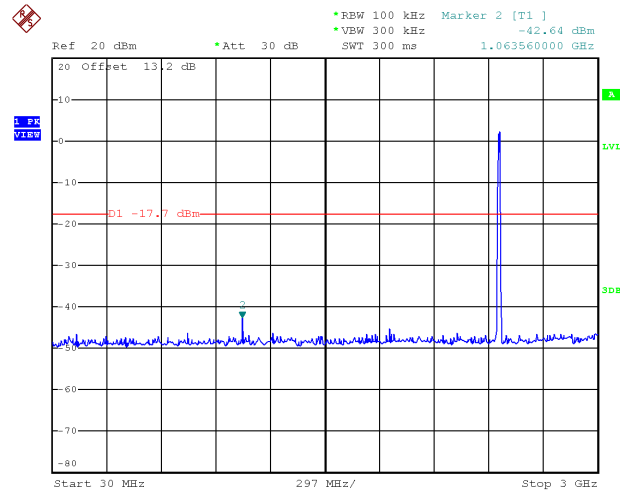

Date: 11.MAY.2017 12:30:09

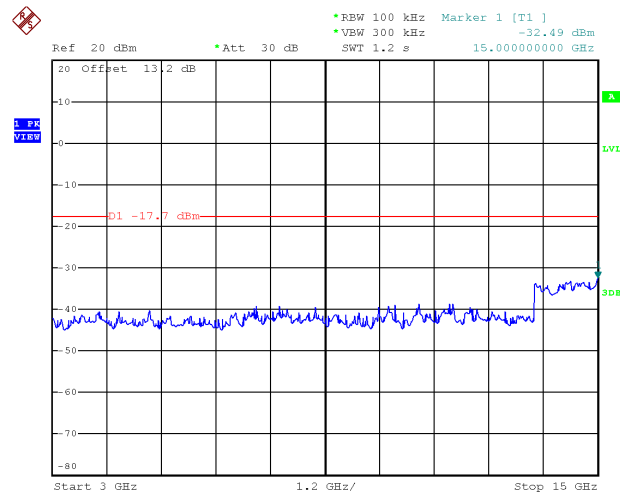


Date: 11.MAY.2017 12:30:16

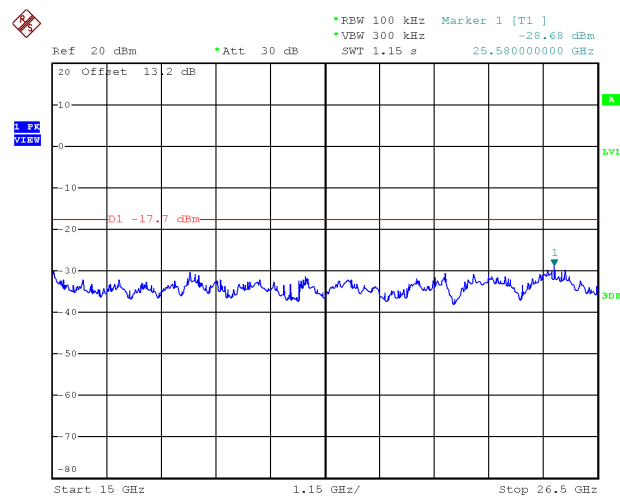

Date: 11.MAY.2017 12:30:23


Test Mode : TX B Mode_ANT 2

TX B mode CH01

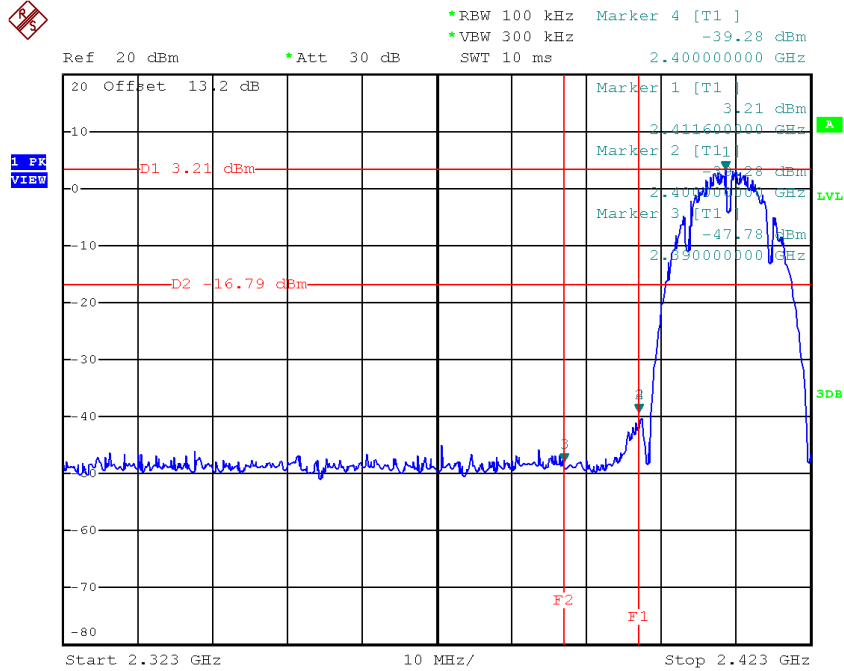


Date: 11.MAY.2017 12:25:14

TX B mode CH11

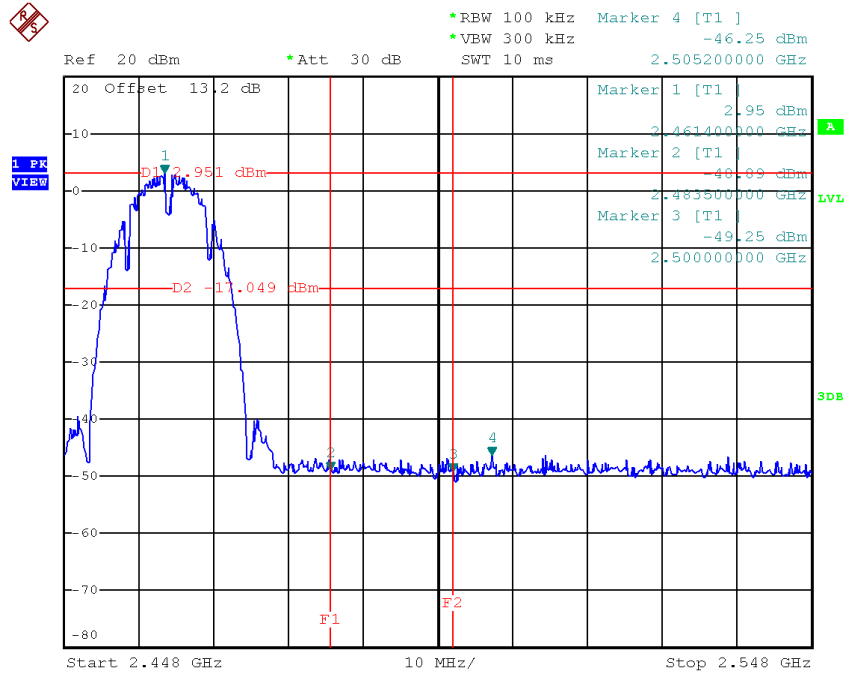


Date: 11.MAY.2017 12:32:13


TX B mode CH01 (10 Harmonic of the frequency)

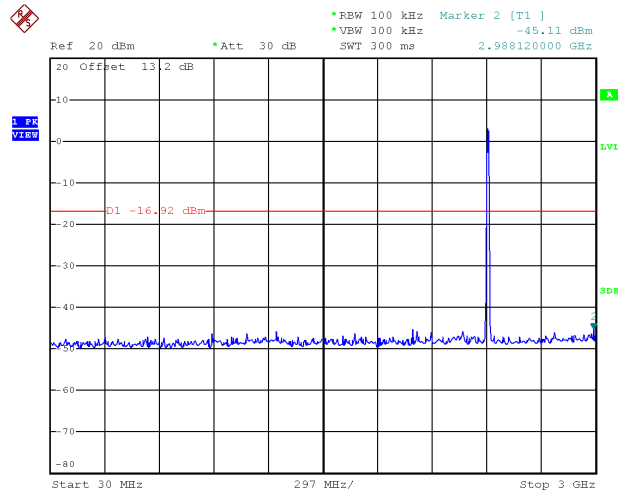

Date: 11.MAY.2017 12:24:36

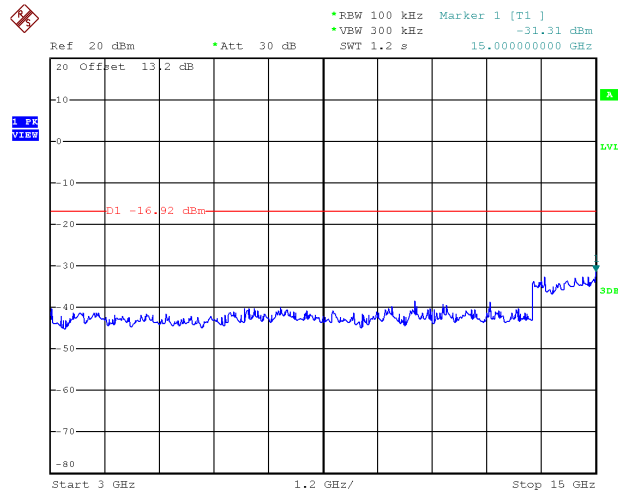


Date: 11.MAY.2017 12:24:43

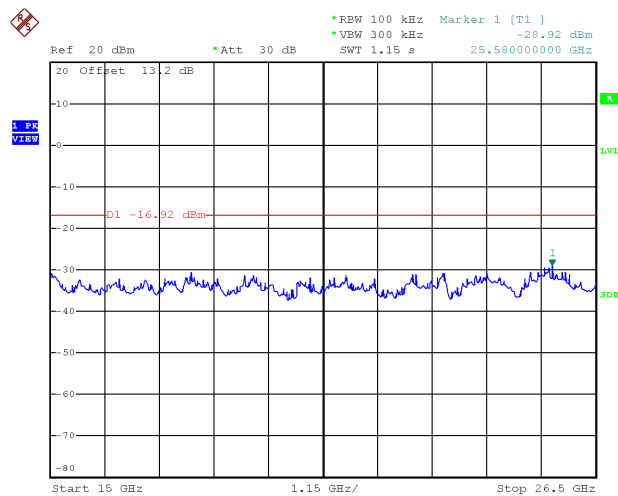


Date: 11.MAY.2017 12:24:50


TX B mode CH06 (10 Harmonic of the frequency)

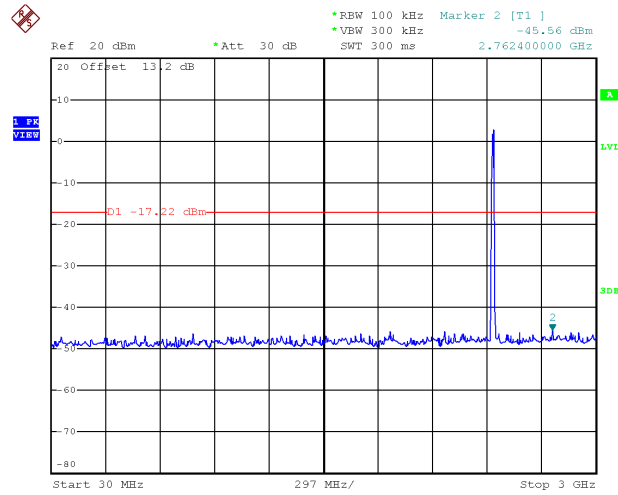

Date: 11.MAY.2017 12:28:23

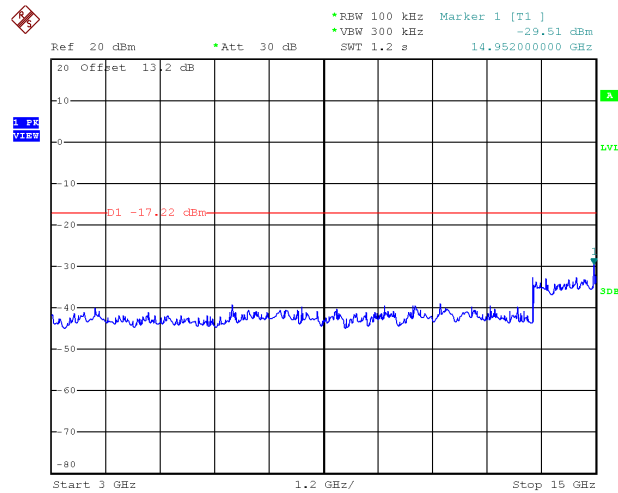


Date: 11.MAY.2017 12:28:29

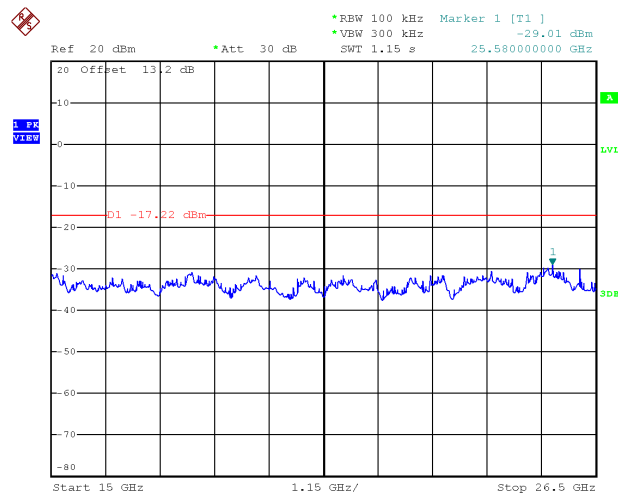


Date: 11.MAY.2017 12:28:36


TX B mode CH11 (10 Harmonic of the frequency)

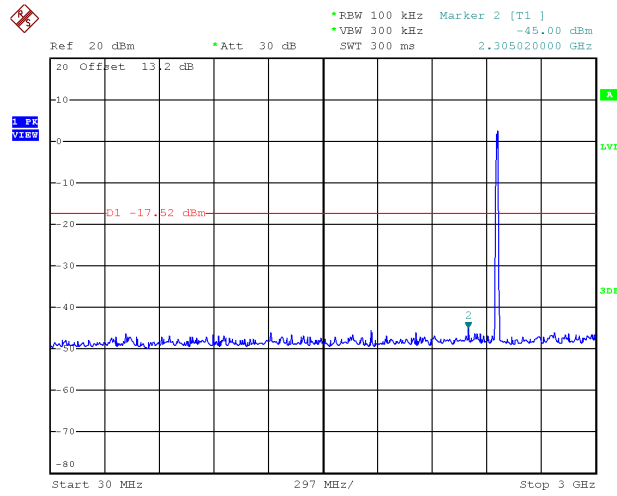

Date: 11.MAY.2017 12:31:53

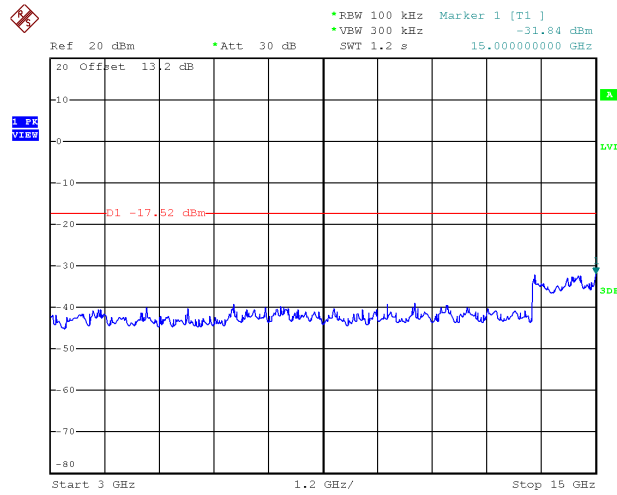


Date: 11.MAY.2017 12:32:00

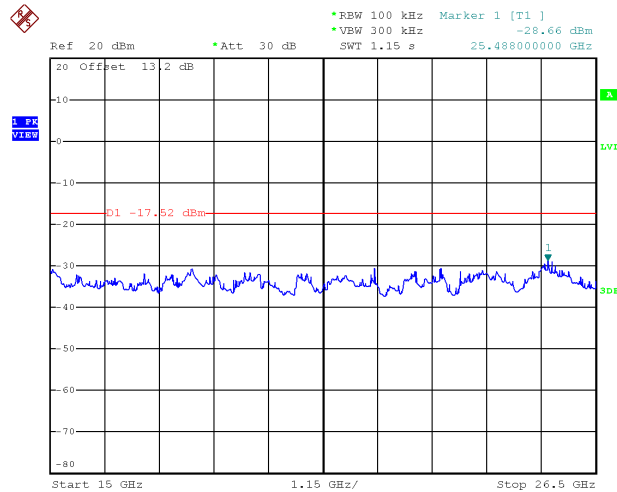

Date: 11.MAY.2017 12:32:06


Test Mode : TX G Mode_ANT 1

TX G mode CH01

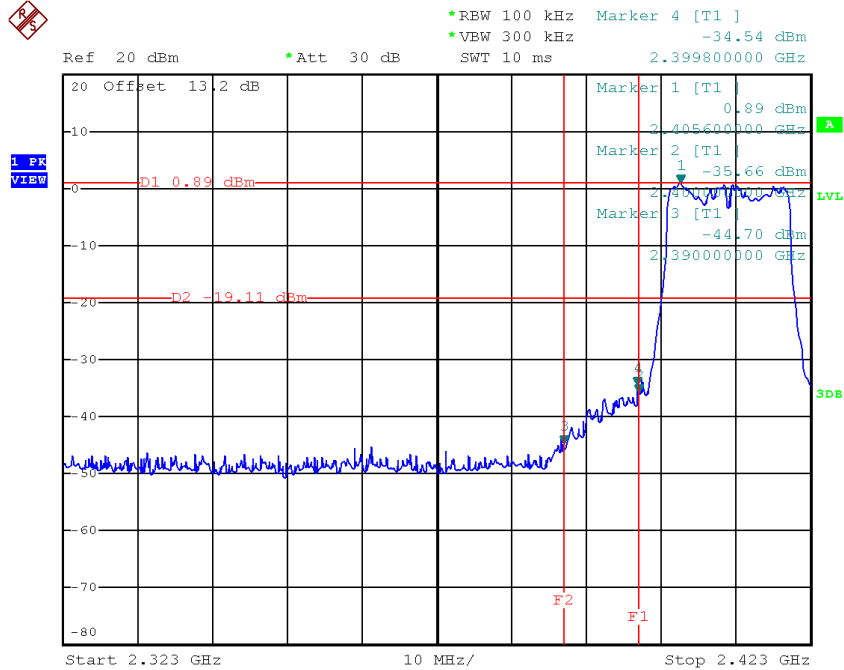


Date: 11.MAY.2017 12:35:48

TX G mode CH11

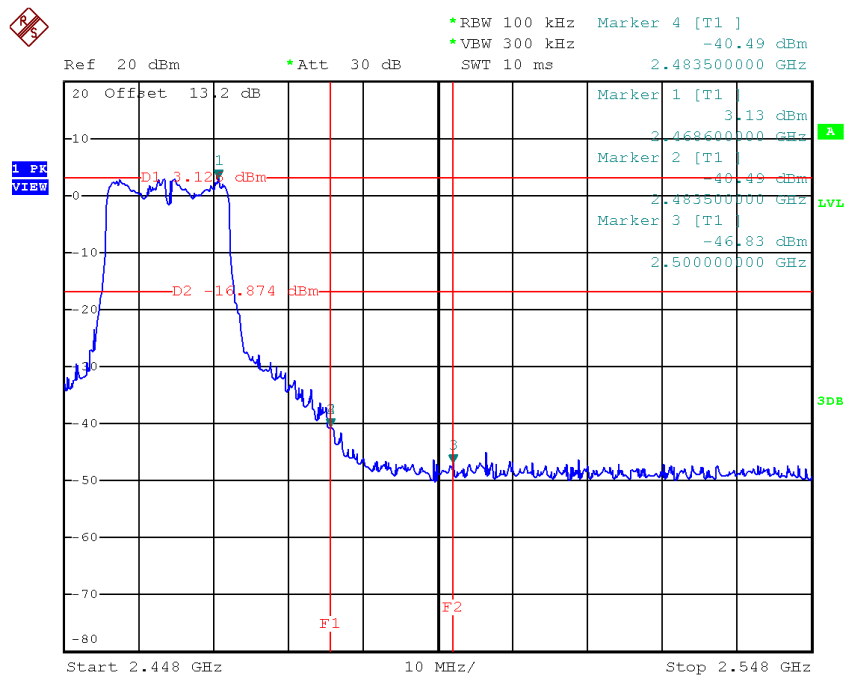


Date: 11.MAY.2017 12:44:18


TX G mode CH01 (10 Harmonic of the frequency)

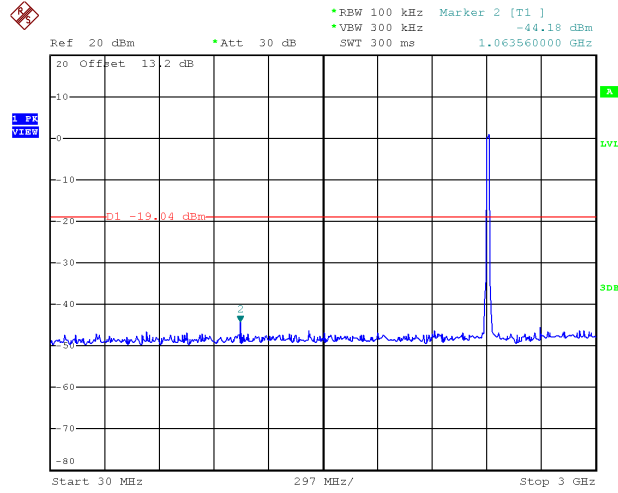

Date: 11.MAY.2017 12:35:28

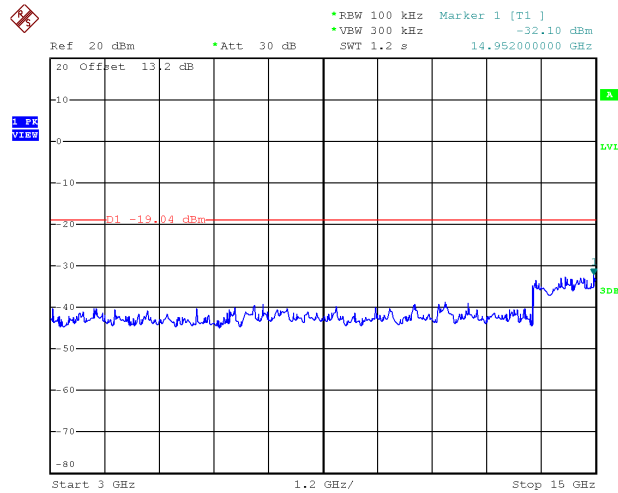


Date: 11.MAY.2017 12:35:35

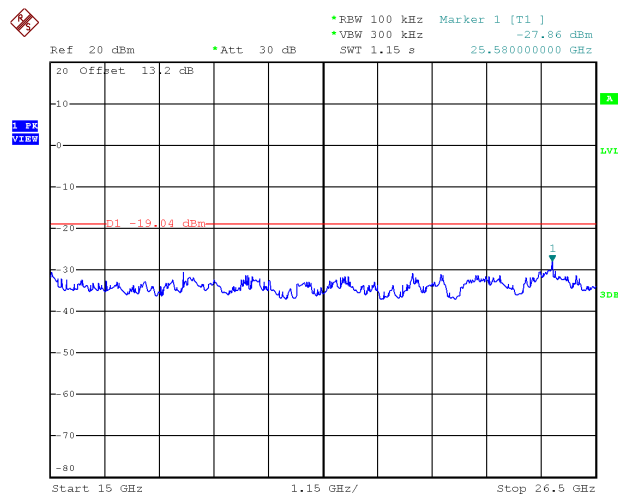


Date: 11.MAY.2017 12:35:42


TX G mode CH06 (10 Harmonic of the frequency)

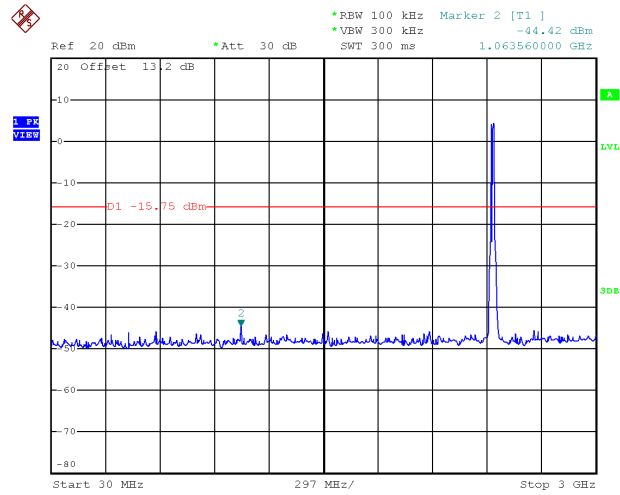

Date: 11.MAY.2017 12:40:13

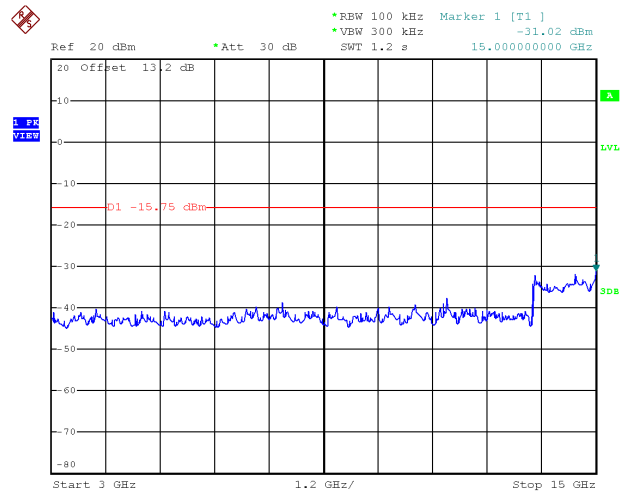


Date: 11.MAY.2017 12:40:20

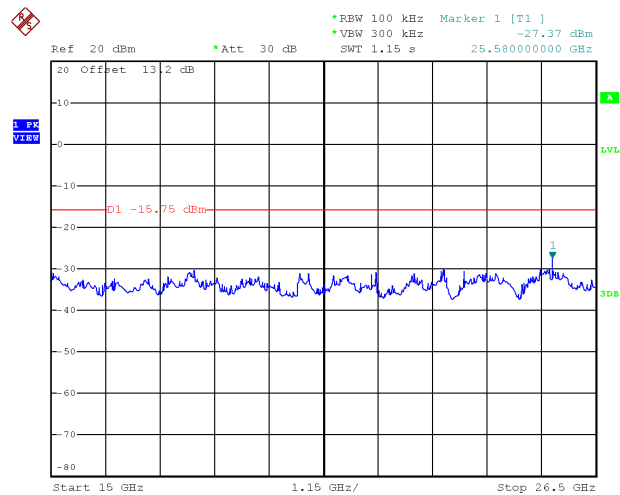


Date: 11.MAY.2017 12:40:27


TX G mode CH11 (10 Harmonic of the frequency)

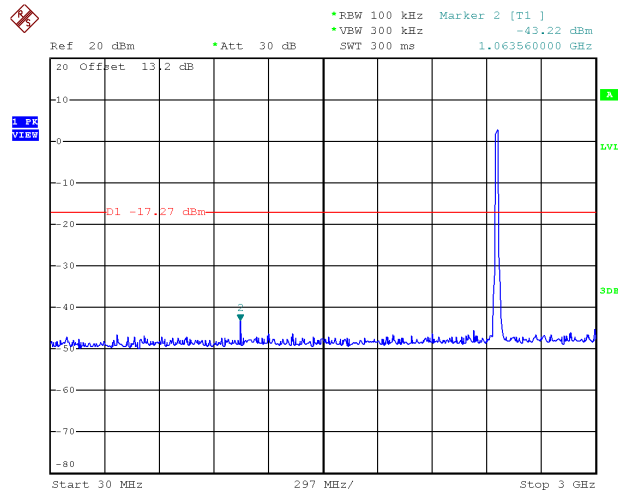

Date: 11.MAY.2017 12:43:58

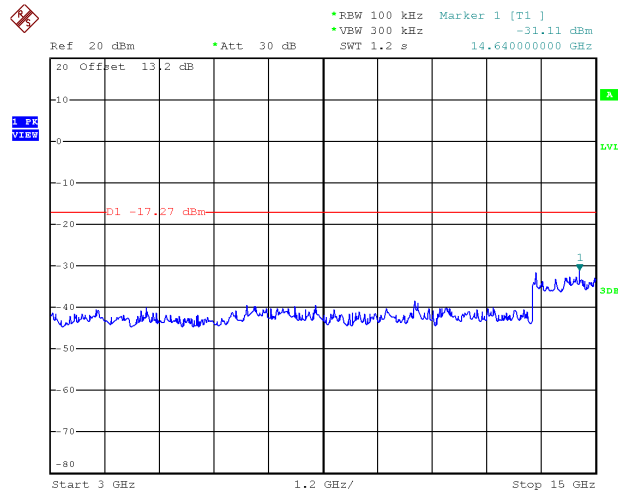


Date: 11.MAY.2017 12:44:04

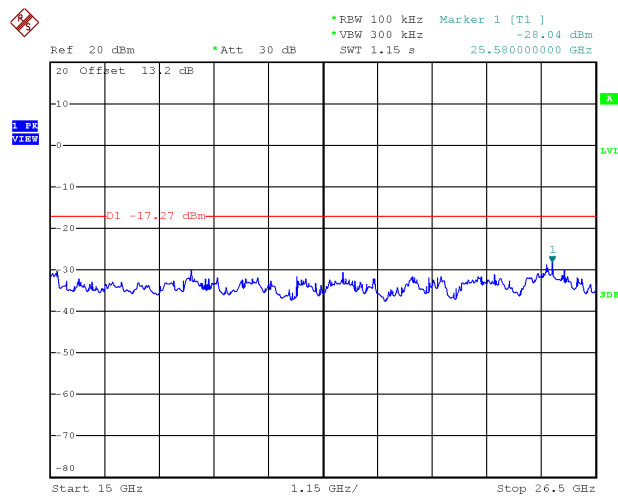

Date: 11.MAY.2017 12:44:11


Test Mode : TX G Mode_ANT 2

TX G mode CH01

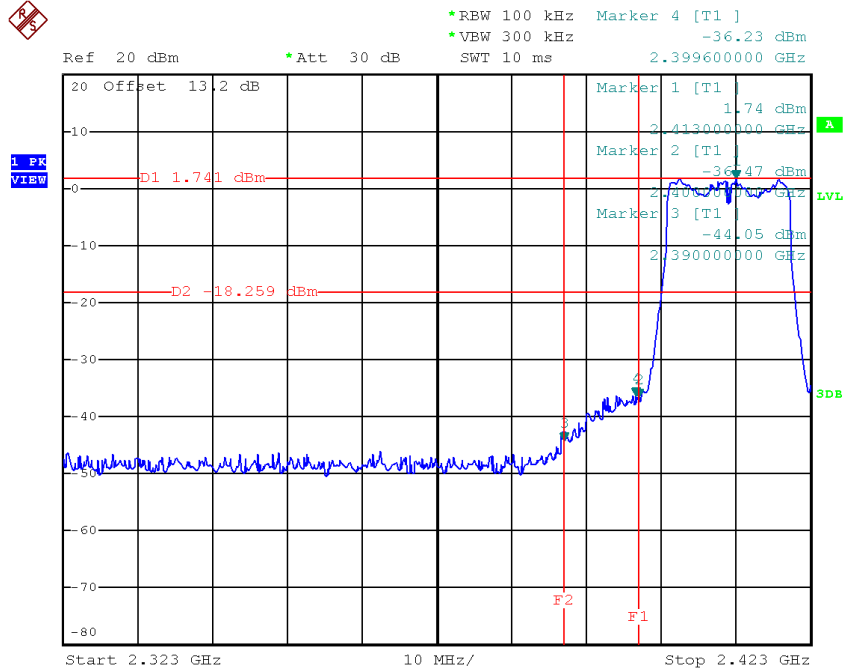


Date: 11.MAY.2017 12:38:31

TX G mode CH11

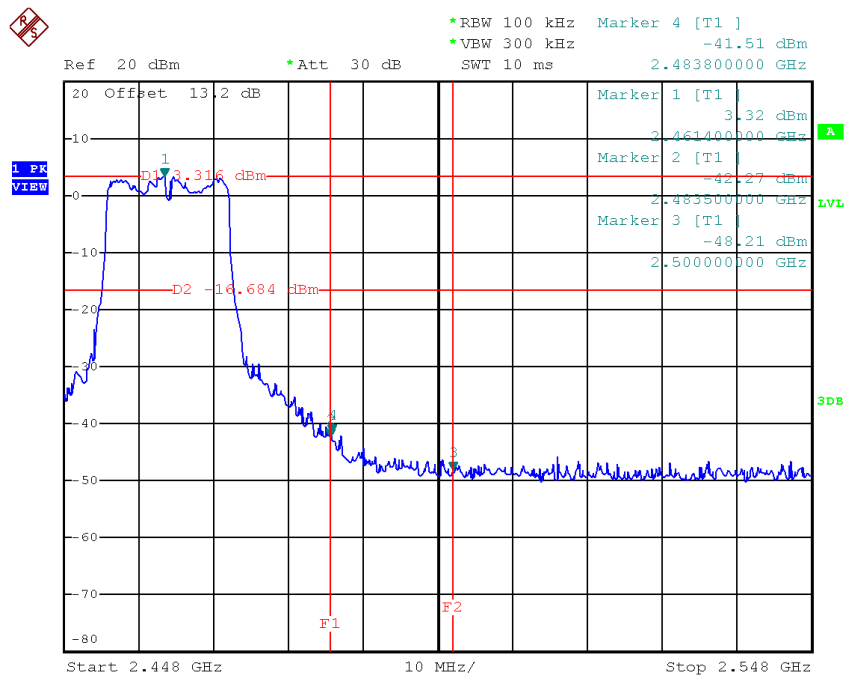


Date: 11.MAY.2017 12:45:59


TX G mode CH01 (10 Harmonic of the frequency)

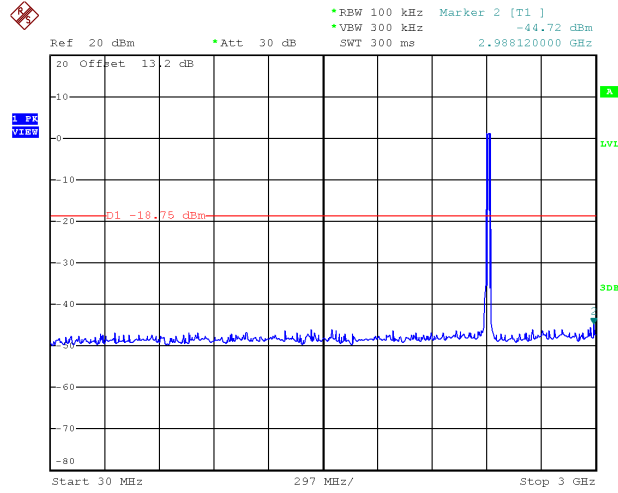

Date: 11.MAY.2017 12:37:53

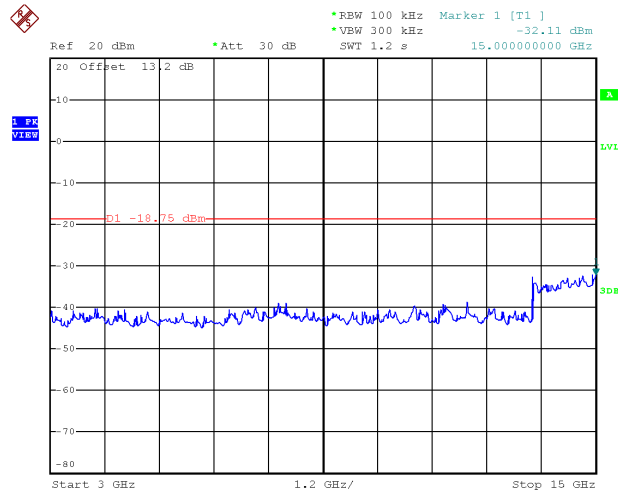


Date: 11.MAY.2017 12:38:00

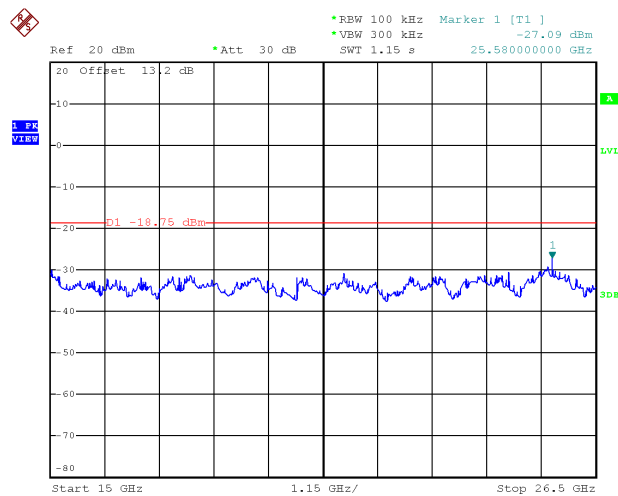


Date: 11.MAY.2017 12:38:07


TX G mode CH06 (10 Harmonic of the frequency)

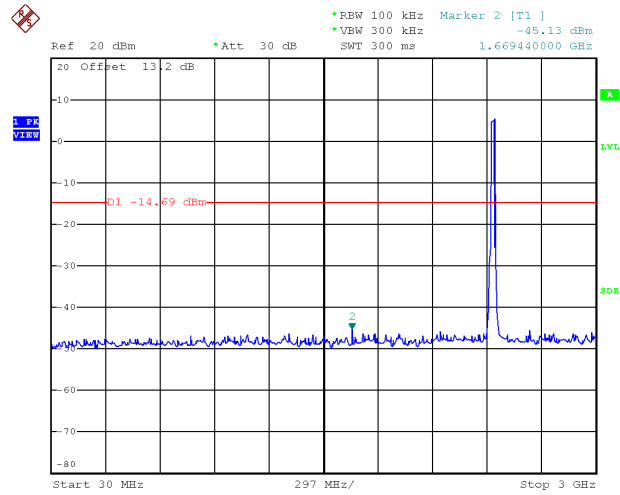

Date: 11.MAY.2017 12:42:20

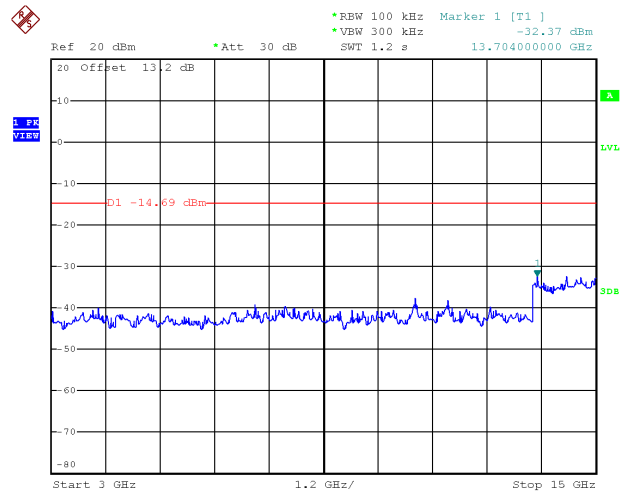


Date: 11.MAY.2017 12:42:27

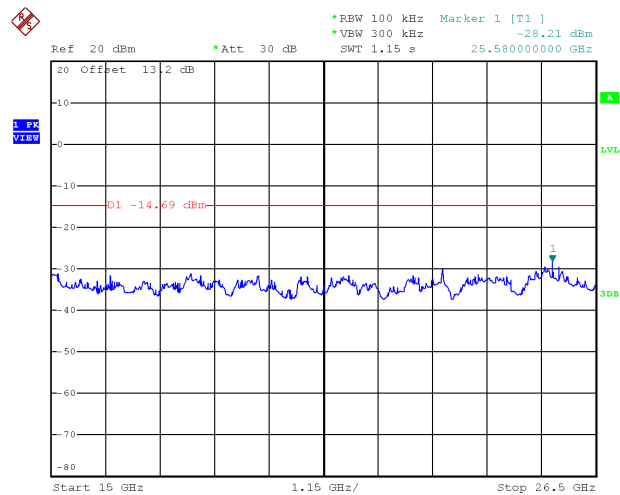


Date: 11.MAY.2017 12:42:34


TX G mode CH11 (10 Harmonic of the frequency)

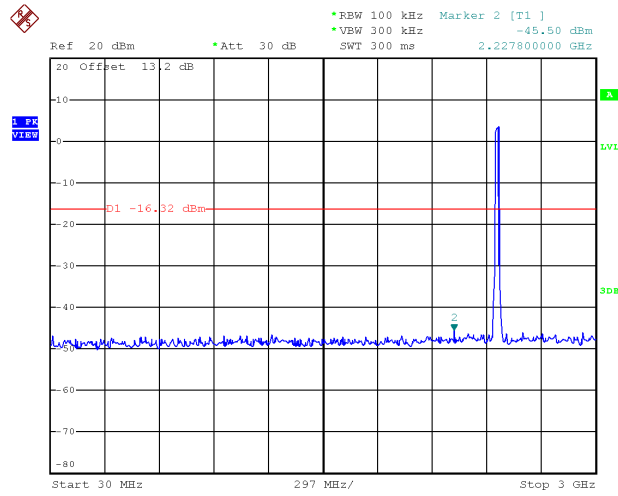

Date: 11.MAY.2017 12:45:38

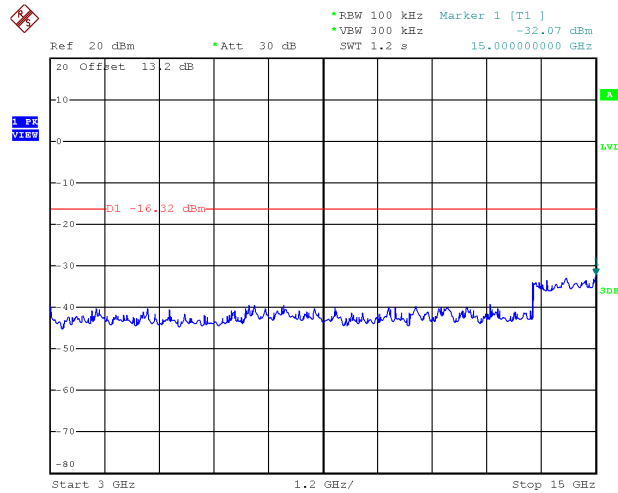


Date: 11.MAY.2017 12:45:45

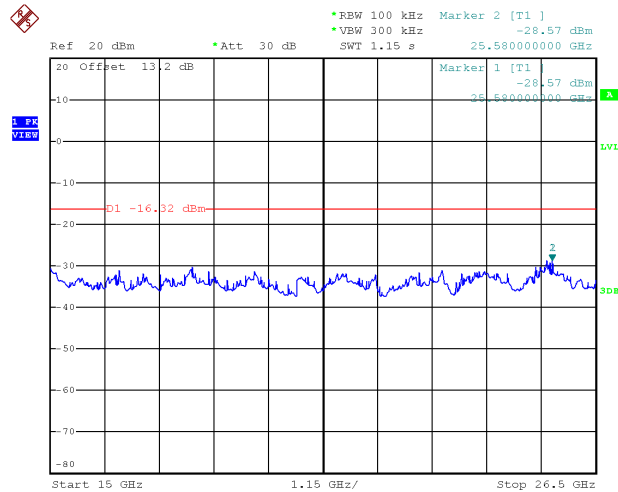

Date: 11.MAY.2017 12:45:52


Test Mode : TX N-20M Mode_ANT 1

TX HT20 mode CH01

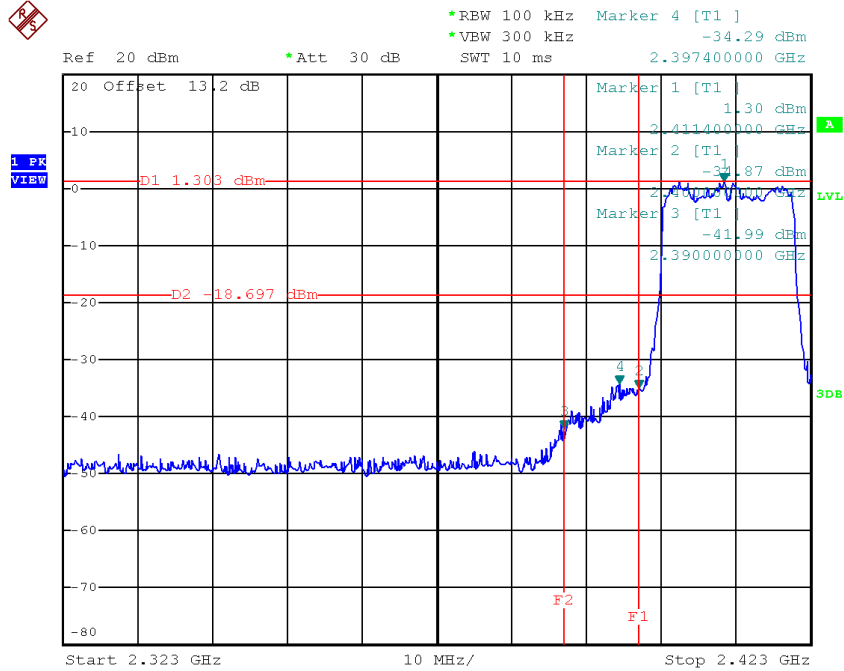


Date: 11.MAY.2017 12:57:16

TX HT20 mode CH11

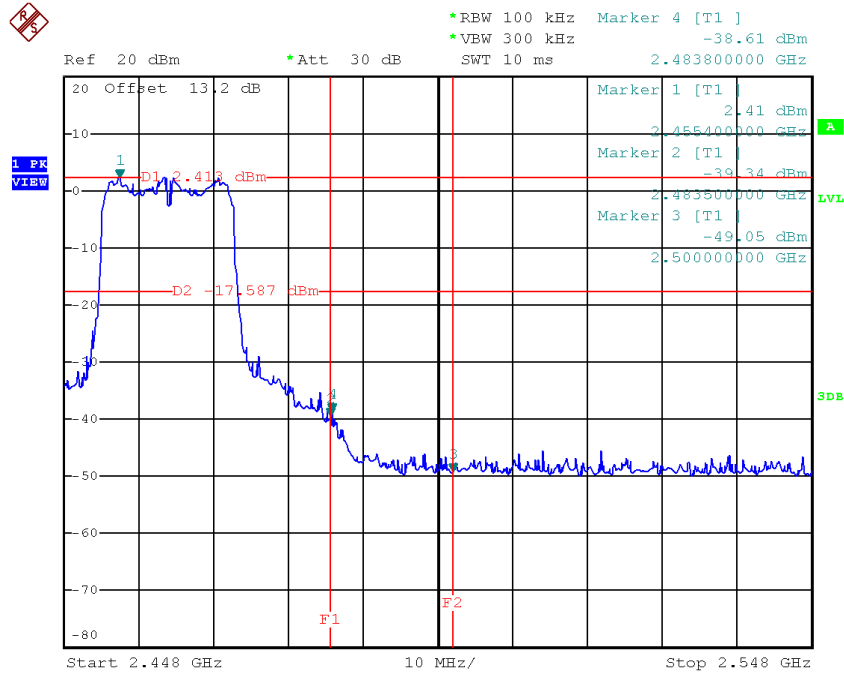


Date: 11.MAY.2017 13:05:23


TX HT20 mode CH01 (10 Harmonic of the frequency)

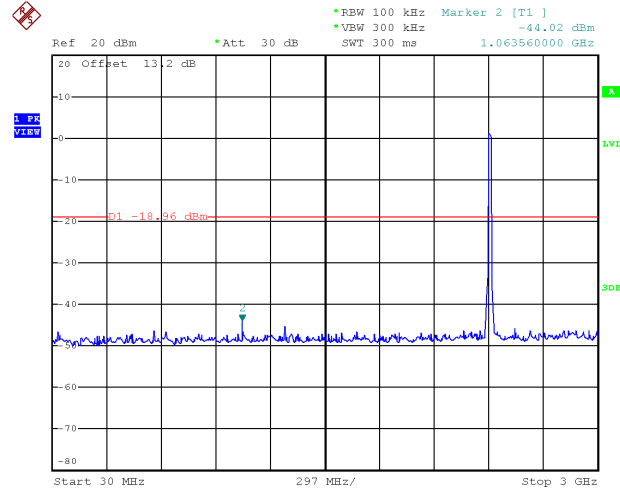

Date: 11.MAY.2017 12:56:55

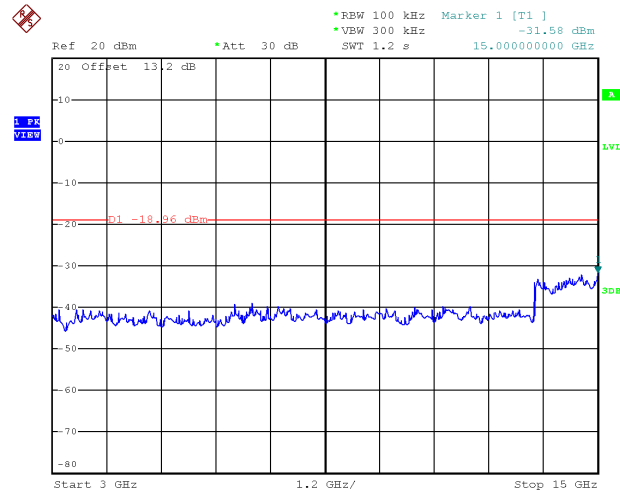


Date: 11.MAY.2017 12:57:02

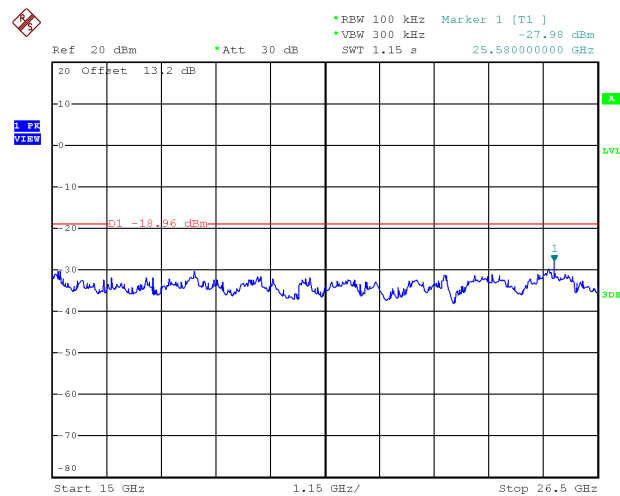


Date: 11.MAY.2017 12:57:09


TX HT20 mode CH06 (10 Harmonic of the frequency)

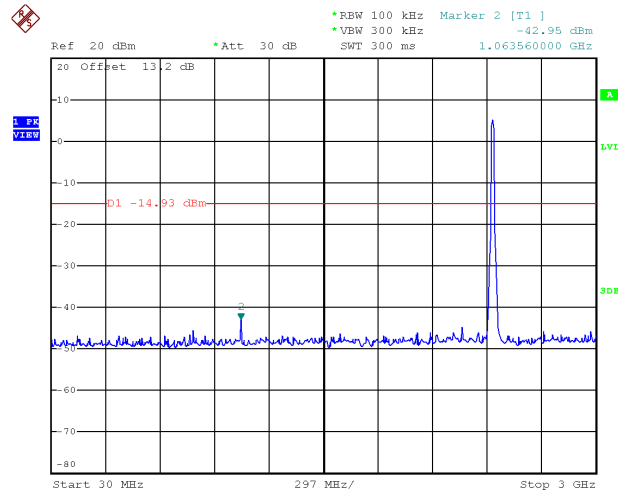

Date: 11.MAY.2017 13:02:08

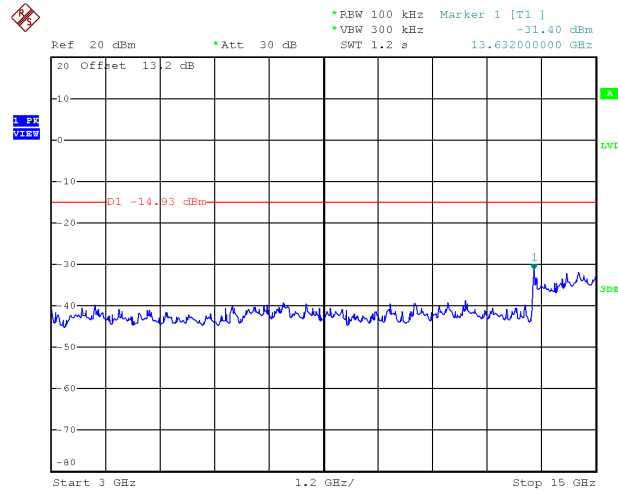


Date: 11.MAY.2017 13:02:15

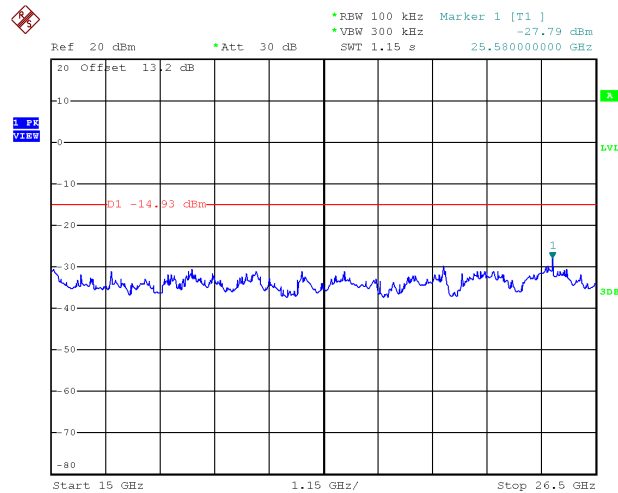


Date: 11.MAY.2017 13:02:30


TX HT20 mode CH11 (10 Harmonic of the frequency)

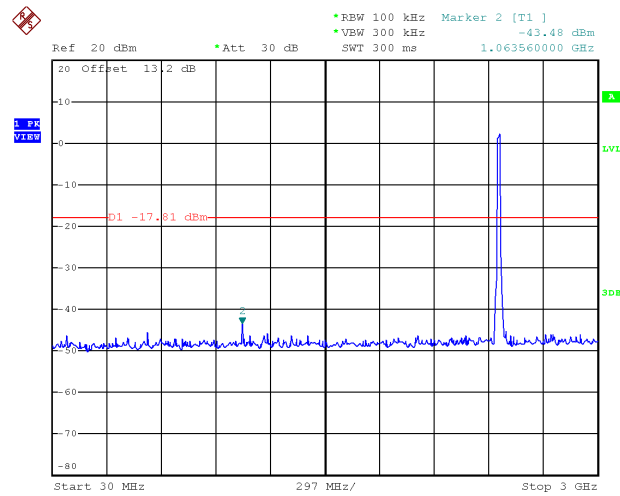

Date: 11.MAY.2017 13:05:03

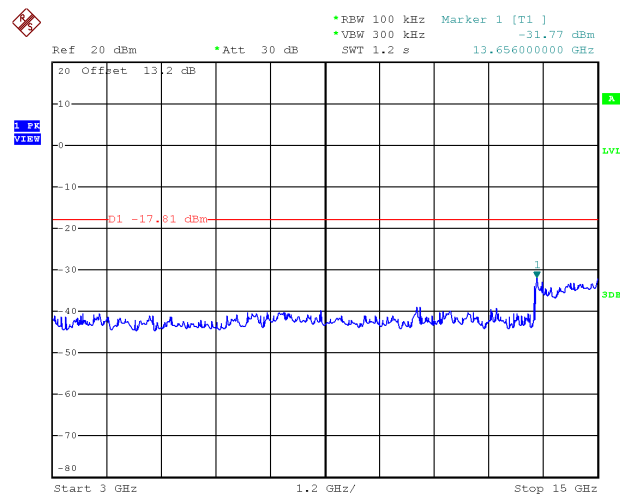


Date: 11.MAY.2017 13:05:10

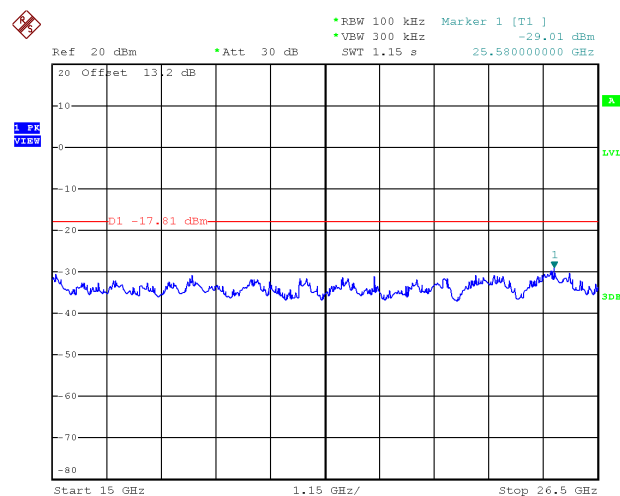

Date: 11.MAY.2017 13:05:16


Test Mode : TX N-20M Mode_ANT 2

TX HT20 mode CH01

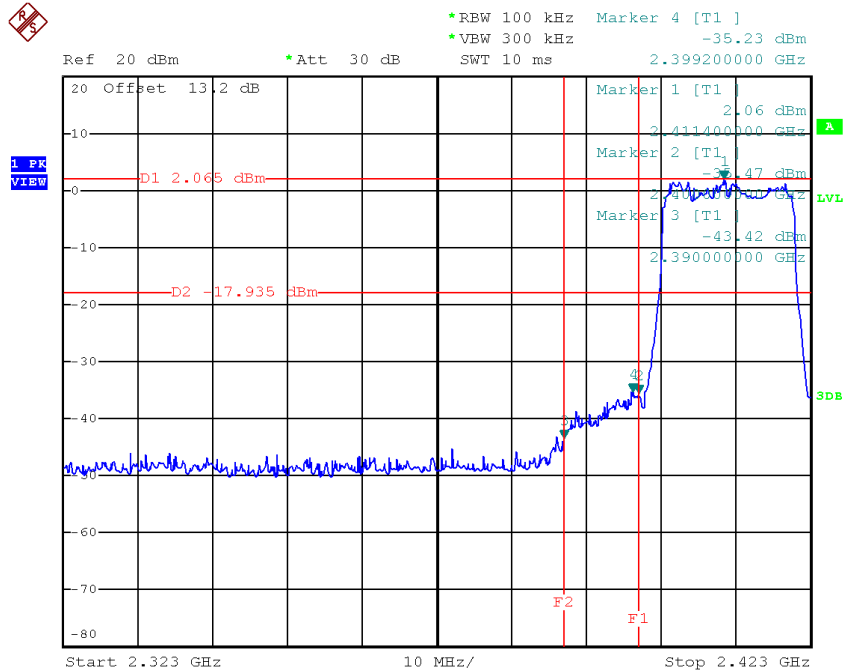


Date: 11.MAY.2017 13:00:58

TX HT20 mode CH11

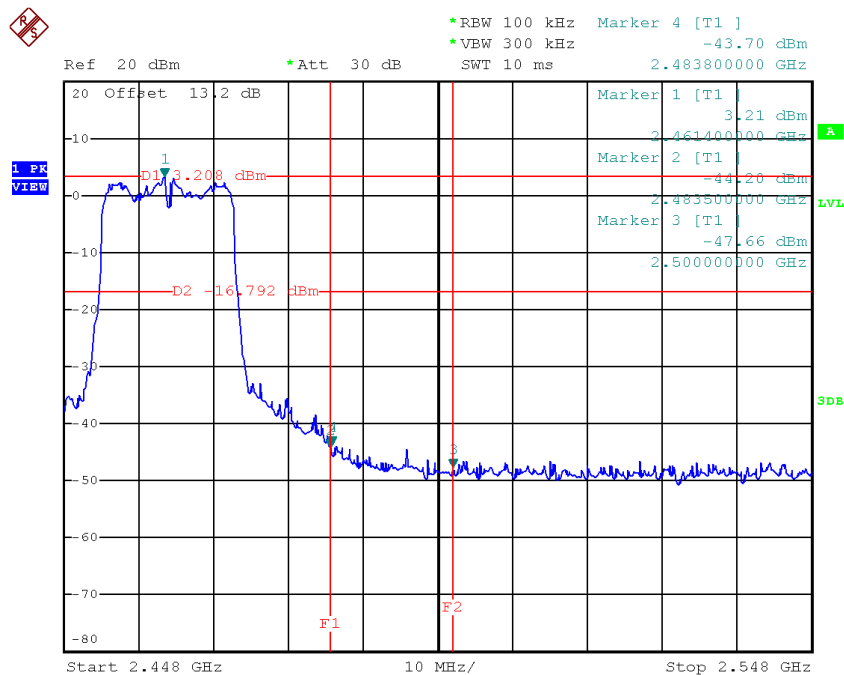


Date: 11.MAY.2017 13:06:22


TX HT20 mode CH01 (10 Harmonic of the frequency)

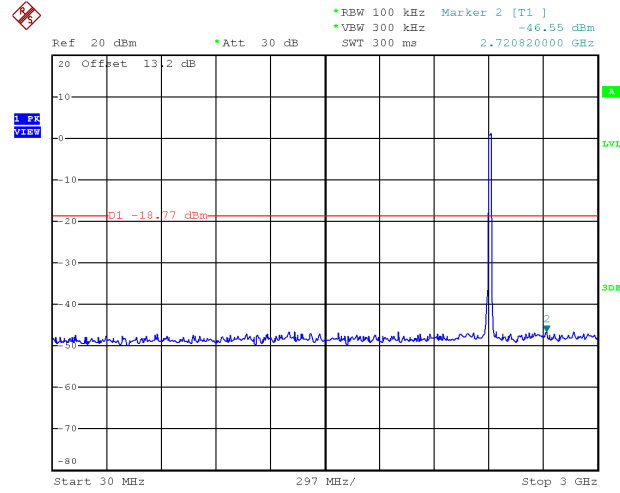

Date: 11.MAY.2017 13:00:20

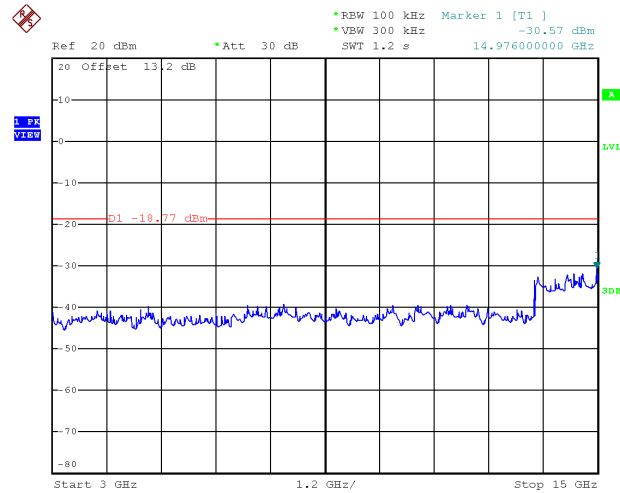


Date: 11.MAY.2017 13:00:27

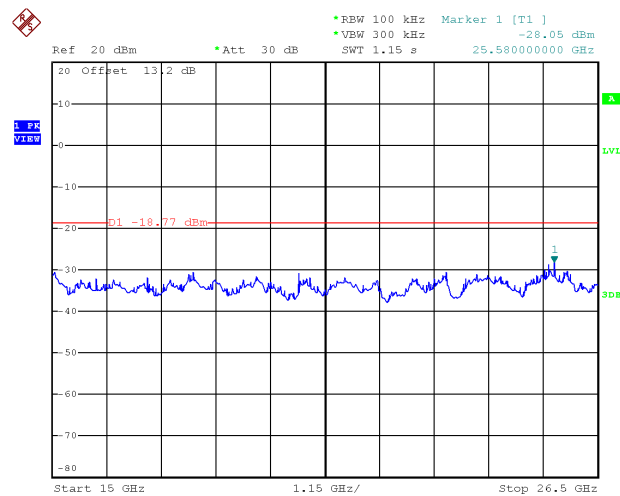


Date: 11.MAY.2017 13:00:34


TX HT20 mode CH06 (10 Harmonic of the frequency)

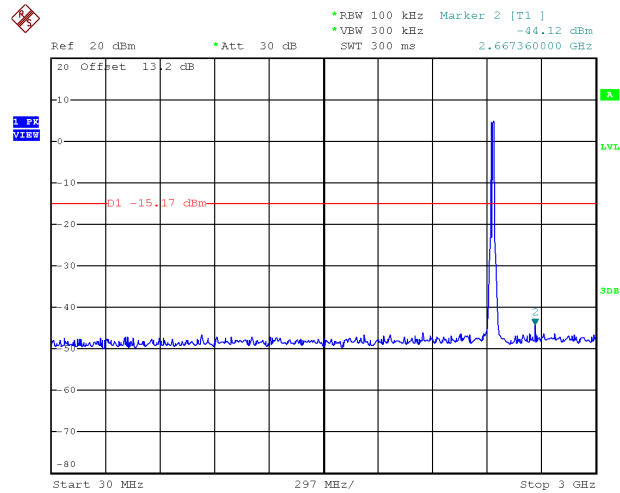

Date: 11.MAY.2017 13:03:03

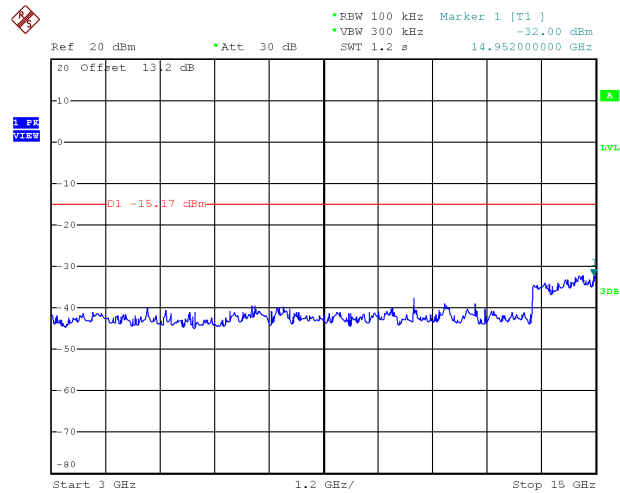


Date: 11.MAY.2017 13:03:10

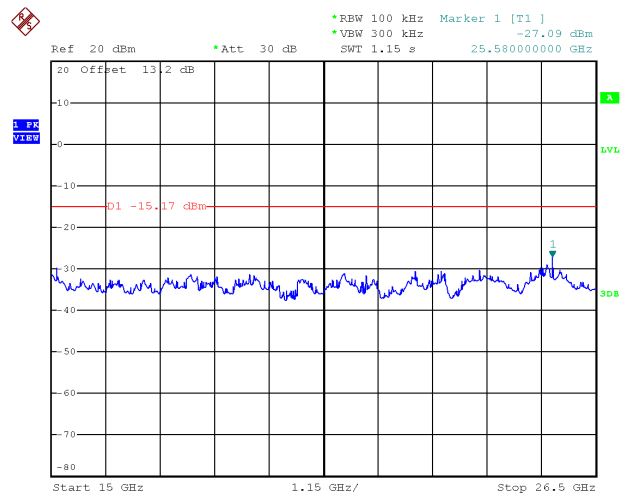


Date: 11.MAY.2017 13:03:16


TX HT20 mode CH11 (10 Harmonic of the frequency)

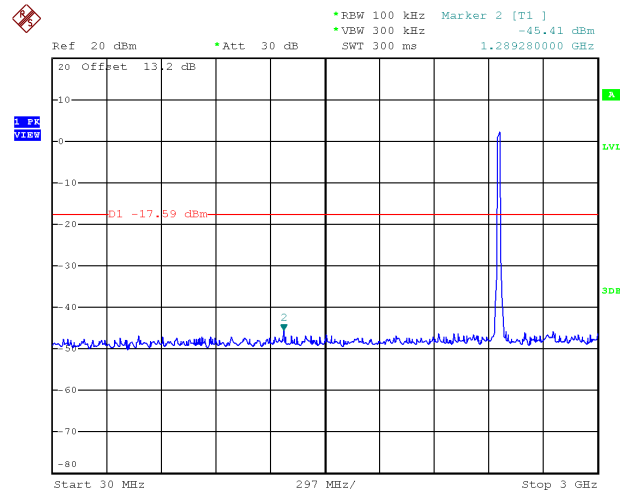

Date: 11.MAY.2017 13:06:02

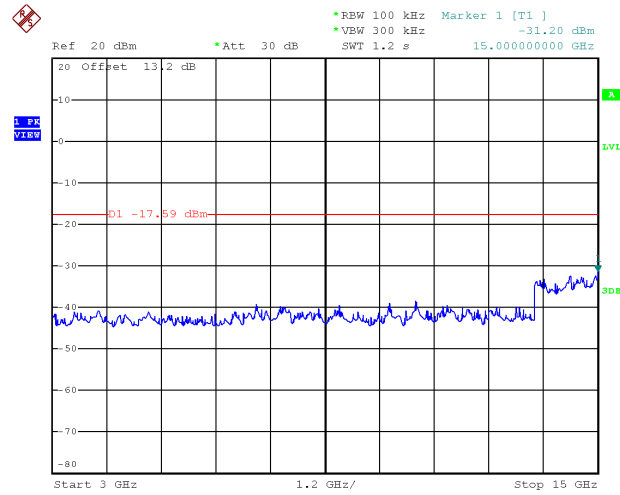


Date: 11.MAY.2017 13:06:09

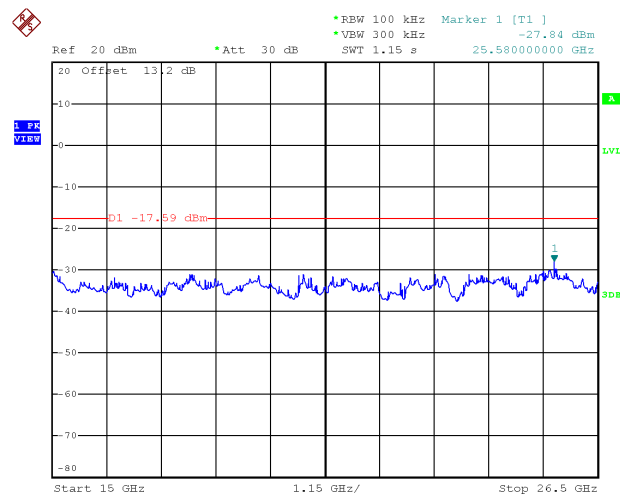

Date: 11.MAY.2017 13:06:15


Test Mode : TX N-40M Mode_ANT 1

TX HT40 mode CH03

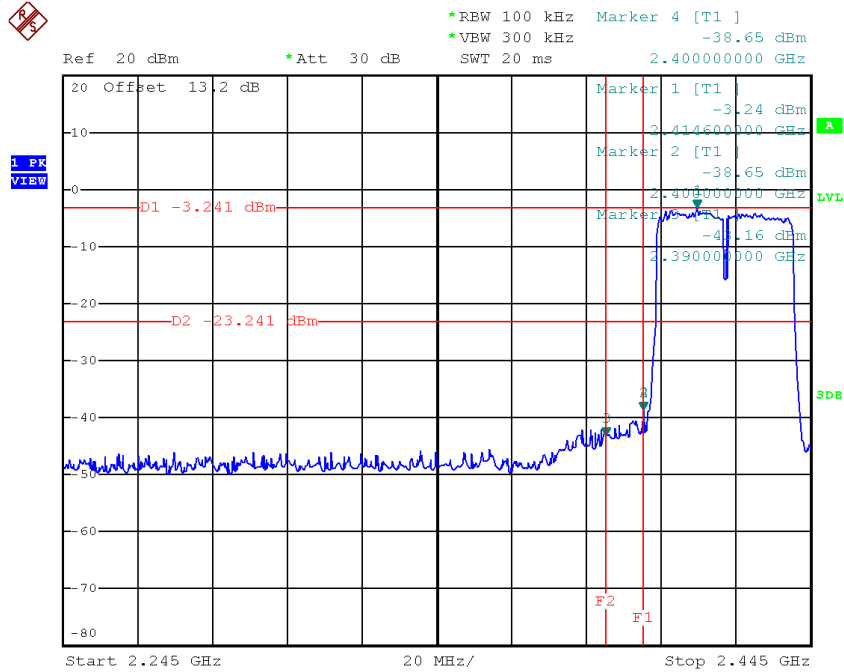


Date: 11.MAY.2017 15:22:41

TX HT40 mode CH09

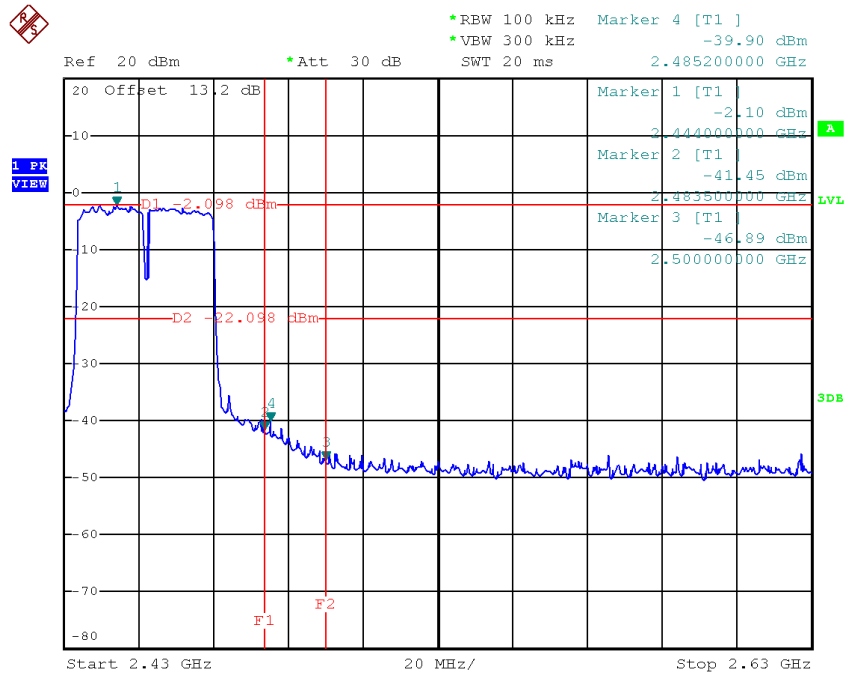


Date: 11.MAY.2017 15:28:46


TX HT40 mode CH03 (10 Harmonic of the frequency)

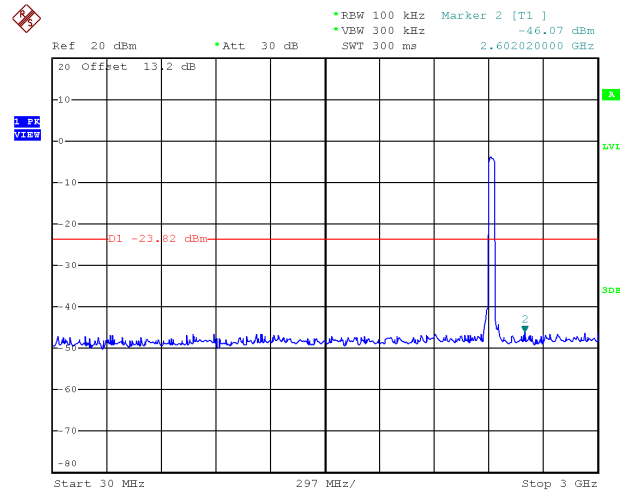

Date: 11.MAY.2017 15:22:04

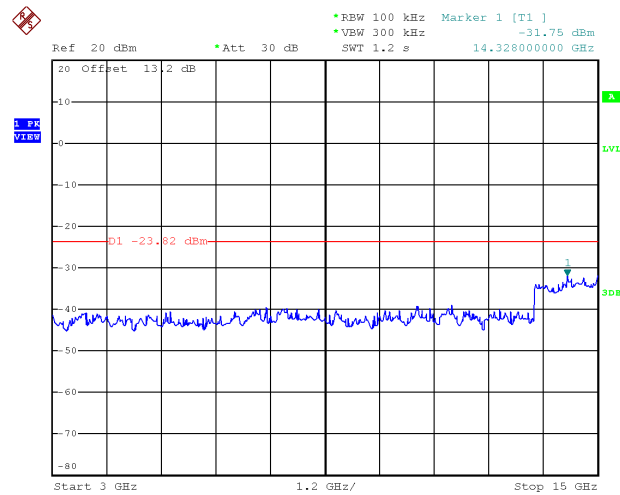

Date: 11.MAY.2017 15:22:11

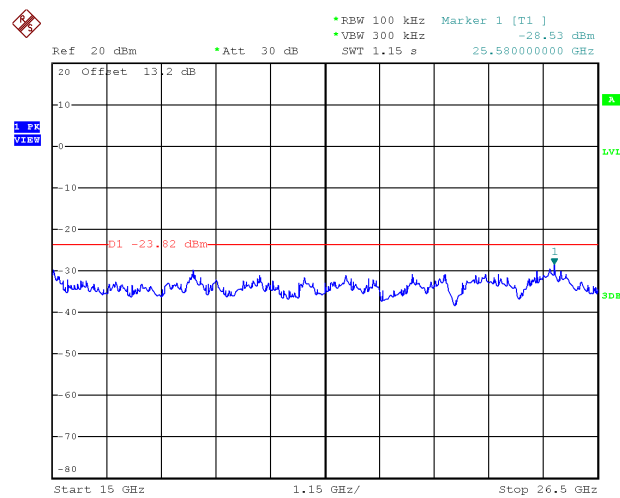

Date: 11.MAY.2017 15:22:18