

FCC DFS Test Report

Equipment : 11ac Dual Band Concurrent Wall-mount AP
Brand Name : EDIMAX
Model No. : EW-7679WAC / GAP-679WAC / WAP1750 / WAP1750H /
WAP1750S / WAP1750L / WAP1750i
FCC ID : NDD9576791401
Standard : 47 CFR FCC Part 15.407
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Manufacturer : No.3,Wu-Chuan 3rd Road,Wu-Ku Industrial Park,
New Taipei City, Taiwan
Operate Mode : Master

The product sample received on Apr. 10, 2014 and completely tested on Aug. 11, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Kevin Liang / Assistant Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information.....	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	DFS and TPC Information.....	8
2.2	The Worst Case Measurement Configuration.....	8
3	DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	9
3.1	General DFS Information	9
3.2	Radar Test Waveform Calibration	11
3.3	UNII Detection Bandwidth	18
3.4	Channel Availability Check (CAC).....	23
3.5	In-service Monitoring	26
3.6	Statistical Performance Check	31
4	TEST EQUIPMENT AND CALIBRATION DATA	60
APPENDIX A. TEST PHOTOS		

Summary of Test Result

Conformance Test Specifications (FCC 06-96 Appendix)					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
3.3	7.8.1	DFS: UNII Detection Bandwidth Measurement	VHHT20: 17.695 MHz VHHT40: 35.64375 MHz VHHT80: 75.7125 MHz	80% of the 99% BW for type5 100% of the 99% BW for type0	Complied
3.4	7.8.2.1	DFS: Initial Channel Availability Check Time	Power-on Cycle = 90.3375 sec CAC = 60 sec	CAC $\geq$ 60 sec	Complied
3.4	7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	Detect Radar Signal	Detection Threshold: -64 dBm	Complied
3.4	7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	Detect Radar Signal	Detection Threshold: -64 dBm	Complied
3.5	7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	CMT < 10sec	CMT $\leq$ 10sec	Complied
3.5	7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	CCTT < 60 ms	CCTT $\leq$ 60 ms starting at CMT 200ms	Complied
3.5	7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	NOP > 30 min	NOP $\geq$ 30 min	Complied
3.6	7.8.4	DFS: Statistical Performance Check	All Pd > Table 5 - 7 (KDB 905462)	Table 5 - 7 (KDB 905462)	Complied
3.1.4	5.8.1	DFS: Uniform Spreading	Manufacturer attestation using a Gaussian random algorithm of the spectrum with uniform spreading	Uniform Spreading for DFS Band	Complied
3.1.5	8.1	User Access Restrictions	Manufacturer attestation NOT accessible to user	DFS controls	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information

IEEE Std. 802.11	Channel Bandwidth (MHz)
a, n (HT20) / ac (VHT20)	20
n (HT40) / ac (VHT40)	40
ac (VHT80)	80
802.11 a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.	

1.1.2 Antenna Information

Antenna Category	
☒	External antenna (dedicated antennas)
☒	Single power level with corresponding antenna(s).
☐	Multiple power level and corresponding antenna(s).

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Model	Gain (dBi)
1	External	Dipole	98610PRSX002	2.58
2	External	Dipole	98610PRSX002	2.58
3	External	Dipole	98610PRSX002	2.58
For radiated tests, the DFS test should be performed with lowest antenna gain (regardless of antenna type).				

1.2 Accessories and Support Equipment

Accessories				
AC Adapter 1	Brand Name	APD	Model Name	WA-30B12
	Power Rating	I/P: 100-240Vac 0.8A ; O/P: 12V $\overline{\text{---}}$ 2.5A		
	Power cord	1.8m, non-shielded cable, w/o ferrite core		
AC Adapter 2	Brand Name	APD	Model Name	DA-48T12
	Power Rating	I/P: 100-240Vac 1.2A ; O/P: 12V $\overline{\text{---}}$ 4A		
	Power Cord	AC: 1.4m, non-shielded cable, w/o ferrite core DC: 1.5m, non-shielded cable, with one ferrite core		
AC Adapter 3 (Level VI)	Brand Name	APD	Model Name	DA-48T12
	Power Rating	I/P: 100-240Vac 1.4A ; O/P: 12V $\overline{\text{---}}$ 4A		
	Power Cord	AC: 1.4m, non-shielded cable, w/o ferrite core DC: 1.5m, non-shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	USB Dongle	NETGEAR	A6200	DoC
2	Notebook PC	HP	EliteBook 8440p	DoC
3	AC Adapter for Notebook	HP	Series PPP009H	DoC
4	Notebook PC	DELL	Latitude E5530	DoC
5	AC Adapter for Notebook	DELL	DA65NM111-00	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 06-96 Appendix
- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02
- FCC KDB 443999 D01 Approval of DFS UNII Devices v01r01
- 47 CFR FCC Part 15.407

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
DFS Site		DF01-HY	Ben	25°C / 60%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Test Item	Uncertainty
Radio frequency	$\pm 8.7 \times 10^{-7}$
RF output power, conducted	± 0.6 dB
All emissions, conducted	± 0.8 dB
All emissions, radiated	± 2.8 dB
Temperature	± 0.8 °C
Humidity	± 3 %
DC and low frequency voltages	± 3 %
Time	± 1.4 %

2 Test Configuration of EUT

2.1 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment			
☒ Master			
☐ Client with radar detection			
☐ Client without radar detection			
Software / Firmware Version		1.3.0	
Power-on Cycle. (Master VHT80)		90.3375 sec	
Communication Mode		☒ IP Based (Load Based)	☐ Frame Based
IEEE Std. 802.11	Frequency Range (MHz)	TPC (Transmit Power Control)	Active Scan
a / n (HT20) / ac (VHT20)	☒ 5250-5350	No	Yes
n (HT40) / ac (VHT40)	☒ 5470-5725	No	Yes
ac (VHT80)	☒ 5600-5650	No	Yes

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Dynamic Frequency Selection (DFS)
Test Condition	Radiated measurement The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used. The DFS radar test signals have been aligned to the direction corresponding to the EUT's maximum antenna gain.
Modulation Mode	VHT20, VHT40, VHT80
Modulation modes consist of below configuration: 11a: IEEE 802.11a, HT20/HT40/VHT20/VHT40/VHT80: IEEE 802.11n	

3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values	
Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table D.2: Interference threshold values	
Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

3.1.3 Applicability of DFS Requirements during Normal Operation

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

3.1.4 Uniform Spreading

Manufacturer Declare the Uniform Spreading	
☒	For the 5250-5350 MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a Gaussian random algorithm.

3.1.5 User Access Restrictions

User Access Restrictions	
☒	DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3.1.6 Channel Loading/Data Streaming

☒	IP Based (Load Based) - stream the test file from the Master to the Client.
☐	The client device is link with the master device and plays the WAV audio file from master device to client device. Test file download in NTIA website (http://ntiacsd.ntia.doc.gov/dfs/)
☐	The client device is link with the master device and plays the MPEG file (6 1/2 Magic Hours) from master device to client device. Test file download in NTIA website (http://ntiacsd.ntia.doc.gov/dfs/)
☒	Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC.
☐	Frame Based - stream the test file from the Master to the Client.
☐	fixed talk/listen ratio, set the ratio to 45%/55%

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- ♦ The transmission period for the Long Pulse Radar test signal is 12 seconds.
- ♦ There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- ♦ Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- ♦ The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- ♦ Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- ♦ If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- ♦ The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.


3.2.4 DFS Threshold Level

DFS Threshold Level		
DFS Threshold level: -64 dBm	☐	at the antenna connector (-61 dBm conducted)
	☒	in front of the antenna (-64 /-62 dBm e.i.r.p.)
The Interference Radar Detection Threshold Level is -64 dBm. That had been taken into account the output power range and antenna gain.		

3.2.5 Calibration Setup

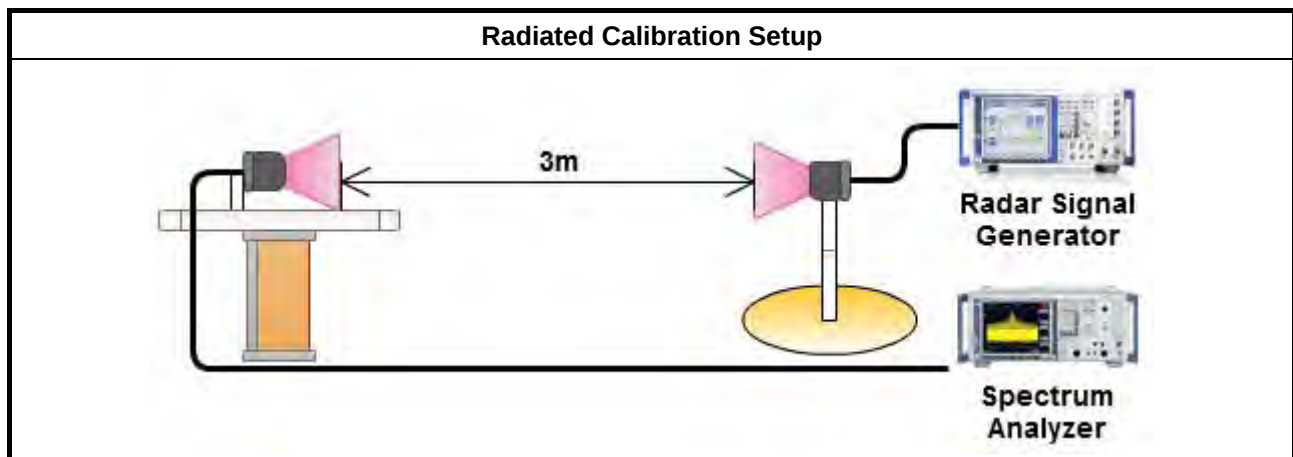


Radar #0 DFS detection threshold level

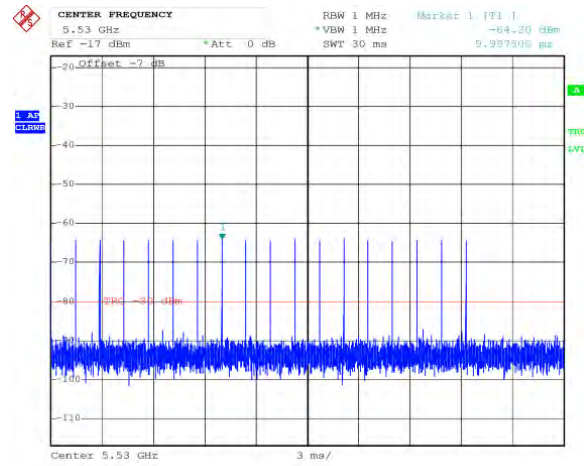


Calibration Plots


Radar #1 DFS detection threshold level

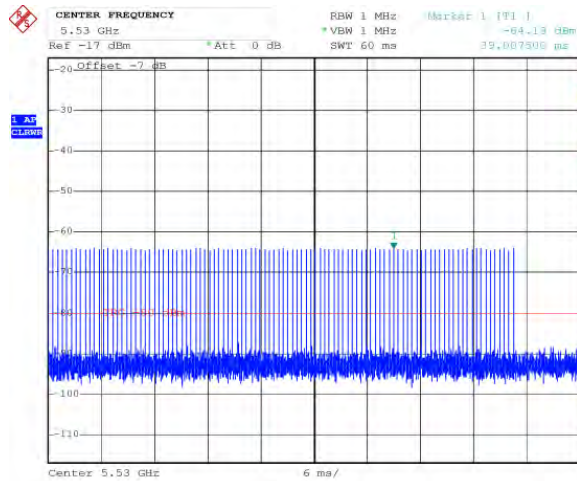


Radar #4 DFS detection threshold level

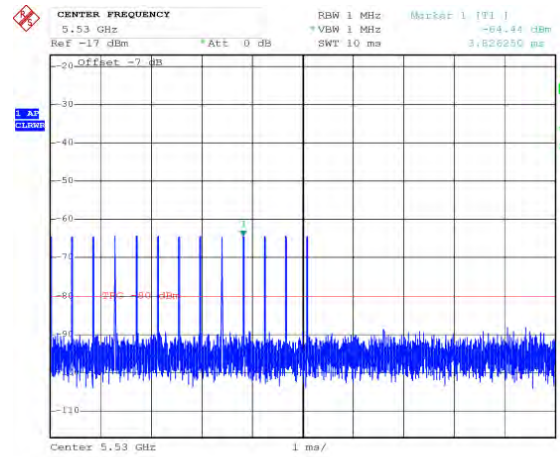


Radar #2 DFS detection threshold level

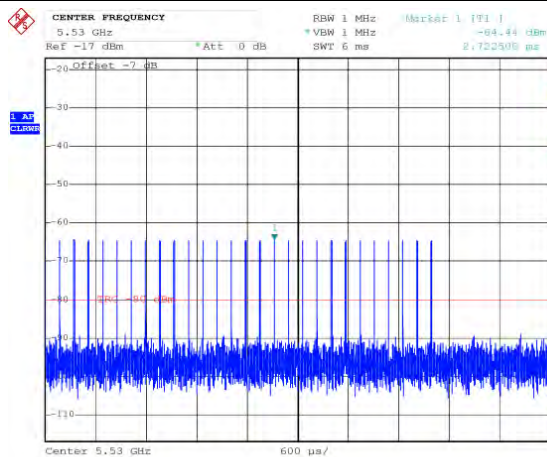


Radar #5 DFS detection threshold level

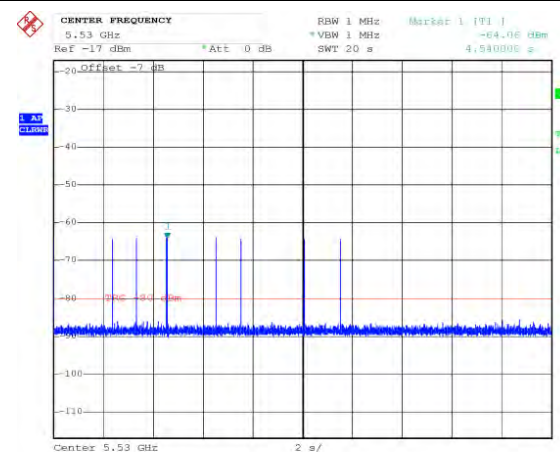

Radar #3 DFS detection threshold level

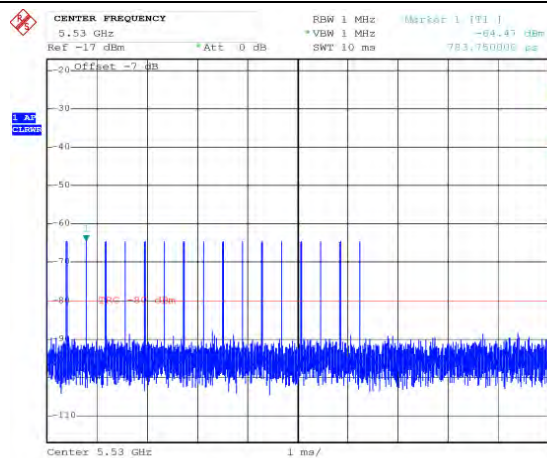


Radar #6 DFS detection threshold level

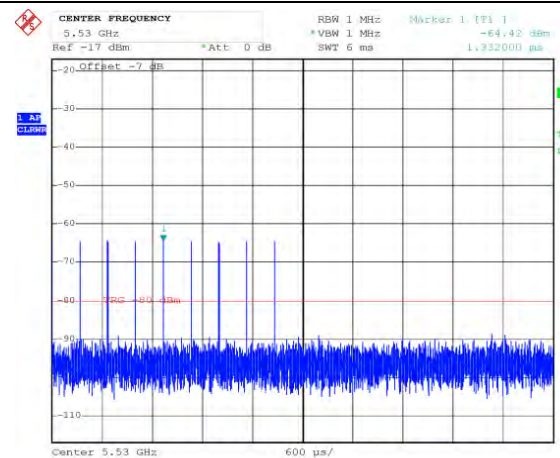


3.2.6 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

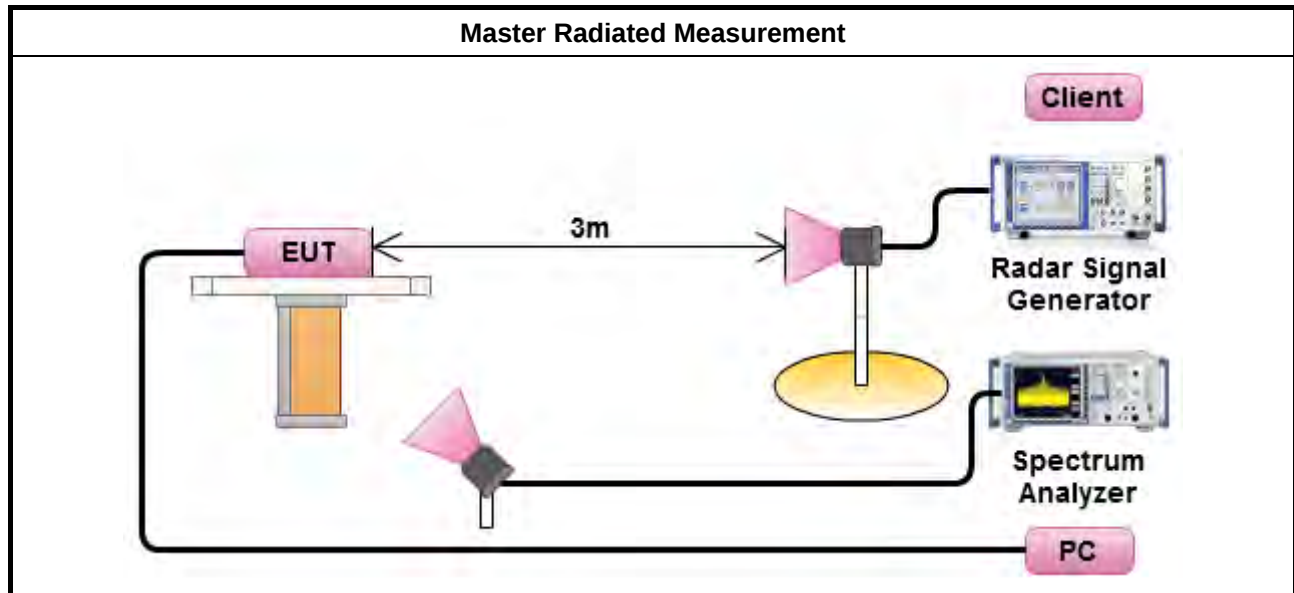


Verification that when the EUT is "off" that the RF energy emitted Plots


Without Data Traffic Plot (Noise Plot)

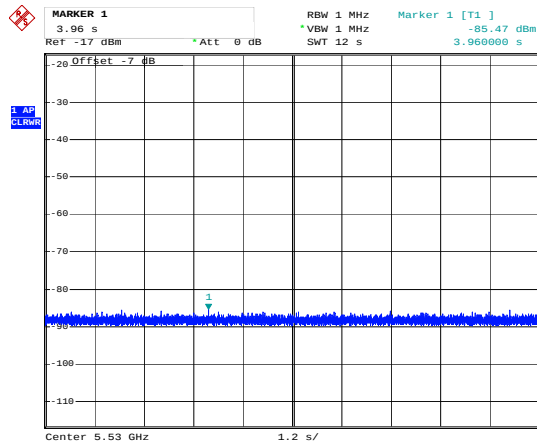

Master (EUT) Data Traffic Plot

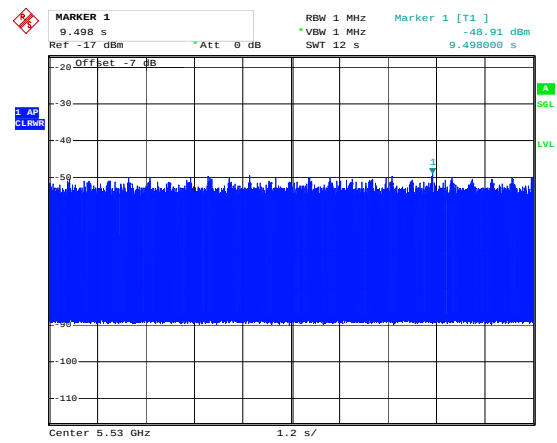

Client Data Traffic Plot

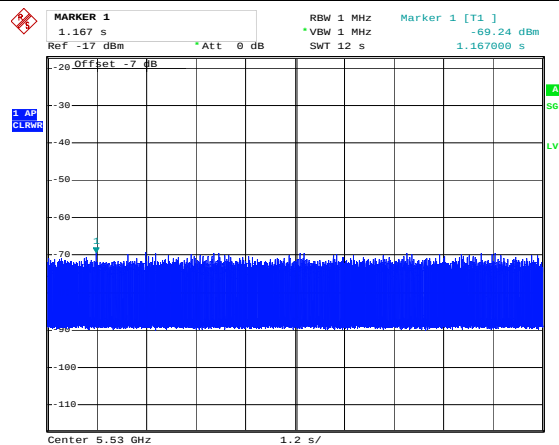

3.3 UNII Detection Bandwidth

3.3.1 UNII Detection Bandwidth Limit

Channel Bandwidth (MHz)	99% Power Bandwidth (MHz)
20	17.695
40	35.64375
80	75.7125

During the U-NII Detection Bandwidth detection test, any one of radar types 0 - and radar type 5 can be used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. The 99% power bandwidth is measured with 100 kHz resolution bandwidth.

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.3.3 Test Procedures

Test Method

- ☒ Refer as FCC 06-96 Appendix, clause 7.8.1 for UNII Detection Bandwidth test. During the U-NII Detection Bandwidth detection test, radar type 0 and 5 are used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. The EUT is set up as a standalone device (no associated Client and no traffic). The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H . The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L . UNII Detection Bandwidth = $F_H - F_L$.


Emission Bandwidth Plots

VHT20

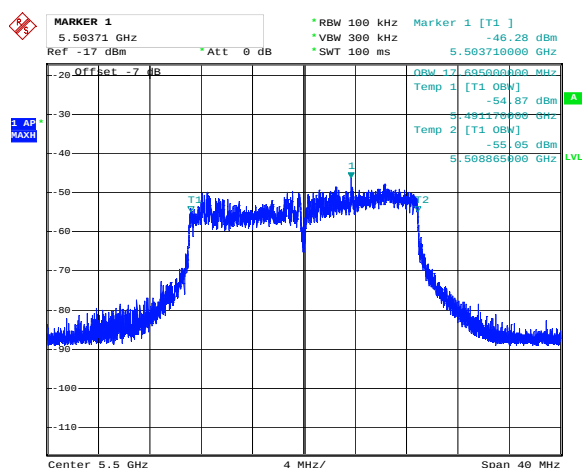

Date: 31.JUL.2015 15:39:58


VHT40

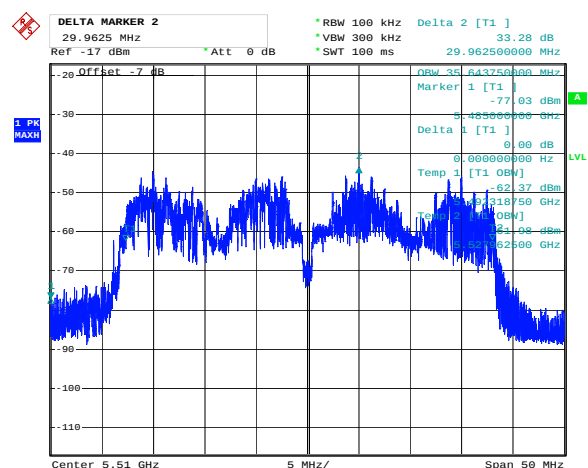

Date: 31.JUL.2015 18:02:22



VHT80

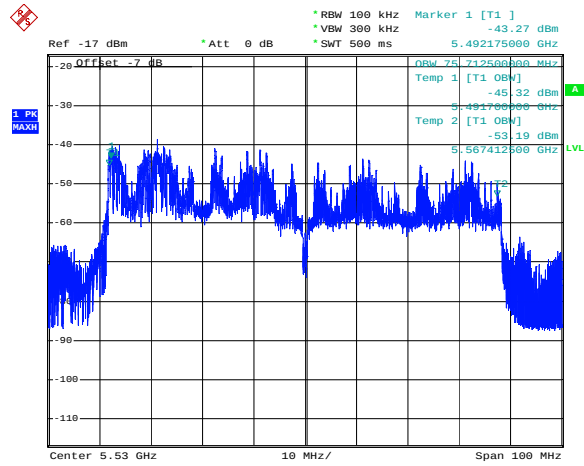

Date: 1.AUG.2015 09:49:20

3.3.4 Test Result of UNII Detection Bandwidth

Channel Bandwidth 20MHz

UNII Detection Bandwidth Result												
Radar Type		0										
Channel Bandwidth (MHz)		20										
Radar Freq. (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)											Detection Bandwidth (MHz)
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)	
5490	1	1	1	1	1	1	1	1	1	1	100	21
5495	1	1	1	1	1	1	1	1	1	1	100	
5500	1	1	1	1	1	1	1	1	1	1	100	
5505	1	1	1	1	1	1	1	1	1	1	100	
5510	1	1	1	1	1	1	1	1	1	1	100	
Limit (MHz)												17.695
Result												Complied

Channel Bandwidth 40MHz

UNII Detection Bandwidth Result													
Radar Type				0									
Channel Bandwidth (MHz)				40									
Radar Freq. (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)											Detection Rate (%)	Detection Bandwidth (MHz)
	1	2	3	4	5	6	7	8	9	10			
5490	0	0	0	0	0	0	0	0	0	0	0	39	
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	0	0	0	0	0	0	0	0	0	0	0		
Limit (MHz)												35.64375	
Result												Complied	

Channel Bandwidth 80MHz

UNII Detection Bandwidth Result												
Radar Type		0										
Channel Bandwidth (MHz)		80										
Radar Freq. (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)	Detection Bandwidth (MHz)
	1	2	3	4	5	6	7	8	9	10		
5490	1	1	1	1	1	1	1	1	1	1	100	81
5495	1	1	1	1	1	1	1	1	1	1	100	
5500	1	1	1	1	1	1	1	1	1	1	100	
5505	1	1	1	1	1	1	1	1	1	1	100	
5510	1	1	1	1	1	1	1	1	1	1	100	
5515	1	1	1	1	1	1	1	1	1	1	100	
5520	1	1	1	1	1	1	1	1	1	1	100	
5525	1	1	1	1	1	1	1	1	1	1	100	
5530	1	1	1	1	1	1	1	1	1	1	100	
5535	1	1	1	1	1	1	1	1	1	1	100	
5540	1	1	1	1	1	1	1	1	1	1	100	
5545	1	1	1	1	1	1	1	1	1	1	100	
5550	1	1	1	1	1	1	1	1	1	1	100	
5555	1	1	1	1	1	1	1	1	1	1	100	
5560	1	1	1	1	1	1	1	1	1	1	100	
5565	1	1	1	1	1	1	1	1	1	1	100	
5570	1	1	1	1	1	1	1	1	1	1	100	
Limit (MHz)												75.7125
Result												Complied

3.4 Channel Availability Check (CAC)

3.4.1 Channel Availability Check Limit

Channel Availability Check Limit	
☒	The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute (60 sec) on the intended operating frequency.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Refer as FCC 06-96 Appendix, clause 7.8.2.1 for Initial Channel Availability Check Time. The EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the UNII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.
☒	Refer as FCC 06-96 Appendix, clause 7.8.2.2 for Radar Burst at the Beginning of the Channel Availability Check Time. To verify successful radar detection on the selected Channel during a period equal to the Beginning of the Channel Availability Check Time.
☒	Refer as FCC 06-96 Appendix, clause 7.8.2.3 for Radar Burst at the End of the Channel Availability Check Time. To verify successful radar detection on the selected Channel during a period equal to the End of the Channel Availability Check Time.

Channel Availability Check Time Result

Modulation Mode	Freq. (MHz)	Radar Type Signal	Beginning CAC of Timing of radar burst (sec)	End CAC of Timing of radar burst (sec)	DFS Triggered (Yes/No)
VHT80	5530	1	6	54	Yes
Result			Complied		

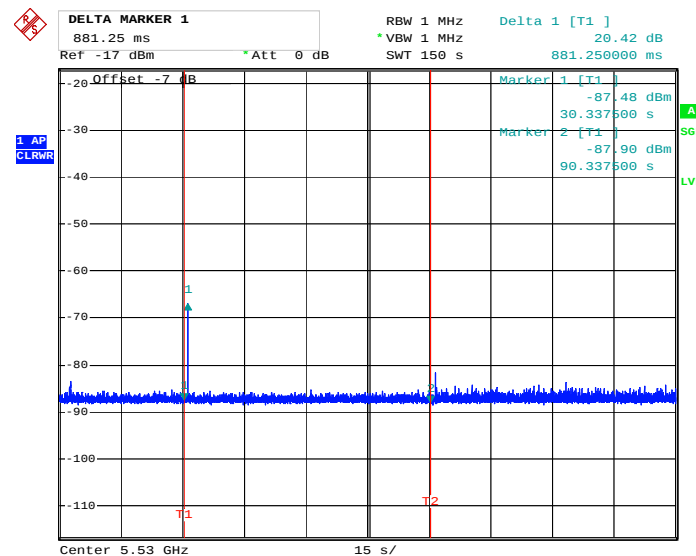Beginning CAC of 150s Timing Plot


Date: 1.AUG.2015 06:58:37

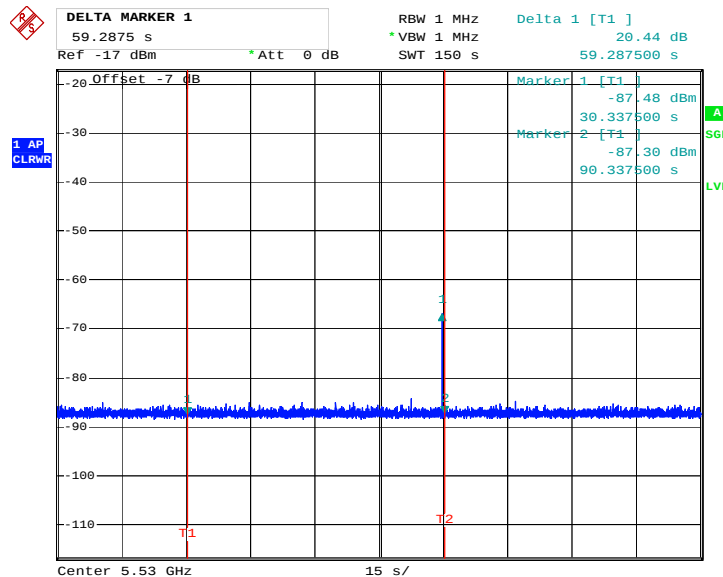End CAC of 150s Timing Plot


Date: 1.AUG.2015 07:05:02

3.5 In-service Monitoring

3.5.1 In-service Monitoring Limit

In-service Monitoring Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.
Non-occupancy period	Minimum 30 minutes


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures



Test Method
☒ Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
☒ Refer as FCC 06-96 Appendix, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 0 in a 12 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
☒ Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

3.5.4 Test Result of In-service Monitoring

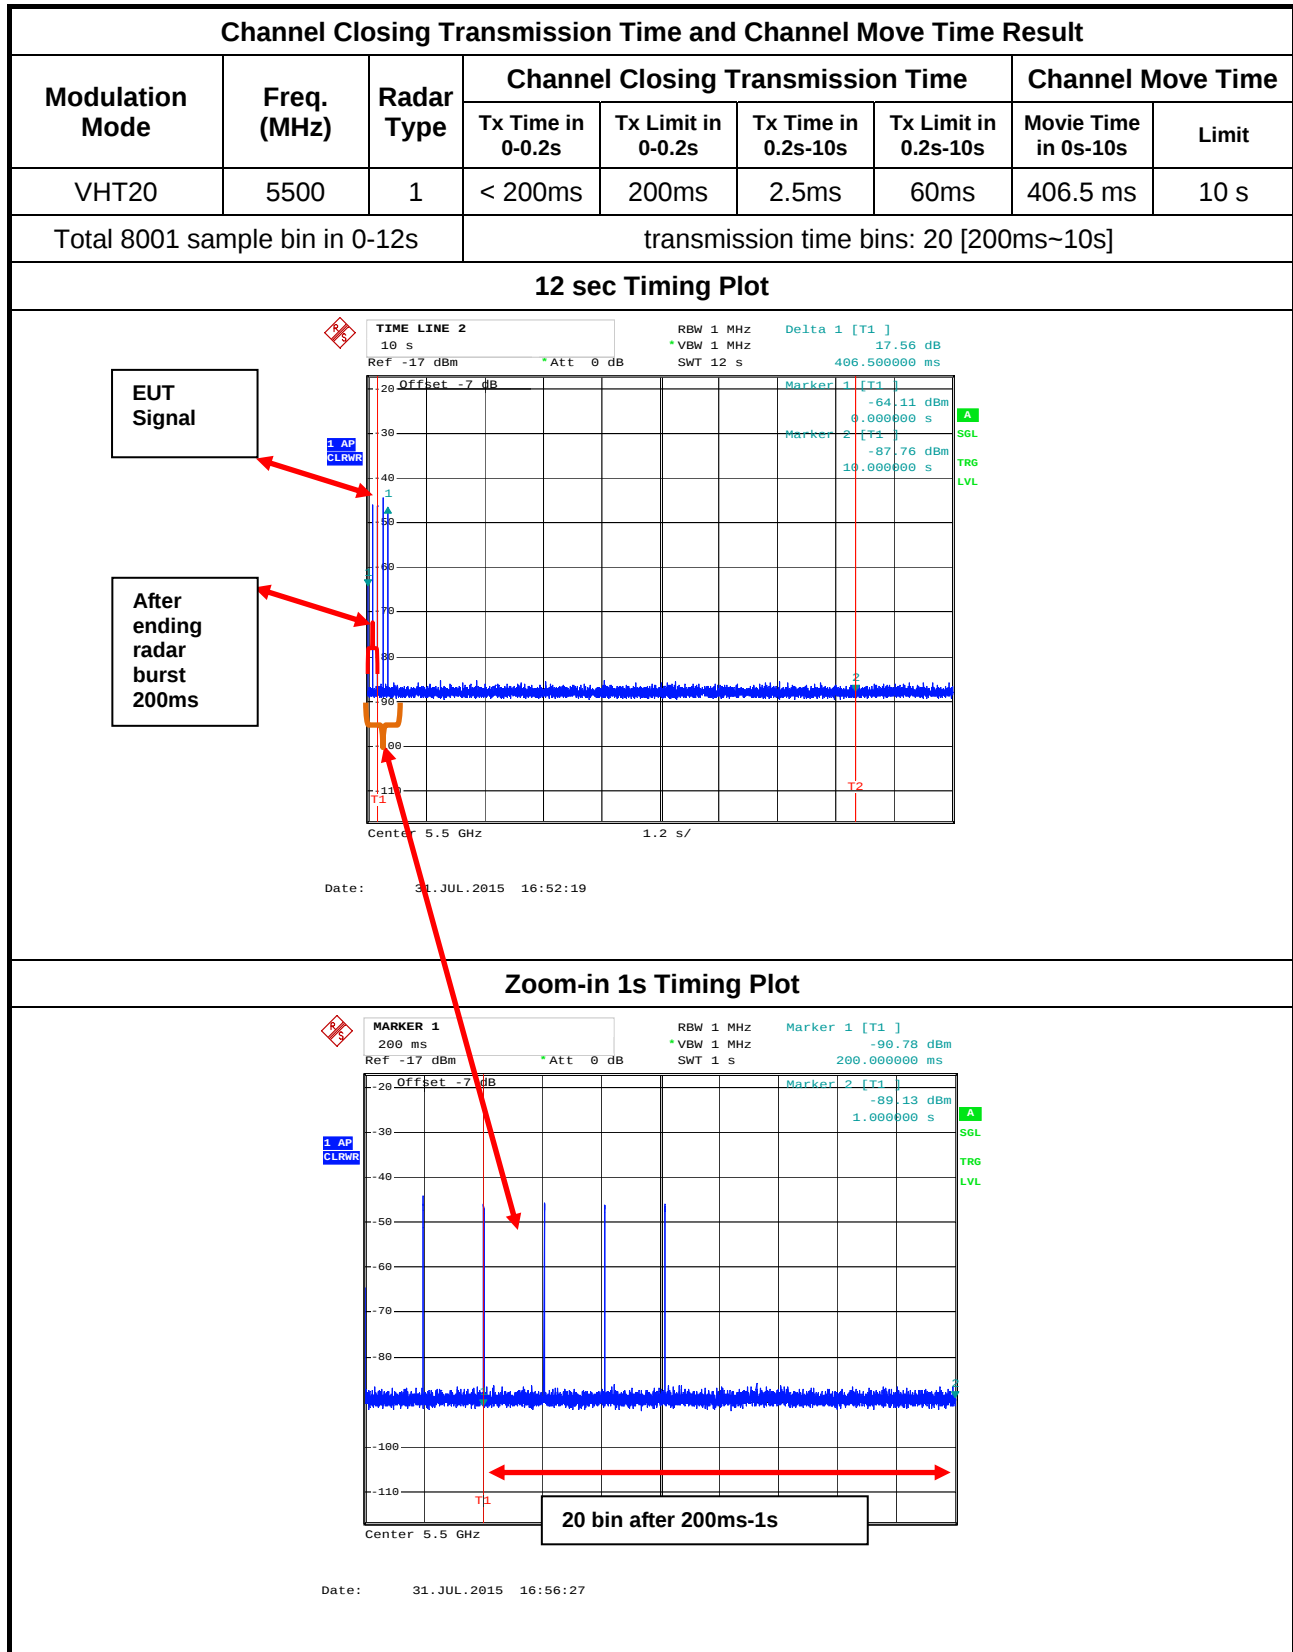



Channel Closing Transmission Time and Channel Move Time Result

Modulation Mode	Freq. (MHz)	Radar Type	Channel Closing Transmission Time				Channel Move Time	
			Tx Time in 0-0.2s	Tx Limit in 0-0.2s	Tx Time in 0.2s-10s	Tx Limit in 0.2s-10s	Movie Time in 0s-10s	Limit
VHT40	5510	1	< 200ms	200ms	1.75ms	60ms	507 ms	10s
Total 8001 sample bin in 0-12s			transmission time bins: 14 [200ms~10s]					

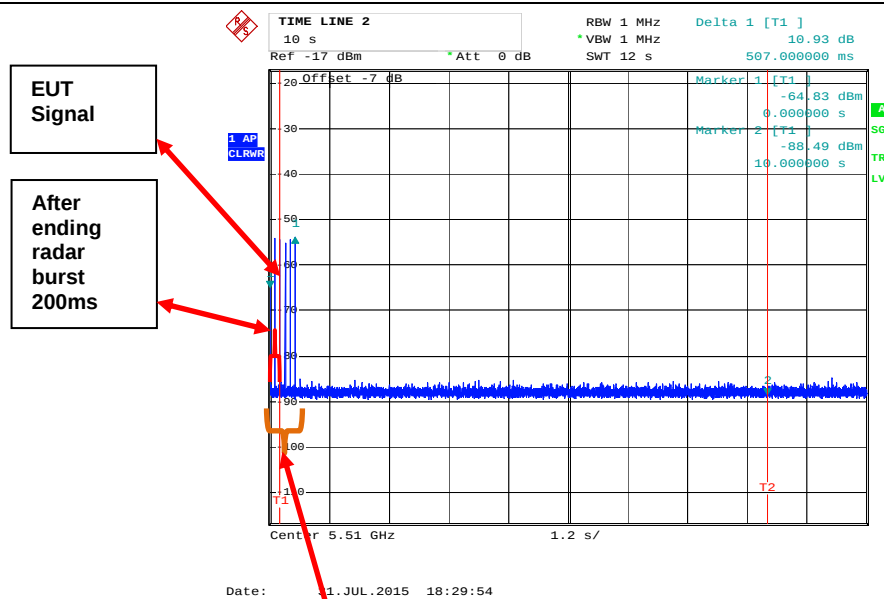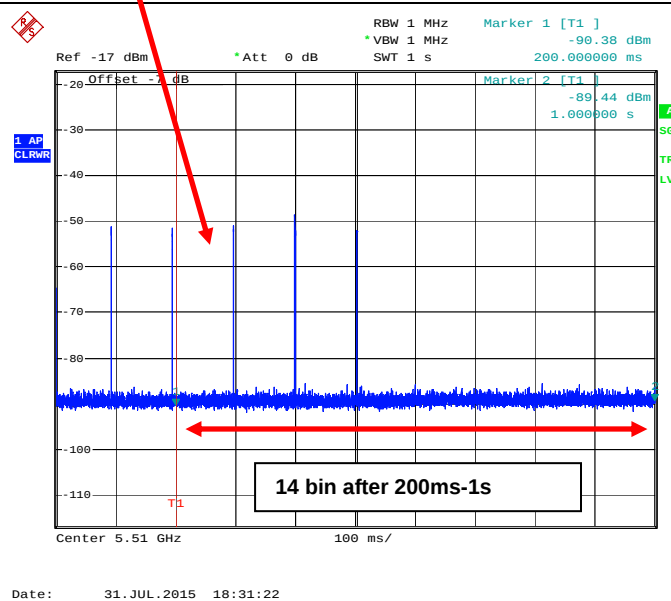12 sec Timing Plot

Zoom-in 1s Timing Plot


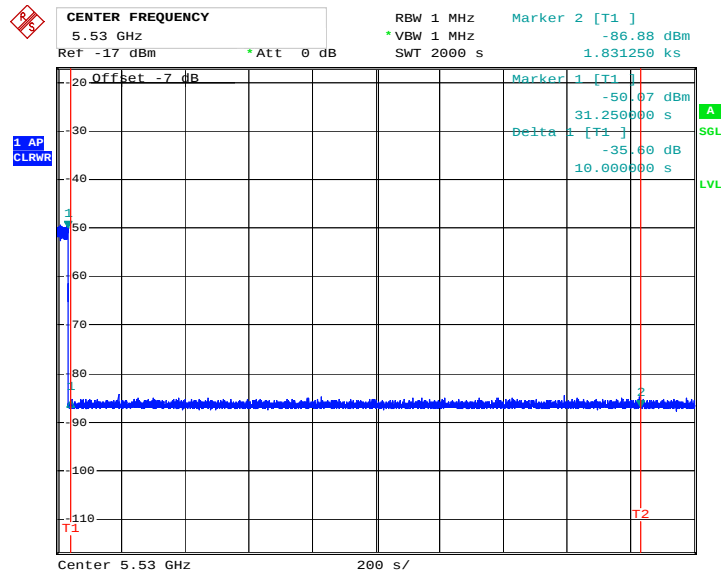
Channel Closing Transmission Time and Channel Move Time Result

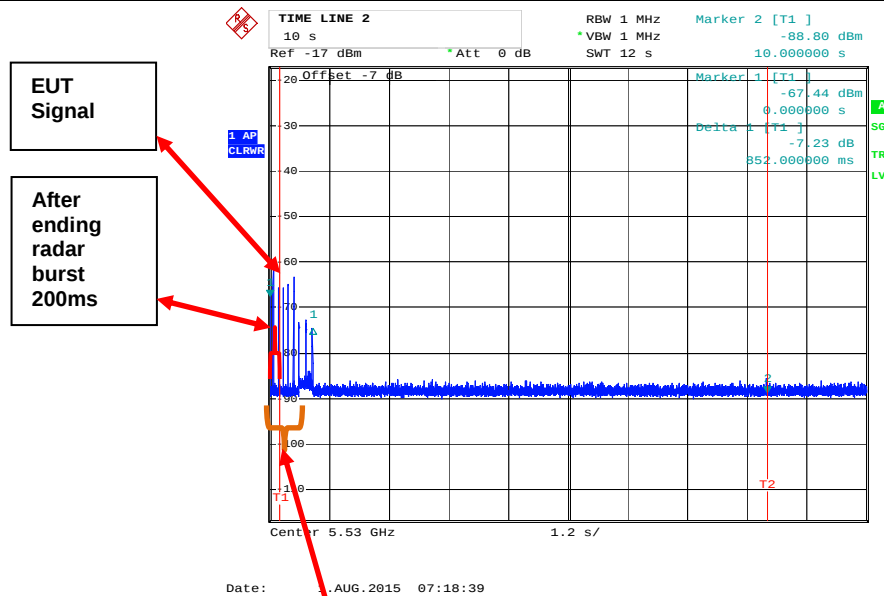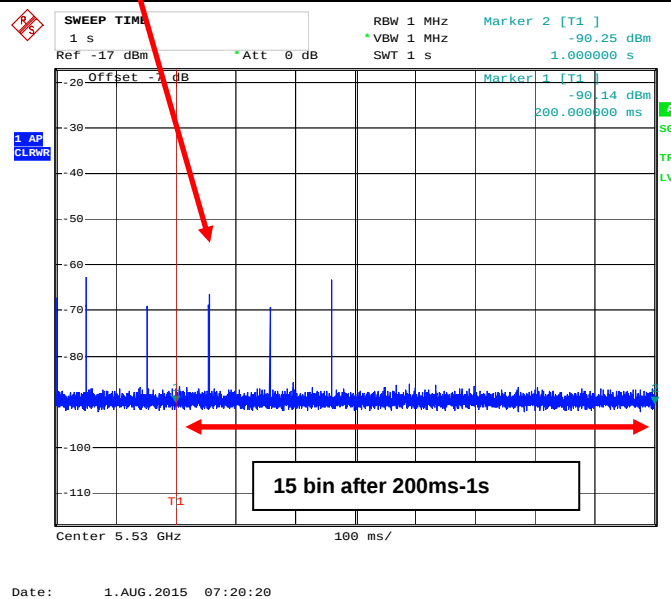Modulation Mode	Freq. (MHz)	Radar Type	Channel Closing Transmission Time				Channel Move Time	
			Tx Time in 0-0.2s	Tx Limit in 0-0.2s	Tx Time in 0.2s-10s	Tx Limit in 0.2s-10s	Movie Time in 0s-10s	Limit
VHT80	5530	1	< 200ms	200ms	1.875ms	60ms	852 ms	10s
Total 8001 sample bin in 0-12s			transmission time bins: 15 [200ms~10s]					

12 sec Timing Plot

Zoom-in 1s Timing Plot


Non-Occupancy Period Result

Modulation Mode	Freq. (MHz)	Non-Occupancy Period		
		Measured	Limit	Result
VHT80	5530 (F3")	>30min	30min	Complied

2000 sec Timing Plot


Date: 1.AUG.2015 09:44:24

3.6 Statistical Performance Check

3.6.1 Statistical Performance Check Limit

Radar Type	Minimum Percentage of Successful Detection (Pd)	Minimum Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{Pd1 + Pd2 + Pd3 + Pd4}{4}$$

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method
☒ Refer as FCC 06-96 Appendix, clause 7.8.4 for Statistical Performance Check test. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test. Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs. Then Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

3.6.4 Test Result of Statistical Performance Check

Statistical Performance Check Result – VHT20					
Radar Signal (#)	Test Trail #	Detect Trail #	Pd (%)	Limit Pd (%)	Result
1	30	30	100	60	Complied
2	30	30	100	60	Complied
3	30	30	100	60	Complied
4	30	30	100	60	Complied
Aggregate 1 - 4	120	120	100	80	Complied
5	30	30	100	80	Complied
6	30	30	100	70	Complied

Statistical Performance Check Result – VHT40					
Radar Signal (#)	Test Trail #	Detect Trail #	Pd (%)	Limit Pd (%)	Result
1	30	30	100	60	Complied
2	30	30	100	60	Complied
3	30	30	100	60	Complied
4	30	30	100	60	Complied
Aggregate 1 - 4	120	120	100	80	Complied
5	30	30	100	80	Complied
6	30	30	100	70	Complied

Statistical Performance Check Result – VHT80					
Radar Signal (#)	Test Trail #	Detect Trail #	Pd (%)	Limit Pd (%)	Result
1	30	30	100	60	Complied
2	30	30	100	60	Complied
3	30	30	100	60	Complied
4	30	30	100	60	Complied
Aggregate 1 - 4	120	120	100	80	Complied
5	30	30	100	80	Complied
6	30	30	100	70	Complied

3.6.5 Detection Data Sheet for Radar Types 1, 5, and 6

Radar Type	5			6		
Trail #	VHT20 _{*1}	VHT40	VHT80 _{*1}	VHT20 _{*1}	VHT40	VHT80 _{*1}
1	1	1	1	1	1	1
2	1	1	1	1	1	1
3	1	1	1	1	1	1
4	1	1	1	1	1	1
5	1	1	1	1	1	1
6	1	1	1	1	1	1
7	1	1	1	1	1	1
8	1	1	1	1	1	1
9	1	1	1	1	1	1
10	1	1	1	1	1	1
11	1	1	1	1	1	1
12	1	1	1	1	1	1
13	1	1	1	1	1	1
14	1	1	1	1	1	1
15	1	1	1	1	1	1
16	1	1	1	1	1	1
17	1	1	1	1	1	1
18	1	1	1	1	1	1
19	1	1	1	1	1	1
20	1	1	1	1	1	1
21	1	1	1	1	1	1
22	1	1	1	1	1	1
23	1	1	1	1	1	1
24	1	1	1	1	1	1
25	1	1	1	1	1	1
26	1	1	1	1	1	1
27	1	1	1	1	1	1
28	1	1	1	1	1	1
29	1	1	1	1	1	1
30	1	1	1	1	1	1
Pd (%)	100	100	100	100	100	100
Note 1: 1=Detection ;0=No Detection						



Radar Type	1					
Trail #	Pulse Width (us)	PRI (us)	Pulses / Burst	VHT20_{*1}	VHT40_{*1}	VHT80_{*1}
1	1	518	102	1	1	1
2	1	538	99	1	1	1
3	1	558	95	1	1	1
4	1	578	92	1	1	1
5	1	598	89	1	1	1
6	1	618	89	1	1	1
7	1	638	83	1	1	1
8	1	658	81	1	1	1
9	1	678	78	1	1	1
10	1	698	76	1	1	1
11	1	718	74	1	1	1
12	1	738	72	1	1	1
13	1	758	70	1	1	1
14	1	778	68	1	1	1
15	1	798	67	1	1	1
16	1	591	90	1	1	1
17	1	627	85	1	1	1
18	1	703	76	1	1	1
19	1	822	65	1	1	1
20	1	955	56	1	1	1
21	1	1046	51	1	1	1
22	1	1134	47	1	1	1
23	1	1248	43	1	1	1
24	1	1349	40	1	1	1
25	1	1590	34	1	1	1
26	1	1678	32	1	1	1
27	1	1741	31	1	1	1
28	1	1845	29	1	1	1
29	1	1932	28	1	1	1
30	1	2047	26	1	1	1
Detection Percentage (%)				100	100	100
Note 1: 1=Detection ;0=No Detection						

3.6.6 Data Sheet for Radar Type 2

Radar Type	2					
Trail #	Pulse Width (us)	PRI (us)	Pulses / Burst	VHT20 _{*1}	VHT40 _{*1}	VHT80 _{*1}
1	3.6	170	28	1	1	1
2	4.7	179	27	1	1	1
3	4.3	213	29	1	1	1
4	2.1	200	27	1	1	1
5	4.5	189	27	1	1	1
6	2.3	230	28	1	1	1
7	2.1	155	23	1	1	1
8	4.2	168	26	1	1	1
9	1.9	158	24	1	1	1
10	2	221	23	1	1	1
11	4	228	28	1	1	1
12	2.1	189	27	1	1	1
13	2	228	27	1	1	1
14	4.9	210	27	1	1	1
15	3.8	180	27	1	1	1
16	1.9	190	25	1	1	1
17	2.9	223	26	1	1	1
18	1.7	169	26	1	1	1
19	1.7	207	25	1	1	1
20	1.7	175	28	1	1	1
21	1.1	152	29	1	1	1
22	1.6	168	27	1	1	1
23	1.8	177	25	1	1	1
24	2.8	198	27	1	1	1
25	4	151	27	1	1	1
26	3	155	28	1	1	1
27	1.4	188	24	1	1	1
28	2	178	25	1	1	1
29	3.3	173	25	1	1	1
30	2.8	208	28	1	1	1
Detection Percentage (%)				100	100	100
Note 1: 1=Detection ;0=No Detection						

3.6.7 Data Sheet for Radar Type 3

Radar Type	3					
Trail #	Pulse Width (us)	PRI (us)	Pulses / Burst	VHT20 ₋₁	VHT40	VHT80 ₋₁
1	6.4	390	17	1	1	1
2	9.1	410	17	1	1	1
3	9.4	490	17	1	1	1
4	7.6	395	17	1	1	1
5	7.9	201	17	1	1	1
6	9.1	227	16	1	1	1
7	7.8	477	16	1	1	1
8	7.2	497	16	1	1	1
9	7.9	491	16	1	1	1
10	8.5	304	16	1	1	1
11	10	443	17	1	1	1
12	8.1	264	18	1	1	1
13	7.7	461	17	1	1	1
14	6.1	242	17	1	1	1
15	7.8	331	18	1	1	1
16	7.8	481	17	1	1	1
17	6.6	325	18	1	1	1
18	6.6	239	17	1	1	1
19	6	258	17	1	1	1
20	6.8	464	18	1	1	1
21	9.1	288	17	1	1	1
22	6.1	375	17	1	1	1
23	8.8	377	17	1	1	1
24	9.5	293	17	1	1	1
25	9.1	437	18	1	1	1
26	6.7	290	17	1	1	1
27	7.2	481	16	1	1	1
28	9.4	315	18	1	1	1
29	6.9	356	17	1	1	1
30	9.6	385	16	1	1	1
Detection Percentage (%)				100	100	100
Note 1: 1=Detection ;0=No Detection						

3.6.8 Data Sheet for Radar Type 4

Radar Type	4					
Trail #	Pulse Width (us)	PRI (us)	Pulses / Burst	VHT20 ₋₁	VHT40	VHT80 ₋₁
1	18.2	424	13	1	1	1
2	17	283	15	1	1	1
3	11.4	386	12	1	1	1
4	14.2	471	13	1	1	1
5	13.9	399	15	1	1	1
6	18.7	252	14	1	1	1
7	11.4	370	12	1	1	1
8	17.5	283	15	1	1	1
9	14.1	391	16	1	1	1
10	16.4	229	15	1	1	1
11	15.8	327	14	1	1	1
12	18.8	317	15	1	1	1
13	17.7	433	13	1	1	1
14	16.3	312	15	1	1	1
15	15	486	16	1	1	1
16	16.9	393	14	1	1	1
17	19.3	354	12	1	1	1
18	15.2	353	13	1	1	1
19	14	478	13	1	1	1
20	16	408	16	1	1	1
21	16.4	317	12	1	1	1
22	19.2	464	14	1	1	1
23	16.2	301	12	1	1	1
24	11.1	226	14	1	1	1
25	14	315	16	1	1	1
26	15.7	293	12	1	1	1
27	19.3	398	14	1	1	1
28	15.7	324	15	1	1	1
29	15.4	394	13	1	1	1
30	15.5	376	13	1	1	1
Detection Percentage (%)				100	100	100
Note 1: 1=Detection ;0=No Detection						

3.6.9 Parameter Data Sheet for Radar Type 5

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	1	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	62.3	8	-	-	346
2	2	51.2	15	1745	-	2705
3	3	93.6	5	957	1634	3674
4	3	68.2	12	1668	1573	4884
5	3	83.1	8	1188	1888	6876
6	1	56.7	18	-	-	7876
7	2	60.6	18	1874	-	10409
8	3	75.5	13	1263	1683	11878

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	2	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	99.6	13	-	-	217
2	2	54.8	15	1727	-	2315.333
3	3	91.1	15	1120	1826	3607.666
4	2	76.2	7	1638		4476.999
5	1	88.9	13	-	-	5592.332
6	1	83	9	-	-	7558.665
7	1	83.9	12	-	-	8319.998
8	2	55.9	15	1613	-	9778.331
9	1	96.1	13	-	-	11445.664

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	3	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	82	6	1246	-	1017
2	1	93.2	13	-	-	1960
3	2	61.3	13	1175	-	2727
4	1	52.8	8	-	-	4424
5	3	70.6	19	929	1076	4915
6	1	80.3	17	-	-	6325
7	1	83.2	15	-	-	7879
8	2	94	9	1805	-	9288
9	2	67	8	1486	-	10449
10	1	56.4	20	-	-	11613

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	4	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	90.5	8	1149	1612	35
2	3	54.5	8	1094	1525	2104.909
3	1	57.1	18	-	-	3008.818
4	2	98.6	20	1292	-	3355.727
5	2	62.9	12	1433	-	5039.636
6	1	71.1	15	-	-	6162.545
7	1	96.7	5	-	-	7256.454
8	1	64.3	5	-	-	8120.363
9	3	61.2	8	1075	1524	9171.272
10	2	79.2	13	1877	-	10615.181
11	2	79.3	20	1313	-	11197.09

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	5	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	89.5	13	-	-	20
2	3	71.8	11	1446	1549	1117
3	3	53.7	15	1100	1517	2485
4	2	99.3	11	1571	-	3334
5	3	56.8	6	1594	1280	4468
6	1	97.4	11	-	-	5213
7	2	67.6	13	1831	-	6014
8	3	77.1	8	1683	1337	7267
9	1	98.5	17	-	-	8544
10	3	58.3	13	1924	1829	9159
11	1	98.4	14	-	-	10380
12	1	79.3	11	-	-	11257

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	6	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	53.8	14	1631	-	768
2	1	90	17	-	-	1453.077
3	3	87.2	18	1115	1297	2003.154
4	2	82	11	1728	-	3661.231
5	3	69.8	7	1641	1779	3888.308
6	2	63.1	20	1836	-	4946.385
7	1	59.8	6	-	-	6033.462
8	3	78.5	19	941	1921	7007.539
9	1	85.7	6	-	-	7603.616
10	3	67.7	9	1834	1450	8841.693
11	2	84.5	15	1376	-	9512.77
12	2	99.3	13	1570	-	10639.847
13	2	80.2	8	1088	-	11143.924



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	7	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	80.8	10	1061	1124	389
2	2	81	9	1479	-	1091.143
3	2	87.6	17	1247	-	2291.286
4	2	94.7	18	1041	-	3143.429
5	2	78	18	1267	-	3741.572
6	1	95.5	14	-	-	4337.715
7	2	97.6	15	1215	-	5199.858
8	3	88	9	1349	1598	6171.001
9	2	69.7	17	1711	-	7626.144
10	2	96.5	17	1431	-	7882.287
11	2	96.9	6	1871	-	8695.43
12	3	66.4	10	1824	1468	10194.573
13	1	78.8	10	-	-	10822.716
14	3	87.6	6	1080	1159	11856.859



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	8	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	71.8	14	1432	-	573
2	2	65.9	19	1762	-	1114
3	2	74.7	6	1754	-	1977
4	3	81.7	5	1133	974	2616
5	3	57.8	14	1176	1712	3329
6	1	80.6	6	-	-	4341
7	3	99.3	17	1268	1876	4965
8	1	79.8	12	-	-	6218
9	3	83	11	990	1738	6989
10	3	71.5	11	1473	1255	7206
11	1	77.4	11	-	-	8127
12	2	84.8	12	1390	-	9315
13	2	64.6	12	1653	-	9748
14	2	92.9	12	1881	-	10919
15	1	71.3	6	-	-	11501



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	9	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	55.4	9	1318	-	383
2	2	80.8	18	1710	-	1284
3	1	88.8	9	-	-	1995
4	2	78	12	1818	-	2342
5	1	78.5	12	-	-	3108
6	2	55	13	1219	-	3873
7	2	75.9	20	1004	-	4623
8	2	70.9	7	1820	-	5796
9	2	71.7	18	1559	-	6476
10	2	73.9	19	1232	-	6985
11	1	59.2	20	-	-	7924
12	1	55.7	9	-	-	8641
13	3	60.9	12	1144	1370	9198
14	2	60.8	14	990	-	9766
15	3	60.6	19	1526	1326	11195
16	2	89	5	1029	-	11381



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	10	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	72.1	14	1119	-	488
2	3	81.4	13	1142	961	1156.882
3	3	92.9	18	991	1147	1976.764
4	3	81.3	18	1793	1369	2402.646
5	3	76.4	20	1005	1793	2902.528
6	1	61.6	18	-	-	4032.41
7	1	66.6	19	-	-	4416.292
8	1	53.7	12	-	-	5357.174
9	2	58	8	1477	-	5754.056
10	2	64	18	1791	-	6493.938
11	2	80.3	12	1304	-	7574.82
12	3	77.3	5	1039	1668	8136.702
13	2	97.6	11	1593	-	8633.584
14	1	73	6	-	-	9323.466
15	3	65.1	8	1097	1927	9984.348
16	2	59.5	13	1569	-	10770.23
17	1	88.2	19	-	-	11947.112



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	11	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	56.1	12	1219	-	273
2	1	83.3	7	-	-	964.666
3	3	79.6	17	1218	1897	1492.333
4	2	95.8	7	1672	-	2480
5	2	79.6	8	920	-	3053.667
6	2	88.9	11	1779	-	3338.334
7	2	81.4	8	1645	-	4201.001
8	2	92	6	1454	-	4746.668
9	3	96	13	1518	1121	5525.335
10	2	65.6	11	1798	-	6349.002
11	2	98.7	5	1360	-	7082.669
12	2	52.9	15	1140	-	7985.336
13	2	76.5	8	1032	-	8092.003
14	3	73.8	18	1719	1383	9168.67
15	3	83.7	10	1270	1216	9676.337
16	2	89.6	10	1141	-	10108.004
17	2	67.2	20	1455	-	10938.671
18	3	55.7	14	1444	1475	11899.338



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	12	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	70.6	15	1040	-	575
2	2	72.9	13	1460	-	809.579
3	3	88.9	5	1250	1629	1454.158
4	3	60.3	20	1757	1822	2362.737
5	3	92.1	19	1845	1198	3002.316
6	1	73	5	-	-	3689.895
7	1	50.4	15	-	-	3858.474
8	1	66.4	10	-	-	4754.053
9	1	79.1	18	-	-	5489.632
10	1	71.6	20	-	-	6108.211
11	2	95.6	13	1229	-	6813.79
12	1	74.4	9	-	-	7310.369
13	3	55.6	17	1263	1724	7701.948
14	2	78.3	13	1507	-	8247.527
15	3	54.1	13	1325	1249	9034.106
16	2	67.1	18	1584	-	9784.685
17	2	65.8	9	1195	-	10348.264
18	2	50.1	12	1755	-	10784.843
19	2	87.7	18	1359	-	11548.422

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	13	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	79.5	7	1808	1550	274
2	2	76.7	20	1632	-	1173
3	3	85.9	12	1305	1496	1218
4	3	86.6	14	968	1172	1933
5	2	74.9	14	1348	-	2448
6	3	82.2	20	1692	1310	3156
7	2	53.9	13	1342	-	3645
8	3	62.7	15	1839	1651	4276
9	2	86.2	6	1165	-	4891
10	1	63.1	11	-	-	5791
11	2	82.4	6	1416	-	6107
12	1	95.8	18	-	-	6848
13	2	75.7	9	993	-	7682
14	3	70.1	18	1563	1020	8154
15	3	85.8	13	1420	1084	8846
16	1	63.2	7	-	-	9265
17	1	75.1	11	-	-	9747
18	2	69.5	5	1802	-	10456
19	1	51.8	19	-	-	11222
20	2	62.3	5	1449	-	11704

Statistical Performance Check Result

Radar Test Signal (#)		5		Trail #	14	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	74.9	5	1314	1466	1289
2	2	83.9	19	1442	-	2936
3	2	55.8	6	1147	-	3240
4	2	59.4	6	1490	-	5955
5	2	78.2	15	1665	-	7312
6	2	57.3	15	1357	-	7764
7	2	76.2	11	1651	-	9255
8	3	59	7	1460	1109	11910

Statistical Performance Check Result

Radar Test Signal (#)		5		Trail #	15	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	77.7	19	1046	1568	17
2	2	98.2	20	1628	-	2210.333
3	2	95.3	8	1540	-	3732.666
4	2	78.8	15	1341	-	4821.999
5	2	52.8	20	988	-	6353.332
6	2	65.2	9	1480	-	7268.665
7	2	99.5	10	1867	-	8883.998
8	2	79.5	13	1148	-	9675.331
9	3	50.6	13	1030	1525	11987.664

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	16	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	97.5	11	1357	-	764
2	2	91.8	13	1896	-	1498
3	1	78.5	5	-	-	3517
4	1	60.1	11	-	-	4669
5	2	96.2	10	975	-	5957
6	2	56.6	18	1626	-	6701
7	1	77.1	20	-	-	7523
8	2	96.3	8	1682	-	8707
9	2	52.2	13	1017	-	9817
10	1	92.8	15	-	-	11116

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	17	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	57.3	8	1220	-	792
2	3	73.1	5	1717	1679	1935.909
3	2	54.1	14	967	-	2293.818
4	2	98.8	19	1137	-	3987.727
5	3	85.5	8	1068	960	4664.636
6	2	78.5	7	1387	-	6281.545
7	2	77.9	12	1869	-	7051.454
8	1	81.9	10	-	-	8185.363
9	1	50.4	9	-	-	9191.272
10	1	75.2	8	-	-	10608.181
11	2	92.7	7	1770	-	11876.09

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	18	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	79.1	6	1042	-	793
2	3	55.7	9	1327	1744	1159
3	1	95	20	-	-	2734
4	1	88.4	5	-	-	3523
5	1	92.3	15	-	-	4546
6	1	93.6	6	-	-	5208
7	2	95.1	12	1044	-	6894
8	1	59.5	17	-	-	7666
9	2	98.7	17	1422	-	8640
10	2	65.1	5	1104	-	9320
11	1	60.2	5	-	-	10060
12	1	88.7	8	-	-	11823

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	19	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	53.9	10	-	-	226
2	2	82.6	13	992	-	1777.077
3	1	87.7	8	-	-	2149.154
4	3	69	12	1696	1606	3297.231
5	1	68.6	12	-	-	3912.308
6	3	76.5	13	1333	1468	5004.385
7	2	95.8	17	1380	-	5595.462
8	2	55.6	19	1147	-	6795.539
9	2	78.6	14	1268	-	7512.616
10	2	65.4	17	1231	-	9220.693
11	2	76.6	18	1883	-	9748.77
12	1	93.2	6	-	-	10749.847
13	2	50.2	13	1836	-	11137.924



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	20	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	60.9	13	-	-	142
2	2	81.7	15	1831	-	1379.143
3	2	78.5	5	1396	-	2504.286
4	2	98.2	6	1652	-	2574.429
5	1	64.1	12	-	-	3842.572
6	3	53	18	1862	1902	4442.715
7	2	62.3	15	1490	-	5390.858
8	2	87	11	1411	-	6576.001
9	2	78.4	8	1090	-	7594.144
10	2	87.2	7	967	-	8057.287
11	3	71	13	1662	1841	8676.43
12	2	77.2	5	1557	-	10029.573
13	1	94.4	15	-	-	10393.716
14	1	90.6	13	-	-	11648.859



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	21	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	76.5	8	1870	1326	385
2	2	95.3	13	1162	-	873
3	3	58.9	9	1586	1909	2342
4	2	73.1	13	1460	-	2730
5	2	73.1	12	1488	-	3225
6	2	75.1	5	1331	-	4418
7	3	98.5	11	936	1532	5014
8	3	72.5	13	1110	1903	5987
9	3	67.4	12	1567	1513	6480
10	2	76.1	12	1005	-	7477
11	2	94.3	17	1413	-	8314
12	2	72.8	12	1778	-	8866
13	2	90.9	14	1793	-	9747
14	3	94.8	11	1012	1742	10841
15	3	95	12	912	1641	11809



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	22	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	96.7	9	-	-	308
2	2	78.3	13	1045	-	777
3	1	56.5	12	-	-	1574
4	3	88.5	14	1119	1020	2879
5	2	62.4	9	1436	-	3548
6	2	78.2	5	1147	-	4091
7	3	76.8	14	1069	1575	4860
8	2	91.6	18	978	-	5852
9	2	93.7	5	1130	-	6623
10	2	97.4	8	1100	-	7006
11	3	90.1	6	1629	1375	7608
12	2	79.9	18	1809	-	8433
13	2	83	10	1370	-	9477
14	2	89.1	13	1239	-	10234
15	2	58.3	8	1321	-	10776
16	1	85.2	13	-	-	11272



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	23	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	60	10	1097	1748	56
2	3	66.3	13	1391	1430	1126.882
3	2	88.5	15	1040	-	1994.764
4	2	72.1	8	1526	-	2278.646
5	1	72.3	8	-	-	3273.528
6	2	67.3	7	1022	-	3577.41
7	2	56.1	12	1325	-	4896.292
8	1	83.5	11	-	-	5636.174
9	3	99.4	13	1490	938	6052.056
10	1	54.2	12	-	-	6478.938
11	3	92.7	17	1251	1631	7423.82
12	3	95.1	17	1741	1162	7821.702
13	2	84	9	1597	-	8637.584
14	1	68.5	18	-	-	9688.466
15	1	76.5	20	-	-	10067.348
16	3	86.6	11	1774	1875	11045.23
17	2	62.2	9	1563	-	11786.112

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	24	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	86.6	19	-	-	621
2	2	95.3	17	926	-	794.666
3	1	76.2	12	-	-	1584.333
4	3	71.4	19	1287	1404	2269
5	3	51.7	12	1564	1339	3299.667
6	2	77	5	1899	-	3948.334
7	1	87.5	12	-	-	4375.001
8	3	59	17	1327	1615	5276.668
9	2	78.3	15	1551	-	5881.335
10	2	89.7	5	1718	-	6456.002
11	2	92.1	7	1403	-	6678.669
12	2	97.3	14	1338	-	7929.336
13	3	80.3	20	1354	1563	8484.003
14	1	98.2	8	-	-	9094.67
15	3	94.4	13	1795	1829	9845.337
16	2	90.4	13	1105	-	10342.004
17	2	73.6	19	1787	-	10958.671
18	1	82.9	7	-	-	11951.338



Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	25	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	90	18	-	-	173
2	1	65.3	19	-	-	876.579
3	2	82.6	10	1756	-	1390.158
4	2	93.9	18	1557	-	2181.737
5	2	50.5	13	1479	-	2808.316
6	1	68	7	-	-	3333.895
7	3	88.4	11	1244	1076	4357.474
8	3	66.8	11	1288	1909	4869.053
9	2	88	12	1450	-	5579.632
10	3	51.1	6	1797	1935	5879.211
11	2	93.8	13	1073	-	6499.79
12	1	83.5	10	-	-	7453.369
13	2	96.9	12	1047	-	7845.948
14	3	87.2	18	1521	1450	8453.527
15	2	60.1	8	1545	-	9133.106
16	3	98	10	1842	1402	10027.685
17	3	57	19	1665	1732	10248.264
18	1	74.3	14	-	-	10767.843
19	2	57.8	10	1576	-	11977.422

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	26	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	92.8	9	1222	-	531
2	2	52.4	8	1547	-	768
3	3	56.8	7	1158	1184	1393
4	1	91.2	7	-	-	2365
5	3	61.2	10	1558	1664	2787
6	3	62	7	1518	1656	3391
7	2	69	5	1531	-	3927
8	2	67.3	18	1064	-	4225
9	1	94.1	5	-	-	4878
10	2	76	17	1190	-	5622
11	2	81.9	12	1815	-	6096
12	2	57.9	8	1594	-	6877
13	3	68.3	19	1427	1540	7241
14	2	53.3	7	1713	-	7848
15	2	85.3	15	1136	-	8448
16	1	65.3	20	-	-	9057
17	3	79.8	20	923	1259	9648
18	2	56.9	20	1357	-	10683
19	2	93	9	1686	-	10873
20	2	82.8	10	944	-	11752

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	27	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	50.9	11	1106	1077	1293
2	2	77.8	18	1836	-	2735
3	3	60.7	5	1069	1635	4092
4	2	77.2	13	1916	-	5843
5	2	91.6	13	1465	-	7466
6	2	56.8	17	1783	-	7876
7	1	59.5	20	-	-	9131
8	1	66.5	12	-	-	11524

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	28	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	2	72	9	1092	-	965
2	2	89.2	6	1550	-	2559.333
3	1	81.2	12	-	-	2943.666
4	2	80.6	15	1616	-	4457.999
5	2	62.8	10	1812	-	6081.332
6	1	71	8	-	-	7100.665
7	2	69.3	6	1027	-	9110.998
8	2	77.2	13	1076	-	9971.331
9	2	65.4	5	1582	-	10944.664

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	29	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	1	51.5	19	-	-	151
2	1	82.3	13	-	-	2271
3	3	78.3	8	1115	1740	3046
4	2	99	14	1101	-	4309
5	3	98.8	7	1819	945	5356
6	2	80.9	19	922	-	6567
7	2	64	12	953	-	7781
8	1	79	20	-	-	9198
9	1	68	8	-	-	9712
10	2	50.4	13	1587	-	10826

Statistical Performance Check Result						
Radar Test Signal (#)		5		Trail #	30	
Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 Spacing (μsec)	Start Time (msec)
1	3	57.8	5	1324	1716	82
2	2	70.1	20	1733	-	1677.909
3	2	95.2	13	1188	-	2970.818
4	3	84.6	20	1042	1259	4293.727
5	3	96.5	7	1329	1596	4379.636
6	2	84.3	15	1606	-	6162.545
7	3	53.5	19	1783	1458	7283.454
8	3	74.9	5	1599	1891	8102.363
9	3	53.8	7	1494	1467	8979.272
10	2	60.5	14	1319	-	10282.181
11	1	73.3	10	-	-	11754.09

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP7	100645	9kHz ~ 7GHz	Nov. 10, 2014	DFS01-HY
Signal generat	Agilent	E4438C	MY49072778	250kHz-6GHz	Oct. 03, 2014	DFS01-HY
Horn Antenna	COM-POWER	AH-118	711064	1GHz ~ 18GHz	Nov. 13, 2014	DFS01-HY
Horn Antenna	COM-POWER	AH-118	10094	1GHz ~ 18GHz	Apr. 15, 2015	DFS01-HY
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	302338	1GHz ~ 26.5GHz	Dec. 02, 2014	DFS01-HY
RF Cable-8m	HUBER+SUHNER	SUCOFLEX_104	MY17172/4	0.05GHz ~ 26.5GHz	Dec. 02, 2014	DFS01-HY

Note: Calibration Interval of instruments listed above is one year.