



ShenZhen Eastong Electronic technology Co., LTD

APPROVAL SHEET FOR C08

Issued by		Checked by	
Confirmed by		Date	2024-12-09
Customer Confirm			

Project: C08		Author: XUXIAORONG	File Name: C08- APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			

Revision History

Date	Revision	Description of Changes
2024-12-09	R:A	Antenna performance approved by customer

1 SUMMARY

2 GENERAL DESCRIPTION

2.1 Definitions

3 MECHANICAL DESCRIPTION

4 ELECTRICAL PERFORMANCE

4.1 Set-up

- 4.1.1 VSWR and return loss
- 4.1.2 Efficiency, Gain and TRP/TIS
- 4.1.3 Matching Circuit Description

4.2 Measurement Data

- 4.2.1 VSWR
- 4.2.2 Active result

5 MECHANICAL DRAWING

6 CONCLUSION

Project: C08		Author: XUXIAORONG	File Name: C08-APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			

1 Summary

This report summarizes the electrical results of the proposed antenna to support the C08 program. We test the antenna with the latest version handset .

2 General Description

2.1 Definitions

VSWR: Voltage Standing Wave Rate

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR and return loss

VSWR measurements (S_{11}) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.

4.1.3 Matching Circuit Description

No matching.

Project: C08		Author: XUXIAORONG	File Name: C08- APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			


4.2 Measurement Data

Frequency range: 2400–2480MHz
Max gain: 0.9dBi

Address: 409–411, Shanhai E-commerce Port, No.9 Huancheng Road, Yangmei Community, Bantian Street, Longgang District, Shenzhen




5 Mechanical drawing

Project: C08		Author: XUXIAORONG	File Name: C08-APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			

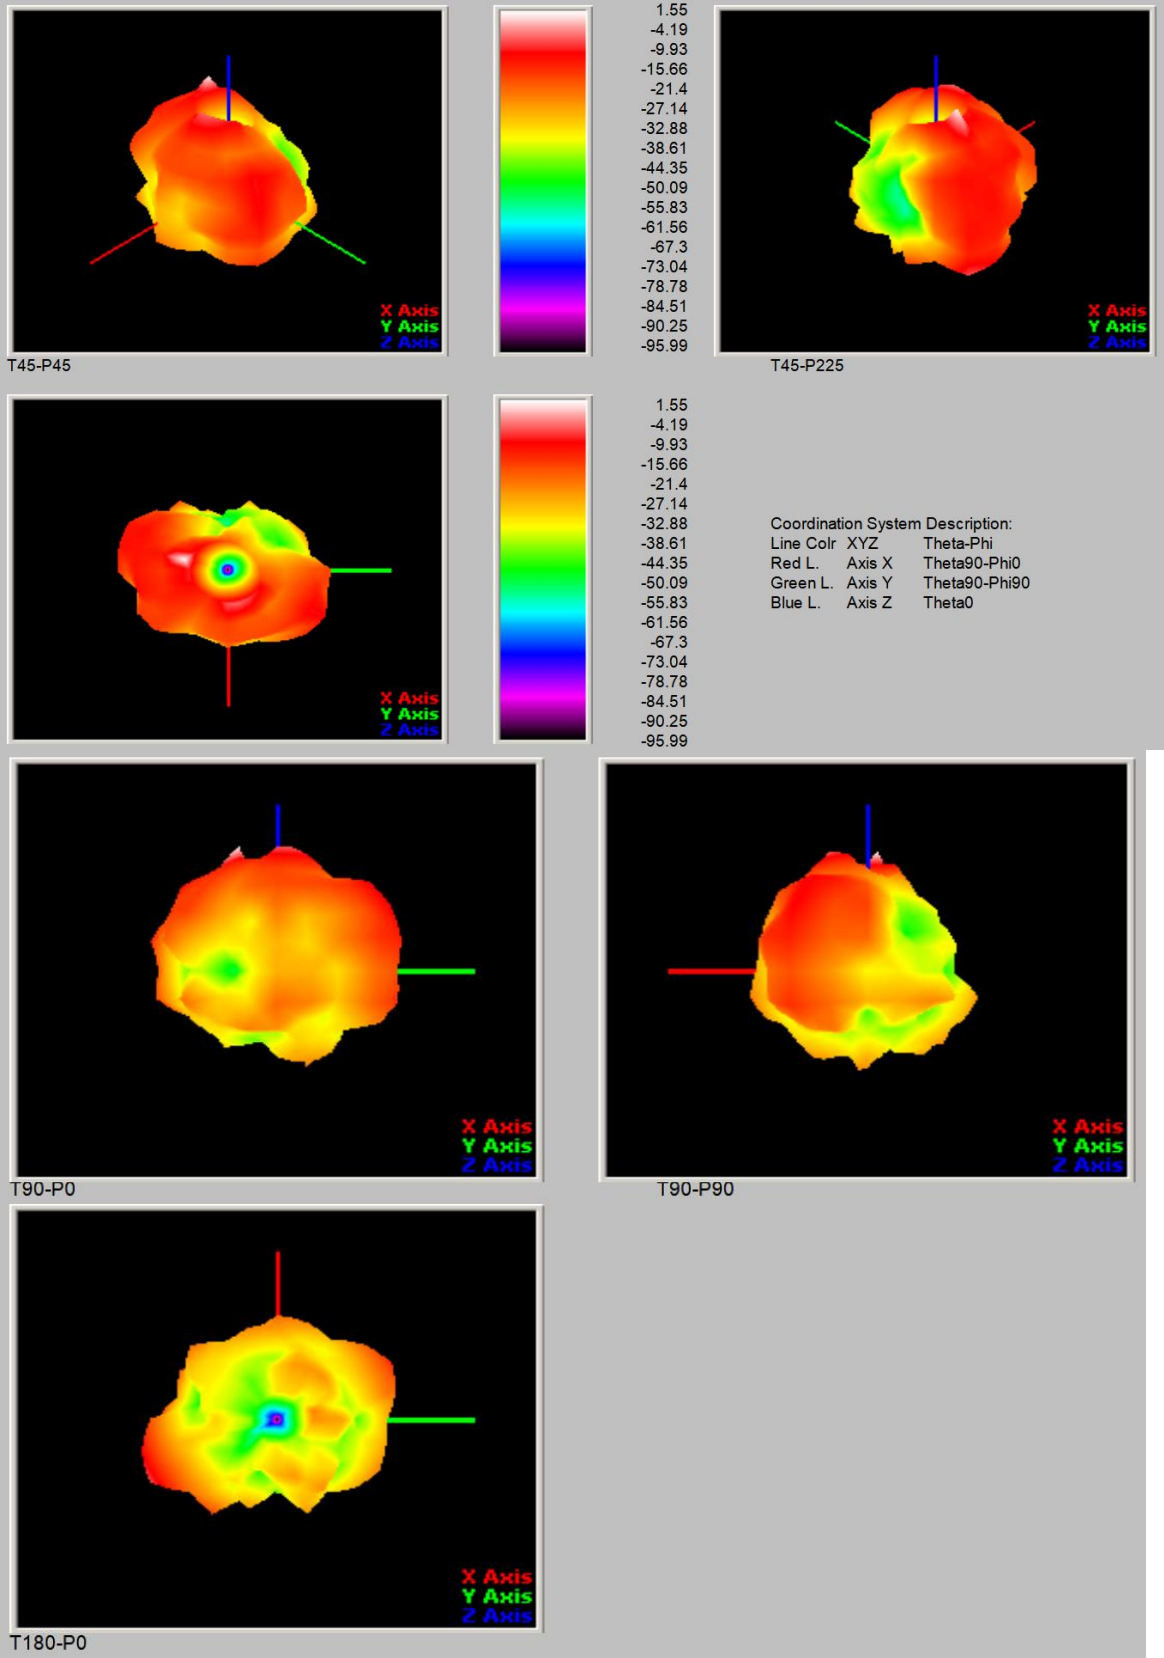

Project: C08		Author: XUXIAORONG	File Name: C08- APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		

CONFIDENTIAL
ShenZhen Eastong Electronic technology Co., LTD

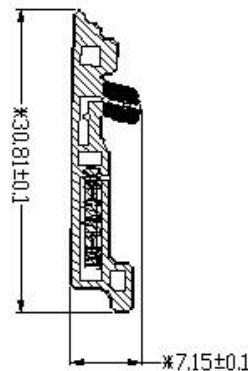

註

- 1、打※为配合尺寸,打*为重点尺寸,"Trid"为后继需调整尺寸;
- 2、打★为必测尺寸,未标尺寸参考3D图纸,其它尺寸以实配为准;
- 3、基材12.5 μ m,铜泊18 μ m,走线面除焊盘外其它区域需铺油(覆光)。
- 4、 区域为走线区域,  区域为焊盘区域 (镀金)  区域为附胶区域 (3M300/9471LSF)
- 5、PC表面油墨均匀,不可有起皱镀金不良等现象。
- 6、字符颜色要求: 黑油绿字, 白油亮白字。

7.2 印刷、包装 (7.2.1~7.2.3)									
5、PCB表面油墨均匀,不可有起皱镀金不良等现象。									
6、字符颜色要求: 黑油绿字, 白油亮白字。									
日期									
修 改 内 容									
版 本									
备 注									
第三角法									
来料公差参照标准									
10以下									
10~20									
20~40									
40以上									
物料实测图纸									
机 种									
PCB_CML									
PCB_三合一									
日期									
2024-09-06									
页码									
2/3									
设计									
工程									
材料									
确认									
外观处理									
黑色									
单位									
比例									
1:1									
版本									
7.1.1									

Project: C08		Author: XUXIAORONG	File Name: C08- APP-RA
Date: 2024-12-09			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			