



FCC Part 15B TEST REPORT

Report No.: STS2203086E01

Issued for

Shenzhen Yibaifen Electronic Technology Co., Ltd.

Building e, Minle Science and Technology Park, Longhua
district, Shenzhen, China

Product Name:	Smart phone
Brand Name:	Welcome
Model Name:	Note 10
Series Model:	MX4
FCC ID:	2A5MYNOTE10
Test Standard:	FCC 47 CFR Part 15: Subpart B

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name Shenzhen Yibaifen Electronic Technology Co., Ltd.
Address Building e, Minle Science and Technology Park, Longhua district, Shenzhen, China

Manufacturer's Name Shenzhen encyclopedia Innovation Technology Co., Ltd
Address Room 2718, block C, Huaqiang North Electronic Technology Building, Futian District, Shenzhen, China

Product Description

Product Name Smart phone
Brand Name Welcome
Model Name Note 10
Series Model MX4

Standards FCC 47 CFR Part 15: Subpart B

Test Procedure ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of Receipt of Test Item : 11 Mar. 2022

Date of Performance of Tests : 11 Mar. 2022 ~ 26 Apr. 2022

Date of Issue : 26 Apr. 2022


Test Result : **Pass**

Testing Engineer : 

(Jane Chen)

Technical Manager : 

(Bulun)

Authorized Signatory : 

(Bovey Yang)





Table of Contents

1. SUMMARY OF THE TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 DESCRIPTION OF THE TEST SETUP	8
2.4 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	26 Apr. 2022	STS2203086E01	ALL	Initial Issue





1. SUMMARY OF THE TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1) N/A=Not Applicable.

1.1 TEST FACTORY

Company Name:	SHENZHEN STS TEST SERVICES CO.,LTD.
Address:	A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	FCC test Firm Registration Number: 625569
	IC test Firm Registration Number: 12108A
	A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission (9KHz-30MHz)	$\pm 2.73\text{dB}$
2	All emissions, radiated(<1G) 30MHz-1000MHz	$\pm 4.09\text{dB}$
3	All emissions, radiated(>1G) 1GHz-6GHz	$\pm 4.92\text{dB}$
4	All emissions, radiated(>1G) 6GHz-18GHz	$\pm 5.49\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Smart phone	
Brand Name	Welcome	
Model Name	Note 10	
Series Model	MX4	
Model Difference	Only different in model name.	
Frequency Bands	GSM	850: 824~849MHz 1900: 1850~1910MHz
	WCDMA	Band V: 824~849MHz
	Bluetooth	2402~2480MHz
	2.4G WLAN	802.11b/g/n(HT20/40):2412~2462MHz 802.11n(40MHz):2422~2452MHz
Modulation Mode	GSM	GMSK for GSM/GPRS
	WCDMA	WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK
	Bluetooth	GFSK(1Mbps), π/4-DQPSK(2Mbps), 8DPSK(3Mbps)
	2.4G WLAN	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
Adapter	Input: 100-240V, 50/60Hz, 0.15A Output:5V=1000mA	
Battery	Rated Voltage:3.8V Charge Limit Voltage:4.35V Capacity:5000mAh	
Hardware Version Number	V213IM-1.0	
Software Version Number	LRX21M test-keys	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	PC+USB Transmitting+SD Card
Mode 2	Adapter + rear camera on + BT Link+WIFI Link
Mode3	Adapter + front-facing camera on + BT Link+WIFI Link
Mode 4	GSM850 Link + Adapter + USB cable + Earphone + BT Link
Mode 5	DCS1900 Idle + Adapter + USB cable + Earphone + BT Link + GPS Rx
Mode 6	WCDMA B5 Link + Adapter + USB cable + Earphone + BT Link + WLAN Link + GPS Rx

For Conducted Test	
Final Test Mode	Description
Mode 1	PC+USB Transmitting+SD Card

For Radiated Test	
Final Test Mode	Description
Mode 1	PC+USB Transmitting+SD Card

Note:

1. For conducted emission test, test mode 1 was the worst case and only this mode was presented in this report.
2. For radiated emission test, test mode 1 was the worst case and only this mode was presented in this report.
3. We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz) for which the device is capable of operation.



2.3 DESCRIPTION OF THE TEST SETUP

The EUT has been tested with associated equipment below and the test setup please refer to appendix 1 - test setup.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
/	USB Cable	N/A	N/A	85cm	NO
/	Earphone	N/A	N/A	100cm	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
/	Notebook Adapter	DELL	HSTNN-CA15	N/A	N/A
/	Personal computer	DELL	VOSTRO.3800	N/A	N/A
/	Keyboard	Acer	SK-9624	N/A	N/A
/	Mouse	HP	MODGUO	N/A	N/A
/	Printer	LENOVO	LJ2400L	N/A	N/A
/	DC Cable	N/A	N/A	120cm	NO
/	USB Cable	N/A	N/A	110cm	NO
/	USB Cable	N/A	N/A	110cm	NO
/	USB Cable	N/A	N/A	110cm	NO

Note:

- (1) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (2) "YES" is means "with core"; "NO" is means "without core".



2.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2021.09.30	2022.09.29
Bi-log Antenna	TESEQ	CBL6111D	45873	2021.10.08	2023.10.07
Horn Antenna	SCHWARZB ECK	BBHA 9120D	1343	2020.10.12	2022.10.11
Pre-amplifier(1-26.5 G)	Agilent	8449B	3008A02383	2021.10.09	2022.10.08
Pre-amplifier(0.1M-3 GHz)	EM	EM330	060665	2021.10.09	2022.10.08
Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.09.30	2022.09.29
RE Cable (9K-1G)	N/A	R01	N/A	2021.10.09	2022.10.08
RE Cable (1-26G)	N/A	R02	N/A	2021.10.09	2022.10.08
Temperature & Humidity	Mieo	HH660	N/A	2021.10.09	2022.10.08
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Testing Software	EZ-EMC(Ver.STSLAB-03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2021.09.30	2022.09.29
LISN	R&S	ENV216	101242	2021.09.30	2022.09.29
LISN	ETS	3810/2NM	00023625	2021.09.30	2022.09.29
Absorbing Clamp	R&S	MDS-21	100668	2022.03.02	2023.03.01
CE Cable	N/A	C01	N/A	2021.09.30	2022.09.29
Temperature & Humidity	Mieo	HH660	N/A	2021.10.09	2022.10.08
Testing Software	EZ-EMC(Ver.STSLAB-03A1 CE)				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	<input type="checkbox"/> Class A (dB μ V)		<input checked="" type="checkbox"/> Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

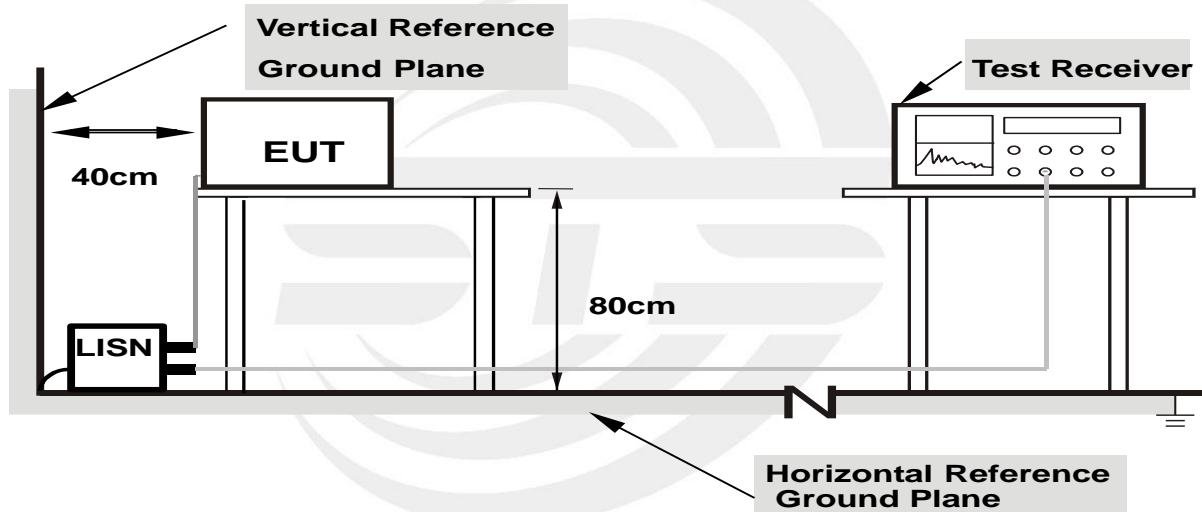

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Temperature:	26.1 °C	Relative Humidity:	60%
Phase:	L	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2022.03.11

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	33.46	20.32	53.78	65.36	-11.58	QP
2	0.1620	14.30	20.32	34.62	55.36	-20.74	AVG
3	0.2140	29.73	20.46	50.19	63.05	-12.86	QP
4	0.2140	11.22	20.46	31.68	53.05	-21.37	AVG
5	1.5660	19.26	20.35	39.61	56.00	-16.39	QP
6	1.5660	11.41	20.35	31.76	46.00	-14.24	AVG
7	2.0940	18.64	20.39	39.03	56.00	-16.97	QP
8	2.0940	9.02	20.39	29.41	46.00	-16.59	AVG
9	5.0100	13.32	20.53	33.85	60.00	-26.15	QP
10	5.0100	0.06	20.53	20.59	50.00	-29.41	AVG
11	20.2540	9.63	22.90	32.53	60.00	-27.47	QP
12	20.2540	-1.69	22.90	21.21	50.00	-28.79	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor = Insertion loss + Cable loss

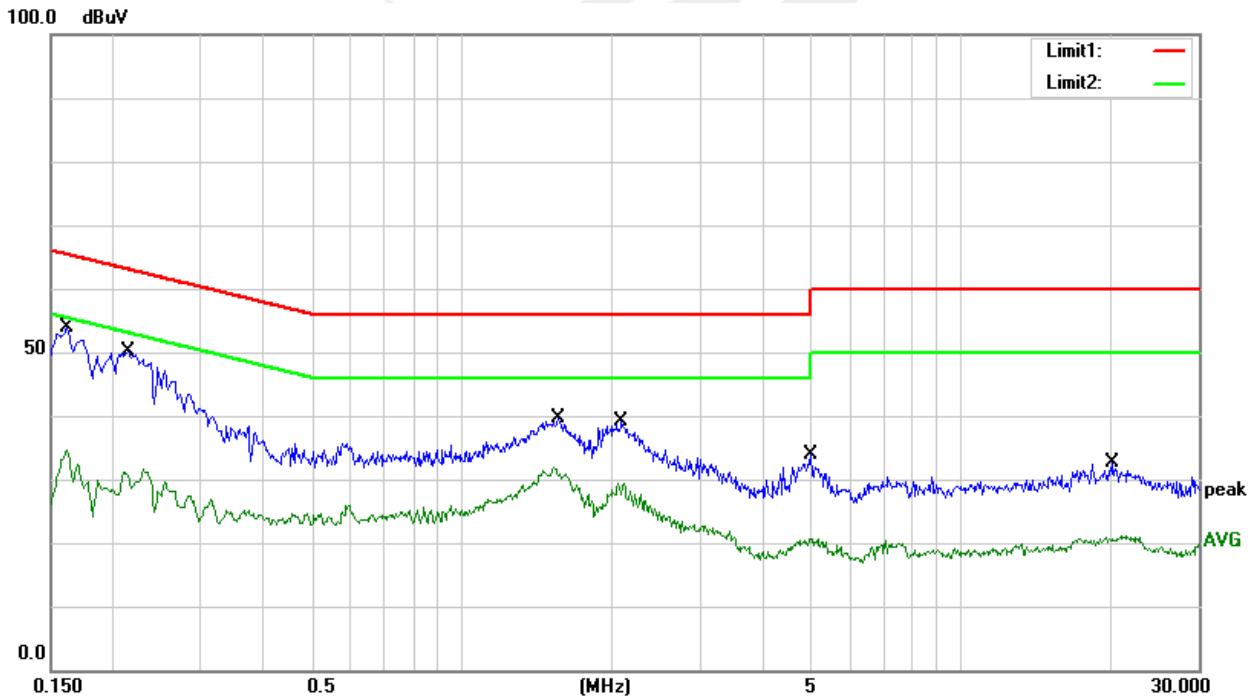




Temperature:	26.1 °C	Relative Humidity:	60%
Phase:	N	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2022.03.11

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	33.46	20.32	53.78	65.36	-11.58	QP
2	0.1620	14.30	20.32	34.62	55.36	-20.74	AVG
3	0.2140	29.73	20.46	50.19	63.05	-12.86	QP
4	0.2140	11.22	20.46	31.68	53.05	-21.37	AVG
5	1.5660	19.26	20.35	39.61	56.00	-16.39	QP
6	1.5660	11.41	20.35	31.76	46.00	-14.24	AVG
7	2.0940	18.64	20.39	39.03	56.00	-16.97	QP
8	2.0940	9.02	20.39	29.41	46.00	-16.59	AVG
9	5.0100	13.32	20.53	33.85	60.00	-26.15	QP
10	5.0100	0.06	20.53	20.59	50.00	-29.41	AVG
11	20.2540	9.63	22.90	32.53	60.00	-27.47	QP
12	20.2540	-1.69	22.90	21.21	50.00	-28.79	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor = Insertion loss + Cable loss

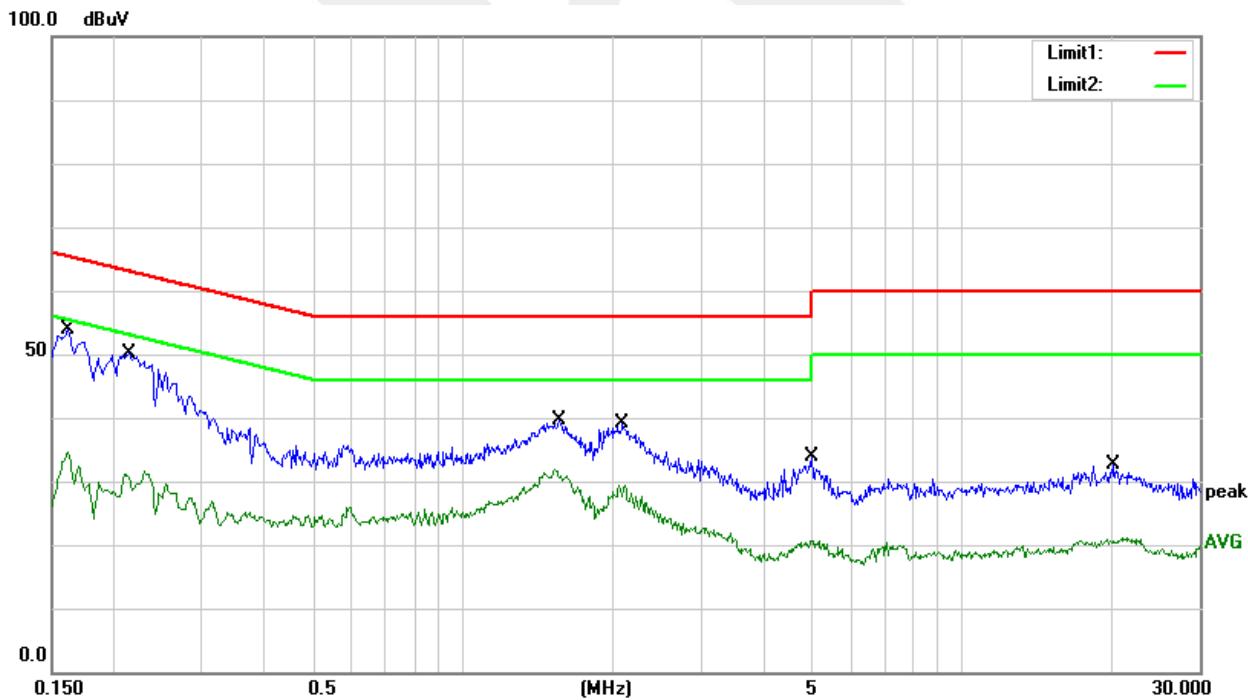



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	<input type="checkbox"/> Class A		<input checked="" type="checkbox"/> Class B
	Field strength (dBuV/m) (at 10m)	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 ~ 88	39	49	40
88 ~ 216	43.5	53.5	43.5
216 ~ 960	46	56	46
Above 960	49.5	59.5	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	<input type="checkbox"/> Class A				<input checked="" type="checkbox"/> Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 ~ 108	1000
108 ~ 500	2000
500 ~ 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed in the following: FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).



3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

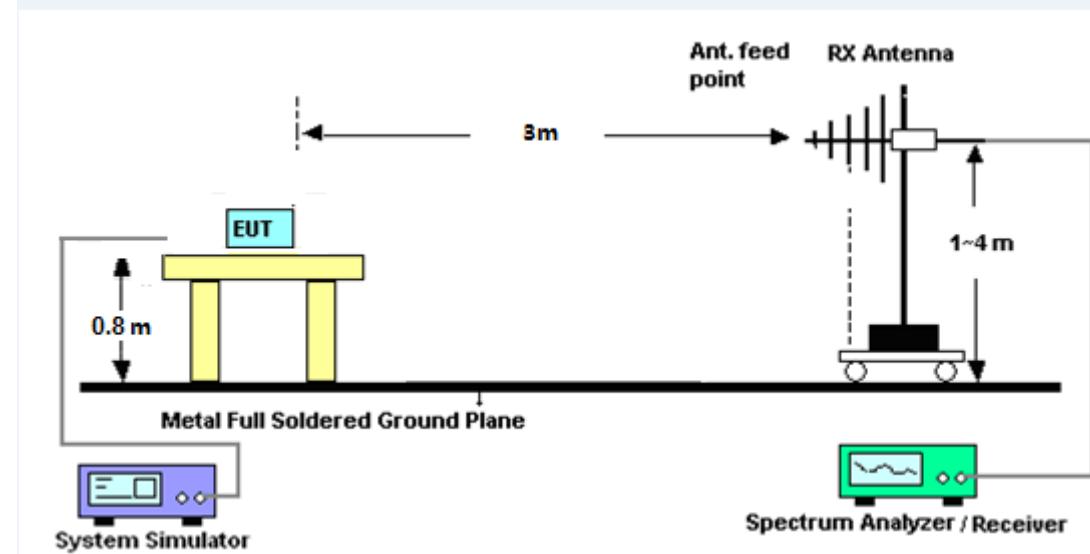

(B) Radiated Emission Test-Up Frequency Above 1GHz

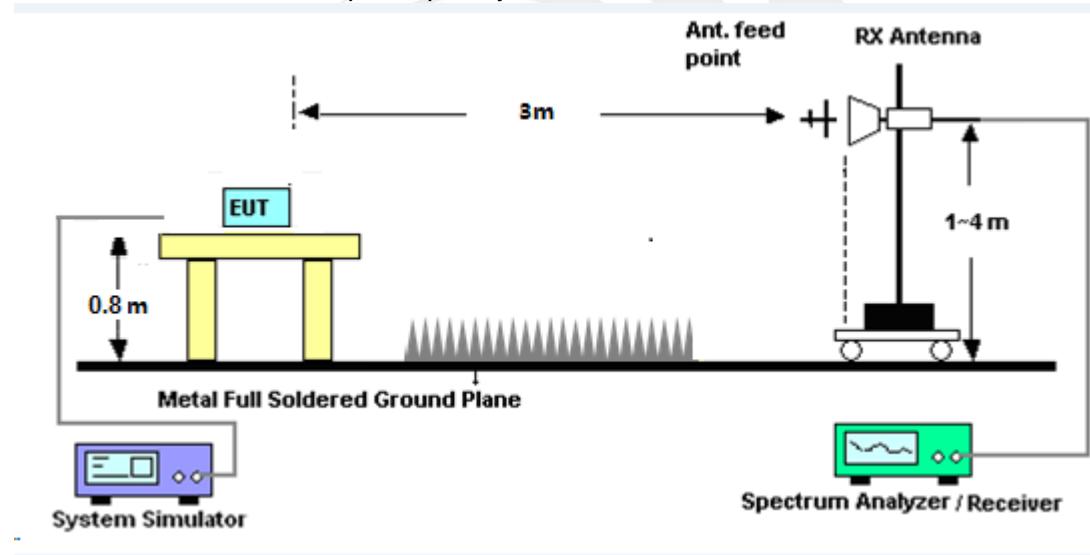

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 described unless otherwise a special operating condition is specified in the following during the testing.



3.2.6 TEST RESULTS

30MHz - 1000MHz

Temperature:	25.1 °C	Relative Humidity:	47%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.11

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.8818	39.29	-23.30	15.99	40.00	-24.01	QP
2	73.6170	41.72	-24.93	16.79	40.00	-23.21	QP
3	135.5062	48.75	-18.49	30.26	43.50	-13.24	QP
4	257.4222	48.51	-15.38	33.13	46.00	-12.87	QP
5	798.9797	34.98	-4.77	30.21	46.00	-15.79	QP
6	962.1623	32.76	-1.92	30.84	54.00	-23.16	QP

Remark:

1. All readings are Quasi-Peak
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain






Temperature:	25.1 °C	Relative Humidity:	47%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.11

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.8260	43.36	-20.55	22.81	40.00	-17.19	QP
2	168.4138	42.91	-19.68	23.23	43.50	-20.27	QP
3	258.3263	39.64	-15.13	24.51	46.00	-21.49	QP
4	399.0300	39.05	-13.25	25.80	46.00	-20.20	QP
5	599.3212	43.85	-8.57	35.28	46.00	-10.72	QP
6	1000.0000	35.43	-2.19	33.24	54.00	-20.76	QP

Remark:

1. All readings are Quasi-Peak
2. Margin = Result (Result = Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

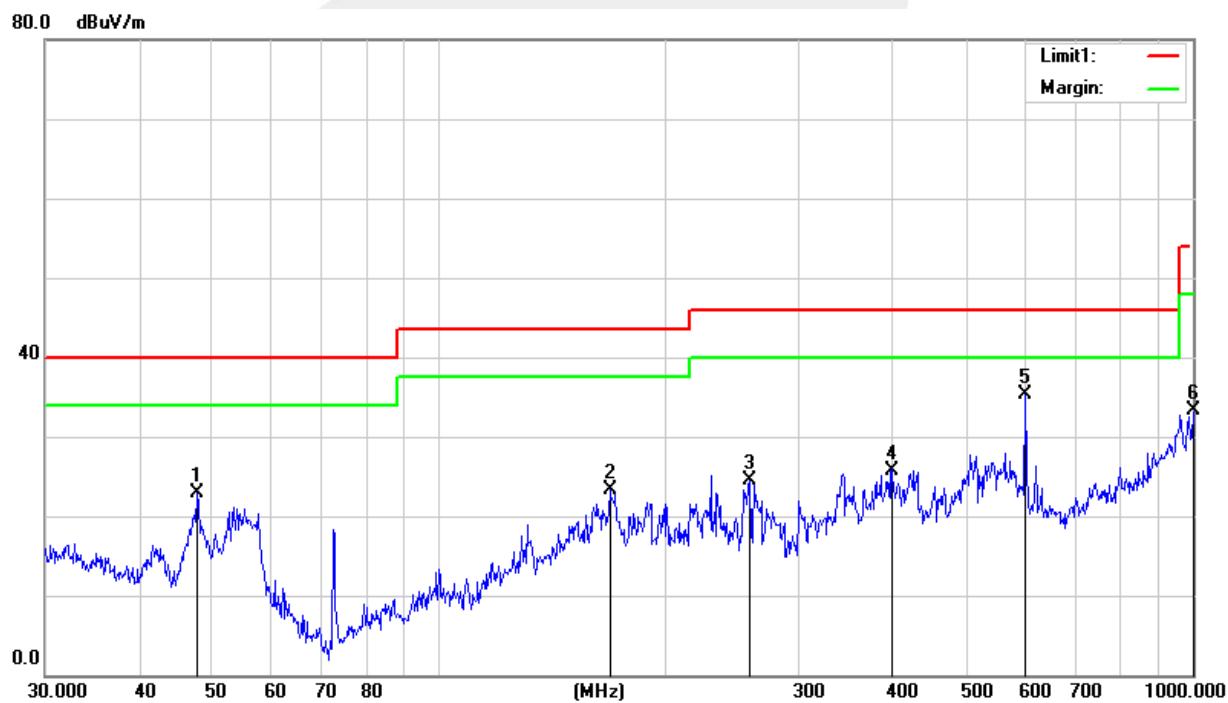




(1 GHz - 18GHz)

Temperature:	25.3°C	Relative Humidity:	53%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.12

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3762.500	41.45	3.74	45.19	74.00	-28.81	Peak
2	3762.500	33.78	3.74	37.52	54.00	-16.48	AVG
3	6907.500	36.51	10.57	47.08	74.00	-26.92	Peak
4	6907.500	28.32	10.57	38.89	54.00	-15.11	AVG
5	10775.000	35.83	14.03	49.86	74.00	-24.14	Peak
6	10775.000	26.44	14.03	40.47	54.00	-13.53	AVG
7	12900.000	36.40	15.37	51.77	74.00	-22.23	Peak
8	12900.000	27.34	15.37	42.71	54.00	-11.29	AVG
9	15271.500	36.41	17.60	54.01	74.00	-19.99	Peak
10	15271.500	27.46	17.60	45.06	54.00	-8.94	AVG
11	17787.500	31.14	24.24	55.38	74.00	-18.62	Peak
12	17787.500	22.18	24.24	46.42	54.00	-7.58	AVG

Remark:

1. All readings are Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

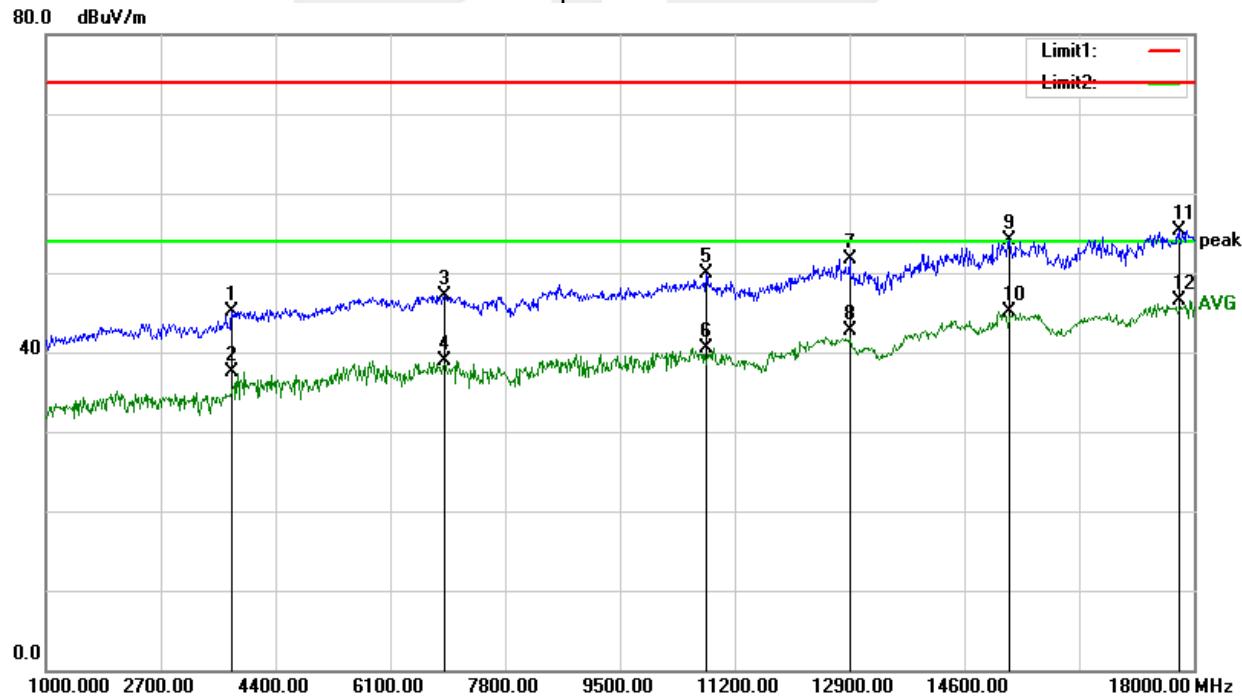




Temperature:	25.3°C	Relative Humidity:	53%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.12

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2768.000	42.65	1.05	43.70	74.00	-30.30	Peak
2	2768.000	33.30	1.05	34.35	54.00	-19.65	AVG
3	5853.500	38.27	7.50	45.77	74.00	-28.23	Peak
4	5853.500	30.42	7.50	37.92	54.00	-16.08	AVG
5	7783.000	38.64	11.11	49.75	74.00	-24.25	Peak
6	7783.000	29.22	11.11	40.33	54.00	-13.67	AVG
7	11336.000	37.00	14.40	51.40	74.00	-22.60	Peak
8	11336.000	27.96	14.40	42.36	54.00	-11.64	AVG
9	13758.500	35.93	16.47	52.40	74.00	-21.60	Peak
10	13758.500	27.08	16.47	43.55	54.00	-10.45	AVG
11	17753.500	31.72	23.68	55.40	74.00	-18.60	Peak
12	17753.500	22.48	23.68	46.16	54.00	-7.84	AVG

Remark:

1. All readings are Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

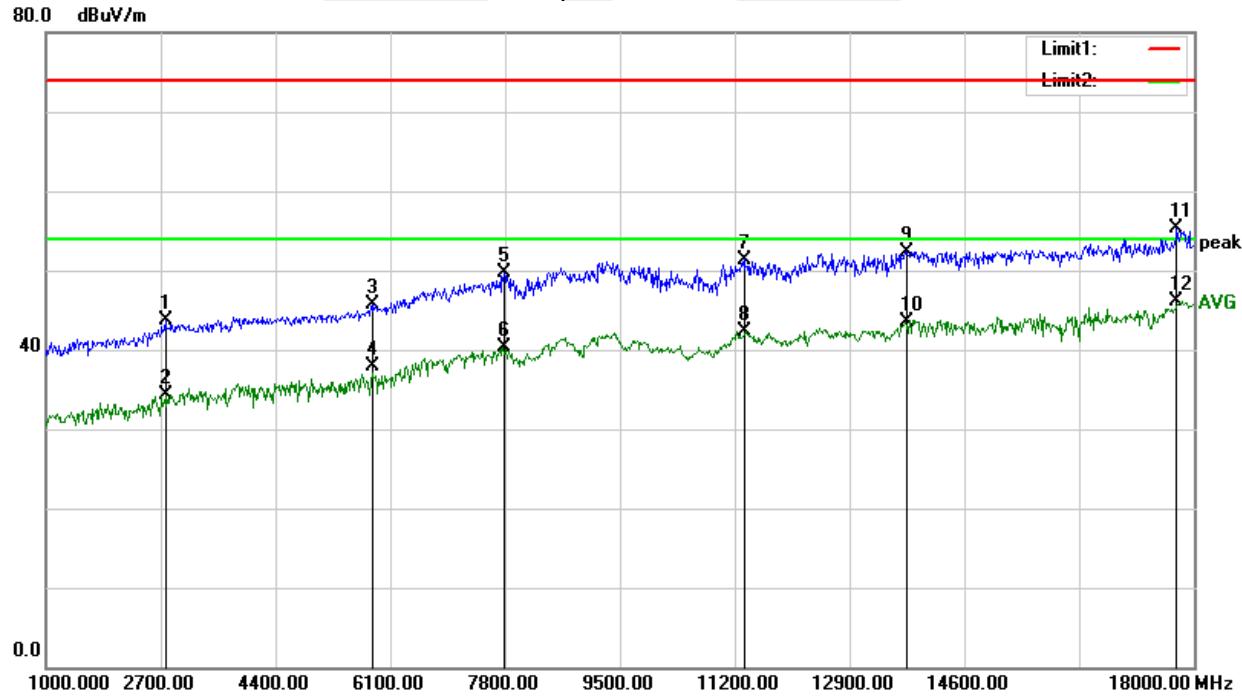




(18 GHz - 25GHz)

Temperature:	24.1°C	Relative Humidity:	44%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.12

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	18728.000	26.77	24.69	51.46	74.00	-22.54	Peak
2	18728.000	15.95	24.69	40.64	54.00	-13.36	AVG
3	20198.000	25.66	24.77	50.43	74.00	-23.57	Peak
4	20198.000	16.71	24.77	41.48	54.00	-12.52	AVG
5	21549.000	29.27	24.71	53.98	74.00	-20.02	Peak
6	21549.000	20.03	24.71	44.74	54.00	-9.26	AVG
7	22991.000	29.37	24.54	53.91	74.00	-20.09	Peak
8	22991.000	20.32	24.54	44.86	54.00	-9.14	AVG
9	24097.000	30.67	24.87	55.54	74.00	-18.46	Peak
10	24097.000	22.19	24.87	47.06	54.00	-6.94	AVG
11	24860.000	32.25	24.96	57.21	74.00	-16.79	Peak
12	24860.000	23.44	24.96	48.40	54.00	-5.60	AVG

Remark:

1. All readings are Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

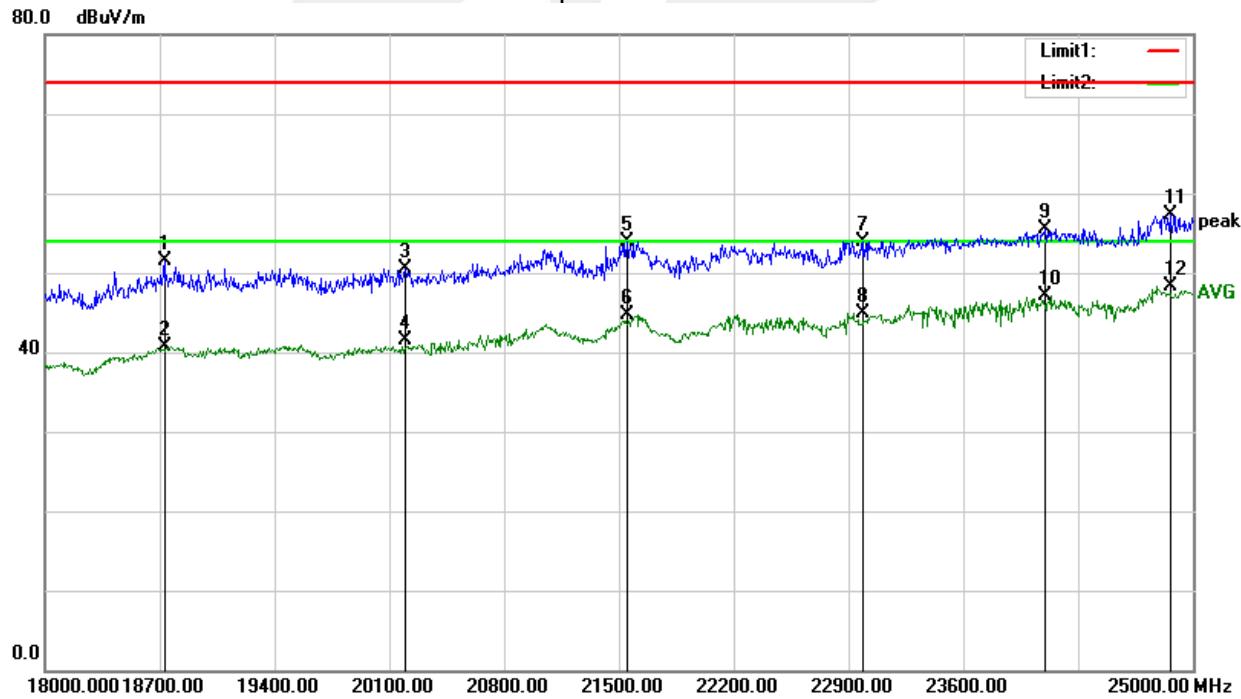




Temperature:	24.1 °C	Relative Humidity:	44%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC	Test Date:	2022.03.12

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	18833.000	25.45	24.71	50.16	74.00	-23.84	Peak
2	18833.000	15.06	24.71	39.77	54.00	-14.23	AVG
3	19932.000	23.84	24.82	48.66	74.00	-25.34	Peak
4	19932.000	15.87	24.82	40.69	54.00	-13.31	AVG
5	21052.000	26.13	24.89	51.02	74.00	-22.98	Peak
6	21052.000	16.86	24.89	41.75	54.00	-12.25	AVG
7	22200.000	26.96	24.50	51.46	74.00	-22.54	Peak
8	22200.000	17.15	24.50	41.65	54.00	-12.35	AVG
9	23670.000	29.95	24.76	54.71	74.00	-19.29	Peak
10	23670.000	19.47	24.76	44.23	54.00	-9.77	AVG
11	24930.000	32.59	24.96	57.55	74.00	-16.45	Peak
12	24930.000	22.17	24.96	47.13	54.00	-6.87	AVG

Remark:

1. All readings are Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

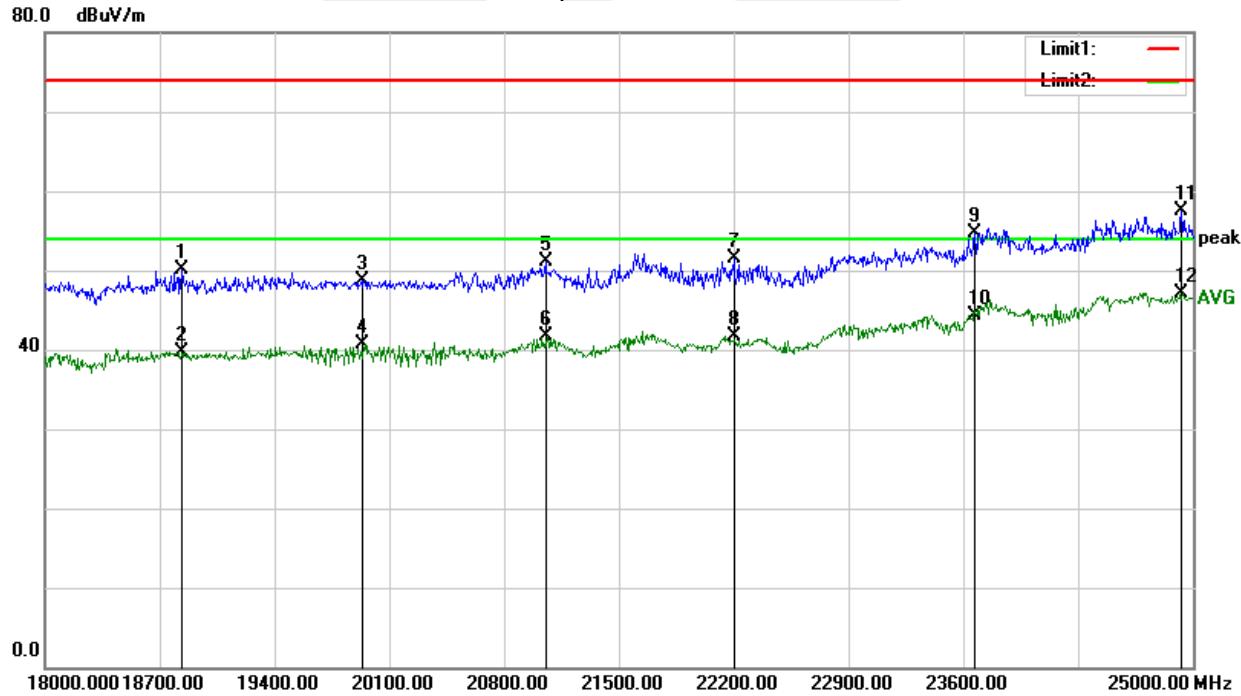**Notes:**

1. Measuring frequencies from 1 GHz to 25GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak and average detector mode of the emission shown in Actual FS column.

*** END OF THE REPORT ***