

FCC SAR Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smart Phone
MODEL NAME : PG86100
FCC ID : NM8PG86100
STANDARD : FCC 47 CFR Part 2 (2.1093)
IEEE C95.1-1991
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Jan. 20, 2011 and completely tested on Jun. 03, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PG86100

Page Number : 1 of 49

Report Issued Date : Jun. 03, 2011

Report Version : Rev. 06



Table of Contents

Revision History	3
1. Statement of Compliance	4
2. Administration Data	5
2.1 Testing Laboratory	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Device Under Test (DUT)	6
3.2 Product Photos	6
3.3 Antenna Configuration	7
3.4 Simultaneous Transmission Configurations	7
3.5 Applied Standards	8
3.6 Device Category and SAR Limits	8
3.7 Test Conditions	8
3.7.1 Ambient Condition	8
3.7.2 Test Configuration	8
4. Specific Absorption Rate (SAR)	9
4.1 Introduction	9
4.2 SAR Definition	9
5. SAR Measurement System	10
5.1 E-Field Probe	11
5.1.1 E-Field Probe Specification	11
5.1.2 E-Field Probe Calibration	12
5.2 Data Acquisition Electronics (DAE)	12
5.3 Robot	12
5.4 Measurement Server	13
5.5 Phantom	14
5.6 Device Holder	15
5.7 Data Storage and Evaluation	17
5.7.1 Data Storage	17
5.7.2 Data Evaluation	17
5.8 Test Equipment List	19
6. Tissue Simulating Liquids	20
7. Uncertainty Assessment	22
8. SAR Measurement Evaluation	24
8.1 Purpose of System Performance check	24
8.2 System Setup	24
8.3 Validation Results	26
9. DUT Testing Position	27
10. Measurement Procedures	30
10.1 Spatial Peak SAR Evaluation	30
10.2 Area & Zoom Scan Procedures	31
10.3 Volume Scan Procedures	31
10.4 SAR Averaged Methods	31
10.5 Power Drift Monitoring	31
11. SAR Test Results	32
11.1 Conducted Power (Unit: dBm)	32
11.2 Test Records for Head SAR Test	32
11.3 Test Records for Body SAR Test	33
11.4 Test Records for Hotspot SAR Test	34
11.5 Simultaneous Transmission SAR Analysis and Measurements	36
12. References	49
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. FCC 3G SAR Measurement Procedures	
Appendix F. Extended Dipole Calibrations	
Appendix G. Volume Scan Plots	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA112033A	Rev. 01	Initial issue of report	Apr. 08, 2011
FA112033A	Rev. 02	Update report for retest CDMA2000 BC10 SAR	Apr. 13, 2011
FA112033A	Rev. 03	Update report for retest CDMA2000 BC10 SAR	Apr. 14, 2011
FA112033A	Rev. 04	Update report for retest CDMA2000 BC10 SAR	May 13, 2011
FA112033A	Rev. 05	(i) Retested SAR in data #35, #93 for SAR drift at page 34. (ii) Retested EVDO for Hot spot at page 34 (data # 116,119,120). (iii) Modified descriptions for section 11 Head, Body Worn, Hot Spot, and simultaneous transmissions. (iv) Added Appendix G for volume scan plots	May 22, 2011
FA112033A	Rev. 06	(i) Removed the footnote 2 on page 43 (R05) (ii) Separated table for the Hot Spot/Body Worn in Section 11.5. (iii) Added Appendix G for EVDO volume scan plots, and separated table for the Hot Spot/Body Worn.	Jun 6, 2011

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **HTC Corporation Smart Phone PG86100** are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz).

<Standalone SAR>

Band	Position	SAR _{1g} (W/kg)
CDMA2000 BC0	Head	0.529
	Body (1 cm Gap)	1.05
CDMA2000 BC1	Head	0.885
	Body (1 cm Gap)	0.674
CDMA2000 BC10	Head	0.635
	Body (1 cm Gap)	1.11

<Volume Scan SAR>

Band	Test Position	Channel	Multi Band SAR _{1g} (W/kg)
CDMA2000 BC10	Hotspot Body-worn Rear Face	Ch 476	1.33
WiMAX Ant-0		2593 MHz	
802.11b		Ch 6	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

2.2 Applicant

Company Name	HTC Corporation
Address	1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

2.3 Manufacturer

Company Name	HTC Corporation
Address	1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

2.4 Application Details

Date of Receipt of Application	Jan. 20, 2011
Date of Start during the Test	Feb. 09, 2011
Date of End during the Test	May. 21, 2011

3. General Information

3.1 Description of Device Under Test (DUT)


Product Feature & Specification	
DUT Type	Smart Phone
Model Name	PG86100
FCC ID	NM8PG86100
Tx Frequency	CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~ 1910 MHz CDMA2000 BC10 : 817 MHz ~ 824 MHz
Rx Frequency	CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz CDMA2000 BC10 : 862 MHz ~ 869 MHz
Maximum Output Power to Antenna	CDMA2000 BC0 : 24.66 dBm CDMA2000 BC1 : 24.09 dBm CDMA2000 BC10 : 24.53 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	QPSK
DUT Stage	Production Unit

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

3.2 Product Photos

Please refer to Appendix D.

3.3 Antenna Configuration

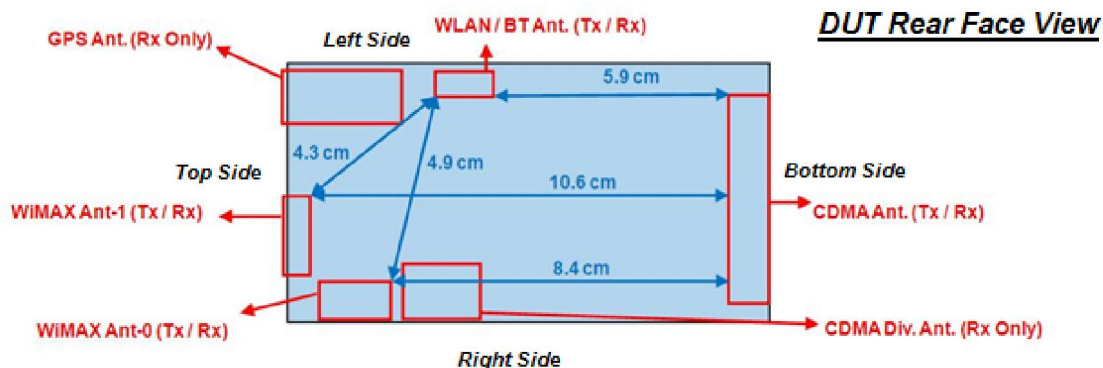

Hot Spot Mode	Front Face	Rear Face	Top side	Bottom side	Left side	Right side
WiMax - Ant 0(TX/RX)	Tested	Tested	Tested	NA	NA	Tested
WiMax - Ant 1(TX/RX)	Tested	Tested	Tested	NA	NA	Tested
CDMA BC 0 /1/10	Tested	Tested	NA	Tested	Tested	Tested
WLAN (TX/RX)	Tested	Tested	NA	NA	Tested	NA

Note: SAR tested is based on antenna less than 2.5cm from DUT's edge.

Note:

1. The WiMax will transmit in one antenna at a time; no simultaneous transmitting configuration between WiMax antenna-1 and antenna-2.
2. Bluetooth shares the same antenna with WLAN, they cannot transmit simultaneously. Thus, Bluetooth SAR is not needed due to Bluetooth lower power compared to WLAN.

3.4 Simultaneous Transmission Configurations

	WiMax, Ant-0	WiMax, Ant-1	CDMA	WLAN
1	X		X	X
2		X	X	X
3	X			X
4			X	X
5	X			X
6		X		X
7	X		X	
8		X	X	

Note: WiMax and WLAN are supported during voice call, thus simultaneous transmission for WiMax and WLAN and CDMA-voice is considered for Head exposure position.

3.5 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D06 v01
- FCC KDB 447498 D01 v04

3.6 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.7 Test Conditions

3.7.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.7.2 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

For WWAN SAR testing, the DUT is in CDMA2000 link mode, and its crest factor is 1.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

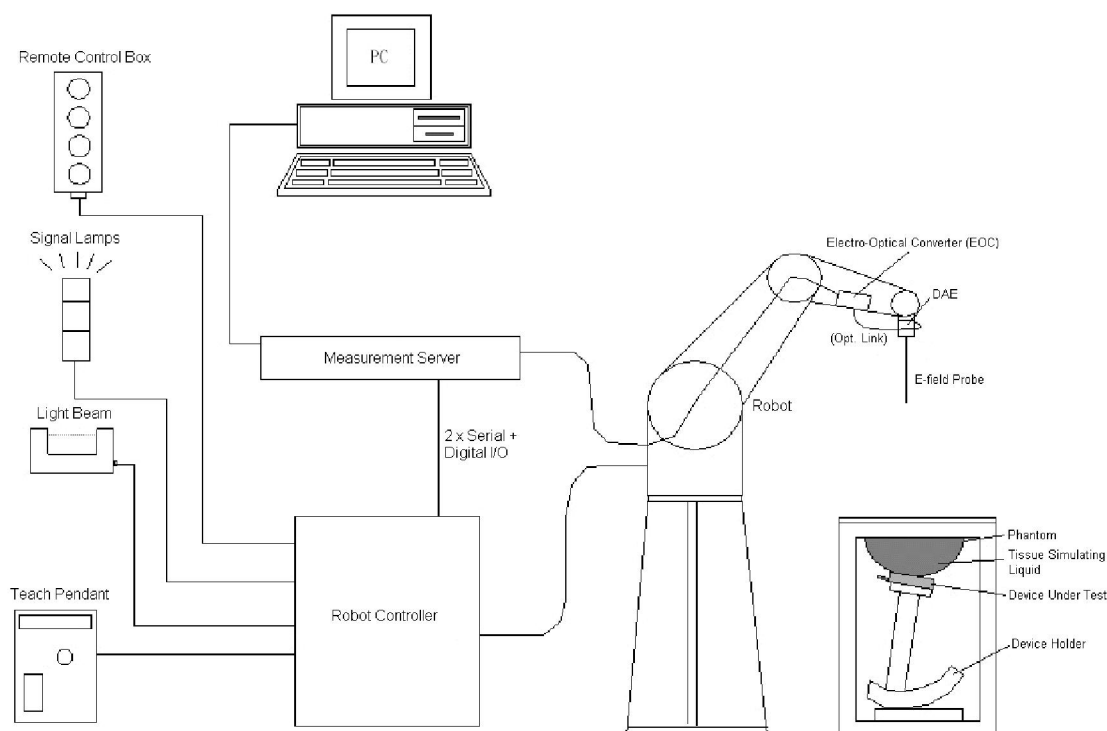


Fig 5.1 SPEAG DASY4 or DASY5 System Configurations

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<ET3DV6>

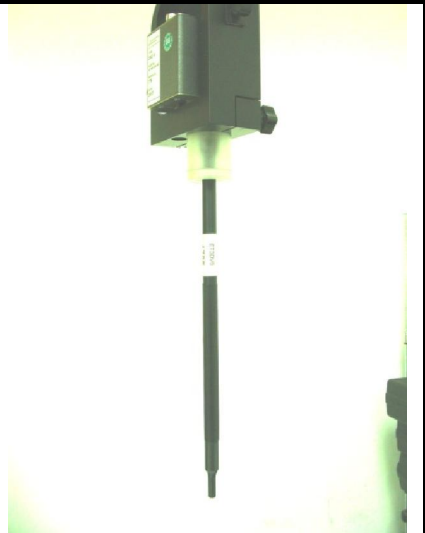
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 5.2 Photo of ET3DV6

<EX3DV4 Probe>

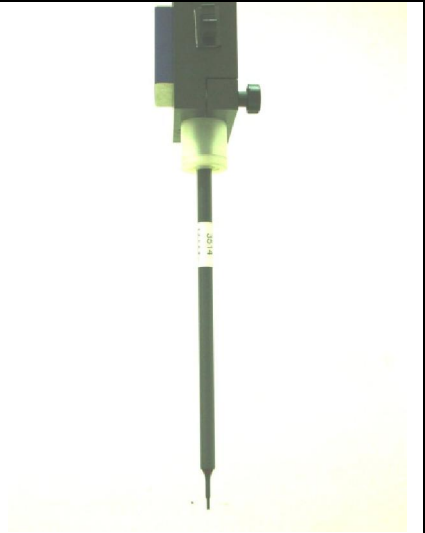
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 5.3 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4



Fig 5.6 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

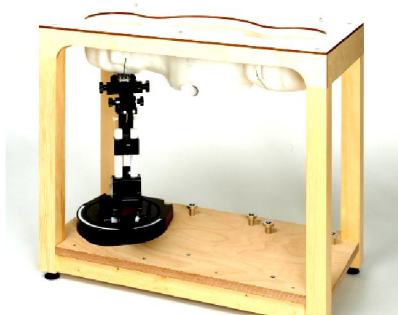
Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

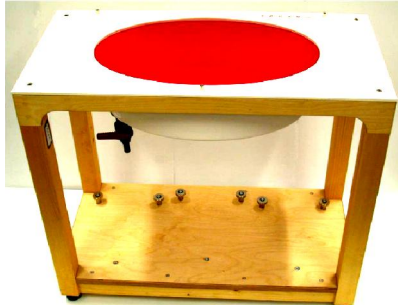
Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

Fig 5.10 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

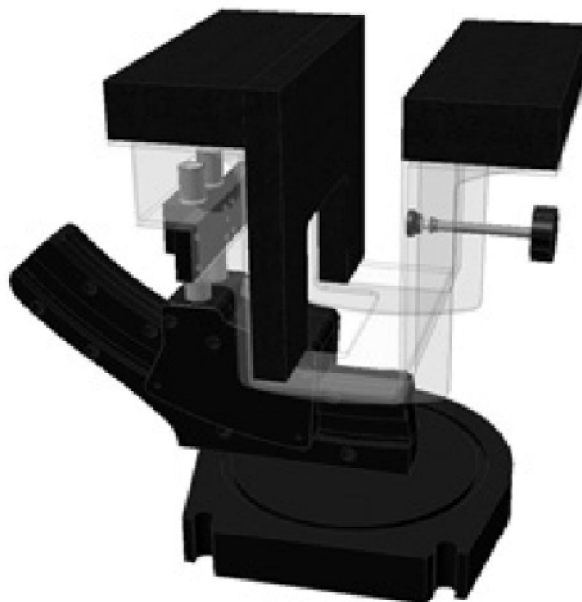


Fig 5.12 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	ET3DV6	1788	Sep. 21, 2010	Sep. 20, 2011
SPEAG	Dosimetric E-Field Probe	EX3DV4	3731	Sep. 20, 2010	Sep. 19, 2011
SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	Jun.22,2010	Jun.21,2011
SPEAG	Dosimetric E-Field Probe	ET3DV6	1787	May. 20, 2011	May. 19, 2012
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 22, 2010	Mar. 21, 2012
SPEAG	835MHz System Validation Kit	D835V2	4d082	Jul. 20, 2010	Jul. 19, 2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 23, 2010	Mar. 22, 2012
SPEAG	2450MHz System Validation Kit	D2450V2	735	Jun. 17, 2010	Jun. 16, 2012
SPEAG	2600MHz System Validation Kit	D2600V2	1003	Jan. 27, 2011	Jan. 26, 2013
SPEAG	Data Acquisition Electronics	DAE3	577	Jan. 13, 2011	Jan. 12, 2012
SPEAG	Data Acquisition Electronics	DAE3	495	Apr. 28, 2011	Apr. 27, 2012
SPEAG	Data Acquisition Electronics	DAE4	778	Oct. 22, 2010	Oct. 21, 2011
SPEAG	Data Acquisition Electronics	DAE4	1249	Feb. 21, 2011	Feb. 20, 2012
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1478	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
Agilent	PNA Series Network Analyzer (*1)	E8358A	US40260131	May 06, 2010	May 05, 2011
Agilent	Network Analyzer	E5071C	MY46101588	Apr. 20, 2011	Apr. 19, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 12, 2010	Jan. 11, 2012
R&S	Universal Radio Communication Tester	CMU200	114256	Feb. 08, 2010	Feb. 07, 2012
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR
R&S	Spectrum Analyzer (*2)	FSP30	101329	Apr. 26, 2010	Apr. 25, 2011
R&S	Spectrum Analyzer	FSP30	101067	Dec. 03, 2010	Dec. 02, 2011

Table 5.1 Test Equipment List

Note:

- The calibration certificate of DASY can be referred to appendix C of this report.
- (*1)The network analyzer, model: E8358A, was used to check the dielectric parameters of the liquids before May 5th 2011, and all parameters checking beyond this date used the model E5071C.
- (*2)The spectrum analyzer, model: FSP30, was used to monitor the signal during SAR testing before April 25th 2011, and it was changed to FSP30 (SN:101067) for monitoring signal from DUT.
- Referring to KDB 450824, the justification of dipole extended calibration as below. Dipole D835V2 serial no-499, D1900V2 serial no-5d041 included.
 - No physical damage on the dipole
 - System check with the specific dipole
 - The dipole return loss is < -20dB, within 20% of prior calibration
 - The dipole impedance is within 5 ohm of prior calibration.
 - The detailed information listed in Appendix F.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

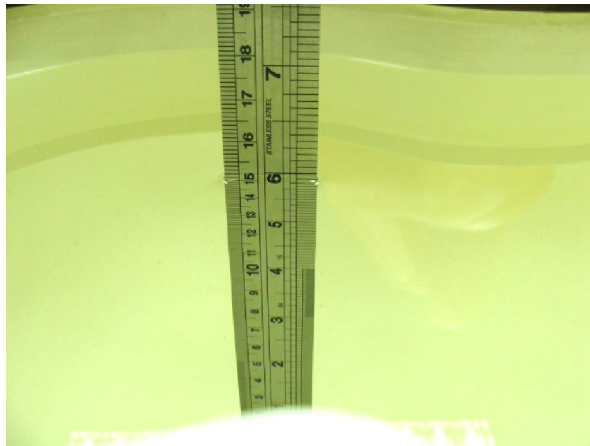


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The following table gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ_r)	$\pm 5\%$ Range
750	Head	0.89	0.85 ~ 0.93	41.9	39.8 ~ 44.0
835	Head	0.90	0.86 ~ 0.95	41.5	39.4 ~ 43.6
900	Head	0.97	0.92 ~ 1.02	41.5	39.4 ~ 43.6
1800, 1900, 2000	Head	1.40	1.33 ~ 1.47	40.0	38.0 ~ 42.0
2450	Head	1.80	1.71 ~ 1.89	39.2	37.2 ~ 41.2
750	Body	0.96	0.91 ~ 1.01	55.5	52.7 ~ 58.3
835	Body	0.97	0.92 ~ 1.02	55.2	52.4 ~ 58.0
900	Body	1.05	1.00 ~ 1.10	55.0	52.3 ~ 57.8
1800, 1900, 2000	Body	1.52	1.44 ~ 1.60	53.3	50.6 ~ 56.0
2450	Body	1.95	1.85 ~ 2.05	52.7	50.1 ~ 55.3

Table 6.2 Targets of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Temperature ($^{\circ}\text{C}$)	Conductivity (σ)	Permittivity (ϵ_r)	Measurement Date
835	Head	21.5	0.893	43.0	Feb. 13, 2011
835	Head	21.4	0.921	41.3	Apr. 07, 2011
835	Head	21.5	0.925	43.3	May. 12, 2011
835	Body	21.5	0.955	52.7	Feb. 09, 2011
835	Body	21.4	0.962	54.6	Mar. 15, 2011
835	Body	21.4	0.998	55.9	Apr. 07, 2011
835	Body	21.2	0.963	54.5	May. 12, 2011
835	Body	21.5	0.963	54.5	May. 21, 2011
835	Body	21.5	0.985	54.5	Jun. 03, 2011
1900	Head	21.6	1.45	38.2	Feb. 13, 2011
1900	Body	21.4	1.52	53.6	Feb. 13, 2011
1900	Body	21.5	1.55	53.2	May. 21, 2011

Table 6.3 Measuring Results for Simulating Liquid

Note: The measurement time was 2011/5/12 afternoon, while some BC10 SAR tests were finished before 2011/5/13 afternoon, so the tissue measurement data is valid for 1-day interval.

7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 7.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
Measurement System					
Probe Calibration	5.5	Normal	1	1	± 5.5 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	± 0.6 %
Test Sample Related					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
Phantom and Setup					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
Combined Standard Uncertainty					± 10.7 %
Coverage Factor for 95 %					K = 2
Expanded Uncertainty					± 21.4 %

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

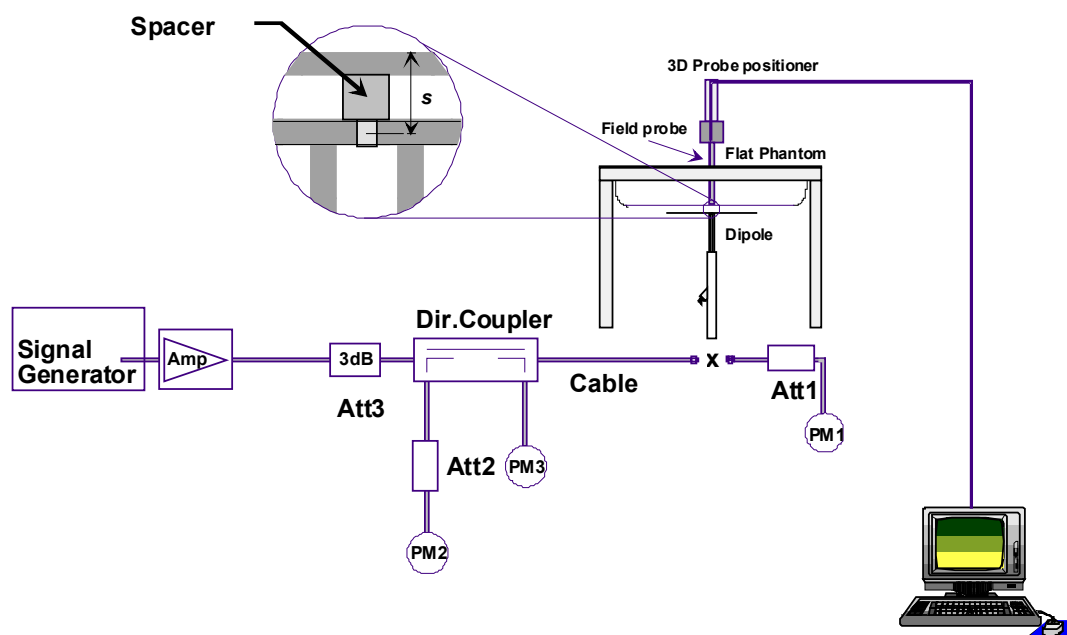


Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

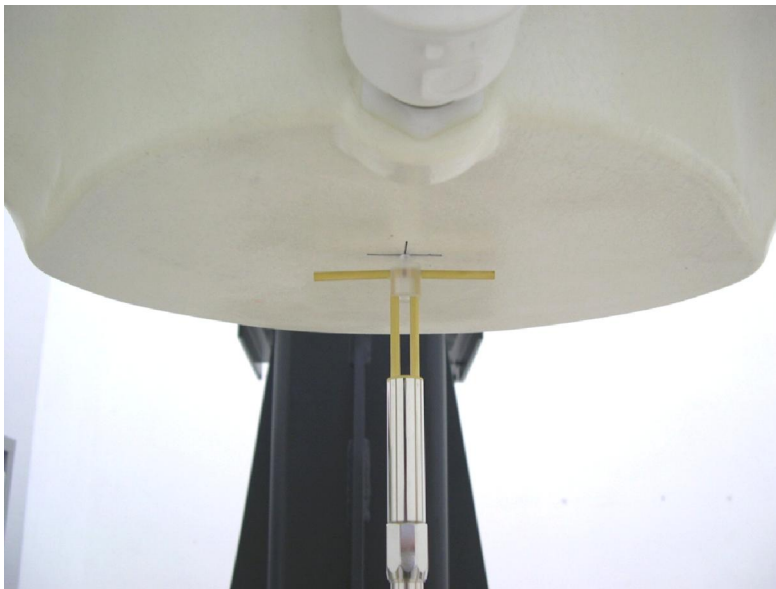


Fig 8.2 Photo of Dipole Setup

8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Liquid Type	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Feb. 13, 2011	835	Head	9.71	2.48	9.92	2.16
Apr. 07, 2011	835	Head	9.71	2.49	9.96	2.57
May. 12, 2011	835	Head	9.71	2.24	8.96	-7.72
Feb. 09, 2011	835	Body	9.82	2.52	10.08	2.65
Mar. 15, 2011	835	Body	9.82	2.43	9.72	-1.02
Apr. 07, 2011	835	Body	9.82	2.51	10.04	2.24
May. 12, 2011	835	Body	9.82	2.56	10.24	4.28
May. 21, 2011	835	Body	10.00	2.62	10.48	4.80
May. 21, 2011	835	Body	10.00	2.57	10.28	2.80
Jun. 03, 2011	835	Body	10.00	2.49	9.96	-0.40
Feb. 13, 2011	1900	Head	39.80	10.5	42.00	5.53
Feb. 13, 2011	1900	Body	40.00	10.5	42.00	5.00
May. 21, 2011	1900	Body	40.90	10.50	42.00	2.69
May. 21, 2011	1900	Body	40.00	10.80	43.20	8.00

Table 8.1 Target and Measurement SAR after Normalized

Note:

1. The system check time was 2011/5/12 afternoon, while some BC10 SAR tests were finished before 2011/5/13 afternoon, so the system check data is valid for 1-day interval.
2. Two 835 MHz dipoles were used. D835V2-499 was used before 2011/5/12, and D835V2-4d082 was used on 2011/5/21.
3. Two 1900 MHz dipoles were used. D1900V2-5d041 was used, and D1900V2-5d018 was also used on 2011/5/21.

9. DUT Testing Position

This DUT was tested in nine different positions. They are right cheek, right tilted, left cheek, left tilted, front face of the DUT with phantom 1.0 cm gap, rear face of the DUT with phantom 1.0 cm gap, right side of the DUT with phantom 1.0 cm gap, left side of the DUT with phantom 1.0 cm gap, and bottom side of the DUT with phantom 1.0 cm gap as illustrated below:

1. Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

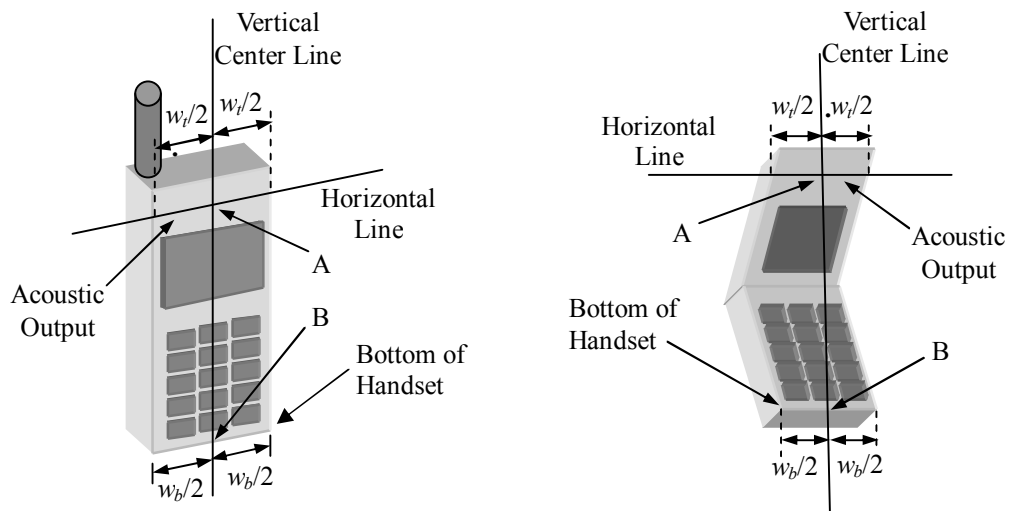


Fig 9.1 Illustration for Handset Vertical and Horizontal Reference Lines

2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.2).

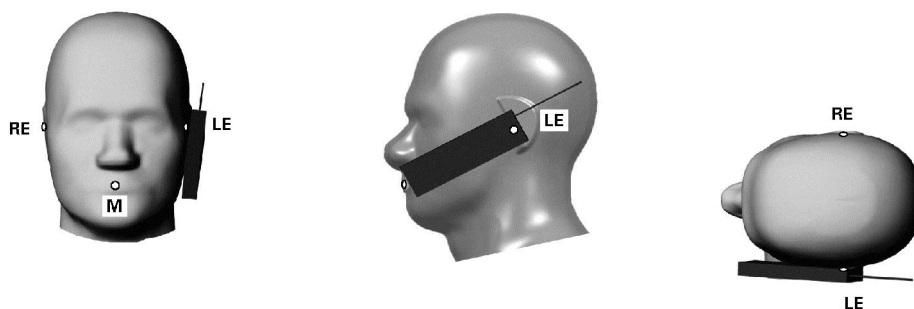


Fig 9.2 Illustration for Cheek Position

3. Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.3).

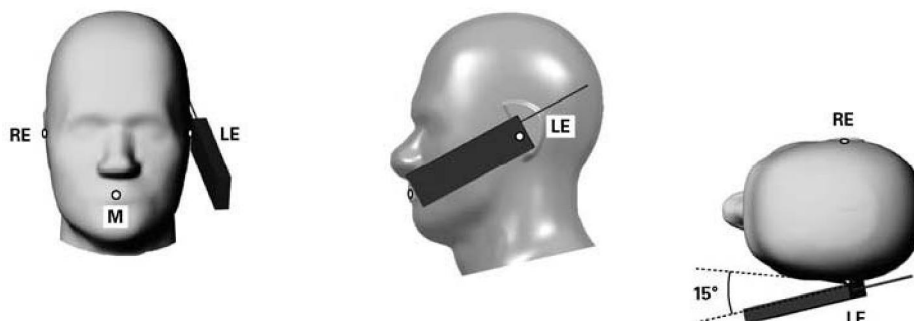


Fig 9.3 Illustration for Tilted Position

4. Body Worn Position

- (a) To position the device parallel to the phantom surface.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm.

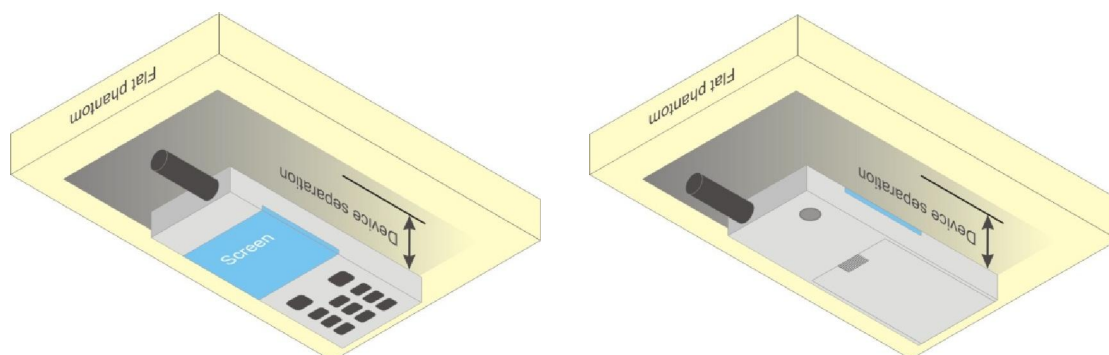


Fig 9.4 Illustration for Body Worn Position

5. DUT Setup Photos

Please refer to Appendix E for the test setup photos.

10. Measurement Procedures

The measurement procedures are as follows:

- (a) For WWAN function, link DUT with base station emulator in highest power channel
- (b) Set base station emulator to allow DUT to radiate maximum output power
- (c) Measure output power through RF cable and power meter
- (d) Place the DUT in the positions described in the last section
- (e) Set scan area, grid size and other setting on the DASY software
- (f) Taking data for the middle channel on each testing position
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

10.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Results

11.1 Conducted Power (Unit: dBm)

Band	BC10			BC0			BC1		
Channel	476	580	684	1013	384	777	25	600	1175
Frequency (MHz)	817.9	820.5	823.1	824.70	836.52	848.31	1851.25	1880.00	1908.75
1xRTT RC1+SO55	24.5	24.49	24.41	24.60	24.24	23.96	23.88	23.75	23.98
1xRTT RC3+SO55	24.53	24.51	24.52	24.66	24.24	24.04	23.98	23.76	24.09
1xRTT RC3+SO32 (FCH)	24.52	24.48	24.49	24.59	24.22	23.94	23.93	23.75	23.94
1xRTT RC3+SO32 (SCH)	24.49	24.46	24.47	24.57	24.23	23.92	23.91	23.78	23.92
1xEVDO RTAP 153.6	24.52	24.5	24.51	24.64	24.35	23.93	24.03	23.92	24.08
1xEVDO RETAP 4096	24.51	24.49	24.52	24.65	24.33	23.98	24.01	23.94	24.06

Note:

Referring to FCC KDB inquiry 781551, the test channel reduction in BC10 can be referred to KDB 447498 D01 6)c), test reduction considerations.

$$N = \text{Round}\{[100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c/100)^{0.2}\} = \text{Round}\{[100(823.1 - 817.9)/820]^{0.5}\} \times (820/100)^{0.2} = 1$$

Therefore, only 1 channel is sufficient for SAR tests in BC10. CH476 is chosen due to the highest output power in BC10.

11.2 Test Records for Head SAR Test

Plot No.	Band	Mode	Test Position	Ch	Battery	SAR _{1g} (W/kg)	SAR _{10g} (W/kg)
#96	CDMA2000 BC0	RC3+SO55	Right Cheek	1013	1	0.472	0.352
#97	CDMA2000 BC0	RC3+SO55	Right Cheek	1013	2	0.466	0.345
#98	CDMA2000 BC0	RC3+SO55	Right Tilted	1013	1	0.282	0.219
#99	CDMA2000 BC0	RC3+SO55	Left Cheek	1013	1	0.529	0.369
#100	CDMA2000 BC0	RC3+SO55	Left Tilted	1013	1	0.275	0.212
#101	CDMA2000 BC10	RC3+SO55	Left Cheek	476	1	0.635	0.443
#106	CDMA2000 BC10	RC3+SO55	Right Cheek	476	1	0.434	0.332
#107	CDMA2000 BC10	RC3+SO55	Right Cheek	476	2	0.416	0.312
#108	CDMA2000 BC10	RC3+SO55	Right Tilted	476	1	0.317	0.247
#109	CDMA2000 BC10	RC3+SO55	Left Tilted	476	1	0.245	0.192
#102	CDMA2000 BC1	RC3+SO55	Right Cheek	1175	1	0.885	0.528
#103	CDMA2000 BC1	RC3+SO55	Right Cheek	1175	2	0.879	0.526
#104	CDMA2000 BC1	RC3+SO55	Right Tilted	1175	1	0.515	0.295
#105	CDMA2000 BC1	RC3+SO55	Left Cheek	1175	1	0.669	0.375
#106	CDMA2000 BC1	RC3+SO55	Left Tilted	1175	1	0.566	0.285
#107	CDMA2000 BC1	RC3+SO55	Right Cheek	25	1	0.757	0.471
#108	CDMA2000 BC1	RC3+SO55	Right Cheek	600	1	0.847	0.507
#109	CDMA2000 BC1	RC3+SO55	Right Cheek	25	2	0.771	0.475
#110	CDMA2000 BC1	RC3+SO55	Right Cheek	600	2	0.861	0.522

Note:

1. According to KDB 941225 D01, Head SAR for RC1-SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3-SO55.
2. If the highest output channel SAR for each exposure position is < 0.8 W/kg, other channels SAR tests are not necessary.

11.3 Test Records for Body SAR Test

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch	Battery	Ear-phone	SAR _{1g} (W/kg)	SAR _{10g} (W/kg)
#22	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/o	1.05	0.801
#23	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	2	w/o	0.935	0.711
#24	CDMA2000 BC0	RC3+SO32	Front Face	1	1013	1	w/o	0.5	0.377
#25	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/o	1.02	0.766
#26	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/o	0.826	0.725
#27	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	2	w/o	1.04	0.789
#28	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	2	w/o	0.865	0.655
#29	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/	0.901	0.777
#31	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/	0.857	0.739
#32	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/	0.706	0.611
#30	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	w/o	1.11	0.854
#110	CDMA2000 BC10	RC3+SO32	Front Face	1	476	1	w/o	0.433	0.354
#115	CDMA2000 BC10	RC3+SO32	Rear Face	1	580	1	w/o	0.984	0.754
#116	CDMA2000 BC10	RC3+SO32	Rear Face	1	684	1	w/o	0.948	0.726
#117	CDMA2000 BC10	RC3+SO32	Rear Face	1	580	2	w/o	0.92	0.69
#118	CDMA2000 BC10	RC3+SO32	Rear Face	1	684	2	w/o	0.887	0.678
#119	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	w/	0.763	0.57
#89	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	w/o	0.674	0.433
#90	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	2	w/o	0.653	0.42
#91	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	1	w/o	0.538	0.347
#95	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	w/	0.53	0.339

Note:

1. For Body SAR, only Front Face, Rear Face are needed
2. Referring to KDB 941225 D01, the CDMA Handset Body SAR tests based on RC3+SO32. RC1, RTAP 153.6kbps (REV 0), and RETAP 4096 bits (Rev A) power are all less than 1/4 dB higher than RC3, thus SAR tests in these mode are not necessary.
3. SAR tests using the highest power channel first; for BC0/BC10 Front Face, and BC1 Front Face/Rear Face, SAR < 0.8W/kg, thus SAR for other channels are not necessary according to KDB 447498.

11.4 Test Records for Hotspot SAR Test

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch	Battery	Ear-phone	SAR _{1g} (W/kg)	SAR _{10g} (W/kg)
#22	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/o	1.05	0.801
#116	CDMA2000 BC0	RTAP153.6	Rear Face	1	1013	1	w/o	0.856	0.652
#23	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	2	w/o	0.935	0.711
#24	CDMA2000 BC0	RC3+SO32	Front Face	1	1013	1	w/o	0.5	0.377
#33	CDMA2000 BC0	RC3+SO32	Left Side	1	1013	1	w/o	0.599	0.42
#34	CDMA2000 BC0	RC3+SO32	Right Side	1	1013	1	w/o	0.442	0.303
#35	CDMA2000 BC0	RC3+SO32	Bottom Side	1	1013	1	w/o	0.266	0.139
#25	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/o	1.02	0.766
#26	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/o	0.826	0.725
#27	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	2	w/o	1.04	0.789
#28	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	2	w/o	0.865	0.655
#29	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/	0.901	0.777
#31	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/	0.857	0.739
#32	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/	0.706	0.611
#30	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	w/o	1.11	0.854
#119	CDMA2000 BC10	RTAP153.6	Rear Face	1	476	1	w/o	0.936	0.72
#110	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	2	w/o	1.01	0.775
#111	CDMA2000 BC10	RC3+SO32	Front Face	1	476	1	w/o	0.433	0.354
#112	CDMA2000 BC10	RC3+SO32	Left Side	1	476	1	w/o	0.696	0.492
#113	CDMA2000 BC10	RC3+SO32	Right Side	1	476	1	w/o	0.579	0.404
#114	CDMA2000 BC10	RC3+SO32	Bottom Side	1	476	1	w/o	0.122	0.07
#115	CDMA2000 BC10	RC3+SO32	Rear Face	1	580	1	w/o	0.984	0.754
#116	CDMA2000 BC10	RC3+SO32	Rear Face	1	684	1	w/o	0.948	0.726
#117	CDMA2000 BC10	RC3+SO32	Rear Face	1	580	2	w/o	0.92	0.69
#118	CDMA2000 BC10	RC3+SO32	Rear Face	1	684	2	w/o	0.887	0.678
#119	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	w/	0.763	0.57
#89	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	w/o	0.674	0.433
#120	CDMA2000 BC1	RTAP153.6	Rear Face	1	1175	1	w/o	0.499	0.334
#90	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	2	w/o	0.653	0.42
#91	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	1	w/o	0.538	0.347
#92	CDMA2000 BC1	RC3+SO32	Left Side	1	1175	1	w/o	0.204	0.118
#93	CDMA2000 BC1	RC3+SO32	Right Side	1	1175	1	w/o	0.169	0.103
#94	CDMA2000 BC1	RC3+SO32	Bottom Side	1	1175	1	w/o	0.475	0.257
#95	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	w/	0.53	0.339

Note:

- According to October 2010 TCB Workshop RF Exposure Procedures Update, the WWAN Antenna SAR for hotspot mode only Front Face, Rear Face, Bottom Side, Left Side, and Right Side are needed due to the antenna location is within 2.5 cm from the edge.
- Referring to KDB 941225 D06, the DUT size 12.5cm*6.5cm is bigger than 9cm*5cm, the test distance is 1



cm to the flat phantom.

3. Referring to KDB 941225 D01 page 7 and 8, the CDMA Handset Body SAR tests based on RC3+SO32. RC1, RTAP 153.6kbps (Ev-Do REV 0), and RETAP 4096 bits(Ev-Do Rev A) power are all less than 1/4 dB higher than RC3, thus SAR tests in SO32 were performed.
4. Regarding SAR for Hotspot mode, SO32 was mistakenly used here. Per FCC requested, SAR tests with RTAP 153.6kbps (Ev-Do Rev 0), for highest SO32 SAR among all configurations for each band are tested to show no significant difference from SO32, for the report filing this time. This is one time only permission from FCC. Checking the test data, Ev-Do SAR value is smaller than SO32, therefore SAR data with SO32 setting does not show non-compliance.
5. SAR tests using the highest power channel first; for BC0 Front Face, Bottom Side, Left Side, and Right Side, SAR < 0.8W/kg, thus SAR for other channels are not necessary according to KDB 447498.
6. SAR tests using the highest power channel first; for BC1, SAR < 0.8W/kg, thus SAR for other channels are not necessary according to KDB 447498.
7. SAR tests using the highest power channel first; for BC10 Front Face, Bottom Side, Left Side, and Right Side, SAR < 0.8W/kg, thus SAR for other channels are not necessary according to KDB 447498.

Remark: The worst case SAR plots are attached in Appendix B

11.5 Simultaneous Transmission SAR Analysis and Measurements

Bluetooth output power is 5.25dBm. Referring to KDB 648474

1. The power is < P(ref), where $P(\text{ref}) = 1/2(60/f) = 12\text{mW} = 10.8\text{dBm}$.
2. 5.9cm away from CDMA antenna
3. 4.3cm away from WiMax antenna
4. Bluetooth share the same antenna with WLAN, but WLAN and Bluetooth cannot transmit simultaneously. Therefore, standalone SAR and simultaneous SAR for Bluetooth is not required.

<SPLSR calculation procedure>

- 1) Use DASY software to open SAR data file with zoom scan results.
- 2) Export data file to SEMCAD using 'Field Data Export' function.
- 3) Search for highest SAR based on the imported measured/interpolated data and identify the X, Y, and Z coordinates. Per the SAR system manufacture, DASY stores the individual coordinates of each measurement point in the measurement file where the, center coordinate (x=0, y=0) is always the Grid Reference Point as set in DASY for a phantom section.
- 4) Calculate the peak SAR separation distances using the Pythagoras' theorem where
Peak SAR separation distance = $\sqrt{(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2}$
- 5) Calculate SPLSR = (SAR1 + SAR2) / Peak SAR separation distance.
- 6) The SPLSR calculation plots shown in test report are for reference only as the images were generated in a separate software program to add the antenna and arrow references. The distance information in the calculations below each plot is derived from the DASY SAR zoom scan data as specified in this procedure.

11.5.1 Consideration of Head Position
Table 11.5.1.1 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-0) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Head-Right Cheek	0.472 (BC0)	0.171	0.094	0.737	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.282 (BC0)	0.184	0.058	0.524	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.529 (BC0)	0.399	0.095	1.023	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.275 (BC0)	0.300	0.068	0.643	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Cheek	0.434 (BC10)	0.171	0.094	0.699	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.317 (BC10)	0.184	0.058	0.559	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.635 (BC10)	0.399	0.095	1.129	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.245 (BC10)	0.300	0.068	0.613	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Table 11.5.1.2 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Head-Right Cheek	0.472 (BC0)	0.316	0.094	0.882	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.282 (BC0)	0.370	0.058	0.71	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.529 (BC0)	0.474	0.095	1.098	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.275 (BC0)	0.491	0.068	0.834	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Cheek	0.434 (BC10)	0.316	0.094	0.844	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.317 (BC10)	0.370	0.058	0.745	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.635 (BC10)	0.474	0.095	1.204	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.245 (BC10)	0.491	0.068	0.804	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Table 11.5.1.3 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-0) + WLAN

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Head-Right Cheek	0.885	0.171	0.094	1.15	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.515	0.184	0.058	0.757	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.669	0.399	0.095	1.163	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.566	0.300	0.068	0.934	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Table 11.5.1.4 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Head-Right Cheek	0.885	0.316	0.094	1.295	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Right Tilted	0.515	0.370	0.058	0.943	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Cheek	0.669	0.474	0.095	1.238	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Head-Left Tilted	0.566	0.491	0.068	1.125	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Note:

1. CDMA (voice) + WiMax (data) + WLAN (router) at head position
2. Scalar SAR < 1.6W/kg, simultaneous SAR consideration is not necessary.

11.5.2 Consideration of Body-worn accessory Configuration
Table 11.5.2.1 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-0) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.5 (BC0)	0.100	0.046	0.646	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.05 (BC0)	0.611	0.446	2.107	0.210	0.551	0.144	SPLSR>0.3, Simul-TX SAR is required
Front Face	0.433 (BC10)	0.100	0.046	0.579	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.11 (BC10)	0.611	0.446	2.167	0.21	0.46	0.144	SPLSR>0.3, Simul-TX SAR is required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 7.9 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.611) / 7.9 = 0.210$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.7 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.446) / 2.7 = 0.551$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 8.02 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.611) / 8.02 = 0.21$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.446) / 3.4 = 0.46$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-0 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0444, 0.0546, -0.206), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.611 + 0.446) / 7.4 = 0.14$

Table 11.5.2.2 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.5 (BC0)	0.130	0.046	0.676	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.05 (BC0)	0.668	0.446	2.164	0.23	0.551	0.170	SPLSR>0.3, Simul-TX SAR is required
Front Face	0.5 (BC10)	0.130	0.046	0.676	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.11 (BC10)	0.668	0.446	2.224	0.24	0.46	0.170	SPLSR>0.3, Simul-TX SAR is required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.668) / 7.4 = 0.233$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.7 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.446) / 2.7 = 0.551$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 7.56 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.668) / 7.56 = 0.24$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.446) / 3.4 = 0.46$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-1 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0344, 0.0526, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 6.5 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.668 + 0.446) / 6.5 = 0.170$

**Table 11.5.2.3 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-0) + WLAN**

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.538	0.100	0.046	0.684	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	0.674	0.611	0.446	1.731	0.114	0.154	0.144	SPLSR<0.3, Simul-TX SAR is not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1 SO32 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 11.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.611) / 11.3 = 0.114$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.446) / 7.3 = 0.154$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-0 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0444, 0.0546, -0.206), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.611 + 0.446) / 7.4 = 0.144$

Table 11.5.2.4 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.538	0.130	0.046	0.714	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	0.674	0.668	0.446	1.788	0.121	0.15	0.170	SPLSR<0.3, Simul-TX SAR is not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 11.1 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.668) / 11.1 = 0.121$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.446) / 7.3 = 0.154$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-RTAP153.6 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.015, -0.031, -0.175), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 4.9 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.499 + 0.446) / 4.9 = 0.193$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-1 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0344, 0.0526, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 6.5 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.668 + 0.446) / 6.5 = 0.170$

Note:

1. In Body-worn accessory configuration, Front Face and Rear Face are needed to be evaluated.
2. CDMA (voice) + WiMax (data) + WLAN (router)
3. RC3+SO32 was used for SAR testing, per KDB 941225 D01
4. Only combinations with SPLSR >0.3 needed to be evaluated volume scan.

11.5.3 Consideration of Hotspot mode
Table 11.5.3.1 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-0) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.5 (BC0)	0.100	0.046	0.646	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.05 (BC0)	0.611	0.446	2.107	0.210	0.551	0.144	SPLSR>0.3, Simul-TX SAR is required
Rear Face RTAP 153.6	0.856 (BC0)	0.611	0.446	1.913	0.203	0.46	0.144	SPLSR>0.3, Simul-TX SAR is required
Bottom Side	0.203 (BC0)	0	0	0.203	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0 (BC0)	0.104	0	0.104	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.599 (BC0)	0	0.208	0.807	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Right Side	0.442 (BC0)	0.358	0	0.800	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Front Face	0.433 (BC10)	0.100	0.046	0.579	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.11 (BC10)	0.611	0.446	2.167	0.21	0.46	0.144	SPLSR>0.3, Simul-TX SAR is required
Rear Face RTAP 153.6	0.936 (BC10)	0.611	0.446	1.993	0.21	0.36	0.144	SPLSR>0.3, Simul-TX SAR is required
Bottom Side	0.122 (BC10)	0	0	0.122	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0 (BC10)	0.104	0	0.104	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.696 (BC10)	0	0.208	0.907	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Right Side	0.579 (BC10)	0.358	0	0.937	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 7.9 cm

SPLSR (SAR to Peak Location Spacing Ratio) = (1.05 + 0.611) / 7.9 = 0.210

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 RTAP 153.6+ WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.009, -0.202), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 6.8 cm

SPLSR (SAR to Peak Location Spacing Ratio) = (0.856 + 0.611) / 6.8 = 0.21

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.7 cm

SPLSR (SAR to Peak Location Spacing Ratio) = (1.05 + 0.446) / 2.7 = 0.551

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 RTAP153.6 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.009, -0.202), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.85 cm

SPLSR (SAR to Peak Location Spacing Ratio) = (0.856 + 0.446) / 2.85 = 0.46

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 8.02 cm

SPLSR (SAR to Peak Location Spacing Ratio) = (1.11 + 0.611) / 8.02 = 0.21



The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 RTAP153.6 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.027, -0.202), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 8.53 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.936 + 0.611) / 8.53 = 0.18$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.446) / 3.4 = 0.46$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 RTAP 153.6+ WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.027, -0.202), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.89 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.936 + 0.446) / 3.89 = 0.36$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-0 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0444, 0.0546, -0.206), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.611 + 0.446) / 7.4 = 0.14$

Table 11.5.3.2 Co-located Simultaneous Transmission Analysis for CDMA2000 BC0/10 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC0/10	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.5 (BC0)	0.130	0.046	0.676	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.05 (BC0)	0.668	0.446	2.164	0.23	0.551	0.170	SPLSR>0.3, Simul-TX SAR is required
Rear Face RTAP 153.6	0.856 (BC0)	0.668	0.446	1.97	0.242	0.46	0.170	SPLSR>0.3, Simul-TX SAR is required
Bottom Side	0.203 (BC0)	0	0	0.203	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0 (BC0)	0.401	0	0.401	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.599 (BC0)	0	0.208	0.807	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Right Side	0.442 (BC0)	0.358	0	0.8	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Front Face	0.5 (BC10)	0.130	0.046	0.676	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	1.11 (BC10)	0.668	0.446	2.224	0.24	0.46	0.170	SPLSR>0.3, Simul-TX SAR is required
Rear Face RTAP 153.6	0.936 (BC10)	0.668	0.446	2.05	0.20	0.36	0.170	SPLSR>0.3, Simul-TX SAR is required
Bottom Side	0.203 (BC10)	0	0	0.203	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0 (BC10)	0.401	0	0.401	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.599 (BC10)	0	0.208	0.807	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Right Side	0.442 (BC10)	0.358	0	0.8	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.668) / 7.4 = 0.233$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 RTAP153.6 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.009, -0.202), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 6.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.856 + 0.668) / 6.3 = 0.242$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0128, -0.0178, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.7 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.05 + 0.446) / 2.7 = 0.55$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC0 RTAP153.6 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.009, -0.202), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 2.85 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.856 + 0.446) / 2.85 = 0.46$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 7.56 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.668) / 7.56 = 0.24$



The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 RTAP153.6 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.027, -0.202), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 8.09 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.936 + 0.668) / 8.09 = 0.20$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0188, -0.0214, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(1.11 + 0.446) / 3.4 = 0.46$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC10 RTAP 153.6+ WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.02, -0.027, -0.202), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 3.89 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.936 + 0.446) / 3.89 = 0.36$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-1 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0344, 0.0526, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 6.5 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.668 + 0.446) / 6.5 = 0.170$

Table 11.5.3.3 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-0) + WLAN

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-0)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.538	0.100	0.046	0.684	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	0.674	0.611	0.446	1.731	0.114	0.154	0.144	SPLSR<0.3, Simul-TX SAR is not required
Rear Face RTAP 153.6	0.499	0.611	0.446	1.556	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Bottom Side	0.475	0	0	0.475	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0	0.104	0	0.104	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.204	0	0.208	0.412	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Right Side	0.164	0.358	0	0.522	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1 + WiMAX Ant-0) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T2(-0.0444, 0.0546, -0.206)

Peak Location Spacing = 11.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.611) / 11.3 = 0.114$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.446) / 7.3 = 0.154$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-0 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0444, 0.0546, -0.206), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.4 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.611 + 0.446) / 7.4 = 0.144$

Table 11.5.3.4 Co-located Simultaneous Transmission Analysis for CDMA2000 BC1 + WiMAX(Ant-1) + WLAN

Position	Transmitter 1 CDMA BC1	Transmitter 2 WiMAX (Ant-1)	Transmitter 3 WLAN	All 3 SAR Summation	SPLSR T1&T2	SPLSR T1&T3	SPLSR T2&T3	Note
Front Face	0.538	0.130	0.046	0.714	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Rear Face	0.674	0.668	0.446	1.788	0.121	0.15	0.170	SPLSR<0.3, Simul-TX SAR is not required
Rear Face RTAP 153.6	0.499	0.668	0.446	1.633	0.13	0.19	0.170	SPLSR<0.3, Simul-TX SAR is not required
Bottom Side	0.475	0	0	0.475	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Top Side	0	0.401	0	0.401	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required
Left Side	0.204	0	0.208	0.412	N/A	N/A	N/A	SUM SAR<1.6, Simul-TX SAR not required

Note: The calculation of SPLSR is as follows.

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-SO32 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 11.1 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.668) / 11.1 = 0.121$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-SO32 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.0352, -0.0582, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 7.3 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.674 + 0.446) / 7.3 = 0.154$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-RTAP153.6 + WiMAX Ant-1) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.015, -0.031, -0.175), T2(-0.0344, 0.0526, -0.205)

Peak Location Spacing = 9.09 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.499 + 0.668) / 9.09 = 0.13$

The calculation of SPLSR for (Body-Rear Face, CDMA2000 BC1-RTAP153.6 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T1(-0.015, -0.031, -0.175), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 4.9 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.499 + 0.446) / 4.9 = 0.193$

The calculation of SPLSR for (Body-Rear Face, WiMAX Ant-1 + WLAN) is as below:

Coordinate of Peak SAR Location (X, Y, Z) : T2(-0.0344, 0.0526, -0.205), T3(0.0064, 0.0014, -0.205)

Peak Location Spacing = 6.5 cm

SPLSR (SAR to Peak Location Spacing Ratio) = $(0.668 + 0.446) / 6.5 = 0.170$

11.5.4 Volume Scan result
Table 11.5.4.1 Volume Scan SAR Measurement Results

Plot No.	Band	Mode	Test Position	Ch.	Battery	SAR _{1g} (W/kg)	Multi Band SAR _{1g} (W/kg)
#111	CDMA2000 BC0	RC3+SO32	Body-worn Rear Face	Ch 1013	1	1.06	1.22
#115	WiMAX	QPSK 1/2, 5M, Ant-0		2593 MHz	1	0.572	
#113	802.11b	-		Ch 6	1	0.391	
#111	CDMA2000 BC0	RC3+SO32	Body-worn Rear Face	Ch 1013	1	1.06	1.19
#114	WiMAX	QPSK 1/2, 5M, Ant-1		2593 MHz	1	0.613	
#113	802.11b	-		Ch 6	1	0.391	
#112	CDMA2000 BC10	RC3+SO32	Body-worn Rear Face	Ch 476	1	1.17	1.33
#115	WiMAX	QPSK 1/2, 5M, Ant-0		2593 MHz	1	0.572	
#113	802.11b	-		Ch 6	1	0.391	
#112	CDMA2000 BC10	RC3+SO32	Body-worn Rear Face	Ch 476	1	1.17	1.3
#114	WiMAX	QPSK 1/2, 5M, Ant-1		2593 MHz	1	0.613	
#113	802.11b	-		Ch 6	1	0.391	

Note:

1. The worst configuration on each position is used for the volume scan.
2. Referring to volume plots in Appendix G, the WiMax SAR peaks are not overlapping with other peaks (WLAN, CDMA). From the aggregate 1g-SAR, the volume scan peaks are surrounded by CDMA and WLAN peaks, and mainly contributed from CDMA and WLAN. Therefore, scaling for WiMax control symbol is not applied in the volume scan.

Table 11.5.4.2 Volume Scan SAR Measurement Results

Plot No.	Band	Mode	Test Position	Ch.	Battery	SAR _{1g} (W/kg)	Multi Band SAR _{1g} (W/kg)
#122	CDMA2000 BC0	Ev-Do	Hotspot Rear Face	Ch 1013	1	0.906	1.04
#115	WiMAX	QPSK 1/2, 5M, Ant-0		2593 MHz	1	0.572	
#113	802.11b	-		Ch 6	1	0.391	
#122	CDMA2000 BC0	Ev-Do	Hotspot Rear Face	Ch 1013	1	0.906	1.02
#114	WiMAX	QPSK 1/2, 5M, Ant-1		2593 MHz	1	0.613	
#113	802.11b	-		Ch 6	1	0.391	
#121	CDMA2000 BC10	Ev-Do	Hotspot Rear Face	Ch 476	1	0.941	1.07
#115	WiMAX	QPSK 1/2, 5M, Ant-0		2593 MHz	1	0.572	
#113	802.11b	-		Ch 6	1	0.391	
#121	CDMA2000 BC10	Ev-Do	Hotspot Rear Face	Ch 476	1	0.941	1.02
#114	WiMAX	QPSK 1/2, 5M, Ant-1		2593 MHz	1	0.613	
#113	802.11b	-		Ch 6	1	0.391	

Note:

1. The worst configuration on each position is used for the volume scan.
2. The RTAP 153.6kbps (Ev-Do Rev 0) setting was used for data connection in Hotspot mode.
3. Referring to volume plots in Appendix G, the WiMax SAR peaks are not overlapping with other peaks (WLAN, CDMA). From the aggregate 1g-SAR, the volume scan peaks are surrounded by CDMA and WLAN peaks, and mainly contributed from CDMA and WLAN. Therefore, scaling for WiMax control symbol is not applied in the volume scan.

Test Engineer : A-Rod Chen and Eric Huang

12. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] IEEE Std. C95.1-1991, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1991
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 447498 D02 v02, "SAR Measurement Procedures for USB Dongle Transmitters", November 2009
- [9] FCC KDB 616217 D01 v01r01, "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens", November 2009
- [10] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [11] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [12] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [13] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [14] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010

***Appendix A. Plots of System Performance Check***

The plots are shown as follows.



Appendix B. Plots of SAR Measurement

The plots are shown as follows.



Appendix C. DASY Calibration Certificate

The DASY calibration certificates are shown as follows.