



# A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.  
Tel : 886-3-271-0188 / Fax : 886-3-271-0190

## HAC EVALUATION REPORT



Test Report No.	: 1110FS13
Applicant	: HTC Corporation
Trade Name	: HTC
Model Number	: PJ03120
EUT Type	: Smartphone
FCC ID	: NM8PJ03120
Date of Received	: Sep.06, 2011
Dates of Test	: Oct. 05, 2011
Issued Date	: Oct. 11, 2011
Test Environment	: Ambient Temperature : $22 \pm 2$ °C Relative Humidity : 40 - 70 %
FCC Rule Part(s)	: FCC 47 CFR § 20.19.
HAC Standard	: ANSI C63.19-2007
C63.19 HAC Rated Category	: M3 (RF EMISSIONS)
Test Lab.	: Chang-An Lab

1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp.  
This document may be altered or revised by A Test Lab Techno. Corp. personnel only, and shall be noted

Approved By : Sam Chuang  
(Sam Chuang)

Tested By : Alex Wu  
(Alex Wu)



# Contents

1. Description of Equipment under Test (EUT) .....	3
2. Introduction .....	4
3. Test Equipment List.....	5
4. Test Procedure .....	6
5. System Check.....	7
5.1 System check parameters.....	7
5.2 Validation Procedure .....	7
5.3 Illustrative dipole calculated and measured values.....	8
5.4 Validation Results .....	9
6. Probe Modulation Factor.....	10
7. HAC Testing with RF Transmitters .....	13
8. Test Results.....	14
8.1 HAC E-Field measurement results.....	14
8.2 HAC H-Field measurement results.....	16
8.3 Description of the Device under Test (DUT).....	18
Appendix A - Details of WD signal.....	19
Appendix B - Validation .....	21
Appendix C - HAC distribution plots for E-Field and H-Field.....	25
Appendix D - Calibration.....	73
Appendix E - Uncertainty.....	111



## 1. Description of Equipment under Test (EUT)

Applicant	:	HTC Corporation		
Applicant Address	:	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan		
Manufacturer	:	HTC Corporation		
Manufacturer Address	:	No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan		
EUT Type	:	Smartphone		
Trade Name	:	HTC		
Model Number	:	PJ03120		
FCC ID	:	NM8PJ03120		
IMIE No	:	358703040011360		
RF Output Power	:	1.667 W	(32.22 dBm)	GSM 850
		1.084 W	(30.35 dBm)	PCS 1900
		0.206 W	(23.14 dBm)	WCDMA Band II
		0.207 W	(23.15 dBm)	WCDMA Band V
Tx Frequency	:	824.2	- 848.8	MHz (GSM 850)
		1850.2	- 1909.8	MHz (PCS 1900)
		1852.6	- 1907.4	MHz (WCDMA Band II)
		826.6	- 846.4	MHz (WCDMA Band V)
Antenna Type	:	PIFA Type		
Test Device	:	Production Unit		
Device Category	:	Portable		

This wireless portable device has performed Hearing Aid Compatibility (HAC) measurements for the portable cellular phone. The measurements were performed to ensure compliance to the ANSI C63.19-2007 standards.



<All Air Interfaces / Bands List>

Air-Interface	Band (MHz)	Type	C63.19 Tested	Simultaneous Transmissions	Concurrent Single Transmission	Reduced Power 20.19(e)	Voice Over Digital Transport (Data)
GSM	850	Voice	Yes	Yes WLAN (2450MHz) / BT	No	N/A	No
	1900	Voice	Yes		No	N/A	No
	GPRS/EGPRS	Data	No		No	N/A	No
WCDMA	Band II	Voice	Yes	Yes WLAN (2450MHz) / BT	Yes	N/A	Yes
	Band V	Voice	Yes		Yes	N/A	Yes
	HSDPA/HSUPA	Data	No		Yes	N/A	Yes
WLAN	2450	Data	No	Yes GSM or WCDMA	No (Note1)	N/A	No
Bluetooth	2450	Data	No	Yes GSM or WCDMA	No (Note1)	N/A	No

Note 1: The voice function maybe active via 3<sup>rd</sup> party software application.

## 2. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **HTC Corporation Trade Name: HTC Model(s) : PJ03120**. The test procedures, as described in ANSI C63.19-2007 standard were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment are included within this test report.




### 3. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ER3DV6R	2256	Aug. 26, 2011	Aug. 26, 2012
SPEAG	Dosimetric H-Filed Probe	H3DV6	6076	Aug. 30, 2011	Aug. 30, 2012
SPEAG	835 MHz System Validation Kit	CD835V3	1017	Jul. 20, 2011	Jul. 20, 2012
SPEAG	1880 MHz System Validation Kit	CD1880V3	1036	Jul. 20, 2011	Jul. 20, 2012
SPEAG	Data Acquisition Electronics	DAE4	779	Jan. 31, 2011	Jan. 31, 2012
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Phantom	SAM V4.0	TP-1150	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY4 V4.7 Build 80	N/A	NCR	
SPEAG	Software	SEMCAD X V1.8 Build 186	N/A	NCR	
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
Agilent	Wireless Communication Test Set	CMU200	109369	Aug. 10, 2010	Aug. 10, 2012
Agilent	Spectrum Analyzer(ESA-L)	E4408B	MY45107753	Jul. 07, 2011	Jul. 07, 2012
R&S	Spectrum Analyzer(FSL)	FSL6	100410	NCR	
Agilent	Power Meter	E4418B	GB40206143	Jun. 25, 20011	Jun. 25, 2012
Agilent	MXG Vector Signal Generator	N5182A	MY47420962	May 16, 2011	May 16, 2013
R&S	Power Sensor	8481H	3318A20779	Jun. 25, 20011	Jun. 25, 2012
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G	D042005 671800514	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	

**Table 1. Test Equipment List**

## 4. Test Procedure

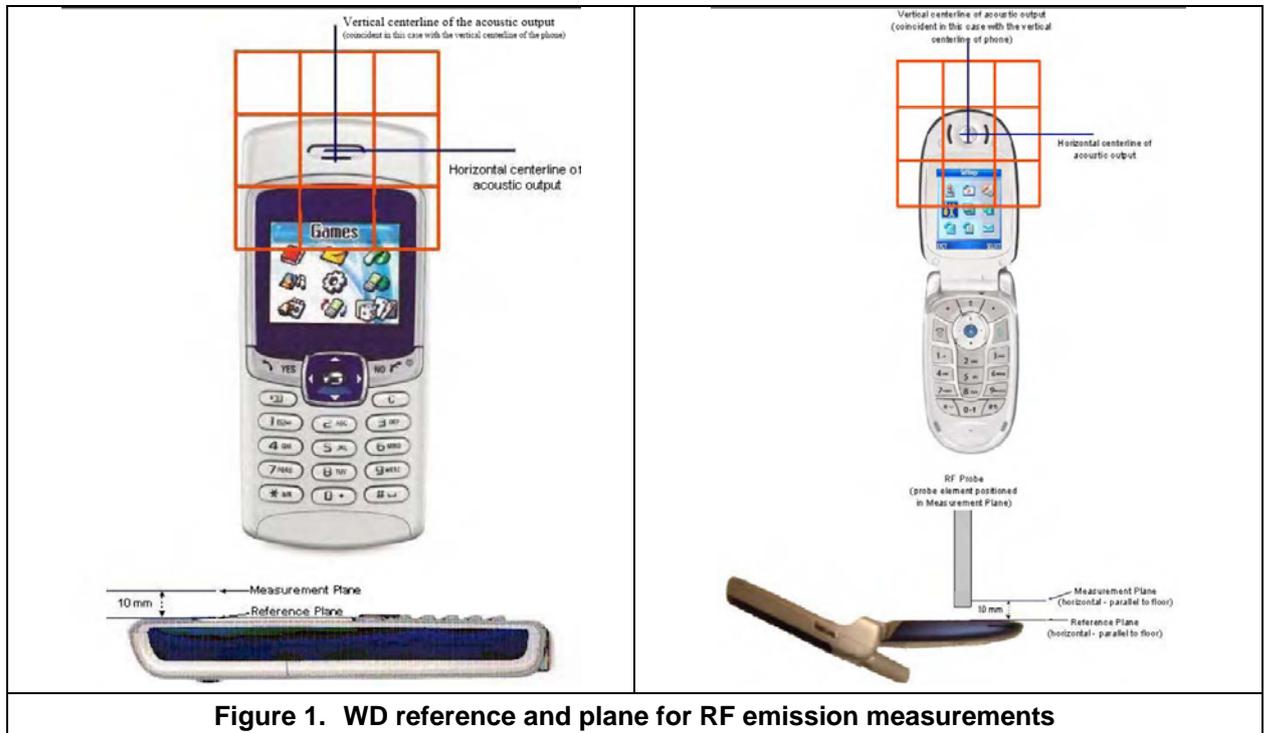

**Figure 1. WD reference and plane for RF emission measurements**

The following illustrate a typical RF emissions test scan over a wireless communications device:


1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm or 5mm increments in the 5 x 5 cm region were performed at a distance 15 mm from the center point of the probe measurement element to the WD. A 360o rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1-8 were done for both the E and H-Field measurements.

## 5. System Check

### 5.1 System check parameters

The input signal was an un-modulated continuous wave. The following points were taken into consideration in performing this check:

- Average Input Power  $P = 100\text{mW RMS}$  ( $20\text{dBm RMS}$ ) after adjustment for return loss.
- The test fixture must meet the 2 wavelength separation criterion.
- The proper measurement of the 1 cm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

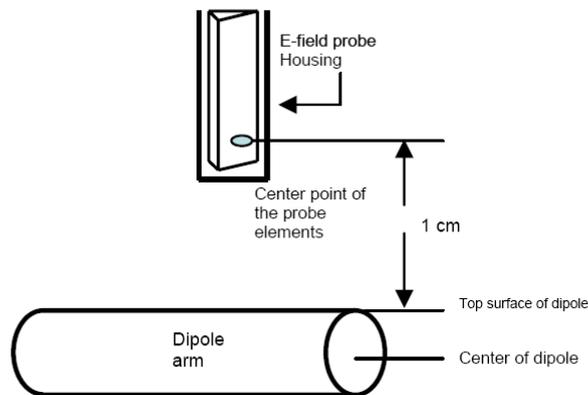

### 5.2 Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI-PC63.19 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- the probes and their cables are parallel to the coaxial feed of the dipole antenna
- the probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions; and
- the probes are 10 mm from the surface of the dipole elements.

Scan the length of the dipole with both E-field and H-field probes and record the maximum values for each. Compare the readings to expected values.

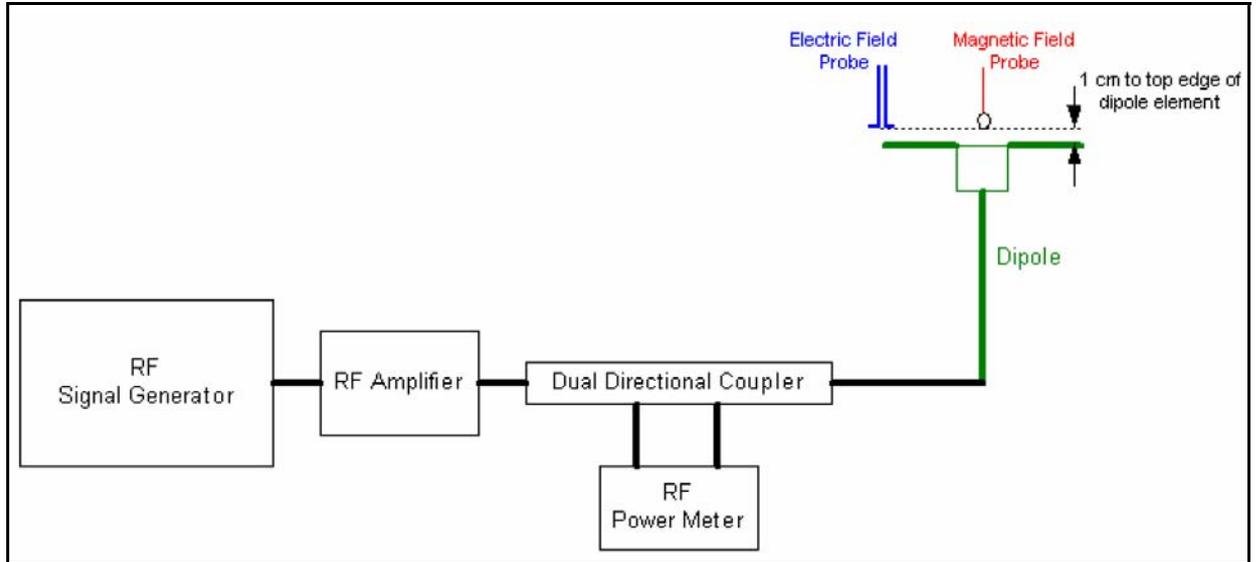


Figure 2. WD dipole calibration procedure

### 5.3 Illustrative dipole calculated and measured values

Baseband frequencies (MHz)	Frequency (MHz)	E-field calculated values (V/m)	E-field measured values (V/m)	E-field delta (calculated to measured) (V/m) & %	H-field calculated values (A/m)	H-field measured values (A/m)	H-field delta (calculated to measured) (A/m) & %
790–850	835	187			0.476		
806–821	813.5	190			0.481		
896–901	898.5	185			0.477		
1880–2000	1880	149			0.456		
		224.6–236.4			0.5139–0.5226		
		214.9–232.2			0.4954–0.5164		
		213.2–220.9			0.5032–0.5005		
		153.6–149.3			0.4478–0.4035		

NOTE 1— Numeric modeling results will vary based on several factors, including the size of the computational area, boundary conditions selected, grid resolution, accuracy of models for material properties, and other factors. Further, the results obtained by numeric modeling will vary from measured results based on many additional factors, including the degree to which the probe perturbs the field, the degree to which the probe averages the field strength over its dimensions, the linearity of the probe, the differences between the physical dipole and its modeled representation, and many other factors. Numeric computations provided to the committee showed significant variability between different results. Accordingly the values provided should be used judiciously and not interpreted to be absolutely correct. The calculated values provided for dipoles were developed using theoretical numerical computation.

NOTE 2— Delta % =  $100 \times (\text{measured peak} - \text{calculated}) / \text{calculated}$ . Values within  $\pm 25\%$  are acceptable, of which 12% is deviation and 13% is measurement uncertainty. Values independently validated for the dipole actually used in the measurements should be used, when available.



## 5.4 Validation Results

Dipole	Freq. (MHz)	Protocol	Input Power (mW)	Target for Dipole (V/m)	E-Field Results (V/m)	Deviation	Date
SN:1017	835	CW	100	164.1	174.2	6.15 %	Oct. 05, 2011
SN:1036	1880	CW	100	138.1	147.0	6.44 %	Oct. 05, 2011

**Table 2. Dipole E-Field Measurement Summary**

Dipole	Freq. (MHz)	Protocol	Input Power (mW)	Target for Dipole (A/m)	H-Field Results (A/m)	Deviation	Date
SN:1017	835	CW	100	0.462	0.470	1.73 %	Oct. 05, 2011
SN:1036	1880	CW	100	0.464	0.463	-0.30 %	Oct. 05, 2011

**Table 3. Dipole H-Field Measurement Summary**

## 6. Probe Modulation Factor

After every probe calibration, the response of the probe to each applicable modulated signal (CDMA, GSM, WCDMA (UMTS), etc) must be assessed at both 835 MHz, 1880 MHz. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. For each PMF assessment, a Signal Generator was used to replace the original CW signal with the desired modulated signal. The PMF results are shown in Table 4. RF Field Probe Modulation Response was measured with the field probe and associated measurement equipment. The PMF was measured per ANSI C63.19-2007 using a signal generator as follows:

1. Illuminate a dipole with a CW signal at the intended measured frequency.
2. Fix the probe at a set location relative to the dipole; typically located at the field reference point.
3. Record the reading of the probe measurement system of the CW signal.
4. Substitute a modulated signal of the same amplitude, using the same modulation as that used by the intended WD for the CW signal.
5. Record the reading of the probe measurement system of the modulated signal.
6. The ratio of the CW to modulated signal reading is the probe modulation factor.
7. Spectrum analyzer settings:
  - Center Frequency: nominal center frequency of channel
  - Span: zero
  - Resolution bandwidth  $\geq$  emission bandwidth
  - Video bandwidth  $\geq$  20 kHz.
  - Detection: RMS detection.
  - Trigger: Video or IF trigger, adjusted to give a stable display of the transmission.
  - Sweep rate: Set to show a complete transmission cycle.
  - Line max hold may be used temporarily to ease the peak reading.
8. Calculate the Probe Modulation Factor as the ratio between the CW multimeter field reading and the reading for the applicable modulation. I.e.,  $PMF = \frac{E_{CW}}{E_{mod}}$  and similar for H.

gfortheapplicablemodulation.I.e.,  $PMF = \frac{E_{CW}}{E_{mod}}$  and similar for H.

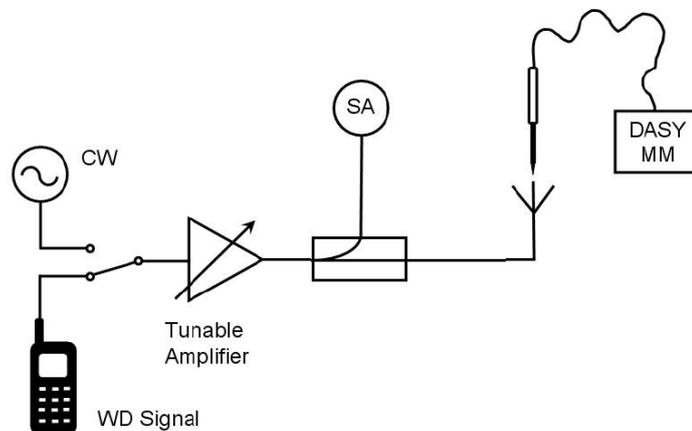


Figure 3. Probe Modulation Factor Measurement Diagram



**Formula between PMF and test results**

1. HAC test of device and determine the maximum value (M) of grids.
2. Determine the value (P) of PMF according to (M).
3. Find the maximum value (F) from the other data.

$$R = P * F$$

Example:

E-Field Maximum value (M) = 52, Maximum value (F) = 51.8, PMF (P) = 2.82

R = 51.8 \* 2.82 = 146.076 V/m

Frequency (MHz)	Protocol	E-Field Probe SN:2256		H-Field Probe SN:6076	
		E-Field (V/m)	E-Field Modulation Factor	H-Field (A/m)	H-Field Modulation Factor
835.0	GSM	< 47	2.53	< 0.14	1.81
		47 - 63	2.54	0.14 - 0.19	2.12
		63 - 84	2.54	0.19 - 0.25	2.37
		84 - 112	2.55	0.25 - 0.34	2.57
		112 - 150	2.56	0.34 - 0.45	2.68
		150 - 200	2.56	0.45 - 0.60	2.71
		200 - 266	2.57	0.60 - 0.80	2.64
		266 - 355	2.57	0.80 - 1.07	2.49
		355 - 473	2.58	1.07 - 1.43	2.26
		473 - 631	2.58	1.43 - 1.91	1.98
		631 - 841	2.59	1.91 - 2.54	1.67
841 - 1122	2.60	2.54 - 3.39	1.36		
1880.0	GSM	< 47	2.53	< 0.14	2.63
		47 - 63	2.52	0.14 - 0.19	2.59
		63 - 84	2.51	0.19 - 0.25	2.54
		84 - 112	2.50	0.25 - 0.34	2.44
		112 - 150	2.49	0.34 - 0.45	2.32
		150 - 200	2.48	0.45 - 0.60	2.18
		200 - 266	2.47	0.60 - 0.80	2.02
		266 - 355	2.46	0.80 - 1.07	1.92
		355 - 473	2.45	1.07 - 1.43	1.73
		473 - 631	2.44	1.43 - 1.91	1.54
		631 - 841	2.43	1.91 - 2.54	1.36
841 - 1122	2.42	2.54 - 3.39	1.17		



Frequency (MHz)	Protocol	E-Field Probe SN:2256		H-Field Probe SN:6076	
		E-Field (V/m)	E-Field Modulation Factor	H-Field (A/m)	H-Field Modulation Factor
835.0	WCDMA(UMTS)	< 47	1.07	< 0.14	0.86
		47 - 63	1.04	0.14 - 0.19	0.86
		63 - 84	1.01	0.19 - 0.25	0.85
		84 - 112	0.98	0.25 - 0.34	0.83
		112 - 150	0.95	0.34 - 0.45	0.81
		150 - 200	0.92	0.45 - 0.60	0.78
		200- 266	0.89	0.60 - 0.80	0.75
		266 - 355	0.87	0.80 - 1.07	0.72
		355 - 473	0.84	1.07 - 1.43	0.68
		473 - 631	0.82	1.43 - 1.91	0.64
		631 - 841	0.79	1.91 - 2.54	0.61
841 - 1122	0.77	2.54 - 3.39	0.56		
1880.0	WCDMA(UMTS)	< 47	0.90	< 0.14	0.81
		47 - 63	0.89	0.14 - 0.19	0.76
		63 - 84	0.89	0.19 - 0.25	0.71
		84 - 112	0.89	0.25 - 0.34	0.65
		112 - 150	0.89	0.34 - 0.45	0.59
		150 - 200	0.89	0.45 - 0.60	0.52
		200- 266	0.89	0.60 - 0.80	0.46
		266 - 355	0.89	0.80 - 1.07	0.39
		355 - 473	0.89	1.07 - 1.43	0.33
		473 - 631	0.88	1.43 - 1.91	0.28
		631 - 841	0.88	1.91 - 2.54	0.23
841 - 1122	0.88	2.54 - 3.39	0.19		

**Table 4. PMF Measurement Summary**

Note: PMF measurements were verified at WD's power as an input to the dipole.



## **7. HAC Testing with RF Transmitters**

The phone was tested in all normal configurations for the ear use. A DUT is mounted in the device holder equivalent as for classic dosimetric measurements. The acoustic output of the DUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The DUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete DUT holder on the yellow base plate of the Test Arch phantom. These test configurations are tested at the high, middle and low frequency channels of each applicable operating mode; for example, GSM, WCDMA (UMTS), CDMA and TDMA.

### **CDMA Devices setup for HAC Measurement.**

The signal was setup by creating and maintaining an over the coaxial connection between the DUT and an R&S CMU200 Wireless Communications Test Set. The CDMA radio is available on CDMA 2000(1X) and IS-95. The test equipment was configured to use "all up bits" for RC1 / SO2 on J-STD-008 for CDMA 1900 and TSB-84 for CDMA 800 MHz. The 5cm x 5cm area measurement grid is centered on the acoustic output of the device. The Test Arch provided by SPEAG is used to position the DUT. The WD reference plane is parallel to the device and contains the highest point on its contour in the area of the phone that normally rests against the user's ear. The measurement plane contains the nearest point on the probe sensor(s) relative to the WD. The pictures of the setup are included in 7.3.

### **WCDMA Devices setup for HAC Measurement.**

The following procedures are applicable to WCDMA handsets operating under 3GPP Release 99 and Release 5. The default test configuration is to measure HAC with an established radio link between the DUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. HAC is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>) according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. Maximum output power is verified according to 3GPP TS 34.121 and HAC must be measured according to these maximum output conditions.



## 8. Test Results

### 8.1 HAC E-Field measurement results

Band	Rating	E-Field
GSM 850	M3	149.6 to 266.1 V/m
	M4	< 149.6 V/m
PCS 1900	M3	47.3 to 84.1 V/m
	M4	< 47.3 V/m
WCDMA Band V	M3	199.5 to 354.8
	M4	< 199.5
WCDMA Band II	M3	63.1 to 112.2
	M4	< 63.1

Table 5. Emissions Limits

#### Main EUT\_2nd Battery

Band	Channel	Conducted Power (dBm)	Measured PMF	Drift (dB)	Excluded Cells	Peak Field (V/m)	Rating	Note
GSM 850	128	32.22	2.56	0.013	2.3.6	113.70	M4	---
	190	32.20	2.56	-0.017	2.3.6	122.70	M4	---
	251	32.10	2.56	-0.016	2.3.6	139.10	M4	---
PCS 1900	512	30.27	2.50	0.181	7.8.9	57.90	M3	---
	661	30.08	2.50	-0.011	7.8.9	57.30	M3	---
	810	30.35	2.50	0.016	7.8.9	54.20	M3	---
WCDMA Band II	9262	23.00	0.90	0.051	7.8.9	28.40	M4	---
	9400	23.14	0.90	-0.034	7.8.9	27.60	M4	---
	9537	23.01	0.90	-0.032	7.8.9	24.70	M4	---
WCDMA Band V	4132	23.14	1.04	0.048	2.3.6	59.30	M4	---
	4180	22.98	1.04	-0.012	1.2.4	58.00	M4	---
	4233	23.15	1.01	0.0025	2.3.6	67.60	M4	---

Note: HAC E-Field measurement results for the portable cellular telephone at highest possible output power.



**2nd EUT\_2nd Battery**

Band	Channel	Conducted Power (dBm)	Measured PMF	Drift (dB)	Excluded Cells	Peak Field (A/m)	Rating	Note
GSM 850	128	32.22	2.56	0.002	1.2.4	113.50	M4	---
	190	32.20	2.56	-0.013	1.2.4	123.20	M4	---
	251	32.10	2.56	0.001	1.2.4	140.80	M4	---
PCS 1900	512	30.27	2.50	0.049	7.8.9	61.60	M3	---
	661	30.08	2.50	-0.006	7.8.9	59.00	M3	---
	810	30.35	2.50	-0.043	7.8.9	56.60	M3	---
WCDMA Band II	9262	23.00	0.90	-0.113	7.8.9	29.50	M4	---
	9400	23.14	0.90	0.048	7.8.9	26.60	M4	---
	9537	23.01	0.90	0.059	7.8.9	25.80	M4	---
WCDMA Band V	4132	23.14	1.04	-0.078	1.2.4	60.80	M4	---
	4180	22.98	1.04	-0.012	4.7.8	56.60	M4	---
	4233	23.15	1.04	-0.035	1.2.4	69.20	M4	---

Note: HAC E-Field measurement results for the portable cellular telephone at highest possible output power.

**Turn on Wi-Fi and Bluetooth Function**

Band	Channel	Wireless Mode	Peak Field (V/m)	Note
GSM850	251	----	140.8	2nd EUT_2nd Battery
		Wi-Fi	139.2	
		Bluetooth	140.1	
PCS1900	512	----	61.6	2nd EUT_2nd Battery
		Wi-Fi	61.1	
		Bluetooth	60.8	
WCDMA Band II	9262	----	29.5	2nd EUT_2nd Battery
		Wi-Fi	29.5	
		Bluetooth	28.9	
WCDMA Band V	4233	----	69.2	2nd EUT_2nd Battery
		Wi-Fi	68.7	
		Bluetooth	67.1	



## 8.2 HAC H-Field measurement results

Band	Rating	H-Field
GSM 850	M3	0.45 to 0.80 A/m
	M4	< 0.45 A/m
PCS 1900	M3	0.14 to 0.25 A/m
	M4	<0.14 A/m
WCDMA Band V	M3	0.60 to 1.07
	M4	< 0.60
WCDMA Band II	M3	0.19 to 0.34
	M4	< 0.19

**Table 6. Emissions Limits**

### Main EUT\_2nd Battery

Band	Channel	Conducted Power (dBm)	Measured PMF	Drift (dB)	Excluded Cells	Peak Field (A/m)	Rating	Note
GSM 850	128	32.22	2.37	-0.022	1.4.7	0.156	M4	---
	190	32.20	2.37	-0.048	1.4.7	0.168	M4	---
	251	32.10	2.57	-0.013	1.4.7	0.209	M4	---
PCS 1900	512	30.27	2.44	0.018	4.7.8	0.161	M3	---
	661	30.08	2.44	0.013	4.7.8	0.163	M3	---
	810	30.35	2.44	-0.001	4.7.8	0.160	M3	---
WCDMA Band II	9262	23.00	0.81	0.097	4.7.8	0.071	M4	---
	9400	23.14	0.81	0.075	4.7.8	0.070	M4	---
	9538	23.01	0.81	-0.015	4.7.8	0.065	M4	---
WCDMA Band V	4132	23.14	0.86	-0.047	1.4.7	0.073	M4	---
	4180	22.98	0.86	0.013	1.4.7	0.070	M4	---
	4233	23.15	0.86	0.022	1.4.7	0.086	M4	---

Note: HAC H-Field measurement results for the portable cellular telephone at highest possible output power.



**2nd EUT\_2nd Battery**

Band	Channel	Conducted Power (dBm)	Measured PMF	Drift (dB)	Excluded Cells	Peak Field (A/m)	Rating	Note
GSM 850	128	32.22	2.37	-0.057	1.4.7	0.144	M4	---
	190	32.20	2.37	0.007	1.4.7	0.157	M4	---
	251	32.10	2.57	0.015	1.4.7	0.198	M4	---
PCS 1900	512	30.27	2.44	-0.008	4.7.8	0.164	M3	---
	661	30.08	2.44	-0.061	4.7.8	0.166	M3	---
	810	30.35	2.44	-0.024	4.7.8	0.163	M3	---
WCDMA Band II	9262	23.00	0.81	-0.024	4.7.8	0.072	M4	---
	9400	23.14	0.81	0.096	4.7.8	0.065	M4	---
	9538	23.01	0.81	0.078	4.7.8	0.065	M4	---
WCDMA Band V	4132	23.14	0.86	-0.069	1.4.7	0.070	M4	---
	4180	22.98	0.86	0.027	1.4.7	0.065	M4	---
	4233	23.15	0.86	-0.014	1.4.7	0.084	M4	---

Note: HAC H-Field measurement results for the portable cellular telephone at highest possible output power.

**Turn on Wi-Fi and Bluetooth Function**

Band	Channel	Wireless Mode	Peak Field (V/m)	Note
GSM850	251	----	0.209	2nd EUT_2nd Battery
		Wi-Fi	0.202	
		Bluetooth	0.205	
PCS1900	661	----	0.166	2nd EUT_2nd Battery
		Wi-Fi	0.158	
		Bluetooth	0.163	
WCDMA Band II	9262	----	0.072	2nd EUT_2nd Battery
		Wi-Fi	0.070	
		Bluetooth	0.068	
WCDMA Band V	4233	----	0.086	2nd EUT_2nd Battery
		Wi-Fi	0.080	
		Bluetooth	0.081	





### 8.3 Description of the Device under Test (DUT)

Modes and Bands of Operation	GSM 850	PCS 1900	WCDMA Band V	WCDMA Band II
Modulation Mode	GMSK	GMSK	QPSK	QPSK
Duty Cycle	1/8.3	1/8.3	1/1	1/1
Transmitter Frequency Range (MHz)	824.2 - 848.8	1850.2 - 1909.8	826.6 - 846.4	1852.6 - 1907.4







## Appendix A - Details of WD signal

### GSM 835 MHz

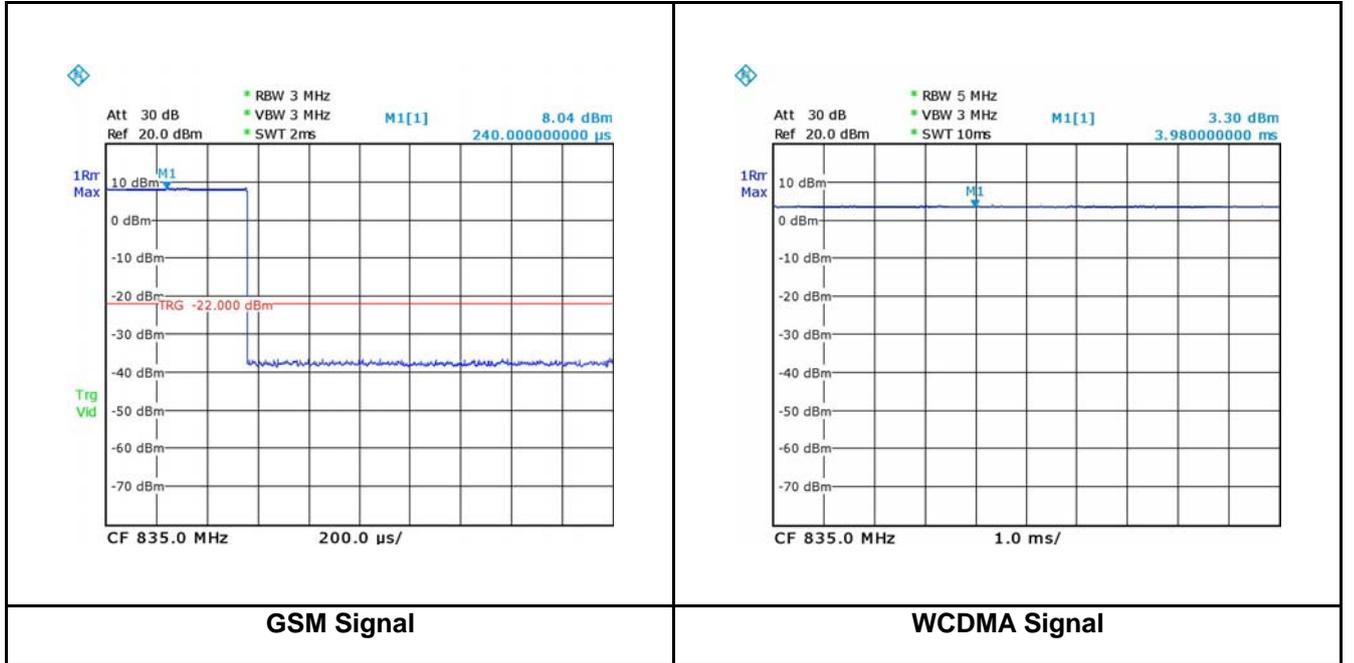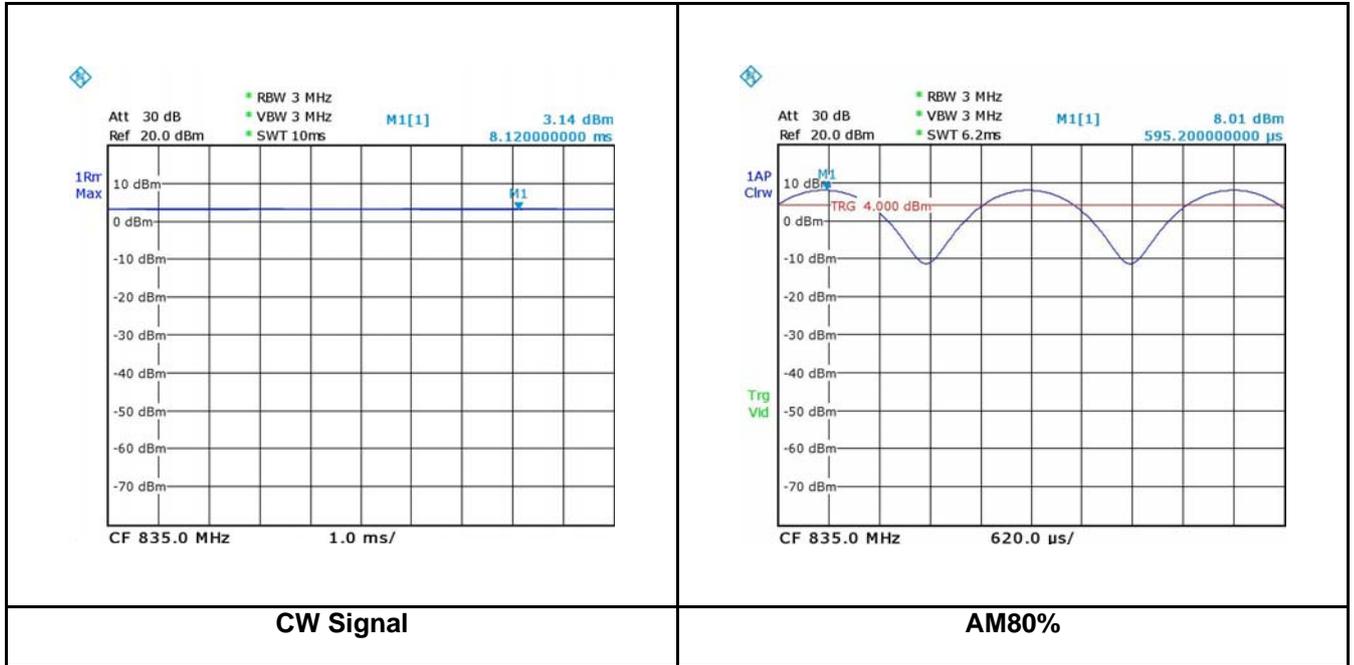



1880 MHz

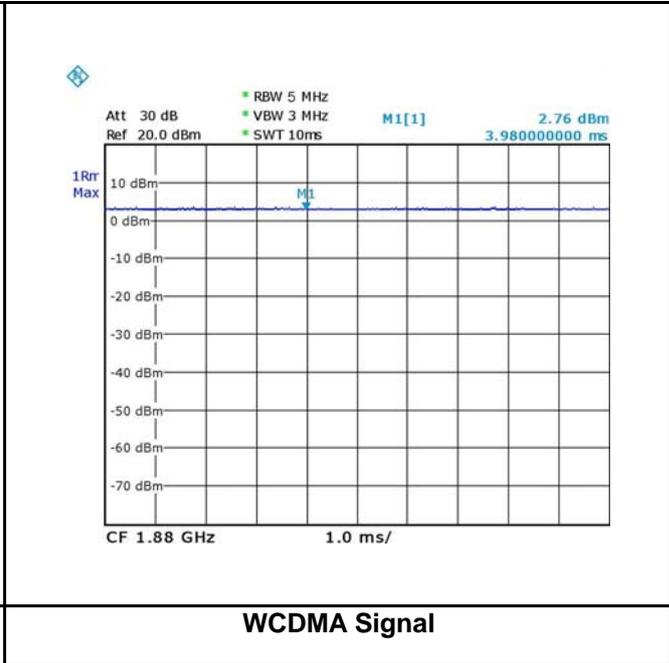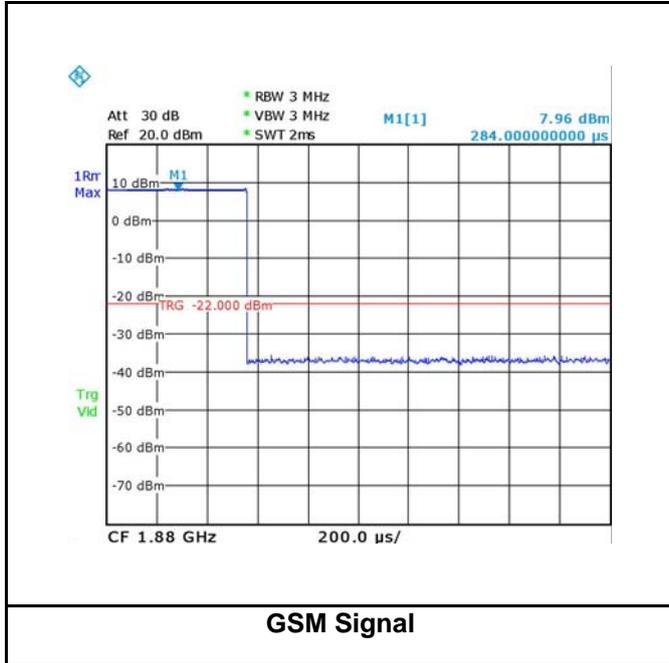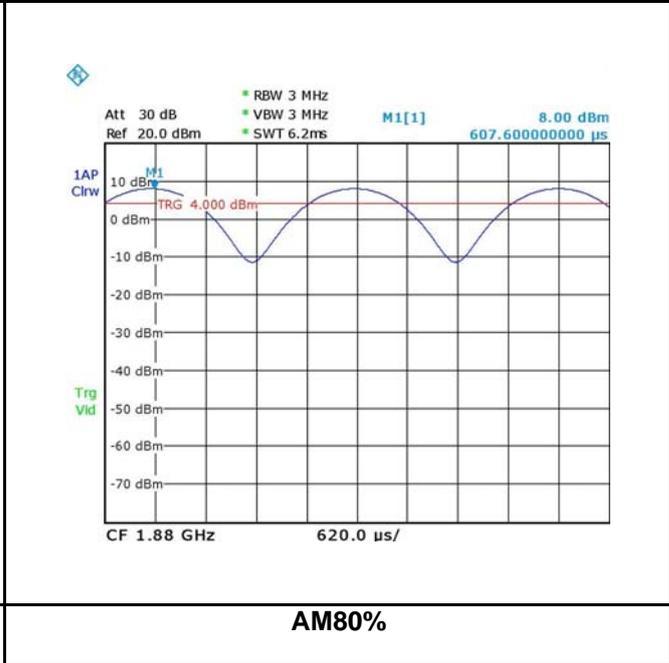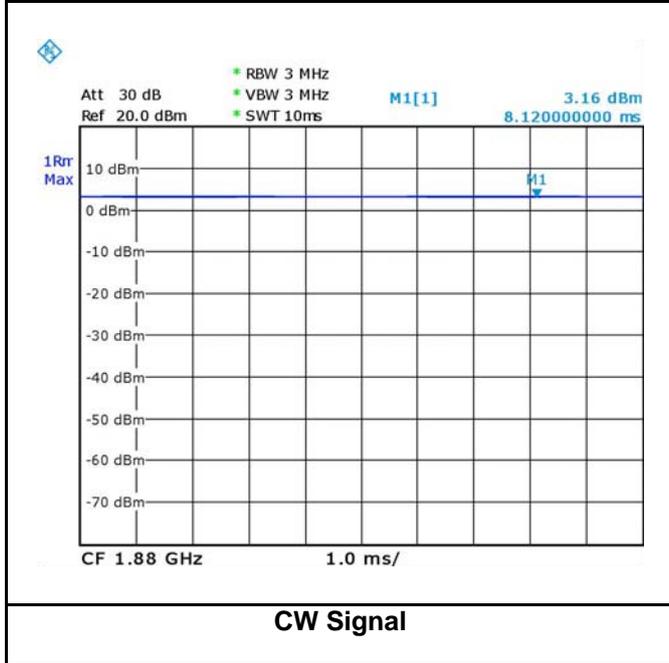



## Appendix B - Validation

Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 11:06:54 AM

### HAC\_System Performance Check at 835MHz\_20111005\_E

**DUT: Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN:1017**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Dipole Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 174.2 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, 354.7 mm

Reference Value = 111.1 V/m; Power Drift = -0.076 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 174.2 V/m

E Category: M4

Location: -1.5, -73, 364.7 mm

Peak E-field in V/m

Grid 1 <b>162.9 M4</b>	Grid 2 <b>174.2 M4</b>	Grid 3 <b>172.0 M4</b>
Grid 4 <b>88.9 M4</b>	Grid 5 <b>93.6 M4</b>	Grid 6 <b>92.3 M4</b>
Grid 7 <b>154.9 M4</b>	Grid 8 <b>171.8 M4</b>	Grid 9 <b>171.4 M4</b>

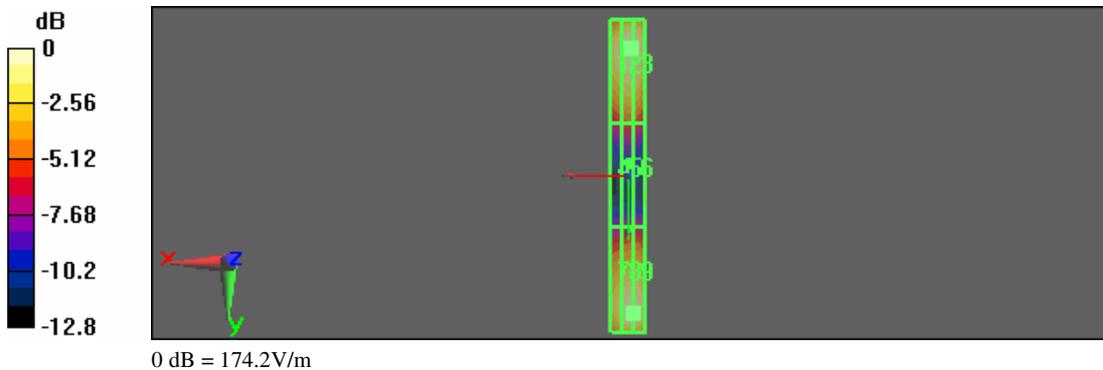



Test Laboratory: A Test Lab Techno Corp.  
 Date/Time: 10/5/2011 12:18:54 PM

**HAC\_System Performance Check at 1880MHz\_20111105\_E**

**DUT: Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN:1036**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: E Dipole Section  
 Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 147.0 V/m  
 Probe Modulation Factor = 1  
 Device Reference Point: 0, 0, 354.7 mm  
 Reference Value = 159.5 V/m; Power Drift = 0.00459 dB


**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

**Cursor:**

Total = 147.0 V/m  
 E Category: M2  
 Location: -2.5, -32.5, 364.7 mm

Peak E-field in V/m

Grid 1 <b>135.1 M2</b>	Grid 2 <b>147.0 M2</b>	Grid 3 <b>146.4 M2</b>
Grid 4 <b>93.9 M3</b>	Grid 5 <b>98.6 M3</b>	Grid 6 <b>97.3 M3</b>
Grid 7 <b>130.3 M2</b>	Grid 8 <b>142.7 M2</b>	Grid 9 <b>141.3 M2</b>

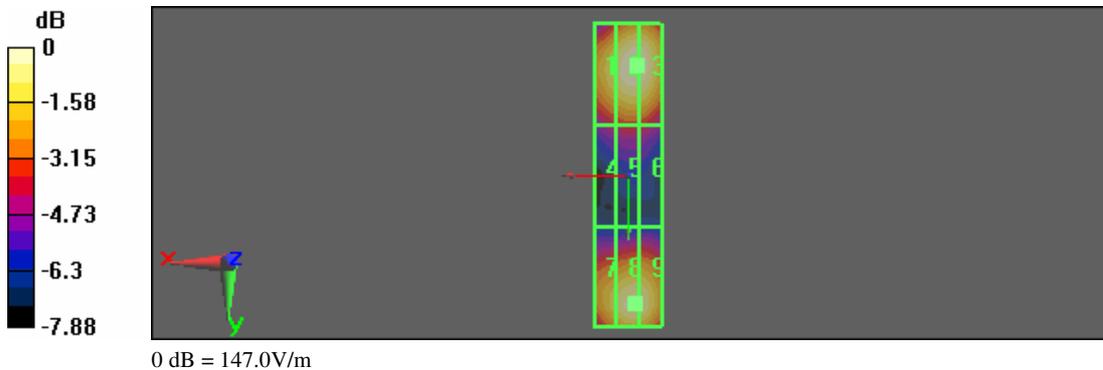



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 11:20:03 AM

**HAC\_System Performance Check at 835MHz\_20111105\_H**

**DUT: Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN:1017**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Dipole Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.470 A/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, 354.7 mm

Reference Value = 0.497 A/m; Power Drift = -0.017 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.470 A/m

H Category: M4

Location: 0.5, -2, 364.7 mm

Peak H-field in A/m

Grid 1 <b>0.405 M4</b>	Grid 2 <b>0.417 M4</b>	Grid 3 <b>0.394 M4</b>
Grid 4 <b>0.454 M4</b>	Grid 5 <b>0.470 M4</b>	Grid 6 <b>0.446 M4</b>
Grid 7 <b>0.397 M4</b>	Grid 8 <b>0.416 M4</b>	Grid 9 <b>0.396 M4</b>

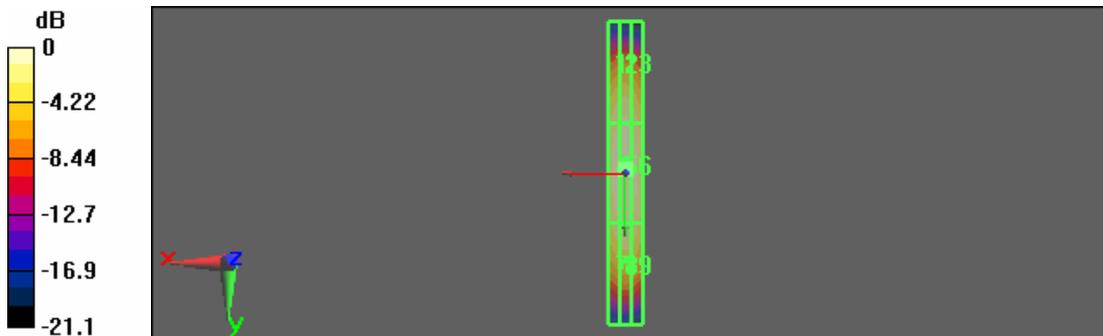

0 dB = 0.470A/m



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 11:57:21 AM

**HAC\_System Performance Check at 1880MHz\_20111005\_H**

**DUT: Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN:1036**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Dipole Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.463 A/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, 354.7 mm

Reference Value = 0.488 A/m; Power Drift = -0.038 dB

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

**Cursor:**


Total = 0.463 A/m

H Category: M2

Location: 0.5, 0, 364.7 mm

Peak H-field in A/m

Grid 1 <b>0.408 M2</b>	Grid 2 <b>0.420 M2</b>	Grid 3 <b>0.400 M2</b>
Grid 4 <b>0.449 M2</b>	Grid 5 <b>0.463 M2</b>	Grid 6 <b>0.442 M2</b>
Grid 7 <b>0.411 M2</b>	Grid 8 <b>0.425 M2</b>	Grid 9 <b>0.404 M2</b>

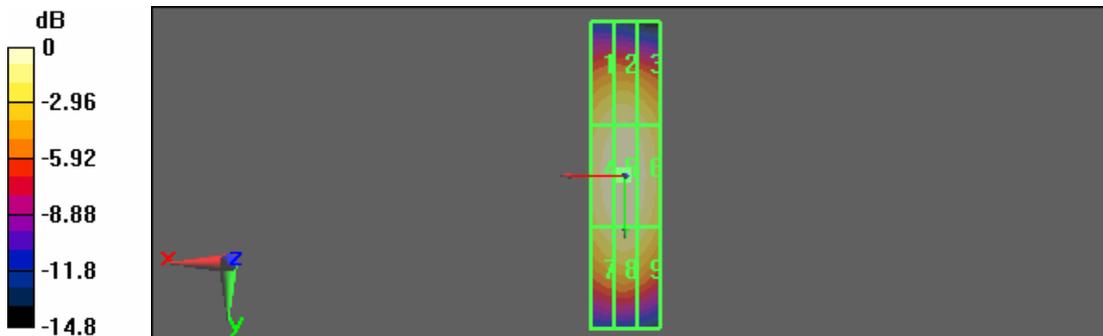

0 dB = 0.463 A/m



## Appendix C - HAC distribution plots for E-Field and H-Field

Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 1:33:54 PM

**HAC\_GSM 850 CH128\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 113.7 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 58.6 V/m; Power Drift = 0.013 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 113.7 V/m

E Category: M4

Location: 0, 0, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>104.8 M4</b>	<b>111.1 M4</b>	<b>104.5 M4</b>
Grid 4	Grid 5	Grid 6
<b>106.1 M4</b>	<b>113.7 M4</b>	<b>106.9 M4</b>
Grid 7	Grid 8	Grid 9
<b>103.3 M4</b>	<b>109.9 M4</b>	<b>104.1 M4</b>

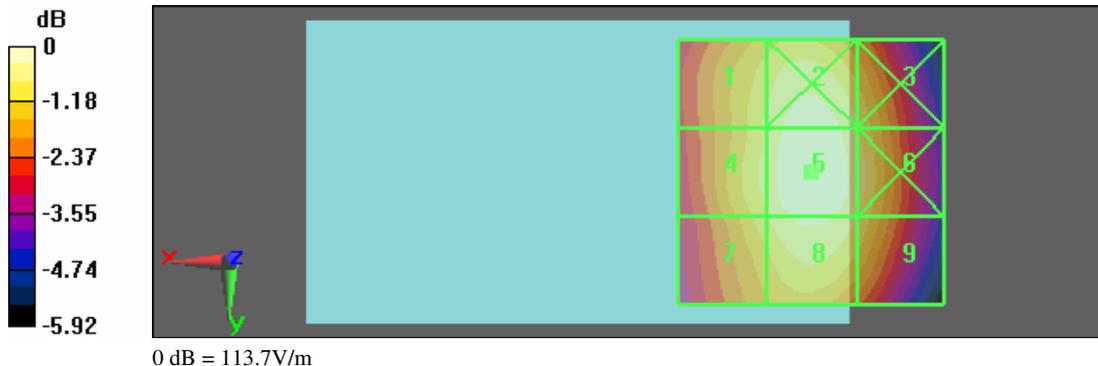



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 1:41:46 PM

**HAC\_GSM 850 CH190\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 122.7 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 63.1 V/m; Power Drift = -0.017 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 122.7 V/m

E Category: M4

Location: 0, 0, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>113.0 M4</b>	<b>120.6 M4</b>	<b>112.6 M4</b>
Grid 4	Grid 5	Grid 6
<b>114.1 M4</b>	<b>122.7 M4</b>	<b>116.1 M4</b>
Grid 7	Grid 8	Grid 9
<b>111.3 M4</b>	<b>119.7 M4</b>	<b>112.3 M4</b>

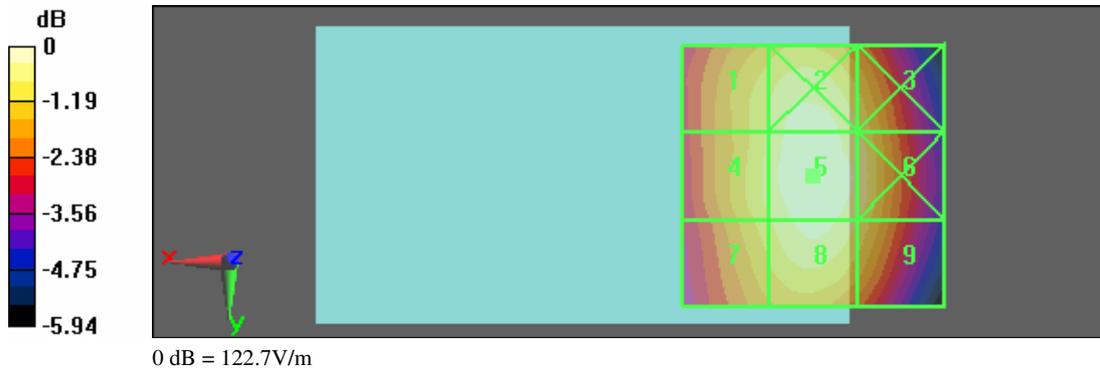



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 1:51:43 PM

**HAC\_GSM 850 CH251\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 139.1 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 71.6 V/m; Power Drift = -0.016 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 139.1 V/m

E Category: M4

Location: -1, 0.5, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
127.1 M4	136.9 M4	129.1 M4
Grid 4	Grid 5	Grid 6
128.6 M4	139.1 M4	132.2 M4
Grid 7	Grid 8	Grid 9
125.2 M4	135.6 M4	128.7 M4

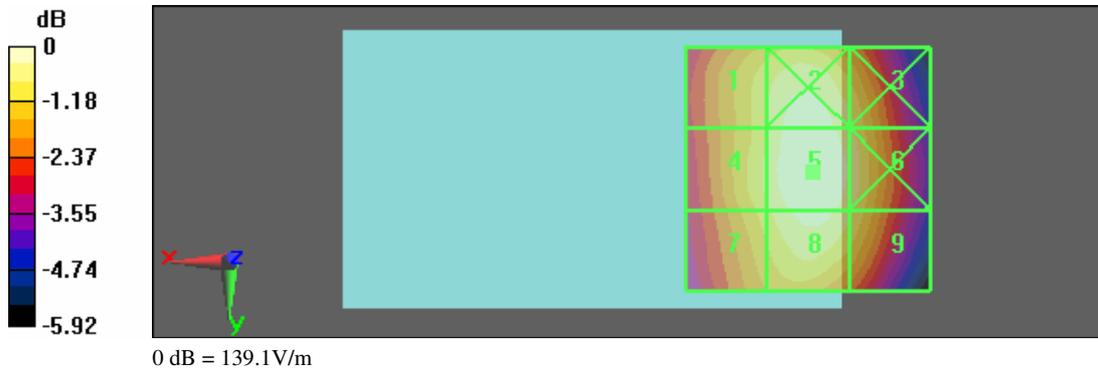



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 12:55:56 PM

**HAC\_PCS CH512\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 57.9 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 18.3 V/m; Power Drift = 0.181 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 75.9 V/m

E Category: M3

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>48.5 M3</b>	Grid 2 <b>39.9 M4</b>	Grid 3 <b>37.5 M4</b>
Grid 4 <b>43.3 M4</b>	Grid 5 <b>57.9 M3</b>	Grid 6 <b>57.5 M3</b>
Grid 7 <b>70.1 M3</b>	Grid 8 <b>75.9 M3</b>	Grid 9 <b>70 M3</b>

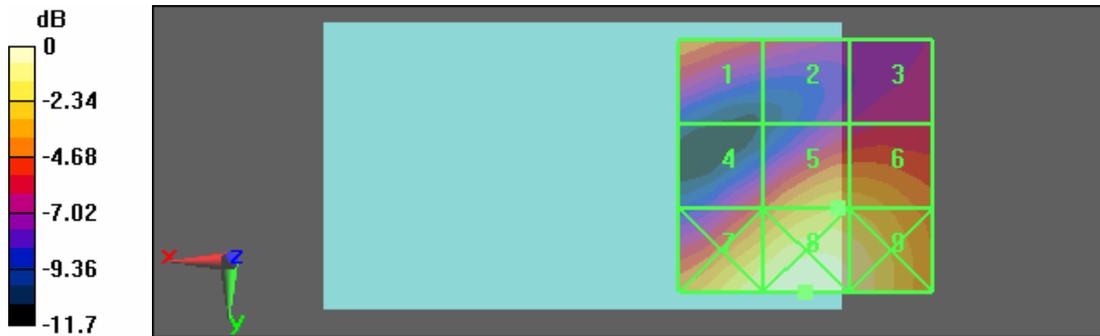

0 dB = 75.9V/m



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 1:08:41 PM

**HAC\_PCS CH661\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 57.3 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 18.2 V/m; Power Drift = -0.011 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 75 V/m

E Category: M3

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>48.7 M3</b>	Grid 2 <b>41.9 M4</b>	Grid 3 <b>36.7 M4</b>
Grid 4 <b>42.5 M4</b>	Grid 5 <b>57.3 M3</b>	Grid 6 <b>57.1 M3</b>
Grid 7 <b>69.4 M3</b>	Grid 8 <b>75 M3</b>	Grid 9 <b>69.6 M3</b>

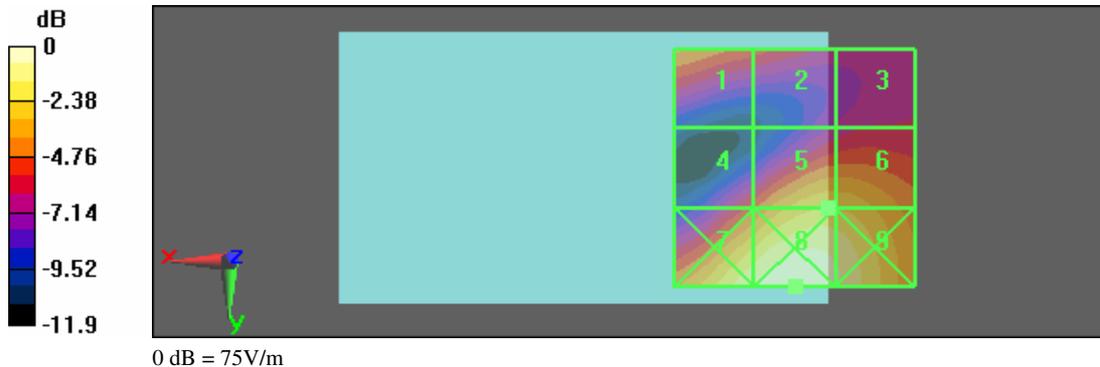



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 1:18:39 PM

**HAC\_PCS CH810\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.2 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 17 V/m; Power Drift = 0.016 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 71.9 V/m

E Category: M3

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
47 M4	41.4 M4	34.2 M4
Grid 4	Grid 5	Grid 6
39.8 M4	54.2 M3	53.8 M3
Grid 7	Grid 8	Grid 9
66.1 M3	71.9 M3	67 M3

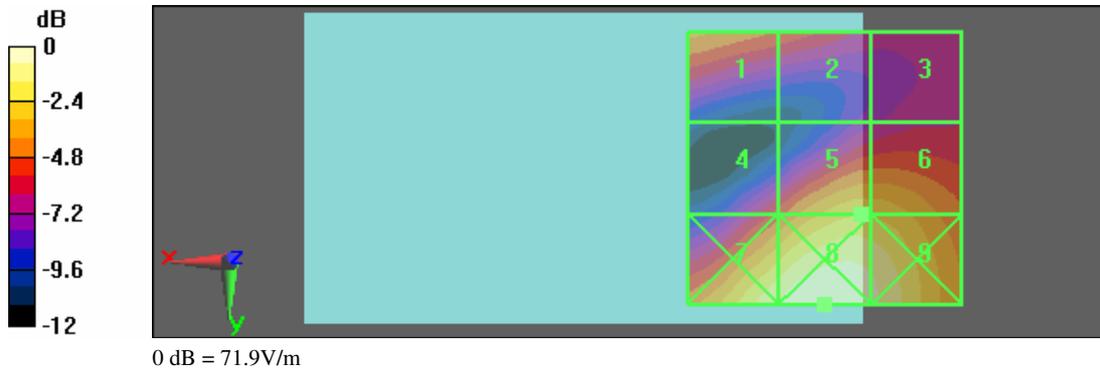



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 3:25:58 PM

**HAC\_WCDMA Band II CH9262\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 28.4 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 25.3 V/m; Power Drift = 0.051 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 37.2 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>23.8 M4</b>	<b>19.8 M4</b>	<b>18.3 M4</b>
Grid 4	Grid 5	Grid 6
<b>21.3 M4</b>	<b>28.4 M4</b>	<b>28.2 M4</b>
Grid 7	Grid 8	Grid 9
<b>34.5 M4</b>	<b>37.2 M4</b>	<b>34.5 M4</b>

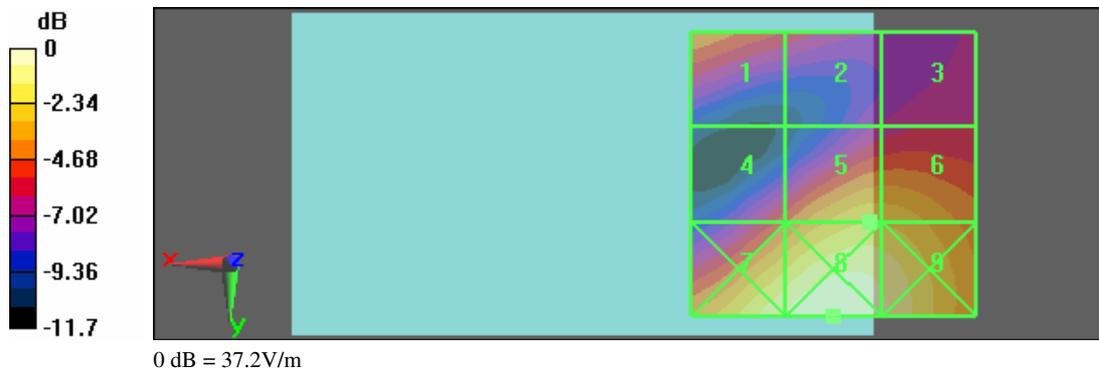



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 3:35:28 PM

**HAC\_WCDMA Band II CH9400\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 27.6 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 24.4 V/m; Power Drift = -0.034 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 36.3 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>23.6 M4</b>	Grid 2 <b>20.4 M4</b>	Grid 3 <b>17.7 M4</b>
Grid 4 <b>20.6 M4</b>	Grid 5 <b>27.6 M4</b>	Grid 6 <b>27.4 M4</b>
Grid 7 <b>33.5 M4</b>	Grid 8 <b>36.3 M4</b>	Grid 9 <b>33.6 M4</b>

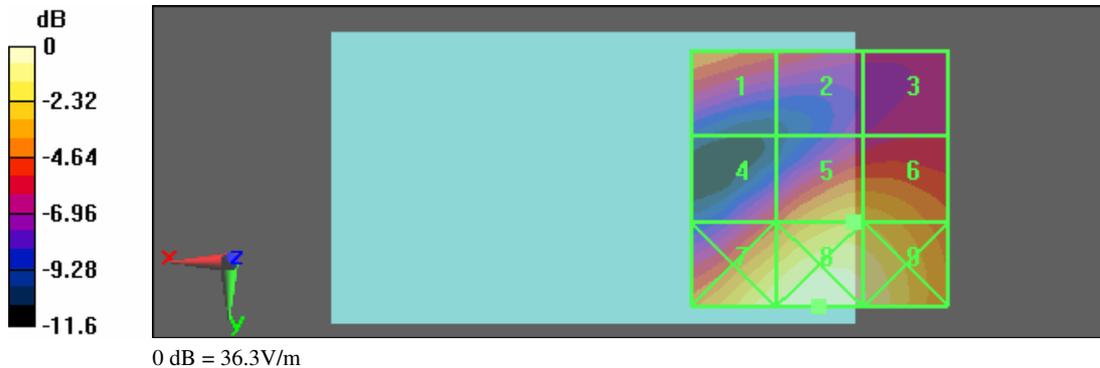



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 4:10:54 PM

**HAC\_WCDMA Band II CH9538\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 24.7 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 21.6 V/m; Power Drift = -0.032 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 32.9 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>21.6 M4</b>	<b>18.9 M4</b>	<b>15.8 M4</b>
Grid 4	Grid 5	Grid 6
<b>18.3 M4</b>	<b>24.7 M4</b>	<b>24.5 M4</b>
Grid 7	Grid 8	Grid 9
<b>30.2 M4</b>	<b>32.9 M4</b>	<b>30.5 M4</b>

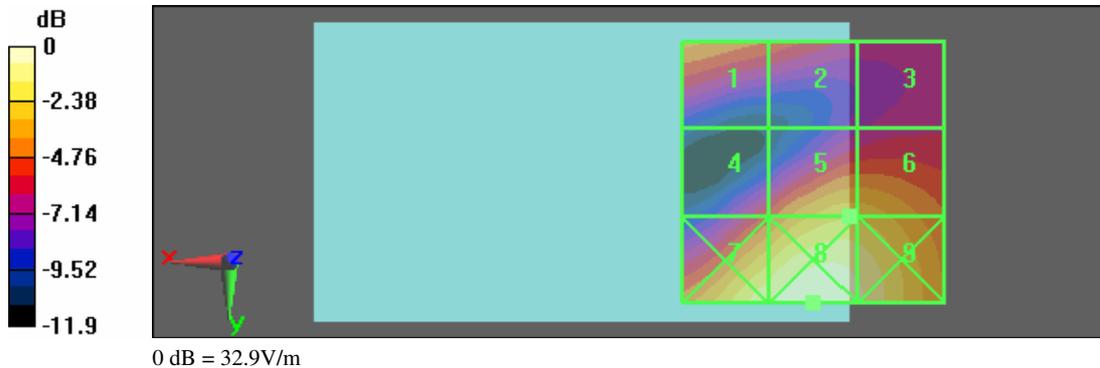



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 2:38:59 PM

**HAC\_WCDMA Band V CH4132\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 59.3 V/m

Probe Modulation Factor = 1.04

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 75.2 V/m; Power Drift = 0.048 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 59.3 V/m

E Category: M4

Location: 0, -0.5, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
54.8 M4	58.5 M4	54.7 M4
Grid 4	Grid 5	Grid 6
55.4 M4	59.3 M4	56 M4
Grid 7	Grid 8	Grid 9
53.8 M4	57.7 M4	54.1 M4

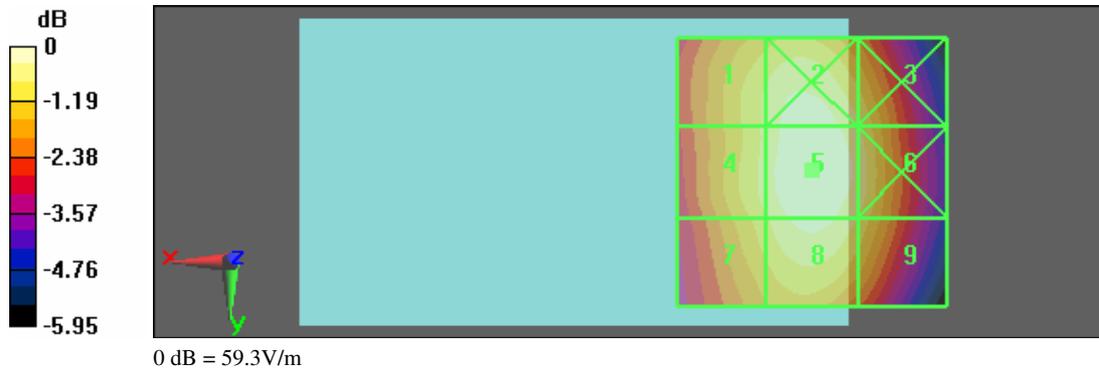



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 2:50:41 PM

**HAC\_WCDMA Band V CH4183\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 58 V/m

Probe Modulation Factor = 1.04

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 73.6 V/m; Power Drift = -0.012 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 58 V/m

E Category: M4

Location: 0, 0, 368.7 mm

Peak E-field in V/m

Grid 1 53.5 M4	Grid 2 57 M4	Grid 3 53 M4
Grid 4 54.1 M4	Grid 5 58 M4	Grid 6 54.5 M4
Grid 7 52.7 M4	Grid 8 56.4 M4	Grid 9 52.7 M4

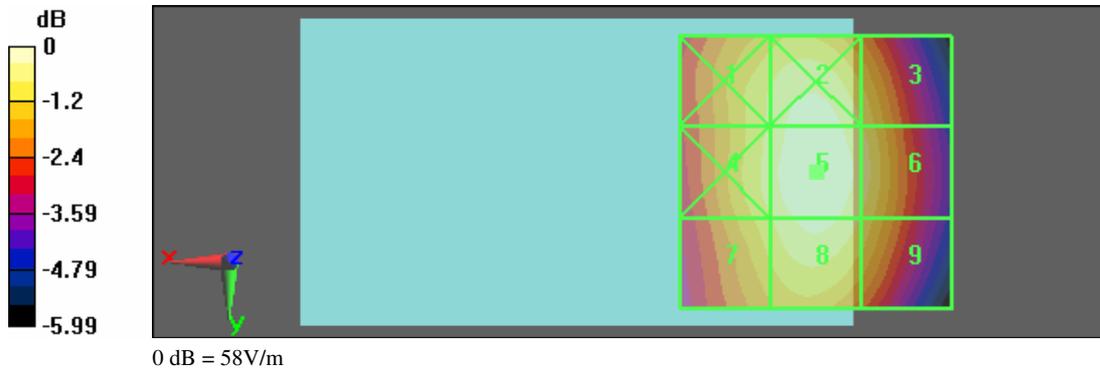



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 2:59:52 PM

**HAC\_WCDMA Band V CH4233\_E\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 67.6 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 87.9 V/m; Power Drift = 0.00245 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**

Total = 67.6 V/m

E Category: M4

Location: -0.5, -0.5, 368.7 mm

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>61.7 M4</b>	<b>66.2 M4</b>	<b>62.4 M4</b>
Grid 4	Grid 5	Grid 6
<b>62.2 M4</b>	<b>67.6 M4</b>	<b>63.8 M4</b>
Grid 7	Grid 8	Grid 9
<b>60.6 M4</b>	<b>65.5 M4</b>	<b>62.1 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:35:53 PM

**HAC\_GSM 850 CH128\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 113.5 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 58.2 V/m; Power Drift = 0.00197 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 113.5 V/m

E Category: M4

Location: 0.5, 0.5, 368.7 mm

Peak E-field in V/m

Grid 1 <b>105.5 M4</b>	Grid 2 <b>110.3 M4</b>	Grid 3 <b>103.6 M4</b>
Grid 4 <b>107.1 M4</b>	Grid 5 <b>113.5 M4</b>	Grid 6 <b>105.8 M4</b>
Grid 7 <b>104.4 M4</b>	Grid 8 <b>109.7 M4</b>	Grid 9 <b>103.2 M4</b>

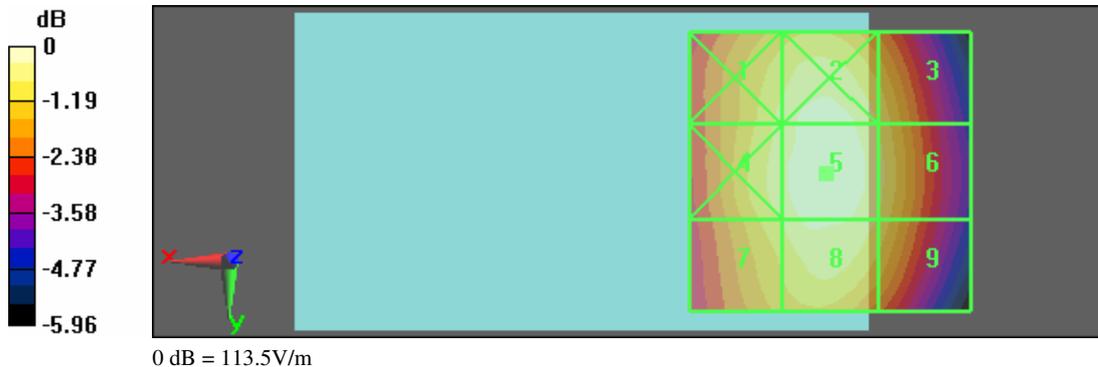



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:43:05 PM

**HAC\_GSM 850 CH190\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 123.2 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 63.3 V/m; Power Drift = -0.013 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 123.2 V/m

E Category: M4

Location: 0.5, 2.5, 368.7 mm

Peak E-field in V/m

Grid 1 <b>114.0 M4</b>	Grid 2 <b>120.9 M4</b>	Grid 3 <b>112.7 M4</b>
Grid 4 <b>116.4 M4</b>	Grid 5 <b>123.2 M4</b>	Grid 6 <b>116.0 M4</b>
Grid 7 <b>113.6 M4</b>	Grid 8 <b>120.4 M4</b>	Grid 9 <b>112.3 M4</b>

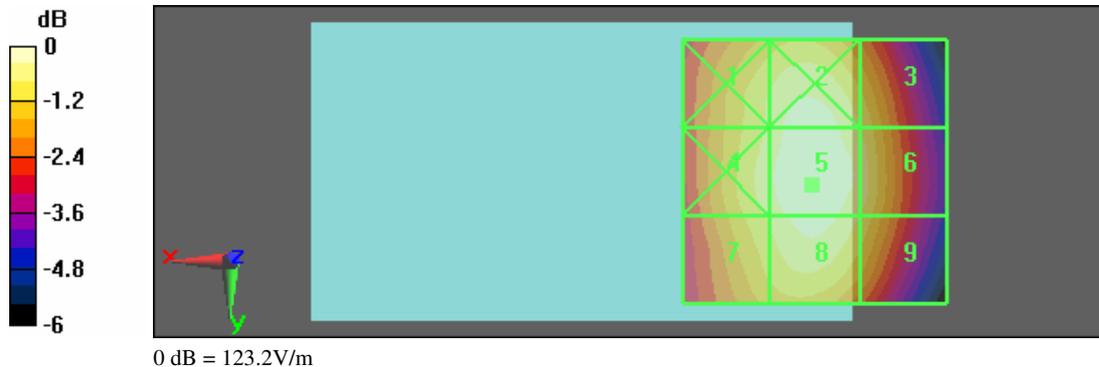



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:48:52 PM

**HAC\_GSM 850 CH251\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 140.8 V/m

Probe Modulation Factor = 2.56

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 72.2 V/m; Power Drift = 0.000853 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 140.8 V/m

E Category: M4

Location: 0, 0, 368.7 mm

Peak E-field in V/m

Grid 1 <b>130.5 M4</b>	Grid 2 <b>138.5 M4</b>	Grid 3 <b>129.8 M4</b>
Grid 4 <b>132.3 M4</b>	Grid 5 <b>140.8 M4</b>	Grid 6 <b>132.2 M4</b>
Grid 7 <b>128.9 M4</b>	Grid 8 <b>136.6 M4</b>	Grid 9 <b>129.3 M4</b>

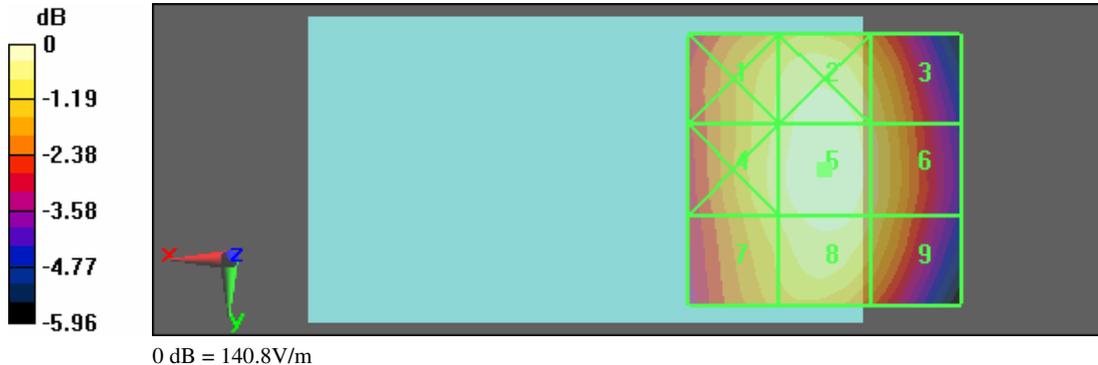



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:02:38 PM

**HAC\_PCS CH512\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 61.6 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 20.7 V/m; Power Drift = 0.049 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 78.3 V/m

E Category: M3

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>49.7 M3</b>	Grid 2 <b>39.7 M4</b>	Grid 3 <b>39.6 M4</b>
Grid 4 <b>45.8 M4</b>	Grid 5 <b>61.6 M3</b>	Grid 6 <b>61.2 M3</b>
Grid 7 <b>72.4 M3</b>	Grid 8 <b>78.3 M3</b>	Grid 9 <b>72.6 M3</b>

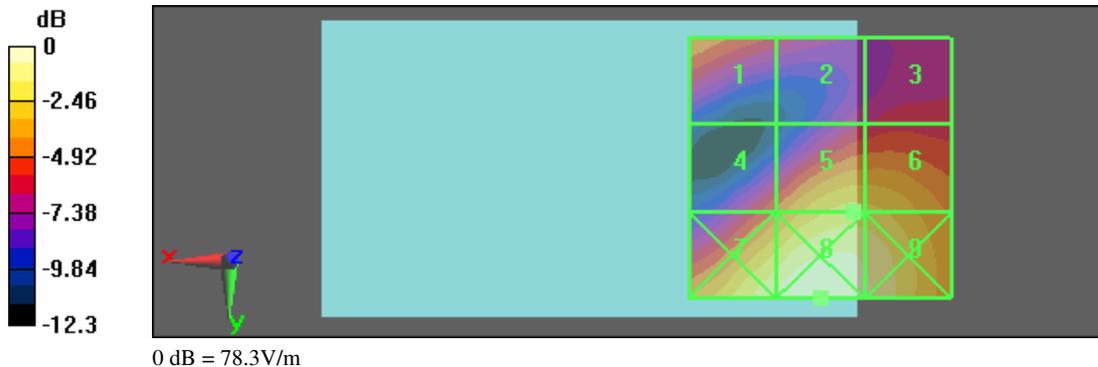



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:22:46 PM

**HAC\_PCS CH661\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 59 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 19 V/m; Power Drift = -0.00586 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 76.9 V/m

E Category: M3

Location: 0.5, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>50.1 M3</b>	Grid 2 <b>42.6 M4</b>	Grid 3 <b>37.5 M4</b>
Grid 4 <b>44.3 M4</b>	Grid 5 <b>59 M3</b>	Grid 6 <b>58.6 M3</b>
Grid 7 <b>71.3 M3</b>	Grid 8 <b>76.9 M3</b>	Grid 9 <b>71 M3</b>

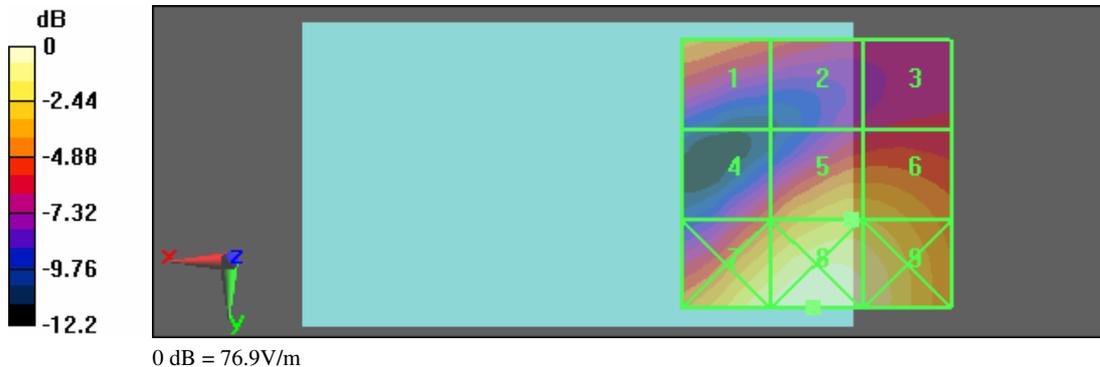



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 9:28:10 PM

**HAC\_PCS CH810\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 56.6 V/m

Probe Modulation Factor = 2.5

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 18.2 V/m; Power Drift = -0.043 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 75 V/m

E Category: M3

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>49.1 M3</b>	Grid 2 <b>43.3 M4</b>	Grid 3 <b>35.4 M4</b>
Grid 4 <b>42.1 M4</b>	Grid 5 <b>56.6 M3</b>	Grid 6 <b>56.2 M3</b>
Grid 7 <b>68.9 M3</b>	Grid 8 <b>75 M3</b>	Grid 9 <b>68.9 M3</b>

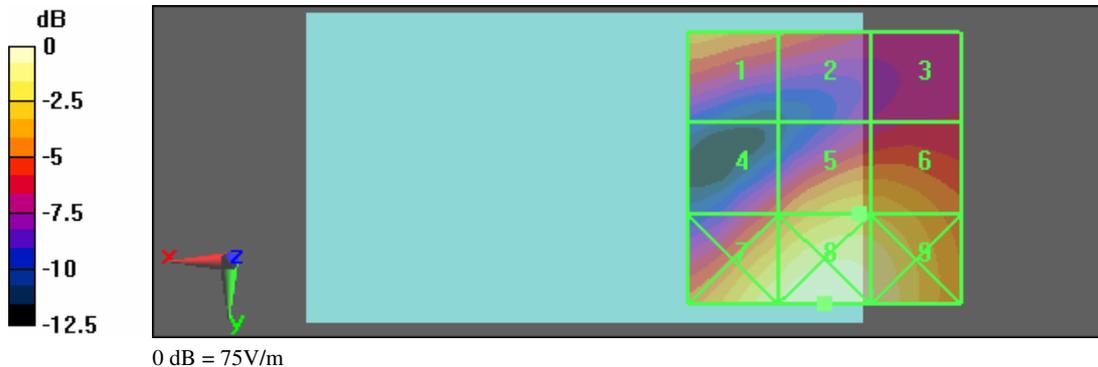



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:05:15 PM

**HAC\_WCDMA Band II CH9262\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 29.5 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 27.6 V/m; Power Drift = -0.113 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 37.7 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>24 M4</b>	Grid 2 <b>19.5 M4</b>	Grid 3 <b>18.9 M4</b>
Grid 4 <b>22.3 M4</b>	Grid 5 <b>29.5 M4</b>	Grid 6 <b>29.3 M4</b>
Grid 7 <b>35 M4</b>	Grid 8 <b>37.7 M4</b>	Grid 9 <b>35 M4</b>

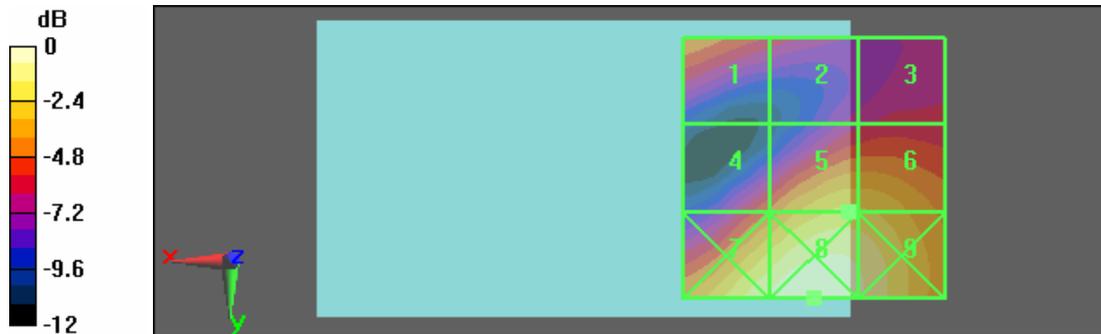

0 dB = 37.7V/m



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:11:10 PM

**HAC\_WCDMA Band II CH9400\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 26.6 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 23.6 V/m; Power Drift = 0.048 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 34.3 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>22.1 M4</b>	Grid 2 <b>19.1 M4</b>	Grid 3 <b>16.9 M4</b>
Grid 4 <b>20 M4</b>	Grid 5 <b>26.6 M4</b>	Grid 6 <b>26.4 M4</b>
Grid 7 <b>31.8 M4</b>	Grid 8 <b>34.3 M4</b>	Grid 9 <b>31.9 M4</b>

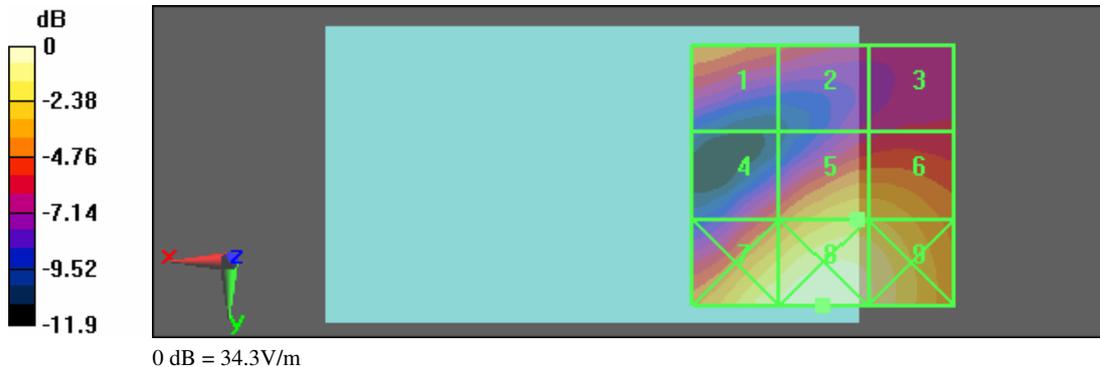



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:19:54 PM

**HAC\_WCDMA Band II CH9538\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 25.8 V/m

Probe Modulation Factor = 0.900

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 22.8 V/m; Power Drift = 0.059 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 33.8 V/m

E Category: M4

Location: 0, 25, 368.7 mm

Peak E-field in V/m

Grid 1 <b>22.2 M4</b>	Grid 2 <b>19.5 M4</b>	Grid 3 <b>16.3 M4</b>
Grid 4 <b>19.3 M4</b>	Grid 5 <b>25.8 M4</b>	Grid 6 <b>25.6 M4</b>
Grid 7 <b>31.2 M4</b>	Grid 8 <b>33.8 M4</b>	Grid 9 <b>31.4 M4</b>

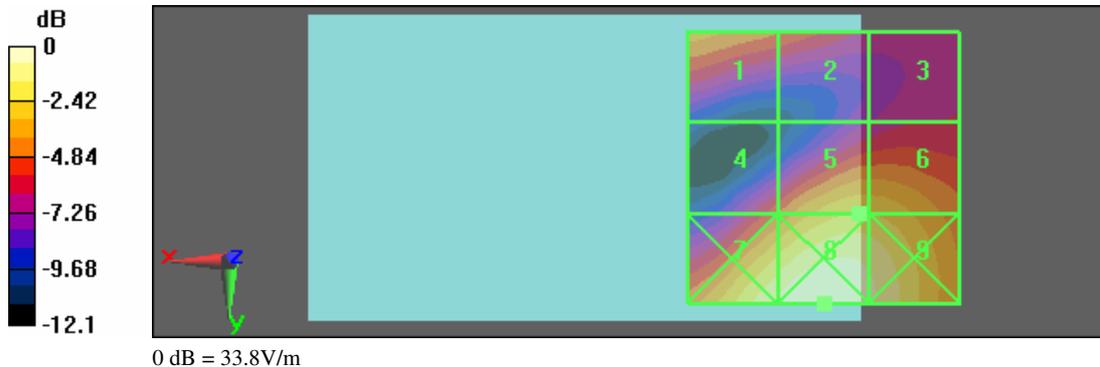



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:27:00 PM

**HAC\_WCDMA Band V CH4132\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 60.8 V/m

Probe Modulation Factor = 1.04

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 76.8 V/m; Power Drift = -0.078 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**

Total = 60.8 V/m

E Category: M4

Location: 0, 0.5, 368.7 mm

Peak E-field in V/m

Grid 1 <b>56.6 M4</b>	Grid 2 <b>59.7 M4</b>	Grid 3 <b>55.9 M4</b>
Grid 4 <b>57.4 M4</b>	Grid 5 <b>60.8 M4</b>	Grid 6 <b>57.1 M4</b>
Grid 7 <b>56.1 M4</b>	Grid 8 <b>59.3 M4</b>	Grid 9 <b>55.8 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:32:47 PM

**HAC\_WCDMA Band V CH4183\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 56.6 V/m

Probe Modulation Factor = 1.04

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 71 V/m; Power Drift = -0.012 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**

Total = 56.6 V/m

E Category: M4

Location: 0.5, 0, 368.7 mm

Peak E-field in V/m

Grid 1 <b>52.6 M4</b>	Grid 2 <b>55.4 M4</b>	Grid 3 <b>51.6 M4</b>
Grid 4 <b>53.5 M4</b>	Grid 5 <b>56.6 M4</b>	Grid 6 <b>52.8 M4</b>
Grid 7 <b>52.1 M4</b>	Grid 8 <b>55.4 M4</b>	Grid 9 <b>51.6 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 10:39:16 PM

**HAC\_WCDMA Band V CH4233\_E\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6R - SN2256; ConvF(1, 1, 1); Calibrated: 8/26/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 69.2 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 89.9 V/m; Power Drift = -0.035 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 69.2 V/m

E Category: M4

Location: 0, 0, 368.7 mm

Peak E-field in V/m

Grid 1 <b>64.4 M4</b>	Grid 2 <b>68.2 M4</b>	Grid 3 <b>64 M4</b>
Grid 4 <b>65.3 M4</b>	Grid 5 <b>69.2 M4</b>	Grid 6 <b>65.3 M4</b>
Grid 7 <b>63.6 M4</b>	Grid 8 <b>67.5 M4</b>	Grid 9 <b>63.6 M4</b>

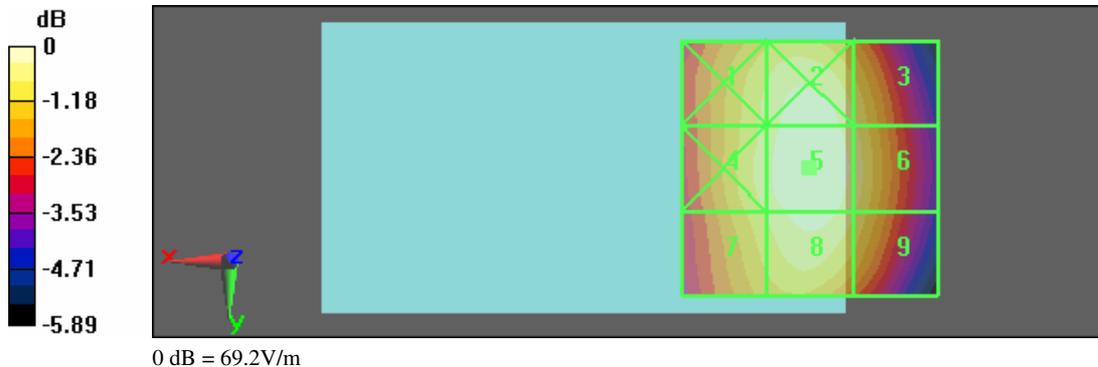



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 6:36:05 PM

**HAC\_GSM 850 CH128\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.156 A/m

Probe Modulation Factor = 2.37

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.046 A/m; Power Drift = -0.022 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 0.217 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.195 M4</b>	Grid 2 <b>0.131 M4</b>	Grid 3 <b>0.076 M4</b>
Grid 4 <b>0.199 M4</b>	Grid 5 <b>0.141 M4</b>	Grid 6 <b>0.089 M4</b>
Grid 7 <b>0.217 M4</b>	Grid 8 <b>0.156 M4</b>	Grid 9 <b>0.102 M4</b>

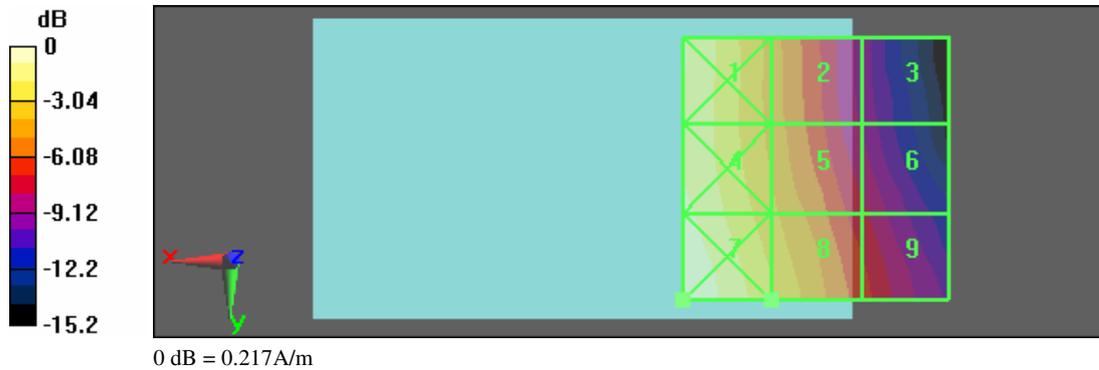



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 6:44:24 PM

**HAC\_GSM 850 CH190\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.168 A/m

Probe Modulation Factor = 2.37

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.049 A/m; Power Drift = -0.048 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 0.235 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.212 M4</b>	Grid 2 <b>0.142 M4</b>	Grid 3 <b>0.081 M4</b>
Grid 4 <b>0.216 M4</b>	Grid 5 <b>0.153 M4</b>	Grid 6 <b>0.095 M4</b>
Grid 7 <b>0.235 M4</b>	Grid 8 <b>0.168 M4</b>	Grid 9 <b>0.108 M4</b>

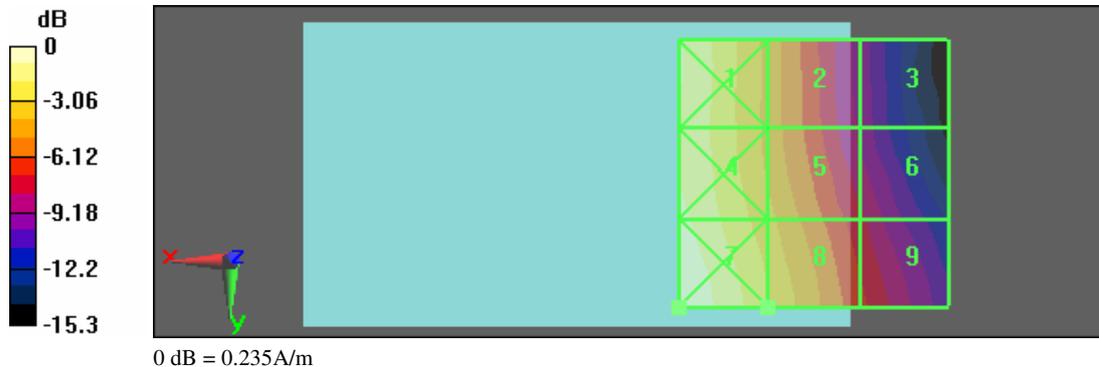



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 6:52:14 PM

**HAC\_GSM 850 CH251\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.209 A/m

Probe Modulation Factor = 2.57

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.057 A/m; Power Drift = -0.013 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 0.293 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.267 M4</b>	Grid 2 <b>0.179 M4</b>	Grid 3 <b>0.102 M4</b>
Grid 4 <b>0.271 M4</b>	Grid 5 <b>0.191 M4</b>	Grid 6 <b>0.120 M4</b>
Grid 7 <b>0.293 M4</b>	Grid 8 <b>0.209 M4</b>	Grid 9 <b>0.135 M4</b>

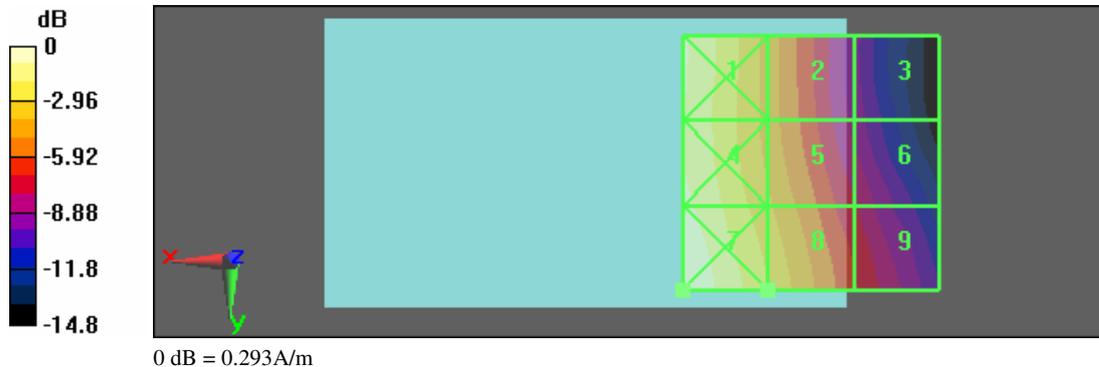



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:58:16 PM

**HAC\_PCS CH512\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.161 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.068 A/m; Power Drift = 0.018 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 0.237 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.145 M3</b>	Grid 2 <b>0.149 M3</b>	Grid 3 <b>0.143 M3</b>
Grid 4 <b>0.179 M3</b>	Grid 5 <b>0.161 M3</b>	Grid 6 <b>0.143 M3</b>
Grid 7 <b>0.237 M3</b>	Grid 8 <b>0.181 M3</b>	Grid 9 <b>0.128 M4</b>

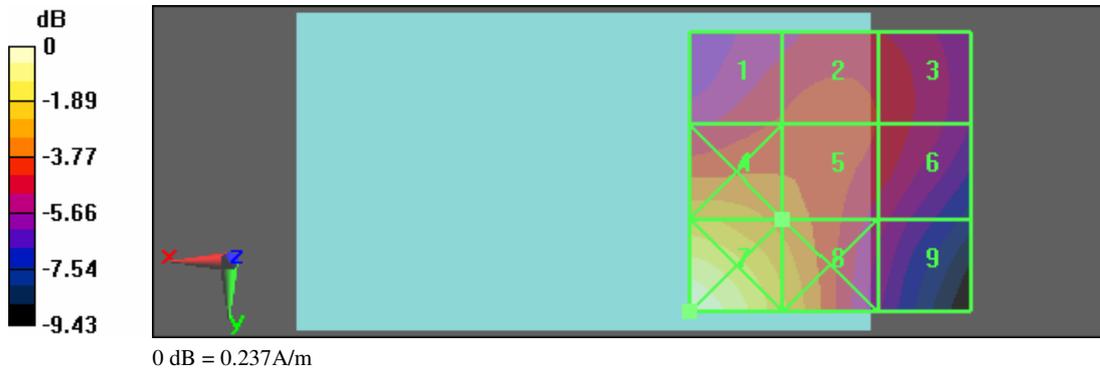



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 6:11:32 PM

**HAC\_PCS CH661\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.163 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.069 A/m; Power Drift = 0.013 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 0.243 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.148 M3</b>	Grid 2 <b>0.151 M3</b>	Grid 3 <b>0.145 M3</b>
Grid 4 <b>0.182 M3</b>	Grid 5 <b>0.163 M3</b>	Grid 6 <b>0.145 M3</b>
Grid 7 <b>0.243 M3</b>	Grid 8 <b>0.181 M3</b>	Grid 9 <b>0.128 M4</b>

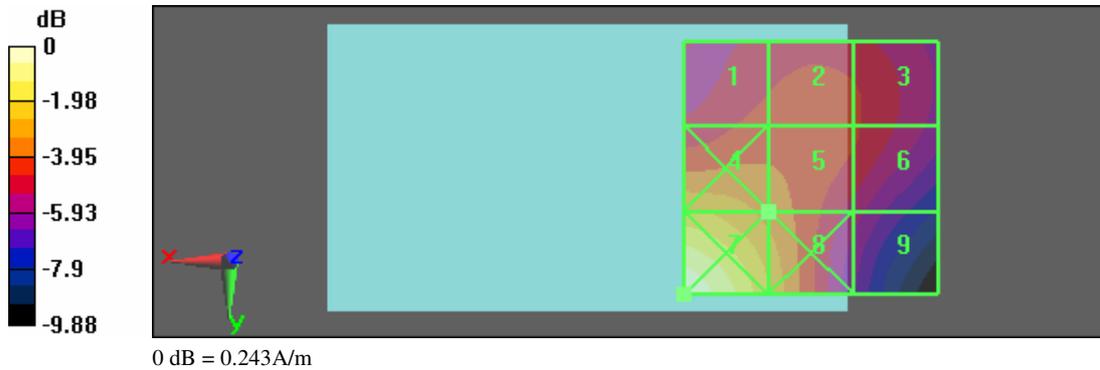



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 6:23:48 PM

**HAC\_PCS CH810\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.160 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.068 A/m; Power Drift = -0.00122 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**

Total = 0.236 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.148 M3</b>	Grid 2 <b>0.151 M3</b>	Grid 3 <b>0.146 M3</b>
Grid 4 <b>0.177 M3</b>	Grid 5 <b>0.160 M3</b>	Grid 6 <b>0.146 M3</b>
Grid 7 <b>0.236 M3</b>	Grid 8 <b>0.176 M3</b>	Grid 9 <b>0.127 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 4:50:25 PM

**HAC\_WCDMA Band II CH9262\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.071 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.090 A/m; Power Drift = 0.097 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.100 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.064 M4</b>	Grid 2 <b>0.066 M4</b>	Grid 3 <b>0.063 M4</b>
Grid 4 <b>0.077 M4</b>	Grid 5 <b>0.071 M4</b>	Grid 6 <b>0.063 M4</b>
Grid 7 <b>0.100 M4</b>	Grid 8 <b>0.078 M4</b>	Grid 9 <b>0.057 M4</b>

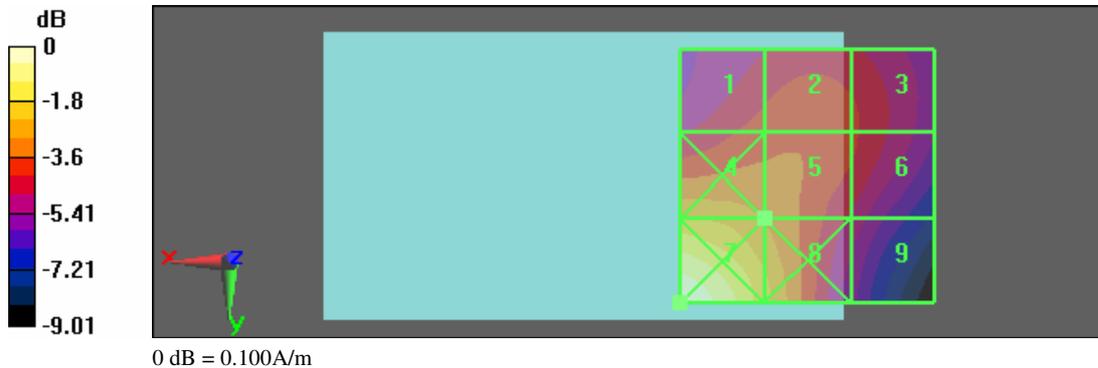



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:00:03 PM

**HAC\_WCDMA Band II CH9400\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.070 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.089 A/m; Power Drift = 0.075 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.100 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.064 M4</b>	Grid 2 <b>0.065 M4</b>	Grid 3 <b>0.062 M4</b>
Grid 4 <b>0.076 M4</b>	Grid 5 <b>0.070 M4</b>	Grid 6 <b>0.062 M4</b>
Grid 7 <b>0.100 M4</b>	Grid 8 <b>0.077 M4</b>	Grid 9 <b>0.056 M4</b>

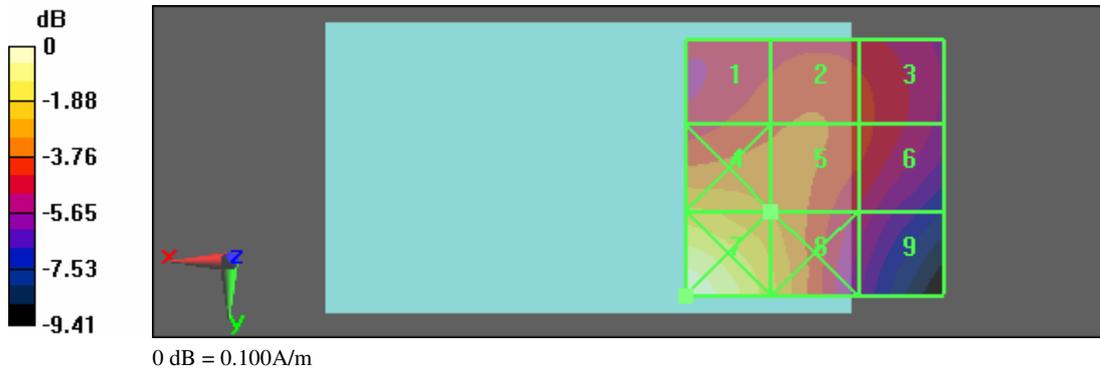



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:15:36 PM

**HAC\_WCDMA Band II CH9538\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.065 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.084 A/m; Power Drift = -0.015 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**

Total = 0.092 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.060 M4</b>	Grid 2 <b>0.062 M4</b>	Grid 3 <b>0.060 M4</b>
Grid 4 <b>0.070 M4</b>	Grid 5 <b>0.065 M4</b>	Grid 6 <b>0.059 M4</b>
Grid 7 <b>0.092 M4</b>	Grid 8 <b>0.071 M4</b>	Grid 9 <b>0.052 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:27:00 PM

**HAC\_WCDMA Band V CH4132\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.073 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.060 A/m; Power Drift = -0.047 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.101 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.091 M4</b>	Grid 2 <b>0.062 M4</b>	Grid 3 <b>0.036 M4</b>
Grid 4 <b>0.092 M4</b>	Grid 5 <b>0.066 M4</b>	Grid 6 <b>0.042 M4</b>
Grid 7 <b>0.101 M4</b>	Grid 8 <b>0.073 M4</b>	Grid 9 <b>0.048 M4</b>

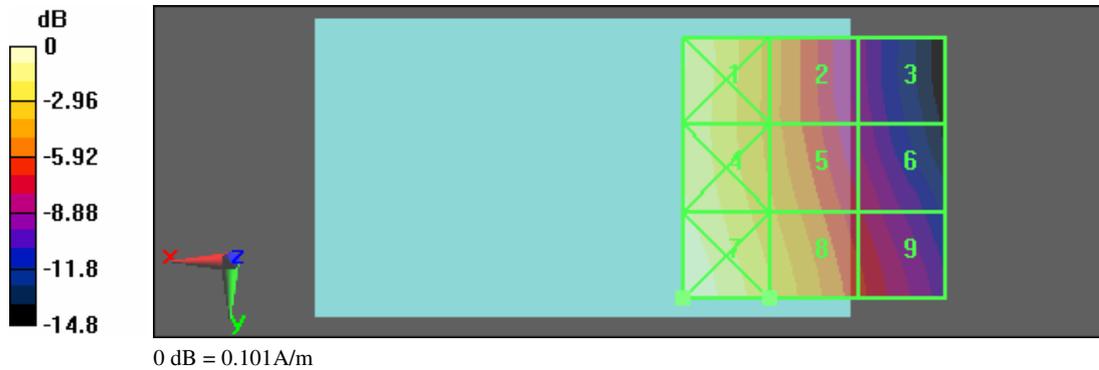



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:34:29 PM

**HAC\_WCDMA Band V CH4183\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.070 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.057 A/m; Power Drift = 0.013 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.097 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.088 M4</b>	Grid 2 <b>0.059 M4</b>	Grid 3 <b>0.034 M4</b>
Grid 4 <b>0.089 M4</b>	Grid 5 <b>0.064 M4</b>	Grid 6 <b>0.040 M4</b>
Grid 7 <b>0.097 M4</b>	Grid 8 <b>0.070 M4</b>	Grid 9 <b>0.045 M4</b>

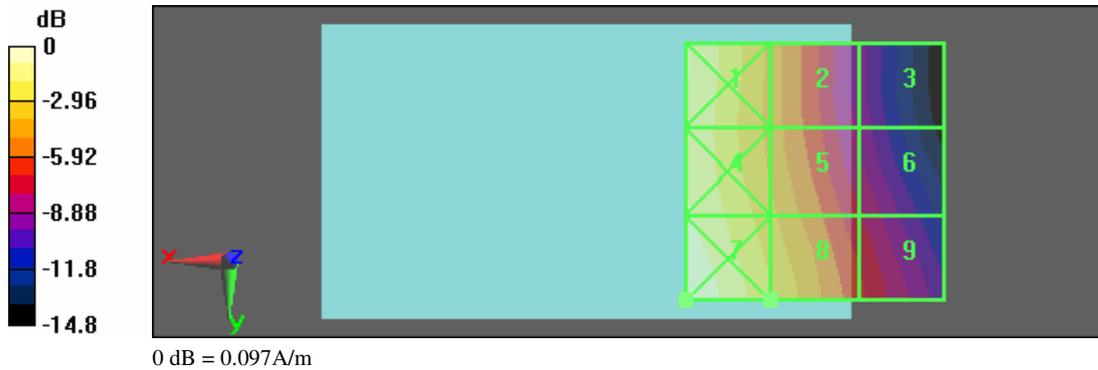



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 5:45:18 PM

**HAC\_WCDMA Band V CH4233\_H\_Main EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.086 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.070 A/m; Power Drift = 0.022 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.118 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.108 M4</b>	Grid 2 <b>0.073 M4</b>	Grid 3 <b>0.042 M4</b>
Grid 4 <b>0.108 M4</b>	Grid 5 <b>0.078 M4</b>	Grid 6 <b>0.049 M4</b>
Grid 7 <b>0.118 M4</b>	Grid 8 <b>0.086 M4</b>	Grid 9 <b>0.056 M4</b>

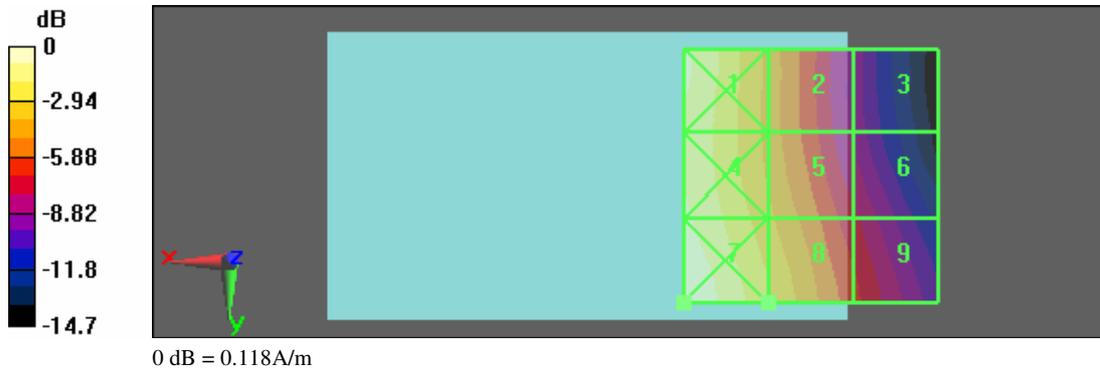



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 8:20:06 PM

**HAC\_GSM 850 CH128\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.144 A/m

Probe Modulation Factor = 2.37

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.046 A/m; Power Drift = -0.057 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 0.204 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.188 M4</b>	Grid 2 <b>0.125 M4</b>	Grid 3 <b>0.074 M4</b>
Grid 4 <b>0.192 M4</b>	Grid 5 <b>0.138 M4</b>	Grid 6 <b>0.084 M4</b>
Grid 7 <b>0.204 M4</b>	Grid 8 <b>0.144 M4</b>	Grid 9 <b>0.092 M4</b>

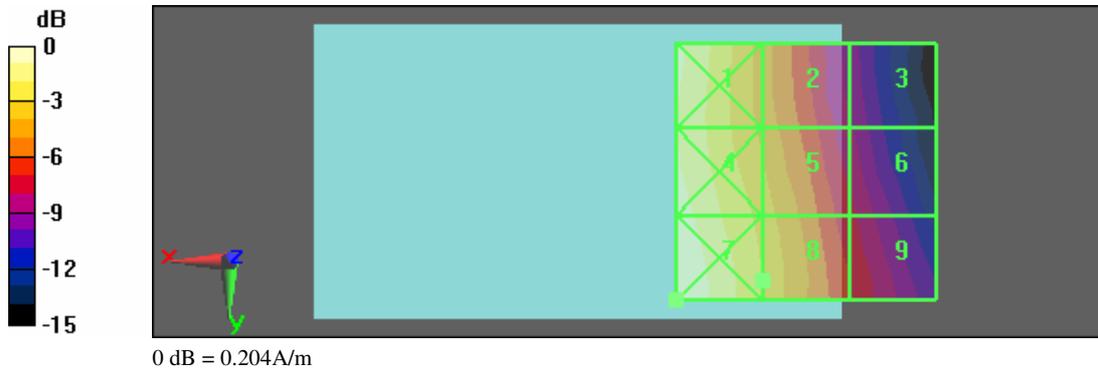



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 8:32:51 PM

**HAC\_GSM 850 CH190\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.157 A/m

Probe Modulation Factor = 2.37

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.049 A/m; Power Drift = 0.00741 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**

Total = 0.224 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.207 M4</b>	Grid 2 <b>0.136 M4</b>	Grid 3 <b>0.079 M4</b>
Grid 4 <b>0.211 M4</b>	Grid 5 <b>0.150 M4</b>	Grid 6 <b>0.090 M4</b>
Grid 7 <b>0.224 M4</b>	Grid 8 <b>0.157 M4</b>	Grid 9 <b>0.099 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 8:39:52 PM

**HAC\_GSM 850 CH251\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.198 A/m

Probe Modulation Factor = 2.57

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.057 A/m; Power Drift = 0.015 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

**Cursor:**


Total = 0.282 A/m

H Category: M4

Location: 25, 23.5, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.261 M4</b>	Grid 2 <b>0.172 M4</b>	Grid 3 <b>0.100 M4</b>
Grid 4 <b>0.265 M4</b>	Grid 5 <b>0.188 M4</b>	Grid 6 <b>0.114 M4</b>
Grid 7 <b>0.282 M4</b>	Grid 8 <b>0.198 M4</b>	Grid 9 <b>0.125 M4</b>

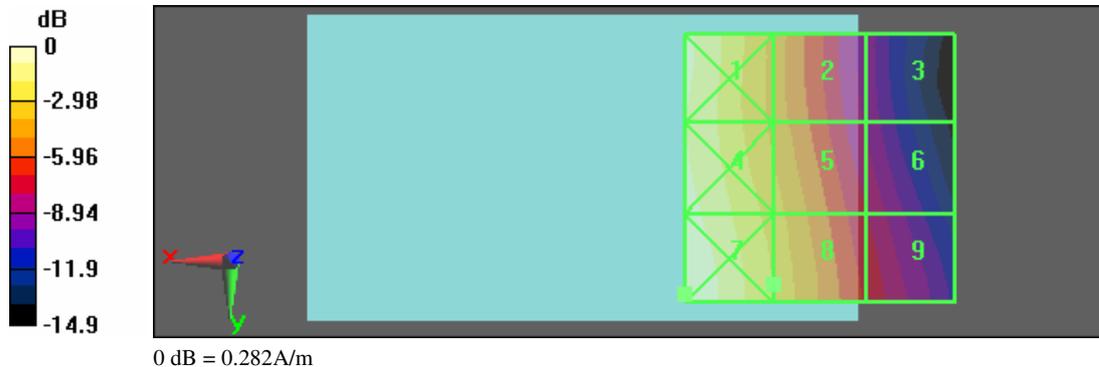



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:09:49 PM

**HAC\_PCS CH512\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.164 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.070 A/m; Power Drift = -0.00819 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 0.238 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.149 M3</b>	Grid 2 <b>0.152 M3</b>	Grid 3 <b>0.145 M3</b>
Grid 4 <b>0.180 M3</b>	Grid 5 <b>0.164 M3</b>	Grid 6 <b>0.145 M3</b>
Grid 7 <b>0.238 M3</b>	Grid 8 <b>0.175 M3</b>	Grid 9 <b>0.130 M4</b>

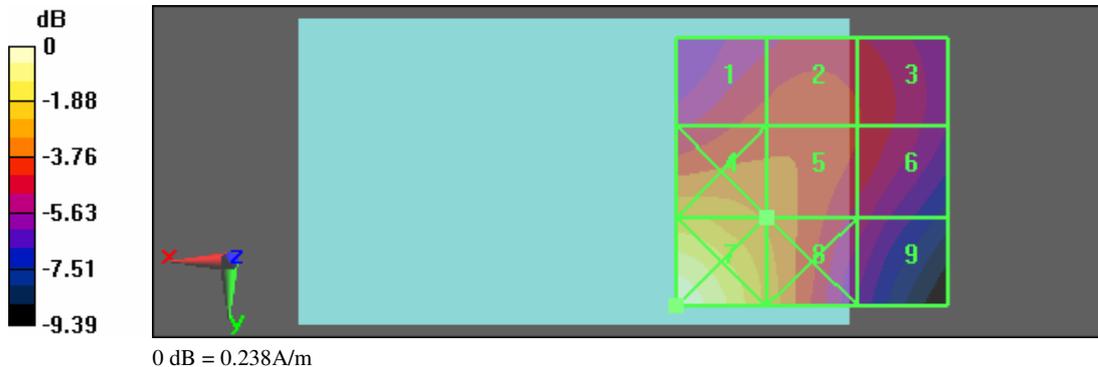



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:17:07 PM

**HAC\_PCS CH661\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.166 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.071 A/m; Power Drift = -0.061 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**

Total = 0.242 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.153 M3</b>	Grid 2 <b>0.156 M3</b>	Grid 3 <b>0.149 M3</b>
Grid 4 <b>0.182 M3</b>	Grid 5 <b>0.166 M3</b>	Grid 6 <b>0.149 M3</b>
Grid 7 <b>0.242 M3</b>	Grid 8 <b>0.178 M3</b>	Grid 9 <b>0.132 M4</b>





Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:24:35 PM

**HAC\_PCS CH810\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.163 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.072 A/m; Power Drift = -0.024 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

**Cursor:**


Total = 0.236 A/m

H Category: M3

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.151 M3</b>	Grid 2 <b>0.156 M3</b>	Grid 3 <b>0.151 M3</b>
Grid 4 <b>0.175 M3</b>	Grid 5 <b>0.163 M3</b>	Grid 6 <b>0.150 M3</b>
Grid 7 <b>0.236 M3</b>	Grid 8 <b>0.172 M3</b>	Grid 9 <b>0.131 M4</b>

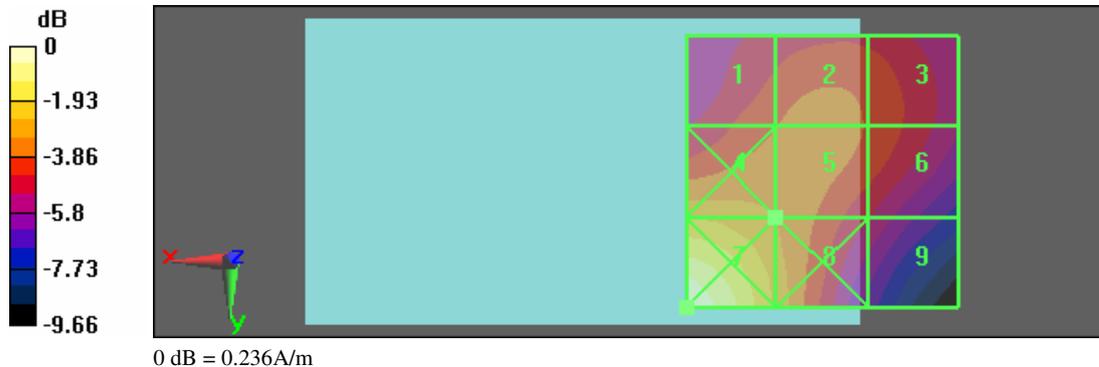



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:33:13 PM

**HAC\_WCDMA Band II CH9262\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.072 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.093 A/m; Power Drift = -0.024 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.101 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.066 M4</b>	Grid 2 <b>0.067 M4</b>	Grid 3 <b>0.064 M4</b>
Grid 4 <b>0.078 M4</b>	Grid 5 <b>0.072 M4</b>	Grid 6 <b>0.064 M4</b>
Grid 7 <b>0.101 M4</b>	Grid 8 <b>0.077 M4</b>	Grid 9 <b>0.058 M4</b>

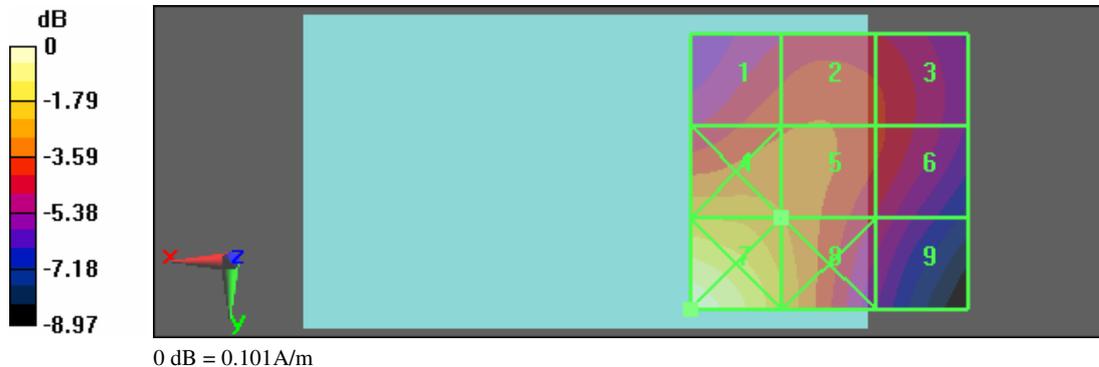



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:40:02 PM

**HAC\_WCDMA Band II CH9400\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.065 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.085 A/m; Power Drift = 0.096 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.091 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.061 M4</b>	Grid 2 <b>0.062 M4</b>	Grid 3 <b>0.059 M4</b>
Grid 4 <b>0.070 M4</b>	Grid 5 <b>0.065 M4</b>	Grid 6 <b>0.059 M4</b>
Grid 7 <b>0.091 M4</b>	Grid 8 <b>0.069 M4</b>	Grid 9 <b>0.053 M4</b>

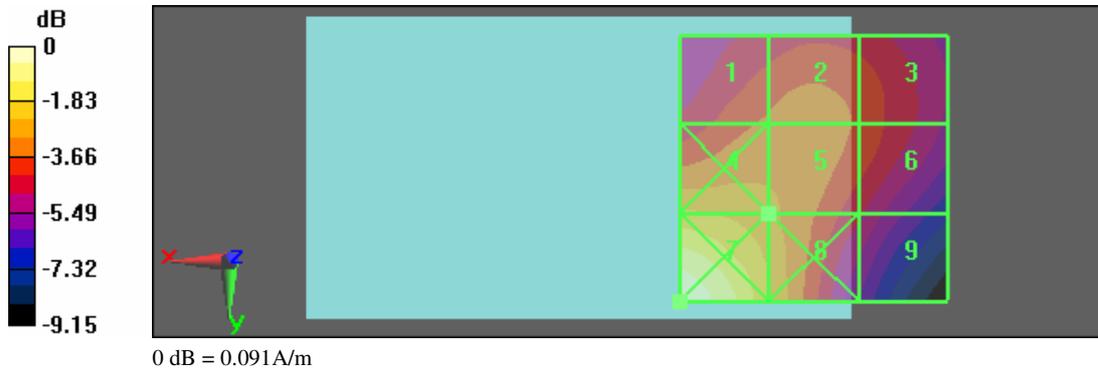



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:47:14 PM

**HAC\_WCDMA Band II CH9538\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.065 A/m

Probe Modulation Factor = 0.810

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.087 A/m; Power Drift = 0.078 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.091 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.061 M4</b>	Grid 2 <b>0.063 M4</b>	Grid 3 <b>0.061 M4</b>
Grid 4 <b>0.069 M4</b>	Grid 5 <b>0.065 M4</b>	Grid 6 <b>0.060 M4</b>
Grid 7 <b>0.091 M4</b>	Grid 8 <b>0.068 M4</b>	Grid 9 <b>0.053 M4</b>

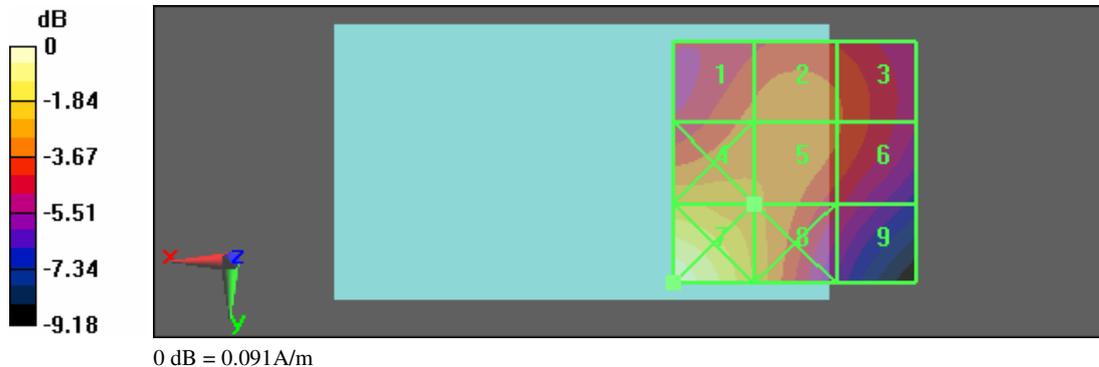



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:54:26 PM

**HAC\_WCDMA Band V CH4132\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.070 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.062 A/m; Power Drift = -0.069 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.099 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.092 M4</b>	Grid 2 <b>0.061 M4</b>	Grid 3 <b>0.036 M4</b>
Grid 4 <b>0.093 M4</b>	Grid 5 <b>0.067 M4</b>	Grid 6 <b>0.041 M4</b>
Grid 7 <b>0.099 M4</b>	Grid 8 <b>0.070 M4</b>	Grid 9 <b>0.045 M4</b>

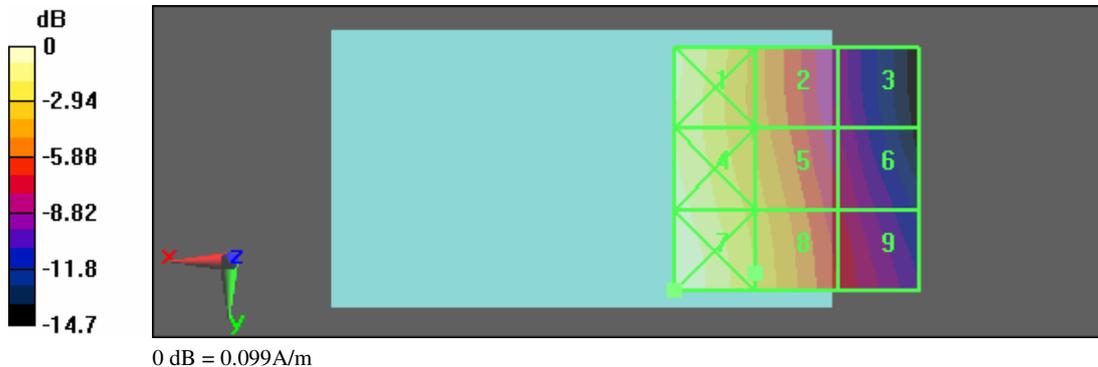



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 7:59:59 PM

**HAC\_WCDMA Band V CH4183\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.065 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.057 A/m; Power Drift = 0.027 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.093 A/m

H Category: M4

Location: 25, 24.5, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.086 M4</b>	Grid 2 <b>0.057 M4</b>	Grid 3 <b>0.033 M4</b>
Grid 4 <b>0.087 M4</b>	Grid 5 <b>0.062 M4</b>	Grid 6 <b>0.038 M4</b>
Grid 7 <b>0.093 M4</b>	Grid 8 <b>0.065 M4</b>	Grid 9 <b>0.041 M4</b>

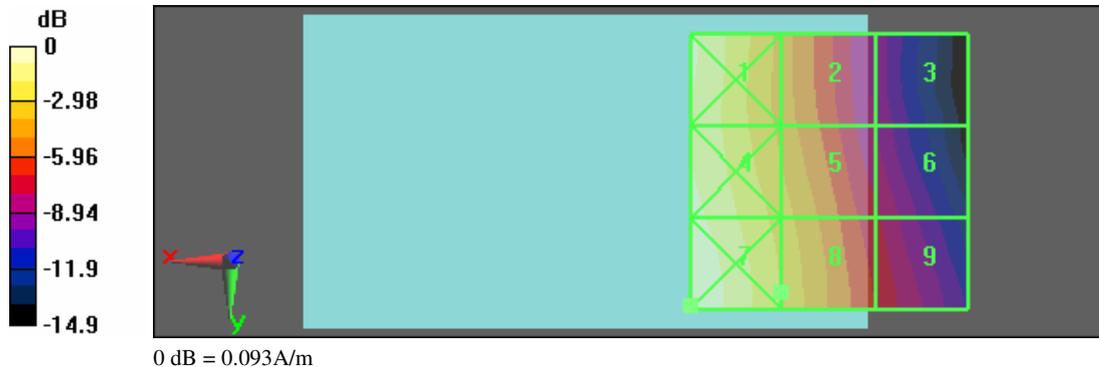



Test Laboratory: A Test Lab Techno Corp.  
Date/Time: 10/5/2011 8:09:15 PM

**HAC\_WCDMA Band V CH4233\_H\_2nd EUT\_2nd Battery**

**DUT: PJ03120; Type: Mobile Phone; FCC ID: NM8PJ03120**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6076; ; Calibrated: 8/30/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1038
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**H Scan - H3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm**

Maximum value of peak Total field = 0.084 A/m

Probe Modulation Factor = 0.860

Device Reference Point: 0, 0, 353.7 mm

Reference Value = 0.073 A/m; Power Drift = -0.014 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

**Cursor:**


Total = 0.119 A/m

H Category: M4

Location: 25, 25, 368.7 mm

Peak H-field in A/m

Grid 1 <b>0.110 M4</b>	Grid 2 <b>0.074 M4</b>	Grid 3 <b>0.043 M4</b>
Grid 4 <b>0.111 M4</b>	Grid 5 <b>0.080 M4</b>	Grid 6 <b>0.049 M4</b>
Grid 7 <b>0.119 M4</b>	Grid 8 <b>0.084 M4</b>	Grid 9 <b>0.054 M4</b>

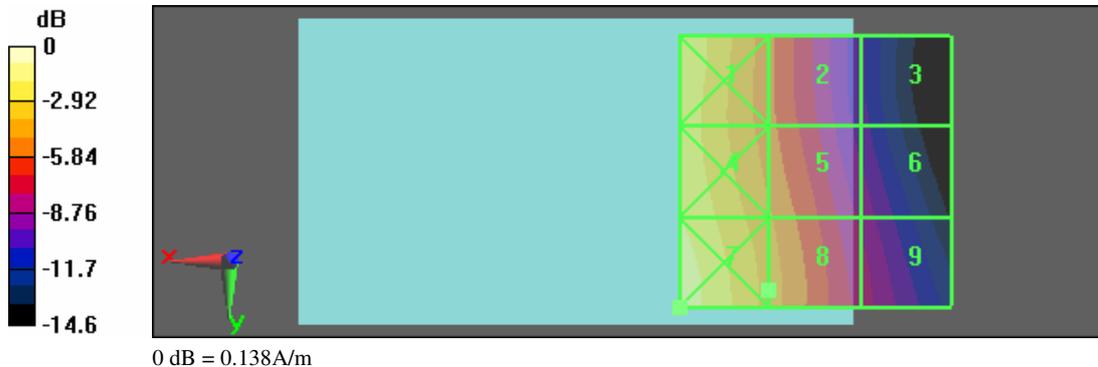



## ***Appendix D - Calibration***

All of the instruments Calibration information are listed below.

- Dipole \_ CD835V3 SN:1017 Calibration No.CD835V3-1017\_Jul11
- Dipole \_ CD1880V3 SN:1036 Calibration No.CD1880V3-1036\_Jul11
- Probe \_ ER3DV6R SN: 2256 Calibration No. ER3-2256\_Aug11
- Probe \_ H3DV6 SN: 6076 Calibration No. H3-6076\_ Aug11
- DAE \_ DAE4 SN:779 Calibration No.DAE4-779\_ Jan11



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **CD835V3-1017\_Jul11**

## CALIBRATION CERTIFICATE

Object: **CD835V3 - SN: 1017**

Calibration procedure(s): **QA CAL-20.v5  
Calibration procedure for dipoles in air**

Calibration date: **July 20, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37460704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Probe ER3DV6	SN: 2336	29-Dec-10 (No. ER3-2336_Dec10)	Dec-11
Probe H3DV6	SN: 6065	29-Dec-10 (No. H3-6065_Dec10)	Dec-11
DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
RF generator E4433B	MY 41000675	03-Nov-04 (in house check Oct-09)	In house check: Oct-11

Calibrated by:	Name <b>Claudio Leubler</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Fritz Bomholt</b>	Function <b>R&amp;D Director</b>	Signature 

Issued: July 20, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.



### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

### Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW input power	0.462 A / m $\pm$ 8.2 % (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	166.1 V / m
Maximum measured above low end	100 mW input power	162.2 V / m
Averaged maximum above arm	100 mW input power	164.1 V / m $\pm$ 12.8 % (k=2)

### Appendix

#### Antenna Parameters with Head TSL

Frequency	Return Loss	Impedance
800 MHz	16.0 dB	42.5 $\Omega$ - 12.7 j $\Omega$
835 MHz	25.5 dB	50.6 $\Omega$ + 5.3 j $\Omega$
900 MHz	17.9 dB	55.6 $\Omega$ - 12.3 j $\Omega$
950 MHz	19.3 dB	44.2 $\Omega$ + 8.4 j $\Omega$
980 MHz	15.2 dB	50.7 $\Omega$ + 17.7 j $\Omega$

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



### Impedance Measurement Plot

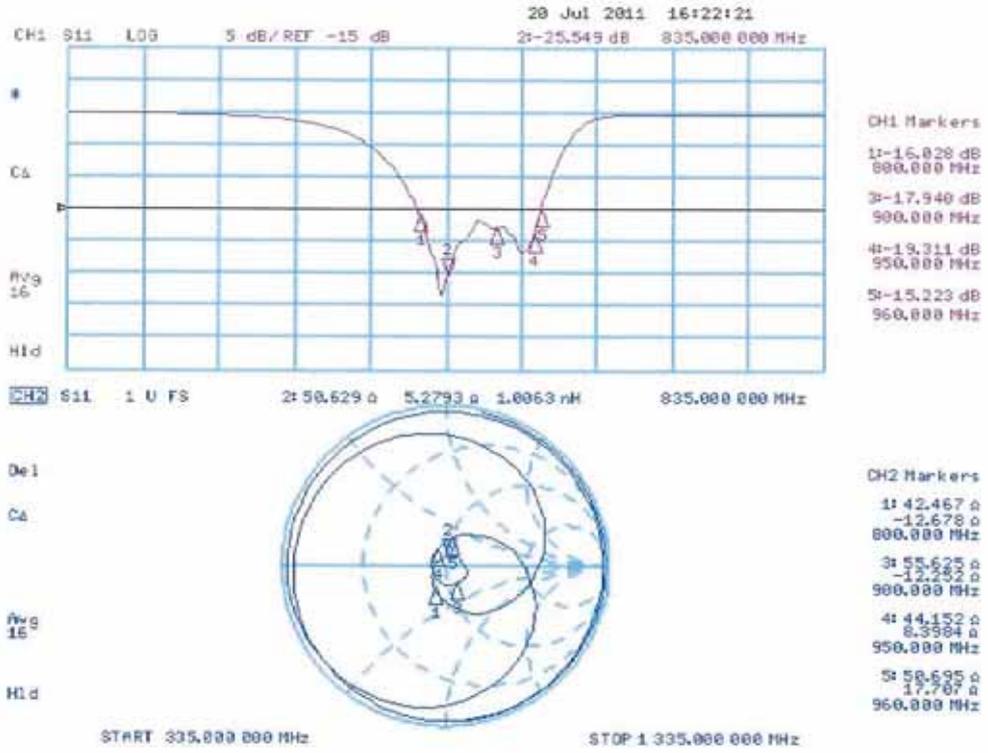

## DASY4 H-field Result

Date: 20.07.2011

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1017

Communication System: CW; Frequency: 835 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole H-Field measurement @ 835MHz/H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.462 A/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.492 A/m; Power Drift = 0.02 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 <b>0.388</b> M4	Grid 2 <b>0.408</b> M4	Grid 3 <b>0.384</b> M4
Grid 4 <b>0.438</b> M4	Grid 5 <b>0.462</b> M4	Grid 6 <b>0.436</b> M4
Grid 7 <b>0.387</b> M4	Grid 8 <b>0.406</b> M4	Grid 9 <b>0.382</b> M4

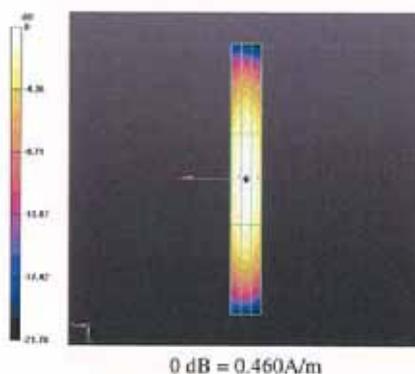

## DASY4 E-field Result

Date: 20.07.2011

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1017

Communication System: CW; Frequency: 835 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole E-Field measurement @ 835MHz/E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 166.1 V/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 120.7 V/m; Power Drift = -0.03 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 <b>159.8</b> M4	Grid 2 <b>166.1</b> M4	Grid 3 <b>160.2</b> M4
Grid 4 <b>84.943</b> M4	Grid 5 <b>87.152</b> M4	Grid 6 <b>84.332</b> M4
Grid 7 <b>159.6</b> M4	Grid 8 <b>162.2</b> M4	Grid 9 <b>156.3</b> M4

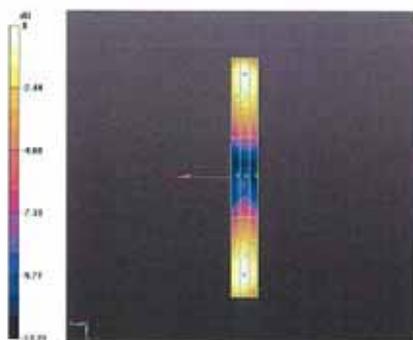

0 dB = 166.1V/m



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **ATL (Auden)**

Certificate No: **CD1880V3-1036\_Jul11**

CALIBRATION CERTIFICATE																																																			
Object	CD1880V3 - SN: 1036																																																		
Calibration procedure(s)	QA CAL-20.v5 Calibration procedure for dipoles in air																																																		
Calibration date:	July 20, 2011																																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-10 (No. 217-01266)</td> <td>Oct-11</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-10 (No. 217-01266)</td> <td>Oct-11</td> </tr> <tr> <td>Probe ER3DV8</td> <td>SN: 2336</td> <td>29-Dec-10 (No. ER3-2336_Dec10)</td> <td>Dec-11</td> </tr> <tr> <td>Probe H3DV8</td> <td>SN: 6065</td> <td>29-Dec-10 (No. H3-6065_Dec10)</td> <td>Dec-11</td> </tr> <tr> <td>DAE4</td> <td>SN: 781</td> <td>20-Apr-11 (No. DAE4-781_Apr11)</td> <td>Apr-12</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter Agilent 4419B</td> <td>SN: GB42420191</td> <td>09-Oct-09 (in house check Oct-10)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Power sensor HP 8482H</td> <td>SN: 3318A09450</td> <td>09-Oct-09 (in house check Oct-10)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Power sensor HP 8492A</td> <td>SN: US37295597</td> <td>09-Oct-09 (in house check Oct-10)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-10)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator E4433B</td> <td>MY 41000575</td> <td>03-Nov-04 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11	Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11	Probe ER3DV8	SN: 2336	29-Dec-10 (No. ER3-2336_Dec10)	Dec-11	Probe H3DV8	SN: 6065	29-Dec-10 (No. H3-6065_Dec10)	Dec-11	DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-10)	In house check: Oct-11	Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-10)	In house check: Oct-11	Power sensor HP 8492A	SN: US37295597	09-Oct-09 (in house check Oct-10)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11	RF generator E4433B	MY 41000575	03-Nov-04 (in house check Oct-09)	In house check: Oct-11
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11																																																
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11																																																
Probe ER3DV8	SN: 2336	29-Dec-10 (No. ER3-2336_Dec10)	Dec-11																																																
Probe H3DV8	SN: 6065	29-Dec-10 (No. H3-6065_Dec10)	Dec-11																																																
DAE4	SN: 781	20-Apr-11 (No. DAE4-781_Apr11)	Apr-12																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-10)	In house check: Oct-11																																																
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-10)	In house check: Oct-11																																																
Power sensor HP 8492A	SN: US37295597	09-Oct-09 (in house check Oct-10)	In house check: Oct-11																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11																																																
RF generator E4433B	MY 41000575	03-Nov-04 (in house check Oct-09)	In house check: Oct-11																																																
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 																																																
Approved by:	Name Fini Bornholt	Function R&D Director	Signature 																																																
Issued: July 20, 2011																																																			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

### Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW input power	0.464 A / m $\pm$ 8.2 % (k=2)

E-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured above high end	100 mW input power	142.0 V / m
Maximum measured above low end	100 mW input power	134.3 V / m
Averaged maximum above arm	100 mW input power	138.1 V / m $\pm$ 12.8 % (k=2)

### Appendix

#### Antenna Parameters with Head TSL

Frequency	Return Loss	Impedance
1730 MHz	22.8 dB	52.4 $\Omega$ + 7.0 j $\Omega$
1880 MHz	22.5 dB	52.4 $\Omega$ + 7.3 j $\Omega$
1900 MHz	22.4 dB	54.3 $\Omega$ + 6.6 j $\Omega$
1950 MHz	28.5 dB	53.3 $\Omega$ - 2.0 j $\Omega$
2000 MHz	20.1 dB	41.4 $\Omega$ + 2.6 j $\Omega$

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



### Impedance Measurement Plot

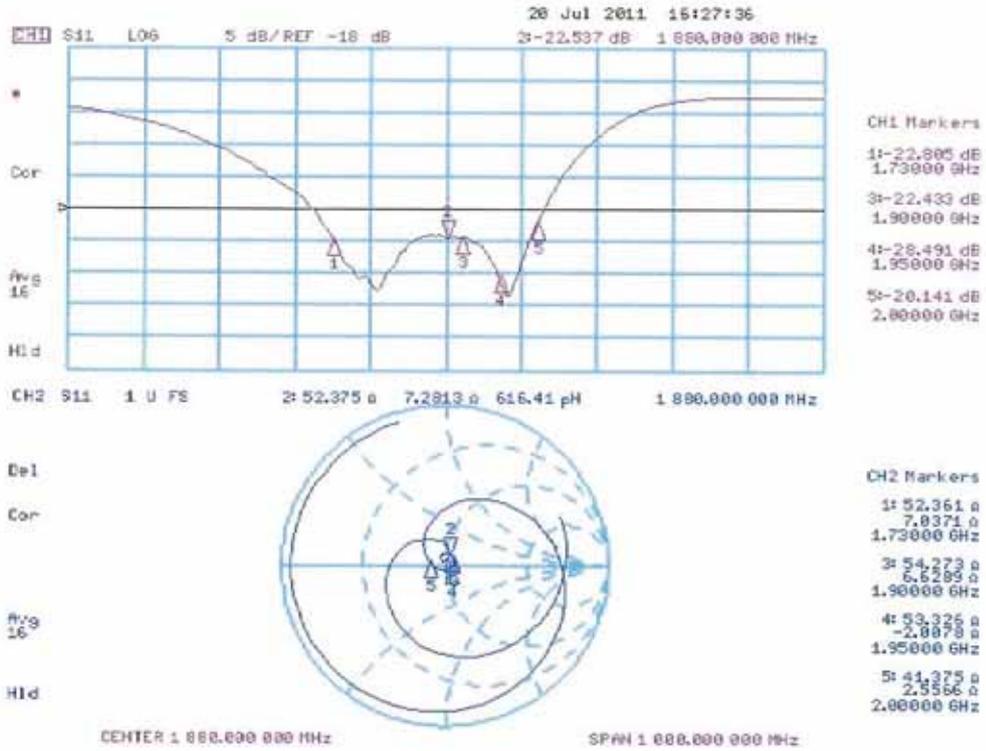

## DASY4 H-field Result

Date: 20.07.2011

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1036**

Communication System: CW; Frequency: 1880 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52.52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole H-Field measurement @ 1880MHz/H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.464 A/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.492 A/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.409</b> M2	Grid 2 <b>0.426</b> M2	Grid 3 <b>0.405</b> M2
Grid 4 <b>0.445</b> M2	Grid 5 <b>0.464</b> M2	Grid 6 <b>0.440</b> M2
Grid 7 <b>0.407</b> M2	Grid 8 <b>0.425</b> M2	Grid 9 <b>0.400</b> M2

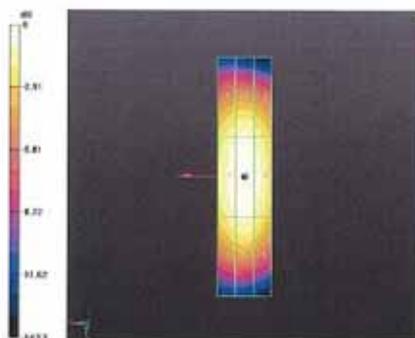

0 dB = 0.460A/m

## DASY4 E-field Result

Date: 20.07.2011

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1036**

Communication System: CW; Frequency: 1880 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.04.2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52.52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole E-Field measurement @ 1880MHz/E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 142.0 V/m  
 Probe Modulation Factor = 1.000  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 138.9 V/m; Power Drift = 0.0076 dB  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>136.0</b> M2	Grid 2 <b>142.0</b> M2	Grid 3 <b>137.5</b> M2
Grid 4 <b>82.223</b> M3	Grid 5 <b>85.065</b> M3	Grid 6 <b>82.878</b> M3
Grid 7 <b>132.9</b> M2	Grid 8 <b>134.3</b> M2	Grid 9 <b>128.4</b> M2

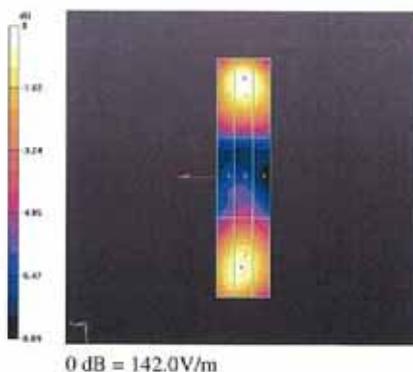

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **ER3-2256\_Aug11**

## CALIBRATION CERTIFICATE

Object **ER3DV6R - SN:2256**

Calibration procedure(s) **QA CAL-02.v6, QA CAL-25.v4**  
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **August 26, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ER3DV6	SN: 2328	4-Oct-10 (No. ER3-2328_Oct10)	Oct-11
DAE4	SN: 789	6-Apr-11 (No. DAE4-789_Apr11)	Apr-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 6948C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	<b>Cláudio Leubler</b>	Function Laboratory Technician	Signature 
Approved by:	<b>Karja Pokovic</b>	Technical Manager	
			Issued: August 29, 2011
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

<b>NORM<sub>x,y,z</sub></b>	sensitivity in free space
<b>DCP</b>	diode compression point
<b>CF</b>	crest factor (1/duty_cycle) of the RF signal
<b>A, B, C</b>	modulation dependent linearization parameters
<b>Polarization <math>\phi</math></b>	$\phi$ rotation around probe axis
<b>Polarization <math>\theta</math></b>	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
<b>Connector Angle</b>	information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  for XY sensors and  $\theta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- **NORM(f)<sub>x,y,z</sub>** = **NORM<sub>x,y,z</sub>** \* *frequency\_response* (see Frequency Response Chart).
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **Spherical isotropy (3D deviation from isotropy)**: In a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the **NORM<sub>x</sub>** (no uncertainty required).



ER3DV6R – SN.2256

August 26, 2011

# Probe ER3DV6R

## SN:2256

Manufactured: March 15, 2001  
Calibrated: August 26, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

---

Certificate No: ER3-2256\_Aug11

Page 3 of 10



## DASY/EASY - Parameters of Probe: ER3DV6R - SN:2256

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu V/(V/m)^2$ )	2.18	1.58	1.65	$\pm 10.1\%$
DCP (mV) <sup>a</sup>	98.2	98.3	101.0	

### Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>b</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	105.9	$\pm 3.0\%$
			Y	0.00	0.00	1.00	108.4	
			Z	0.00	0.00	1.00	105.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>a</sup> Numerical linearization parameter; uncertainty not required.


<sup>b</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

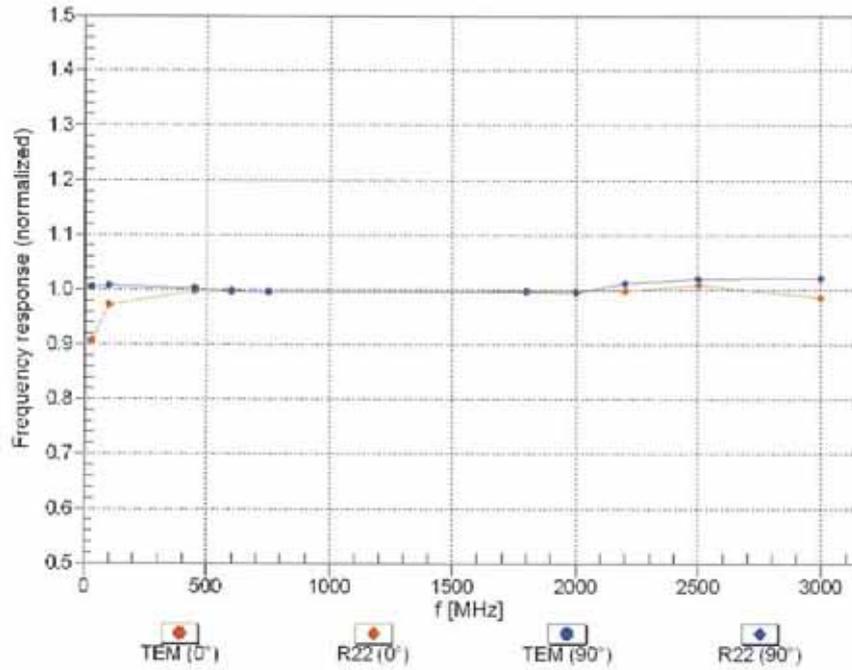


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)


### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

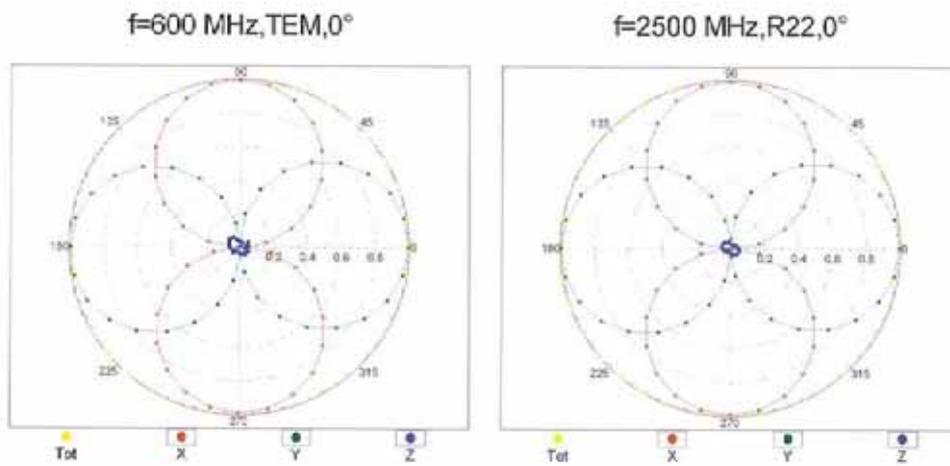

### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

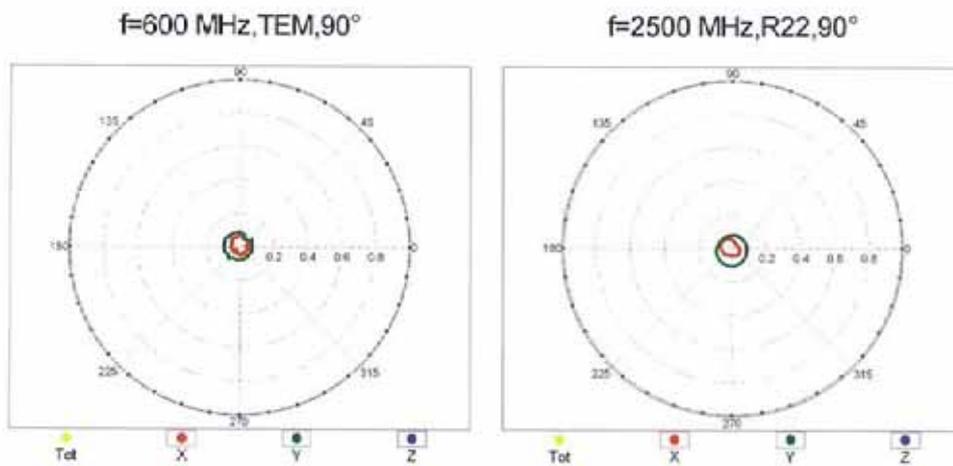


### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

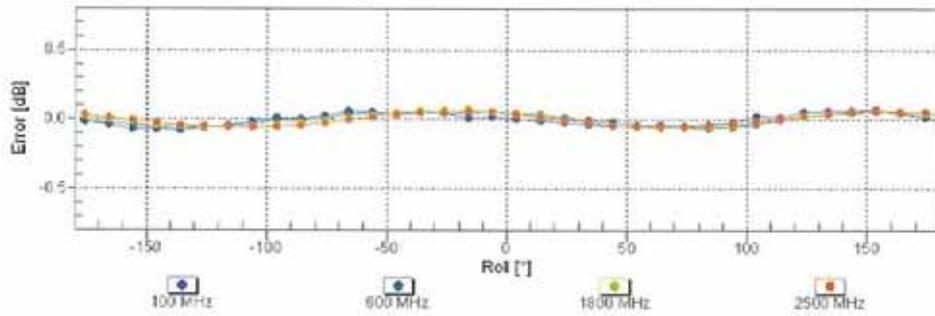



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

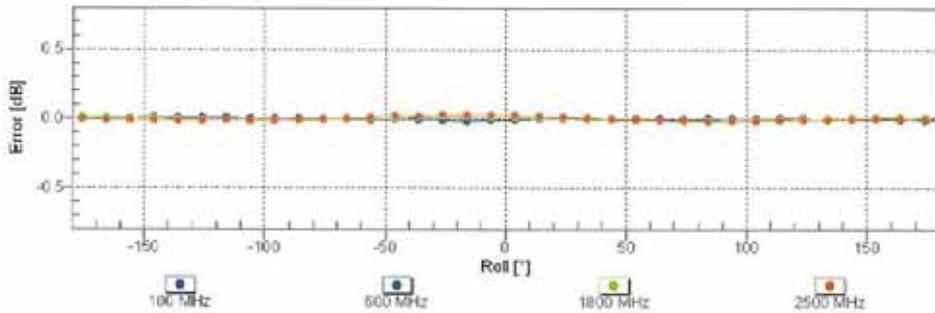



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range f(E-field) (TEM cell , f = 900 MHz)

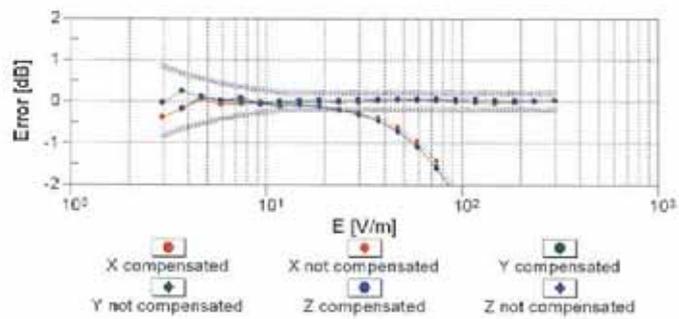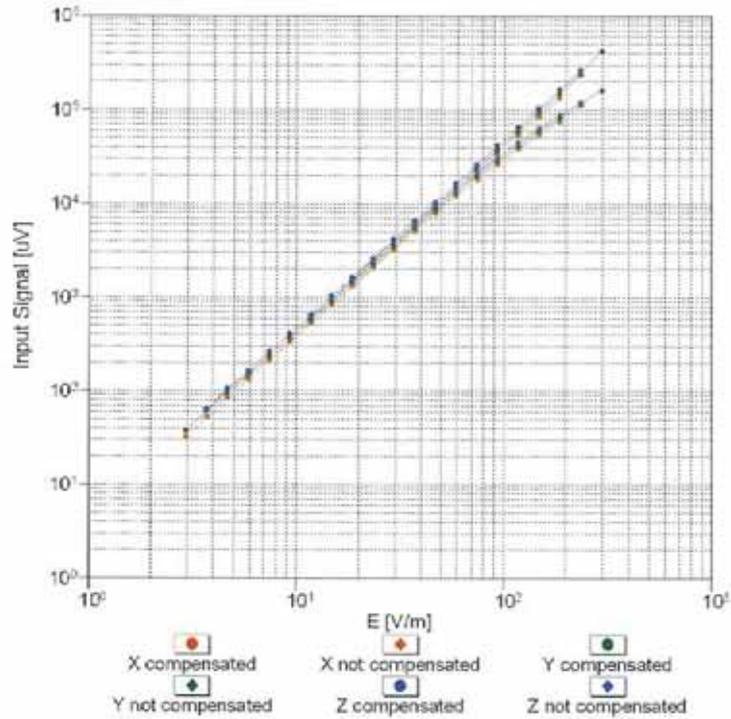

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

### Deviation from Isotropy in Air Error ( $\phi$ , $\theta$ ), $f = 900$ MHz

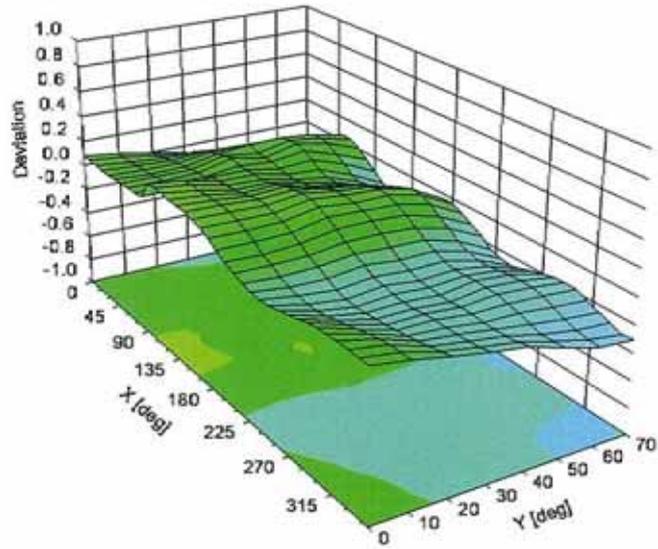

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )



### DASY/EASY - Parameters of Probe: ER3DV6R - SN:2256

#### Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	-66
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8064 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **H3-6076\_Aug11**

## CALIBRATION CERTIFICATE

Object **H3DV6 - SN:6076**

Calibration procedure(s) **QA CAL-03.v6, QA CAL-25.v4**  
Calibration procedure for H-field probes optimized for close near field evaluations in air

Calibration date: **August 30, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been concluded in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe H3DV6	SN: 6182	23-Jun-11 (No. H3-6182_Jun11)	Jun-12
DAE4	SN: 789	6-Apr-11 (No. DAE4-789_Apr11)	Apr-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3942U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 31, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

**Methods Applied and Interpretation of Parameters:**

- *NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\theta = 0$  for XY sensors and  $\theta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- *X,Y,Z(f)\_a0a1a2 = X,Y,Z\_a0a1a2\* frequency\_response* (see Frequency Response Chart).
- *DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A<sub>x,y,z</sub>, B<sub>x,y,z</sub>, C<sub>x,y,z</sub>, VR<sub>x,y,z</sub>*: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *X\_a0a1a2* (no uncertainty required).



H3DV6 – SN:6076

August 30, 2011

# Probe H3DV6

## SN:6076

Manufactured: October 2, 2000  
Calibrated: August 30, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



## DASY/EASY - Parameters of Probe: H3DV6 - SN:6076

### Basic Calibration Parameters

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / $\sqrt{\text{mV}}$ )	a0	3.04E-003	2.69E-003	3.05E-003	$\pm 5.1\%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a1	-4.41E-005	-1.82E-004	4.21E-006	$\pm 5.1\%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a2	2.11E-005	4.67E-006	-1.74E-004	$\pm 5.1\%$
DCP (mV) <sup>§</sup>		92.2	93.7	92.6	

### Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>¶</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	149.6	$\pm 1.7\%$
			Y	0.00	0.00	1.00	138.4	
			Z	0.00	0.00	1.00	133.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>§</sup> Numerical linearization parameter; uncertainty not required.

<sup>¶</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.


### Frequency Response of H-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

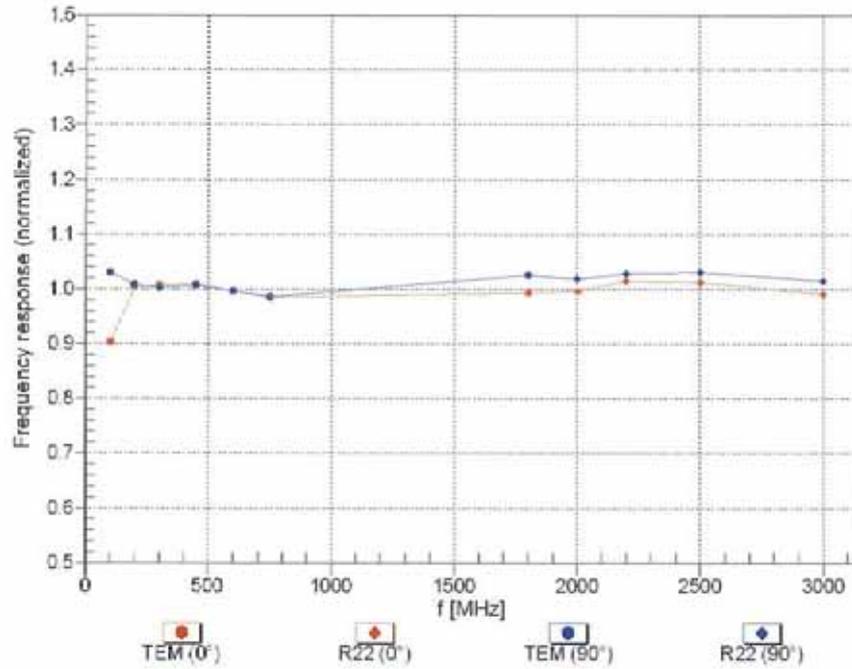


Uncertainty of Frequency Response of H-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz, TEM,  $0^\circ$

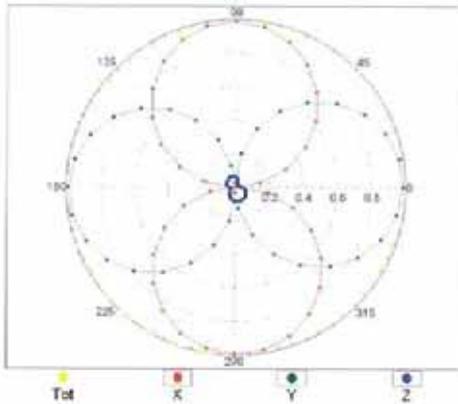


f=2500 MHz, R22,  $0^\circ$

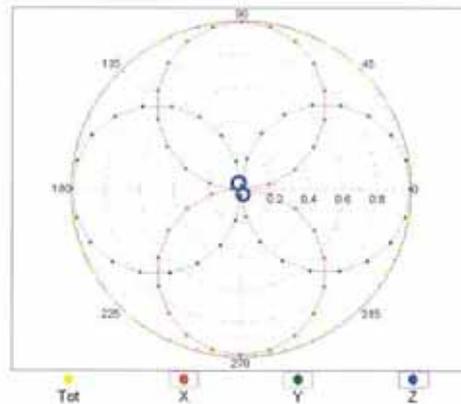


### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


f=600 MHz, TEM,  $90^\circ$

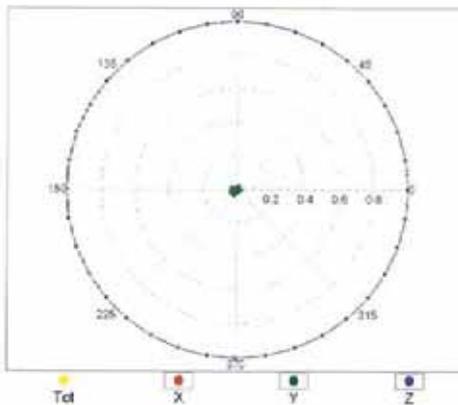

f=2500 MHz, R22,  $90^\circ$

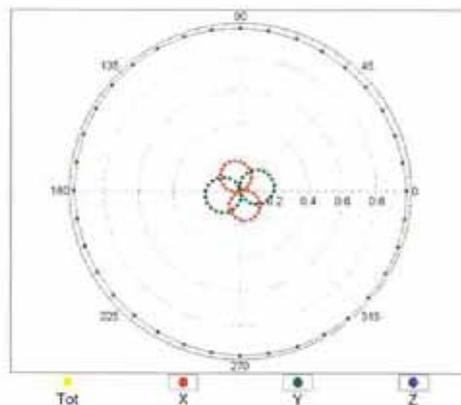


### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

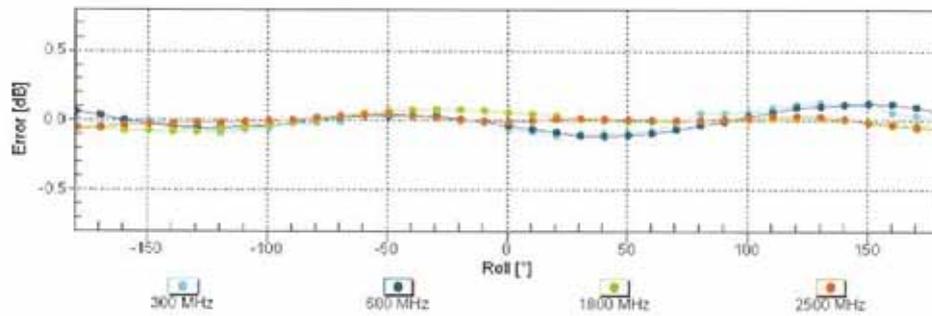



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

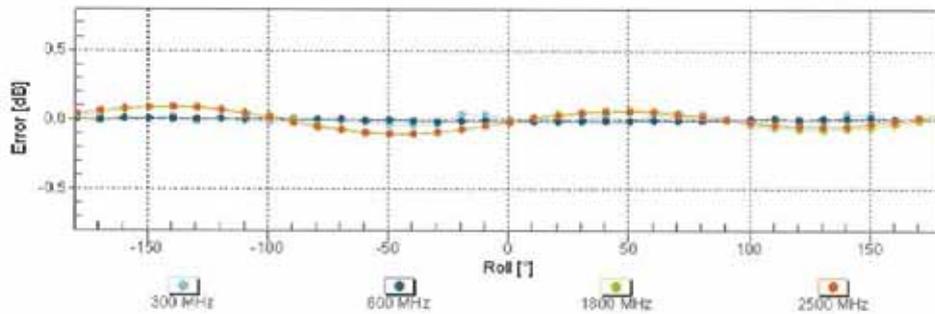



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range f(H-field) (TEM cell, f = 900 MHz)

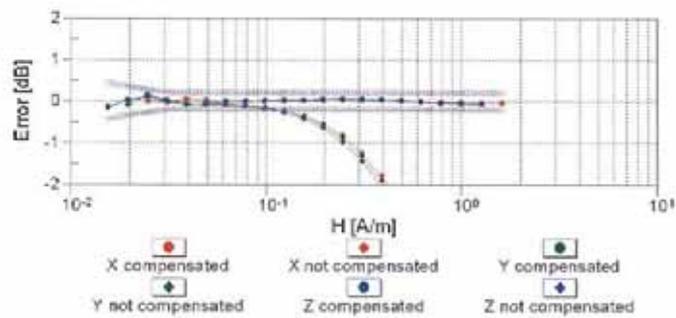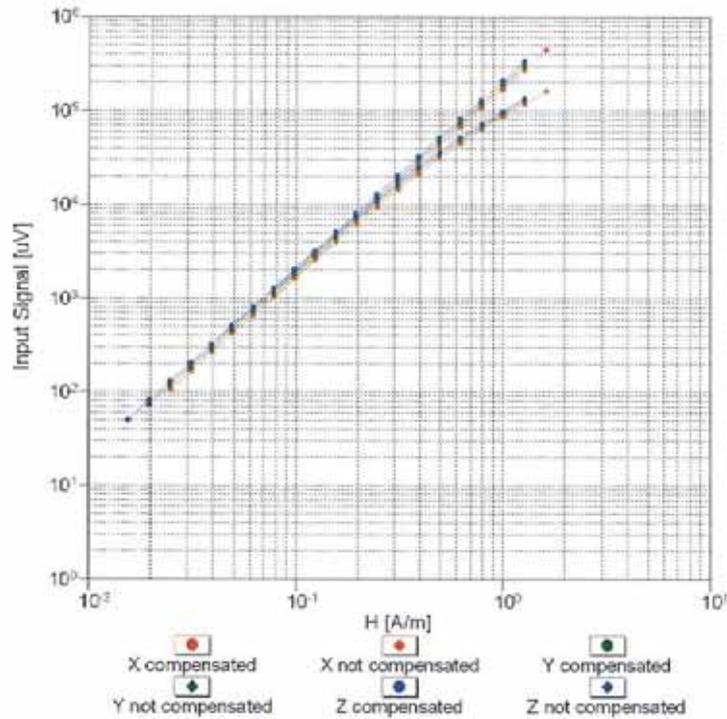

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

### Deviation from Isotropy in Air Error ( $\phi$ , $\theta$ ), $f = 900$ MHz

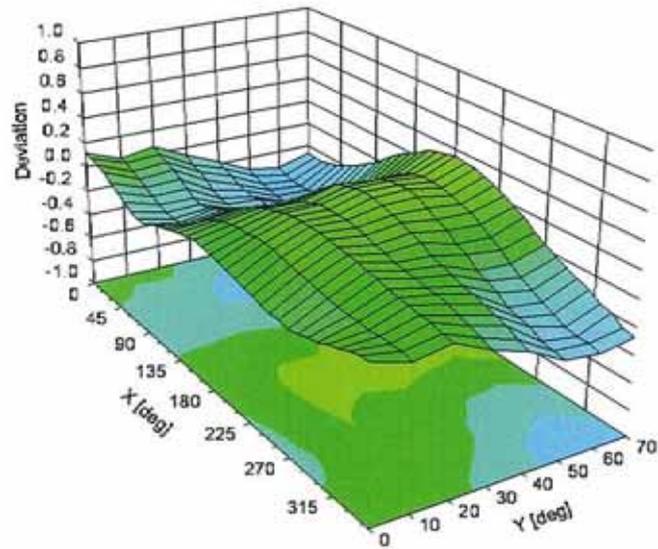

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )



### DASY/EASY - Parameters of Probe: H3DV6 - SN:6076

#### Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	-99.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **DAE4-779\_Jan11**

### CALIBRATION CERTIFICATE

Object: **DAE4 - SD 000 D04 BJ - SN: 779**

Calibration procedure(s): **QA CAL-06.v22  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 31, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by:	Name <b>Andrea Guntli</b>	Function <b>Technician</b>	Signature 
Approved by:	Name <b>Flin Bernholt</b>	Function <b>R&amp;D Director</b>	Signature 

Issued: January 31, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zaughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.



### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.517 $\pm$ 0.1% (k=2)	403.748 $\pm$ 0.1% (k=2)	403.972 $\pm$ 0.1% (k=2)
Low Range	3.96927 $\pm$ 0.7% (k=2)	3.98585 $\pm$ 0.7% (k=2)	3.99915 $\pm$ 0.7% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	155.5 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	-------------------------------------

## Appendix

### 1. DC Voltage Linearity

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	200001.8	6.19	0.00
Channel X + Input	200003.75	4.25	0.02
Channel X - Input	-19996.56	3.04	-0.02
Channel Y + Input	200005.0	0.90	0.00
Channel Y + Input	20000.78	1.38	0.01
Channel Y - Input	-19996.43	2.97	-0.01
Channel Z + Input	200002.2	-1.15	-0.00
Channel Z + Input	19999.59	0.19	0.00
Channel Z - Input	-19995.05	4.35	-0.02

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2000.4	0.25	0.01
Channel X + Input	200.27	0.37	0.18
Channel X - Input	-199.08	1.12	-0.56
Channel Y + Input	2000.1	0.19	0.01
Channel Y + Input	199.01	-0.89	-0.45
Channel Y - Input	-199.30	0.50	-0.25
Channel Z + Input	1999.6	-0.40	-0.02
Channel Z + Input	199.22	-0.88	-0.44
Channel Z - Input	-200.27	-0.37	0.19

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	-3.66	-5.39
	-200	5.82	4.90
Channel Y	200	13.39	13.58
	-200	-14.98	-15.16
Channel Z	200	2.20	2.53
	-200	-4.84	-4.61

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	1.33	-0.57
Channel Y	200	1.97	-	3.29
Channel Z	200	1.19	-0.28	-



#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15613	15134
Channel Y	15831	16218
Channel Z	16150	17743

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	-0.26	-1.03	0.79	0.42
Channel Y	0.52	-1.04	2.07	0.58
Channel Z	-2.22	-3.25	-0.85	0.44

#### 6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



## Appendix E - Uncertainty

<b>HAC Uncertainty Budget</b> According to NSIC63.19 [1], [2]							
Error Description	Uncertainty value	Prob. Dist.	Div.	(ci) E	(ci) H	Std. Unc. E	Std. Unc. H
<b>Measurement System</b>							
Probe Calibration	±5.1%	N	1	1	1	±5.1%	±5.1%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Sensor Displacement	±16.5%	R	$\sqrt{3}$	1	0.145	±9.5%	±1.4%
Test Arch	±7.2%	R	$\sqrt{3}$	1	0	±4.02%	±0.0%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Probe modulation Factor	±15.0%	R	$\sqrt{3}$	1	1	±8.7%	±8.7%
Scaling to Peak Envelope Power	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%
System Detection Limit	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Reflections	±12.0%	R	$\sqrt{3}$	1	1	±6.9%	±6.9%
Probe Positioner	±1.2%	R	$\sqrt{3}$	1	0.67	±0.7%	±0.5%
Probe Positioning	±4.7%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Extrap. and Interpolation	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
<b>Test Sample Related</b>							
Device Positioning Vertical	±4.7%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Device Positioning Lateral	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Device Holder and Phantom	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
<b>Phantom and Setup Related</b>							
Phantom Thickness	±2.4%	R	$\sqrt{3}$	1	0.67	±1.4%	±0.9%
<b>Combined Std. Uncertainty</b>		RSS				±17.5%	±13.8%
<b>Expanded Std. Uncertainty on Power</b>		K=2				±35.0%	±27.6%
<b>Expanded Std. Uncertainty on Field</b>						±17.5%	±13.8%