

**MANUTEC INDUSTRIAL LIMITED**

Flat B, 9/F., Wah Wai Ind. Bldg., 1-7 Wo Heung Street, Fo Tan, N.T., Hong Kong.
Tel.: (852) 2439-9182, Fax: (852) 2460-4640

FAX MESSAGE

TO: Mr. Ken Lam - ITS
FROM: David Siu - MIL
CC: KWS, WKL - MIL

DATE: Nov. 3, 1998
REF.:
PAGE: 1 OF 4 (including this page)

RE: PS-08 Receiver FCC Certification

Dear Mr. Lam,

We will updated the user manual in order to meet the FCC requirements. Attached is the information for that changes,

How to connect to your home security system (Page 16 of the User Manual)

The remote receiver has a three junction terminal block, so that you can connect it to your home security system or other third party safety device. When the receiver receives a RF (radio frequency) alarm signal, it will activate the terminal block in 3 seconds. Resetting the receiver within 3 seconds ensures that you will not activate your home security system.

Loosen the four screws and open the box. You will locate a three junction terminal block near the A/C adapter power jack.

Connect the receiver to your security system using a relay, as shown in the diagram below. In order to prevent any unexpected RF interference, you must use the provided cable adapter to connect any external device to the receiver.

Thanks for your kind attentions.

Best Regards,

David C. Siu - Engineering Department
(Email: davidsiu@actvigator.com)

Remote receiver (PS-08 model only)


Place the remote receiver inside your house.

Plug in the A/C adapter and the green LED will stay ON, indicating it is ready to receive signals.

Use the stainless steel wood screw to hang the unit on a wall, or leave it stand up right. (DO NOT place the unit near big metal pieces or large motors, such as a refrigerator, or washing machine. This will adversely affect the RF reception).

When this receiver receives a RF alarm signal, the alarm siren will sound and the red LED will flash quickly.

Hit the RESET button located between the two LEDs, to reset the receiver. Each reset will disable the receiver for 10 seconds, allowing you enough time to go to the pool side alarm transmitter to reset it, or turn it off. During this 10 second timeframe, the red LED will flash every 1 second. If you do not reset the receiver, it will reset automatically in four minutes.

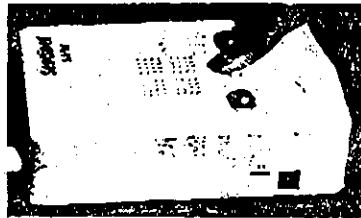


*Updated information
and graphic will
be added here.*

Channel A/B select

The pool side alarm or other Sentinel Link alarms RF (radio frequency) signal can be transmitted from the transmitter to the receiver inside the house by two different channels (A or B). All units are preset at channel A in the factory. However, if your alarm system interferes your neighbor's alarm system, you may have to change them to channel B.

The remote receiver has a built in channel select switch, located inside the receiver box. Loosen the four screws and open the box. You can find a slide switch near the A/C adapter power jack. Push the switch handle from position "A" to position "B". Close the box after you have done and tighten up the four screws. Make sure you do the same channel adjust on all your SENTINEL LINK devices, including the pool side alarm transmitter. Check the RF link periodically to ensure good RF transmission.

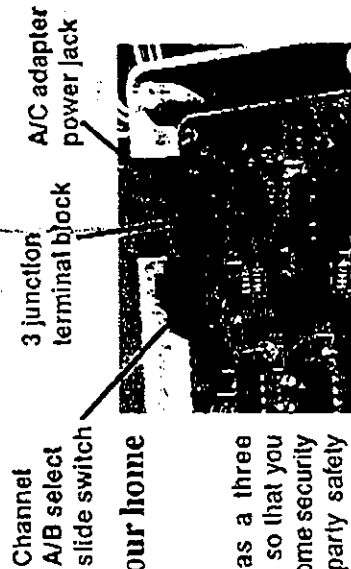


How to connect to your home security system

The remote receiver has a three junction terminal block, so that you can connect it to your home security system or other third party safety device. When the receiver receives a RF (radio frequency) alarm signal, it will activate the terminal block in 3 seconds. Resetting the receiver within 3 seconds ensures that you will not activate your home security system.

Loosen the four screws and open the box. You will locate a three junction terminal block near the A/C adapter power jack.

Connect the receiver to your security system using a relay, as shown in the diagram below.

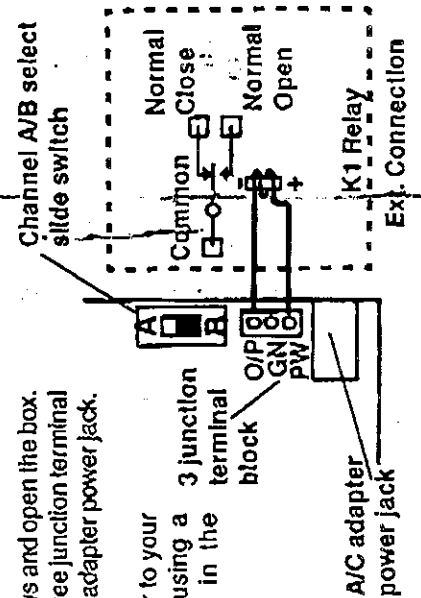

English

Contents

PS-08

Pool side alarm transmitter control head, 1 piece
 Pool side alarm transmitter sensor tube, 1 piece
 Remote receiver, 1 piece
 A/C adapter, 1 piece
 "W" shaped plastic clamp: 2 sets
 1.9" to 1.5" ladder adapter: 2 sets
 "U" shaped plastic clamp, 2 sets
 Metal bracket, 1 piece
 1" X 1" double sided foam tape: 2 pieces
 1" X 1.5" double sided foam tape: 2 pieces
 Machine screws: 6 pieces
 Wood screw: 3 pieces
 Operation manual: 1 set
 Warranty card: 1 set

Cable Adapter, 1 piece

PS-09

Pool side alarm transmitter control head, 1 piece
 Pool side alarm transmitter sensor tube, 1 piece
 "W" shaped plastic clamp: 2 sets
 1.9" to 1.5" ladder adapter: 4 pcs
 Machine screws: 6 pieces
 Operation manual: 1 set
 Warranty card: 1 set

Perfect companion for your security in and around the
 pool (all optional)

PS-01 Sentinel Floating Boat Digital Thermometer

PS-02 Sentinel Basic Water Resistant Gate Alarm



PS-03 Sentinel Water Resistant Gate Alarm with Additional PASS/RESET Switch

PS-04 Sentinel Link Gate Alarm with RF Transmitter
(can work with your PS-08 remote receiver)

PS-07 Sentinel Link RF Alarm Booster

PS-10 Sentinel Spa Cover Alarm

Lambo Products, Inc.
 Mountain View CA 94041
 Tel: 888-383-8228
 Fax: 650-965-7194

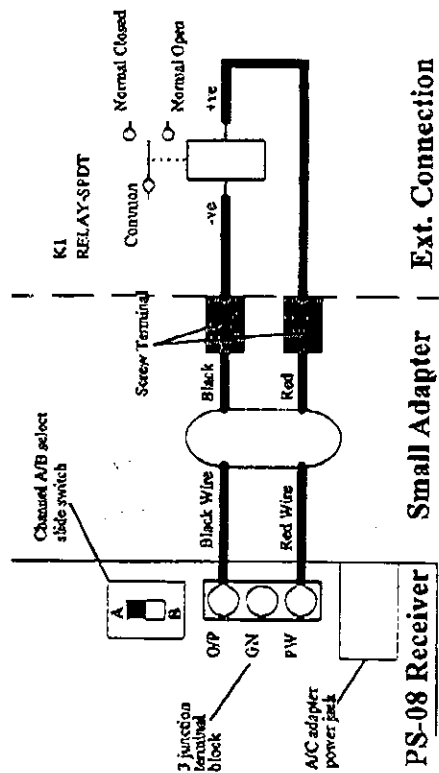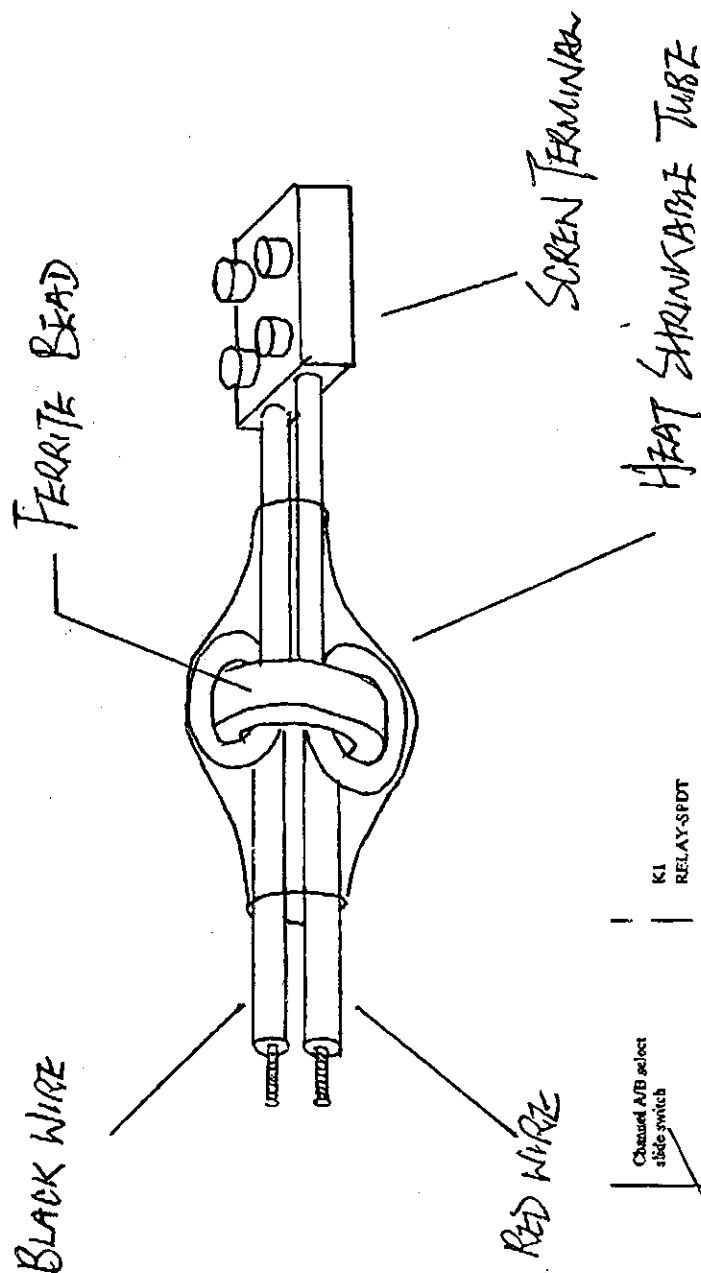

Title			
PS-08 Receiver External Adapter	Size	Number	Revision
	A		0
Date: 3-Nov-1998	Sheet 1 of 1		
File: C:\MYDOCU\15CH 1 SCH	Drawn By: DS		