

Description: 1204 915MHz Chip Antenna

PART NUMBER: ANT1204LL05R0915A

Features:

- Size : 12.1x4.1x1.6 mm
- Omni-directional radiation
- Tape & reel automatic mounting
- Reflow process compatible
- RoHS compliant



Applications:

- Smart meter
- Industrial remote control
- ISM band equipment
- ZigBee device



Description: 1204 915MHz Chip Antenna
PART NUMBER: ANT1204LL05R0915A
SPECIFICATIONS

Working Frequency	915 MHz
Bandwidth	20 MHz(Typ.)
V.S.W.R.	2.0 dB Max.
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Peak Gain	3.32 dBi(Typ.)
Impedance	50 Ω
Operating Temperature	- 40~105 °C
Maximum Power	1 W
Termination	Ni / Sn (Environmentally-Friendly Leadless)
Peak Reflow Temperature	260°C , 10sec.


NOTE

1. The specification is defined on Pulse evaluation board

MECHANICAL DRAWING

	Dimension
L (mm)	12.1 $\pm$ 0.20
W (mm)	4.10 $\pm$ 0.20
T (mm)	1.60 $\pm$ 0.20
A (mm)	0.85 $\pm$ 0.35


Terminal name	Function
W	Feeding Point
L	Soldering Point

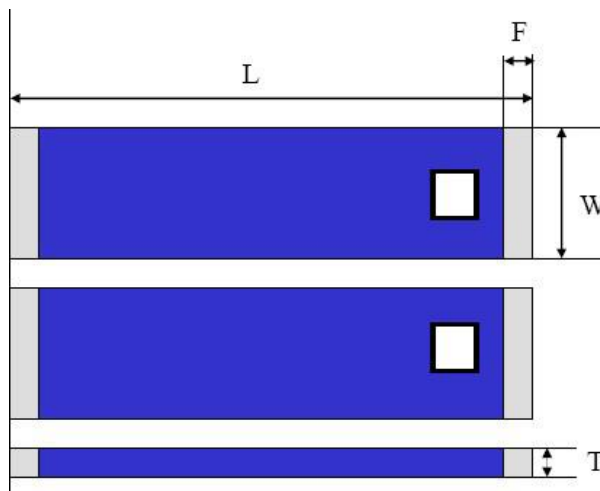

Description: 1204 915MHz Chip Antenna


PART NUMBER: ANT1204LL05R0915A

REFERENCE DESIGN OF EVALUATION BOARD

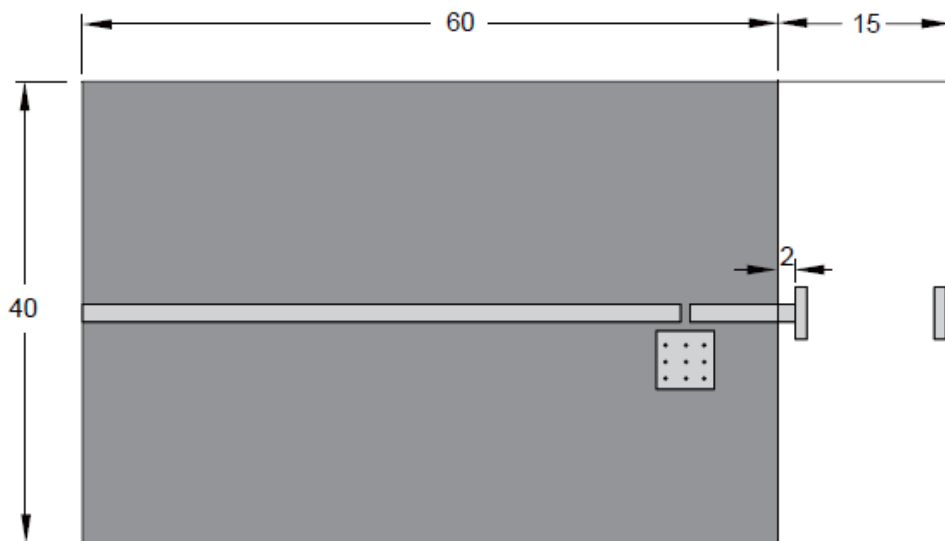

Unit : mm

Outlook and dimension of evaluation board

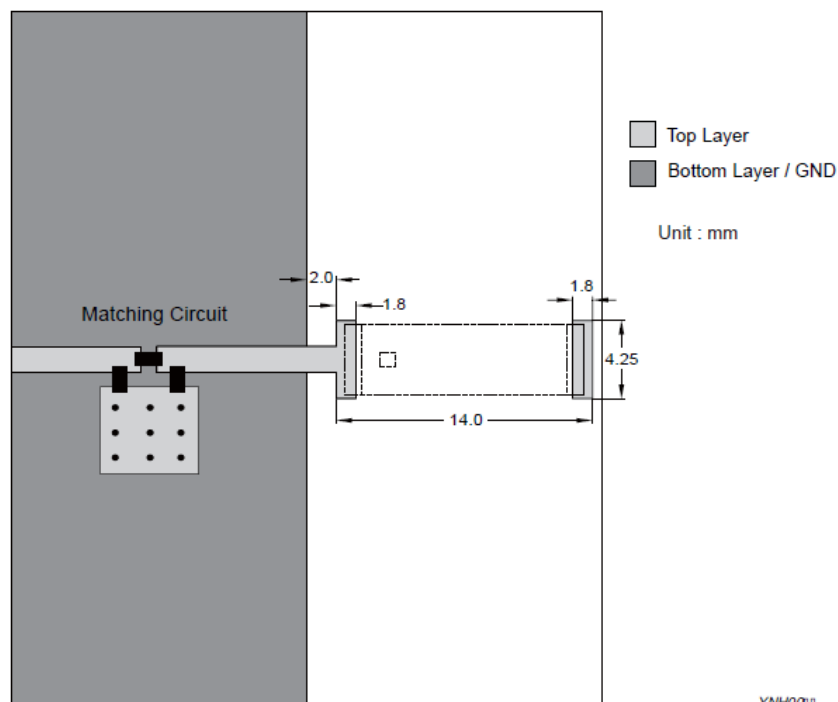

Unit : mm


Details of soldering Pad

YNH0000


Description: 1204 915MHz Chip Antenna

PART NUMBER: ANT1204LL05R0915A

ELECTRICAL PERFORMANCES

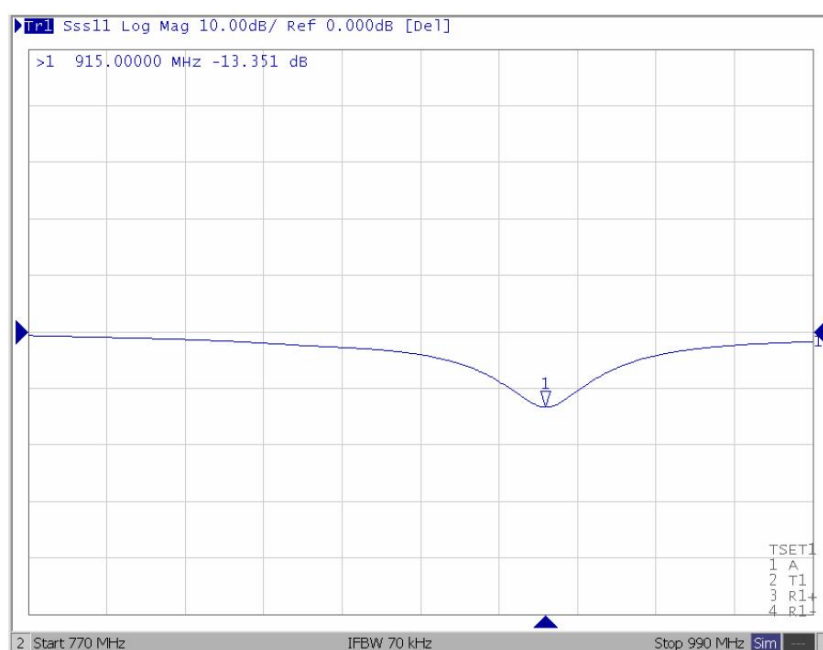

Return loss

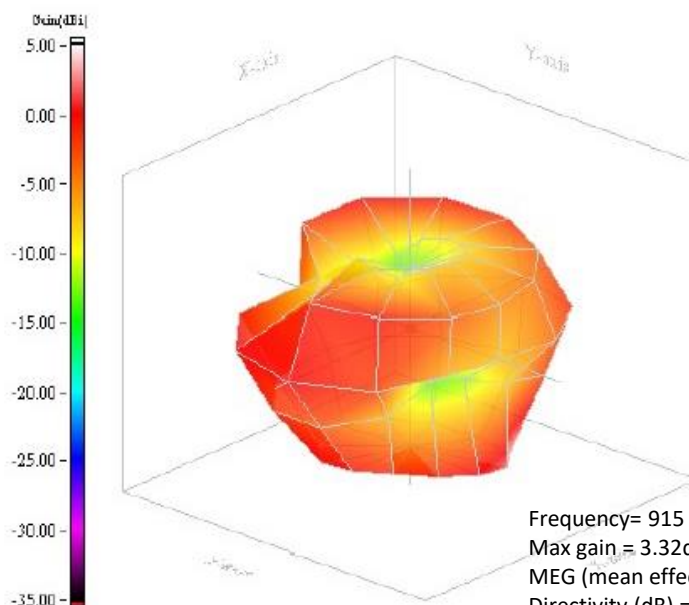

Radiation pattern

Frequency= 915 MHz
Max gain = 3.32dBi, at (150,180)
MEG (mean effective gain)= -3.11 dBi
Directivity (dB) = 5.92
Efficiency = -2.60dB, 55.02 %

Description: 1204 915MHz Chip Antenna

PART NUMBER: ANT1204LL05R0915A

REVISION HISTORY

Revision	Date	Description
Version 1	Oct. 14, 2020	- New issue
Version 2	January. 28, 2022	- Added product image. - Modified Description, Original: Resistance to Soldering Heats, Changed: Peak Reflow Temperature.