

In-Tech Electronics Ltd.

Application
For
Certification
(FCC ID: NV64002)

March 3, 1999

WO# 9900899

CKL/at

March 3, 1999

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited.

FCC ID: NV64002

INTERTEK TESTING SERVICES

SUMMARY OF CONTENTS

LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Emission Spurious
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Product Labelling
<i>EXHIBIT 10:</i>	Photographs
<i>EXHIBIT 11:</i>	Instruction Manual

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application: In-Tech Electronics Ltd.
Trade Name: Columbia
Model No.: 4002
Date: March 2, 1999

This report concerns (check one:)Original Grant Class II Change

Equipment Type: Family Radio Service, FRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Wilbur Ng
Intertek Testing Services.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2746-8680
Fax: 852-2785-5487

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>General Description</u>	2
1.1 Product Description	2
1.2 Ralated Submittal(s) Grants.....	3
1.3 Test Methodology	3
1.4 Test Facility	3
2.0 <u>System Test Configuration</u>	5
2.1 Justification	5
2.2 EUT Exercising Software	6
2.3 Special Accessories.....	6
2.4 Equipment Modification	6
3.0 <u>RF Output Power (Section 95.639(d)</u>	8
4.0 <u>Modulation Characteristics (Section 95.637(a))</u>	12
4.1 Modulation Frequency Response	14
4.2 Modulation Limiting Characteristic	16
5.0 <u>Occupied Bandwidth (Section 95.633(c)</u>	21
6.0 <u>Spurious Emission (Section 95.635(b))</u>	20
6.1 Field Strength of Spurious Radiation.....	27
7.0 <u>Frequency Stanility (Section 95.627)</u>	34
7.1 Frequency Tolerance	35
7.2 Voltage Extreme Condition.....	38
7.3 Temperature Extreme Condition	42
8.0 <u>Technical Specifications</u>	45
9.0 <u>Product Labelling</u>	49
10.0 <u>Equipment Photographs</u>	53
11.0 <u>Instruction Manual</u>	55

INTERTEK TESTING SERVICES

List of attached file

	Exhibit type	File Description	Filename
1	Cover Letter	Letter of Agency	letter.pdf
2	Operation Description	Technical Description	descri.pdf
3	Test Report	Bandwidth Plot	bw.pdf
4	Test Report	Modulation Frequency Response	mfr.pdf
5	Test Report	Modulation Limit Characteristic	mlc.pdf
6	Test Report	Unwanted Emission	emission.pdf
7	Block Diagram	Block Diagram	block.pdf
8	Schematics	Circuit Diagram	circuit.pdf
9	ID Label/Location	Label Artwork and Location	label.pdf
10	User Manual	User Manual	manual.pdf
11	Test Report	Test Report	report.doc
12	Test Setup Photo	Radiated Emission	radiated1.jpg
13	Test Setup Photo	Radiated Emission	radiated2.jpg
14	Internal Photo	Internal Photo	iphoto1.jpg
15	Internal Photo	Internal Photo	iphoto2.jpg
16	External Photo	External Photo	ophoto1.jpg
17	External Photo	External Photo	ophoto2.jpg

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The 4002 is a 2-Channel Family Radio Service (FRS) transceiver (Ch8:467.5625MHz and Ch12:467.6625MHz). The unit is powered from 6.0V, (4 x “AAA” batteries).

Transmitter portion:

- i) Type of emission: F3E
- ii) Frequency Range: 462.5625 MHz and 467.6625 MHz

An audible ringer tone (more than 300 Hz) will be transmitted less than 5 second for the paging function in the group.

The brief circuit description is saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a FRS Transceiver. The receiver section of the FRS Transceiver is subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was mounted to a cardboard box, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by three fully charged 1.5V “AAA” batteries (6.0Vdc).

The frequency range from 30 MHz to 10th harmonics was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

2.3 Special Accessories

A special headset is provided by client for compliance of this device.

2.4 Equipment Modification

Any modification installed previous to testing by In-Tech Electronics Ltd. will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

Confirmed by:

Wilbur Ng
Assistant Manager
Intertek Testing Services
Agent for In-Tech Electronics Ltd.



Signature

March 27, 1999 Date

INTERTEK TESTING SERVICES

EXHIBIT 3

RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 RF Power Output (Section 2.985(a))

A. Equipment Used

Equipment	Brand Name	Model No.
Biconical Antenna	CDI	B300
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF
Tuned Dipole Antenna	CDI	Robert Antenna 4
Signal Generator	Maconi	2024

B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turntable, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

INTERTEK TESTING SERVICES

Table 1

**In-Tech Electronics Ltd.
Columbia 4002**

Transmission Power

Channel	Frequency (MHz)	Effectived Radiated Power (W)	Limit (W)	Margin (W)
8	467.5625	0.14	0.5	-0.360
12	467.6625	0.14	0.5	-0.360

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

INTERTEK TESTING SERVICES

EXHIBIT 4

MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 Modulation Characteristics

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are saving with filename: mfr.pdf and mlc.pdf respectively for electronic filing.

INTERTEK TESTING SERVICES


4.1 Modulation Frequency Response

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi Instrument	2945

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

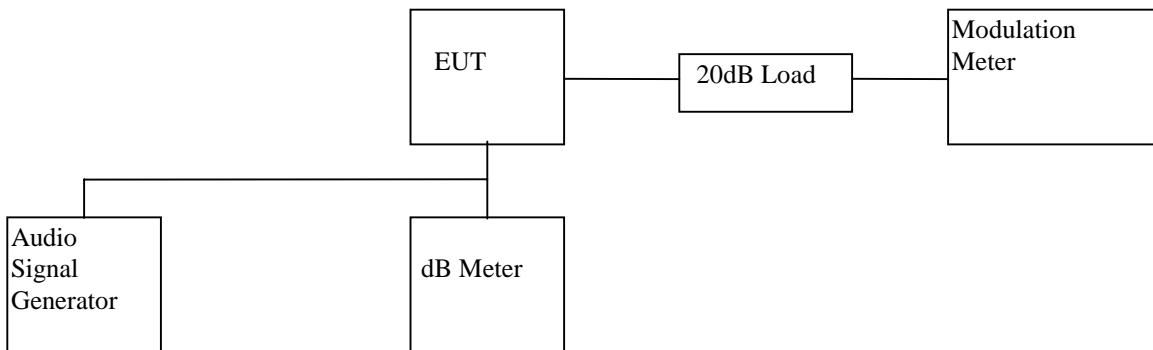

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 300Hz to 4kHz.
- 4) Record the frequency deviation.

INTERTEK TESTING SERVICES

C. Test Result

Table 2

**In-Tech Electronics Ltd.
Columbia 4002**

Modulation Frequency Response

Test Channel : 8

Input level = 97.0dB SPL

Modulation Frequency (Hz)	Frequency deviation (kHz)	Modulation Index (%)
100	0.08	0.80
200	0.15	0.75
300	0.15	0.50
400	0.25	0.63
500	0.31	0.62
600	0.35	0.58
700	0.35	0.50
800	0.30	0.38
900	0.26	0.29
1000	0.29	0.29
1250	0.14	0.11
1500	0.13	0.09
1730	0.15	0.09
2000	0.16	0.08
2250	0.19	0.08
2500	0.21	0.08
2750	0.19	0.07
3000	0.15	0.05
3125	0.13	0.04
3250	0.11	0.03
3500	0.11	0.03
4000	0.10	0.03
5000	0.08	0.02

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

FCC ID: NV64002

INTERTEK TESTING SERVICES


4.2 Modulation Limiting Characteristics (Section 2.987(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi	2950

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

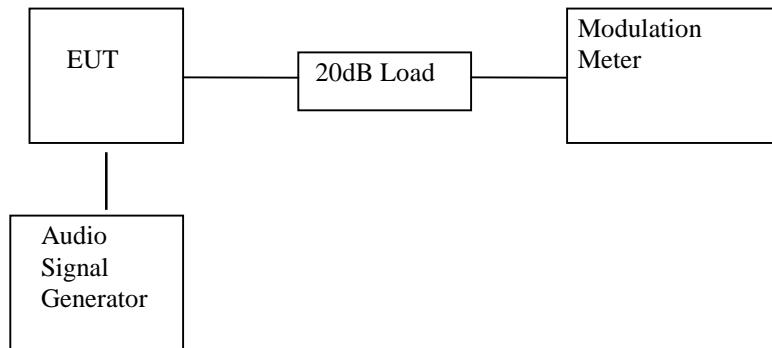

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dB SPL to 137dB SPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

INTERTEK TESTING SERVICES

C. Test Result

Table 3

**In-Tech Electronics Ltd.
Columbia 4002**

Modulation Limiting Characteristics

Test Channel : 8

Modulation Input (dB SPL)	Peak Frequency deviation (kHz) at 500Hz	Peak Frequency deviation (kHz) at 1000Hz	Peak Frequency deviation (kHz) at 2500Hz	Peak Frequency deviation (kHz) at 3125Hz
47	0.09	0.09	0.09	0.09
57	0.09	0.09	0.09	0.09
67	0.09	0.09	0.09	0.09
77	0.09	0.09	0.09	0.09
87	0.13	0.12	0.09	0.09
97	0.31	0.27	0.21	0.09
107	0.85	0.69	0.53	0.19
117	1.58	1.87	1.56	0.45
127	1.96	2.26	2.42	1.40
137	1.98	2.28	2.43	1.42

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

INTERTEK TESTING SERVICES

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(c))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Spectrum Analyzer	Hewlett Packard	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

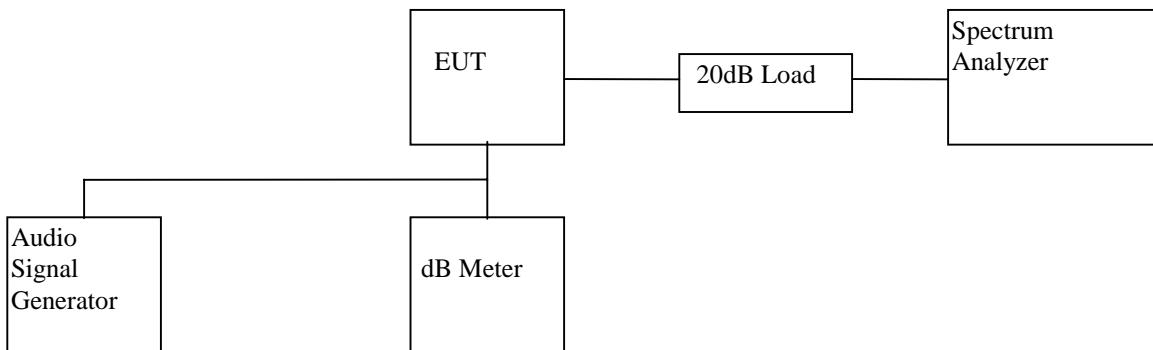

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

C. Test Result

For electronic filing, the occupied bandwidth which is saved with filename: bw.pdf is measured to be 10.75 kHz.

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

INTERTEK TESTING SERVICES

EXHIBIT 6

SPURIOUS EMISSION

INTERTEK TESTING SERVICES

6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation (Section 95.635)

A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	CDI	B100,B200,B300, Horn
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

INTERTEK TESTING SERVICES

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the front view and back view of test configuration are saved with filename: radiated1.jpg and radiated2.jpg respectively.

INTERTEK TESTING SERVICES

D. Test Result

**In-Tech Electronics Ltd.
Columbia 4002**

Table 4(a)

1. For electronic filing, unwanted emission from CARRIER $\pm 6.25\text{kHz}$ to Carrier $\pm 31.25\text{kHz}$ is saved with filename: emission.pdf

Region	Unwanted emission
	Channel 8
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB

INTERTEK TESTING SERVICES

Table 4(b): Channel 12

Orientation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Calculated Net at 3m (dB μ V/m)	Calculated Limit at 3m (dB μ V/m)	Margin (dB)
V	935.372	94.8	16	33.0	77.8	82.2	-4.4
V	1403.058	60.7	34	25.5	69.2	82.2	-13.0
V	1870.744	61.7	34	26.5	69.2	82.2	-13.0
V	2338.430	68.3	34	29.1	73.2	82.2	-9.0
V	2806.116	68.4	34	29.1	73.3	82.2	-8.9
V	3273.802	72.5	34	31.4	75.1	82.2	-7.1
V	3741.488	70.3	34	32.8	71.5	82.2	-10.7
V	4209.174	59.2	34	34.0	59.2	82.2	-23.0
V	4676.860	62.1	34	34.0	62.1	82.2	-20.1

Remark:

1. Quasi-peak data for emission below 1000MHz.
2. ‘-‘ sign in margin column shows the value below the limits.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43 \text{dBW} \\
 &= 82.2 \text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

INTERTEK TESTING SERVICES

EXHIBIT 7

FREQUENCY STABILITY

INTERTEK TESTING SERVICES

7.0 Frequency Stability

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES


7.1 Frequency Tolerance (Section 95.625)

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Philips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

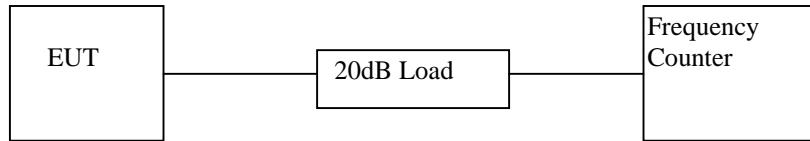

- 2) Measure all transmit channel frequencies in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 5

**In-Tech Electronics Ltd.
Columbia 4002
Frequency Tolerance**

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
8	467.5625	467.5626	-0.00002
12	467.6625	467.6625	0.00000

INTERTEK TESTING SERVICES


7.2 Frequency Stability - Temperature (Section 2.995)

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

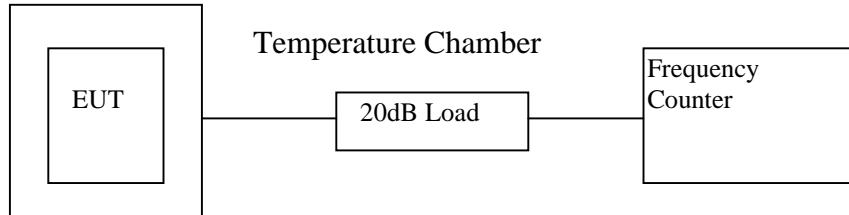

- 2) Set the Temperature Chamber to -20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 8 and 12 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

INTERTEK TESTING SERVICES

C. Test Result

Table 6

**In-Tech Electronics Ltd.
Columbia 4002**

Frequency Deviation with Temperature Variation

Channel : 8

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	467.5625	467.5628	-0.00006
-10	467.5625	467.5627	-0.00004
0	467.5625	467.5631	-0.00013
10	467.5625	467.5633	-0.00017
20	467.5625	467.5630	-0.00011
30	467.5625	467.5626	-0.00002
40	467.5625	467.5623	0.00004
50	467.5625	467.5626	-0.00002

Channel : 12

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	467.6625	467.6631	-0.00013
-10	467.6625	467.6624	0.00002
0	467.6625	467.6632	-0.00015
10	467.6625	467.6634	-0.00019
20	467.6625	467.6630	-0.00011
30	467.6625	467.6625	0.00000
40	467.6625	467.6623	0.00004
50	467.6625	467.6623	0.00004

Test Engineer: Billy C. M. Chow

Date of Test: March 2, 1999

INTERTEK TESTING SERVICES


7.3 Frequency Stability - Voltage (Section 2.995)

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

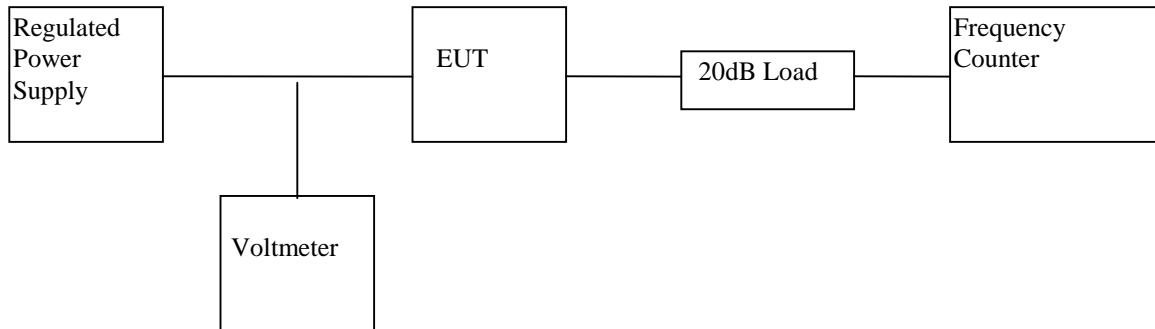

- 2) Vary the level of regulated power supply to **the manufacturer specified battery end point** of the EUT.
- 3) Measure the channel frequency of channel 8 & 12 in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 7

**In-Tech Electronics Ltd.
Columbia 4002**

Frequency Deviation with Voltage Variation

The manufacturer specified battery end point 4.0V

Channel : 8

Voltage (V)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
4.0	467.5625	467.5632	0.00015

Channel : 12

Voltage (V)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
4.0	467.6625	467.6634	0.00019

INTERTEK TESTING SERVICES

EXHIBIT 8

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

8.0 Technical Specifications

For electronic filing, the block diagram and schematics of the FRS are saved with filename: circuit.pdf and block.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 9

PRODUCT LABELLING

INTERTEK TESTING SERVICES

9.0 Product Labelling

For electronic filing, the FCC ID label and label location are saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 10

PHOTOGRAPHS

INTERTEK TESTING SERVICES

10.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: ophoto1.jpg, ophoto2.jpg for external photo and iphoto1.jpg and iphoto2.jpg for internal photo.

INTERTEK TESTING SERVICES

EXHIBIT 11
INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

11.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.