




# MANUAL BiT - 100



## Components and Product Specifications



Speaker Adhesive

Charging Cable

Manual

Index	BiT - 100
Size	88 * 35mm
Weight	200g
Battery capacity	3.7V 1000mAh
Battery type	Lithium Polymer equipped
Continuous use time	32h
Standby time when Fully charged	270h
Charging time	2.5h
Mounting method	Clamp type
Certification	KC / FCC / CE

## 1 Bluetooth Pairing

- 1) BiT-100 must be turned off.
- 2) With the power off, press and hold the Function button for about 6 seconds until the red and blue LEDs flash alternately.
- 3) Turn on the Bluetooth function on your smartphone and search for and select the terminal you want to connect.
- 4) When the red and blue lights flash quickly and then slowly, pairing is complete.

## 2 Power On / Off

- 1) Power On : Press and hold for about 3 seconds
- 2) Power Off : Press and hold for about 3 seconds
- 3) Once pairing is complete, it will automatically connect when you turn it on.
- 4) Power saving mode: automatically turns off with voice guidance after 10 min in pairing standby mode.

## 3 Phone Functions

- 1) Auto-answer: When a call comes in, it will be automatically connected after about 10 seconds.
- 2) Call rejection: If you press the function button for about 2 seconds, the call will be rejected.
- 3) Reconnect to the last number dialed: If you double-click the function button, it will be reconnected to the last number dialed.
- 4) Manual answer: If you briefly press the function button, the call will be connected.
- 5) If you briefly press the function button while receiving a call, the call will be disconnected.

## 4 Mobile phone voice control

If you press the voice control button, the voice recognition function in your smartphone it has Led on/off function. You can command the desired action by voice.

## 5 Second smartphone pairing method

Same as the first smartphone pairing method.  
Caution: Turn off the Bluetooth function of the first smartphone before proceeding.

## 6 Charging

- 1) Connect the charging cable to the terminal charging port.
- 2) Charging: Red light turns on.
- 3) Charging complete: Red light turns off.  
(It takes about 2 hours and 30 minutes to charge after complete discharge.)

## 7 Music Mode

- 1) Play/Stop Music: Press the function button briefly once.
- 2) Next song: Press and hold the plus button. (about 2 seconds)
- 3) Previous song: Press and hold the minus button. (about 2 seconds)
- 4) Volume Up: Press and hold the plus button.
- 5) Volume Down: Press and hold the minus button.

## 8 EQ Sound Mode

- 1) Basic: Natural Sound Mode
- 2) Subwoofer Mode (1 click)
- 3) 3D Surround Sound Mode (2 clicks)
- 4) 3D Surround + Subwoofer Mode (3 clicks)

**Chatter Box!**™


[www.unimo.co.kr](http://www.unimo.co.kr)

Address | 6F, 47, Digital-ro, 9-gil, Geumcheon-gu, Seoul, Korea

A/S: 02-6710-7022

Other inquiries: 02-6710-7031

# BiT 100 How to install speaker microphone

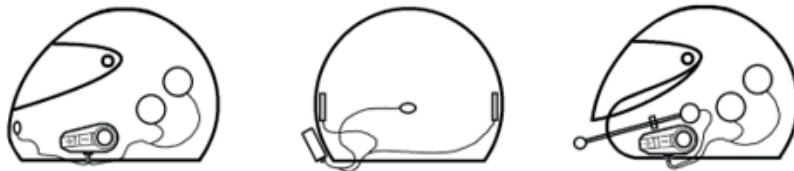

- 1) Open Face Microphone Mounting: Attach the provided soft Velcro stickers to the inside cheek area of the helmet, and attach the boom microphone over the Velcro.
- 2) Speaker Mounting: Attach the Velcro to the left and right concave areas of the inside wall of the helmet.
- 3) Use the long wire for the right speaker, and the short wire for the left speaker.

## BiT-100 How to attach a clamp

### 1 Using Velcro



Photo1



Photo2



Photo3

1. After removing foreign substances from the helmet surface, attach the included Velcro (FEMALE). (See Photo 1.)
2. Attach the included Velcro (MALE) to the back of the clamp. (See Photo 2.)
3. Attach the clamp to the helmet Velcro and use. (The thin wire attached to the clamp goes inside the helmet and is fixed.)

### 2 Using double-sided tape



1. Attach double-sided tape to the back of the clamp.
2. Attach the clamp with double-sided tape to the helmet while inserting the iron core into the helmet.

### \* Caution

1. To avoid explosion, do not put the product in flames.
2. Do not disassemble the product. Be careful not to damage the product's electronic components.
3. Keep away from sharp objects as they may damage the product.
4. Do not use for long periods of time and store in a dry place.
5. Do not place the product near or in heating appliances such as stoves, microwave ovens or gas ranges. There is a risk of explosion.

## Warranty period: 1 year warranty. (Parts due to consumer negligence are not free of charge)

### \* Reasons for Limiting Manufacturer Liability

If you do not return the product after the claim, you waive all legal liability, loss, damages, and expenses (including attorney's fees). Therefore, Chatterbox will not be responsible for any bodily injury, death, loss, damage to transportation, title, or property that may occur to you or a third party during the use of the product. Furthermore, Chatterbox will not be responsible for any damages that are not related to the condition of the product or malfunction of the product. Furthermore, Chatterbox will not be held responsible for any damages that are not related to the condition of the product or malfunction of the product. All risks related to the operation of the product are entirely at the end user's discretion, regardless of the experience of the first user. The use of this product may violate local or national laws. Therefore, please note that the user is solely responsible for using the product correctly and safely.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

\* RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.