



Profile: 2310083R	Page No.: 245
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5500MHz by 802.11ac(20MHz)	

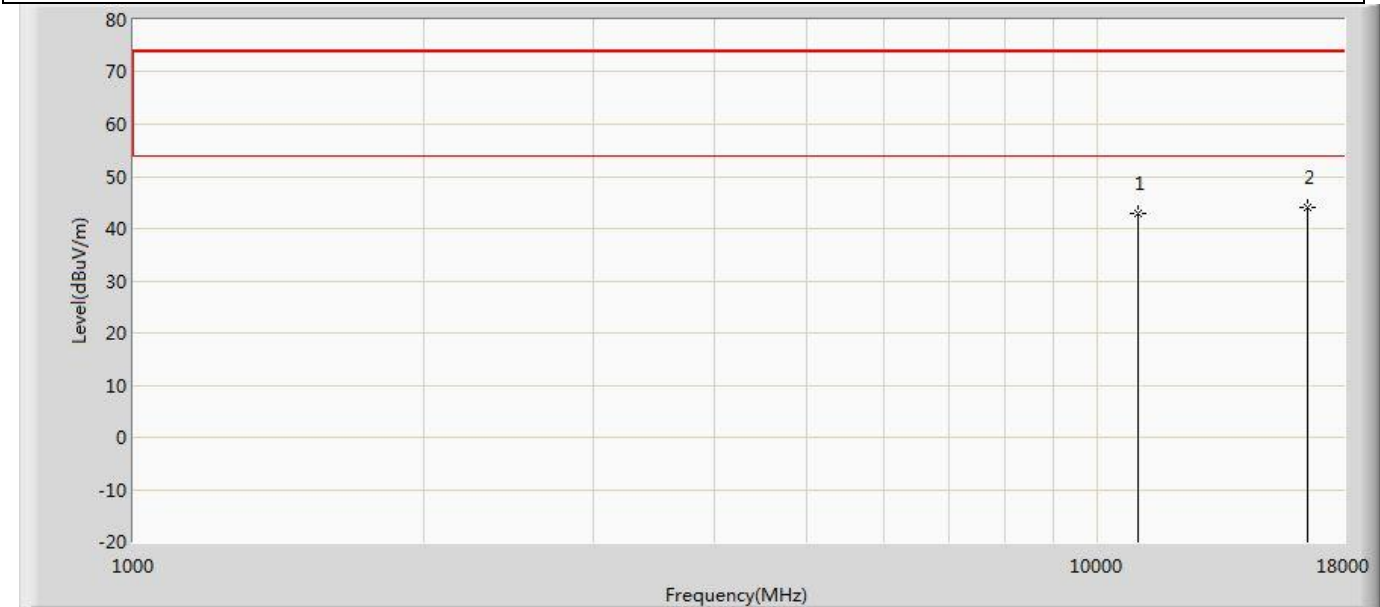


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	42.880	49.368	-31.120	74.000	-6.489	PK
2	*	16500.000	44.096	47.479	-29.904	74.000	-3.383	PK

Profile: 2310083R	Page No.: 246
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5500MHz by 802.11ac(20MHz)	

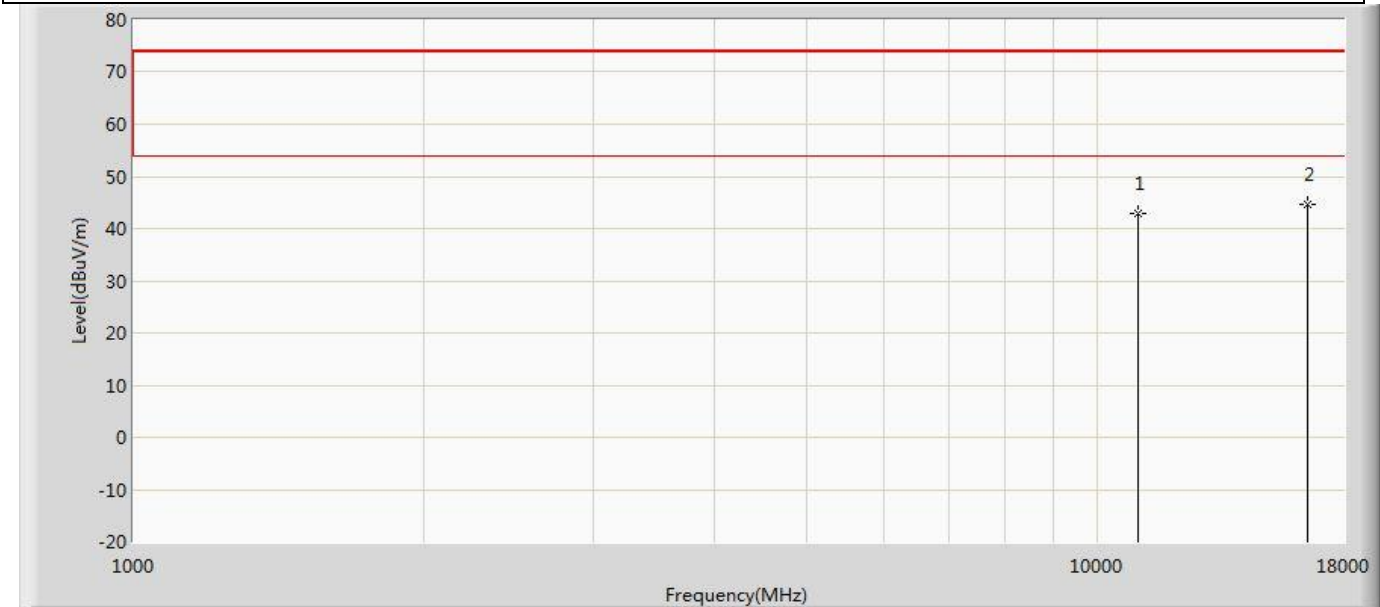


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	42.862	49.350	-31.138	74.000	-6.489	PK
2	*	16500.000	44.605	47.526	-29.395	74.000	-2.922	PK

Profile: 2310083R	Page No.: 247
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5580MHz by 802.11ac(20MHz)	

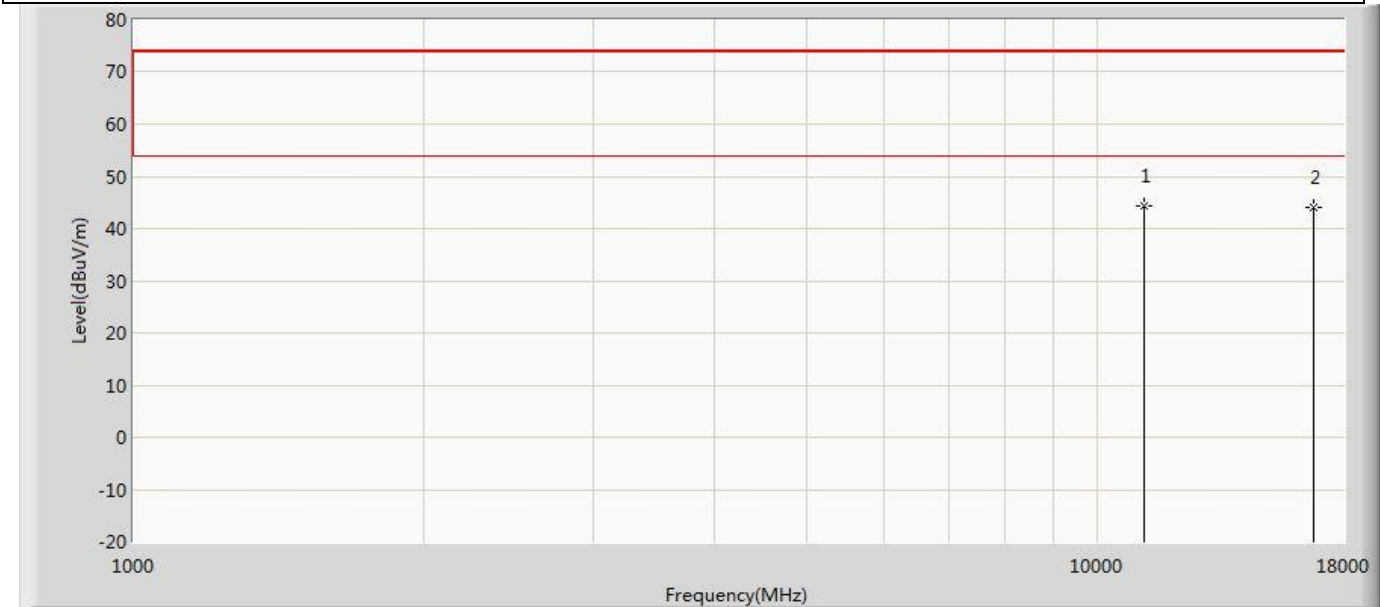

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11160.000	44.251	50.119	-29.749	74.000	-5.867	PK
2		16740.000	44.190	47.668	-29.810	74.000	-3.478	PK


Profile: 2310083R	Page No.: 248
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5580MHz by 802.11ac(20MHz)	

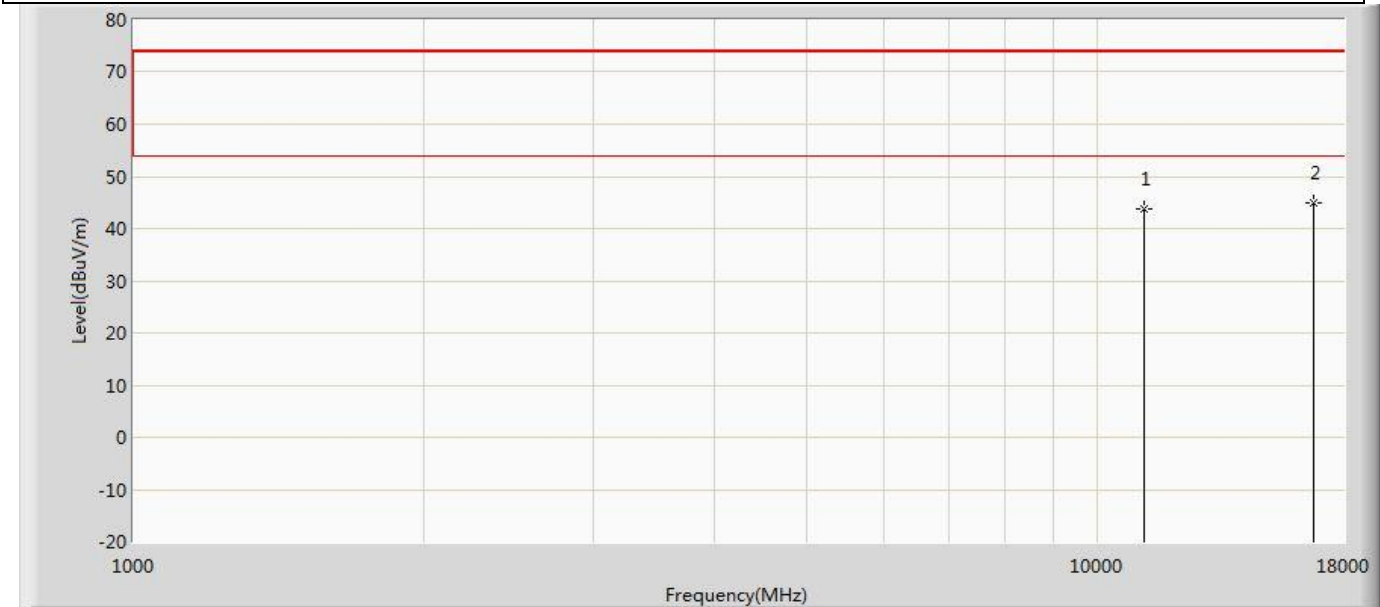

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	43.676	49.544	-30.324	74.000	-5.867	PK
2	*	16740.000	45.004	48.188	-28.996	74.000	-3.184	PK




Profile: 2310083R	Page No.: 249
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5700MHz by 802.11ac(20MHz)	

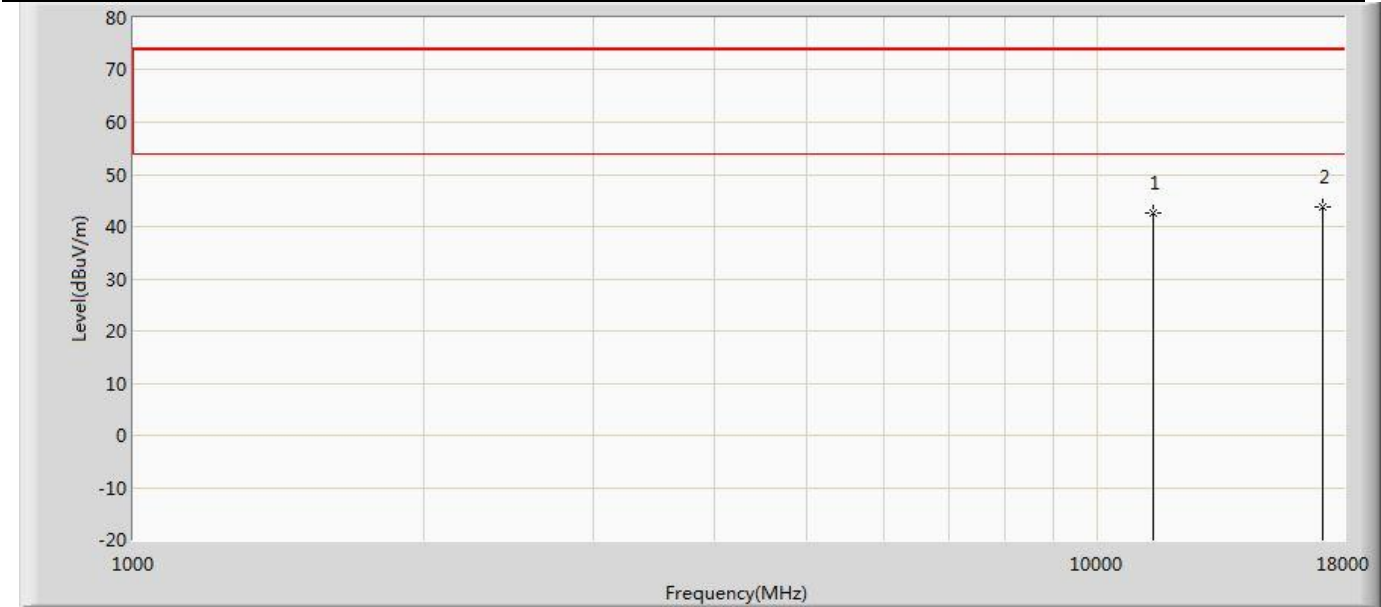


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.483	48.194	-31.517	74.000	-5.711	PK
2	*	17100.000	43.646	46.641	-30.354	74.000	-2.995	PK

Profile: 2310083R	Page No.: 250
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5700MHz by 802.11ac(20MHz)	

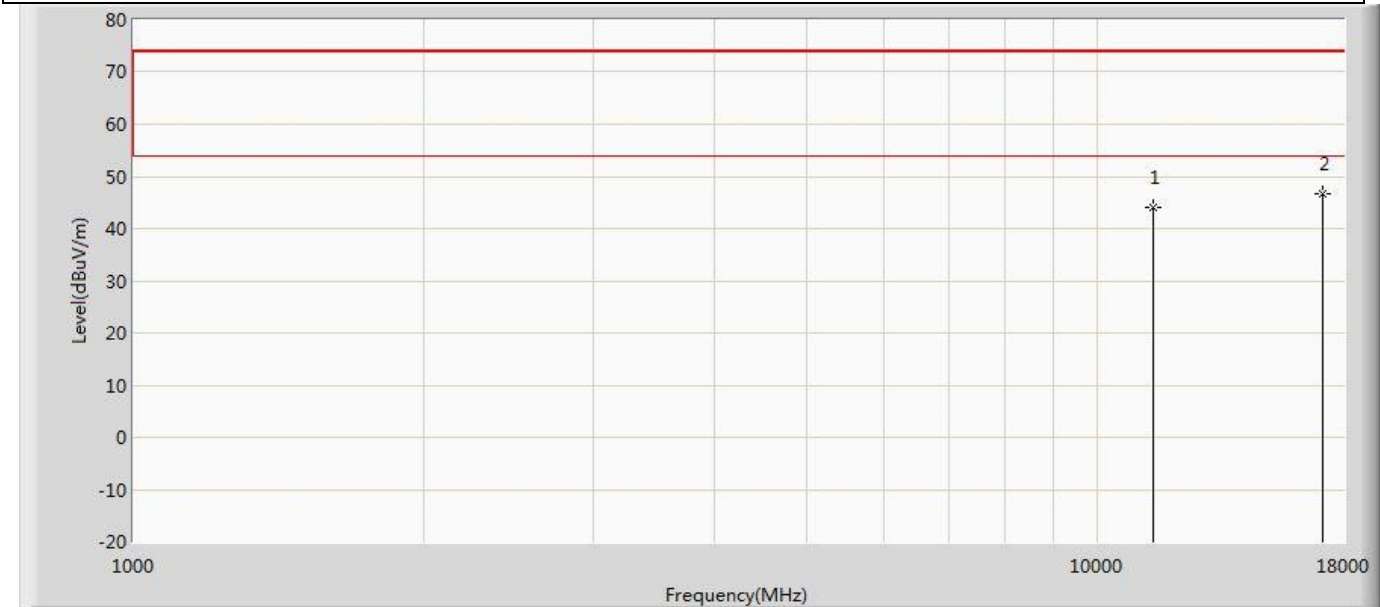


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	44.103	49.814	-29.897	74.000	-5.711	PK
2	*	17100.000	46.801	48.749	-27.199	74.000	-1.948	PK

Profile: 2310083R	Page No.: 251
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5745MHz by 802.11ac(20MHz)	

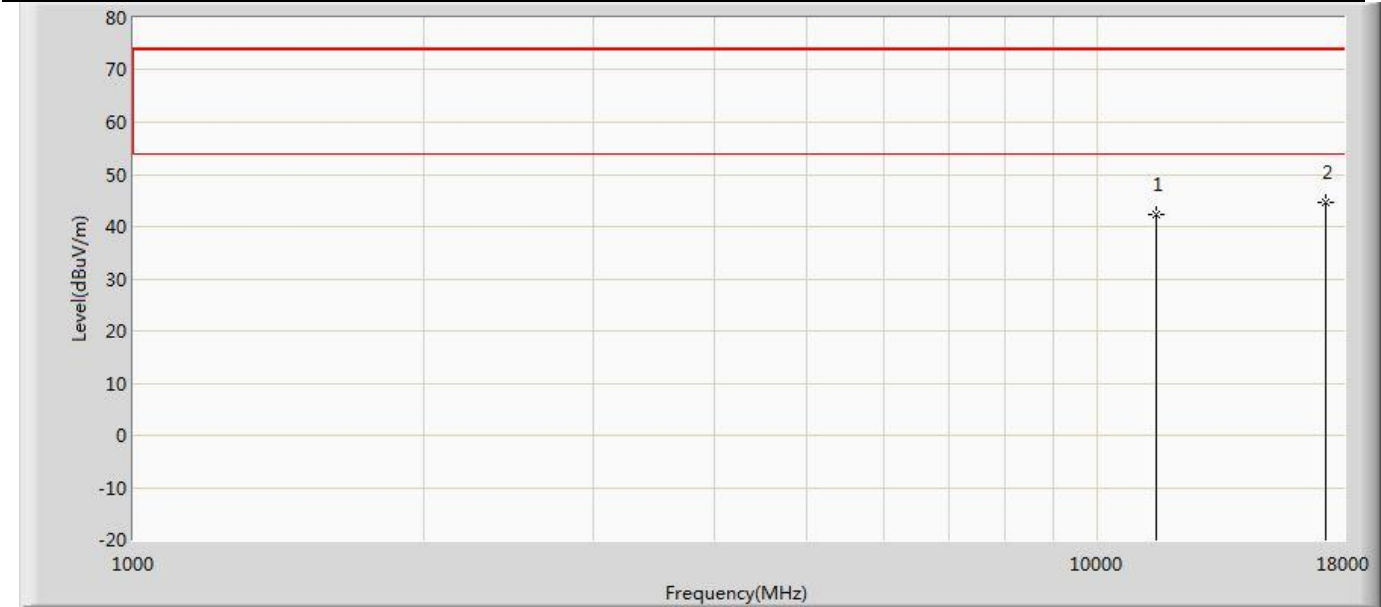


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	42.313	48.202	-31.687	74.000	-5.890	PK
2	*	17235.000	44.607	48.009	-29.393	74.000	-3.403	PK

Profile: 2310083R	Page No.: 252
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5745MHz by 802.11ac(20MHz)	

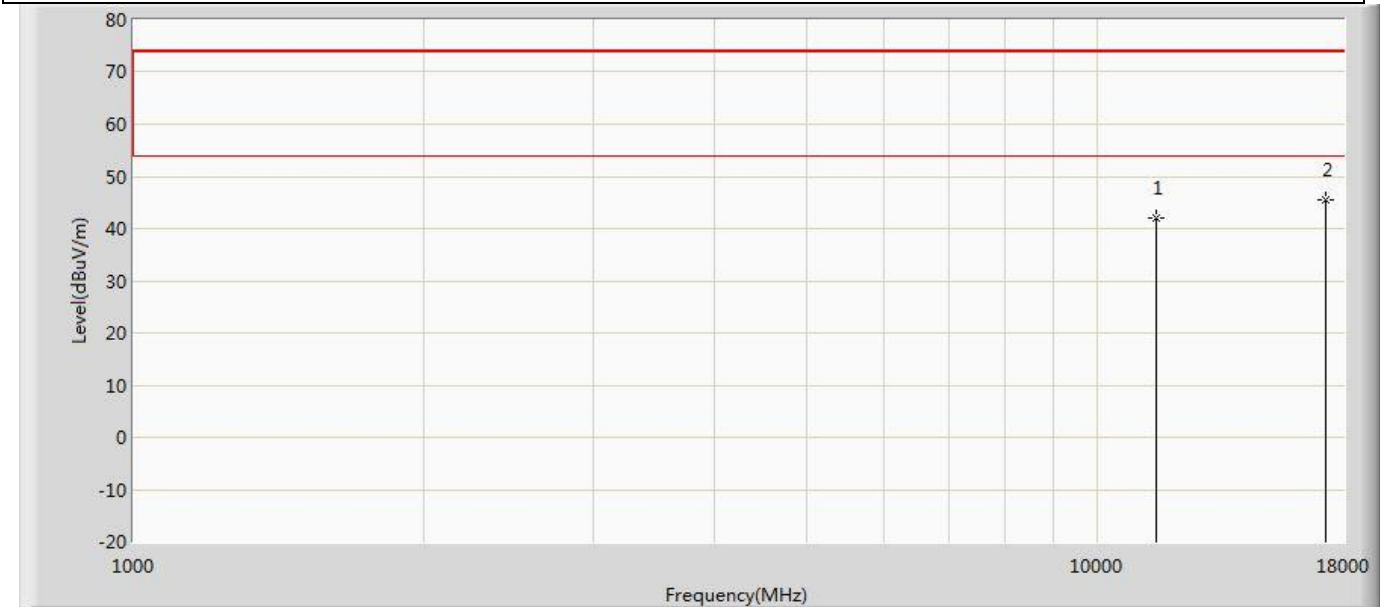


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	41.944	47.833	-32.056	74.000	-5.890	PK
2	*	17235.000	45.569	48.321	-28.431	74.000	-2.753	PK

Profile: 2310083R	Page No.: 253
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5785MHz by 802.11ac(20MHz)	

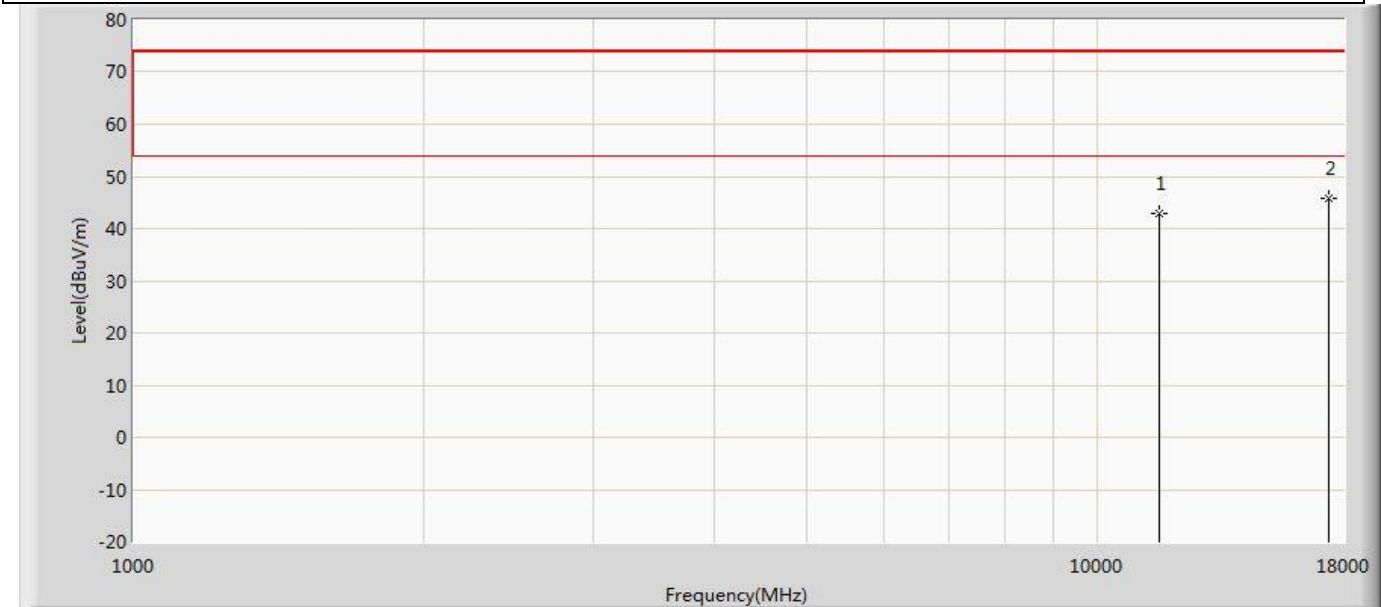


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	42.886	48.005	-31.114	74.000	-5.119	PK
2	*	17355.000	45.926	48.832	-28.074	74.000	-2.906	PK

Profile: 2310083R	Page No.: 254
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5785MHz by 802.11ac(20MHz)	

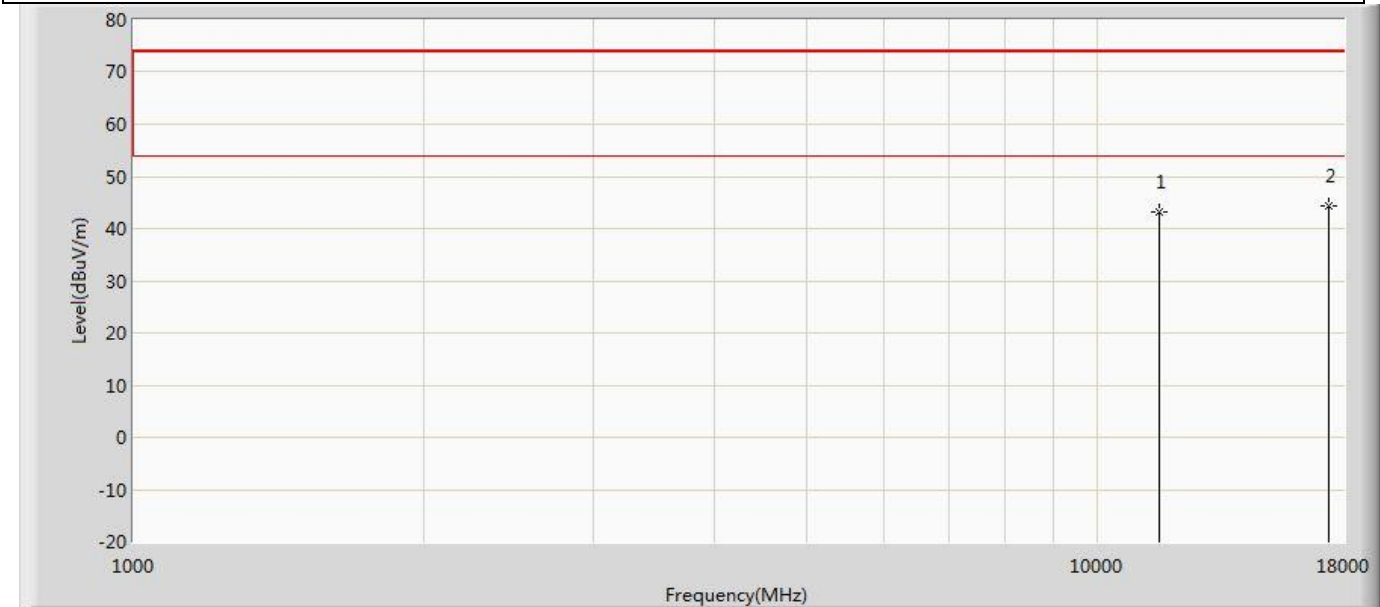


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	43.158	48.277	-30.842	74.000	-5.119	PK
2	*	17355.000	44.264	46.873	-29.736	74.000	-2.609	PK

Profile: 2310083R	Page No.: 255
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5825MHz by 802.11ac(20MHz)	

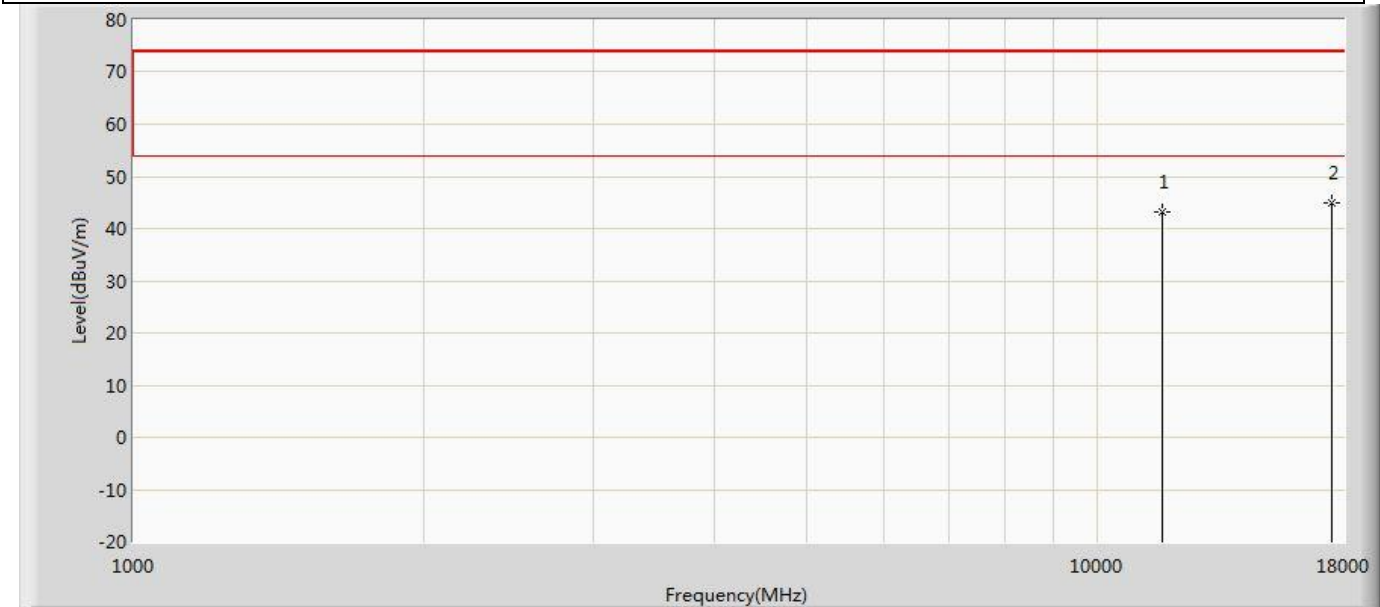


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	43.218	48.456	-30.782	74.000	-5.238	PK
2	*	17475.000	44.916	48.054	-29.084	74.000	-3.139	PK

Profile: 2310083R	Page No.: 256
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 5825MHz by 802.11ac(20MHz)	

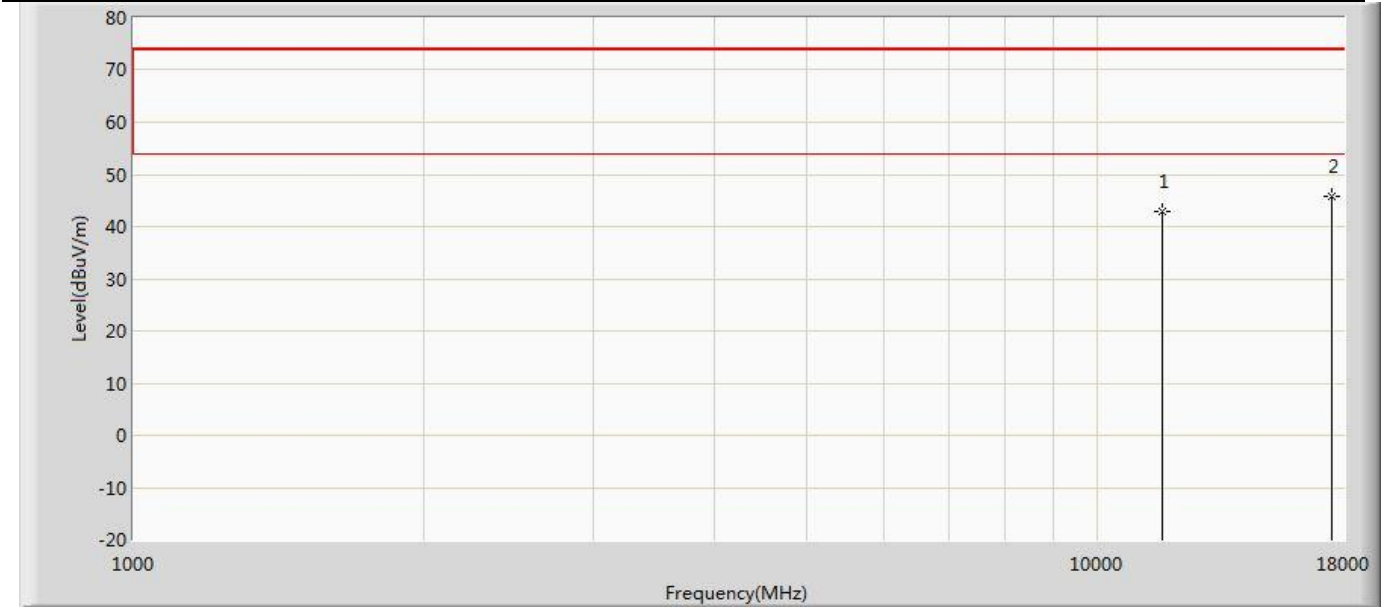


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	42.954	48.192	-31.046	74.000	-5.238	PK
2	*	17475.000	45.932	49.070	-28.068	74.000	-3.139	PK

Profile: 2310083R	Page No.: 257
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5190MHz by 802.11ac(40MHz)	

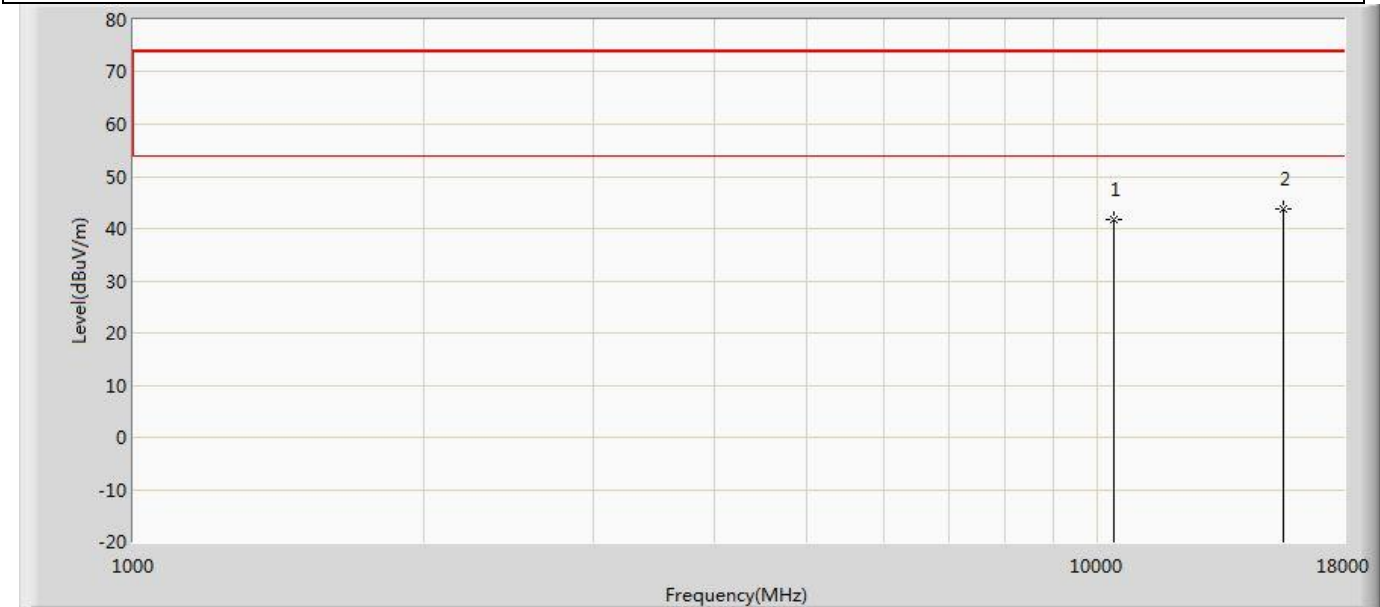


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	41.657	49.130	-32.343	74.000	-7.473	PK
2	*	15570.000	43.884	48.473	-30.116	74.000	-4.588	PK

Profile: 2310083R	Page No.: 258
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5190MHz by 802.11ac(40MHz)	

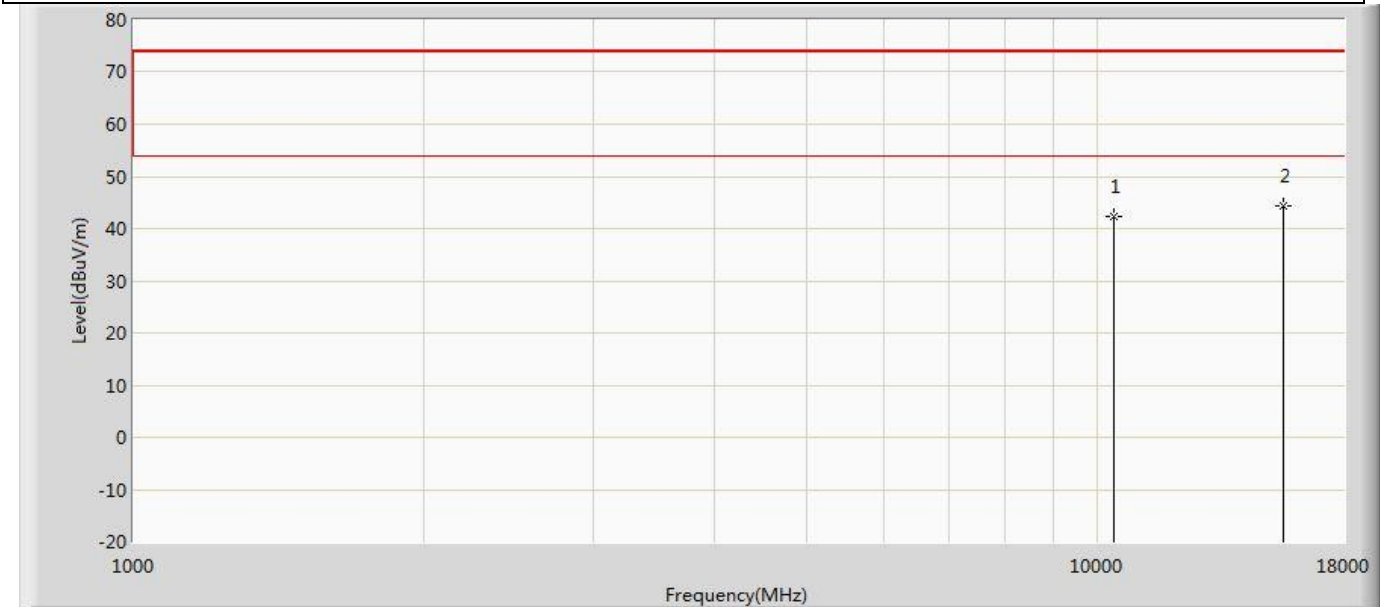


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	42.381	49.854	-31.619	74.000	-7.473	PK
2	*	15570.000	44.489	49.078	-29.511	74.000	-4.588	PK

Profile: 2310083R	Page No.: 259
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5230MHz by 802.11ac(40MHz)	

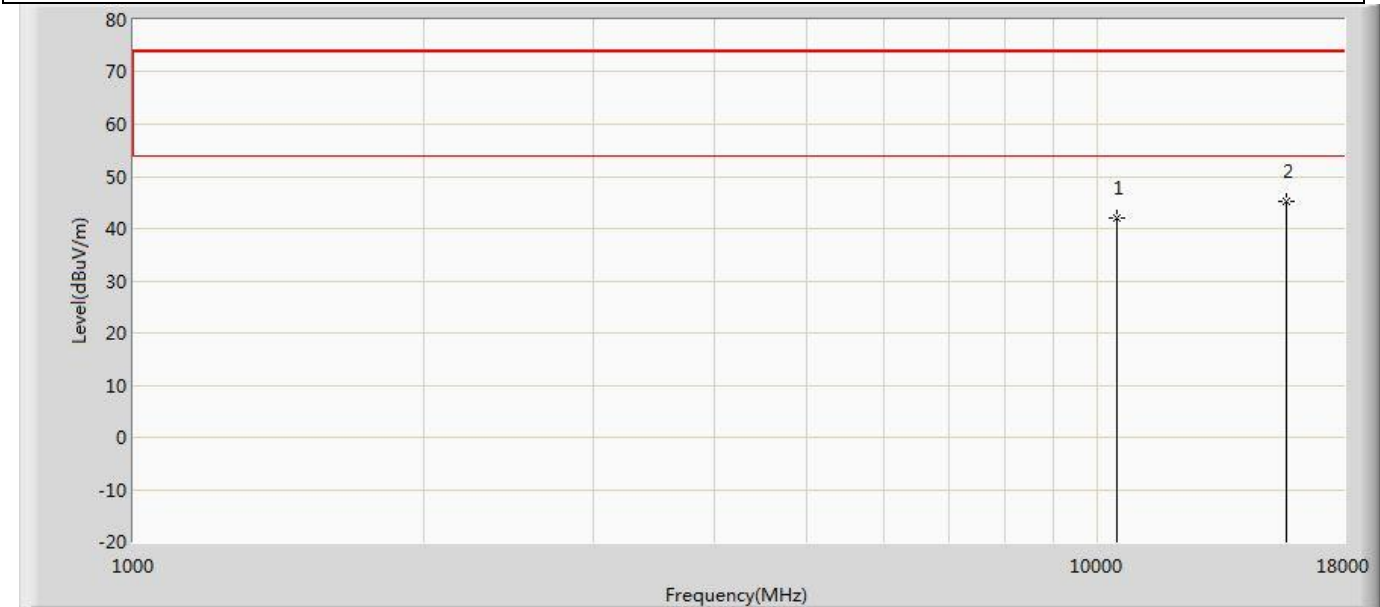


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	42.122	49.209	-31.878	74.000	-7.088	PK
2	*	15690.000	45.112	49.498	-28.888	74.000	-4.387	PK

Profile: 2310083R	Page No.: 260
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5230MHz by 802.11ac(40MHz)	

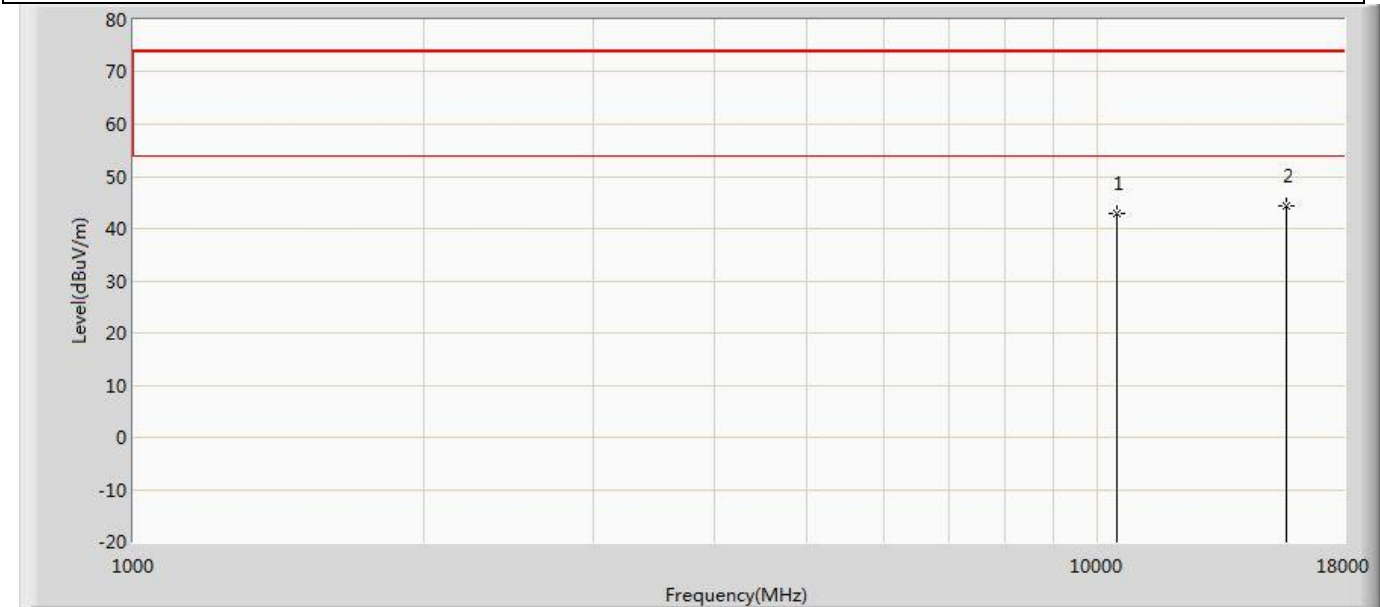


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	42.915	50.002	-31.085	74.000	-7.088	PK
2	*	15690.000	44.302	48.688	-29.698	74.000	-4.387	PK

Profile: 2310083R	Page No.: 261
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5270MHz by 802.11ac(40MHz)	

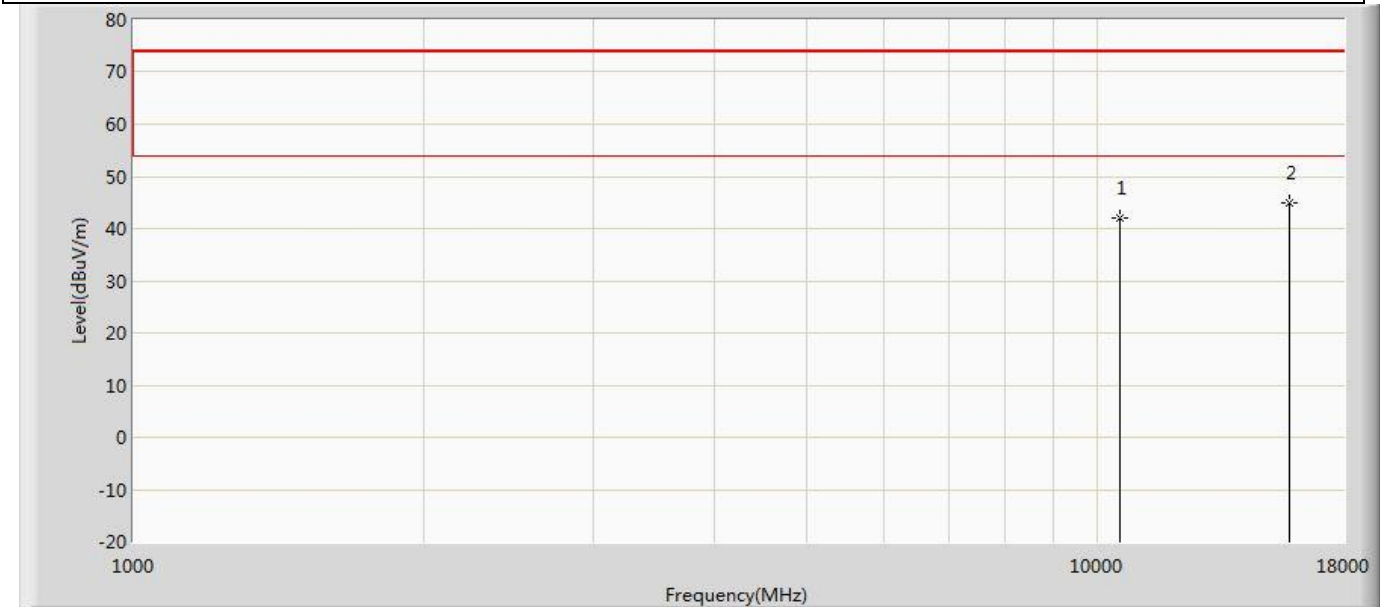


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	42.046	49.244	-31.954	74.000	-7.198	PK
2	*	15810.000	44.787	47.966	-29.213	74.000	-3.179	PK

Profile: 2310083R	Page No.: 262
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5270MHz by 802.11ac(40MHz)	

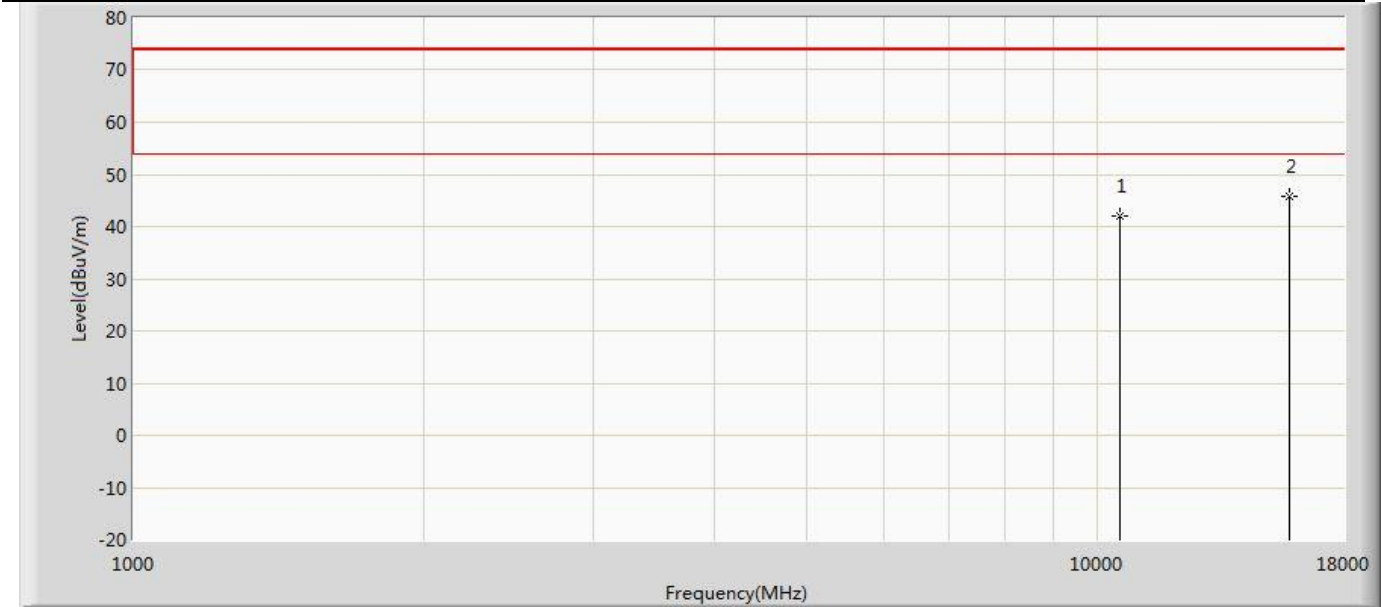


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	42.089	49.287	-31.911	74.000	-7.198	PK
2	*	15810.000	45.743	48.922	-28.257	74.000	-3.179	PK

Profile: 2310083R	Page No.: 263
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5310MHz by 802.11ac(40MHz)	

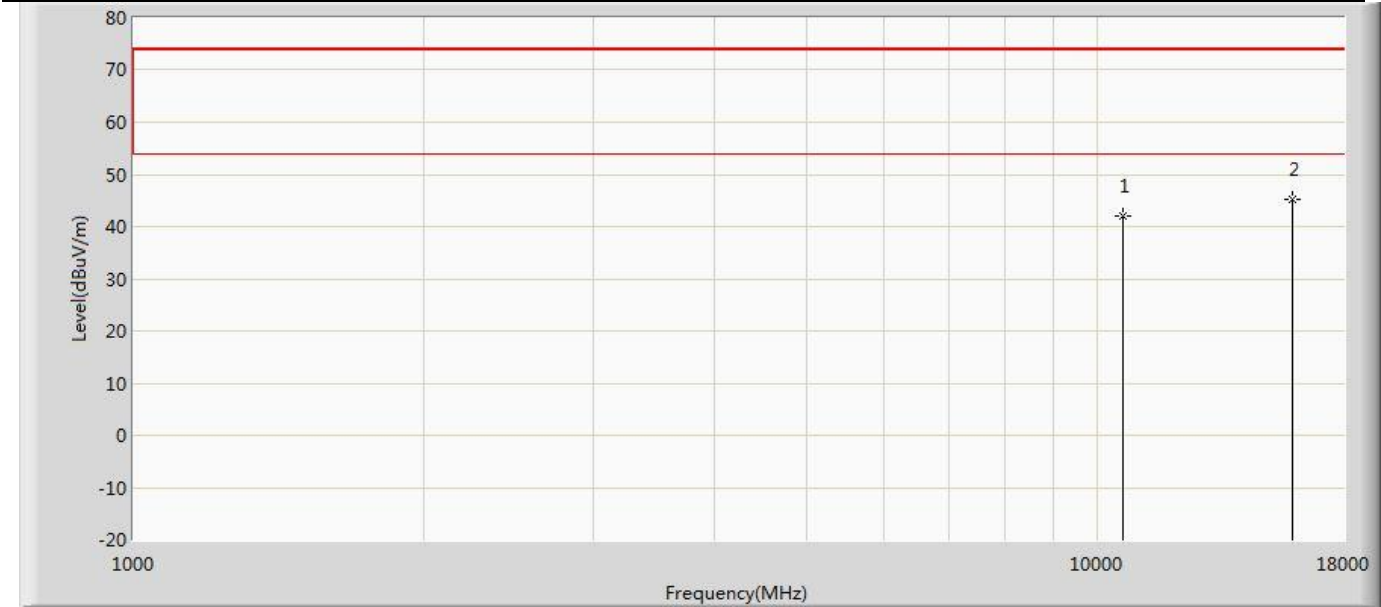


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	42.161	49.126	-31.839	74.000	-6.965	PK
2	*	15930.000	45.321	48.140	-28.679	74.000	-2.819	PK

Profile: 2310083R	Page No.: 264
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5310MHz by 802.11ac(40MHz)	

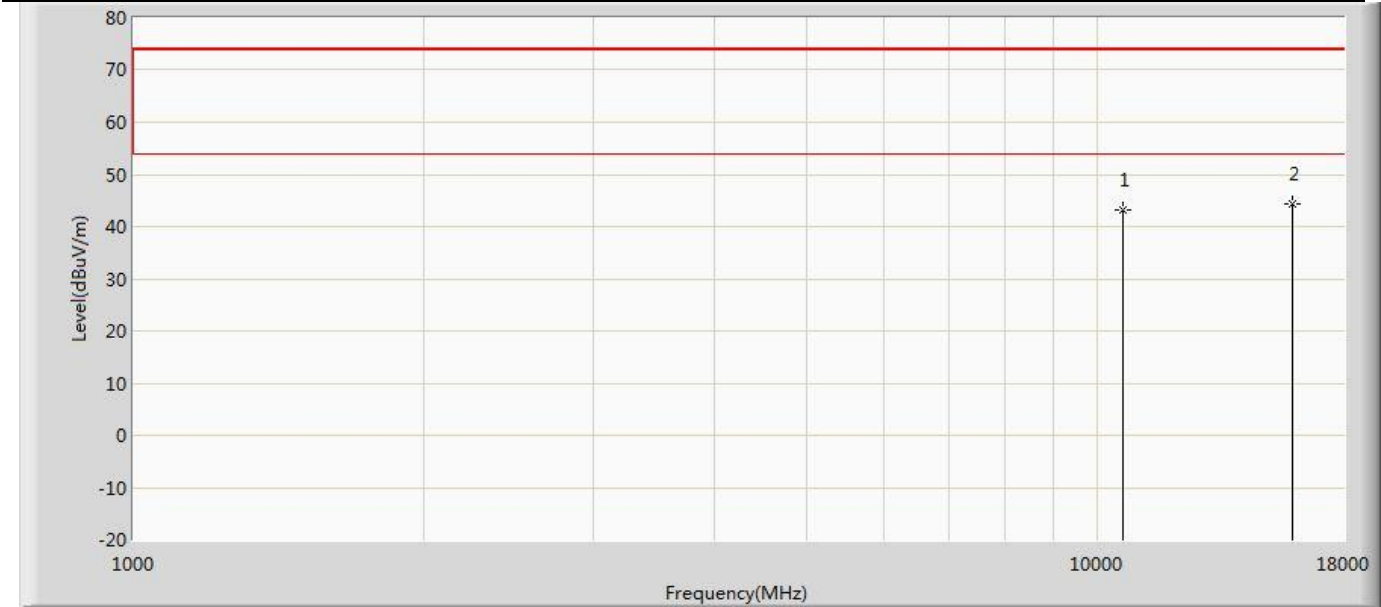

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	43.125	50.090	-30.875	74.000	-6.965	PK
2	*	15930.000	44.292	47.111	-29.708	74.000	-2.819	PK


Profile: 2310083R	Page No.: 265
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5510MHz by 802.11ac(40MHz)	

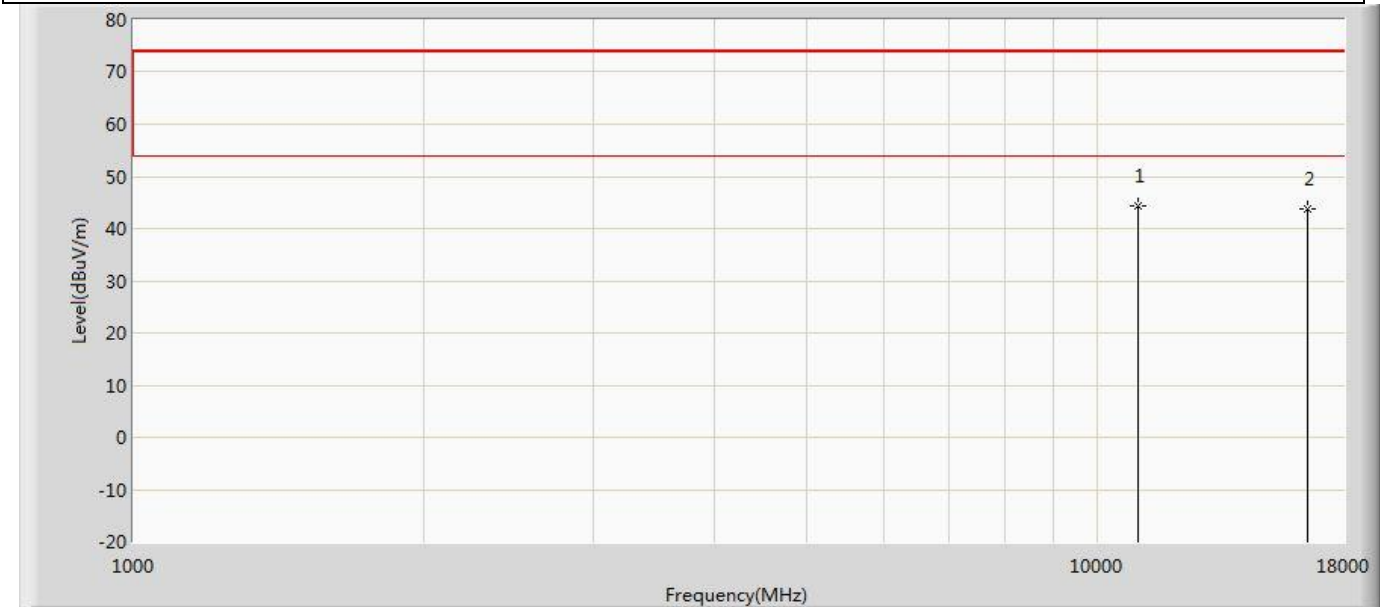

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11020.000	44.304	50.484	-29.696	74.000	-6.180	PK
2		16530.000	43.861	47.392	-30.139	74.000	-3.532	PK




Profile: 2310083R	Page No.: 266
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5510MHz by 802.11ac(40MHz)	

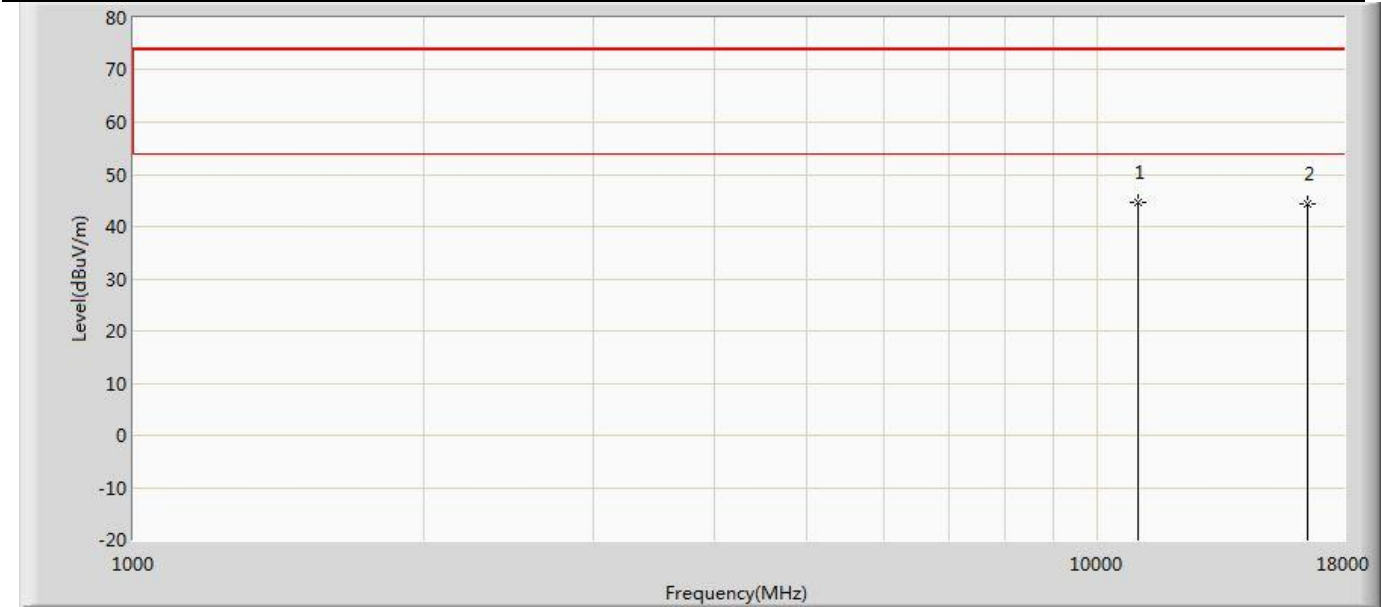

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11020.000	44.674	50.854	-29.326	74.000	-6.180	PK
2		16530.000	44.264	47.422	-29.736	74.000	-3.158	PK


Profile: 2310083R	Page No.: 267
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5590MHz by 802.11ac(40MHz)	

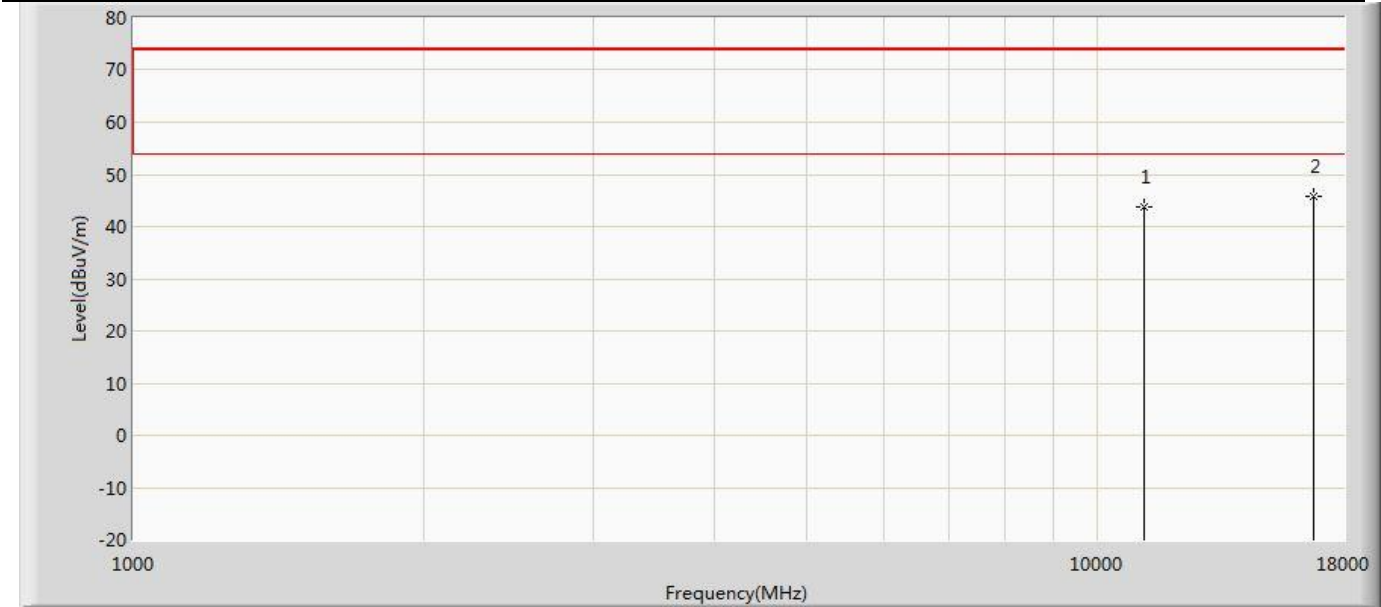

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	43.792	49.477	-30.208	74.000	-5.685	PK
2	*	16770.000	45.857	48.584	-28.143	74.000	-2.727	PK




Profile: 2310083R	Page No.: 268
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5590MHz by 802.11ac(40MHz)	

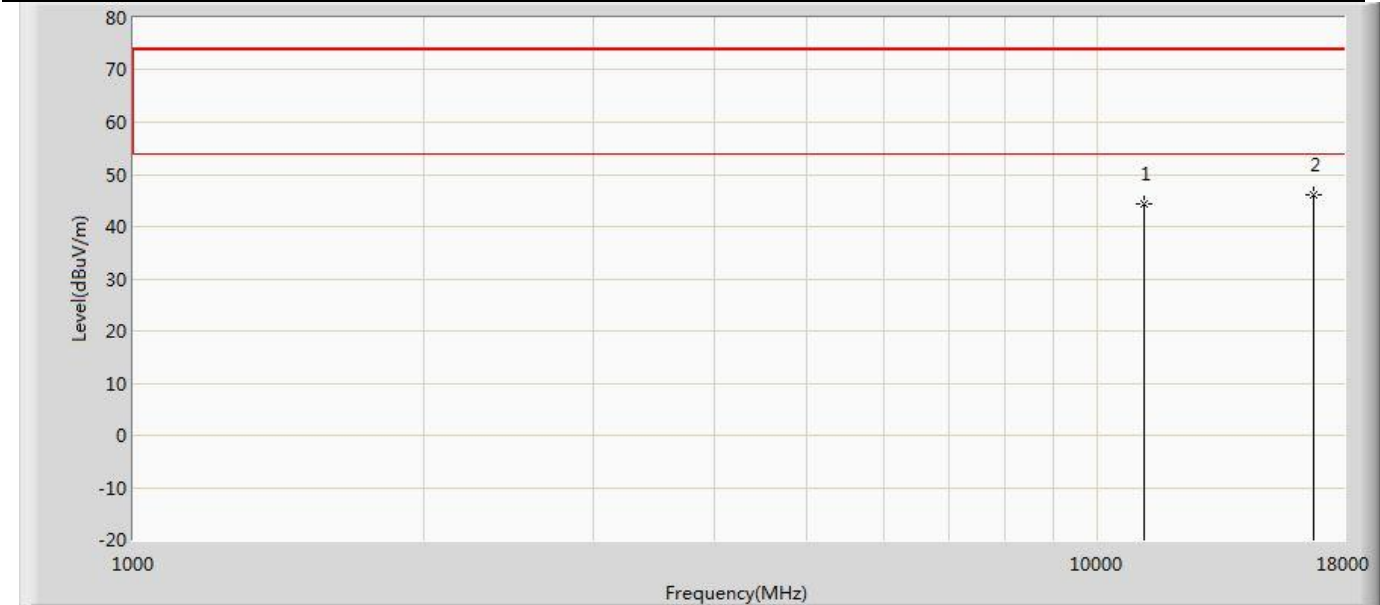


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.213	49.898	-29.787	74.000	-5.685	PK
2	*	16770.000	46.194	48.539	-27.806	74.000	-2.345	PK

Profile: 2310083R	Page No.: 269
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5670MHz by 802.11ac(40MHz)	

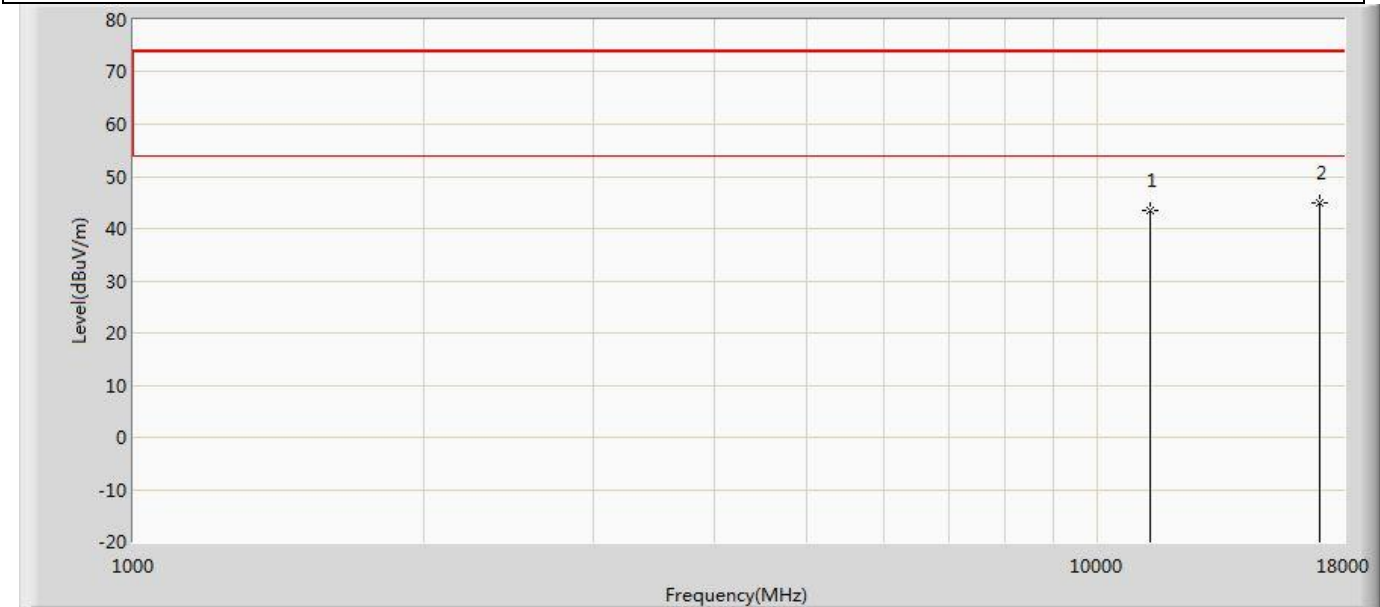


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	43.470	49.427	-30.530	74.000	-5.957	PK
2	*	17010.000	44.864	48.666	-29.136	74.000	-3.802	PK

Profile: 2310083R	Page No.: 270
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5670MHz by 802.11ac(40MHz)	

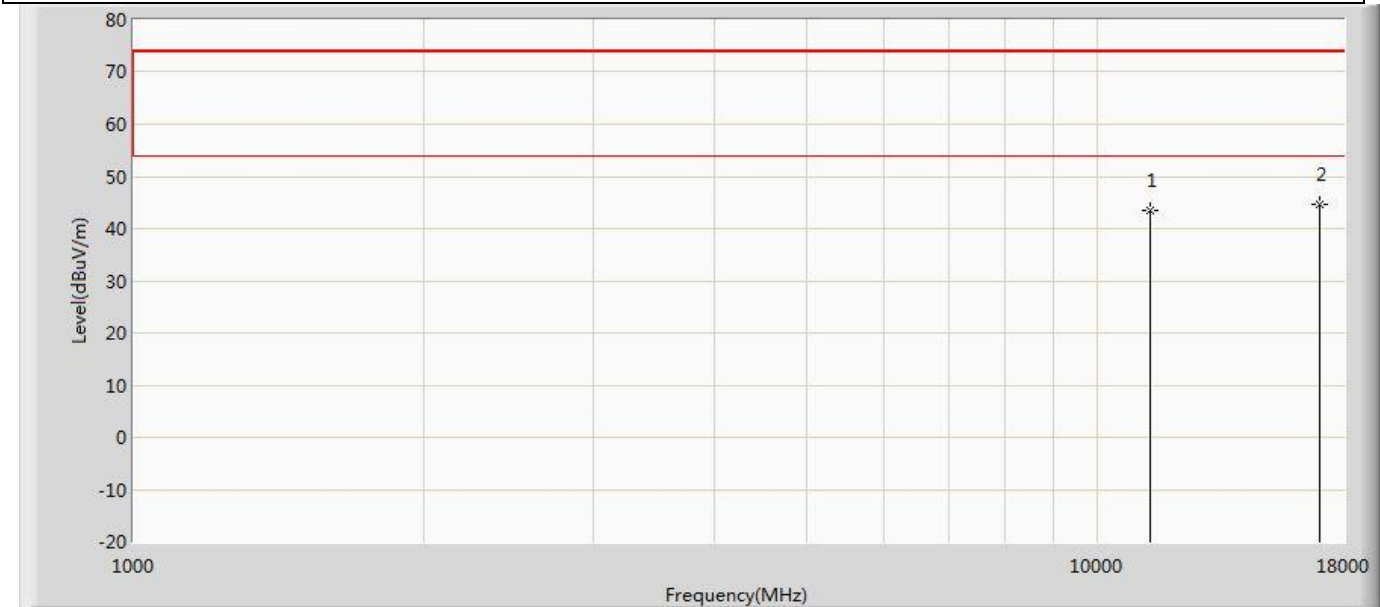


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	43.365	49.322	-30.635	74.000	-5.957	PK
2	*	17010.000	44.717	47.731	-29.283	74.000	-3.014	PK

Profile: 2310083R	Page No.: 271
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5755MHz by 802.11ac(40MHz)	

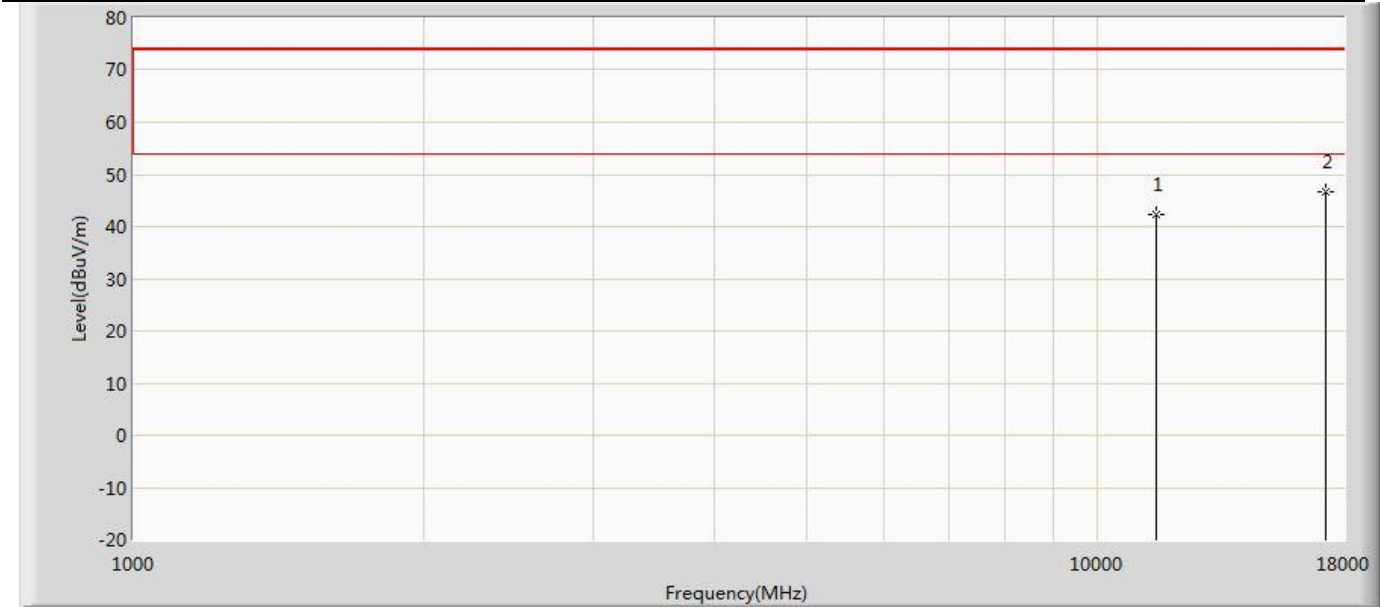


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	42.291	48.158	-31.709	74.000	-5.868	PK
2	*	17265.000	46.648	49.746	-27.352	74.000	-3.097	PK

Profile: 2310083R	Page No.: 272
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5755MHz by 802.11ac(40MHz)	

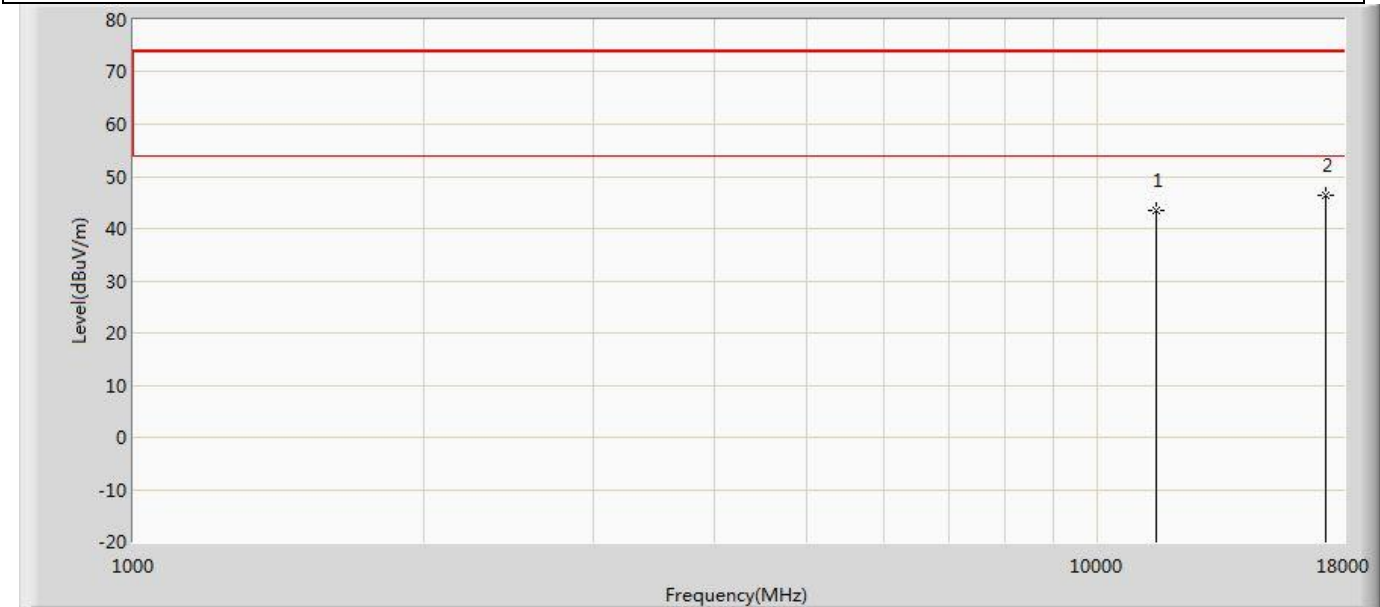


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	43.542	49.409	-30.458	74.000	-5.868	PK
2	*	17265.000	46.370	48.906	-27.630	74.000	-2.535	PK

Profile: 2310083R	Page No.: 273
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5795MHz by 802.11ac(40MHz)	

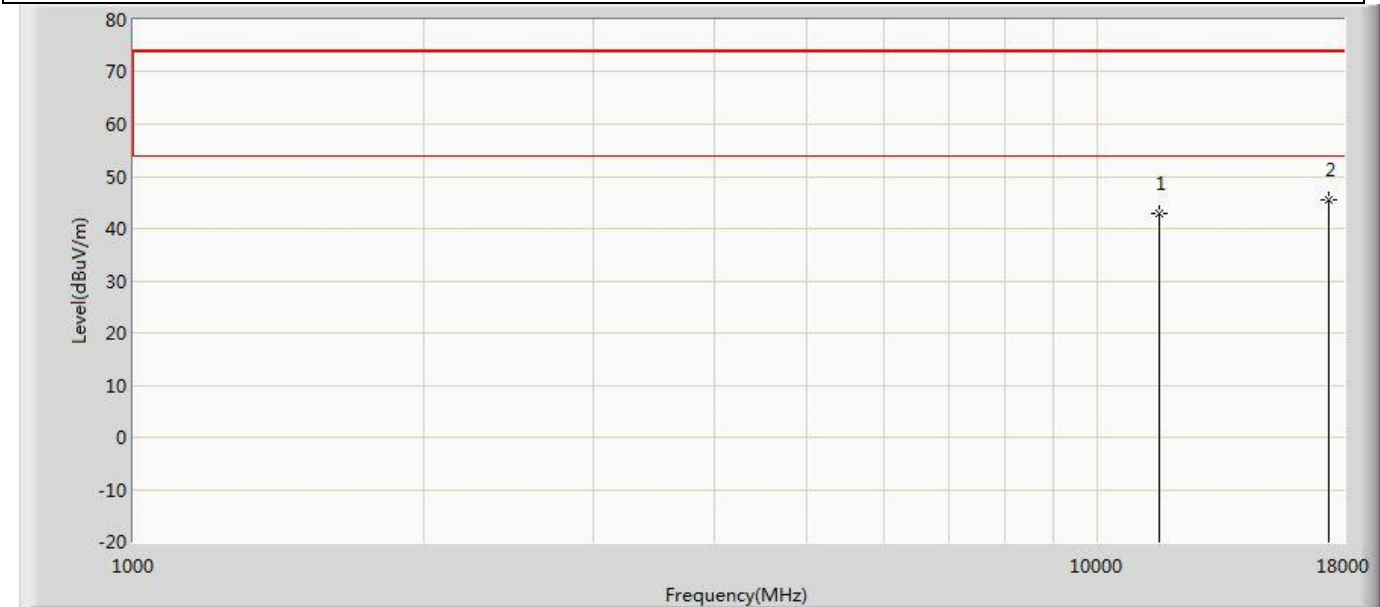


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	42.928	48.838	-31.072	74.000	-5.910	PK
2	*	17385.000	45.509	48.577	-28.491	74.000	-3.068	PK

Profile: 2310083R	Page No.: 274
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 5 : Transmit at 5795MHz by 802.11ac(40MHz)	

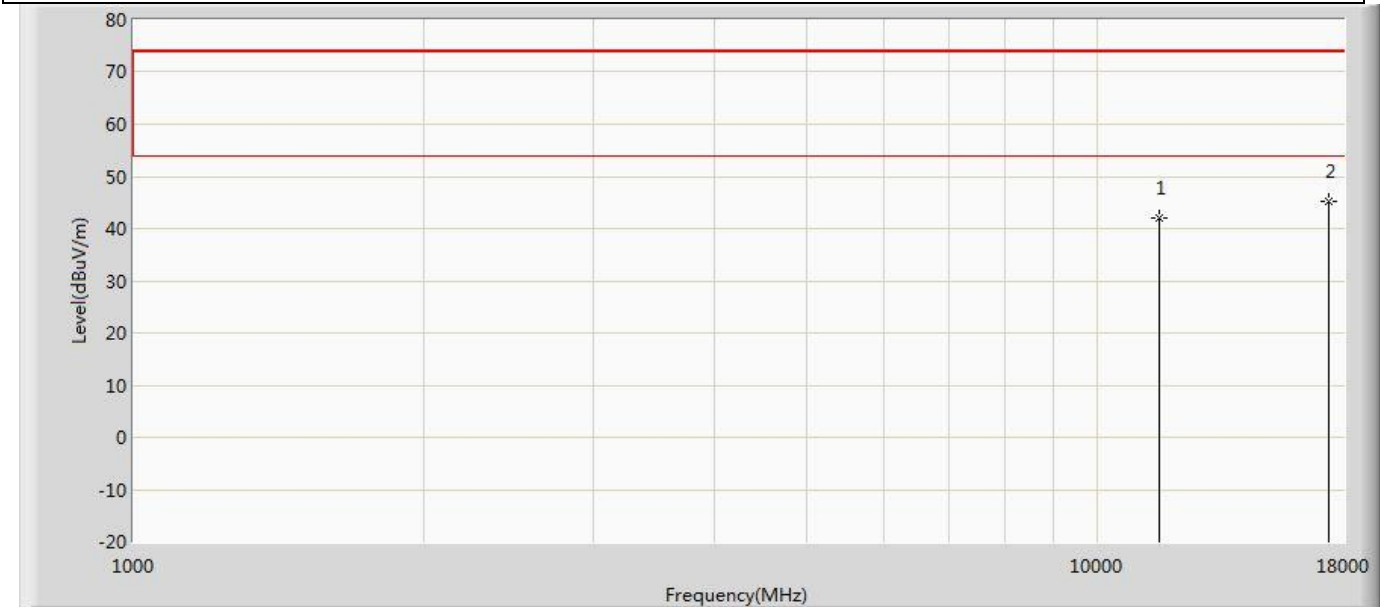


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	41.956	47.866	-32.044	74.000	-5.910	PK
2	*	17385.000	45.315	48.174	-28.685	74.000	-2.860	PK

Profile: 2310083R	Page No.: 275
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5210MHz by 802.11ac(80MHz)	

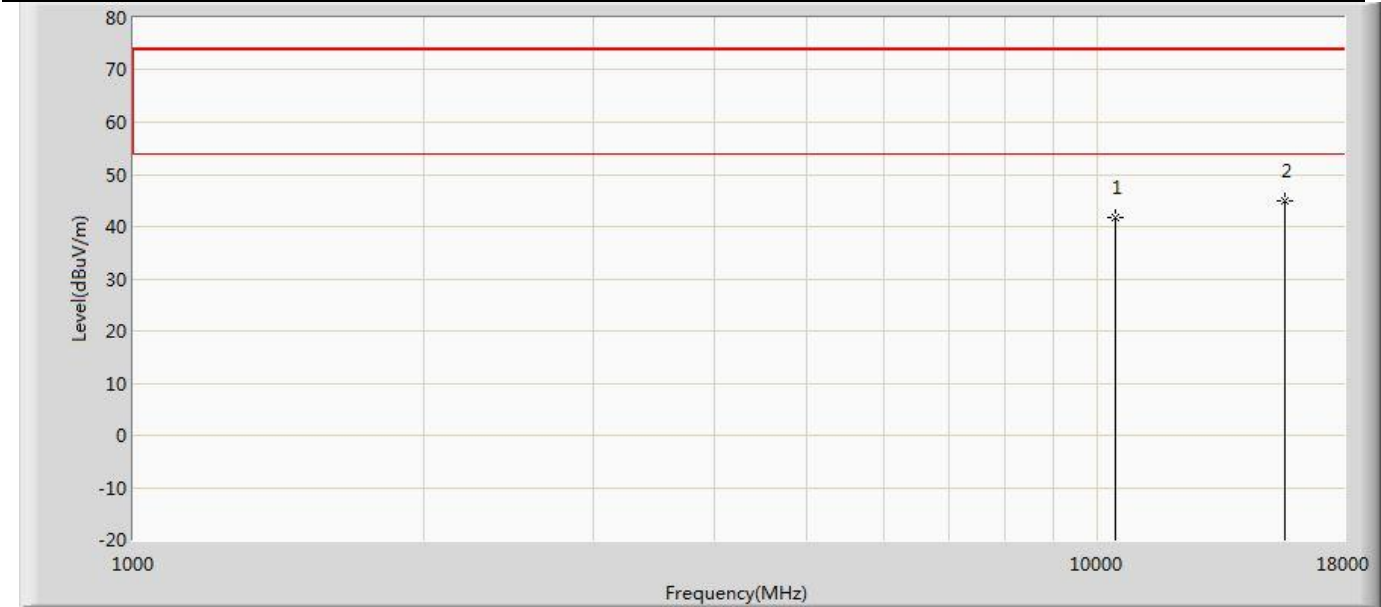


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	41.807	49.059	-32.193	74.000	-7.251	PK
2	*	15630.000	44.816	48.960	-29.184	74.000	-4.143	PK

Profile: 2310083R	Page No.: 276
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5210MHz by 802.11ac(80MHz)	

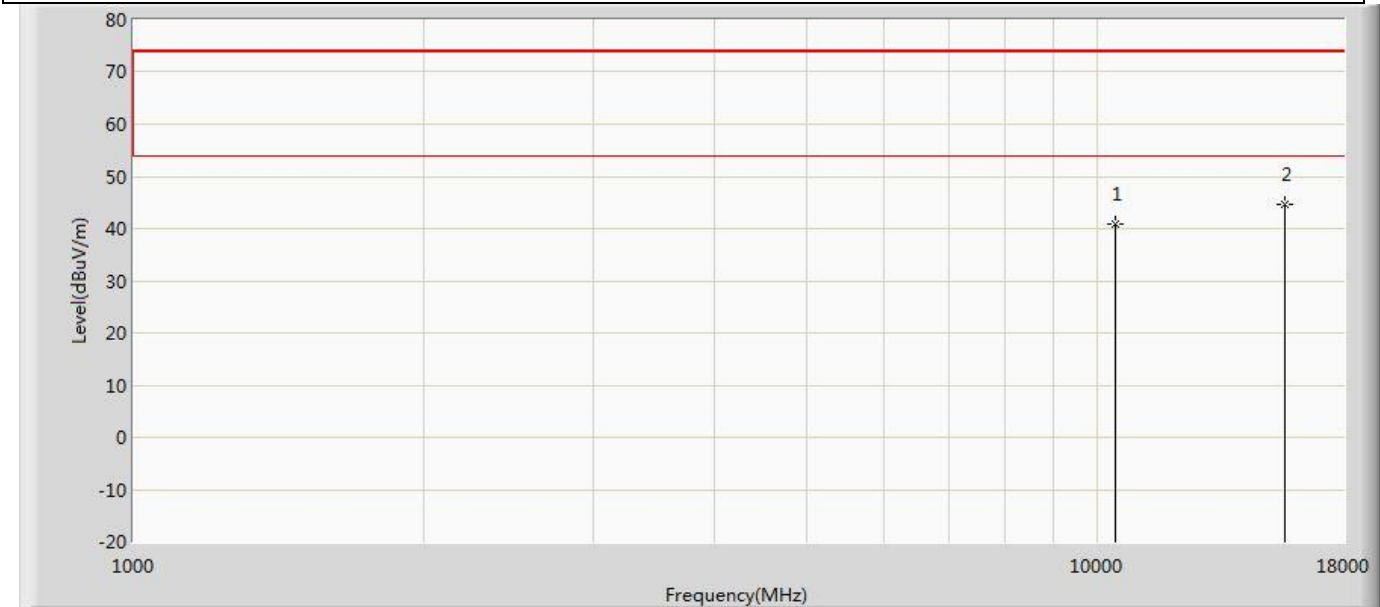


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	40.912	48.164	-33.088	74.000	-7.251	PK
2	*	15630.000	44.506	48.650	-29.494	74.000	-4.143	PK

Profile: 2310083R	Page No.: 277
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5290MHz by 802.11ac(80MHz)	

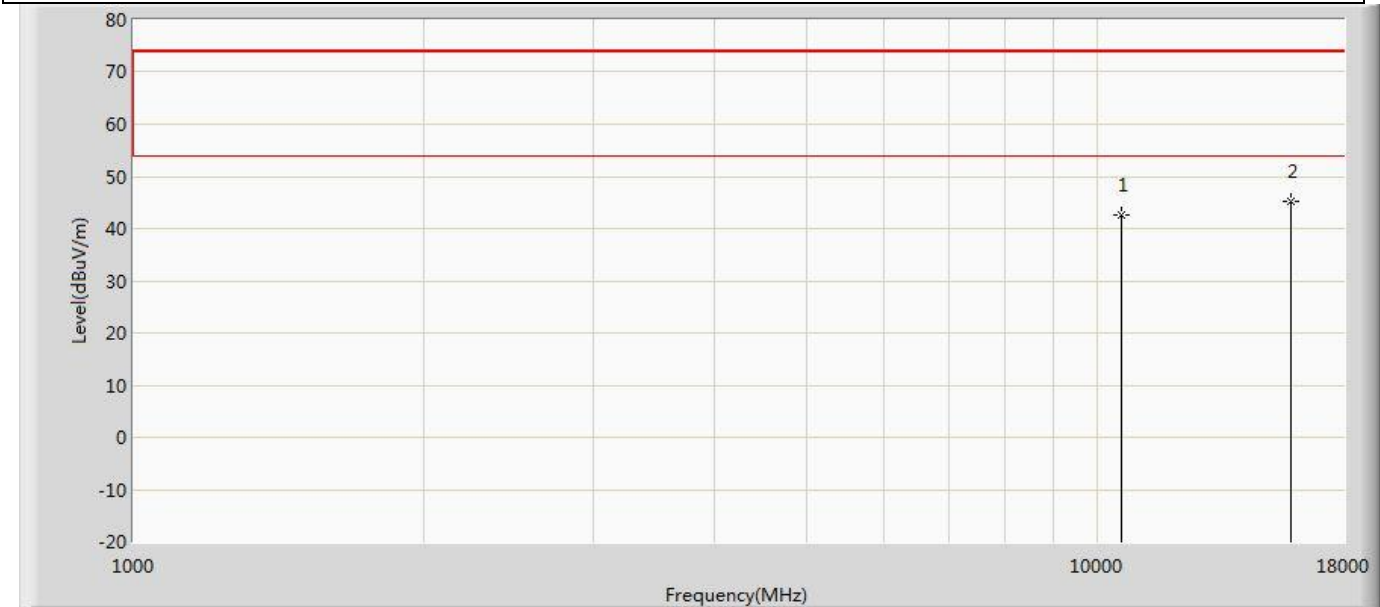


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	42.522	49.436	-31.478	74.000	-6.914	PK
2	*	15870.000	45.120	48.016	-28.880	74.000	-2.897	PK

Profile: 2310083R	Page No.: 278
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5290MHz by 802.11ac(80MHz)	

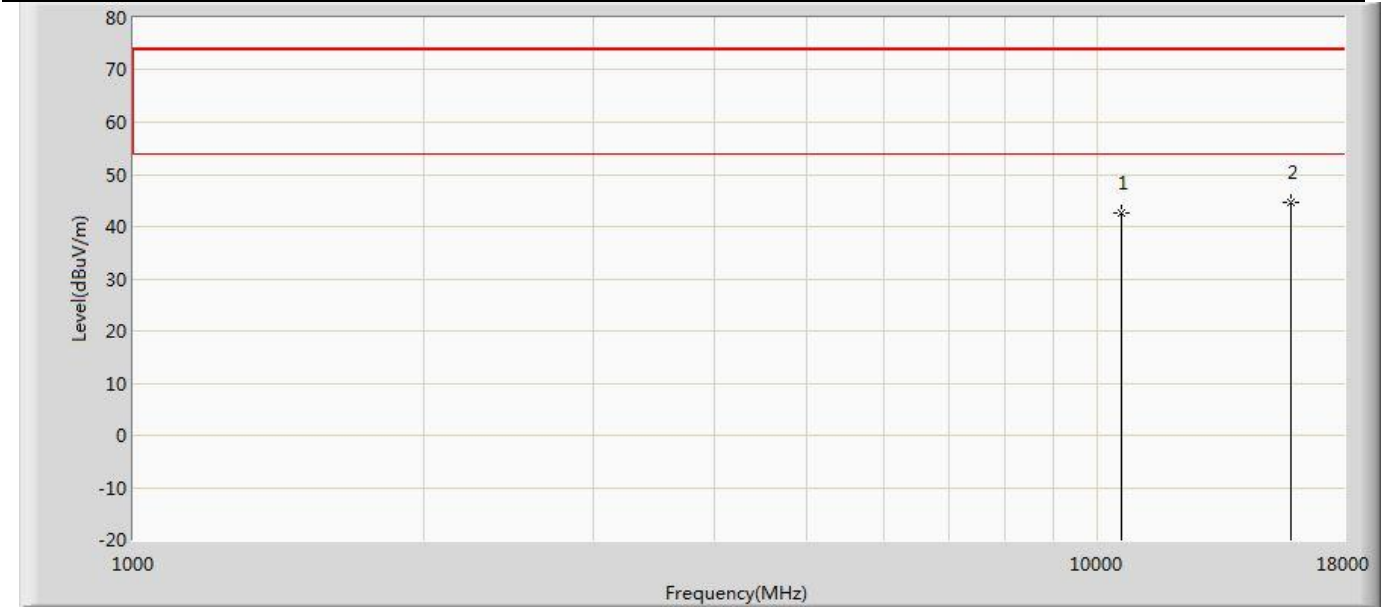


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	42.669	49.583	-31.331	74.000	-6.914	PK
2	*	15870.000	44.568	47.464	-29.432	74.000	-2.897	PK

Profile: 2310083R	Page No.: 279
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5530MHz by 802.11ac(80MHz)	

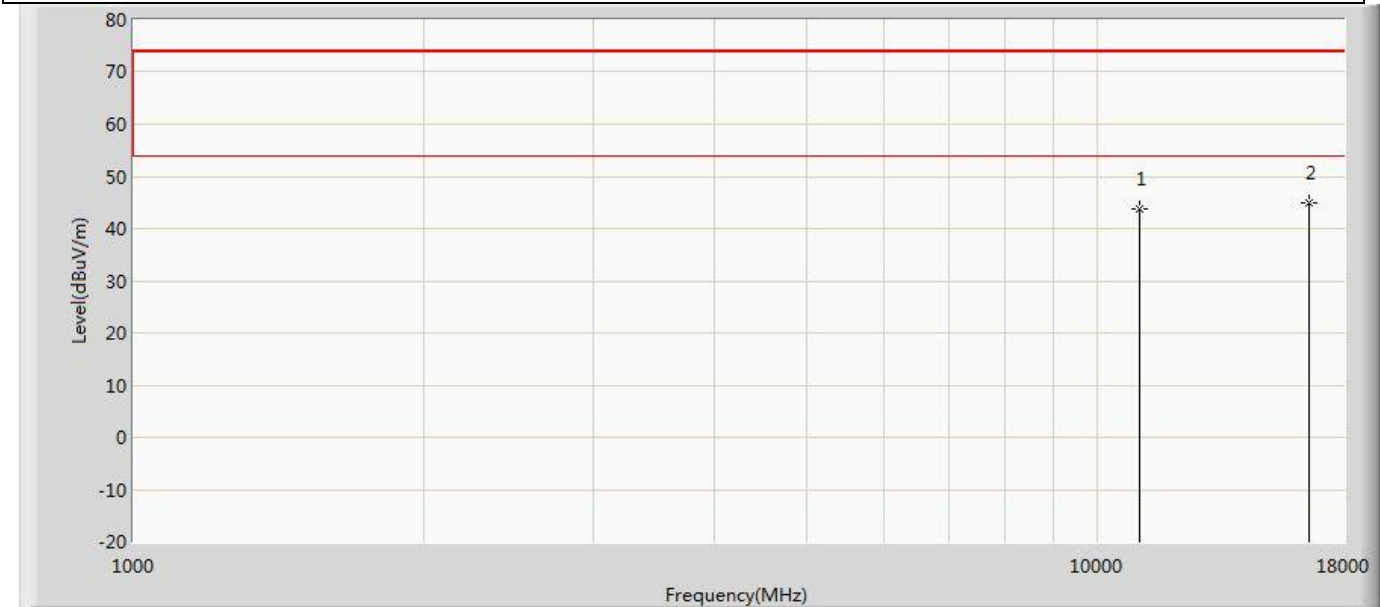


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	43.703	49.595	-30.297	74.000	-5.891	PK
2	*	16590.000	45.045	47.916	-28.955	74.000	-2.872	PK

Profile: 2310083R	Page No.: 280
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5530MHz by 802.11ac(80MHz)	

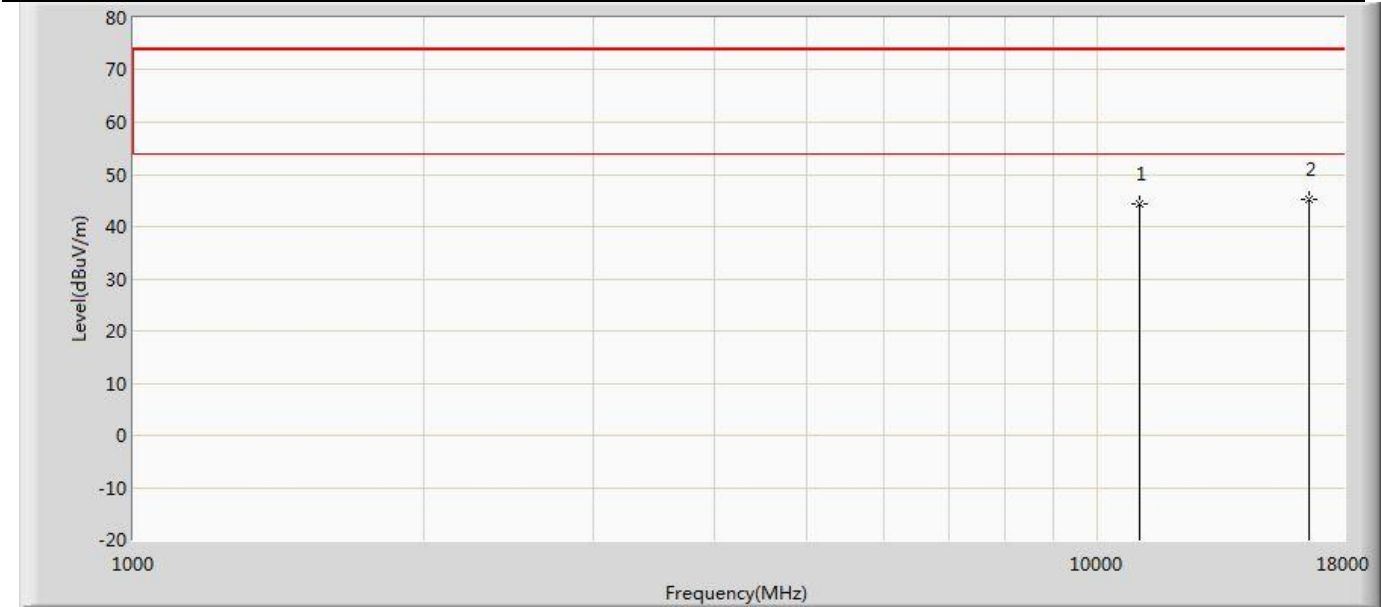


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	44.214	50.106	-29.786	74.000	-5.891	PK
2	*	16590.000	45.107	47.781	-28.893	74.000	-2.675	PK

Profile: 2310083R	Page No.: 281
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5775MHz by 802.11ac(80MHz)	

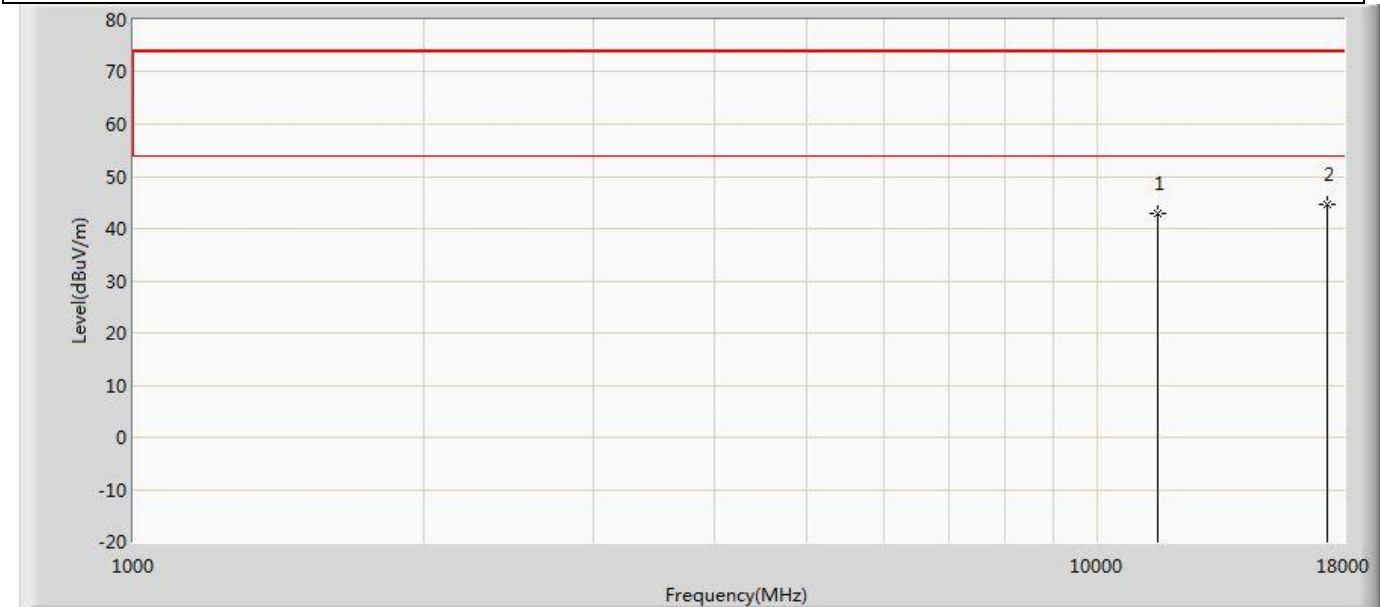


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	42.980	48.245	-31.020	74.000	-5.265	PK
2	*	17325.000	44.759	48.175	-29.241	74.000	-3.417	PK

Profile: 2310083R	Page No.: 282
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 6 : Transmit at 5775MHz by 802.11ac(80MHz)	

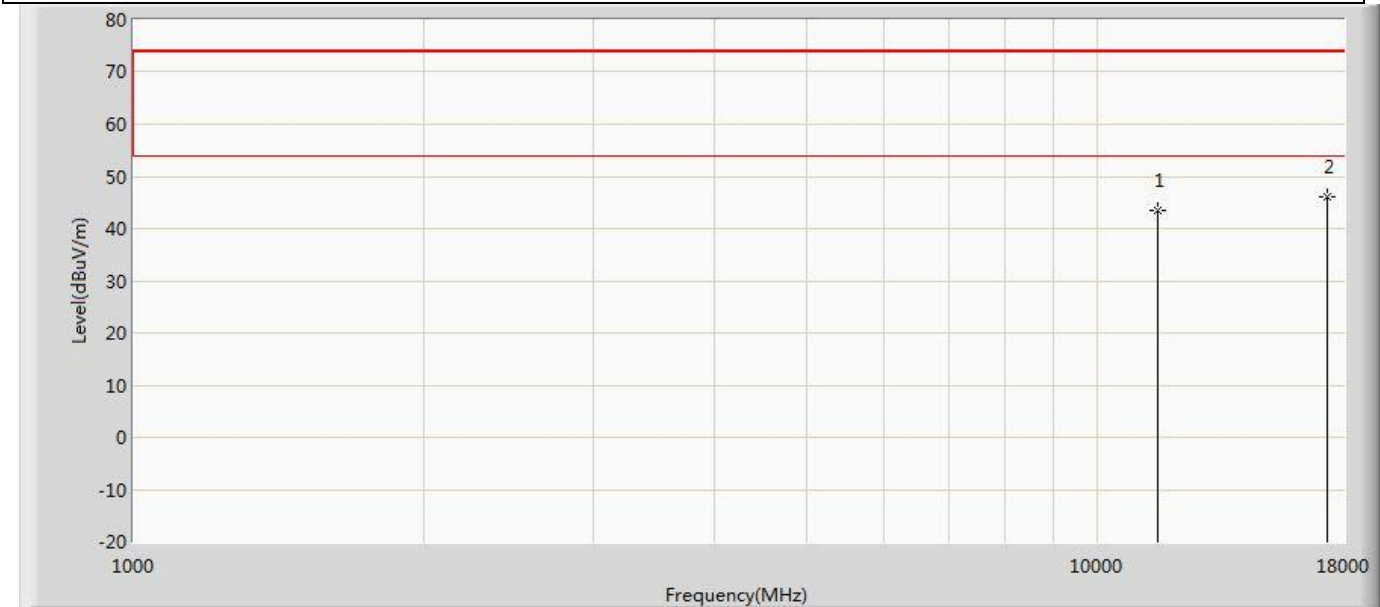


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	43.420	48.685	-30.580	74.000	-5.265	PK
2	*	17325.000	46.068	49.099	-27.932	74.000	-3.031	PK

Profile: 2310083R	Page No.: 283
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5180MHz by 802.11ax(20MHz)	

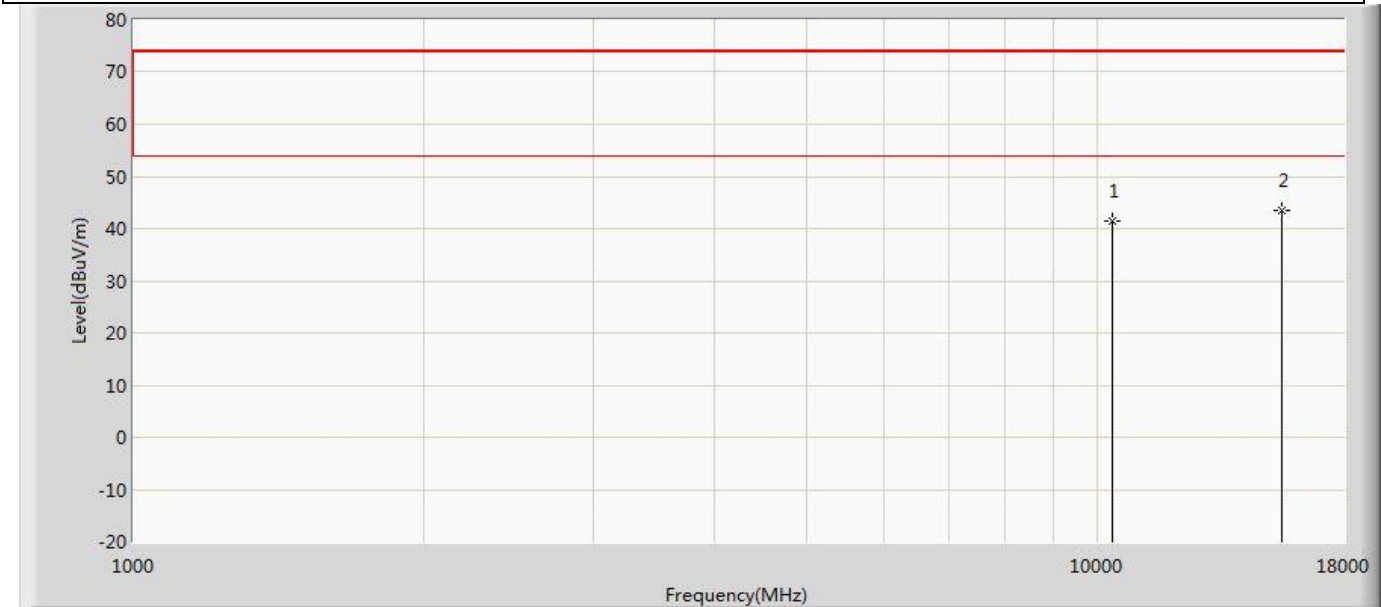


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	41.463	48.875	-32.537	74.000	-7.412	PK
2	*	15540.000	43.476	47.589	-30.524	74.000	-4.113	PK

Profile: 2310083R	Page No.: 284
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5180MHz by 802.11ax(20MHz)	

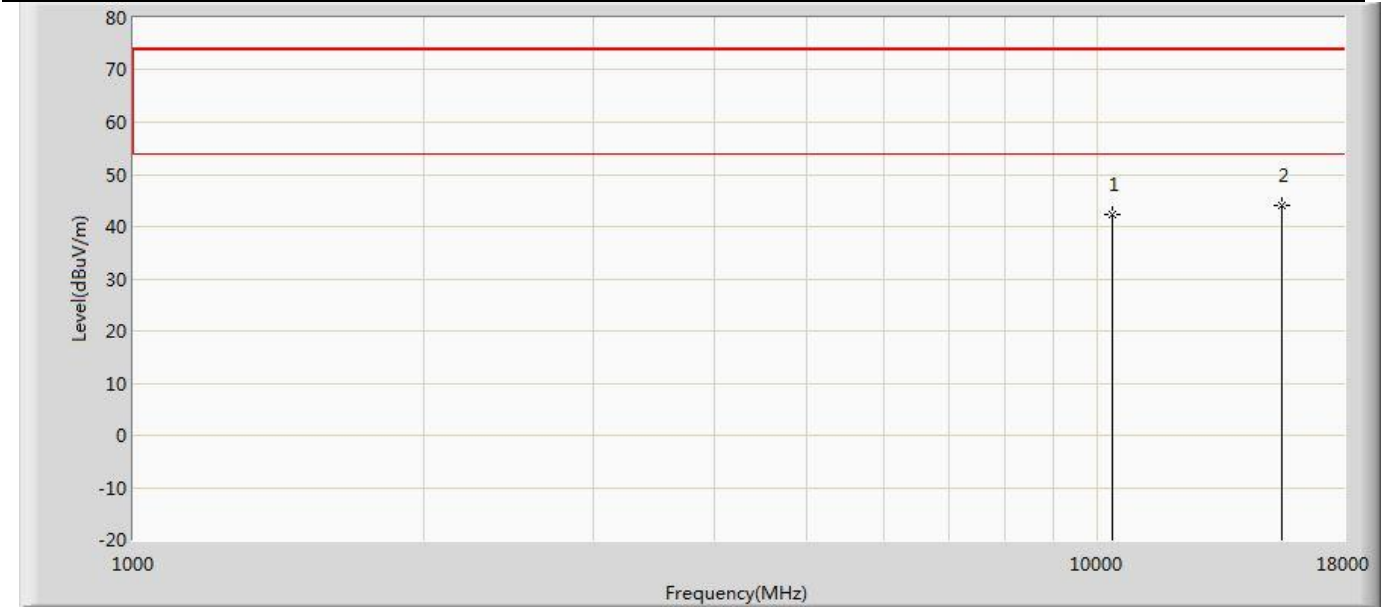


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	42.229	49.641	-31.771	74.000	-7.412	PK
2	*	15540.000	44.168	48.281	-29.832	74.000	-4.113	PK

Profile: 2310083R	Page No.: 285
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5220MHz by 802.11ax(20MHz)	

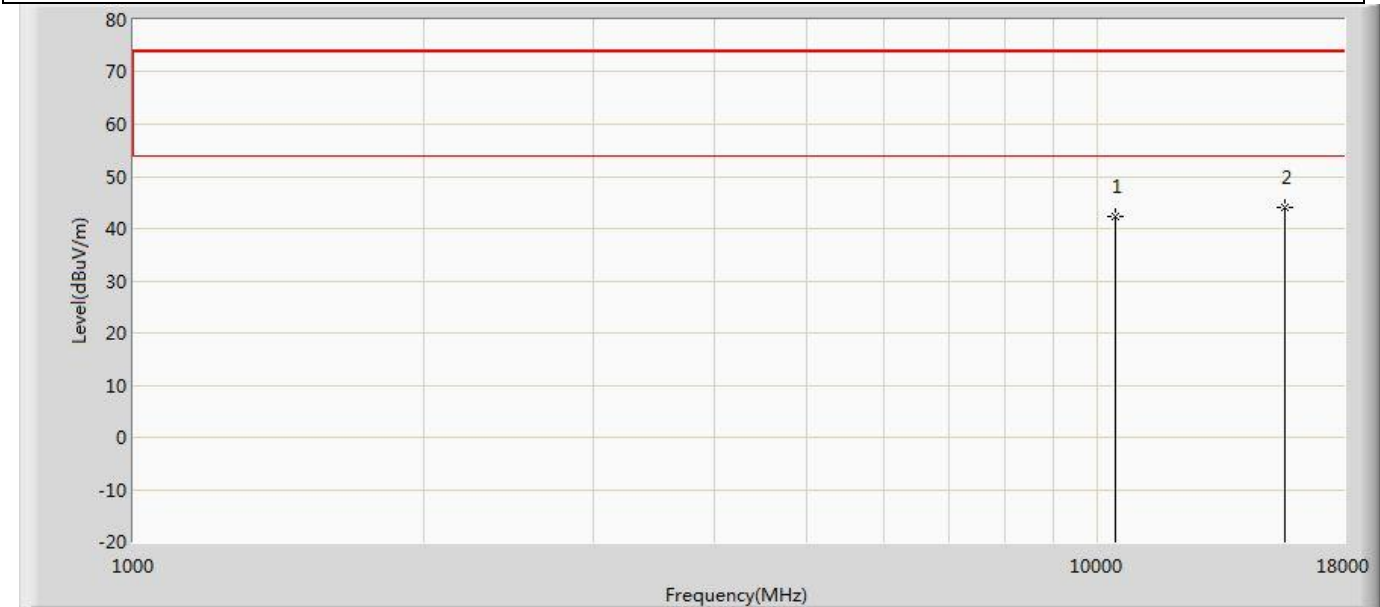


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	42.380	49.619	-31.620	74.000	-7.239	PK
2	*	15660.000	44.186	48.408	-29.814	74.000	-4.221	PK

Profile: 2310083R	Page No.: 286
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5220MHz by 802.11ax(20MHz)	

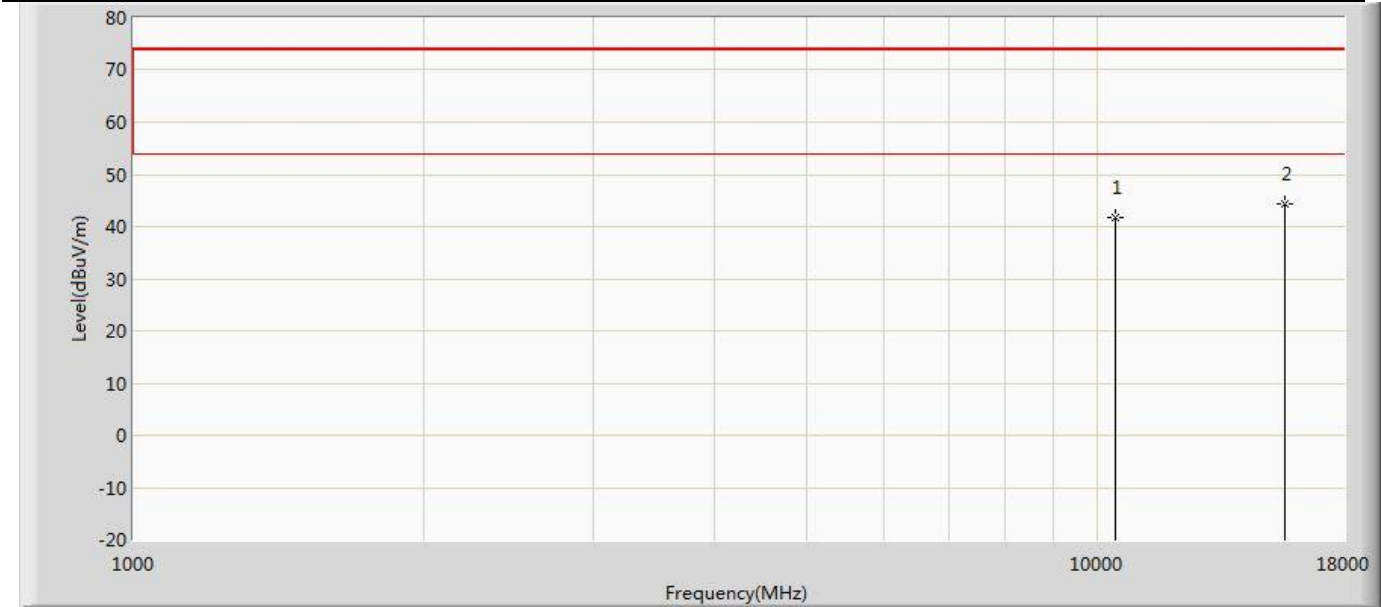


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	41.728	48.967	-32.272	74.000	-7.239	PK
2	*	15660.000	44.345	48.567	-29.655	74.000	-4.221	PK

Profile: 2310083R	Page No.: 287
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5240MHz by 802.11ax(20MHz)	

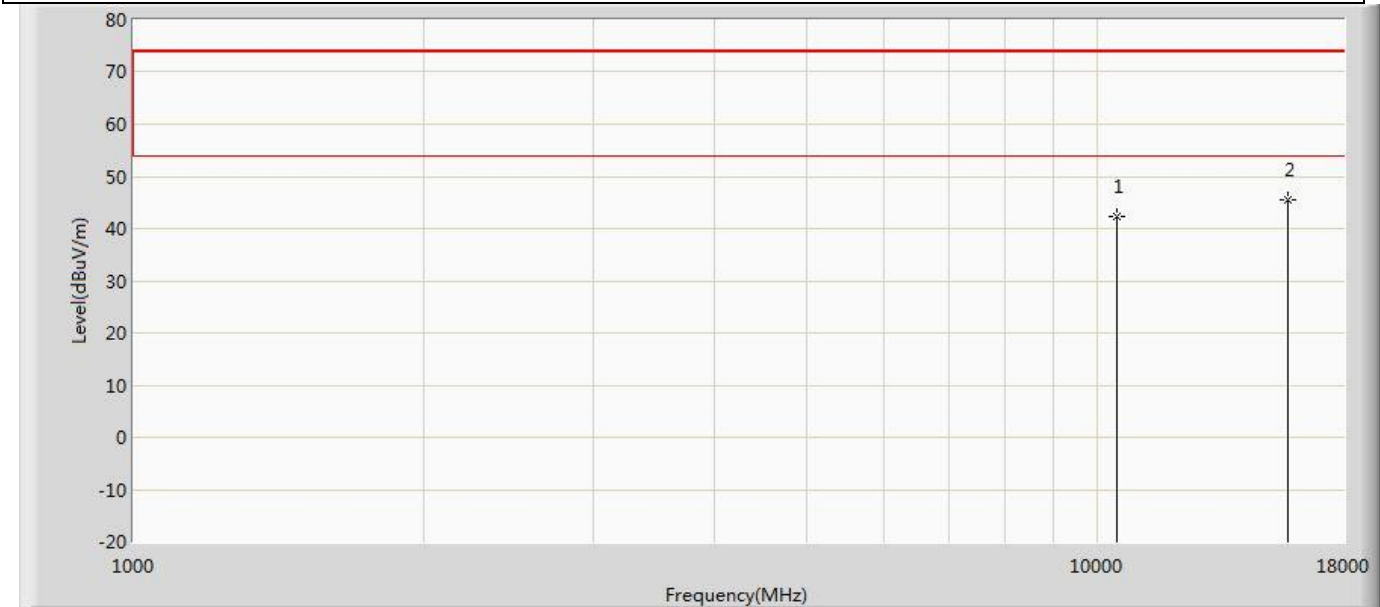


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	42.410	49.434	-31.590	74.000	-7.024	PK
2	*	15720.000	45.411	49.069	-28.589	74.000	-3.658	PK

Profile: 2310083R	Page No.: 288
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5240MHz by 802.11ax(20MHz)	

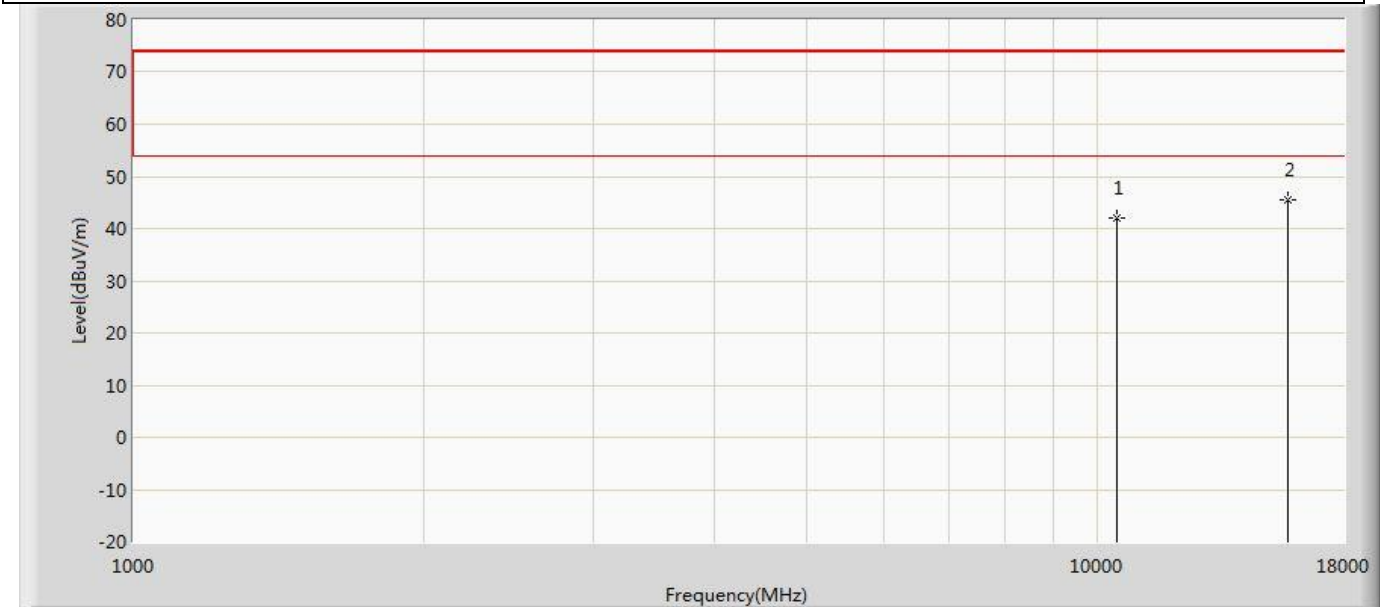


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	41.970	48.994	-32.030	74.000	-7.024	PK
2	*	15720.000	45.533	49.191	-28.467	74.000	-3.658	PK

Profile: 2310083R	Page No.: 289
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5260MHz by 802.11ax(20MHz)	

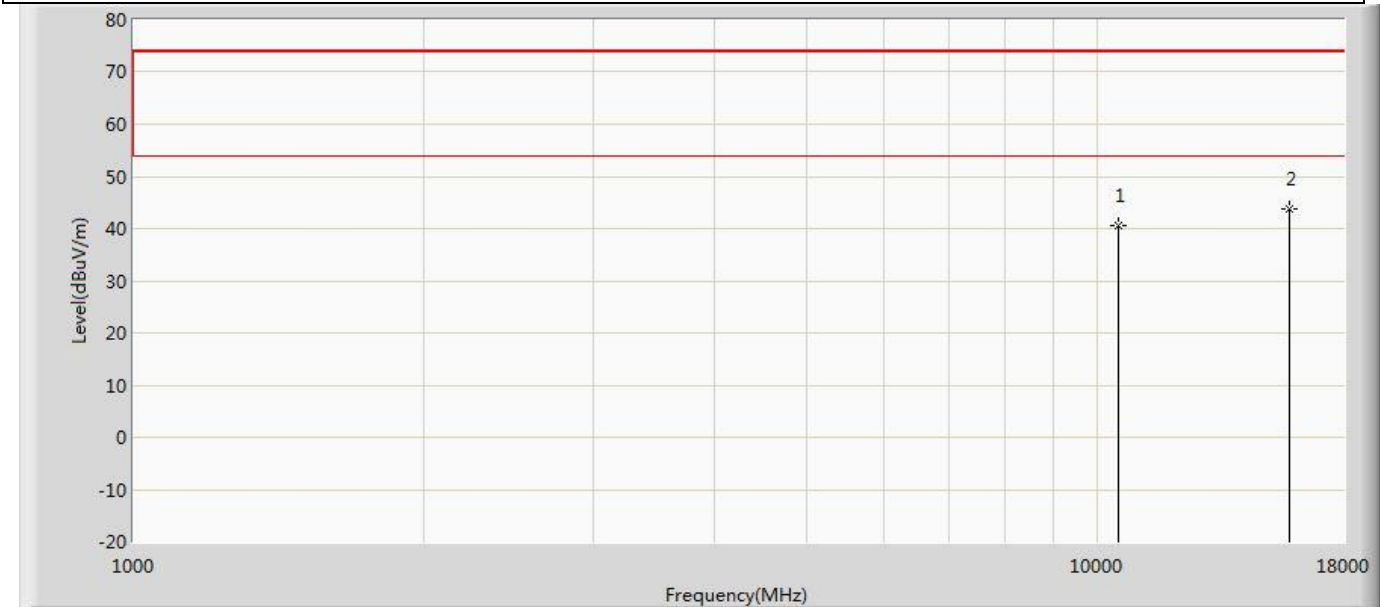


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	40.677	48.090	-33.323	74.000	-7.413	PK
2	*	15780.000	43.833	47.111	-30.167	74.000	-3.278	PK

Profile: 2310083R	Page No.: 290
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5260MHz by 802.11ax(20MHz)	

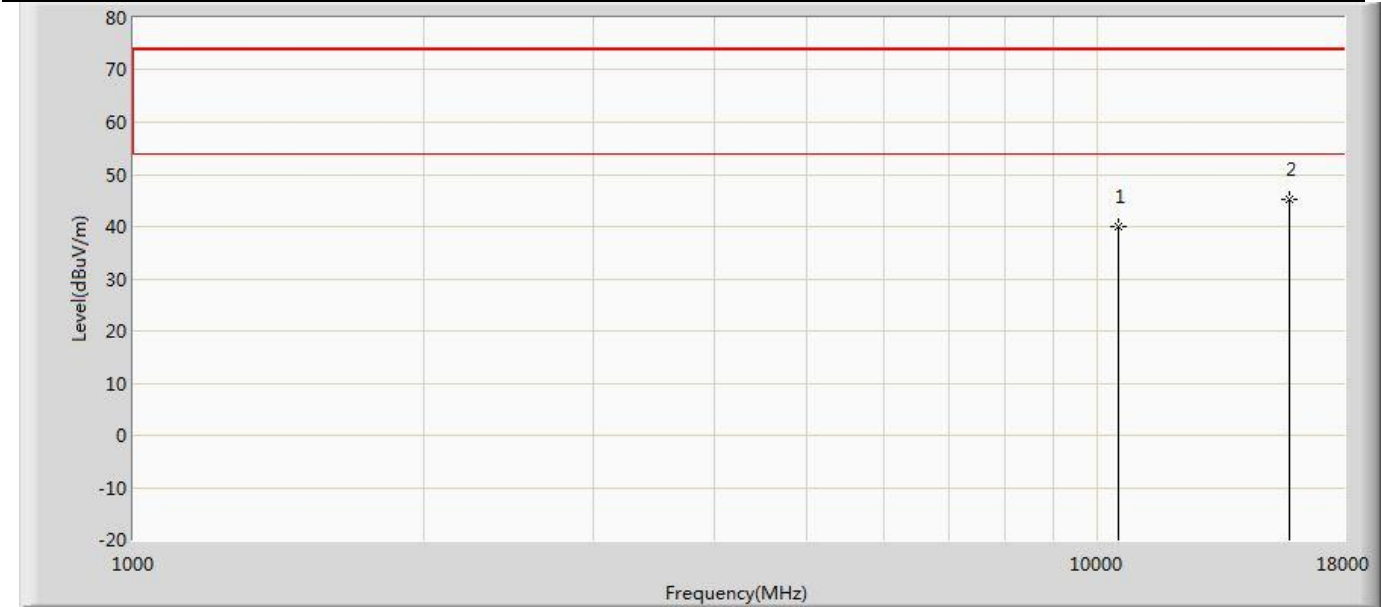


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	40.099	47.512	-33.901	74.000	-7.413	PK
2	*	15780.000	45.219	48.497	-28.781	74.000	-3.278	PK

Profile: 2310083R	Page No.: 291
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5300MHz by 802.11ax(20MHz)	

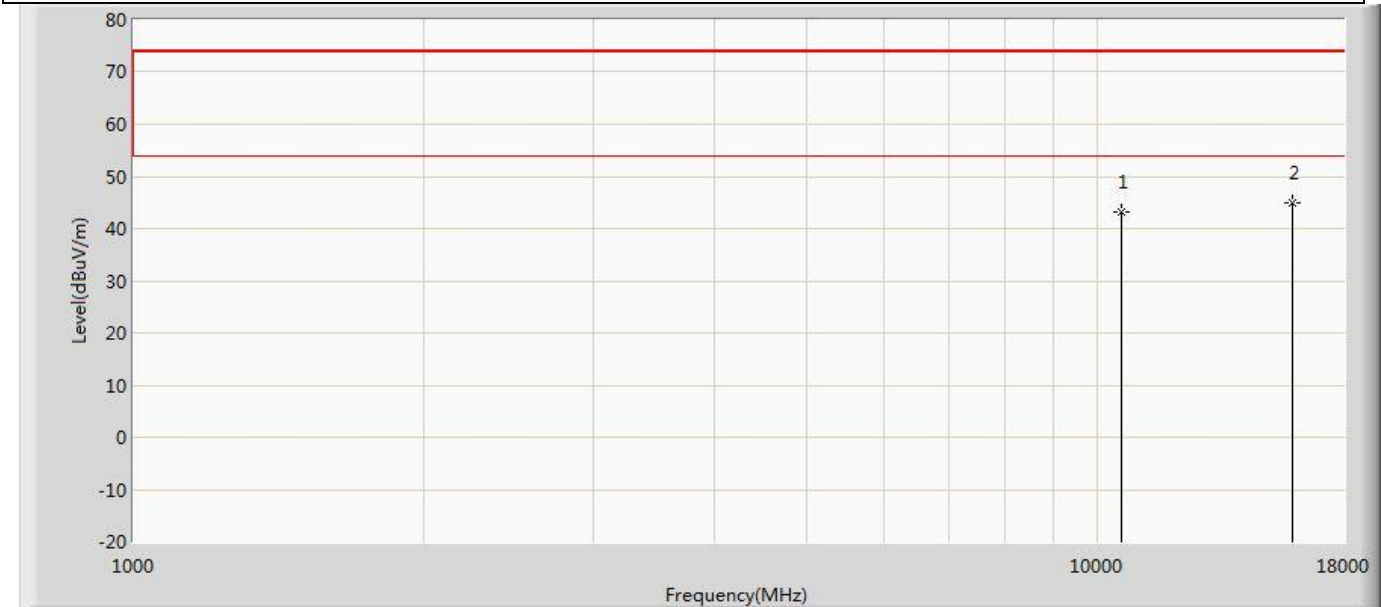


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	43.048	49.916	-30.952	74.000	-6.867	PK
2	*	15900.000	44.783	47.350	-29.217	74.000	-2.566	PK

Profile: 2310083R	Page No.: 292
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5300MHz by 802.11ax(20MHz)	

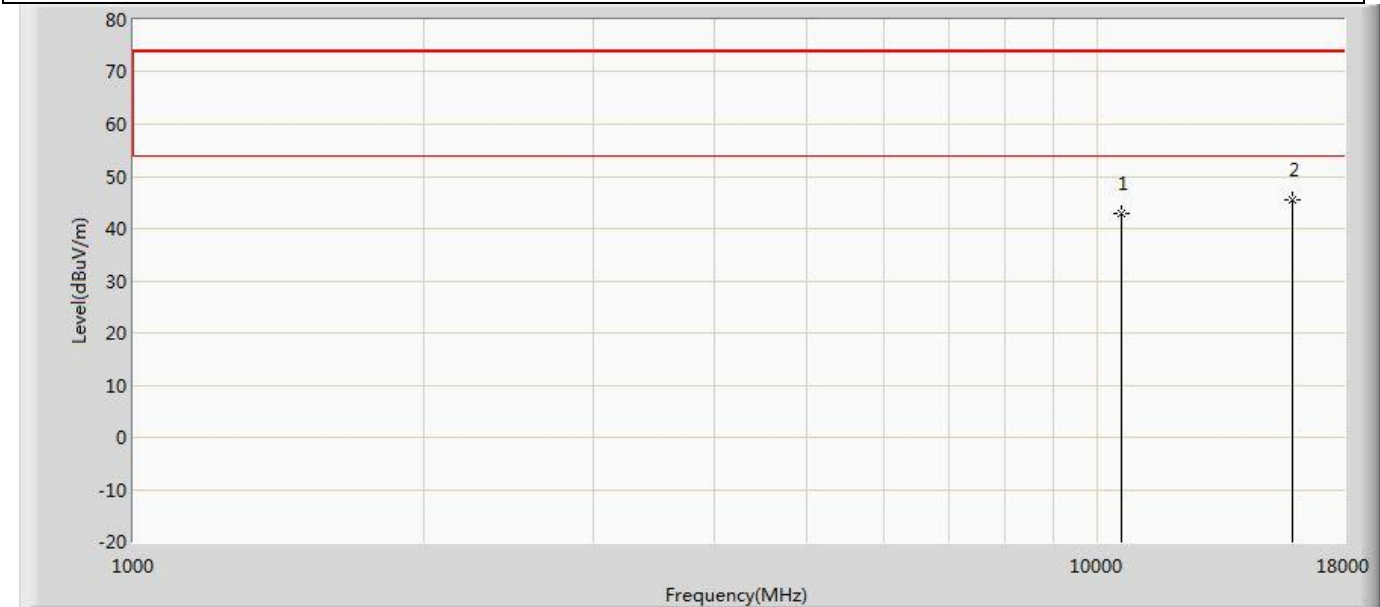


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	43.001	49.869	-30.999	74.000	-6.867	PK
2	*	15900.000	45.505	48.072	-28.495	74.000	-2.566	PK

Profile: 2310083R	Page No.: 293
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5320MHz by 802.11ax(20MHz)	

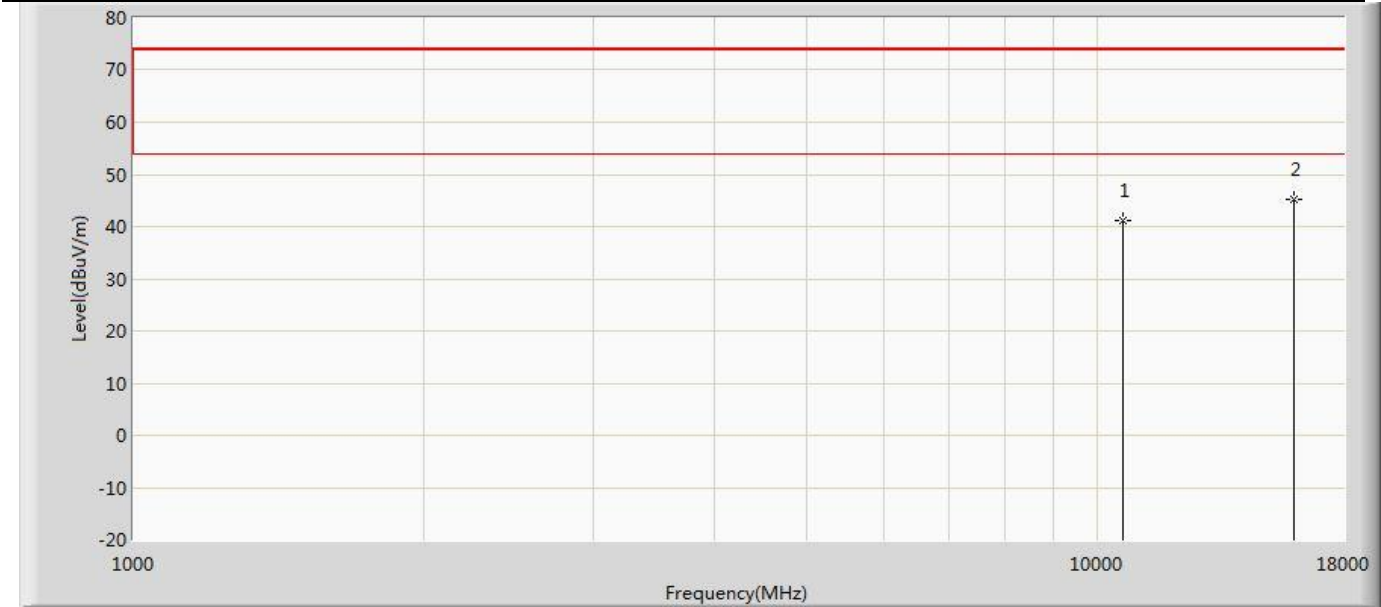


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	41.200	48.310	-32.800	74.000	-7.109	PK
2	*	15960.000	45.312	48.770	-28.688	74.000	-3.458	PK

Profile: 2310083R	Page No.: 294
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5320MHz by 802.11ax(20MHz)	

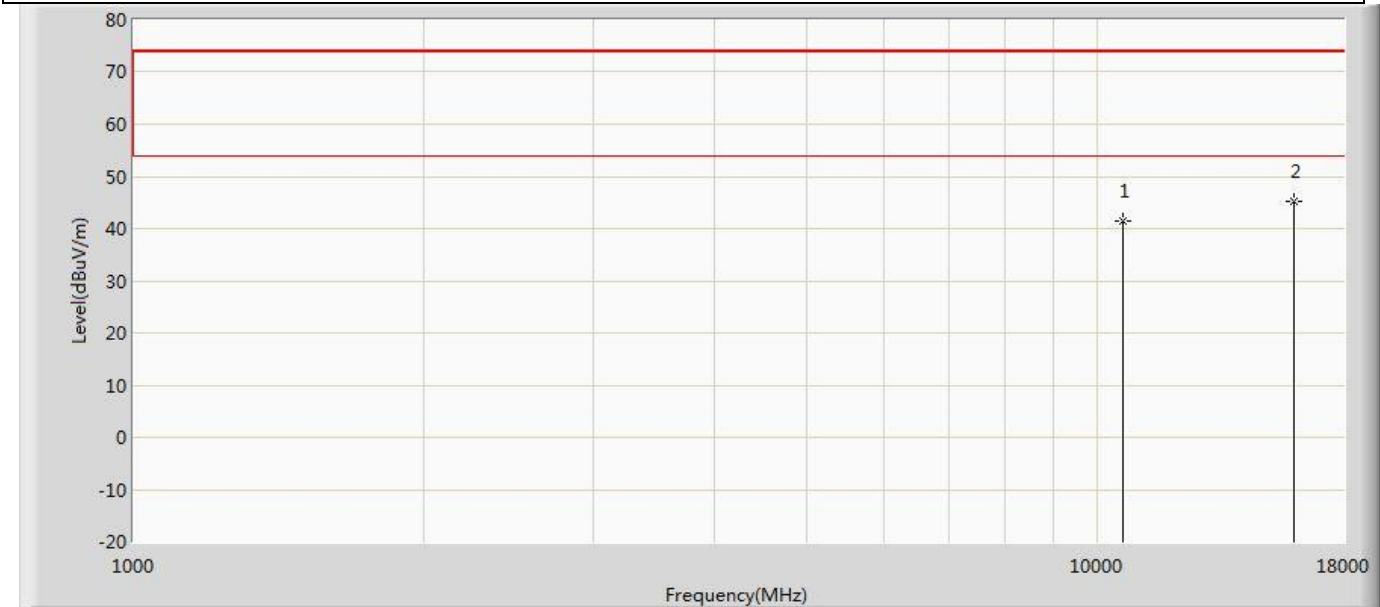


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	41.500	48.610	-32.500	74.000	-7.109	PK
2	*	15960.000	45.075	48.483	-28.925	74.000	-3.408	PK

Profile: 2310083R	Page No.: 295
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5500MHz by 802.11ax(20MHz)	

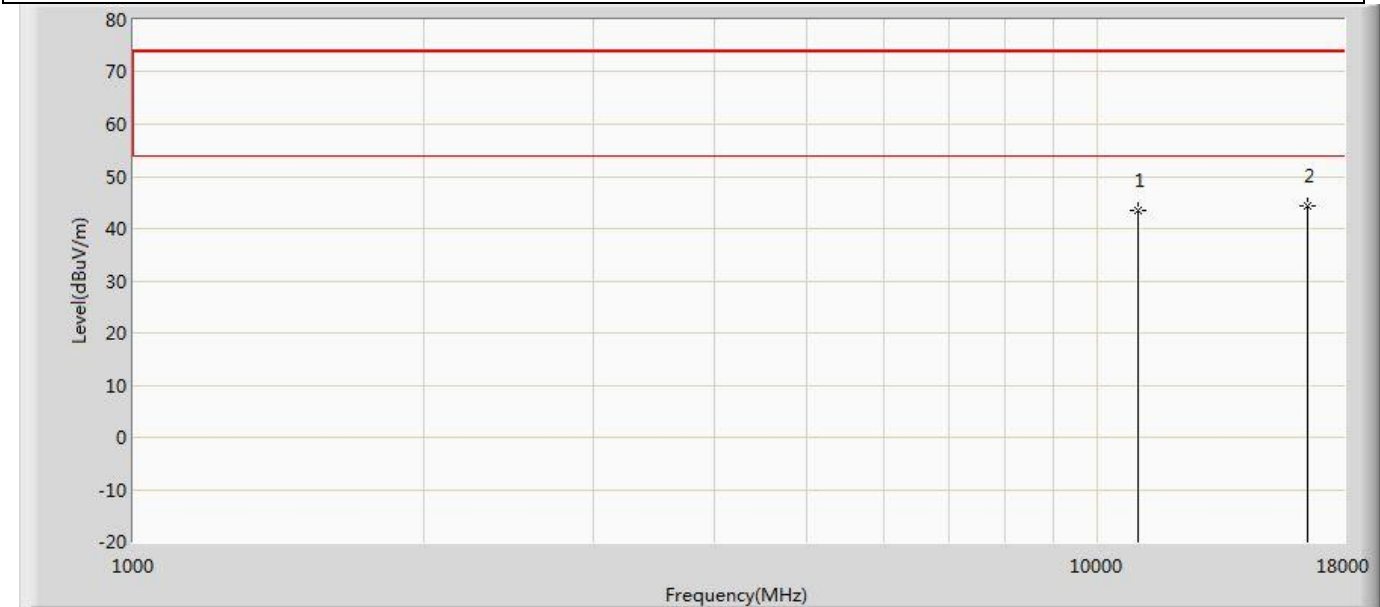


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.588	50.076	-30.412	74.000	-6.489	PK
2	*	16500.000	44.401	47.784	-29.599	74.000	-3.383	PK

Profile: 2310083R	Page No.: 296
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5500MHz by 802.11ax(20MHz)	

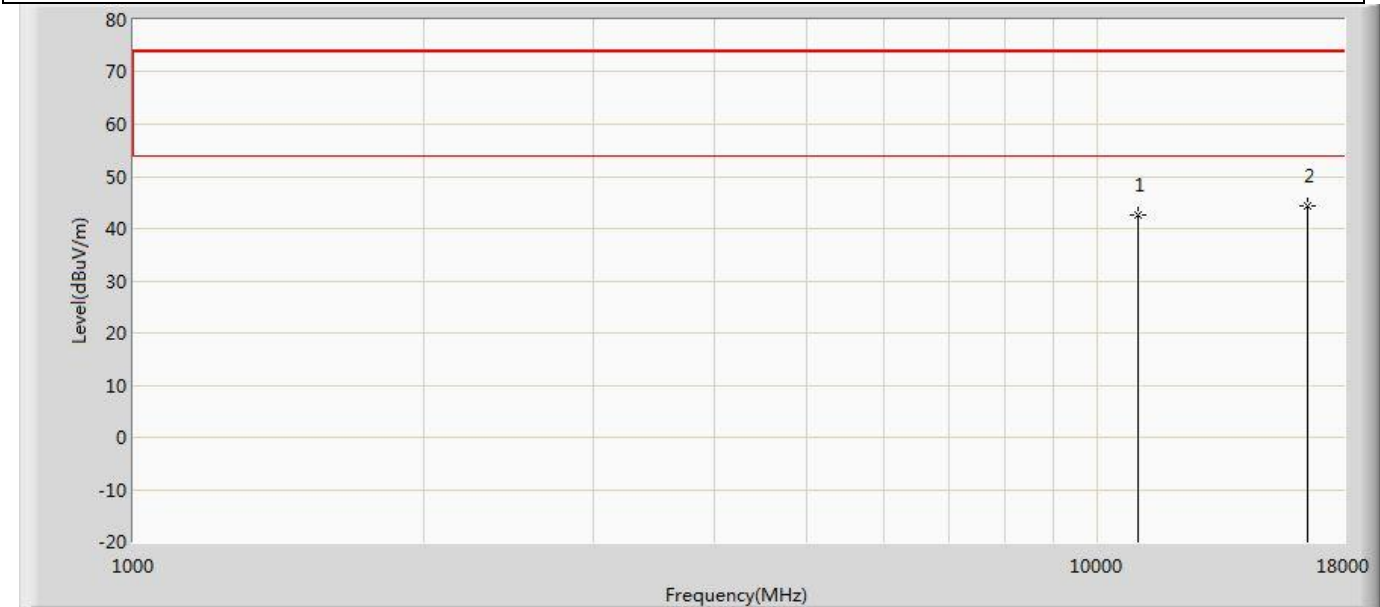


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	42.494	48.982	-31.506	74.000	-6.489	PK
2	*	16500.000	44.341	47.262	-29.659	74.000	-2.922	PK

Profile: 2310083R	Page No.: 297
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5580MHz by 802.11ax(20MHz)	

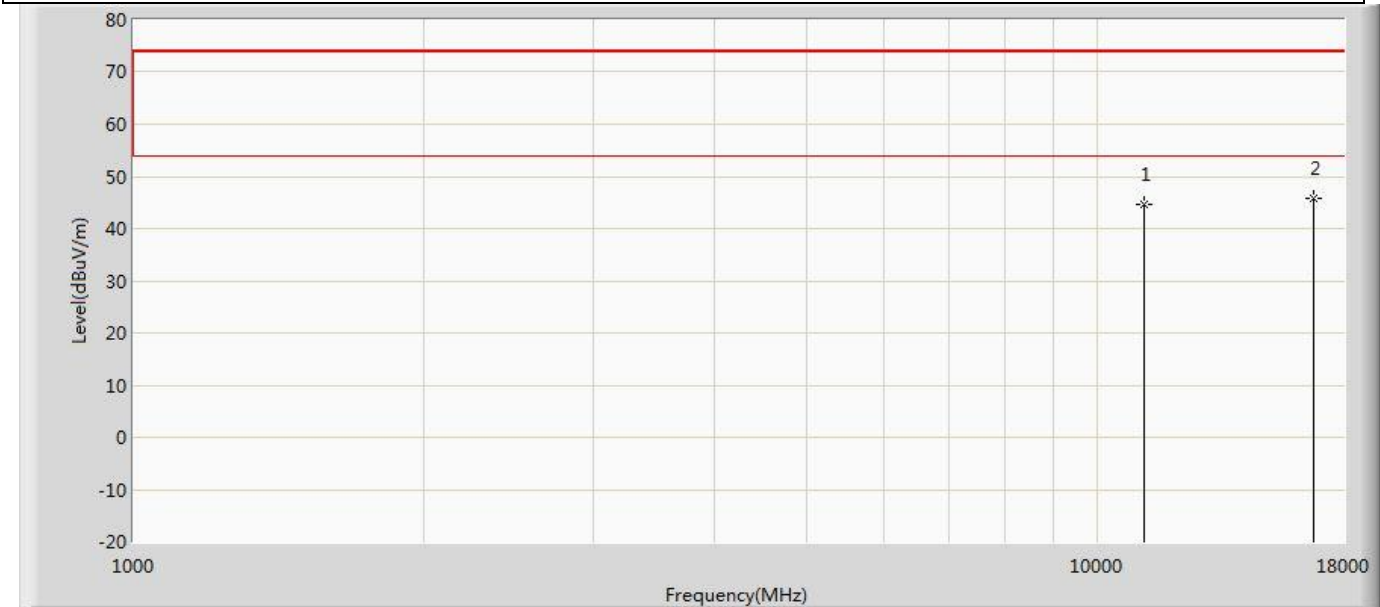


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.535	50.403	-29.465	74.000	-5.867	PK
2	*	16740.000	45.766	49.244	-28.234	74.000	-3.478	PK

Profile: 2310083R	Page No.: 298
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5580MHz by 802.11ax(20MHz)	

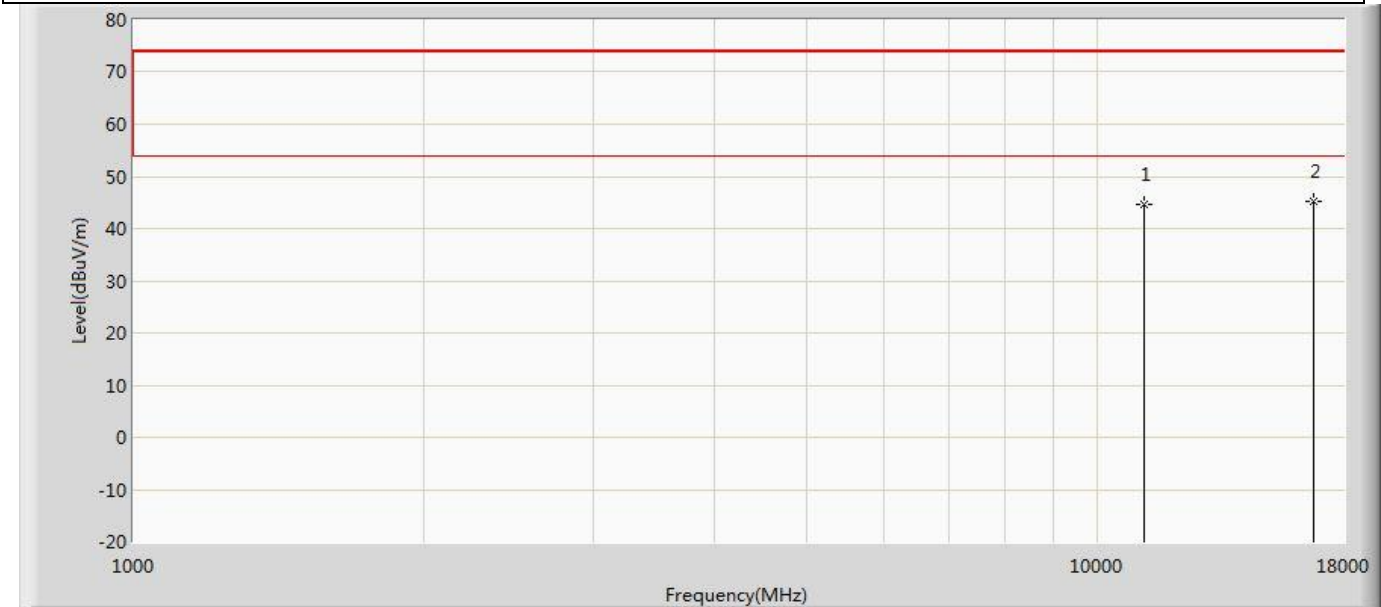


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.543	50.411	-29.457	74.000	-5.867	PK
2	*	16740.000	45.280	48.464	-28.720	74.000	-3.184	PK

Profile: 2310083R	Page No.: 299
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5700MHz by 802.11ax(20MHz)	

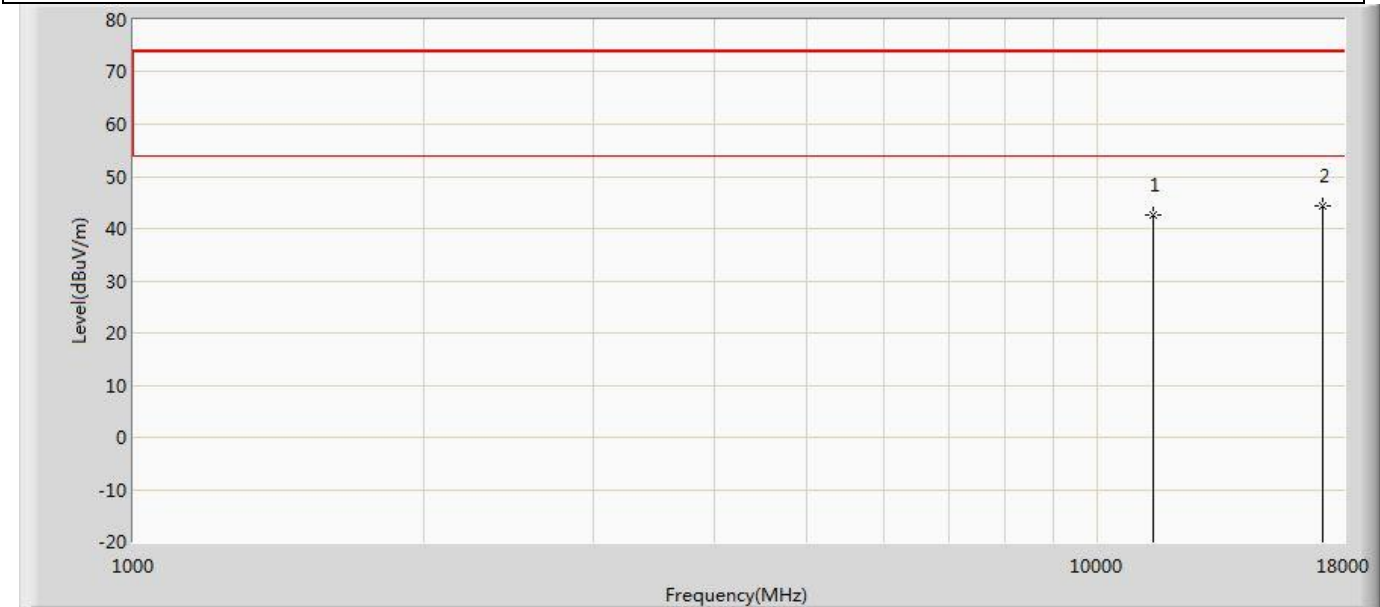


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.606	48.317	-31.394	74.000	-5.711	PK
2	*	17100.000	44.255	47.250	-29.745	74.000	-2.995	PK

Profile: 2310083R	Page No.: 300
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5700MHz by 802.11ax(20MHz)	

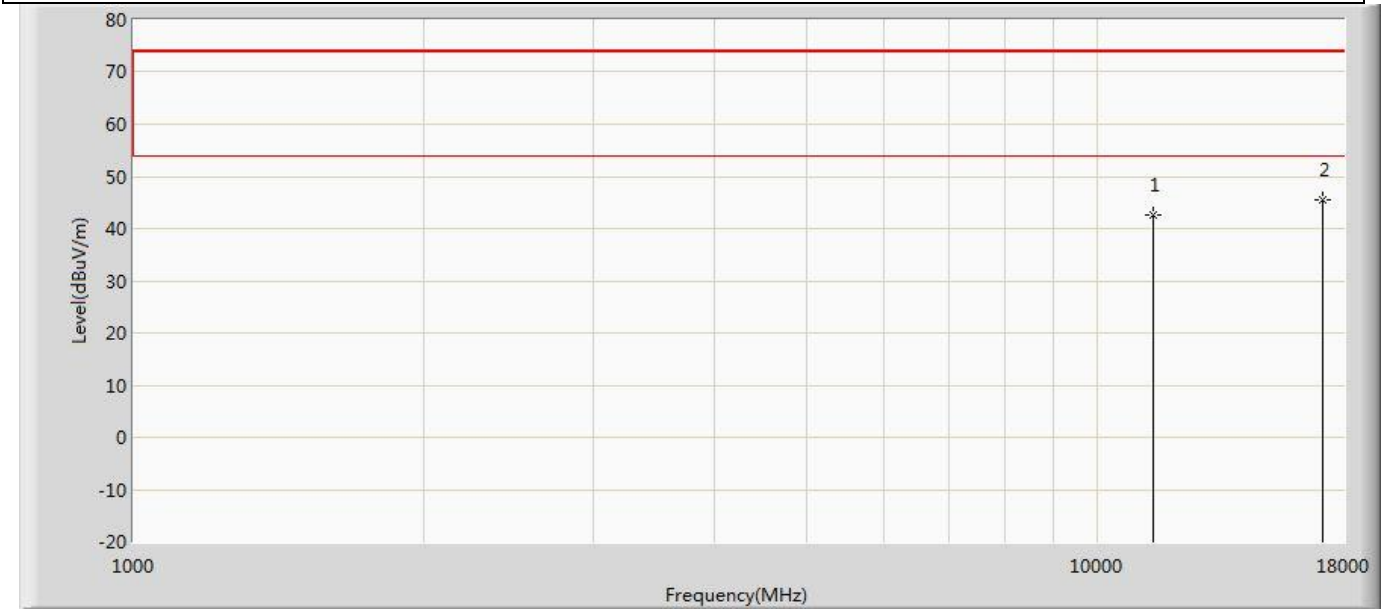


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.705	48.416	-31.295	74.000	-5.711	PK
2	*	17100.000	45.613	47.561	-28.387	74.000	-1.948	PK

Profile: 2310083R	Page No.: 301
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5745MHz by 802.11ax(20MHz)	

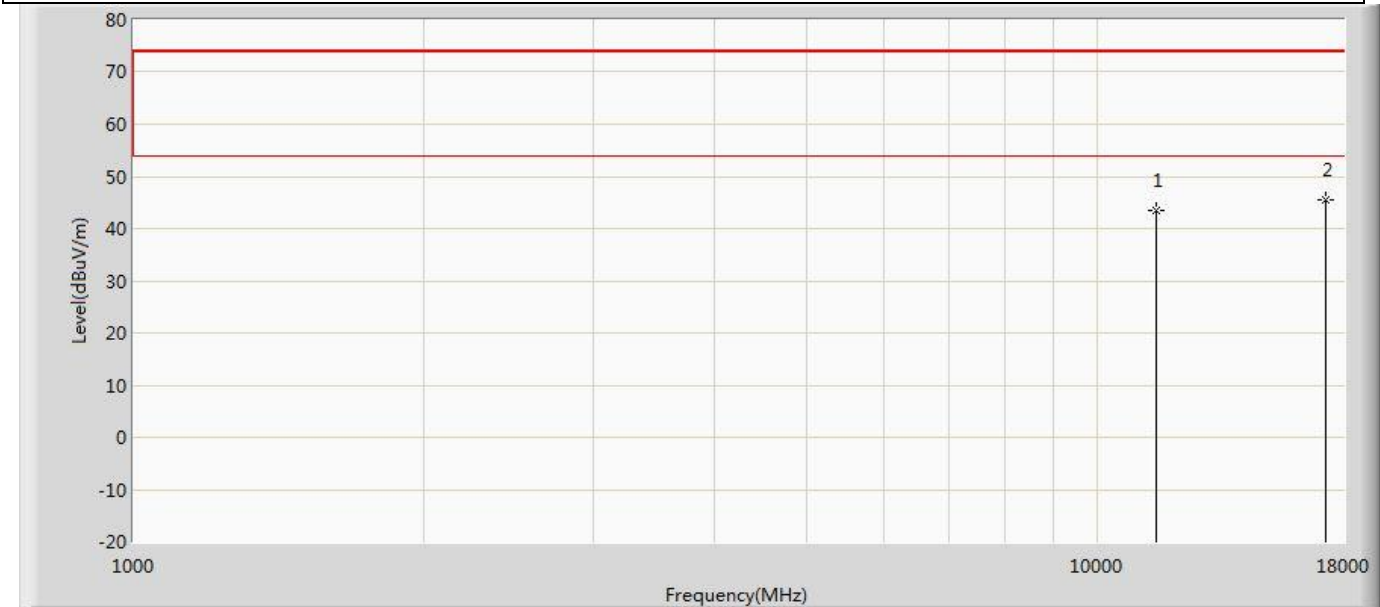


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	43.386	49.275	-30.614	74.000	-5.890	PK
2	*	17235.000	45.462	48.864	-28.538	74.000	-3.403	PK

Profile: 2310083R	Page No.: 302
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5745MHz by 802.11ax(20MHz)	

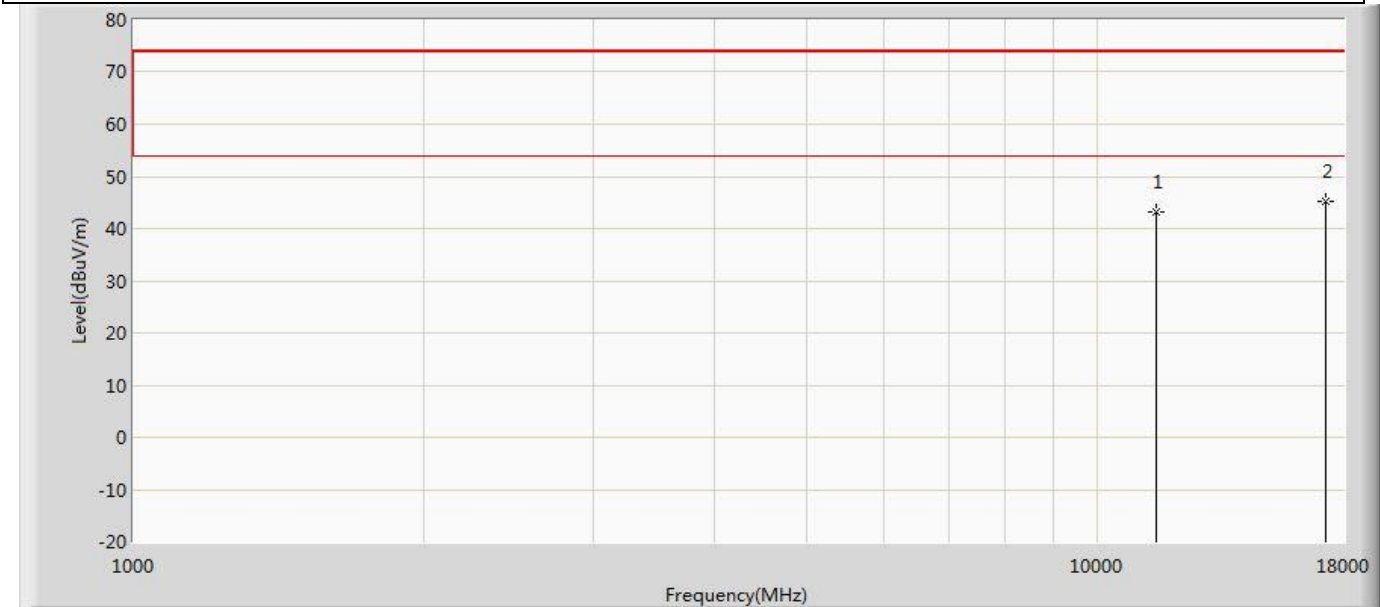


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	43.177	49.066	-30.823	74.000	-5.890	PK
2	*	17235.000	45.278	48.030	-28.722	74.000	-2.753	PK

Profile: 2310083R	Page No.: 303
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5785MHz by 802.11ax(20MHz)	

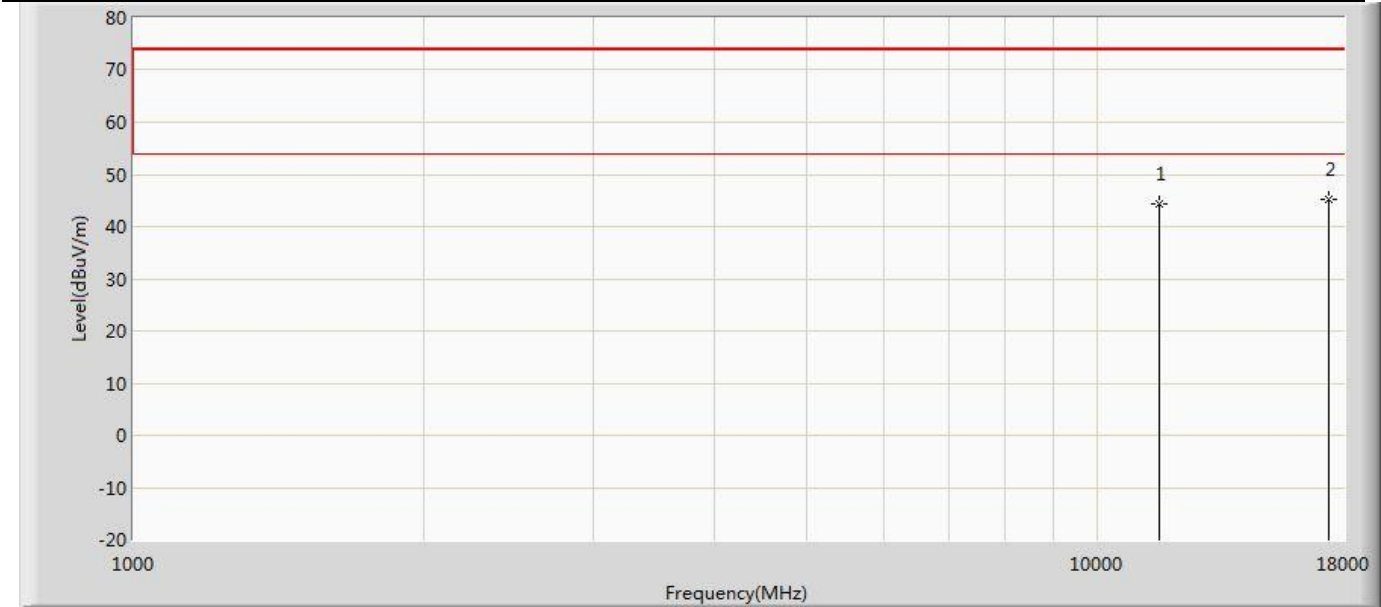


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	44.251	49.370	-29.749	74.000	-5.119	PK
2	*	17355.000	45.289	48.195	-28.711	74.000	-2.906	PK

Profile: 2310083R	Page No.: 304
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5785MHz by 802.11ax(20MHz)	

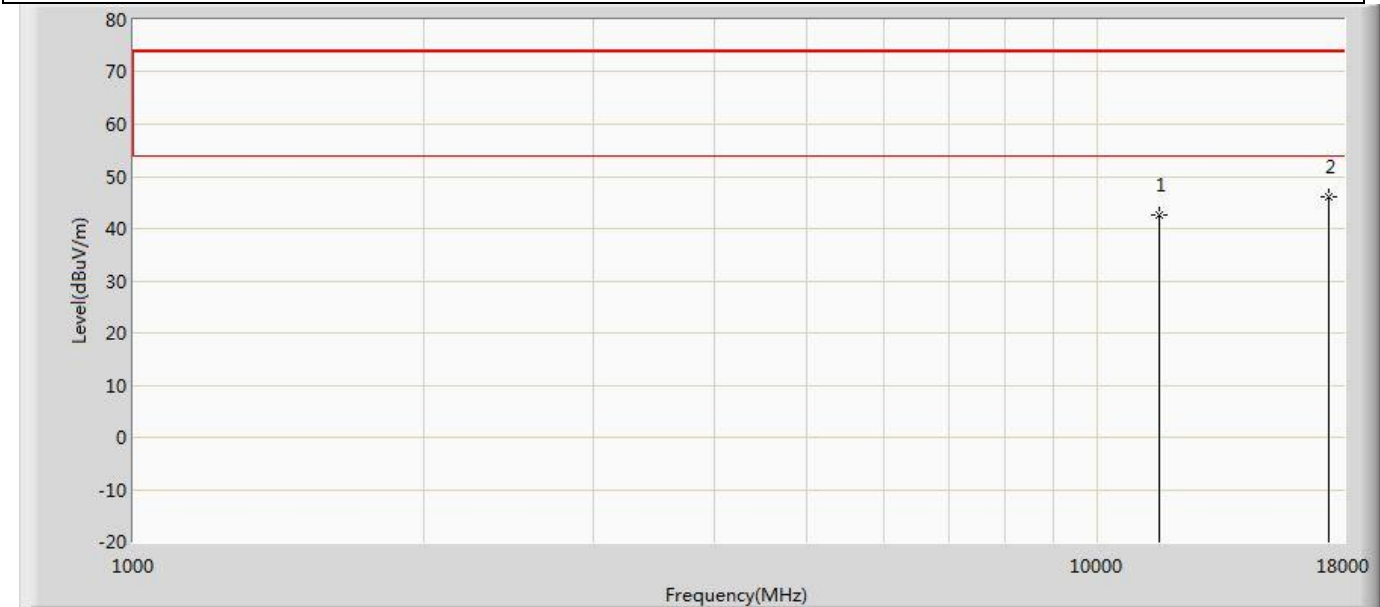


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	42.730	47.849	-31.270	74.000	-5.119	PK
2	*	17355.000	46.231	48.840	-27.769	74.000	-2.609	PK

Profile: 2310083R	Page No.: 305
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5825MHz by 802.11ax(20MHz)	

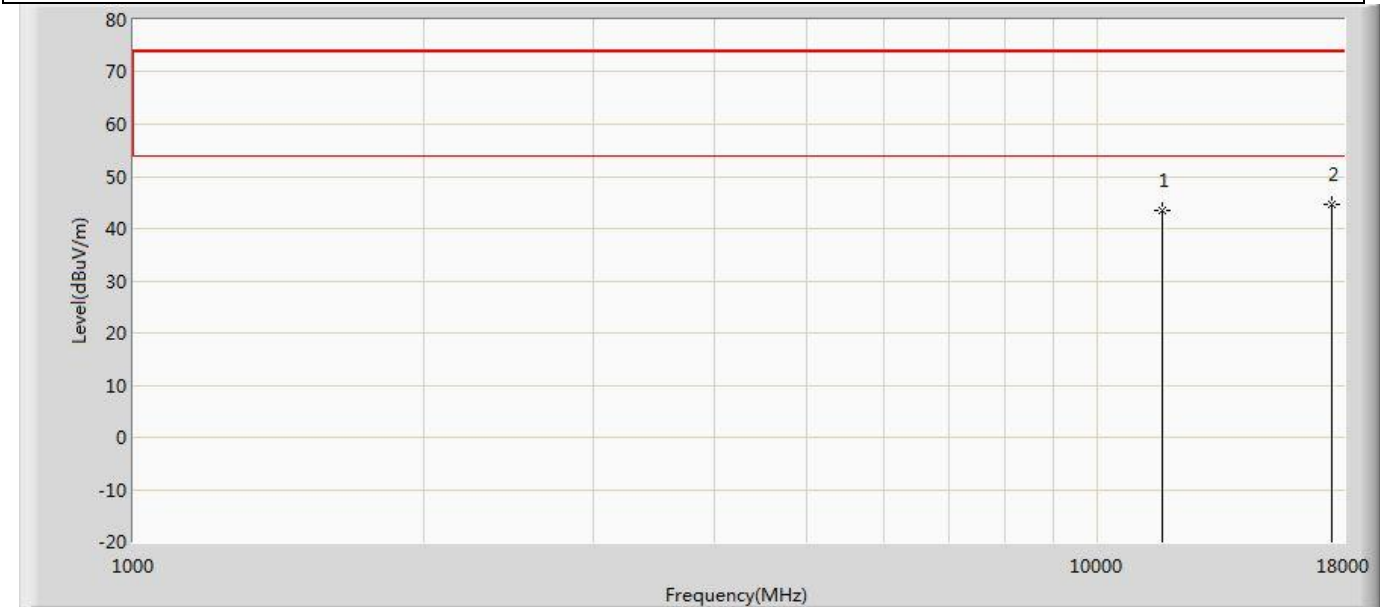


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	43.361	48.599	-30.639	74.000	-5.238	PK
2	*	17475.000	44.578	47.716	-29.422	74.000	-3.139	PK

Profile: 2310083R	Page No.: 306
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 7 : Transmit at 5825MHz by 802.11ax(20MHz)	

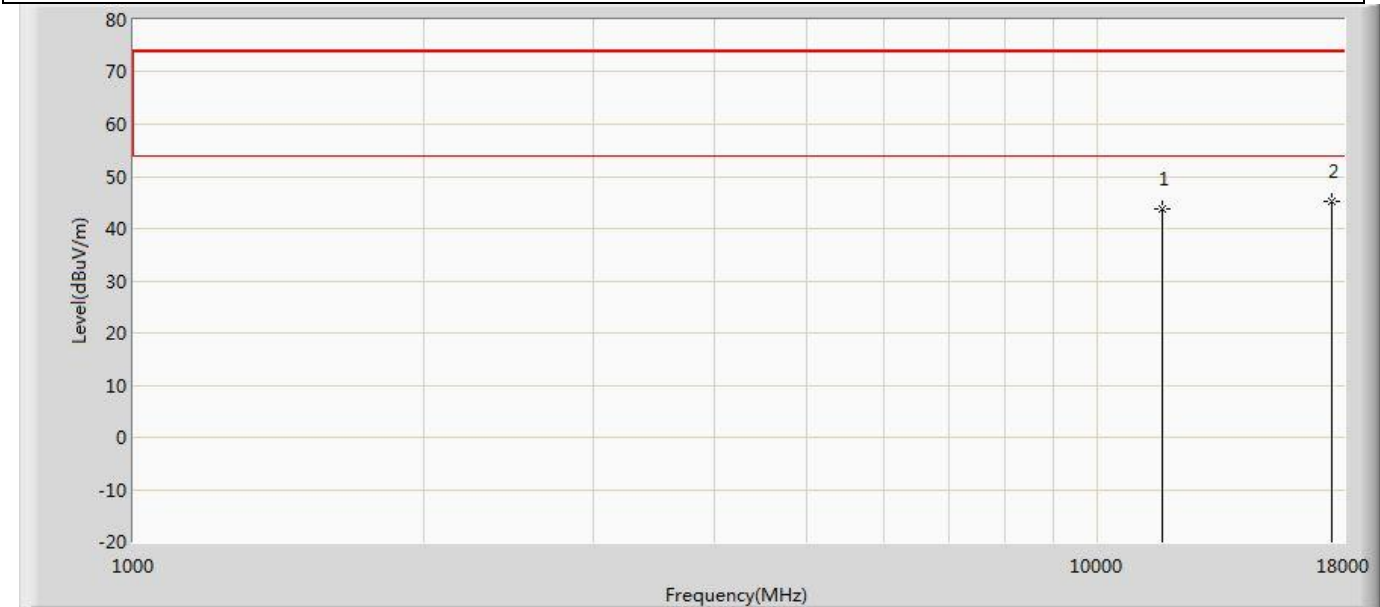


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	43.733	48.971	-30.267	74.000	-5.238	PK
2	*	17475.000	45.352	48.490	-28.648	74.000	-3.139	PK

Profile: 2310083R	Page No.: 307
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5190MHz by 802.11ax(40MHz)	

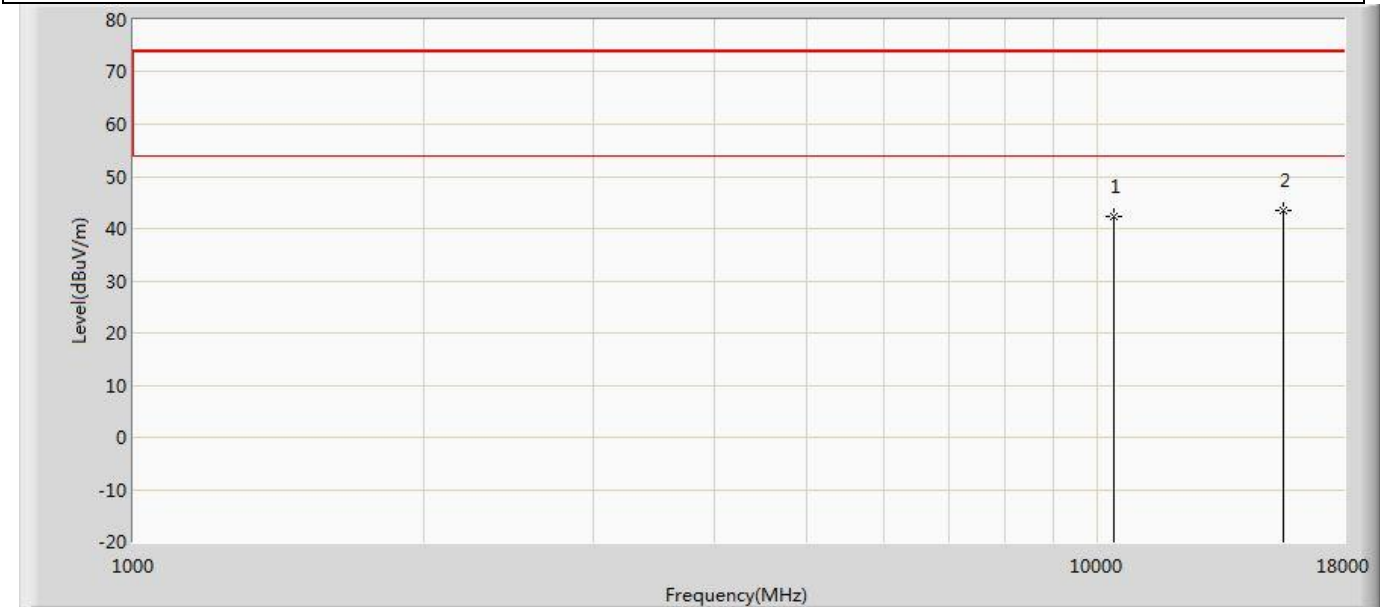


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	42.257	49.730	-31.743	74.000	-7.473	PK
2	*	15570.000	43.335	47.924	-30.665	74.000	-4.588	PK

Profile: 2310083R	Page No.: 308
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5190MHz by 802.11ax(40MHz)	

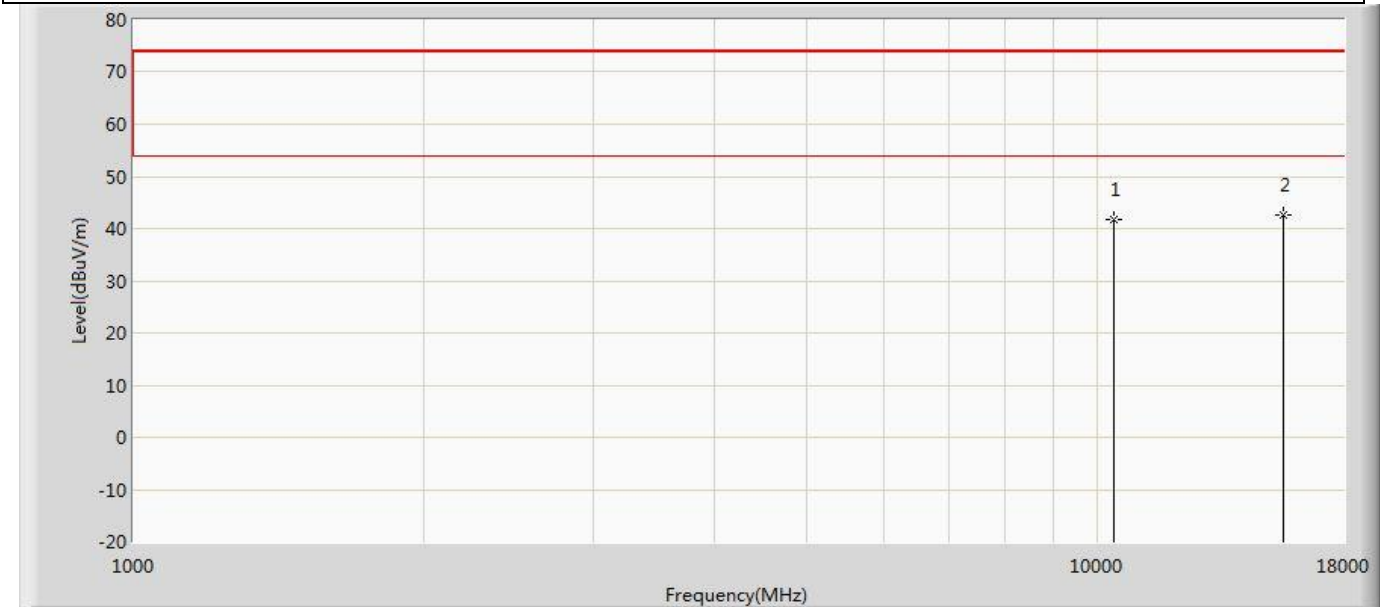

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	41.787	49.260	-32.213	74.000	-7.473	PK
2	*	15570.000	42.723	47.312	-31.277	74.000	-4.588	PK


Profile: 2310083R	Page No.: 309
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5230MHz by 802.11ax(40MHz)	

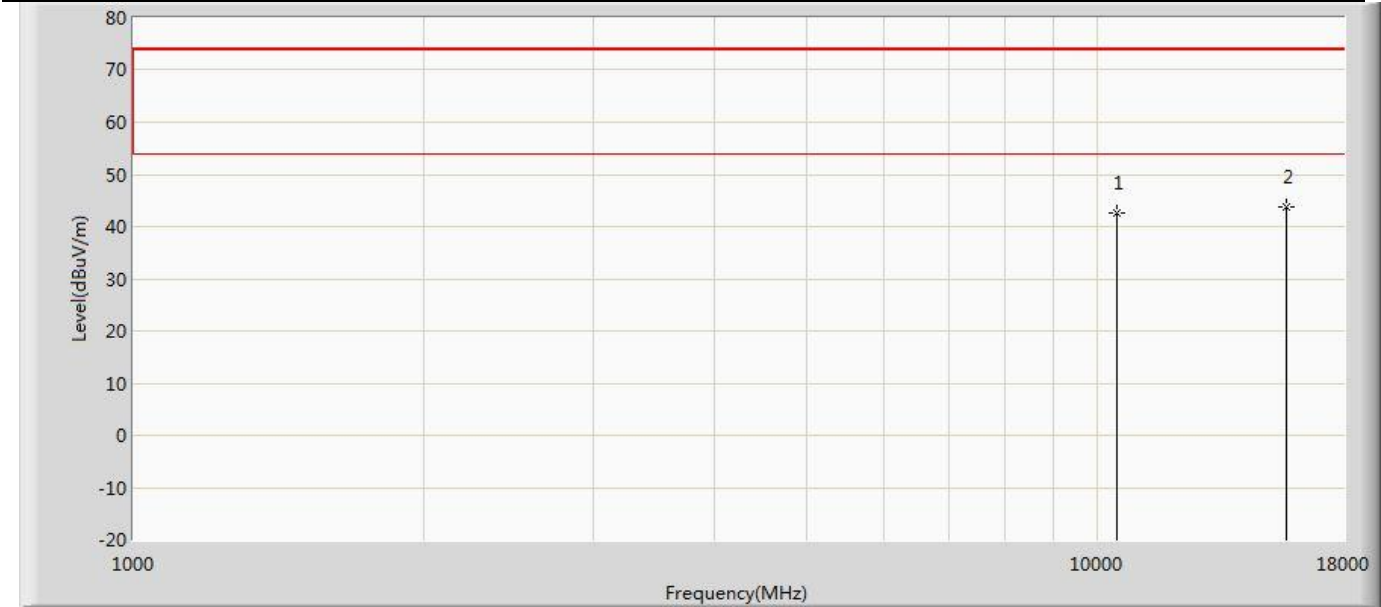

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	42.467	49.554	-31.533	74.000	-7.088	PK
2	*	15690.000	43.711	48.097	-30.289	74.000	-4.387	PK




Profile: 2310083R	Page No.: 310
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5230MHz by 802.11ax(40MHz)	

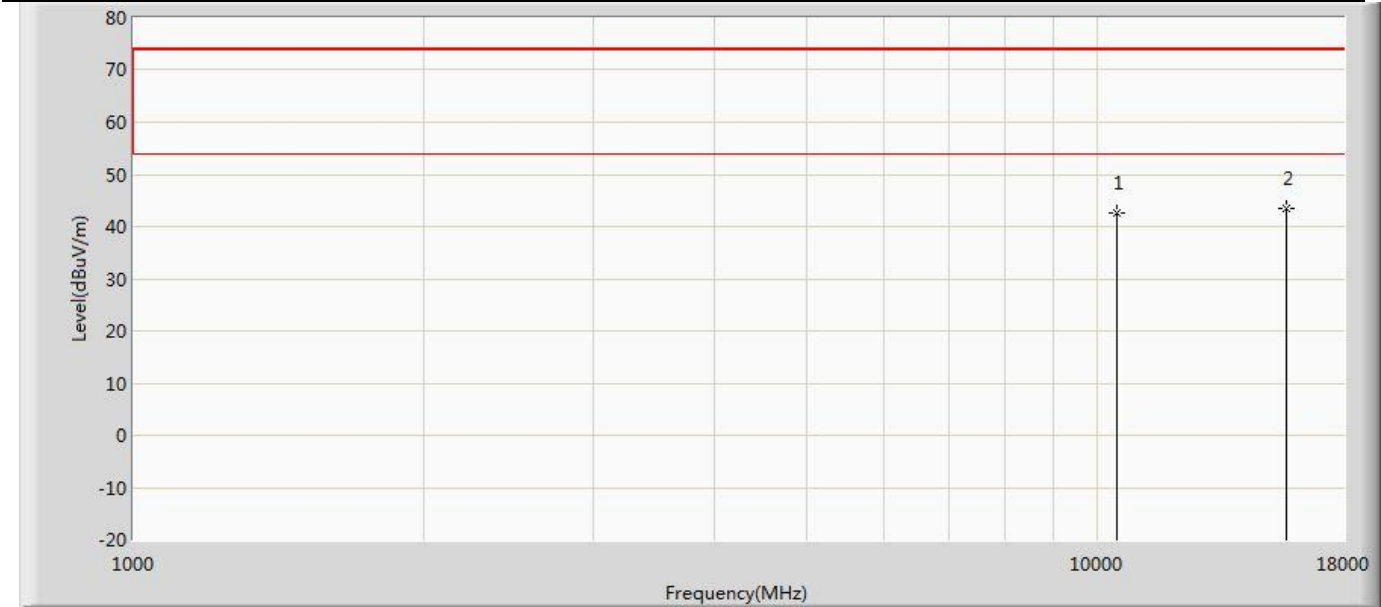


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	42.626	49.713	-31.374	74.000	-7.088	PK
2	*	15690.000	43.459	47.845	-30.541	74.000	-4.387	PK

Profile: 2310083R	Page No.: 311
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5270MHz by 802.11ax(40MHz)	

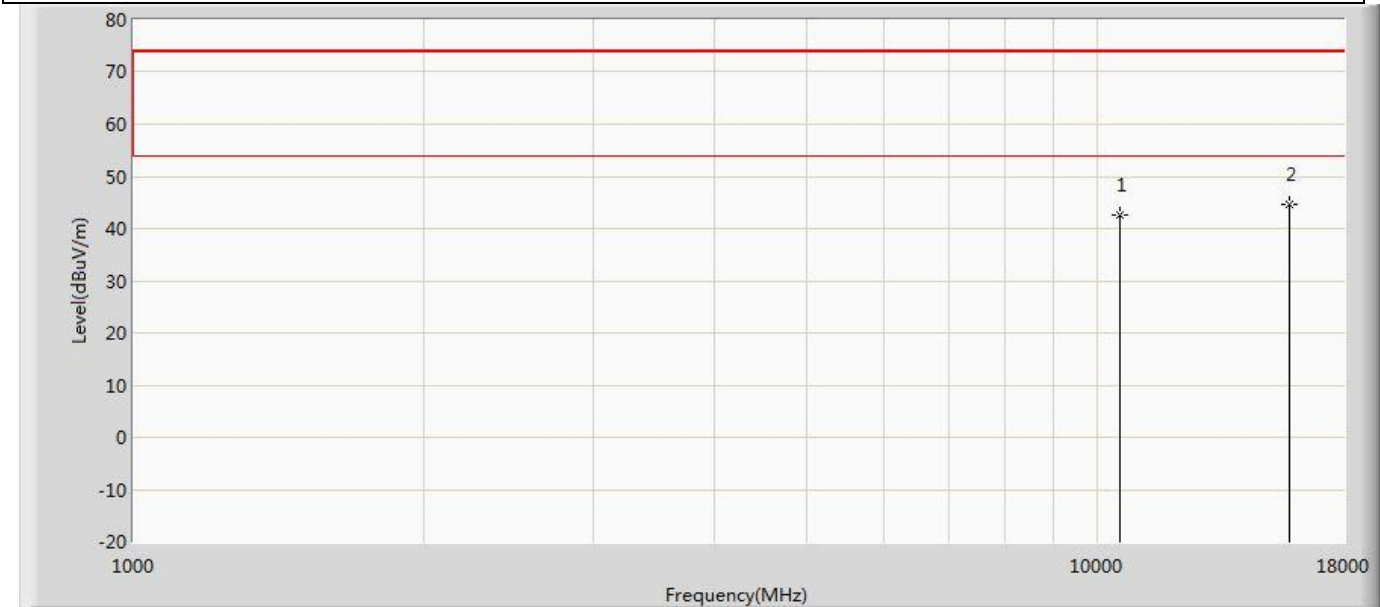


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	42.595	49.793	-31.405	74.000	-7.198	PK
2	*	15810.000	44.562	47.741	-29.438	74.000	-3.179	PK

Profile: 2310083R	Page No.: 312
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5270MHz by 802.11ax(40MHz)	

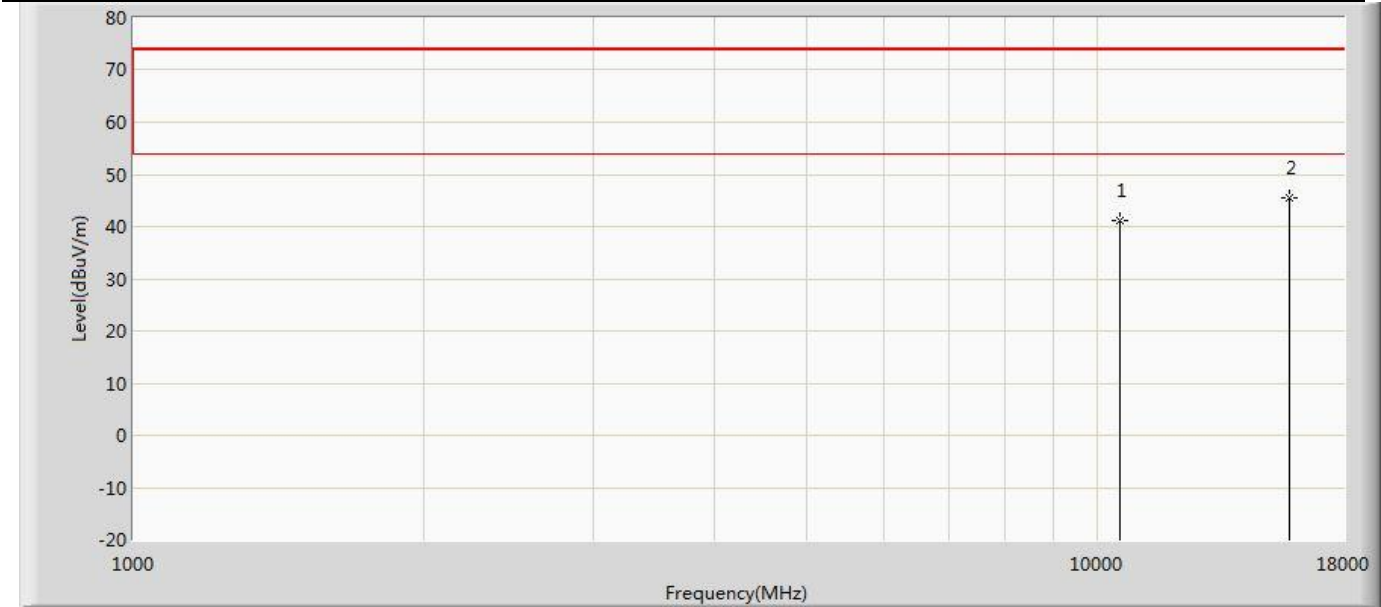


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	41.216	48.414	-32.784	74.000	-7.198	PK
2	*	15810.000	45.381	48.560	-28.619	74.000	-3.179	PK

Profile: 2310083R	Page No.: 313
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5310MHz by 802.11ax(40MHz)	

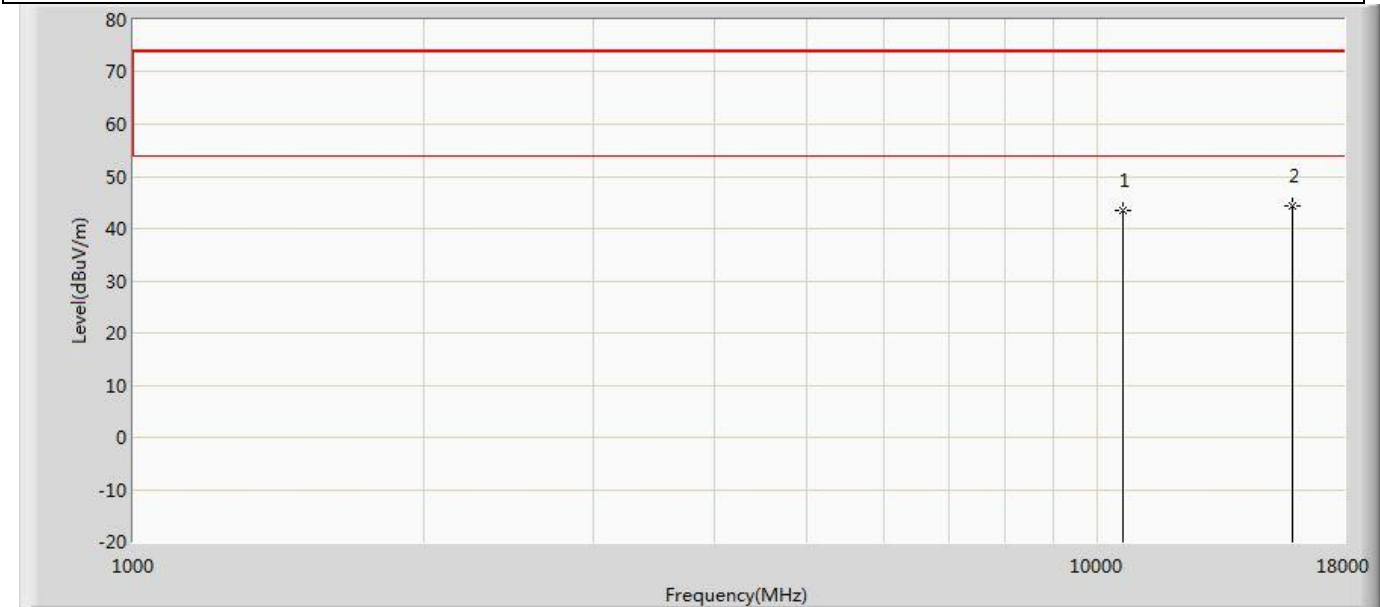


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	43.357	50.322	-30.643	74.000	-6.965	PK
2	*	15930.000	44.467	47.286	-29.533	74.000	-2.819	PK

Profile: 2310083R	Page No.: 314
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5310MHz by 802.11ax(40MHz)	

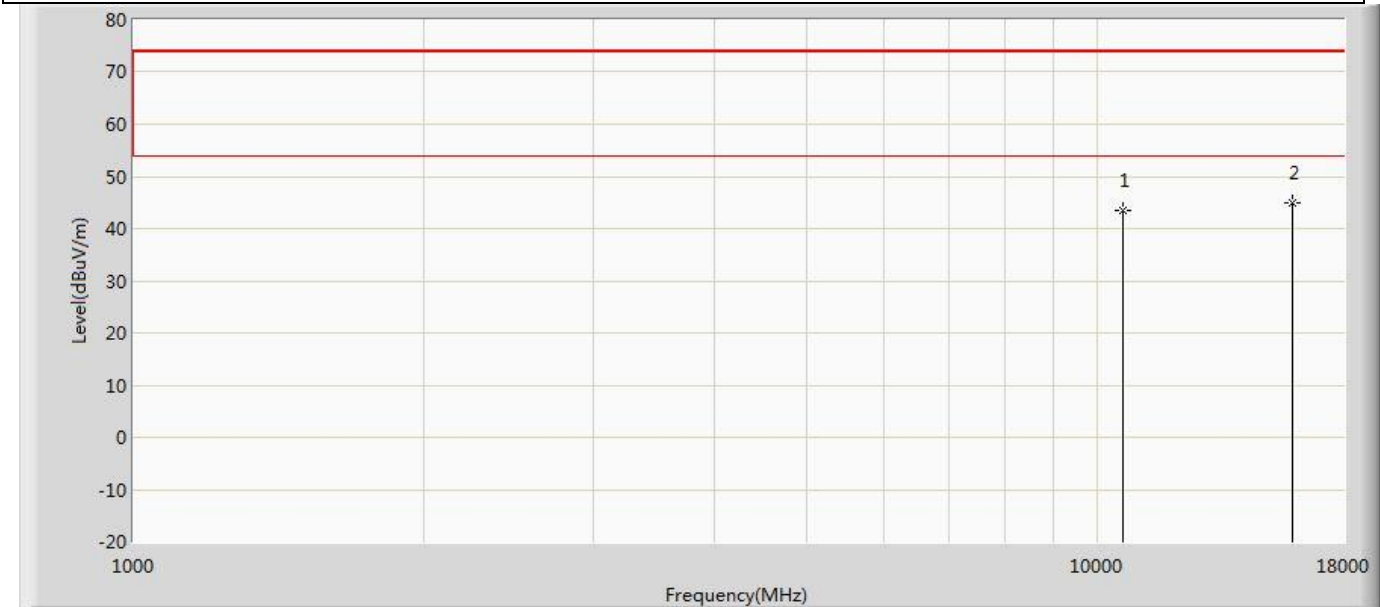


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	43.433	50.398	-30.567	74.000	-6.965	PK
2	*	15930.000	44.894	47.713	-29.106	74.000	-2.819	PK

Profile: 2310083R	Page No.: 315
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5510MHz by 802.11ax(40MHz)	

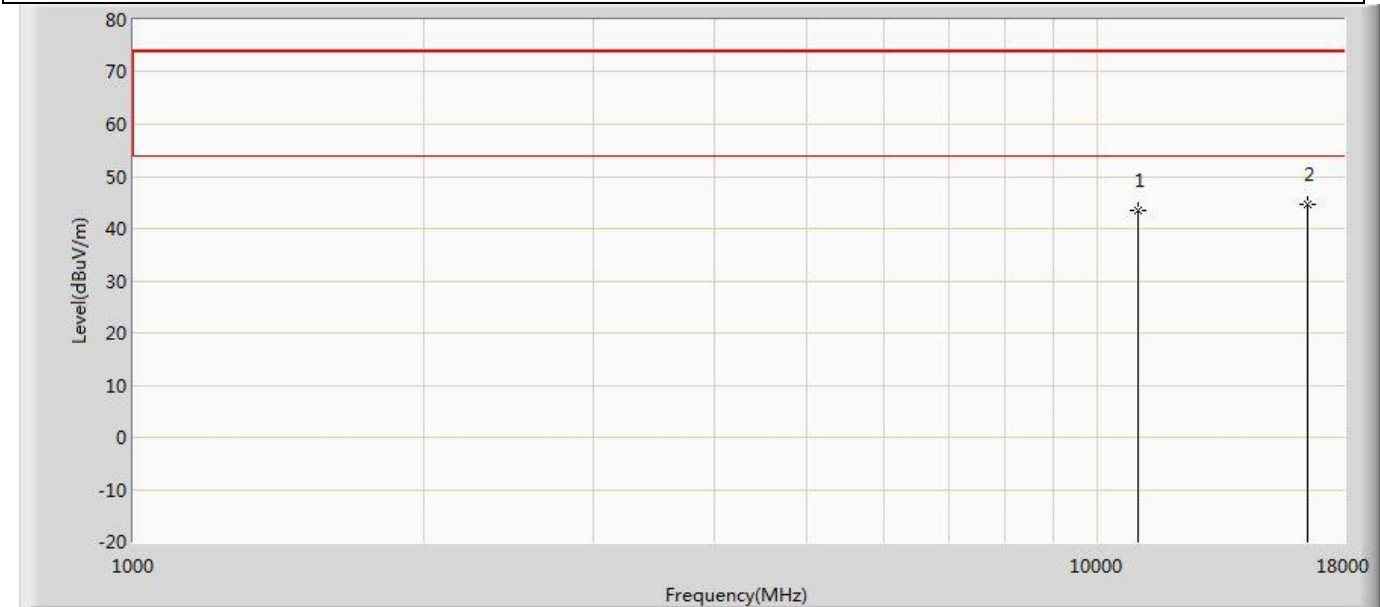


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	43.550	49.730	-30.450	74.000	-6.180	PK
2	*	16530.000	44.713	48.244	-29.287	74.000	-3.532	PK

Profile: 2310083R	Page No.: 316
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5510MHz by 802.11ax(40MHz)	

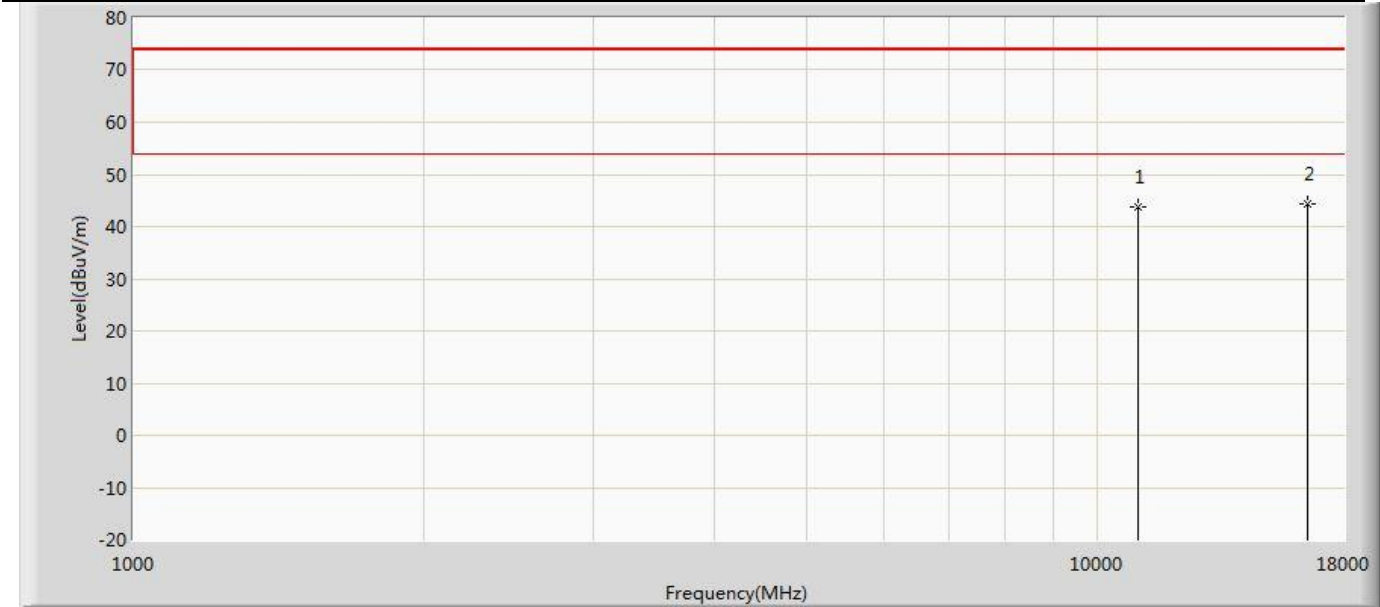


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	43.702	49.882	-30.298	74.000	-6.180	PK
2	*	16530.000	44.336	47.494	-29.664	74.000	-3.158	PK

Profile: 2310083R	Page No.: 317
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5590MHz by 802.11ax(40MHz)	

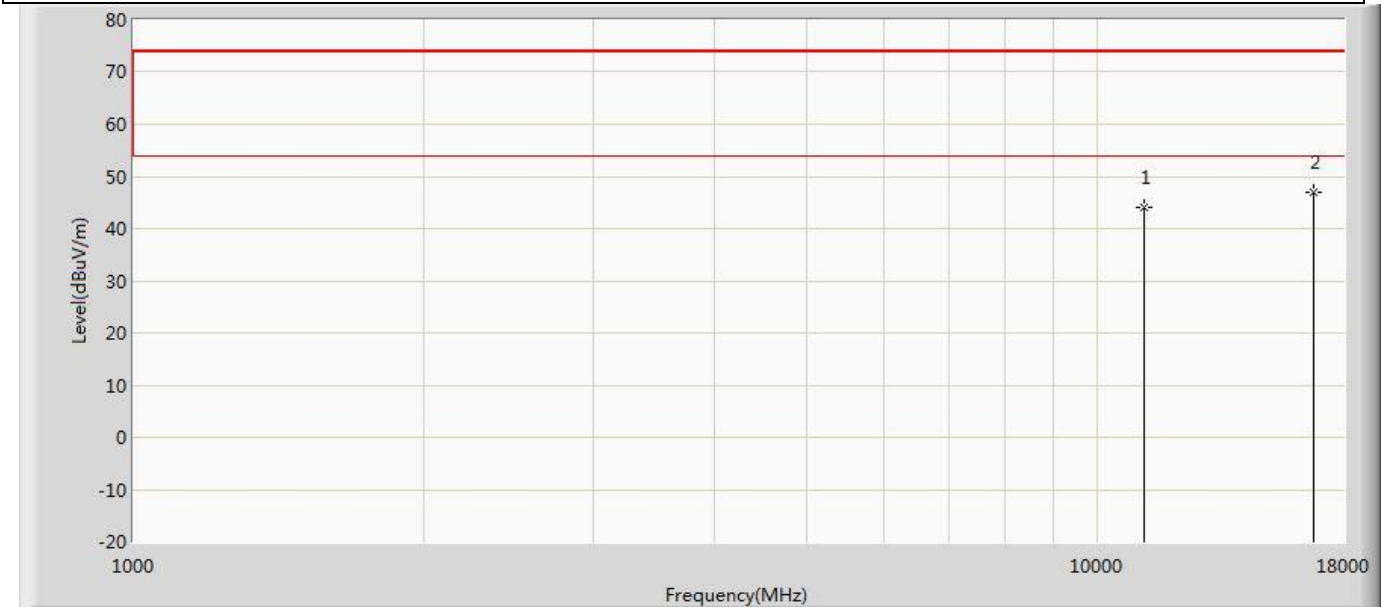


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.173	49.858	-29.827	74.000	-5.685	PK
2	*	16770.000	46.952	49.679	-27.048	74.000	-2.727	PK

Profile: 2310083R	Page No.: 318
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5590MHz by 802.11ax(40MHz)	

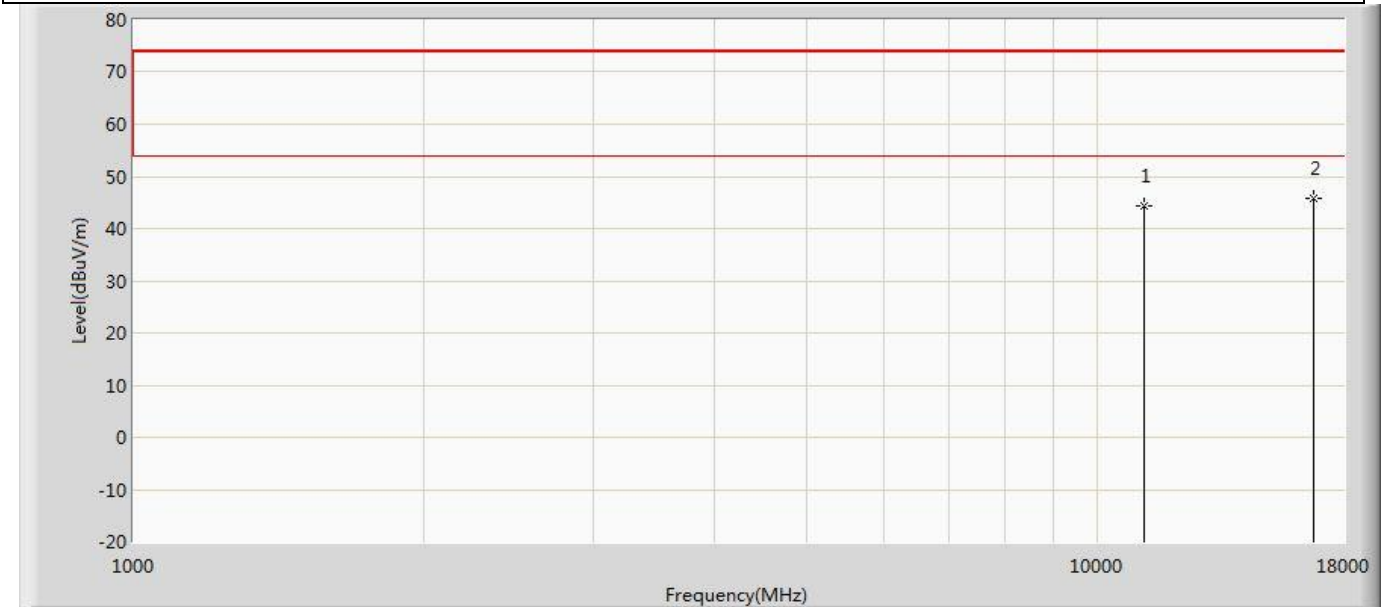


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.486	50.171	-29.514	74.000	-5.685	PK
2	*	16770.000	45.906	48.251	-28.094	74.000	-2.345	PK

Profile: 2310083R	Page No.: 319
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5670MHz by 802.11ax(40MHz)	

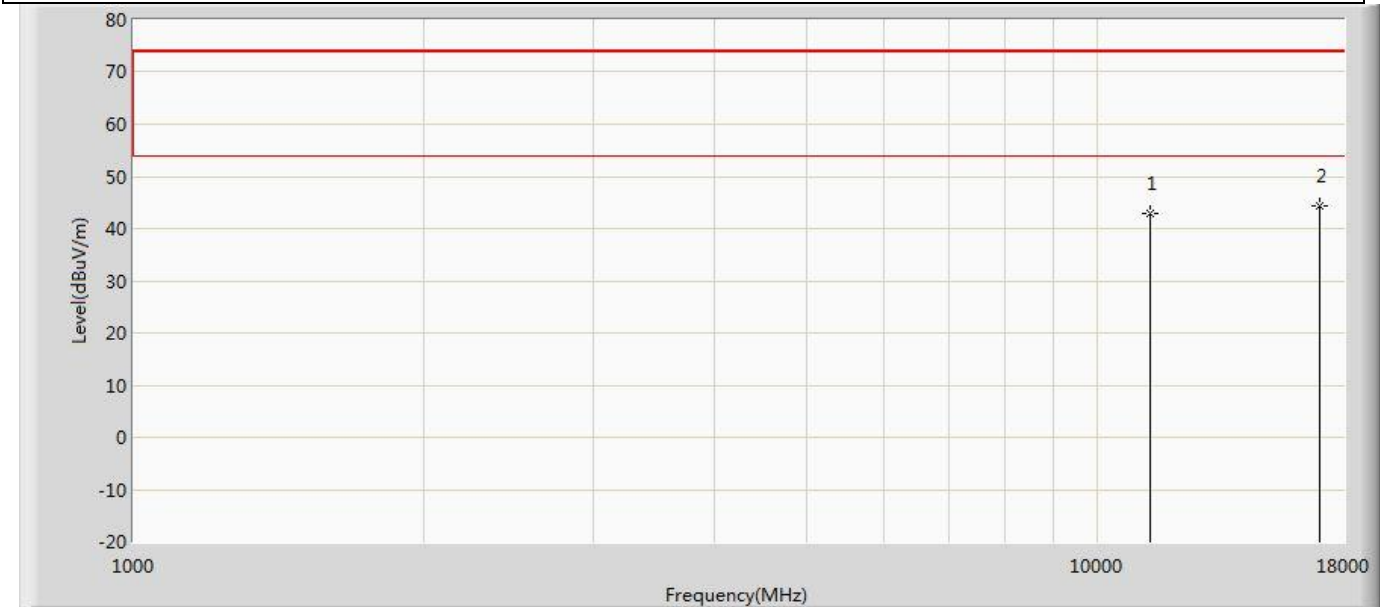


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	43.040	48.997	-30.960	74.000	-5.957	PK
2	*	17010.000	44.402	48.204	-29.598	74.000	-3.802	PK

Profile: 2310083R	Page No.: 320
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5670MHz by 802.11ax(40MHz)	

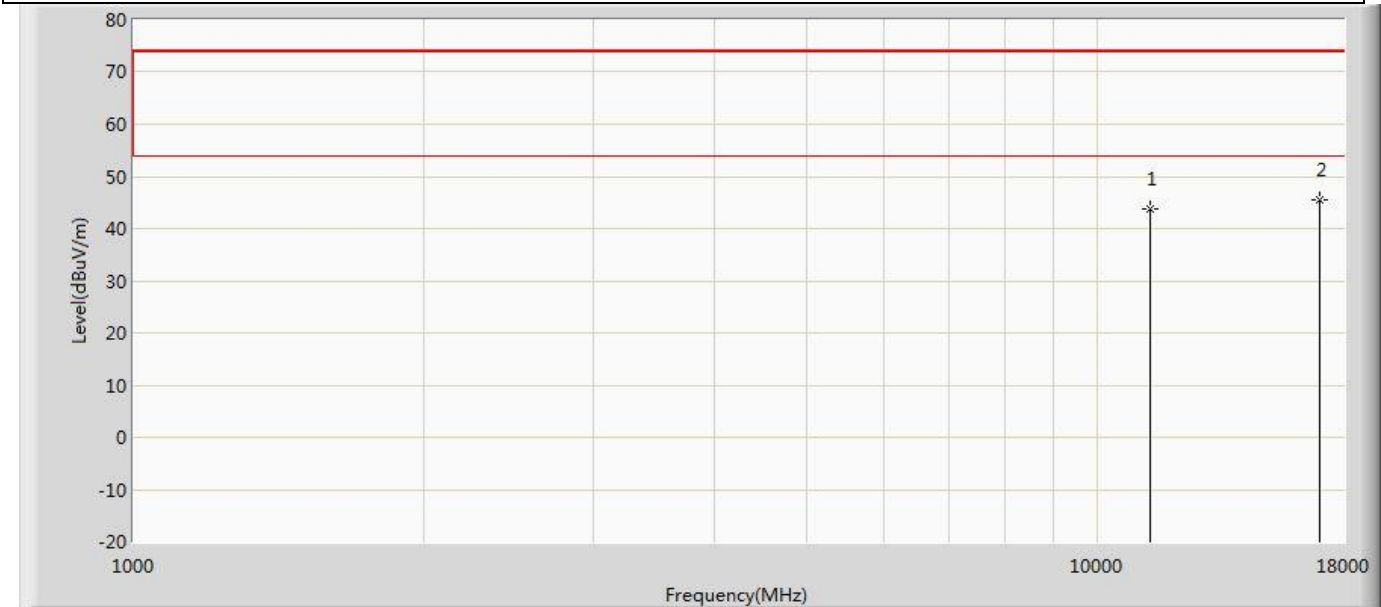


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	43.755	49.712	-30.245	74.000	-5.957	PK
2	*	17010.000	45.448	48.462	-28.552	74.000	-3.014	PK

Profile: 2310083R	Page No.: 321
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5755MHz by 802.11ax(40MHz)	

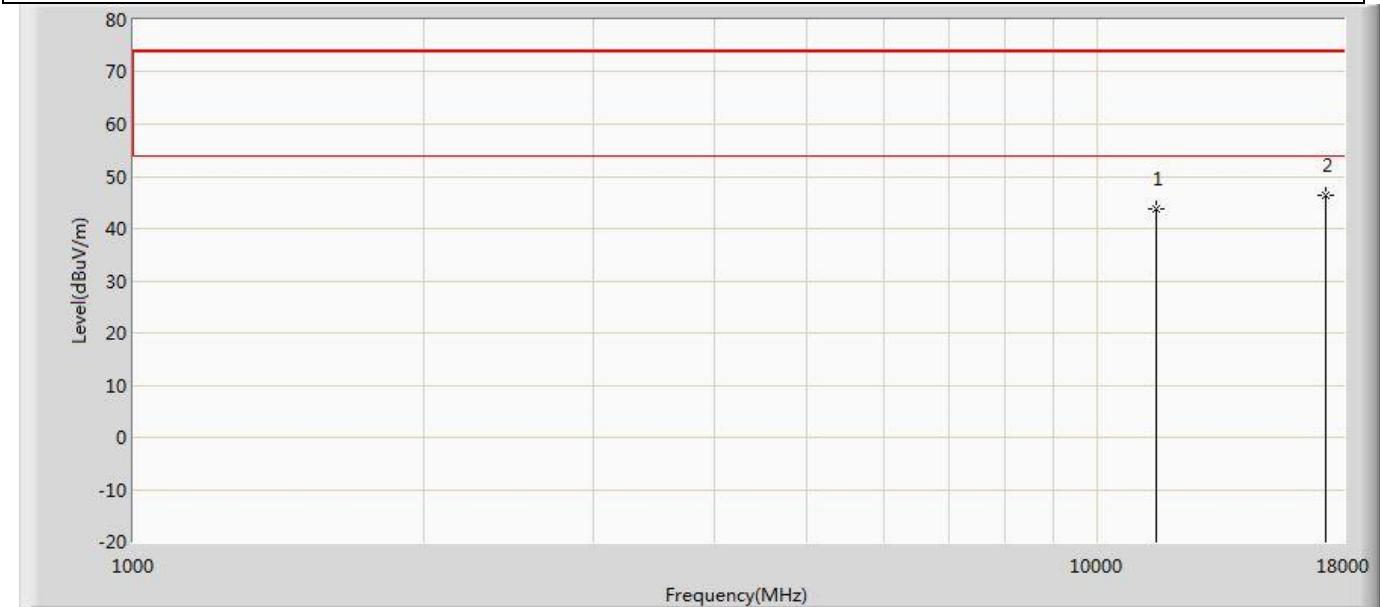


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	43.703	49.570	-30.297	74.000	-5.868	PK
2	*	17265.000	46.507	49.605	-27.493	74.000	-3.097	PK

Profile: 2310083R	Page No.: 322
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5755MHz by 802.11ax(40MHz)	

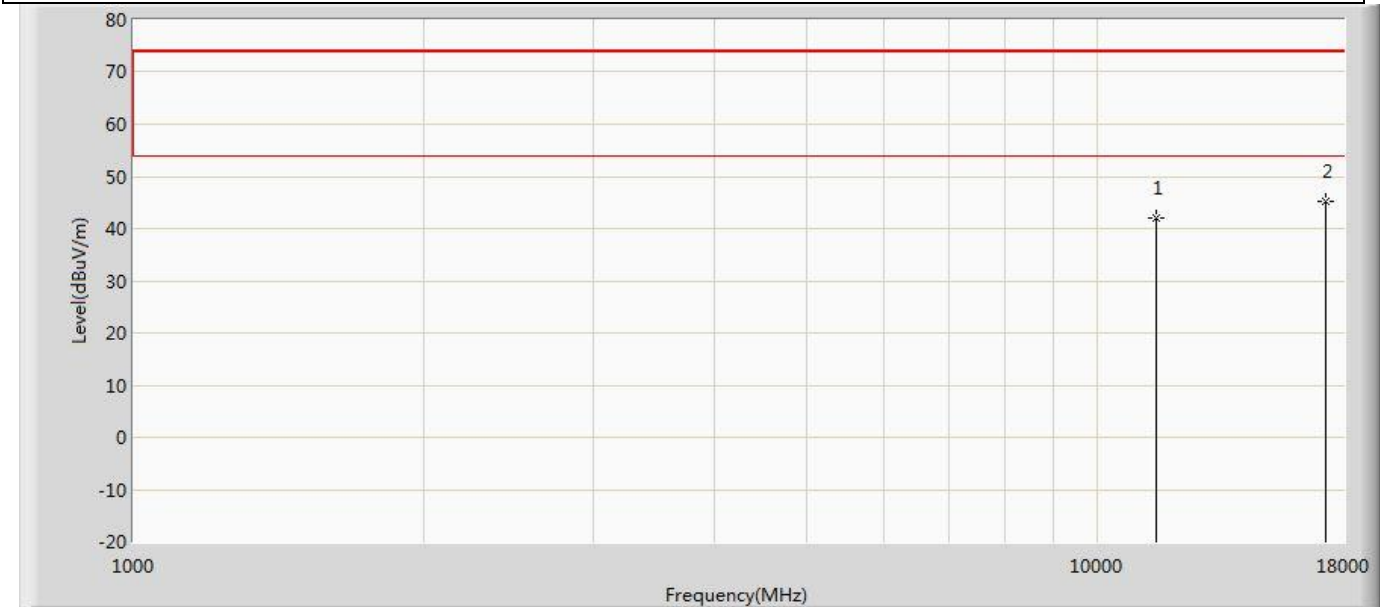


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	41.905	47.772	-32.095	74.000	-5.868	PK
2	*	17265.000	45.235	47.771	-28.765	74.000	-2.535	PK

Profile: 2310083R	Page No.: 323
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5795MHz by 802.11ax(40MHz)	

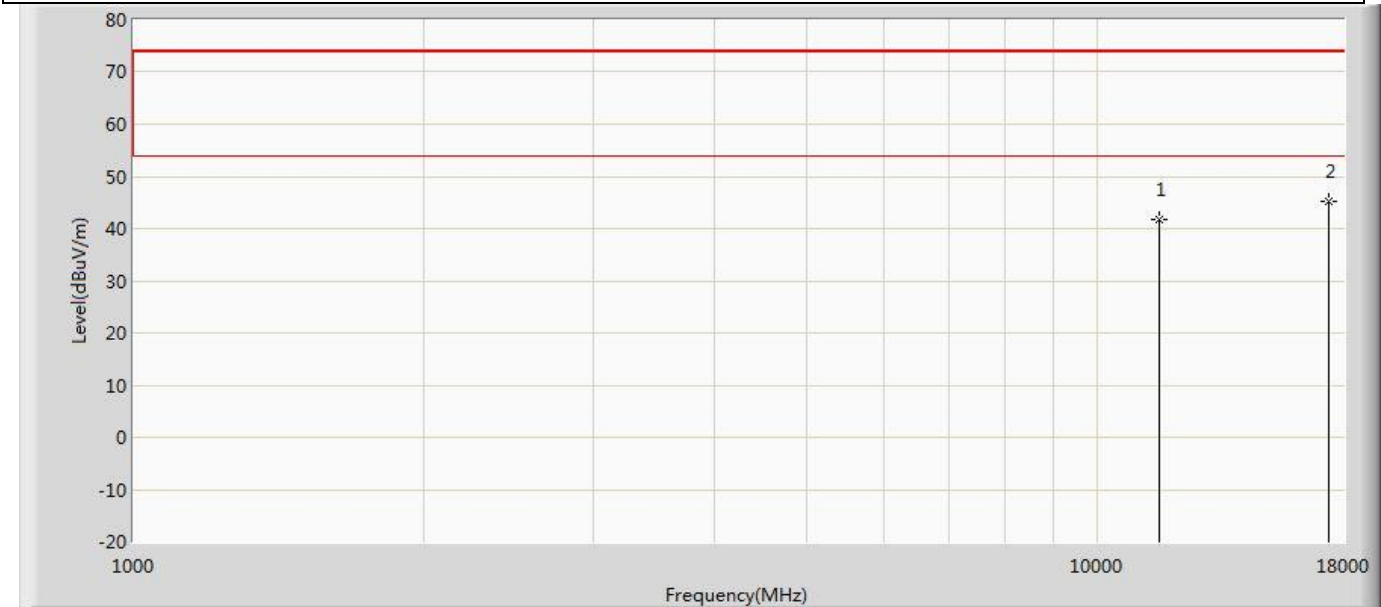


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	41.646	47.556	-32.354	74.000	-5.910	PK
2	*	17385.000	45.086	48.154	-28.914	74.000	-3.068	PK

Profile: 2310083R	Page No.: 324
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5795MHz by 802.11ax(40MHz)	

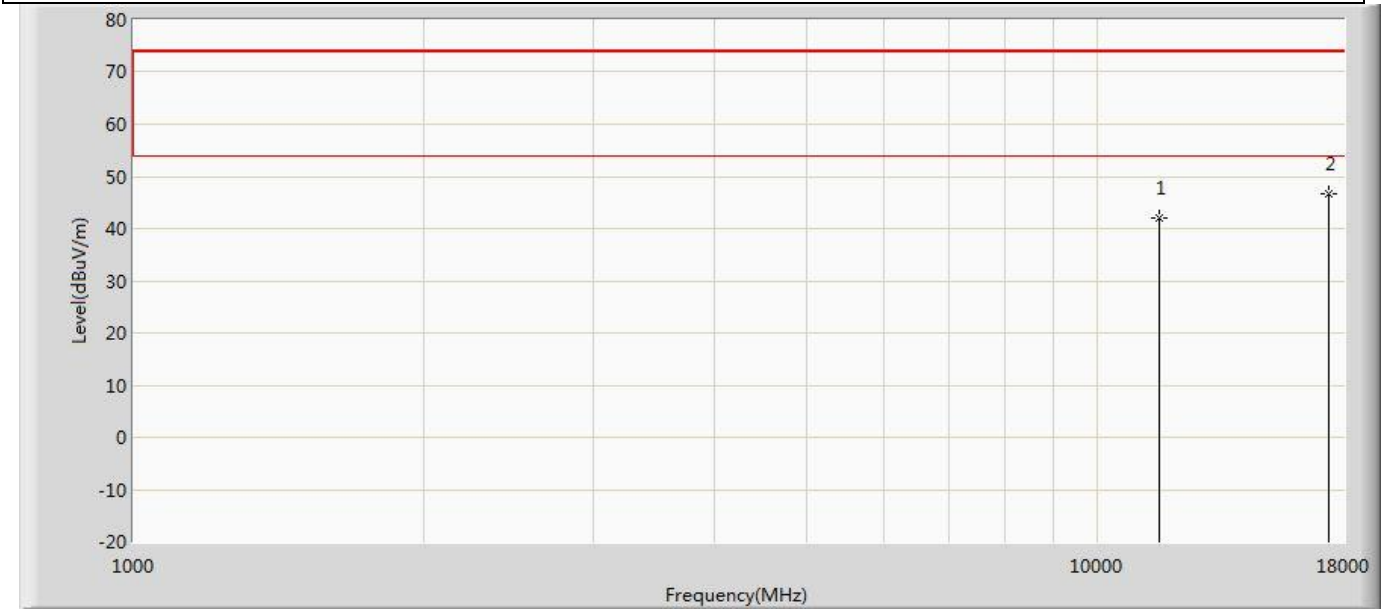


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	42.116	48.026	-31.884	74.000	-5.910	PK
2	*	17385.000	46.592	49.451	-27.408	74.000	-2.860	PK

Profile: 2310083R	Page No.: 325
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

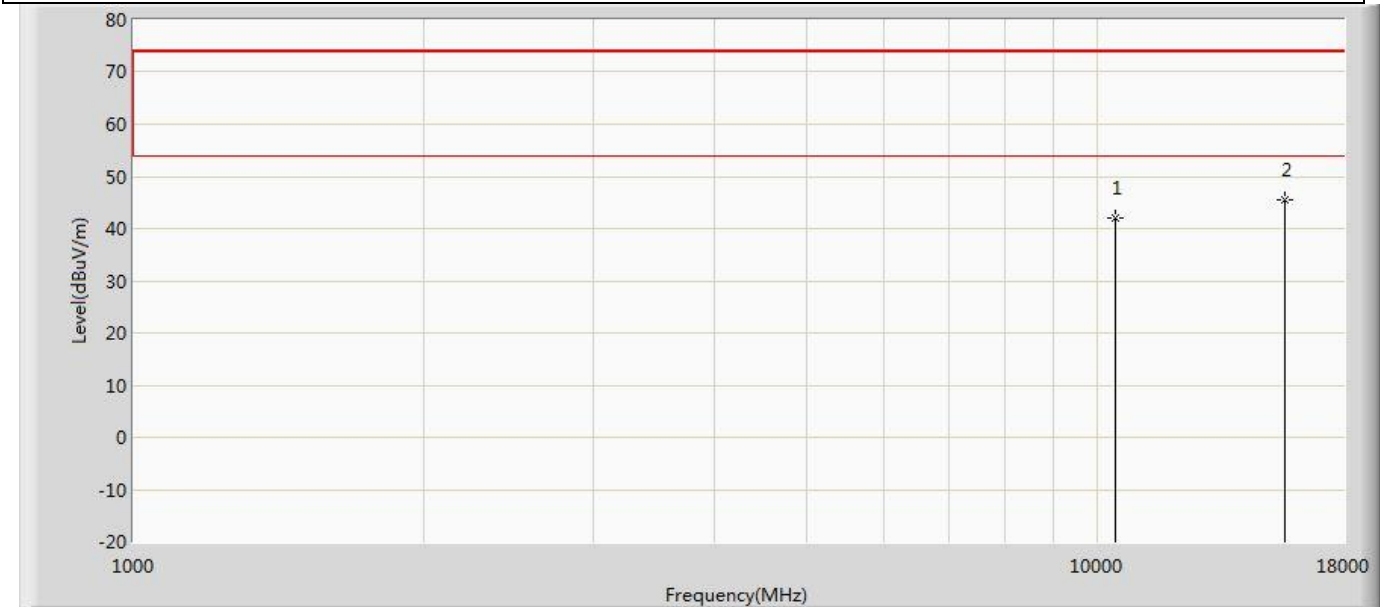


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	42.077	49.329	-31.923	74.000	-7.251	PK
2	*	15630.000	45.363	49.507	-28.637	74.000	-4.143	PK

Profile: 2310083R	Page No.: 326
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

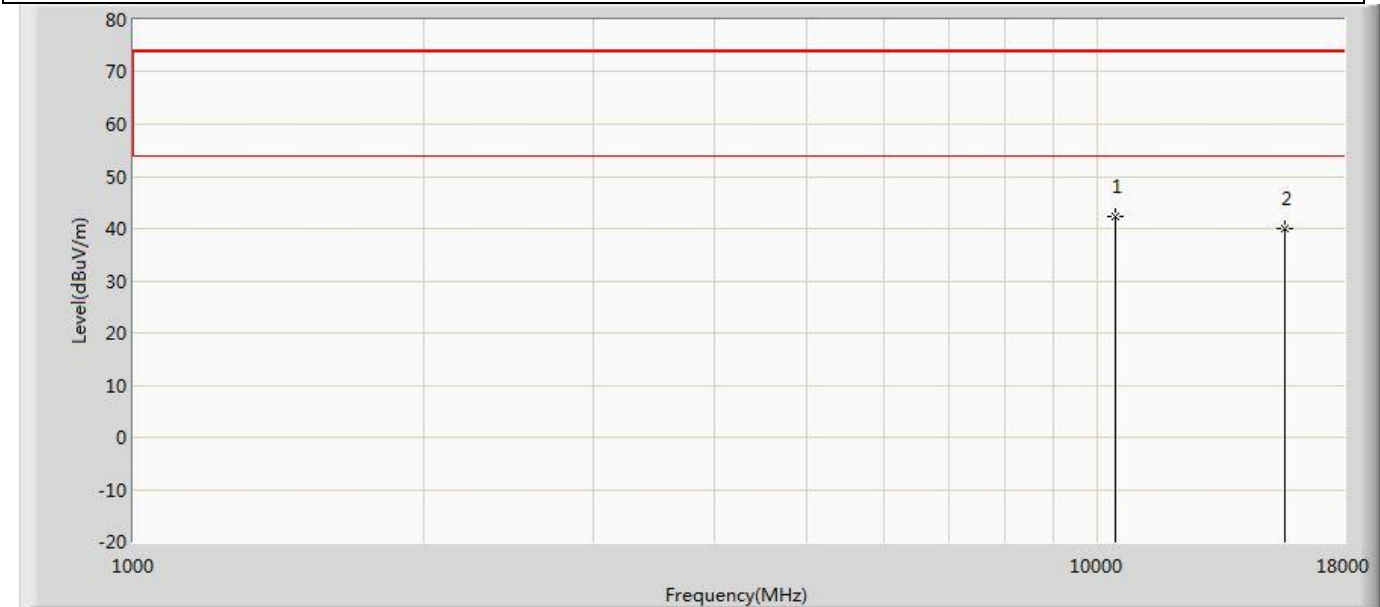


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10420.000	42.411	49.663	-31.589	74.000	-7.251	PK
2		15630.000	40.040	44.184	-33.960	74.000	-4.143	PK

Profile: 2310083R	Page No.: 327
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5290MHz by 802.11ax(80MHz)	

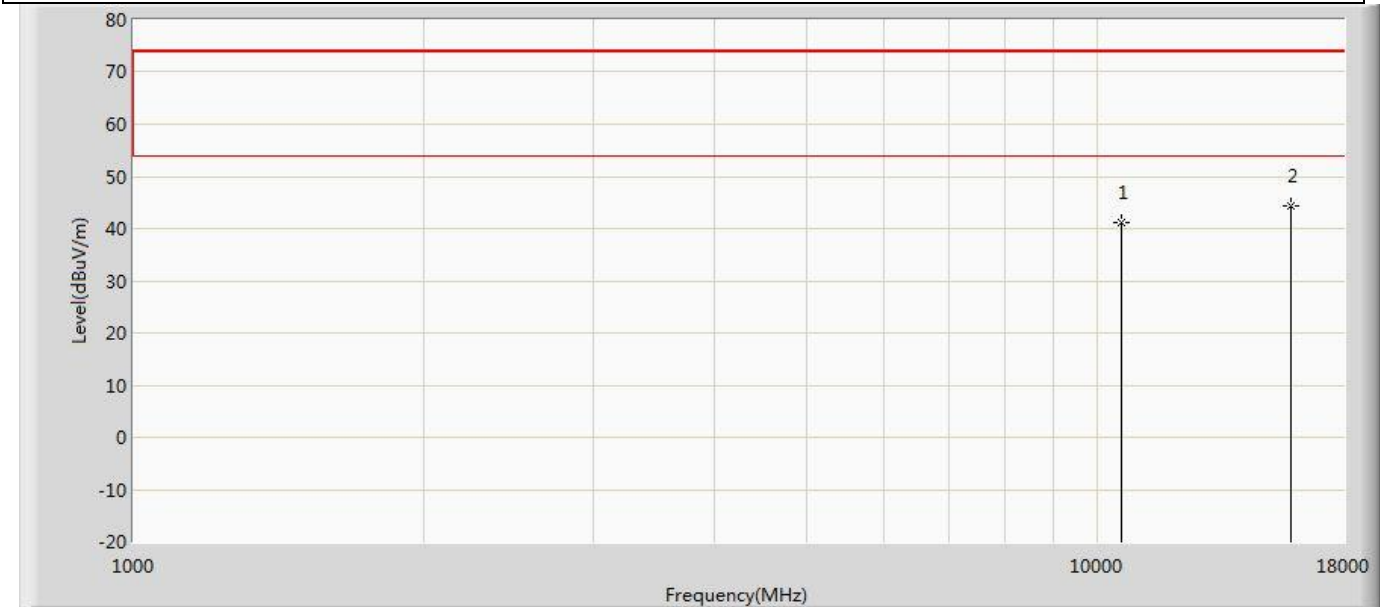


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	41.243	48.157	-32.757	74.000	-6.914	PK
2	*	15870.000	44.402	47.298	-29.598	74.000	-2.897	PK

Profile: 2310083R	Page No.: 328
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5290MHz by 802.11ax(80MHz)	

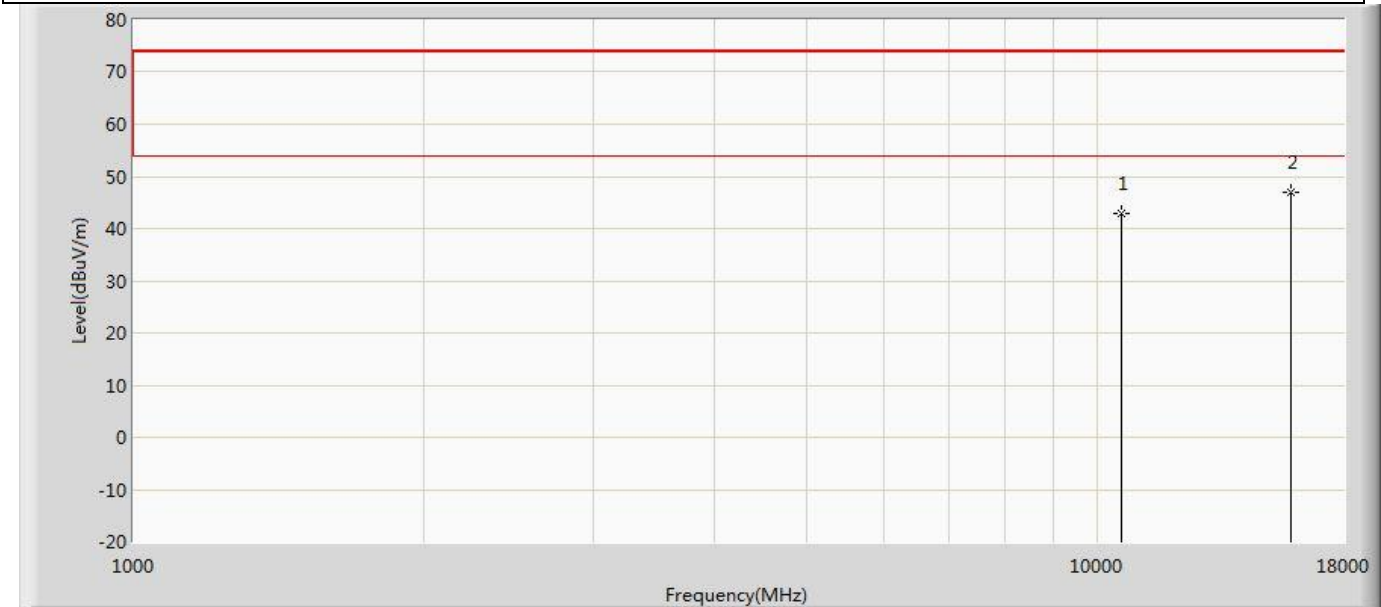


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	42.796	49.710	-31.204	74.000	-6.914	PK
2	*	15870.000	47.063	49.959	-26.937	74.000	-2.897	PK

Profile: 2310083R	Page No.: 329
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5530MHz by 802.11ax(80MHz)	

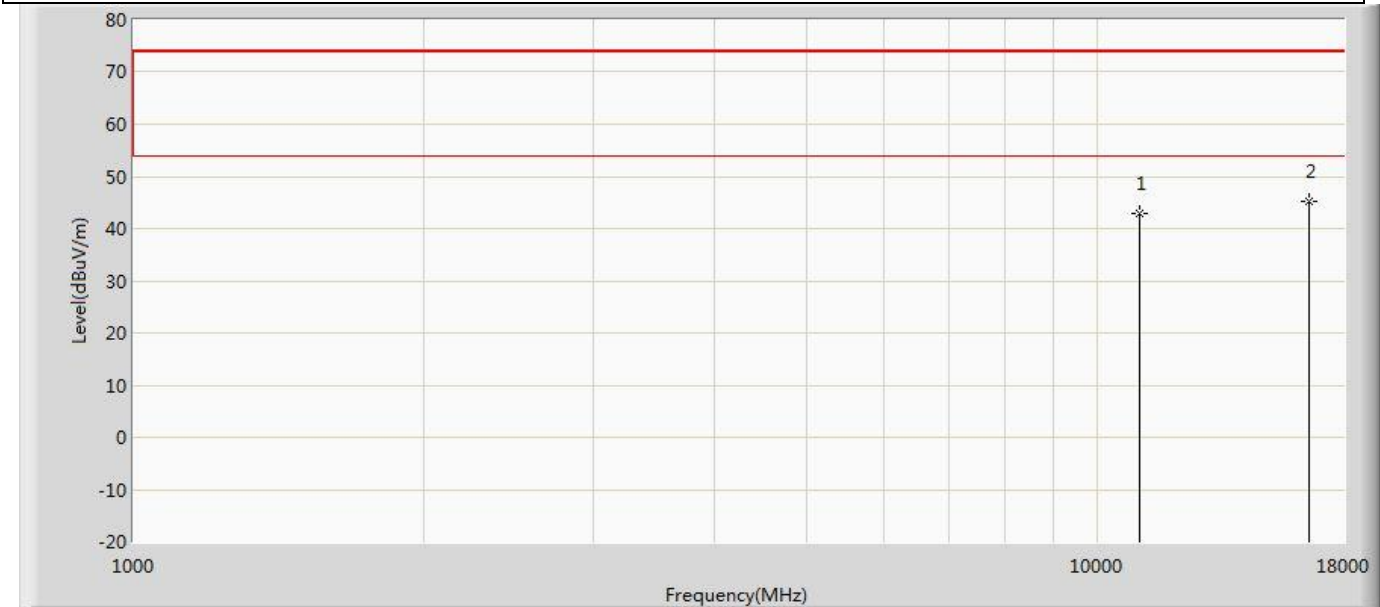


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	42.967	48.859	-31.033	74.000	-5.891	PK
2	*	16590.000	45.259	48.130	-28.741	74.000	-2.872	PK

Profile: 2310083R	Page No.: 330
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5530MHz by 802.11ax(80MHz)	

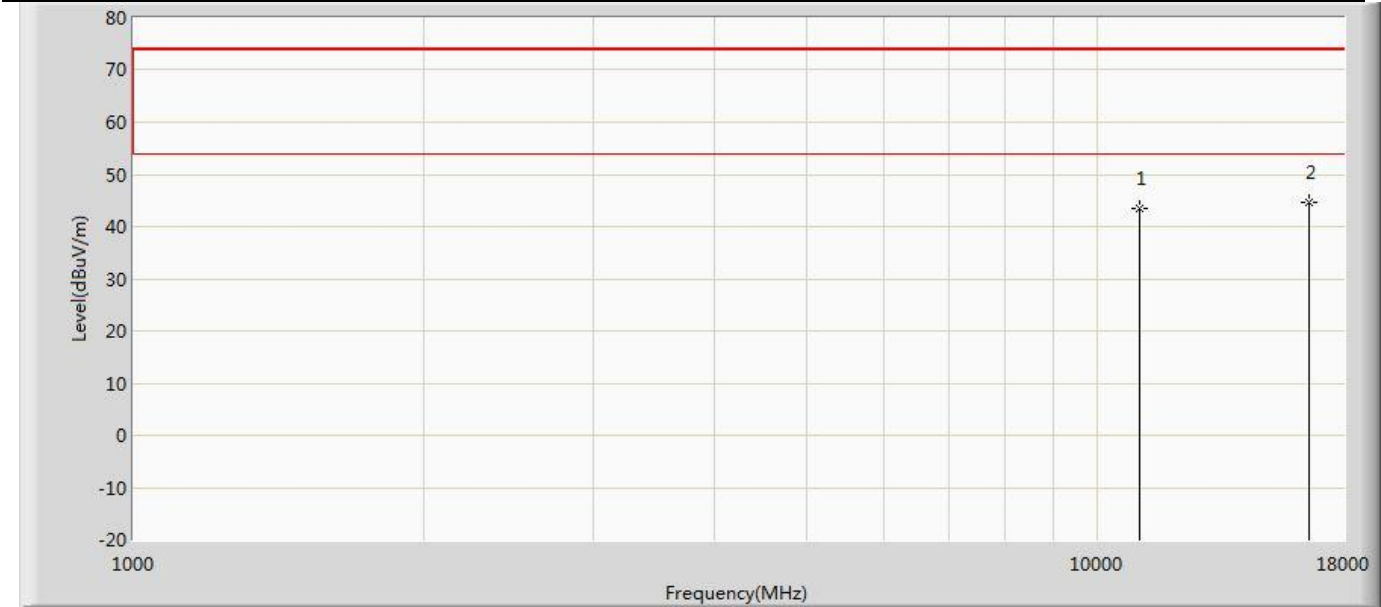


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	43.492	49.384	-30.508	74.000	-5.891	PK
2	*	16590.000	44.651	47.325	-29.349	74.000	-2.675	PK

Profile: 2310083R	Page No.: 331
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5775MHz by 802.11ax(80MHz)	

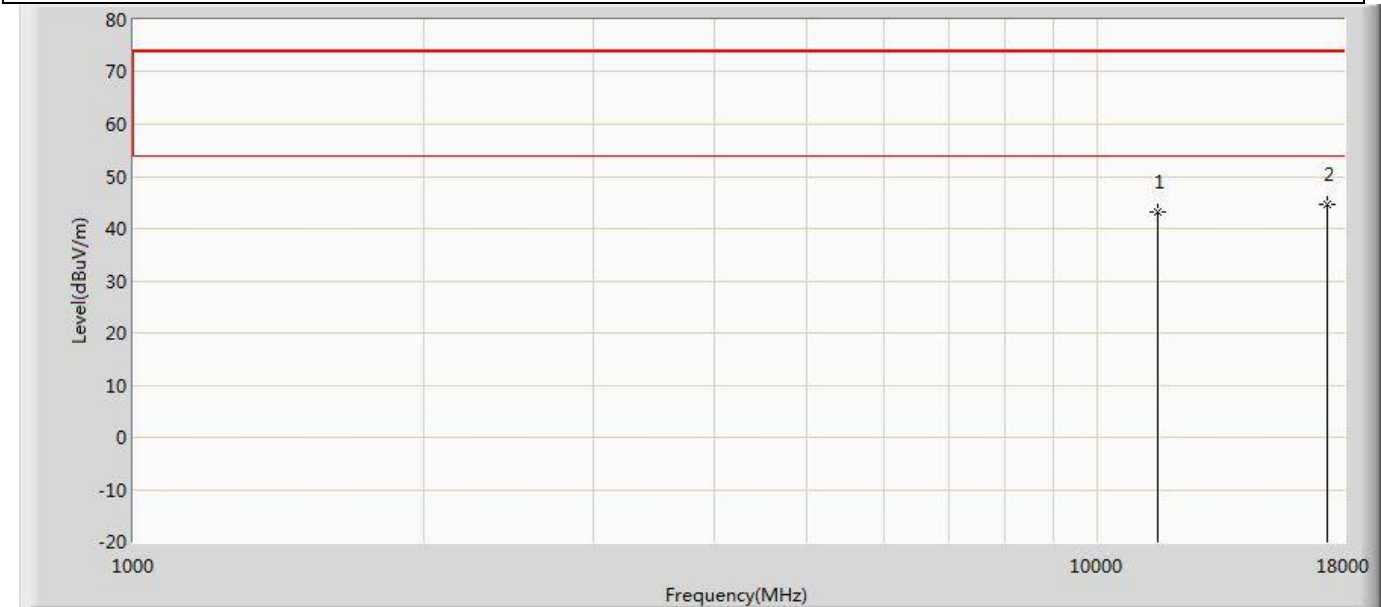

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	43.305	48.570	-30.695	74.000	-5.265	PK
2	*	17325.000	44.604	48.020	-29.396	74.000	-3.417	PK

Profile: 2310083R	Page No.: 332
Engineer: Yuliu	
Site: AC5	Time: 2023/03/22 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5775MHz by 802.11ax(80MHz)	

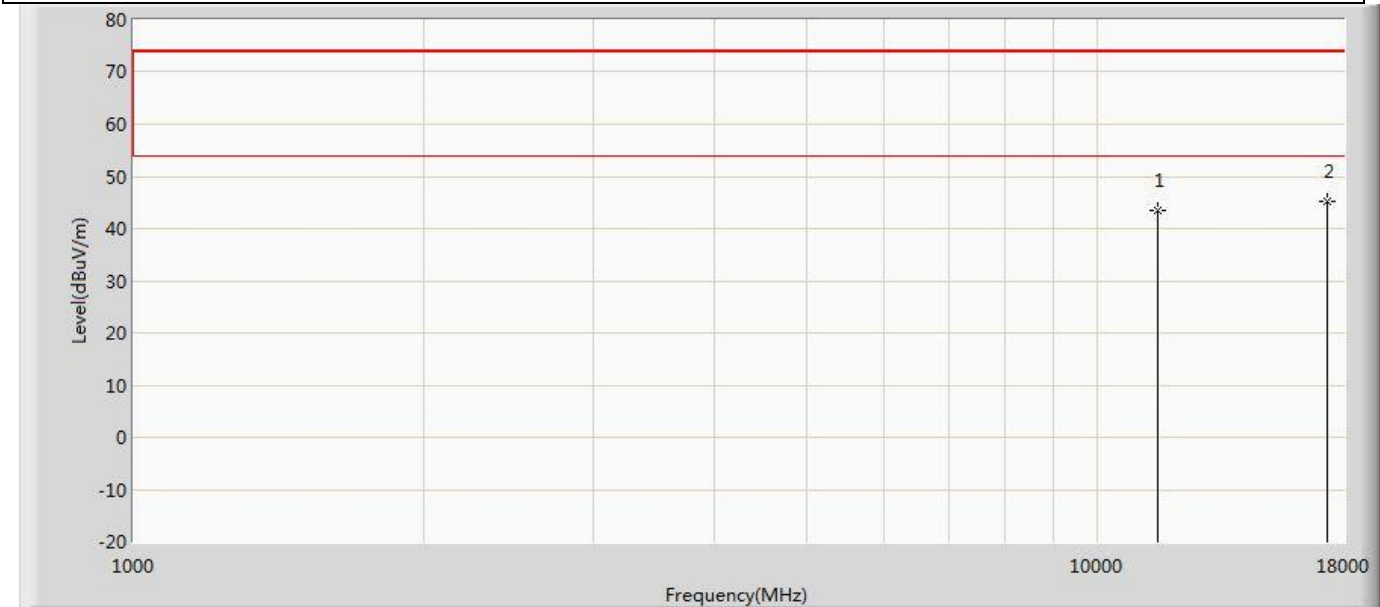


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	43.343	48.608	-30.657	74.000	-5.265	PK
2	*	17325.000	45.314	48.345	-28.686	74.000	-3.031	PK

- Note:
1. Measured Level = Reading Level + Factor.
 2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
 3. The test frequency range, 18GHz~40GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
 4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

The worst case of Radiated Emission below 1GHz:

Profile: 2310083R	Page No.: 135
Engineer: Yuliu	
Site: AC3	Time: 2023/02/08 - 05:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 5180MHz by 802.11a	

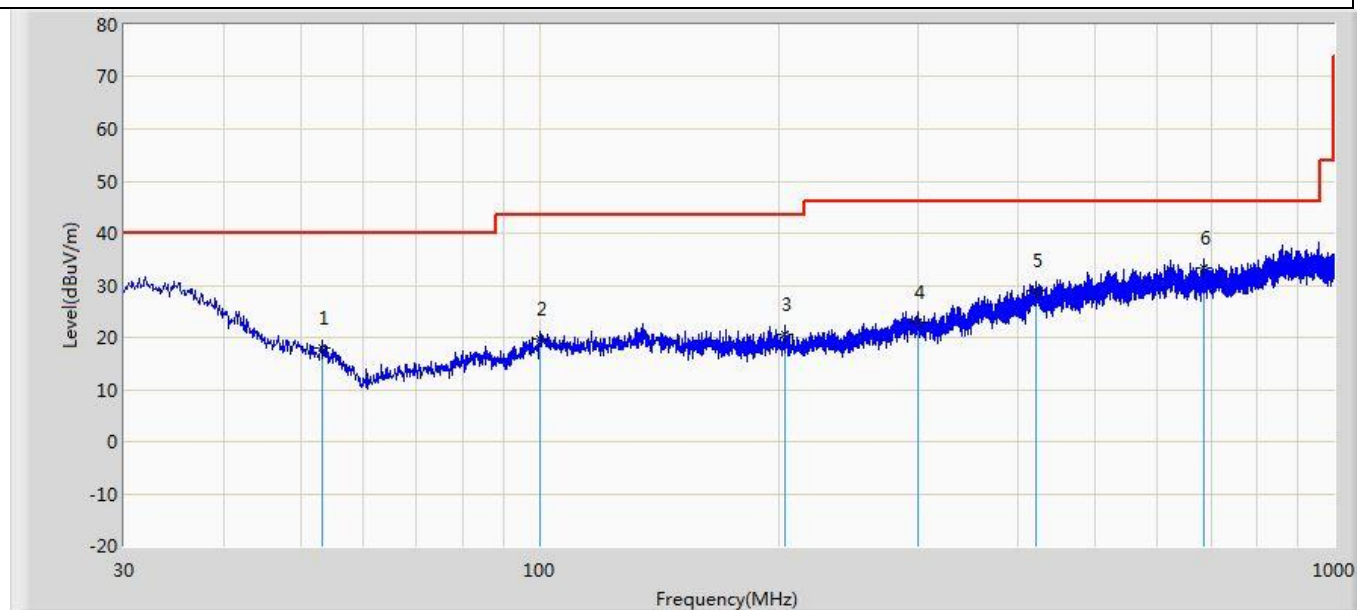


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		53.159	17.856	3.483	-22.144	40.000	14.373	QP
2		100.325	19.651	2.517	-23.849	43.500	17.134	QP
3		203.994	20.448	2.848	-23.052	43.500	17.600	QP
4		299.175	22.976	2.326	-23.024	46.000	20.650	QP
5		421.759	28.915	1.720	-17.085	46.000	27.196	QP
6	*	687.175	33.281	3.890	-12.719	46.000	29.391	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Profile: 2310083R	Page No.: 136
Engineer: Yuliu	
Site: AC3	Time: 2023/02/08 - 05:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 5180MHz by 802.11a	

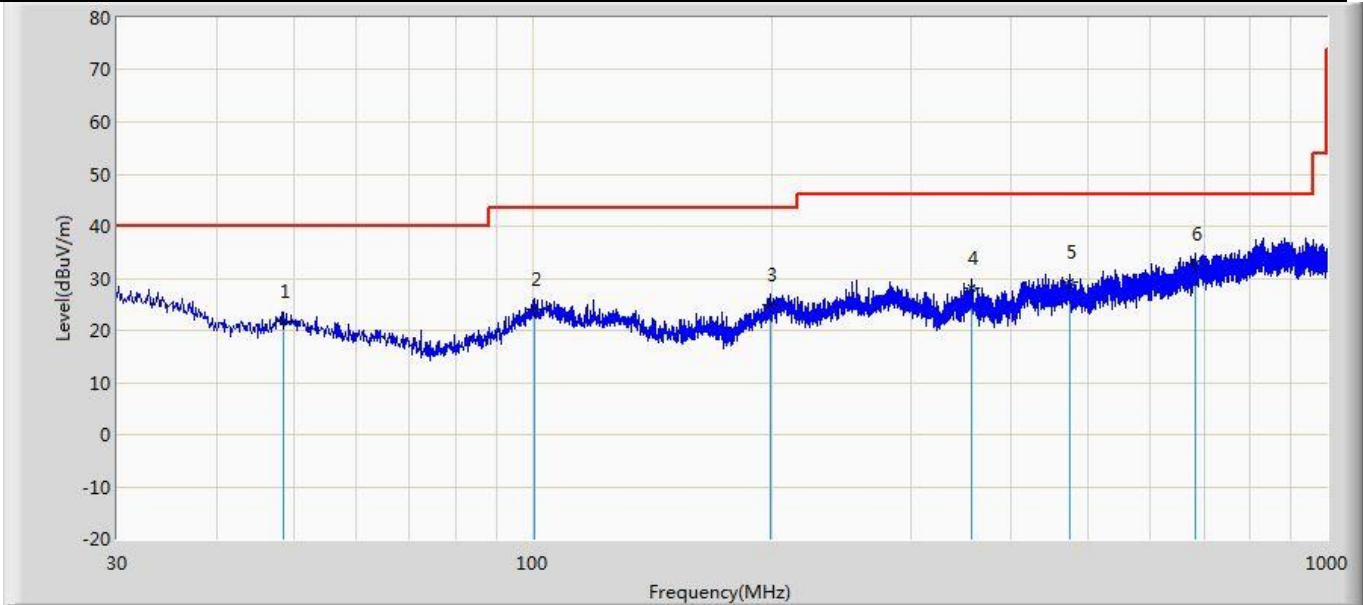

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		48.551	21.867	2.762	-18.133	40.000	19.106	QP
2		100.689	23.948	1.957	-19.552	43.500	21.991	QP
3		199.386	24.921	1.590	-18.579	43.500	23.331	QP
4		357.011	28.049	3.117	-17.951	46.000	24.932	QP
5		474.624	29.359	3.071	-16.641	46.000	26.288	QP
6	*	683.052	32.891	2.908	-13.109	46.000	29.983	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Appendix C: Emission bandwidth and occupied bandwidth

Mode	CH.	Test Freq. (MHz)	26dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
1	36	5180	21.280	16.648	5171.6668	Pass
	44	5220	20.080	16.629	N/A	Pass
	48	5240	20.640	16.606	5248.2991	Pass
	52	5260	20.45	16.428	N/A	Pass
	60	5300	19.30	16.384	N/A	Pass
	64	5320	19.11	16.424	N/A	Pass
	100	5500	18.95	16.510	N/A	Pass
	116	5580	18.95	16.416	N/A	Pass
	140	5700	18.91	16.410	N/A	Pass
	149	5745	N/A	16.535	N/A	Pass
	157	5785	N/A	16.531	N/A	Pass
	165	5825	N/A	16.535	N/A	Pass
2	36	5180	20.200	17.735	5171.1387	Pass
	44	5220	20.440	17.728	N/A	Pass
	48	5240	20.120	17.725	5248.8744	Pass
	52	5260	19.88	17.691	N/A	Pass
	60	5300	20.06	17.662	N/A	Pass
	64	5320	20.07	17.650	N/A	Pass
	100	5500	20.32	17.552	N/A	Pass
	116	5580	20.25	17.608	N/A	Pass
	140	5700	20.02	17.611	N/A	Pass
	149	5745	N/A	17.693	N/A	Pass
	157	5785	N/A	17.678	N/A	Pass
	165	5825	N/A	17.672	N/A	Pass
3	38	5190	39.280	36.207	5171.9135	Pass
	46	5230	39.600	36.168	5248.0854	Pass
	54	5270	41.21	36.133	N/A	Pass
	62	5310	40.48	36.126	N/A	Pass
	102	5510	40.18	36.093	N/A	Pass
	110	5590	40.90	35.979	N/A	Pass
	134	5670	40.72	36.034	N/A	Pass
	151	5755	N/A	36.259	N/A	Pass
	159	5795	N/A	36.226	N/A	Pass
4	36	5180	20.200	17.736	5171.1436	Pass
	44	5220	20.680	17.713	N/A	Pass
	48	5240	20.480	17.725	5248.8742	Pass
	52	5260	20.77	17.643	N/A	Pass
	60	5300	19.99	17.651	N/A	Pass


	64	5320	20.09	17.634	N/A	Pass
	100	5500	20.53	17.553	N/A	Pass
	116	5580	19.73	17.567	N/A	Pass
	140	5700	19.90	17.583	N/A	Pass
	149	5745	N/A	17.670	N/A	Pass
	157	5785	N/A	17.667	N/A	Pass
	165	5825	N/A	17.651	N/A	Pass
5	38	5190	39.600	36.239	5171.8710	Pass
	46	5230	39.520	36.212	5248.1078	Pass
	54	5270	41.39	36.120	N/A	Pass
	62	5310	40.05	36.070	N/A	Pass
	102	5510	39.53	36.160	N/A	Pass
	110	5550	39.95	36.128	N/A	Pass
	134	5670	40.37	36.021	N/A	Pass
	151	5755	N/A	36.210	N/A	Pass
	159	5795	N/A	36.228	N/A	Pass
6	42	5210	82.080	75.666	5172.1480/5247.8140	Pass
	58	5290	82.45	75.668	N/A	Pass
	106	5530	82.05	75.468	N/A	Pass
	138	5690	82.01	75.459	N/A	Pass
	155	5775	N/A	75.596	N/A	Pass
7	36	5180	23.480	19.068	5170.4626	Pass
	44	5220	20.960	19.055	N/A	Pass
	48	5240	21.360	19.045	5249.5357	Pass
	52	5260	19.91	17.666	N/A	Pass
	60	5300	20.63	17.648	N/A	Pass
	64	5320	20.12	17.632	N/A	Pass
	100	5500	20.54	17.553	N/A	Pass
	116	5580	20.23	17.596	N/A	Pass
	140	5700	19.72	17.607	N/A	Pass
	149	5745	N/A	18.967	N/A	Pass
	157	5785	N/A	18.981	N/A	Pass
	165	5825	N/A	18.979	N/A	Pass
8	38	5190	39.840	37.886	5171.0680	Pass
	46	5230	40.080	37.875	5248.9623	Pass
	54	5270	41.57	36.150	N/A	Pass
	62	5310	40.15	36.075	N/A	Pass
	102	5510	39.84	36.073	N/A	Pass
	110	5590	40.33	36.106	N/A	Pass
	134	5670	40.13	36.103	N/A	Pass
	151	5755	N/A	37.878	N/A	Pass
	159	5795	N/A	37.884	N/A	Pass
9	42	5210	81.920	77.523	5171.1648/5248.6878	Pass
	58	5290	83.14	75.669	N/A	Pass

	106	5530	82.13	75.480	N/A	Pass
	138	5690	82.11	75360	N/A	Pass
	155	5775	N/A	77.220	N/A	Pass

Note 1 : The worst case of Emission Bandwidth as below:

Note 2: We have evaluated SISO/MIMO mode, shown in the report is the worst data.

Mode 7 CH48 (5240MHz)

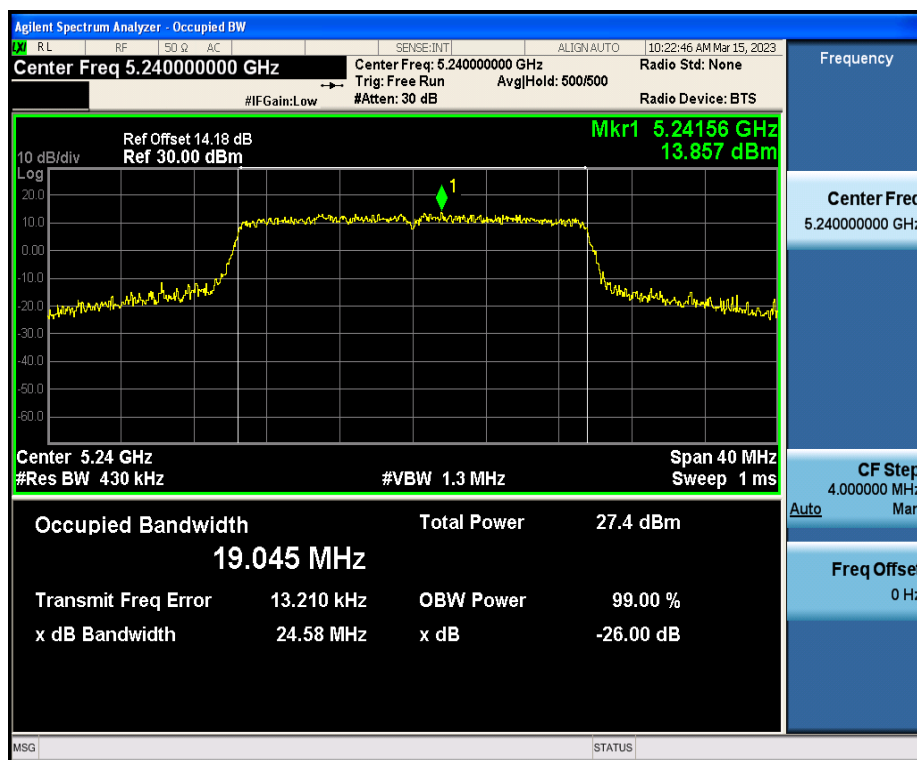


Appendix D: 6dB Emission Bandwidth

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	149	5745	16.360	>500	Pass
	157	5785	16.320	>500	Pass
	165	5825	16.320	>500	Pass
2	149	5745	17.600	>500	Pass
	157	5785	17.600	>500	Pass
	165	5825	17.640	>500	Pass
3	151	5755	36.320	>500	Pass
	159	5795	35.920	>500	Pass
4	149	5745	17.160	>500	Pass
	157	5785	17.320	>500	Pass
	165	5825	17.560	>500	Pass
5	151	5755	35.920	>500	Pass
	159	5795	36.320	>500	Pass
6	155	5775	75.040	>500	Pass
7	149	5745	18.360	>500	Pass
	157	5785	18.720	>500	Pass
	165	5825	18.320	>500	Pass
8	151	5755	38.000	>500	Pass
	159	5795	37.920	>500	Pass
9	155	5775	76.480	>500	Pass

Note 1 : The worst case of Occupied Bandwidth as below:

Note 2 : We have evaluated SISO/MIMO mode, shown in the report is the worst data.

Mode 1 CH157(5785MHz)

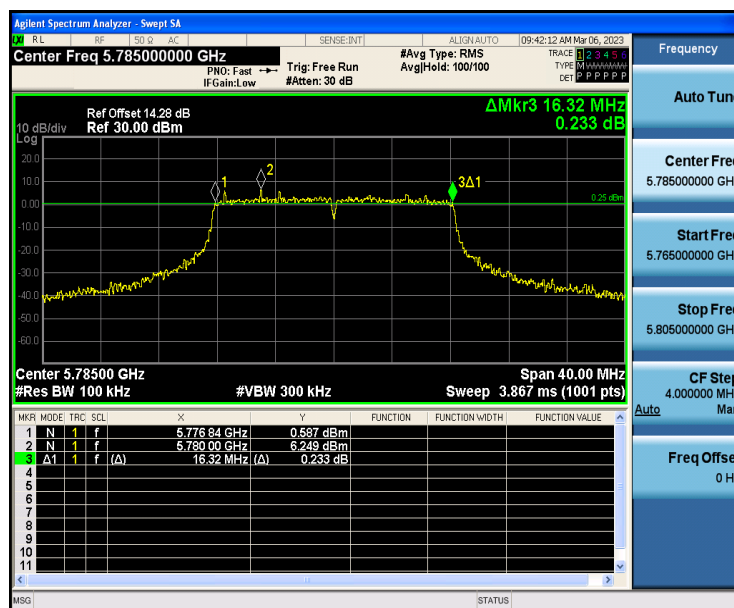


Appendix E: Duty cycle


Test Mode	Tx On (ms)	VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle
1	1.976	10	2.003	98.65
2	5.424	10	5.448	99.56
3	5.388	10	5.444	98.97
4	5.424	10	5.450	99.52
5	5.392	10	5.444	99.04
6	5.382	10	5.444	98.86
7	5.440	10	5.474	99.38
8	5.402	10	5.462	98.90
9	5.386	10	5.462	98.61

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Note 2: According to KDB 789033, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

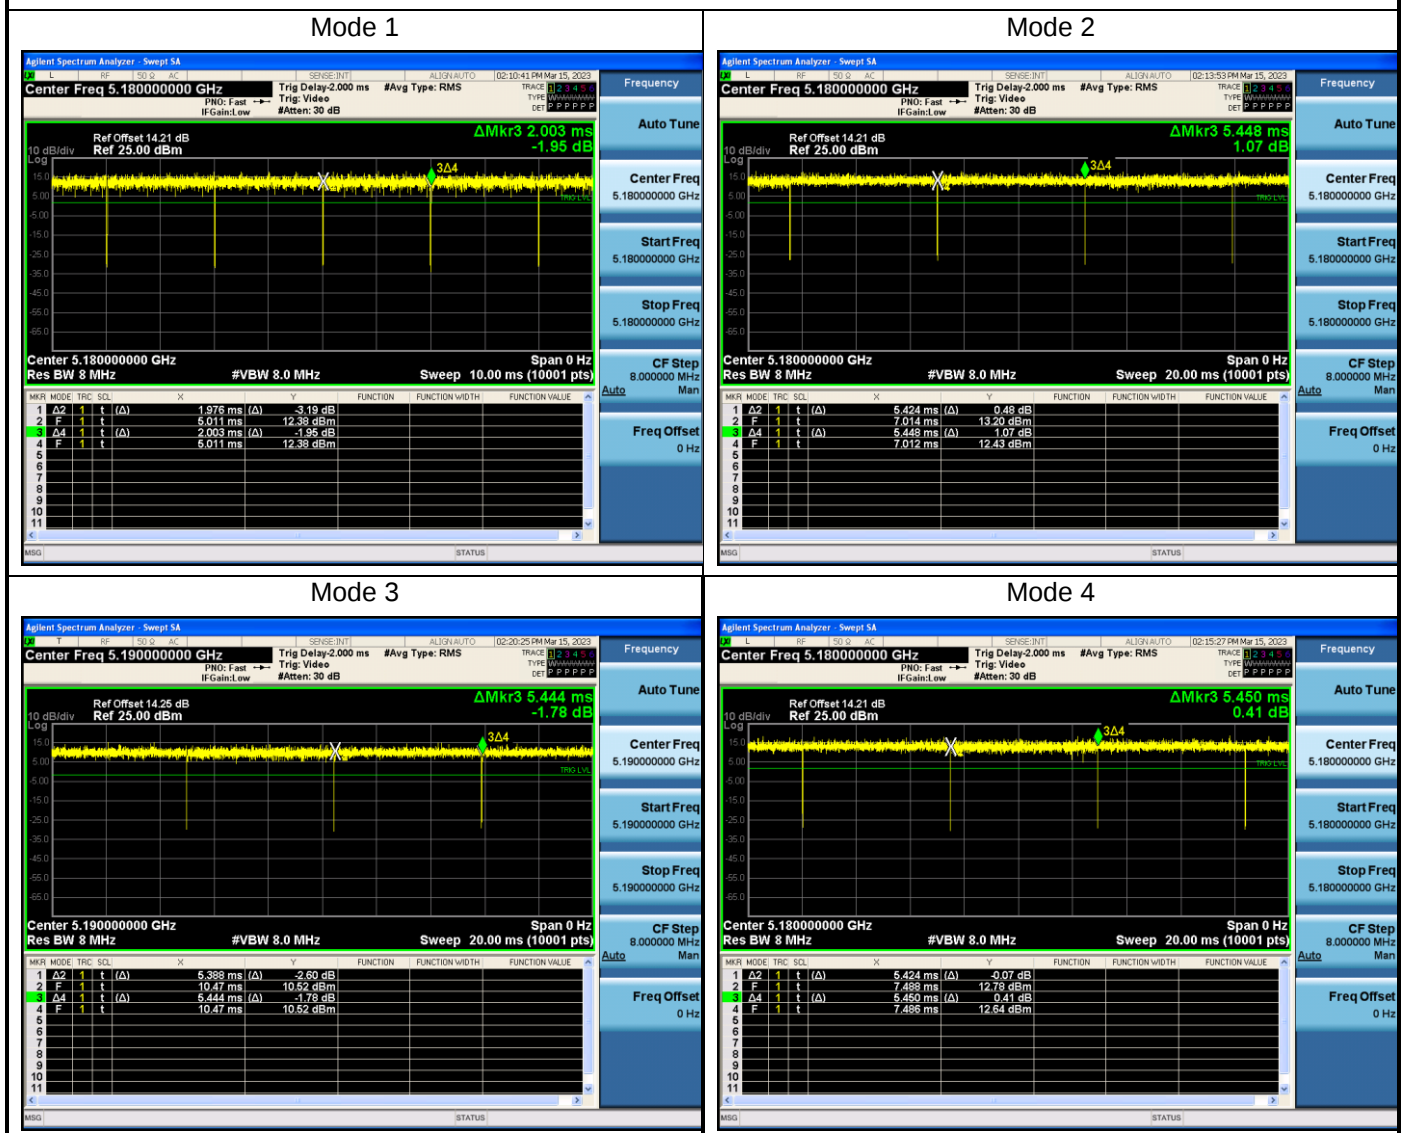


Mode 5

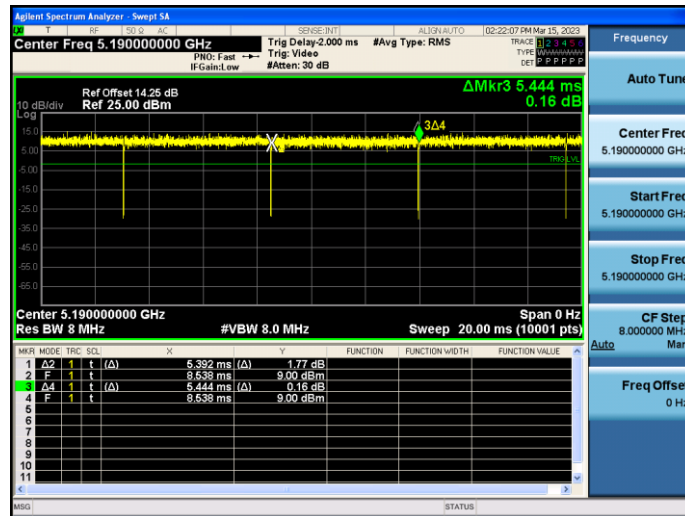


Mode 6

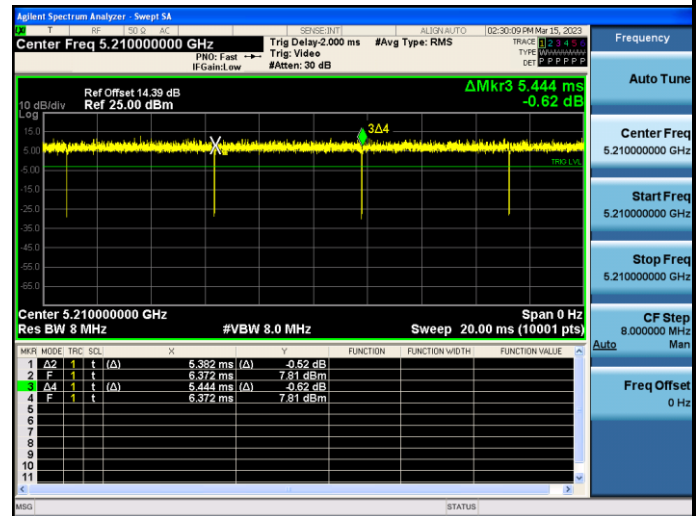


Mode 7

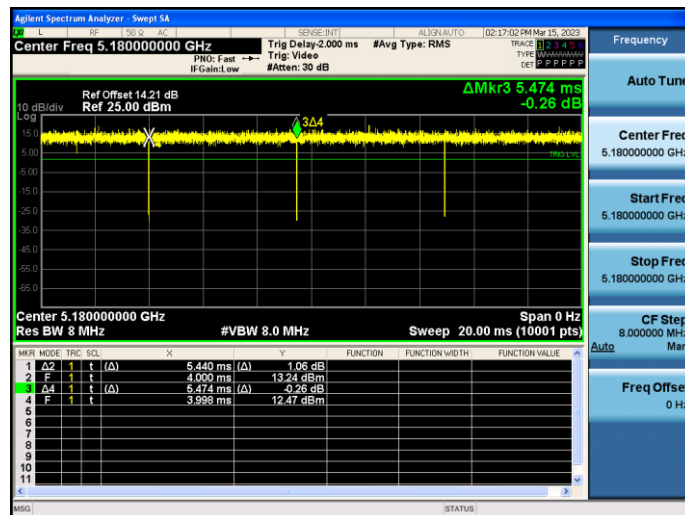

Mode 8

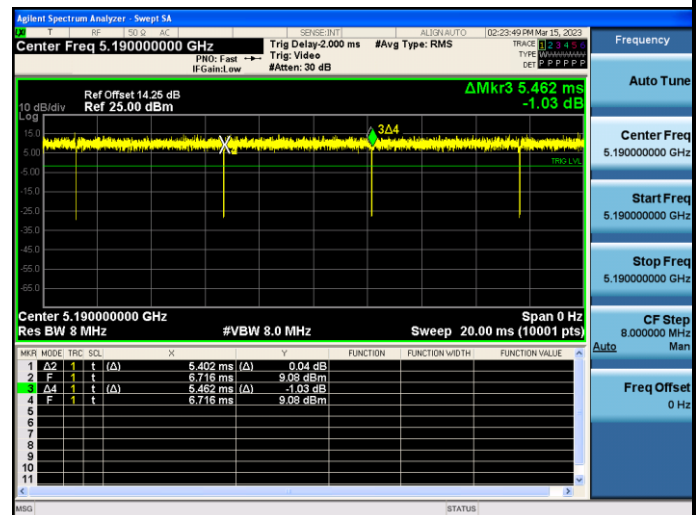

Mode 9

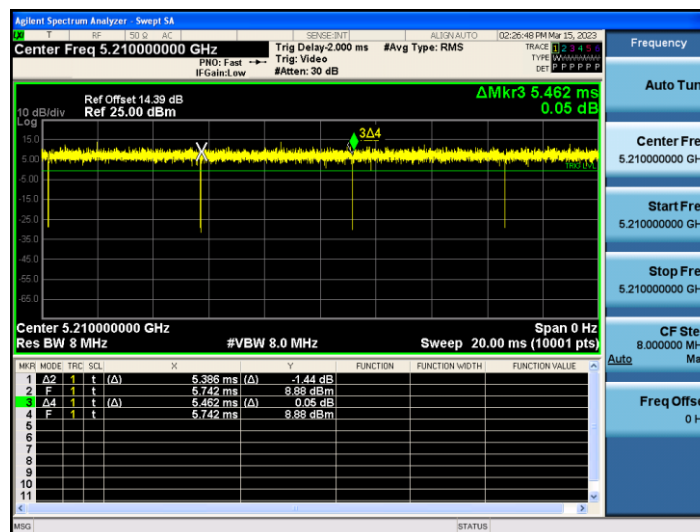

Appendix F: Power Output

SISO:Antenna1

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	19.28	≤24	Pass
	44	5220	19.10	≤24	Pass
	48	5240	18.86	≤24	Pass
	52	5260	13.86	≤24	Pass
	60	5300	13.84	≤24	Pass
	64	5320	13.87	≤24	Pass
	100	5500	13.61	≤24	Pass
	116	5580	13.72	≤24	Pass
	140	5700	13.55	≤24	Pass
	149	5745	18.14	≤30	Pass
	157	5785	17.89	≤30	Pass
	165	5825	17.89	≤30	Pass
Mode 2	36	5180	19.18	≤24	Pass
	44	5220	18.97	≤24	Pass
	48	5240	18.73	≤24	Pass
	52	5260	14.05	≤24	Pass
	60	5300	13.79	≤24	Pass
	64	5320	14.04	≤24	Pass
	100	5500	13.63	≤24	Pass
	116	5580	13.83	≤24	Pass
	140	5700	13.59	≤24	Pass
	149	5745	17.84	≤30	Pass
	157	5785	17.75	≤30	Pass
	165	5825	17.71	≤30	Pass
Mode 3	38	5190	19.57	≤24	Pass
	46	5230	19.31	≤24	Pass
	54	5270	14.35	≤24	Pass
	62	5310	14.15	≤24	Pass
	102	5510	14.13	≤24	Pass
	118	5590	14.34	≤24	Pass
	134	5670	14.47	≤24	Pass
	151	5755	17.89	≤30	Pass
	159	5795	17.61	≤30	Pass

Mode 4	36	5180	19.17	≤24	Pass
	44	5220	18.96	≤24	Pass
	48	5240	17.72	≤24	Pass
	52	5260	13.99	≤24	Pass
	60	5300	13.82	≤24	Pass
	64	5320	13.94	≤24	Pass
	100	5500	13.56	≤24	Pass
	116	5580	13.75	≤24	Pass
	140	5700	13.60	≤24	Pass
	149	5745	15.97	≤30	Pass
	157	5785	15.87	≤30	Pass
	165	5825	15.85	≤30	Pass
Mode 5	38	5190	18.89	≤24	Pass
	46	5230	18.83	≤24	Pass
	54	5270	14.25	≤24	Pass
	62	5310	14.40	≤24	Pass
	102	5510	14.38	≤24	Pass
	118	5590	14.28	≤24	Pass
	134	5670	14.34	≤24	Pass
	151	5755	15.98	≤30	Pass
	159	5795	15.71	≤30	Pass
Mode 6	42	5210	18.98	≤24	Pass
	58	5290	14.12	≤24	Pass
	106	5530	14.27	≤24	Pass
	155	5775	16.00	≤30	Pass
Mode 7	36	5180	19.22	≤24	Pass
	44	5220	19.03	≤24	Pass
	48	5240	18.79	≤24	Pass
	52	5260	14.02	≤24	Pass
	60	5300	13.77	≤24	Pass
	64	5320	14.00	≤24	Pass
	100	5500	13.70	≤24	Pass
	116	5580	13.81	≤24	Pass
	140	5700	13.65	≤24	Pass
	149	5745	16.21	≤30	Pass
	157	5785	16.06	≤30	Pass
	165	5825	15.95	≤30	Pass

Mode 8	38	5190	18.87	≤ 24	Pass
	46	5230	18.92	≤ 24	Pass
	54	5270	14.32	≤ 24	Pass
	62	5310	14.41	≤ 24	Pass
	102	5510	14.42	≤ 24	Pass
	118	5590	14.31	≤ 24	Pass
	134	5670	14.21	≤ 24	Pass
	151	5755	15.86	≤ 30	Pass
	159	5795	16.15	≤ 30	Pass
Mode 9	42	5210	18.86	≤ 24	Pass
	58	5290	14.06	≤ 24	Pass
	106	5530	14.18	≤ 24	Pass
	155	5775	15.82	≤ 30	Pass

SISO: Antenna2

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	19.11	≤24	Pass
	44	5220	19.02	≤24	Pass
	48	5240	18.80	≤24	Pass
	52	5260	13.61	≤24	Pass
	60	5300	13.71	≤24	Pass
	64	5320	13.90	≤24	Pass
	100	5500	13.76	≤24	Pass
	116	5580	13.70	≤24	Pass
	140	5700	13.74	≤24	Pass
	149	5745	18.10	≤30	Pass
	157	5785	17.88	≤30	Pass
	165	5825	17.85	≤30	Pass
Mode 2	36	5180	19.10	≤24	Pass
	44	5220	18.90	≤24	Pass
	48	5240	18.70	≤24	Pass
	52	5260	13.65	≤24	Pass
	60	5300	13.88	≤24	Pass
	64	5320	13.86	≤24	Pass
	100	5500	13.87	≤24	Pass
	116	5580	13.75	≤24	Pass
	140	5700	13.66	≤24	Pass
	149	5745	17.75	≤30	Pass
	157	5785	17.71	≤30	Pass
	165	5825	17.66	≤30	Pass
Mode 3	38	5190	19.64	≤24	Pass
	46	5230	19.27	≤24	Pass
	54	5270	14.40	≤24	Pass
	62	5310	14.31	≤24	Pass
	102	5510	14.16	≤24	Pass
	118	5590	14.20	≤24	Pass
	134	5670	14.40	≤24	Pass
	151	5755	17.78	≤30	Pass
	159	5795	17.55	≤30	Pass

Mode 4	36	5180	19.10	≤24	Pass
	44	5220	18.92	≤24	Pass
	48	5240	17.68	≤24	Pass
	52	5260	13.71	≤24	Pass
	60	5300	13.91	≤24	Pass
	64	5320	13.97	≤24	Pass
	100	5500	13.84	≤24	Pass
	116	5580	13.76	≤24	Pass
	140	5700	13.77	≤24	Pass
	149	5745	15.88	≤30	Pass
	157	5785	15.84	≤30	Pass
	165	5825	15.82	≤30	Pass
Mode 5	38	5190	18.71	≤24	Pass
	46	5230	18.94	≤24	Pass
	54	5270	14.31	≤24	Pass
	62	5310	14.45	≤24	Pass
	102	5510	14.33	≤24	Pass
	118	5590	14.12	≤24	Pass
	134	5670	14.38	≤24	Pass
	151	5755	15.91	≤30	Pass
	159	5795	15.67	≤30	Pass
Mode 6	42	5210	18.86	≤24	Pass
	58	5290	14.27	≤24	Pass
	106	5530	14.11	≤24	Pass
	155	5775	15.94	≤30	Pass
Mode 7	36	5180	19.14	≤24	Pass
	44	5220	19.01	≤24	Pass
	48	5240	18.74	≤24	Pass
	52	5260	13.79	≤24	Pass
	60	5300	13.81	≤24	Pass
	64	5320	13.91	≤24	Pass
	100	5500	14.02	≤24	Pass
	116	5580	13.91	≤24	Pass
	140	5700	13.76	≤24	Pass
	149	5745	16.10	≤30	Pass
	157	5785	16.03	≤30	Pass
	165	5825	15.86	≤30	Pass

Mode 8	38	5190	18.90	≤ 24	Pass
	46	5230	18.89	≤ 24	Pass
	54	5270	14.30	≤ 24	Pass
	62	5310	14.17	≤ 24	Pass
	102	5510	14.27	≤ 24	Pass
	118	5590	14.36	≤ 24	Pass
	134	5670	14.29	≤ 24	Pass
	151	5755	15.75	≤ 30	Pass
	159	5795	16.05	≤ 30	Pass
Mode 9	42	5210	18.91	≤ 24	Pass
	58	5290	14.13	≤ 24	Pass
	106	5530	13.93	≤ 24	Pass
	155	5775	15.79	≤ 30	Pass

CDD: Antenna1+2

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm) Antenna1	Conducted Power (dBm) Antenna2	Conducted Power (dBm) Antenna1+2	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	14.94	14.82	17.89	≤24	Pass
	44	5220	14.71	14.64	17.69	≤24	Pass
	48	5240	14.98	14.93	17.97	≤24	Pass
	52	5260	9.61	9.69	12.66	≤24	Pass
	60	5300	9.50	9.57	12.55	≤24	Pass
	64	5320	9.53	9.53	12.54	≤24	Pass
	100	5500	9.58	9.59	12.60	≤24	Pass
	116	5580	9.54	9.63	12.60	≤24	Pass
	140	5700	9.50	9.60	12.56	≤24	Pass
	149	5745	17.86	17.85	20.87	≤30	Pass
	157	5785	17.96	17.81	20.90	≤30	Pass
	165	5825	17.86	17.76	20.82	≤30	Pass
Mode 2	36	5180	14.82	14.59	17.72	≤24	Pass
	44	5220	14.59	14.43	17.52	≤24	Pass
	48	5240	14.77	14.72	17.76	≤24	Pass
	52	5260	9.63	9.65	12.65	≤24	Pass
	60	5300	9.55	9.52	12.55	≤24	Pass
	64	5320	9.66	9.63	12.66	≤24	Pass
	100	5500	9.50	9.55	12.54	≤24	Pass
	116	5580	9.54	9.53	12.55	≤24	Pass
	140	5700	9.62	9.68	12.66	≤24	Pass
	149	5745	17.87	17.79	20.84	≤30	Pass
	157	5785	17.77	17.75	20.77	≤30	Pass
	165	5825	17.78	17.73	20.77	≤30	Pass
Mode 3	38	5190	15.89	15.93	18.92	≤24	Pass
	46	5230	15.83	15.88	18.87	≤24	Pass
	54	5270	9.48	9.38	12.44	≤24	Pass
	62	5310	9.36	9.26	12.32	≤24	Pass
	102	5510	9.40	9.22	12.32	≤24	Pass
	118	5590	9.32	9.31	12.33	≤24	Pass
	134	5670	9.24	9.22	12.24	≤24	Pass
	151	5755	18.07	17.80	20.95	≤30	Pass
	159	5795	17.83	17.78	20.82	≤30	Pass

Mode 4	36	5180	14.69	14.52	17.62	≤24	Pass
	44	5220	14.59	14.49	17.55	≤24	Pass
	48	5240	14.78	14.72	17.76	≤24	Pass
	52	5260	9.59	9.60	12.61	≤24	Pass
	60	5300	9.47	9.45	12.47	≤24	Pass
	64	5320	9.61	9.58	12.61	≤24	Pass
	100	5500	9.58	9.62	12.61	≤24	Pass
	116	5580	9.45	9.49	12.48	≤24	Pass
	140	5700	9.70	9.63	12.68	≤24	Pass
	149	5745	15.79	15.66	18.74	≤30	Pass
	157	5785	16.07	16.01	19.05	≤30	Pass
	165	5825	16.08	16.03	19.07	≤30	Pass
Mode 5	38	5190	15.87	15.79	18.84	≤24	Pass
	46	5230	15.89	15.88	18.90	≤24	Pass
	54	5270	9.40	9.28	12.35	≤24	Pass
	62	5310	9.25	9.22	12.25	≤24	Pass
	102	5510	9.29	9.29	12.30	≤24	Pass
	118	5590	9.24	9.30	12.28	≤24	Pass
	134	5670	9.28	9.47	12.39	≤24	Pass
	151	5755	15.82	15.75	18.80	≤30	Pass
	159	5795	16.06	15.98	19.03	≤30	Pass
Mode 6	42	5210	15.88	15.84	18.87	≤24	Pass
	58	5290	9.36	9.33	12.36	≤24	Pass
	106	5530	9.36	9.34	12.36	≤24	Pass
	122	5610	6.47	6.45	9.47	≤24	Pass
	155	5775	15.61	15.58	18.61	≤30	Pass
Mode 7	36	5180	14.95	14.83	17.90	≤24	Pass
	44	5220	14.67	14.71	17.70	≤24	Pass
	48	5240	14.94	14.90	17.93	≤24	Pass
	52	5260	9.59	9.63	12.62	≤24	Pass
	60	5300	9.43	9.57	12.51	≤24	Pass
	64	5320	9.48	9.49	12.50	≤24	Pass
	100	5500	9.63	9.65	12.65	≤24	Pass
	116	5580	9.52	9.51	12.53	≤24	Pass
	140	5700	9.63	9.58	12.62	≤24	Pass
	149	5745	15.91	15.89	18.91	≤30	Pass
	157	5785	15.86	15.86	18.87	≤30	Pass
	165	5825	15.80	15.74	18.78	≤30	Pass

Mode 8	38	5190	15.76	15.73	18.76	≤24	Pass
	46	5230	15.78	15.73	18.77	≤24	Pass
	54	5270	9.36	9.38	12.38	≤24	Pass
	62	5310	9.17	9.32	12.26	≤24	Pass
	102	5510	9.35	9.27	12.32	≤24	Pass
	118	5590	9.35	9.26	12.32	≤24	Pass
	134	5670	9.26	9.22	12.25	≤24	Pass
	151	5755	15.76	15.71	18.75	≤30	Pass
	159	5795	15.95	15.92	18.95	≤30	Pass
Mode 9	42	5210	15.76	15.79	18.79	≤24	Pass
	58	5290	9.34	9.15	12.26	≤24	Pass
	106	5530	9.26	9.37	12.33	≤24	Pass
	122	5610	6.51	6.56	9.55	≤24	Pass
	155	5775	15.74	15.66	18.71	≤30	Pass

Appendix G: Maximum Power Spectral Density

SISO: Worst test data Antenna2

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant2	5180	8.37	≤11.00	PASS
		5220	7.91	≤11.00	PASS
		5240	7.91	≤11.00	PASS
		5260	3.07	≤11.00	PASS
		5300	2.95	≤11.00	PASS
		5320	3.13	≤11.00	PASS
		5500	2.63	≤11.00	PASS
		5580	2.80	≤11.00	PASS
		5700	2.18	≤11.00	PASS
		5745	4.62	≤30.00	PASS
		5785	4.77	≤30.00	PASS
		5825	4.52	≤30.00	PASS
11N20SISO	Ant2	5180	7.84	≤11.00	PASS
		5220	7.67	≤11.00	PASS
		5240	7.54	≤11.00	PASS
		5260	2.72	≤11.00	PASS
		5300	2.46	≤11.00	PASS
		5320	2.76	≤11.00	PASS
		5500	2.31	≤11.00	PASS
		5580	2.42	≤11.00	PASS
		5700	1.92	≤11.00	PASS
		5745	4.49	≤30.00	PASS
		5785	4.30	≤30.00	PASS
		5825	3.97	≤30.00	PASS
11N40SISO	Ant2	5190	4.11	≤11.00	PASS
		5230	3.8	≤11.00	PASS
		5270	-0.08	≤11.00	PASS
		5310	-0.15	≤11.00	PASS
		5510	-0.74	≤11.00	PASS
		5590	-0.96	≤11.00	PASS
		5670	-0.57	≤11.00	PASS
		5755	1.34	≤30.00	PASS
		5795	0.68	≤30.00	PASS
11AC20SISO	Ant2	5180	7.92	≤11.00	PASS
		5220	7.66	≤11.00	PASS
		5240	7.34	≤11.00	PASS
		5260	2.66	≤11.00	PASS
		5300	2.37	≤11.00	PASS
		5320	2.43	≤11.00	PASS
		5500	2.01	≤11.00	PASS
		5580	2.42	≤11.00	PASS
		5700	1.68	≤11.00	PASS
		5745	2.46	≤30.00	PASS
		5785	2.07	≤30.00	PASS
		5825	2.44	≤30.00	PASS

11AC40SISO	Ant2	5190	4.00	≤11.00	PASS
		5230	3.82	≤11.00	PASS
		5270	-0.02	≤11.00	PASS
		5310	-0.36	≤11.00	PASS
		5510	-0.75	≤11.00	PASS
		5550	-0.04	≤11.00	PASS
		5670	-0.35	≤11.00	PASS
		5755	-0.81	≤30.00	PASS
		5795	-0.89	≤30.00	PASS
11AC80SISO	Ant2	5210	0.54	≤11.00	PASS
		5290	-3.38	≤11.00	PASS
		5530	-3.15	≤11.00	PASS
		5775	-4.15	≤30.00	PASS
11AX20SISO	Ant2	5180	7.73	≤11.00	PASS
		5220	7.54	≤11.00	PASS
		5240	7.19	≤11.00	PASS
		5260	-5.88	≤11.00	PASS
		5300	-5.82	≤11.00	PASS
		5320	-5.73	≤11.00	PASS
		5500	-6.38	≤11.00	PASS
		5580	-6.09	≤11.00	PASS
		5700	-7.46	≤11.00	PASS
		5745	2.65	≤30.00	PASS
		5785	3.09	≤30.00	PASS
		5825	2.23	≤30.00	PASS
11AX40SISO	Ant2	5190	4.12	≤11.00	PASS
		5230	3.86	≤11.00	PASS
		5270	-0.22	≤11.00	PASS
		5310	-0.46	≤11.00	PASS
		5510	-1.06	≤11.00	PASS
		5550	-0.2	≤11.00	PASS
		5670	-0.84	≤11.00	PASS
		5755	-0.72	≤30.00	PASS
		5795	-0.28	≤30.00	PASS
11AX80SISO	Ant2	5210	0.58	≤11.00	PASS
		5290	-3.52	≤11.00	PASS
		5530	-3.38	≤11.00	PASS
		5775	-3.47	≤30.00	PASS

Note :

- 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
- 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. We have evaluated each operating mode and SISO mode, shown in the report is the worst data.

CDD: Antenna1+2

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11ACDD	Ant1+2	5180	7.68	≤9.77	PASS
		5220	7.66	≤9.77	PASS
		5240	7.61	≤9.77	PASS
		5260	1.74	≤9.77	PASS
		5300	1.33	≤9.77	PASS
		5320	1.35	≤9.77	PASS
		5500	1.19	≤10.10	PASS
		5580	1.16	≤10.10	PASS
		5700	0.82	≤10.10	PASS
		5745	7.49	≤27.05	PASS
		5785	7.74	≤27.05	PASS
		5825	7.66	≤27.05	PASS
11N20CDD	Ant1+2	5180	7.42	≤9.77	PASS
		5220	7.45	≤9.77	PASS
		5240	7.47	≤9.77	PASS
		5260	1.14	≤9.77	PASS
		5300	1.30	≤9.77	PASS
		5320	1.03	≤9.77	PASS
		5500	0.57	≤10.10	PASS
		5580	0.71	≤10.10	PASS
		5700	0.16	≤10.10	PASS
		5745	7.44	≤27.05	PASS
		5785	7.14	≤27.05	PASS
		5825	7.26	≤27.05	PASS
11N40CDD	Ant1+2	5190	6.44	≤9.77	PASS
		5230	6.18	≤9.77	PASS
		5270	-1.64	≤9.77	PASS
		5310	-1.96	≤9.77	PASS
		5510	-2.32	≤10.10	PASS
		5550	-1.56	≤10.10	PASS
		5670	-2.14	≤10.10	PASS
		5755	4.26	≤27.05	PASS
		5795	4.41	≤27.05	PASS
11AC20CDD	Ant1+2	5180	7.56	≤9.77	PASS
		5220	7.44	≤9.77	PASS
		5240	7.16	≤9.77	PASS
		5260	1.37	≤9.77	PASS
		5300	1.29	≤9.77	PASS
		5320	1.10	≤9.77	PASS
		5500	0.79	≤10.10	PASS
		5580	0.75	≤10.10	PASS
		5700	0.26	≤10.10	PASS
		5745	5.71	≤27.05	PASS
		5785	5.58	≤27.05	PASS
		5825	5.67	≤27.05	PASS

11AC40CDD	Ant1+2	5190	6.74	≤9.77	PASS
		5230	6.34	≤9.77	PASS
		5270	-1.44	≤9.77	PASS
		5310	-2.07	≤9.77	PASS
		5510	-2.42	≤10.10	PASS
		5550	-1.87	≤10.10	PASS
		5670	-2.07	≤10.10	PASS
		5755	2.02	≤27.05	PASS
		5795	2.15	≤27.05	PASS
11AC80CDD	Ant1+2	5210	3.17	≤9.77	PASS
		5290	-4.68	≤9.77	PASS
		5530	-4.90	≤10.10	PASS
		5775	-1.19	≤27.05	PASS
11AX20CDD	Ant1+2	5180	7.63	≤9.77	PASS
		5220	7.48	≤9.77	PASS
		5240	7.05	≤9.77	PASS
		5260	1.27	≤9.77	PASS
		5300	1.02	≤9.77	PASS
		5320	1.21	≤9.77	PASS
		5500	0.58	≤10.10	PASS
		5580	0.70	≤10.10	PASS
		5700	0.39	≤10.10	PASS
		5745	5.48	≤27.05	PASS
		5785	5.24	≤27.05	PASS
		5825	5.05	≤27.05	PASS
11AX40CDD	Ant1+2	5190	6.60	≤9.77	PASS
		5230	6.40	≤9.77	PASS
		5270	-1.85	≤9.77	PASS
		5310	-1.85	≤9.77	PASS
		5510	-2.46	≤10.10	PASS
		5550	-1.87	≤10.10	PASS
		5670	-2.30	≤10.10	PASS
		5755	2.11	≤27.05	PASS
		5795	2.39	≤27.05	PASS
11AX80CDD	Ant1+2	5210	3.45	≤9.77	PASS
		5290	-4.68	≤9.77	PASS
		5530	-4.87	≤10.10	PASS
		5775	-0.89	≤27.05	PASS

Note :

- 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
- 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. 5150-5350MHz Limit=11 - (7.23-6) =9.77dBm/MHz
- 4.5470-5725 MHz Limit=11 - (6.90-6) =10.10dBm/MHz
5. 5725-5850MHz Limit=30 - (8.95-6) =27.05dBm/500KHz