



Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	2.208	30	Pass
NVNT	1-DH1	2441	Ant1	3.404	30	Pass
NVNT	1-DH1	2480	Ant1	3.792	30	Pass
NVNT	2-DH1	2402	Ant1	3.849	21	Pass
NVNT	2-DH1	2441	Ant1	4.46	21	Pass
NVNT	2-DH1	2480	Ant1	4.624	21	Pass
NVNT	3-DH1	2402	Ant1	4.328	21	Pass
NVNT	3-DH1	2441	Ant1	4.794	21	Pass
NVNT	3-DH1	2480	Ant1	4.962	21	Pass

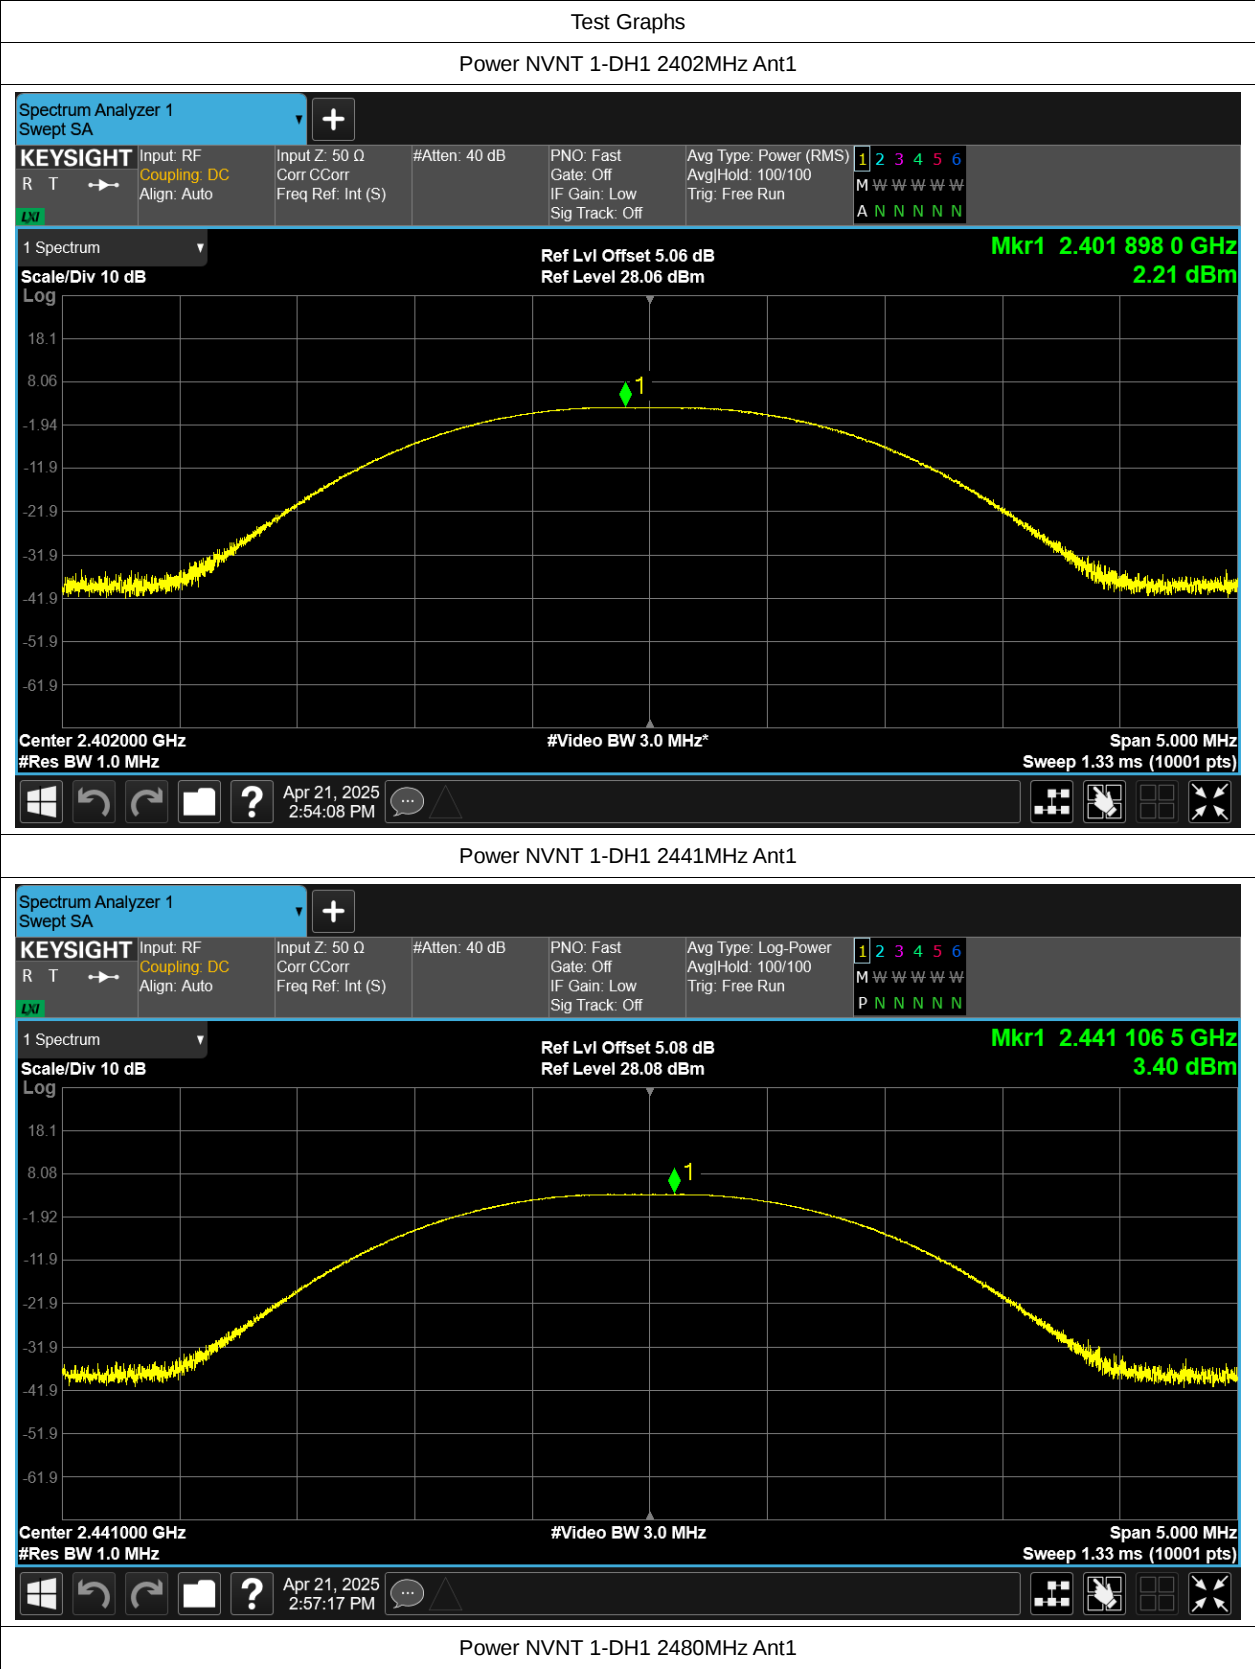


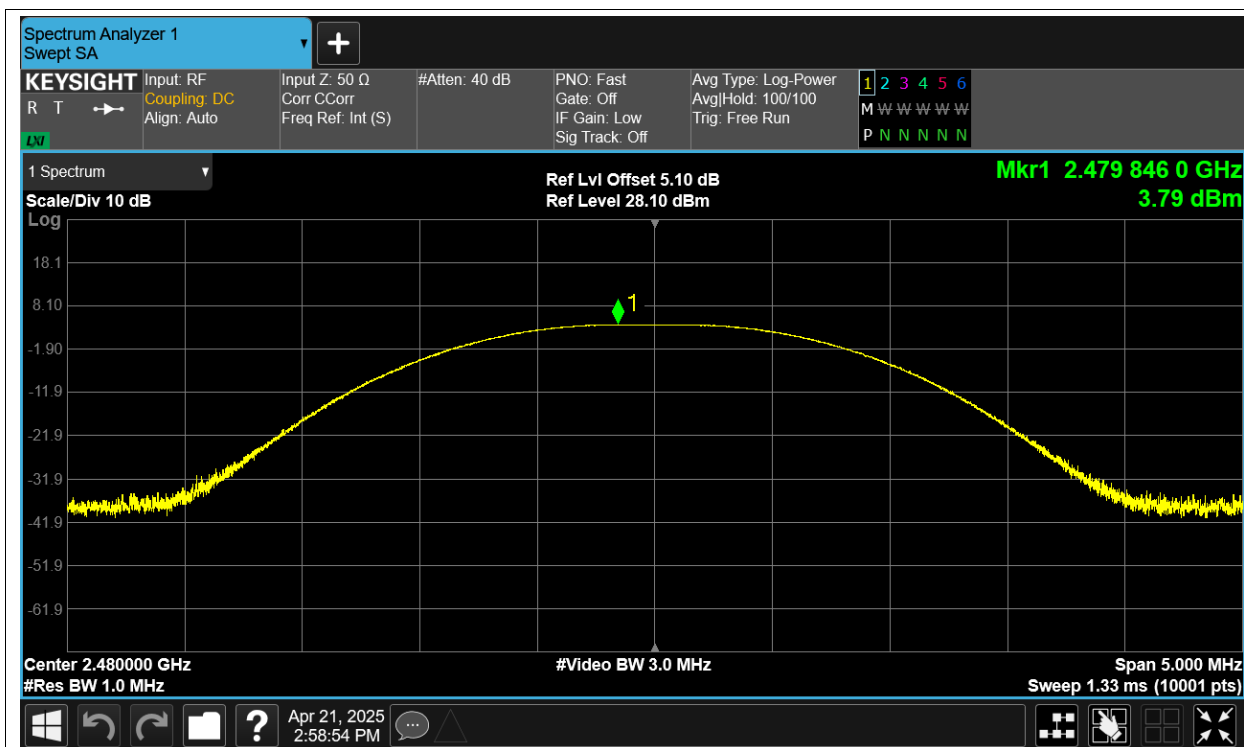


Power NVNT 2-DH1 2402MHz Ant1

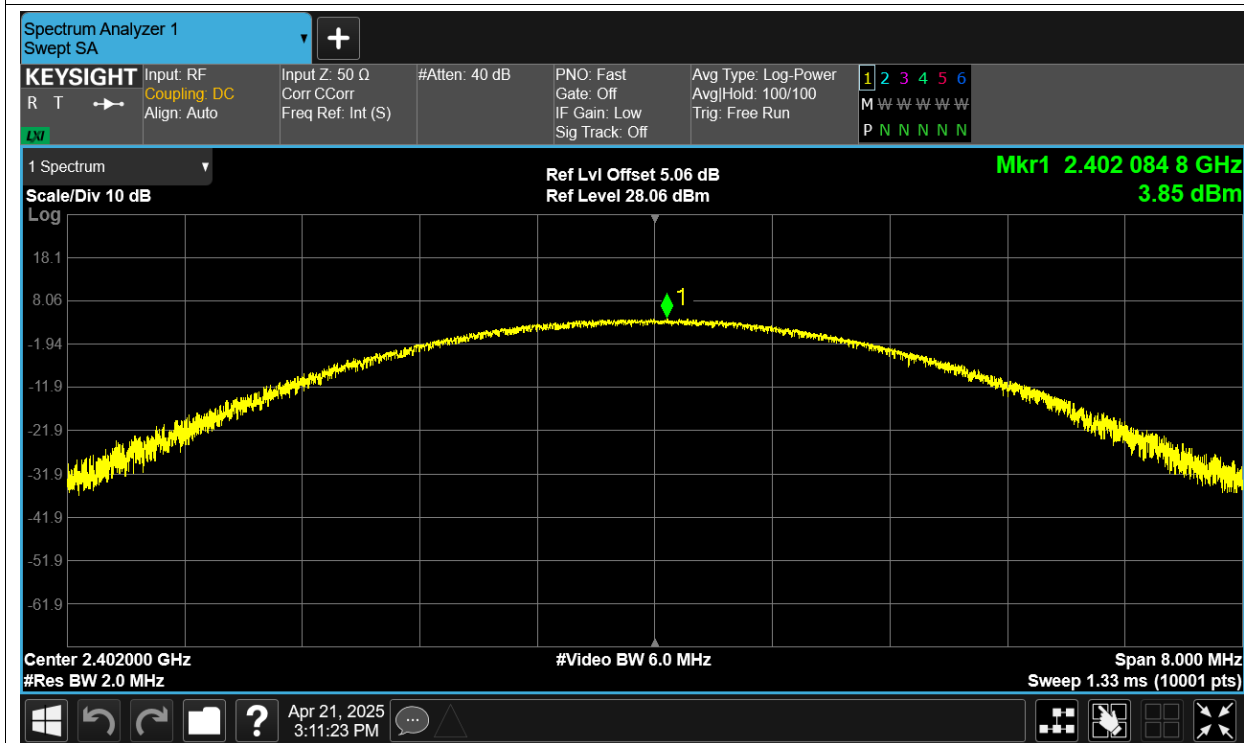


Power NVNT 2-DH1 2441MHz Ant1

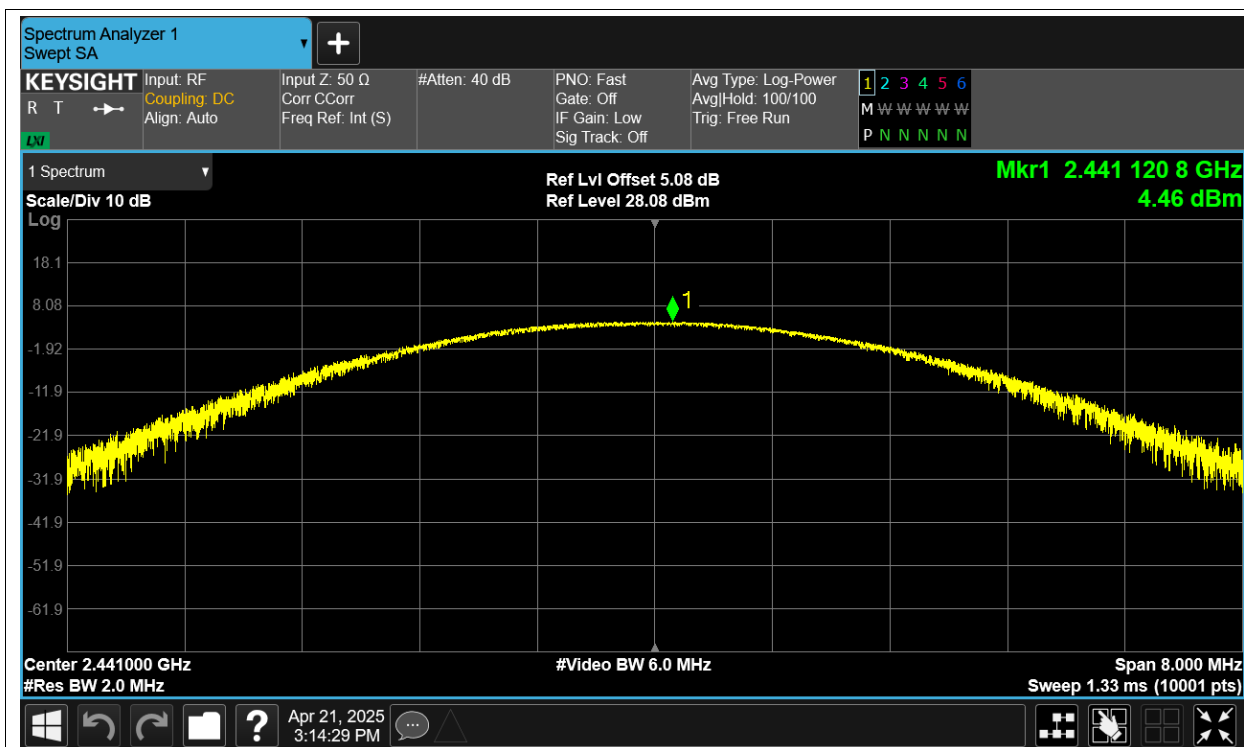


Power NVNT 2-DH1 2480MHz Ant1

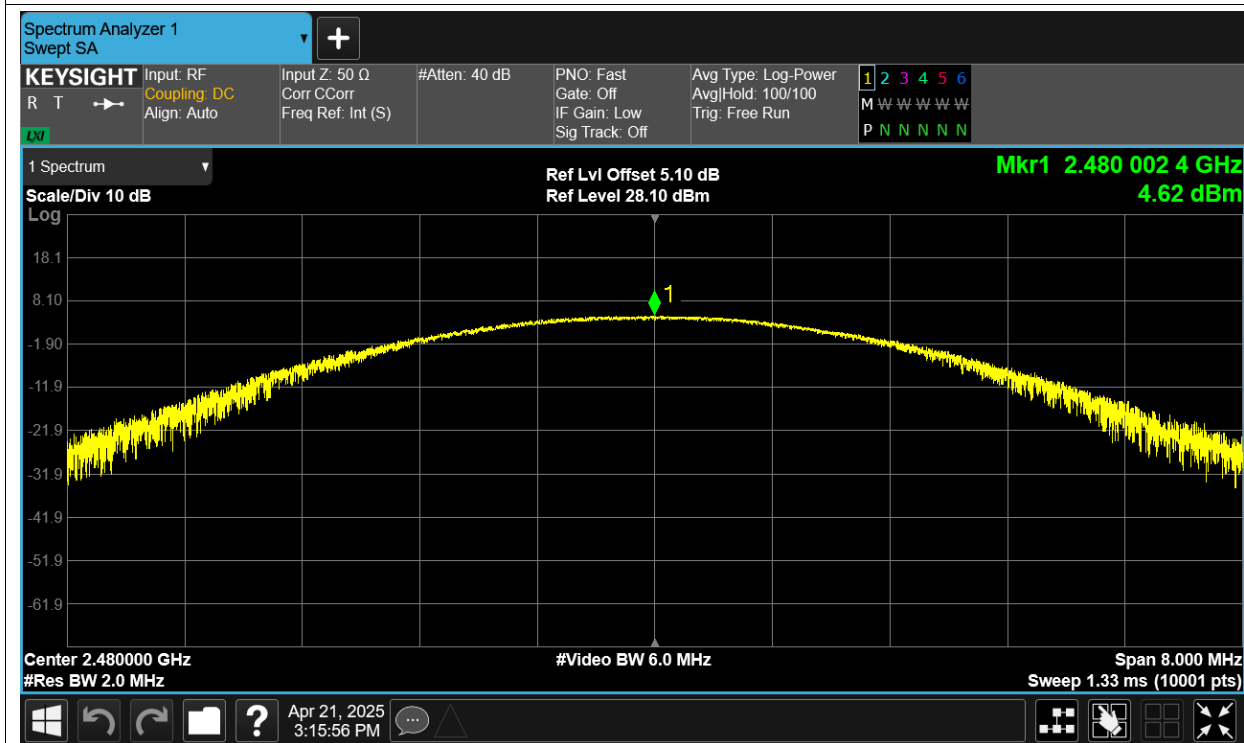


Power NVNT 3-DH1 2402MHz Ant1

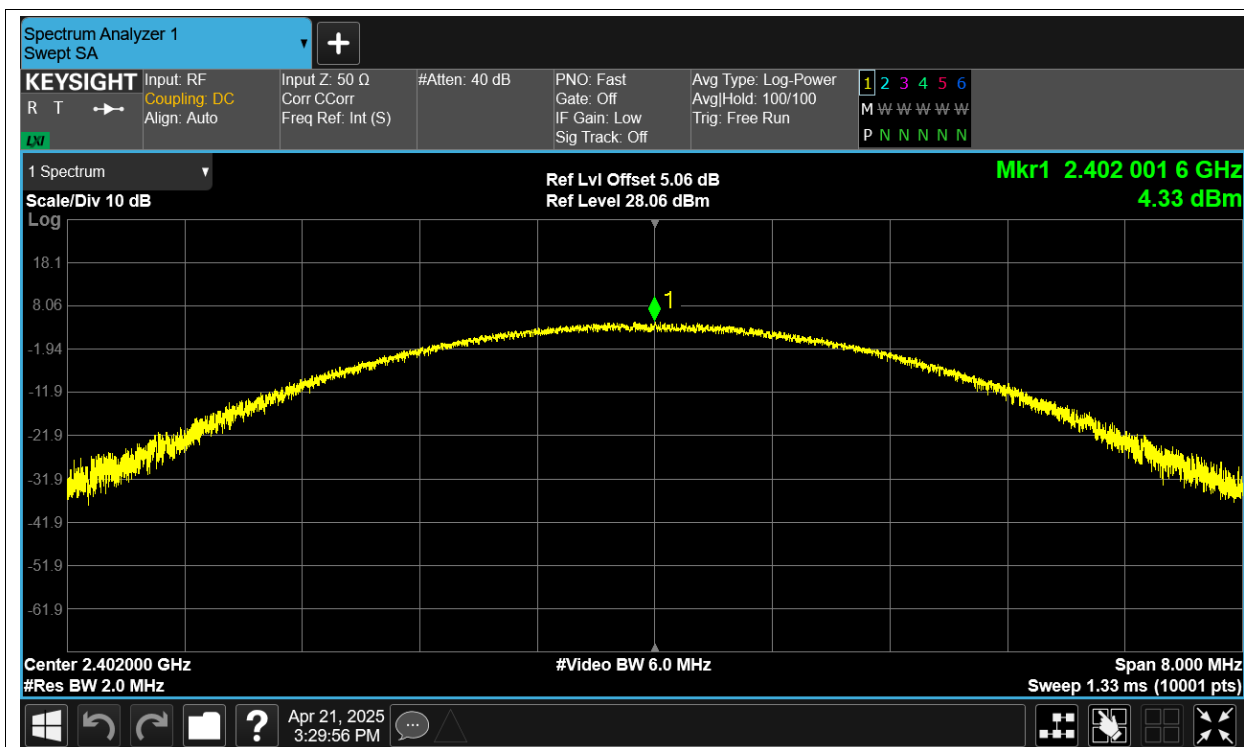

Power NVNT 3-DH1 2441MHz Ant1

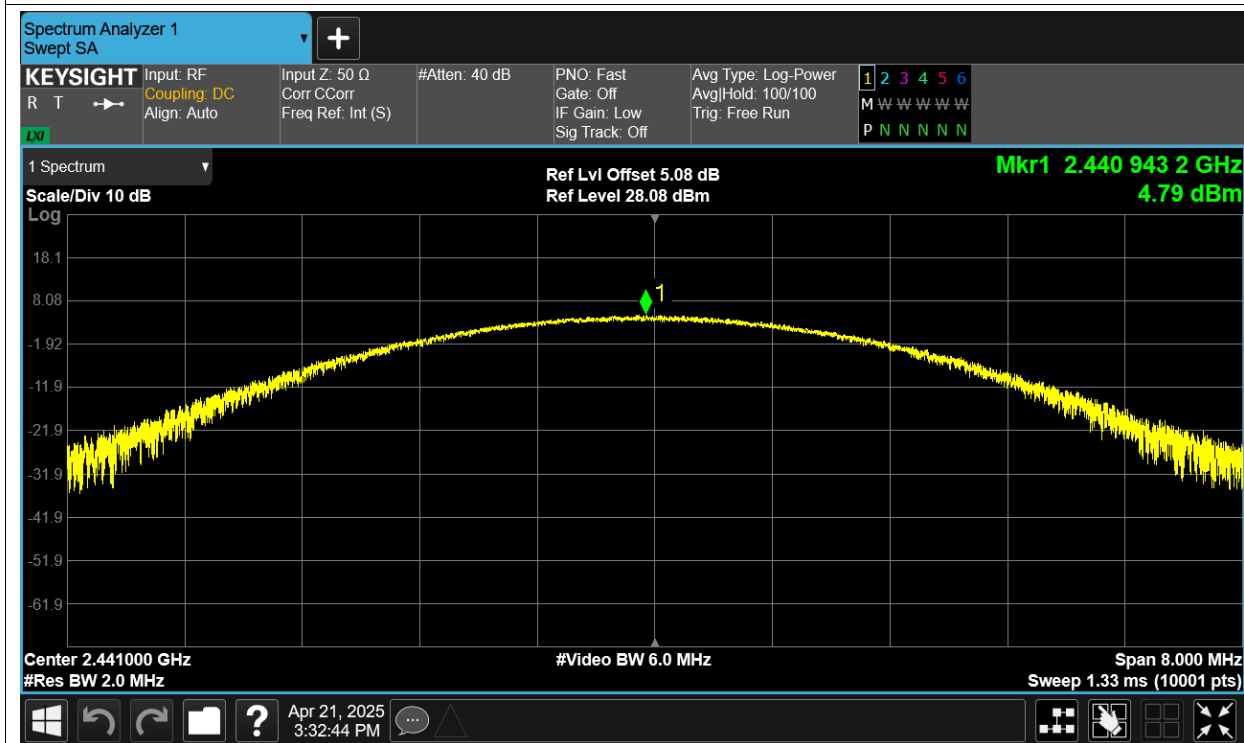


Power NVNT 3-DH1 2480MHz Ant1

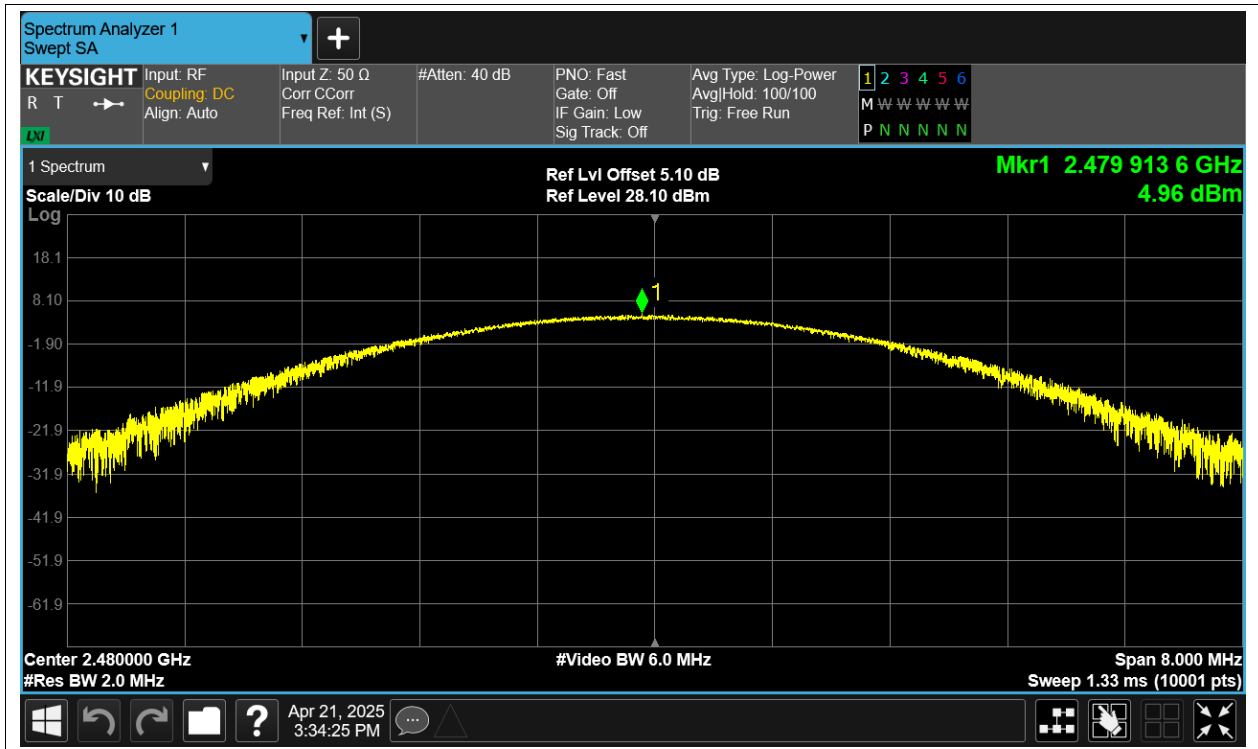


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	0.722
NVNT	1-DH1	2441	Ant1	0.713
NVNT	1-DH1	2480	Ant1	0.728
NVNT	2-DH1	2402	Ant1	1.178
NVNT	2-DH1	2441	Ant1	1.195
NVNT	2-DH1	2480	Ant1	1.18
NVNT	3-DH1	2402	Ant1	1.134
NVNT	3-DH1	2441	Ant1	1.172
NVNT	3-DH1	2480	Ant1	1.175




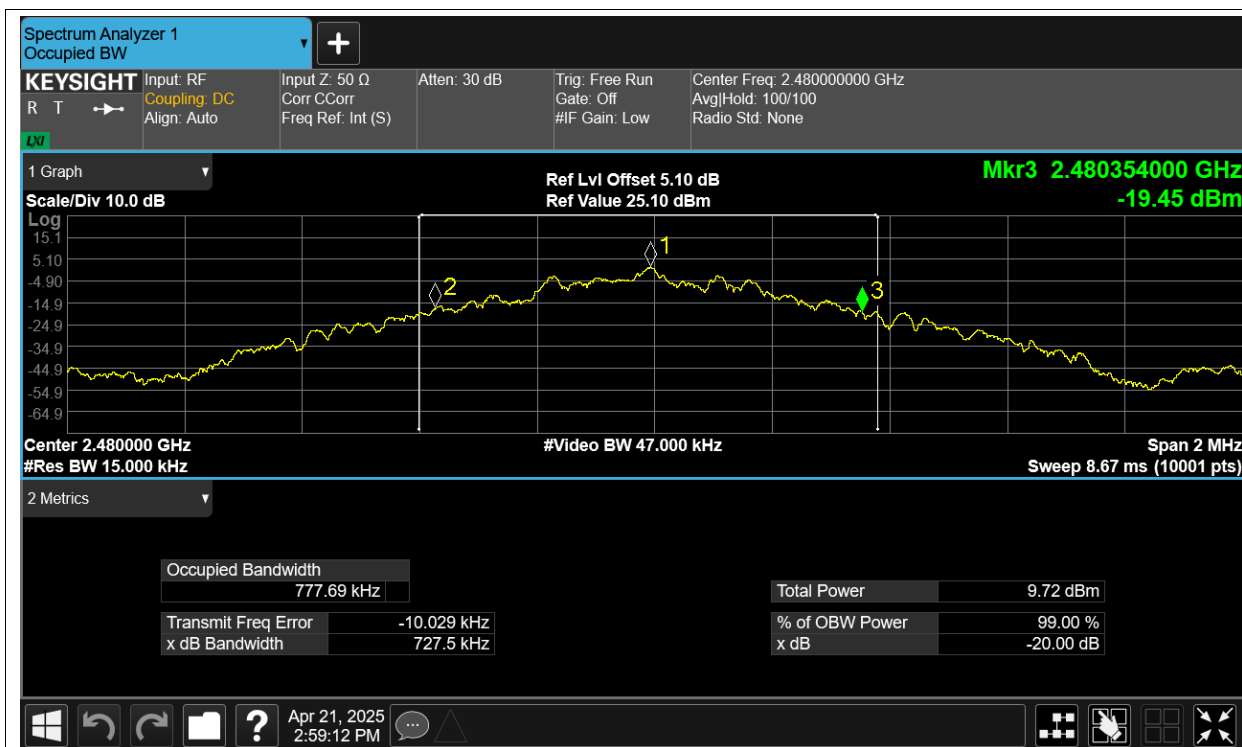


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

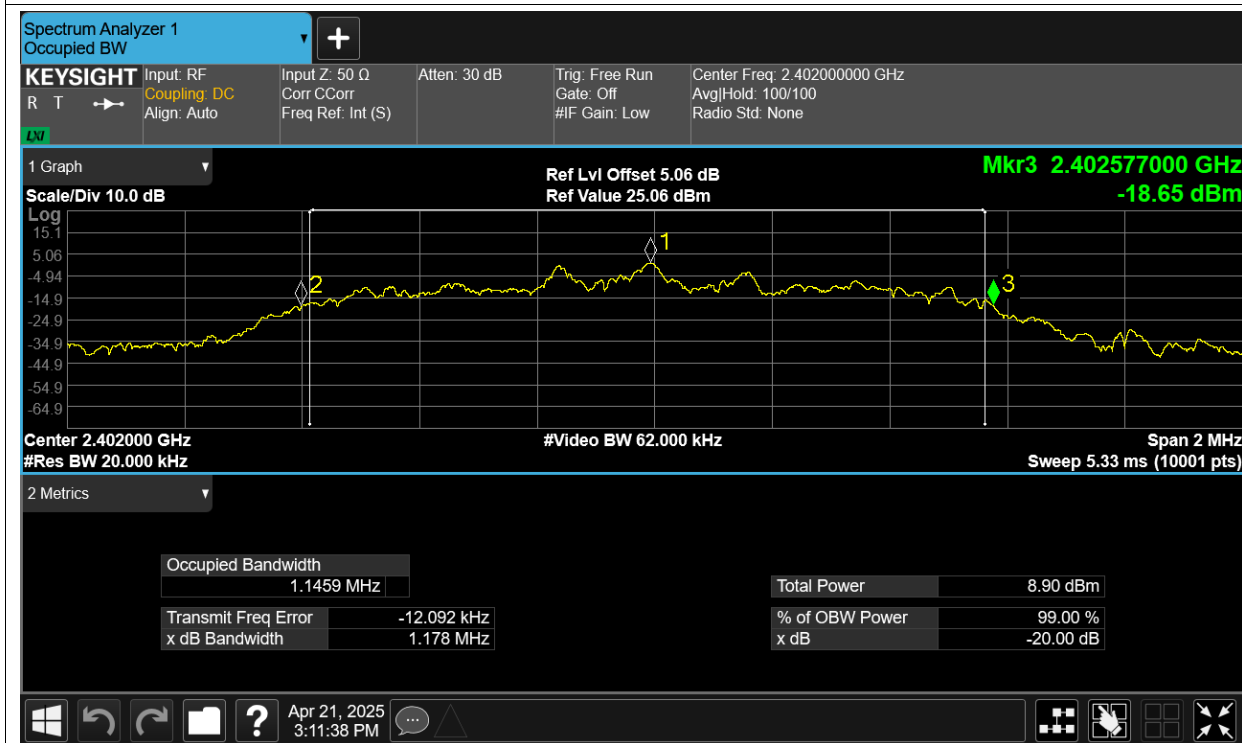


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

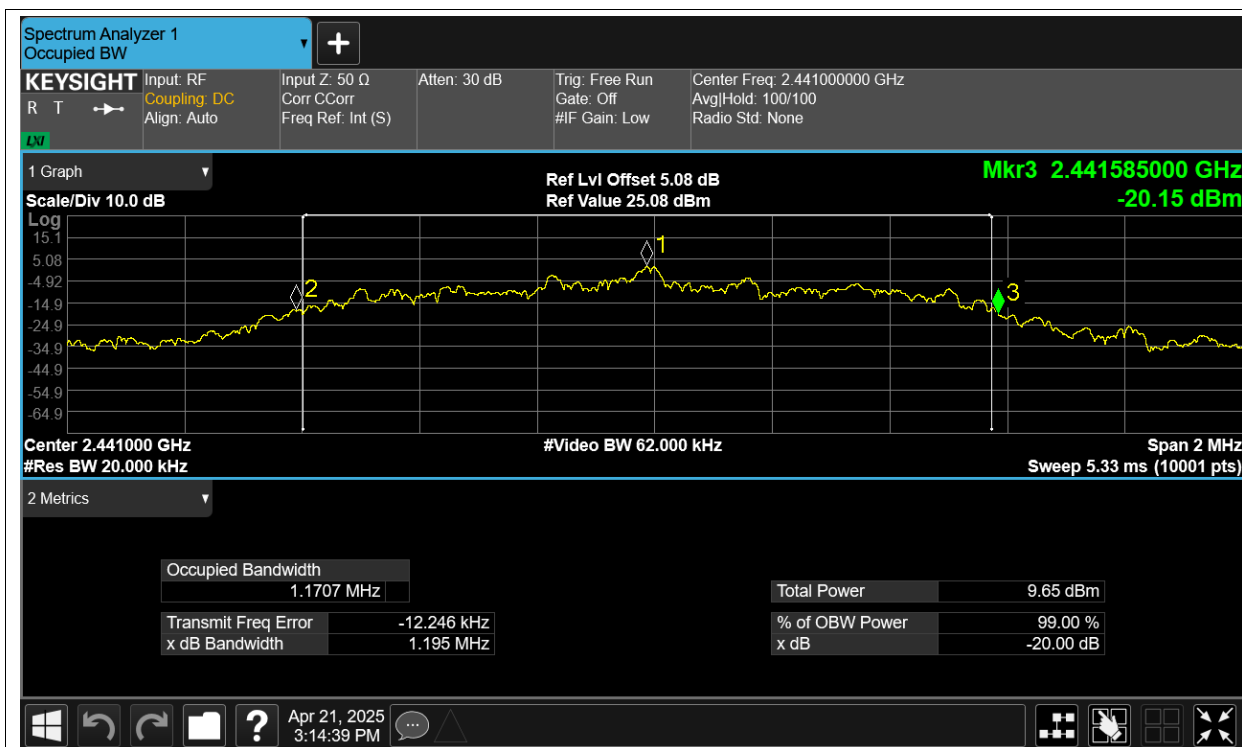


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

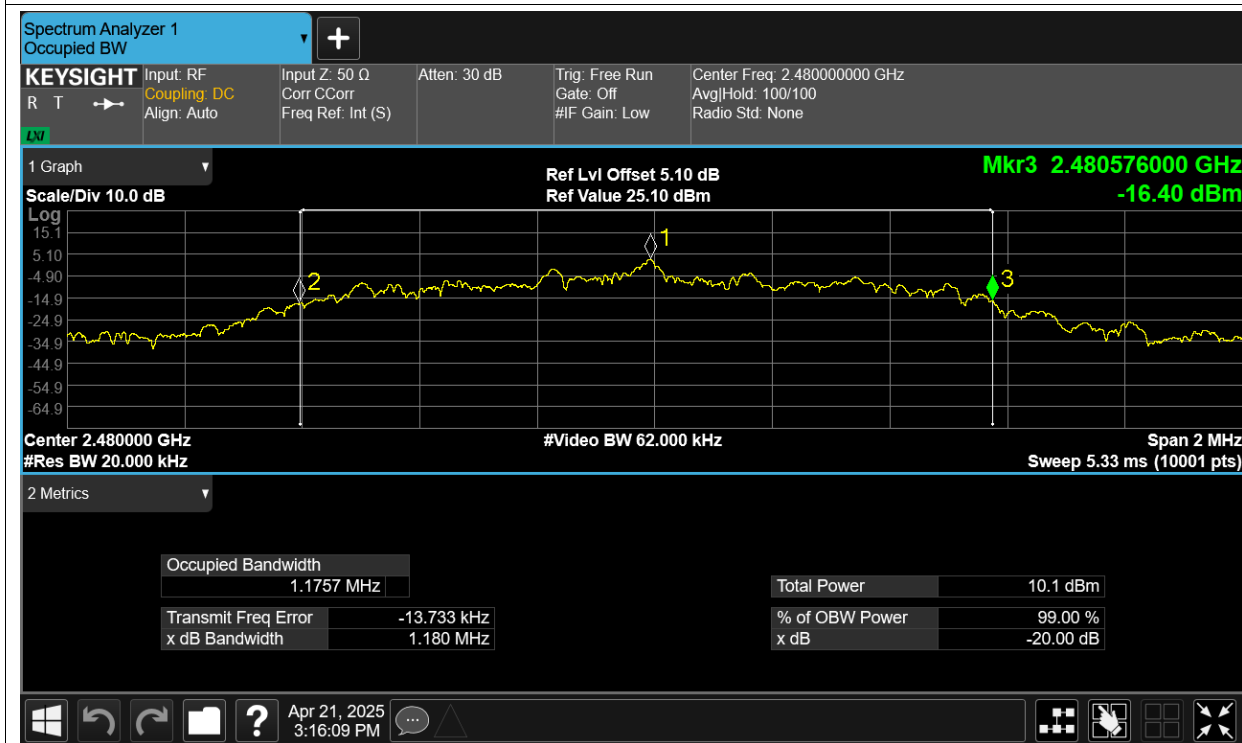


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

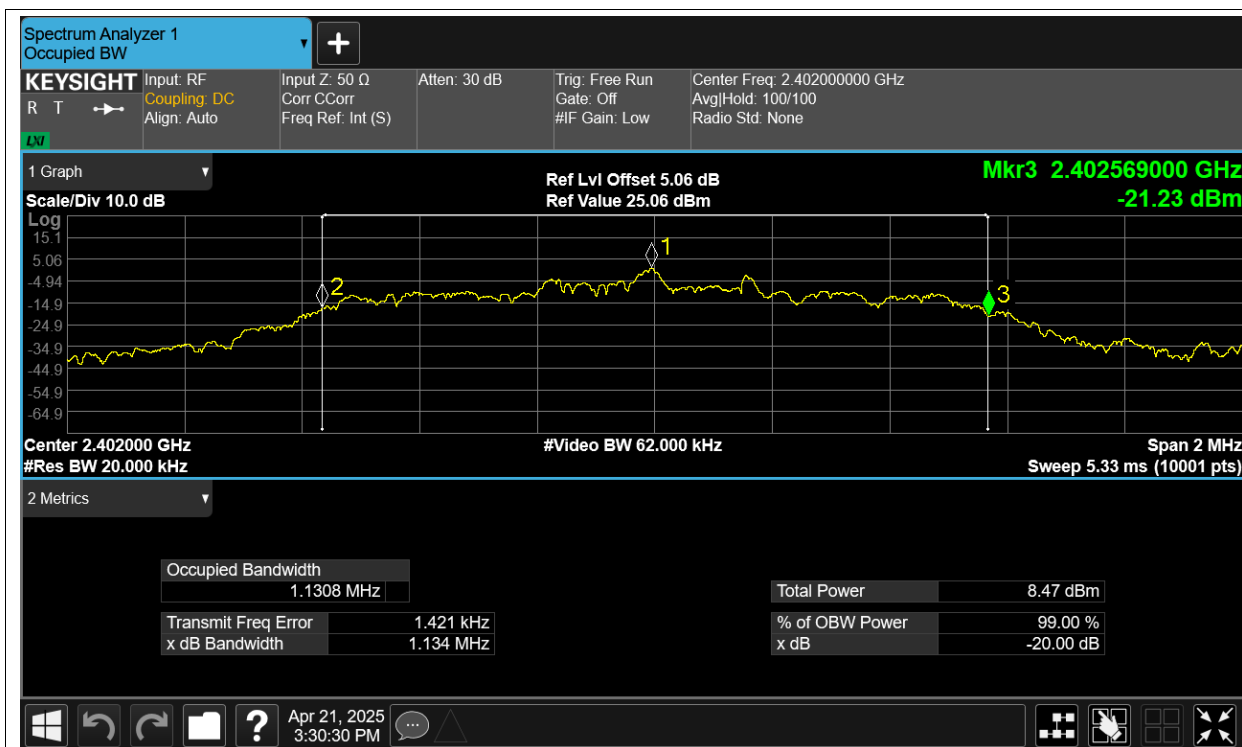

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

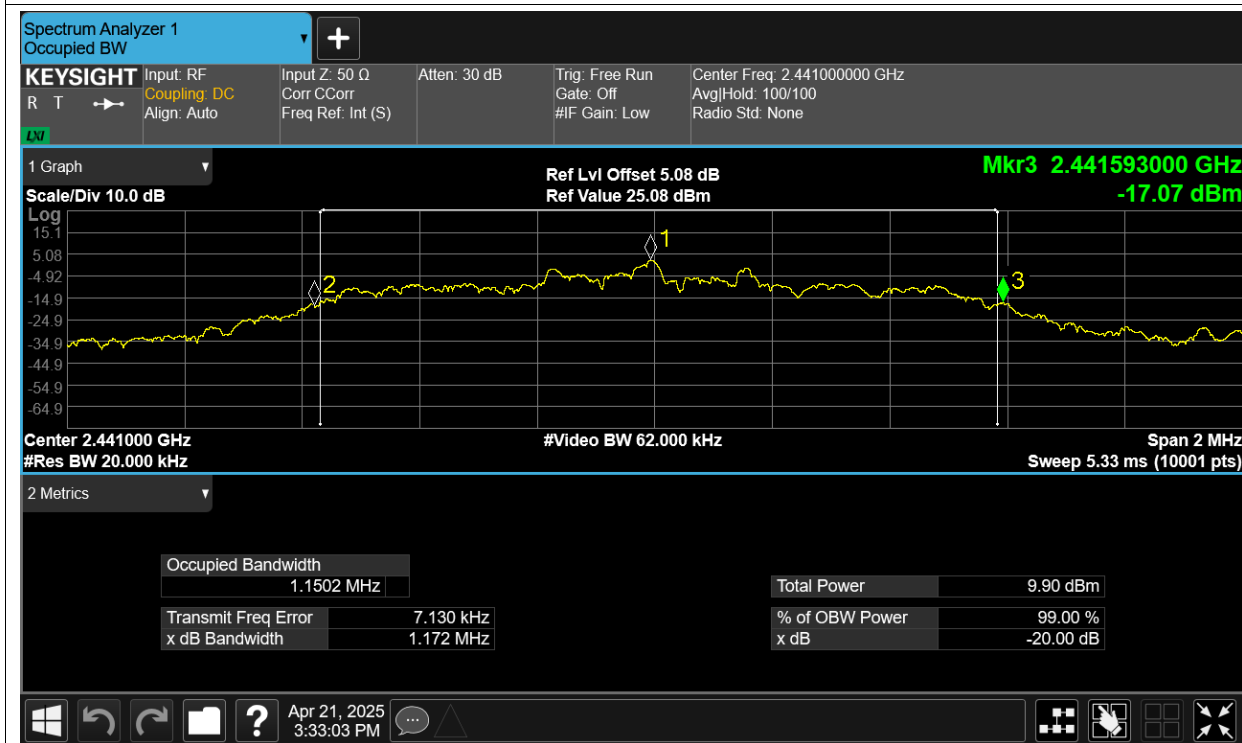

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

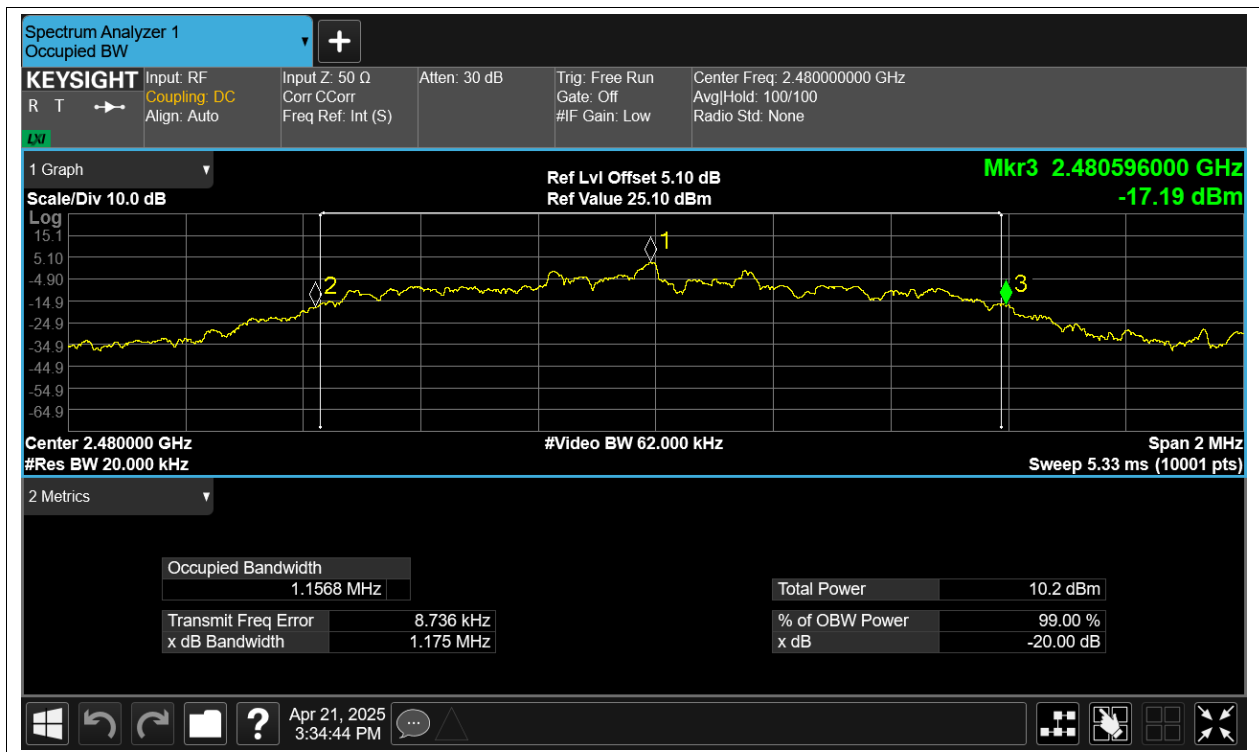


Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2402.152	2403.152	1	0.722	Pass
NVNT	1-DH1	Ant1	2441.156	2441.99	0.834	0.713	Pass
NVNT	1-DH1	Ant1	2478.838	2479.842	1.004	0.728	Pass
NVNT	2-DH1	Ant1	2402.14	2403.15	1.01	0.785	Pass
NVNT	2-DH1	Ant1	2441.16	2442.15	0.99	0.797	Pass
NVNT	2-DH1	Ant1	2478.83	2479.842	1.012	0.787	Pass
NVNT	3-DH1	Ant1	2401.84	2402.846	1.006	0.756	Pass
NVNT	3-DH1	Ant1	2440.836	2441.83	0.994	0.781	Pass
NVNT	3-DH1	Ant1	2478.998	2480.144	1.146	0.783	Pass

Test Graphs


CFS NVNT 1-DH1 2402MHz Ant1

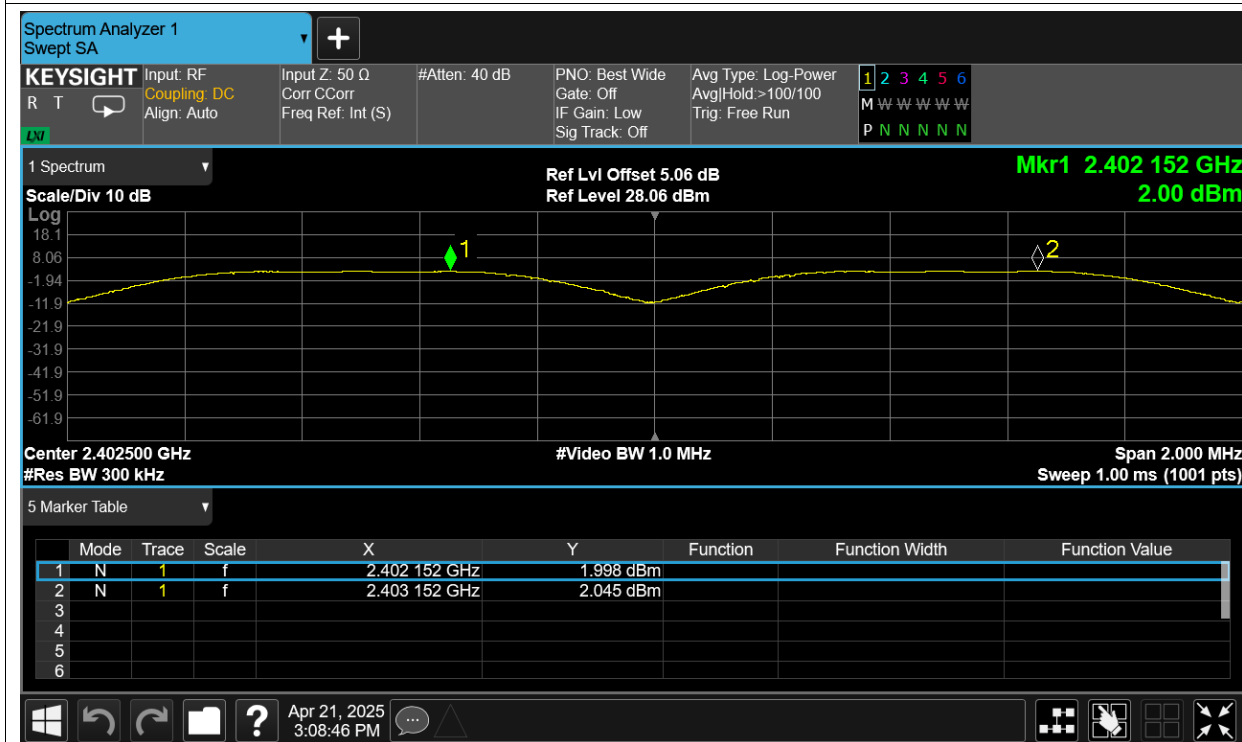


CFS NVNT 1-DH1 2441MHz Ant1

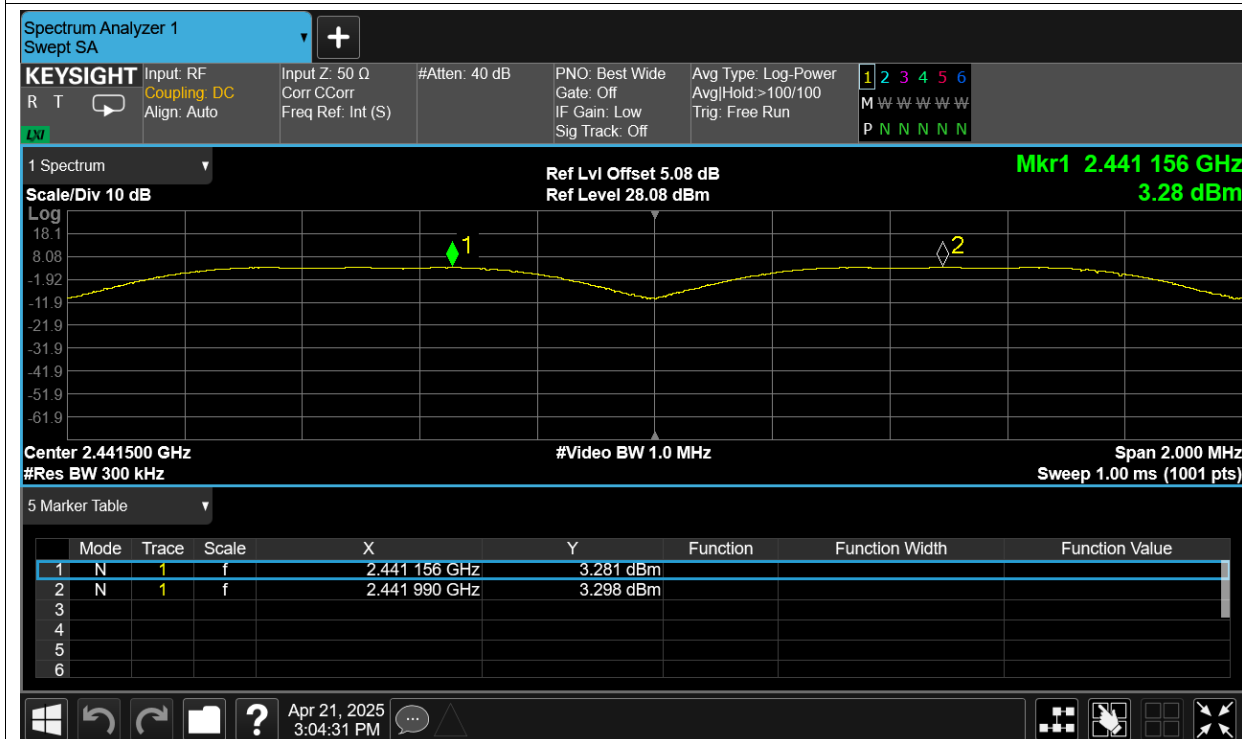


CFS NVNT 1-DH1 2480MHz Ant1

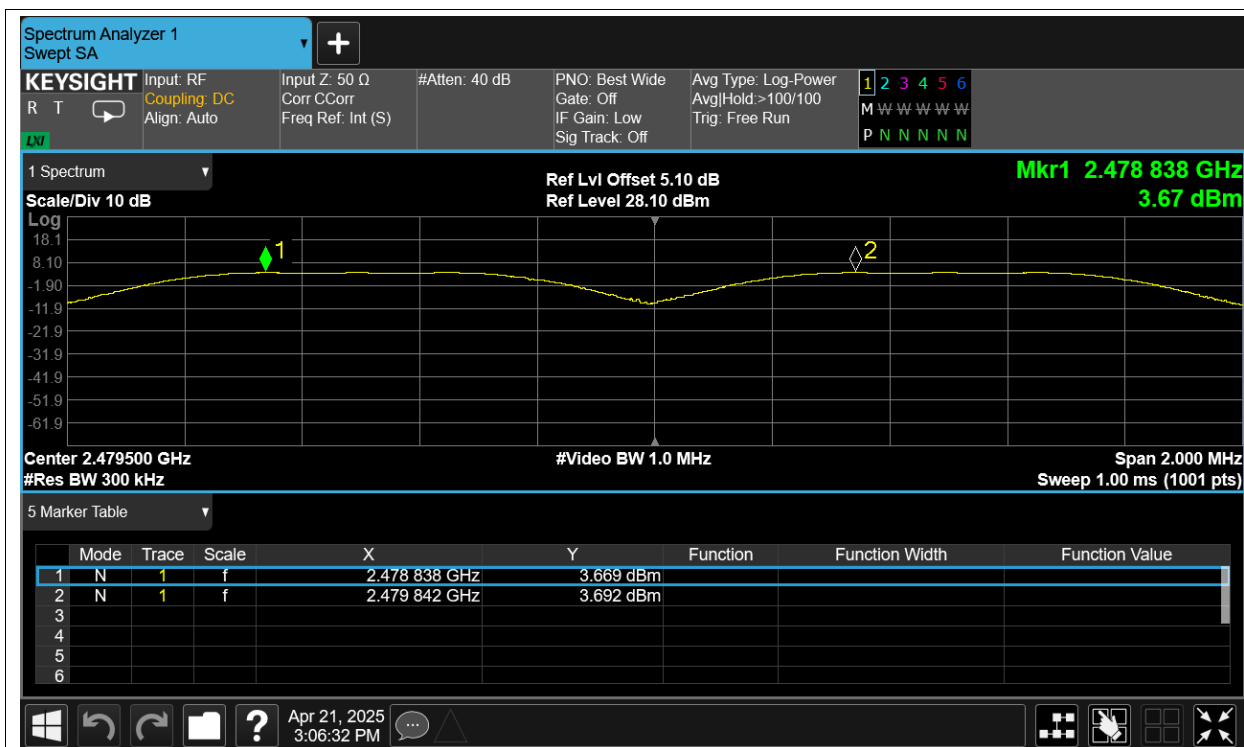


CFS NVNT 2-DH1 2402MHz Ant1

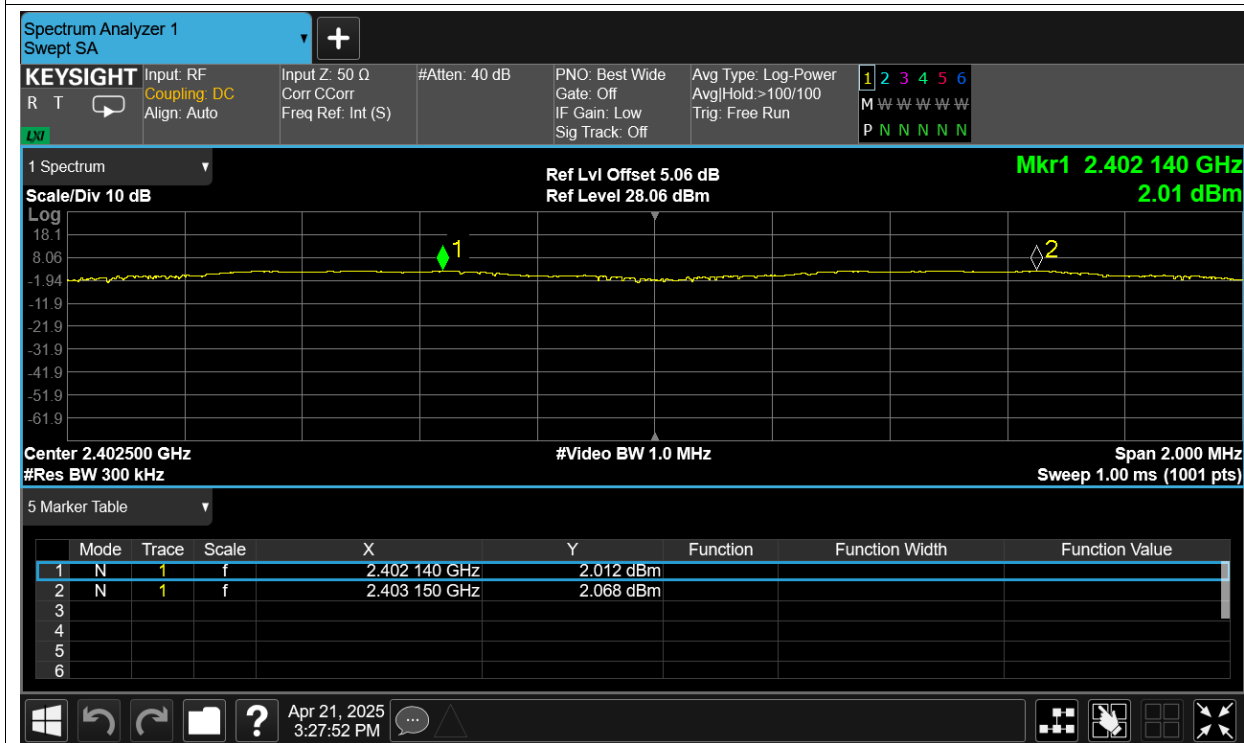


CFS NVNT 2-DH1 2441MHz Ant1

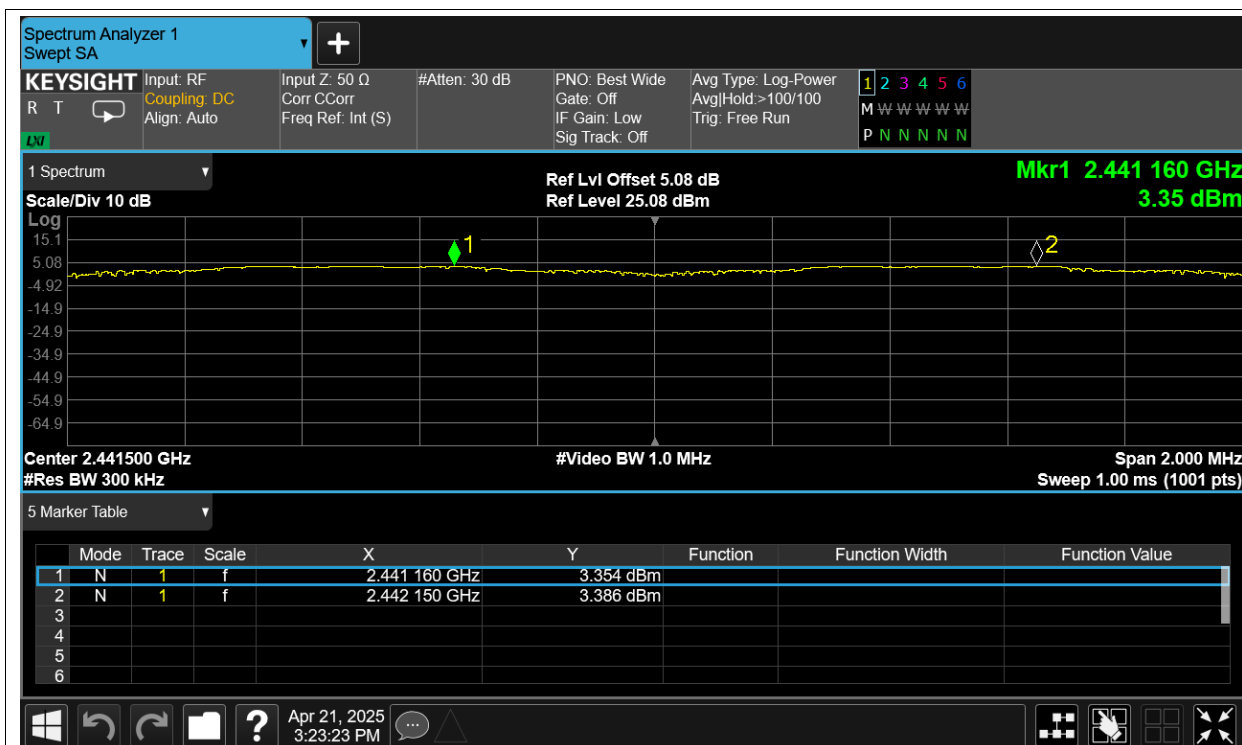


CFS NVNT 2-DH1 2480MHz Ant1

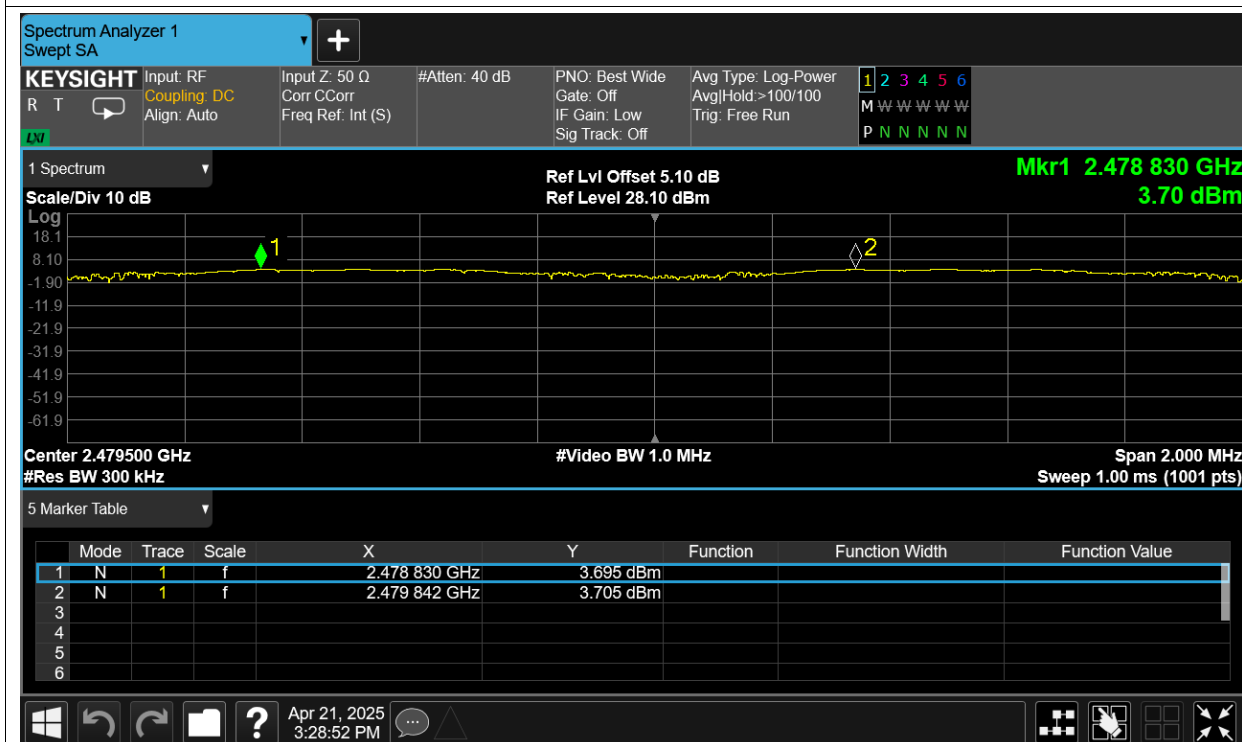


CFS NVNT 3-DH1 2402MHz Ant1

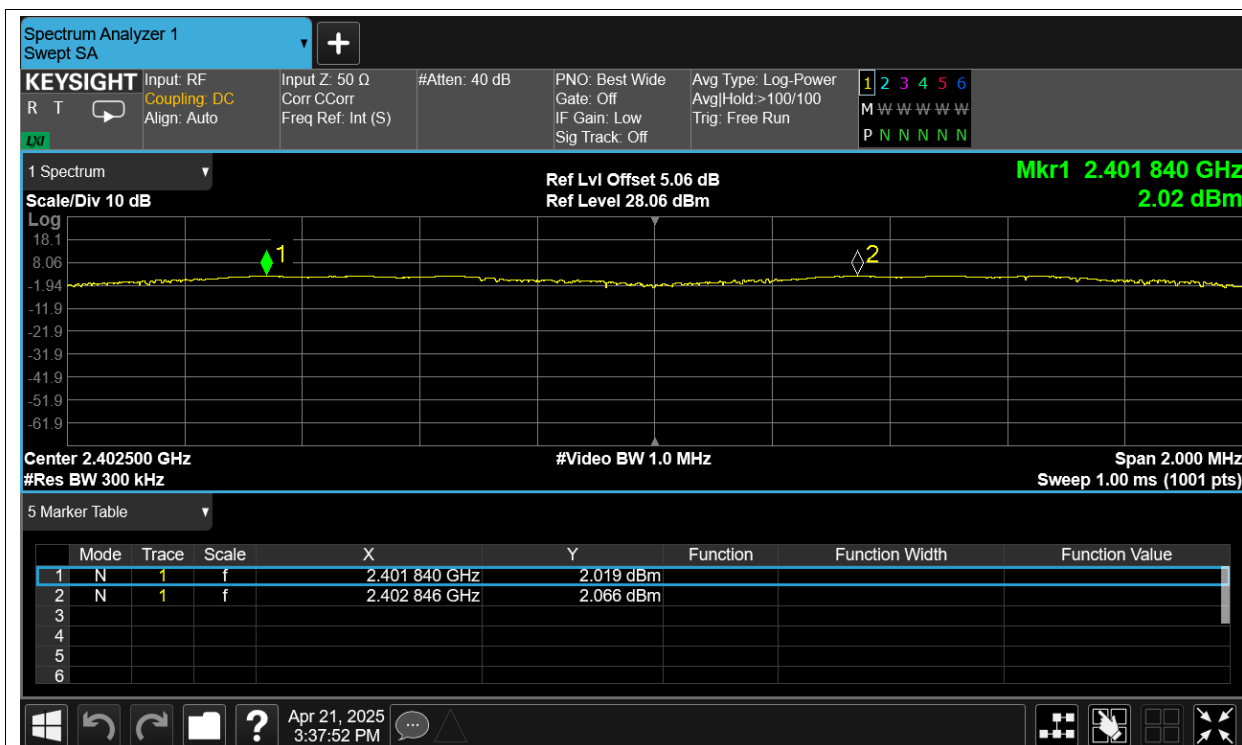

CFS NVNT 3-DH1 2441MHz Ant1

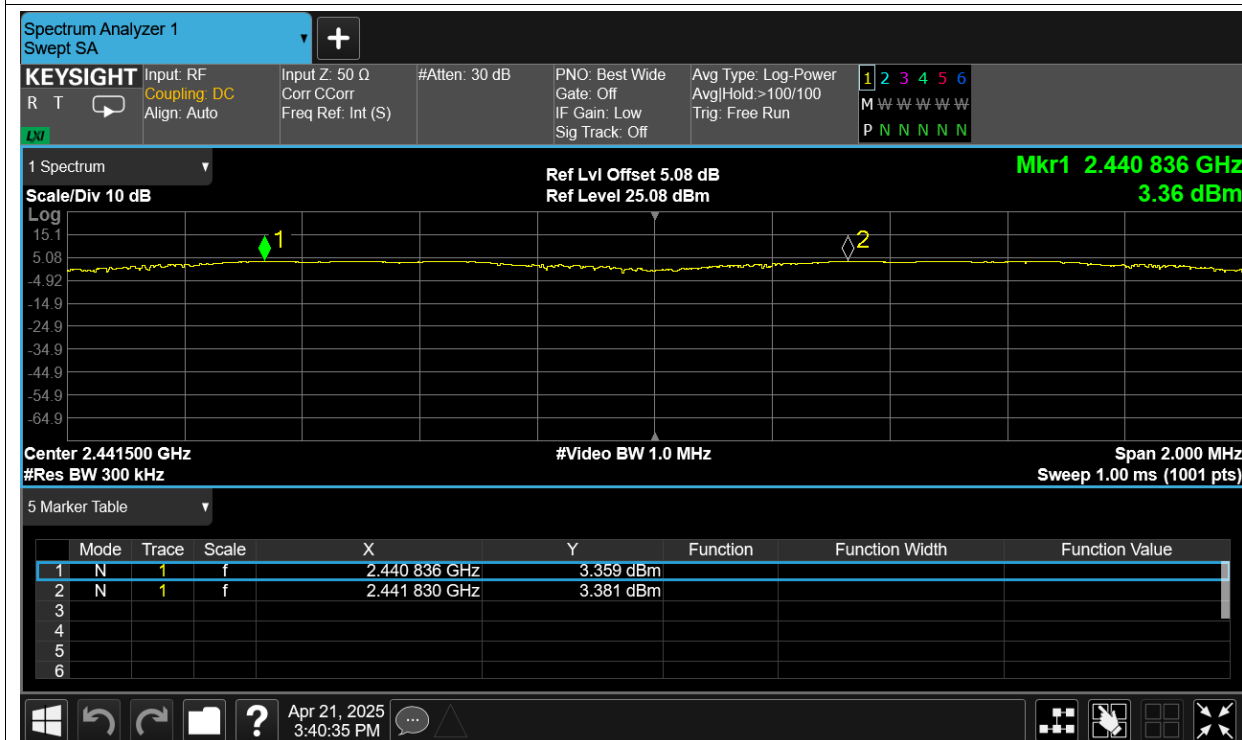

CFS NVNT 3-DH1 2480MHz Ant1

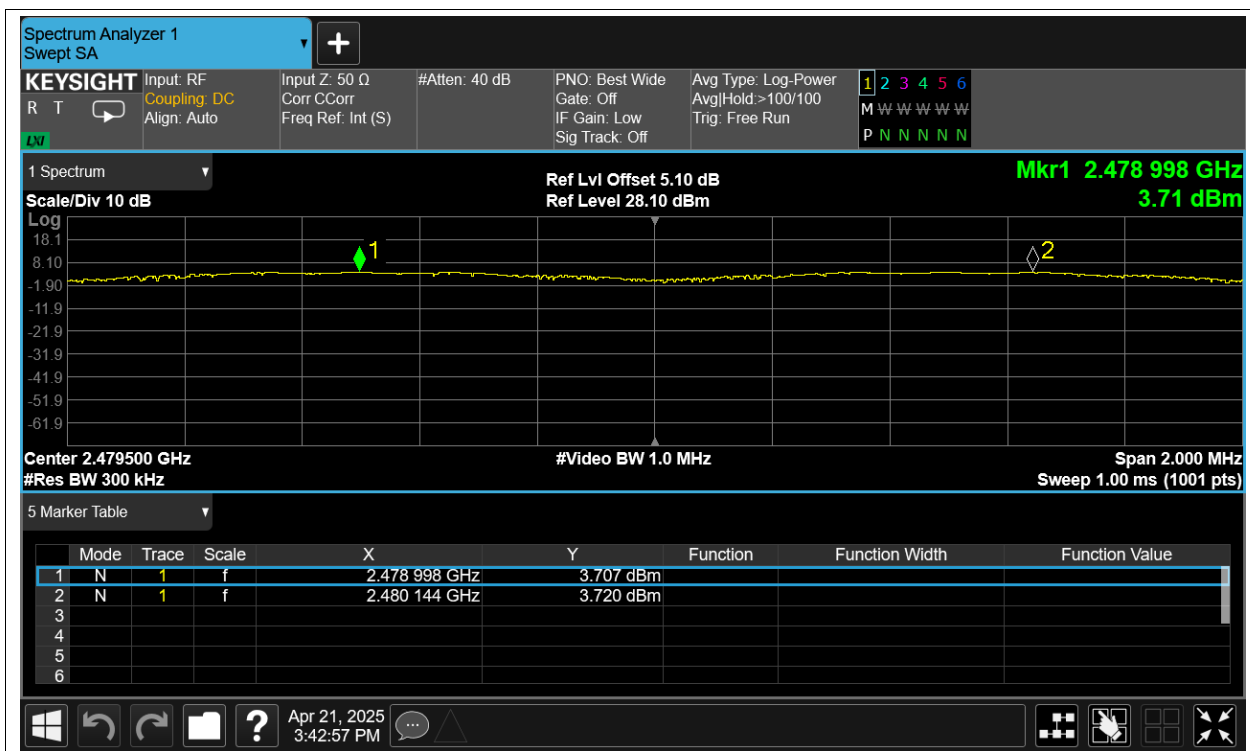


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-60.12	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-61.46	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-48.11	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-52.39	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-47.05	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-52.26	-20	Pass

Test Graphs


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

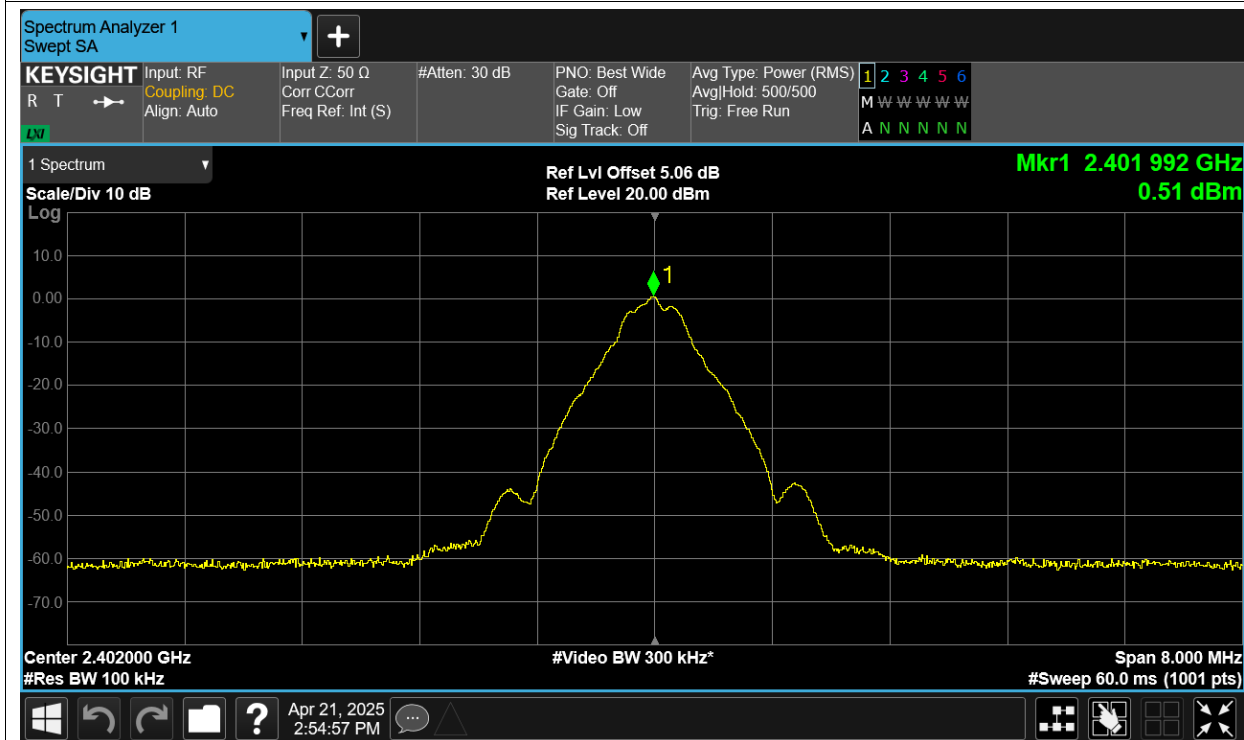


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

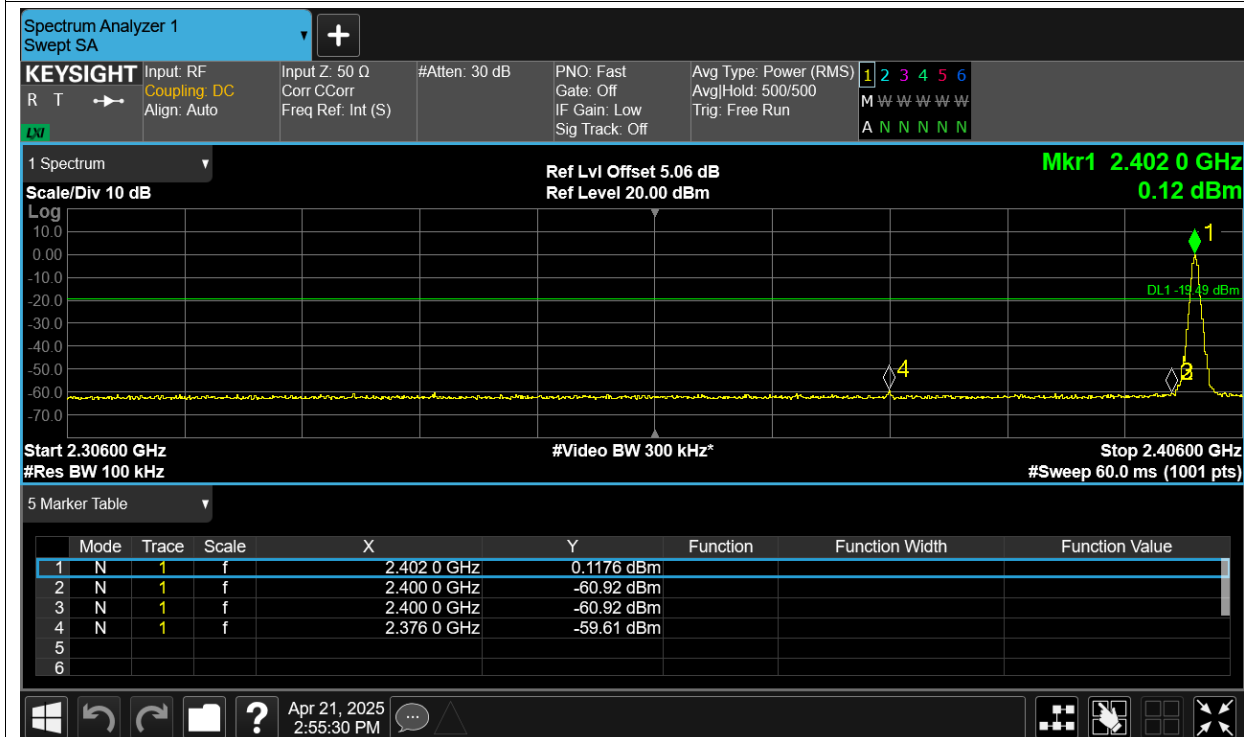


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

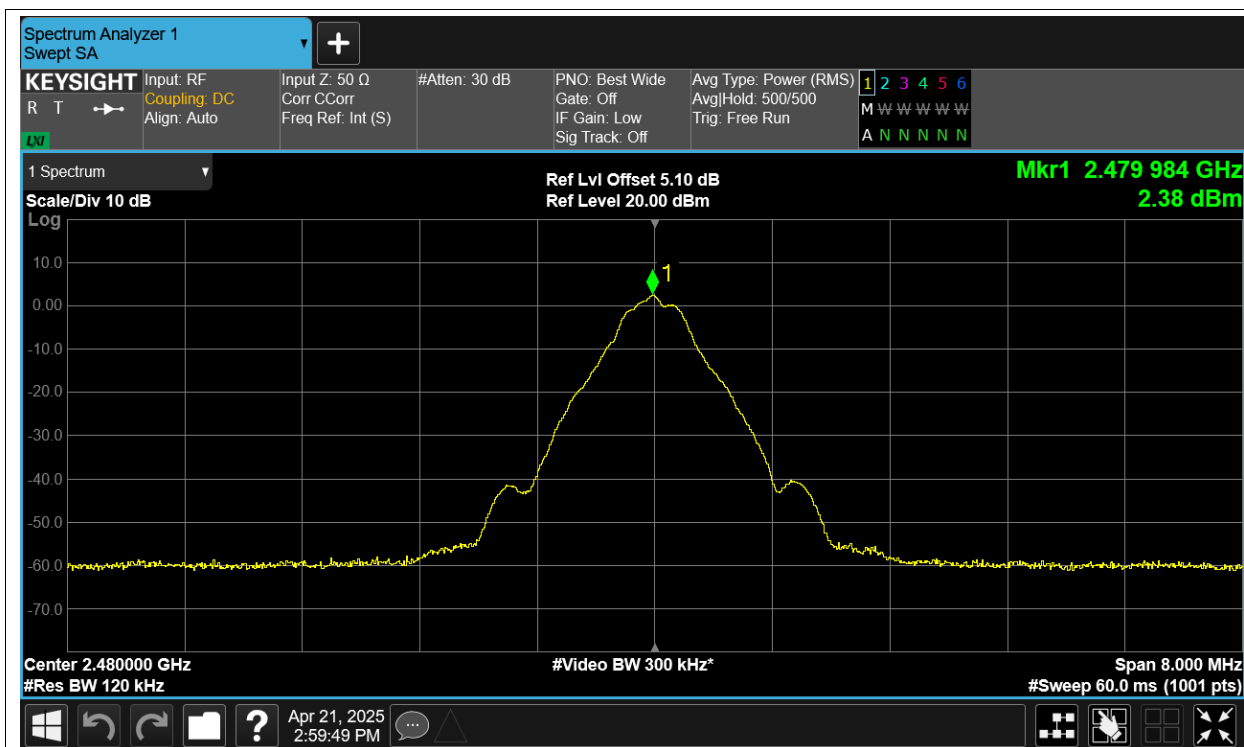


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

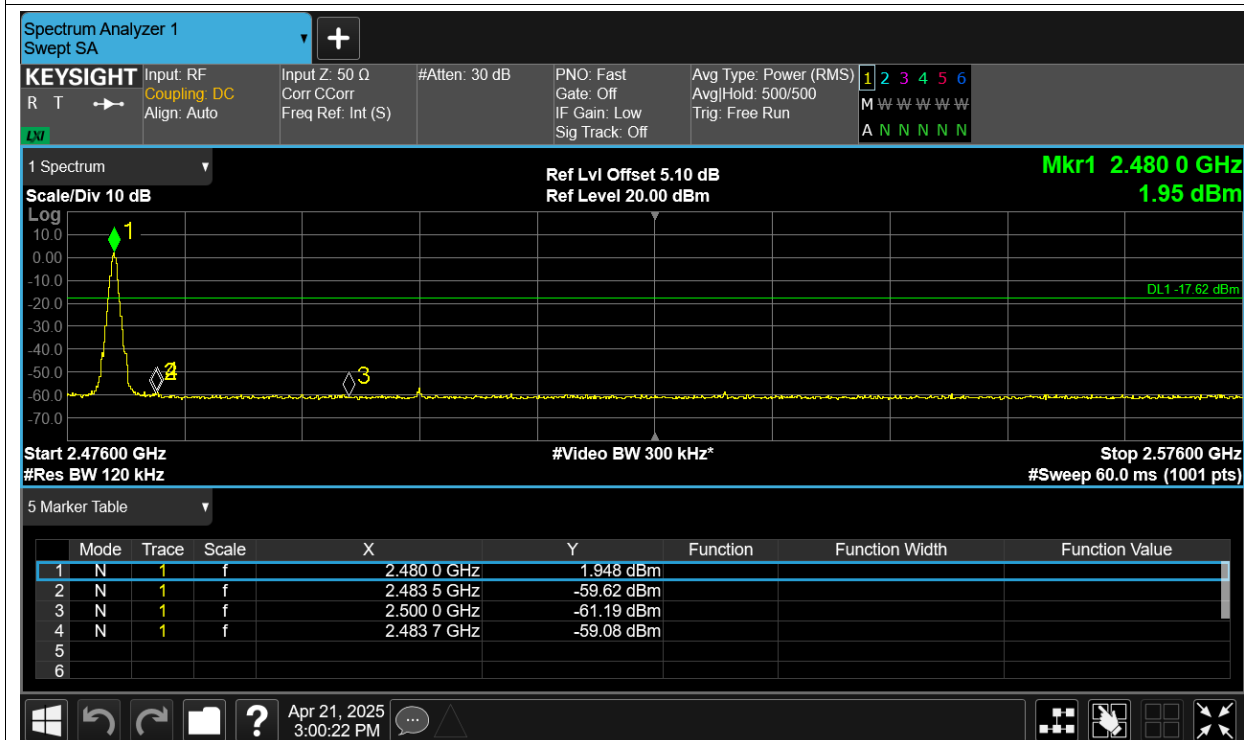


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

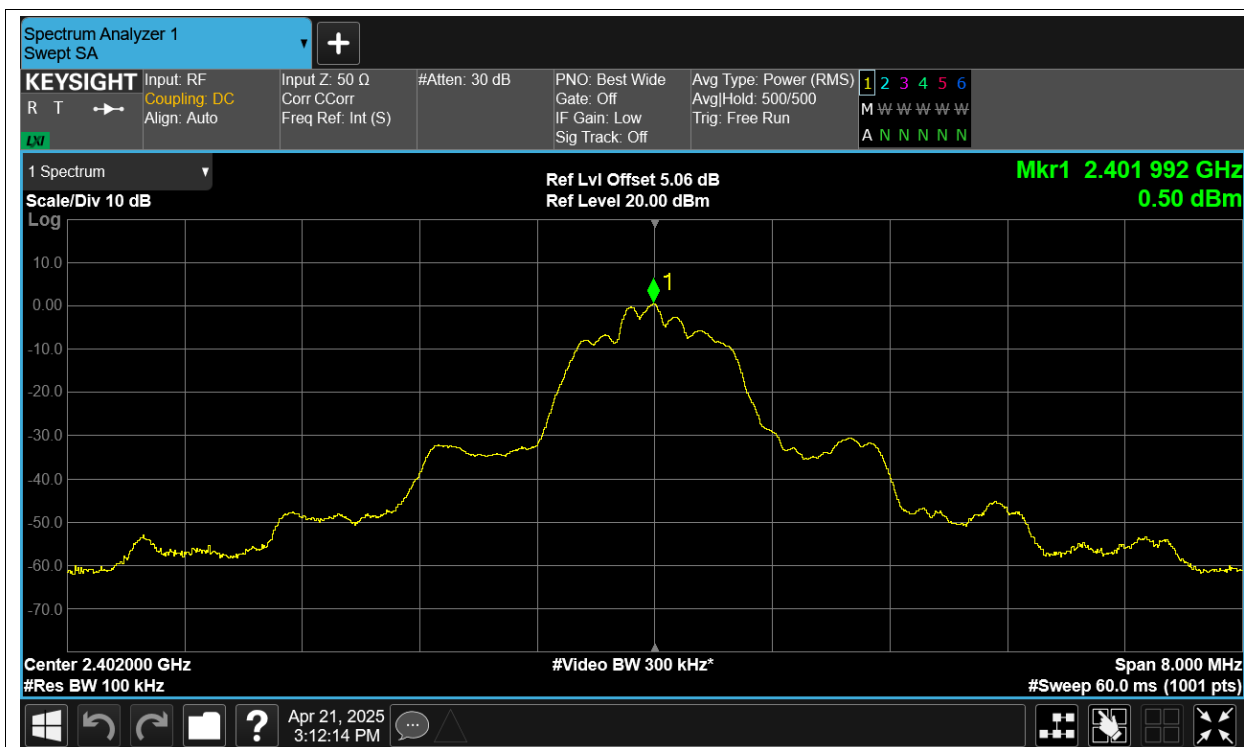


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

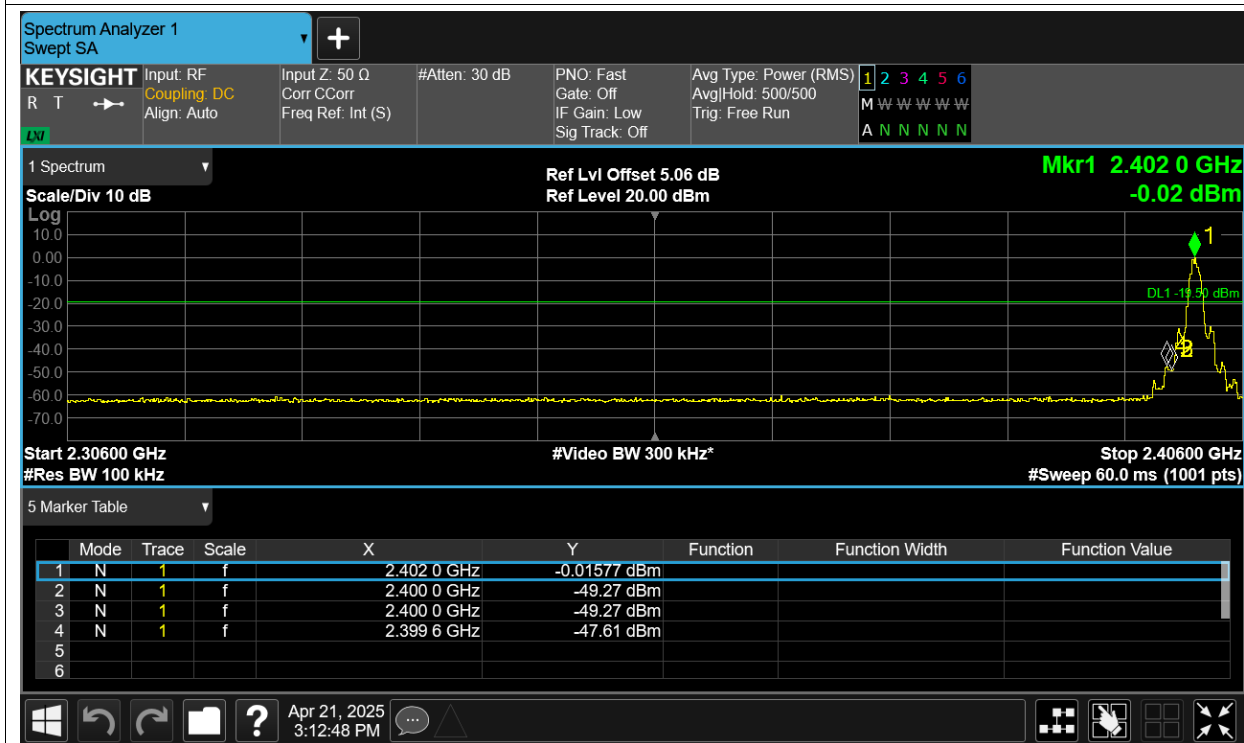


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

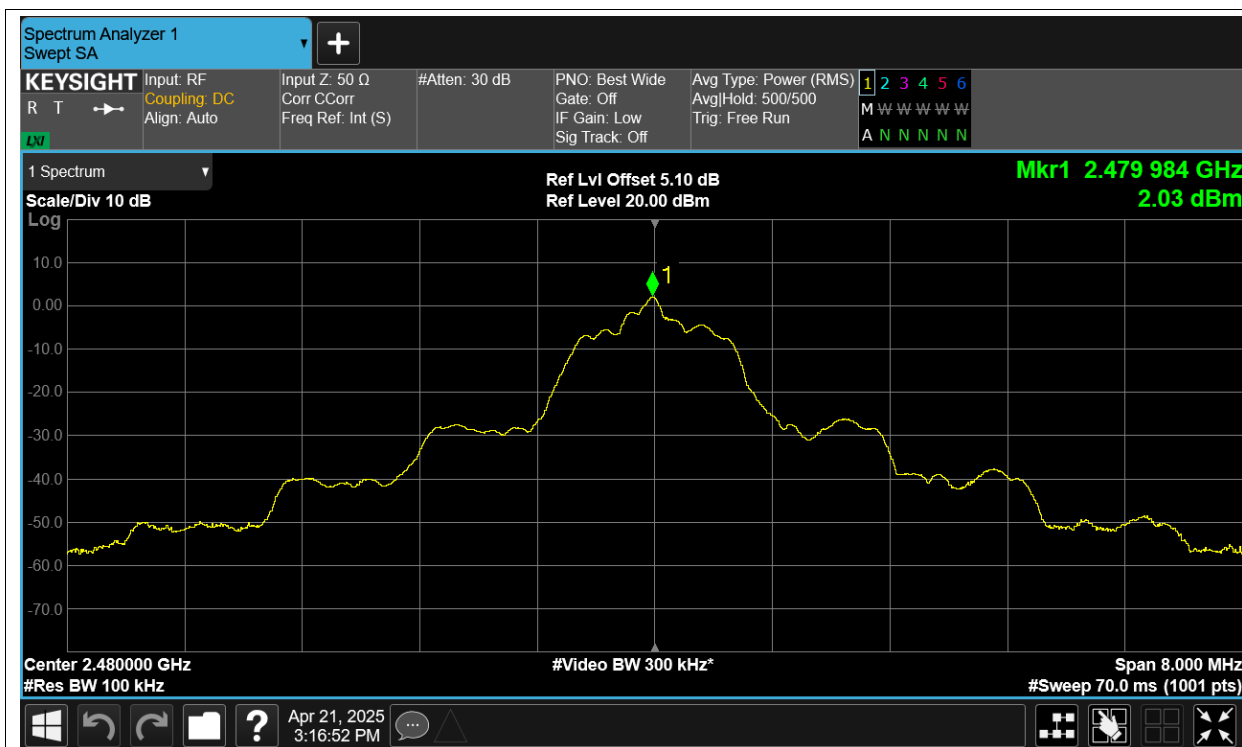


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

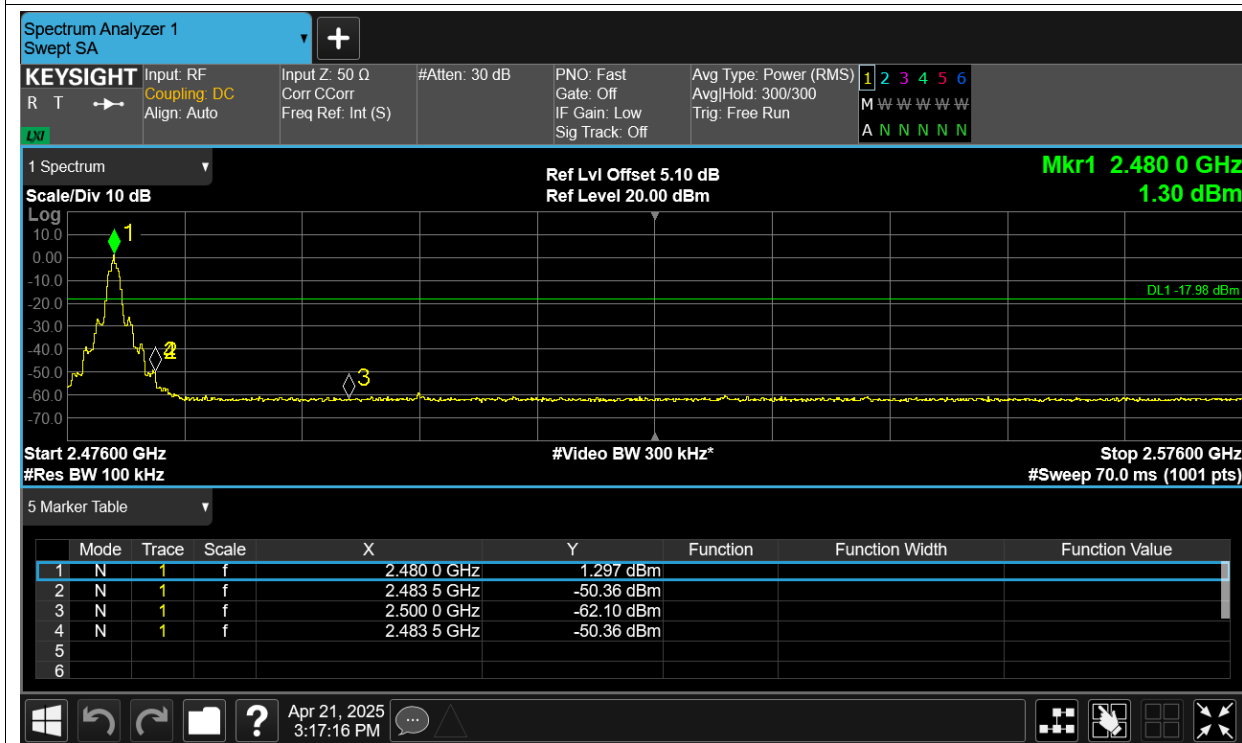


Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref

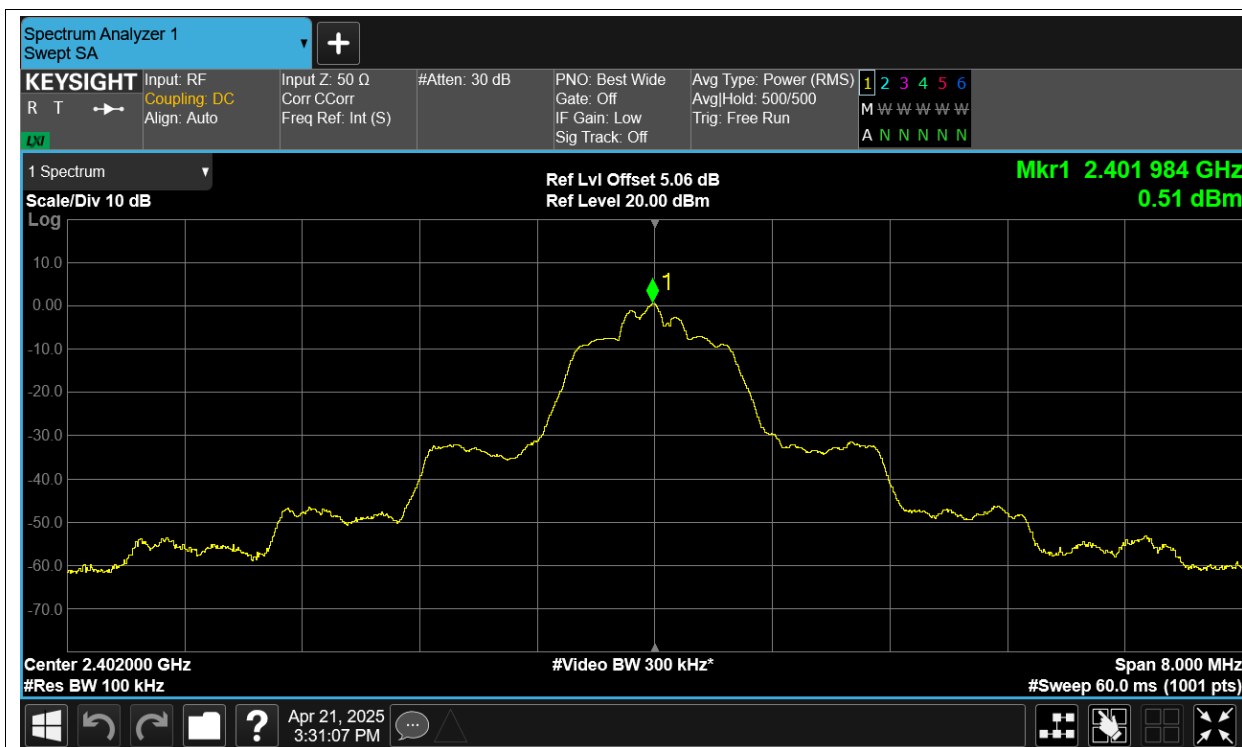


Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

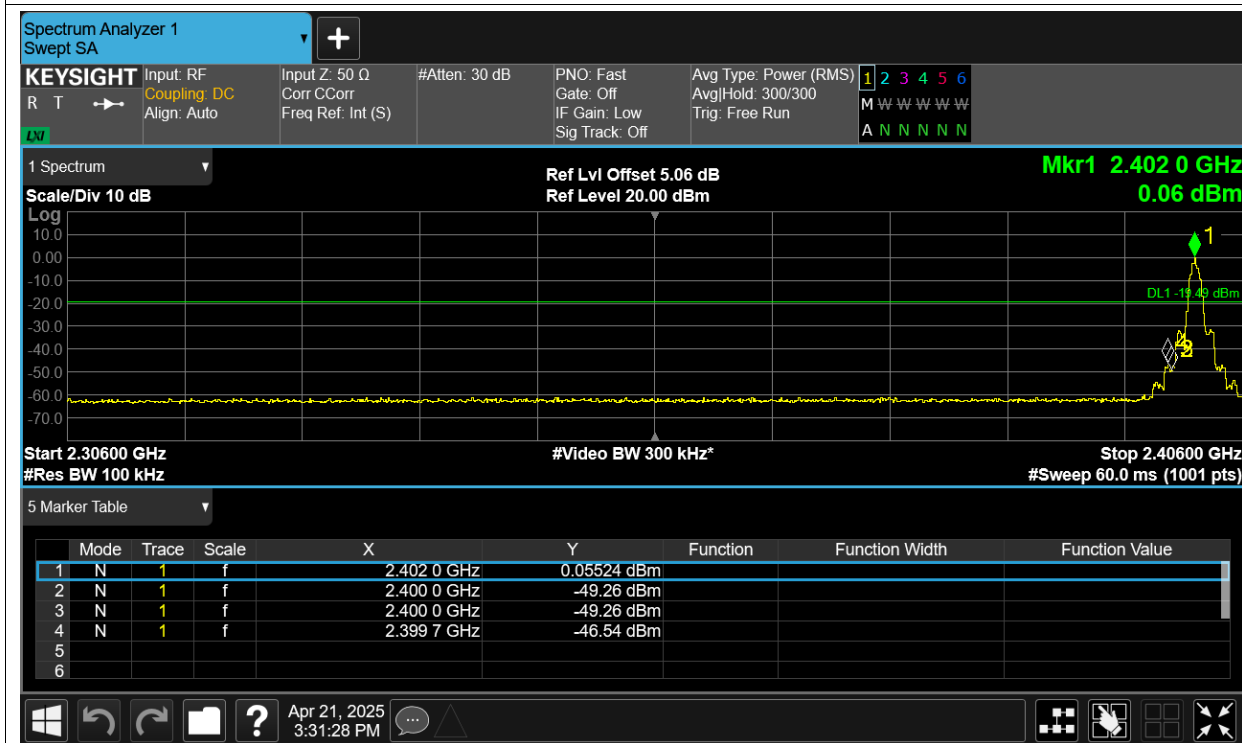

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref

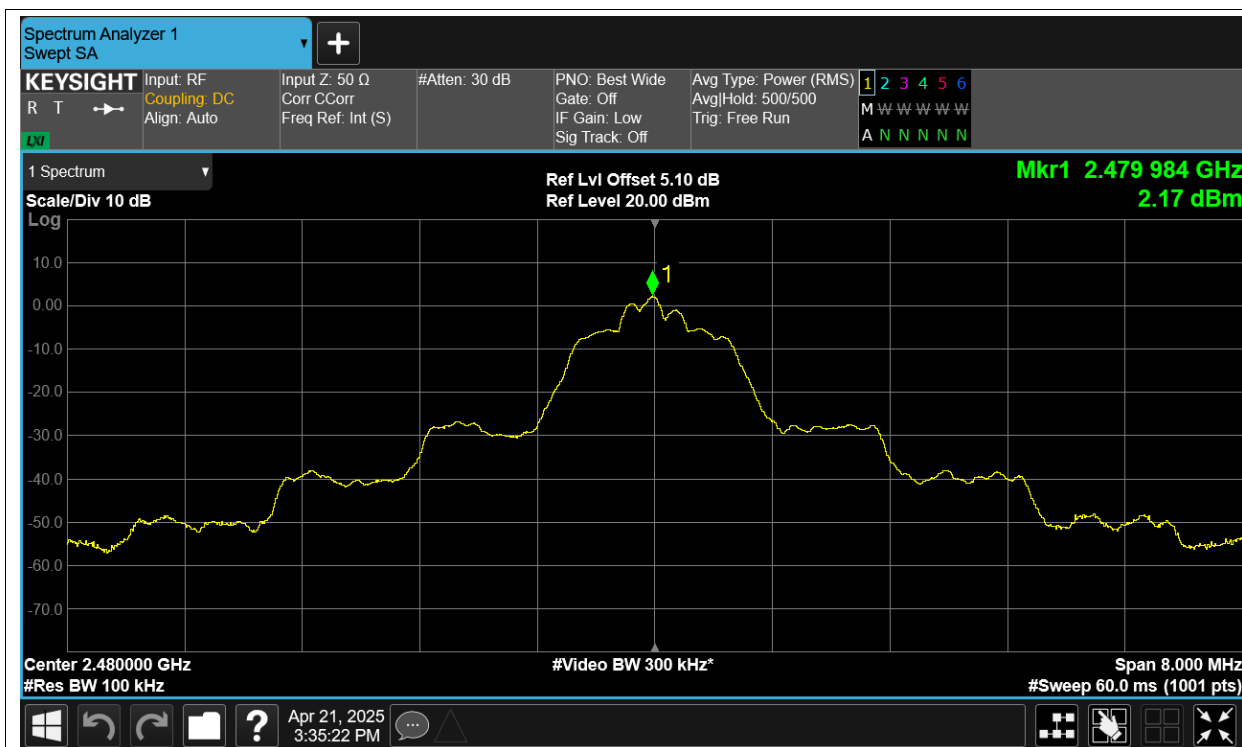

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

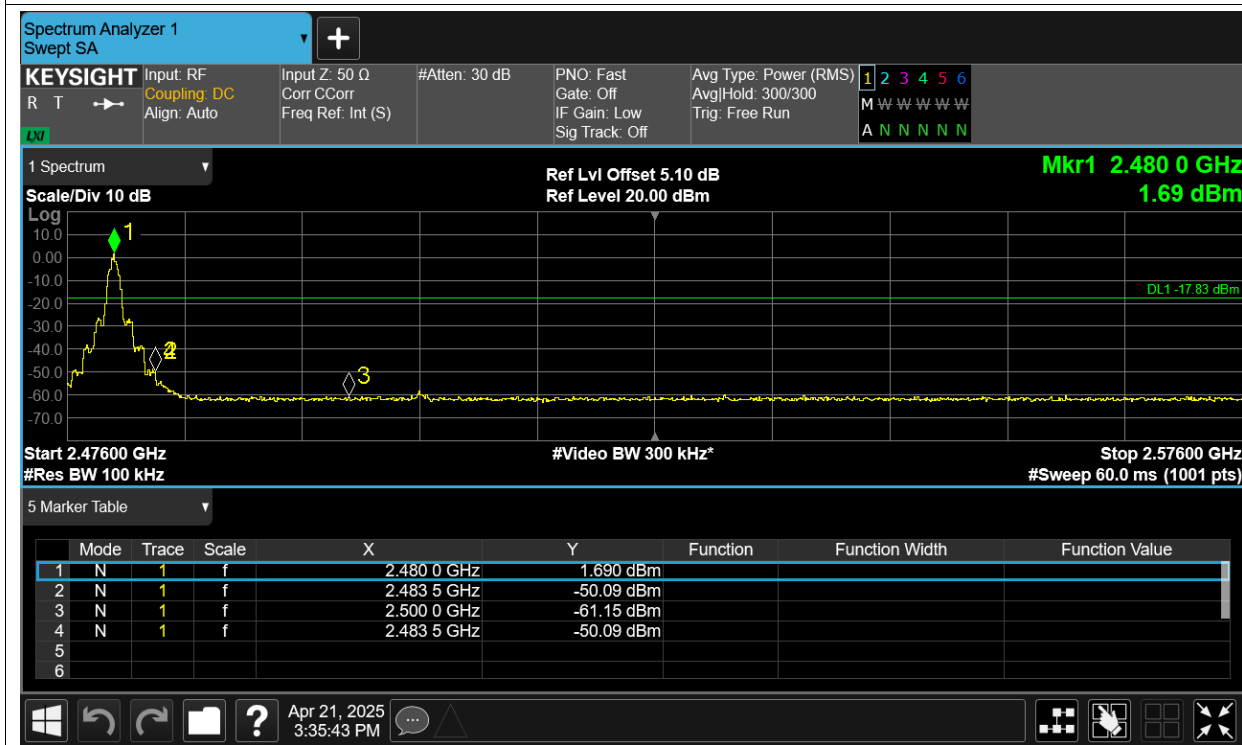


Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-56.15	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-56.79	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-55.96	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-47.79	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-55.14	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-51.98	-20	Pass

Test Graphs


Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref

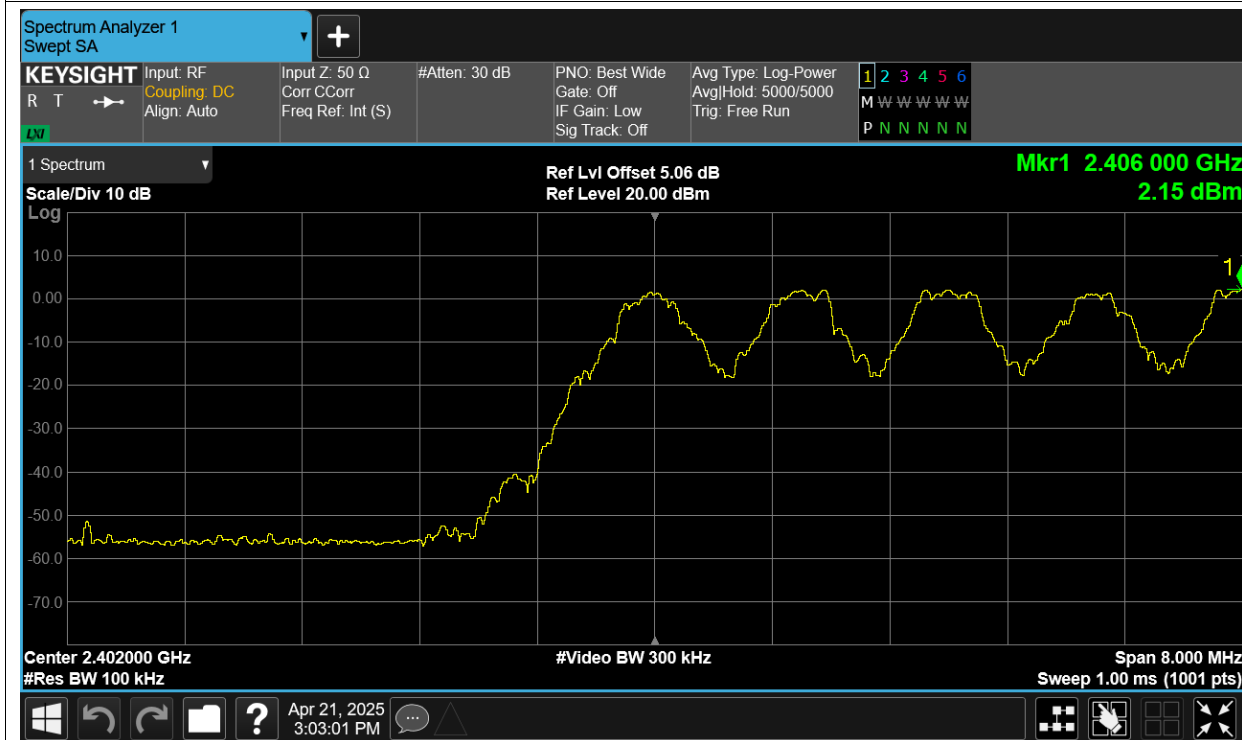


Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

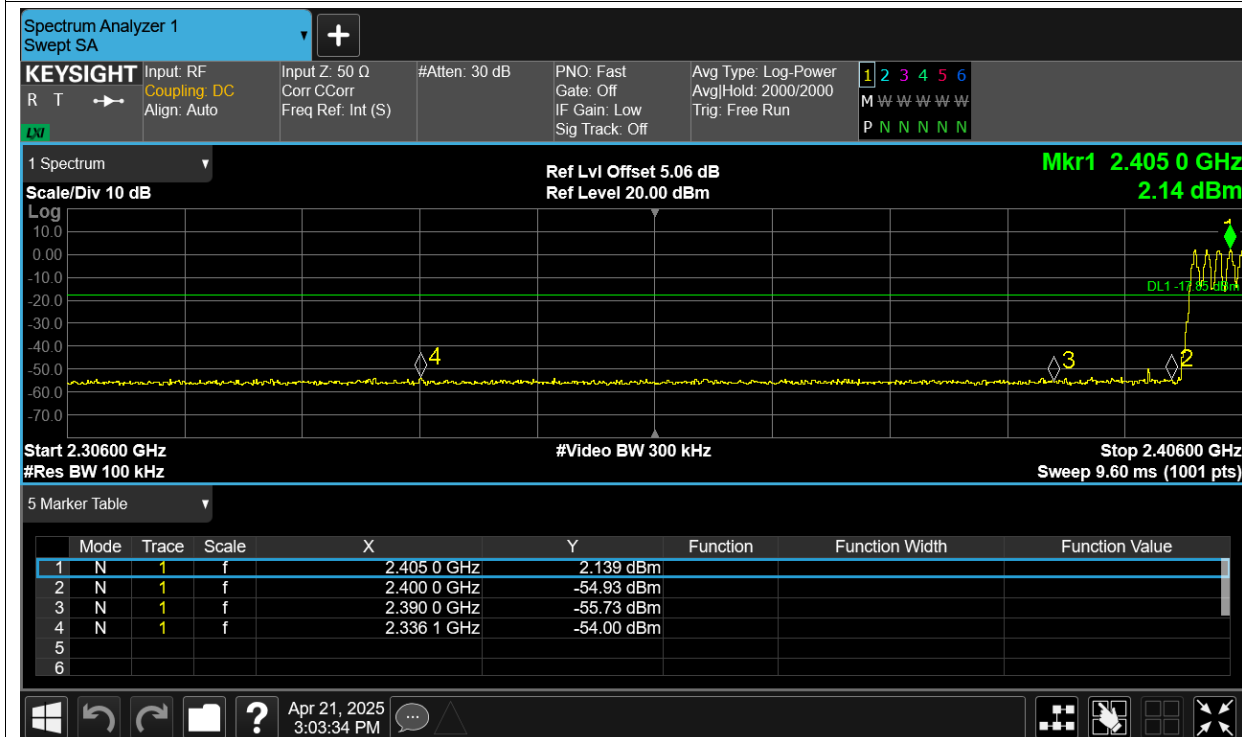


Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref

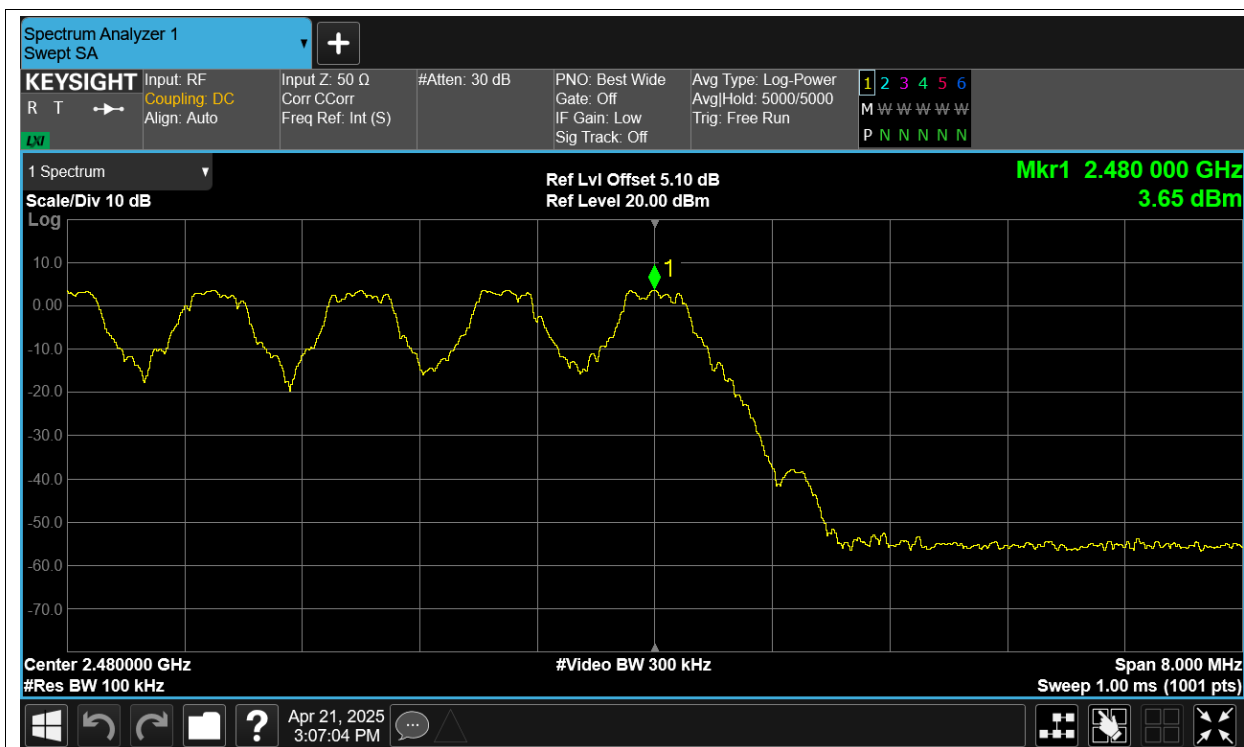


Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

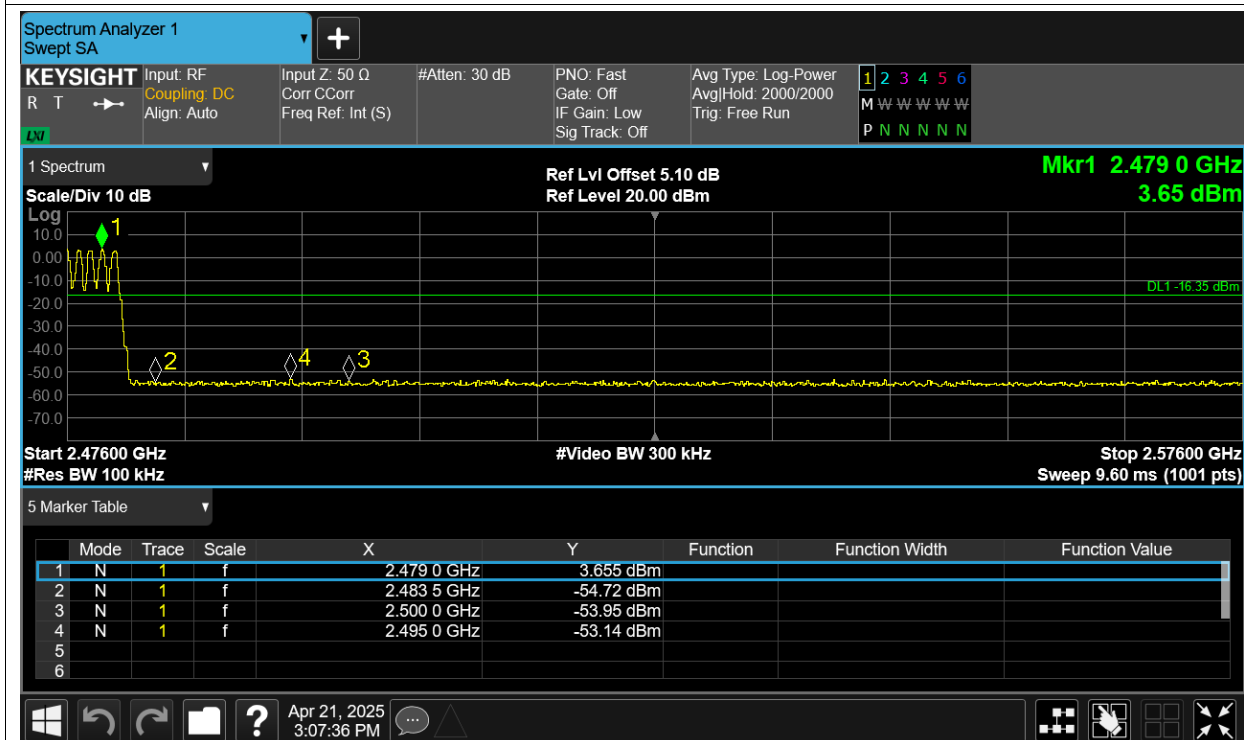


Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref

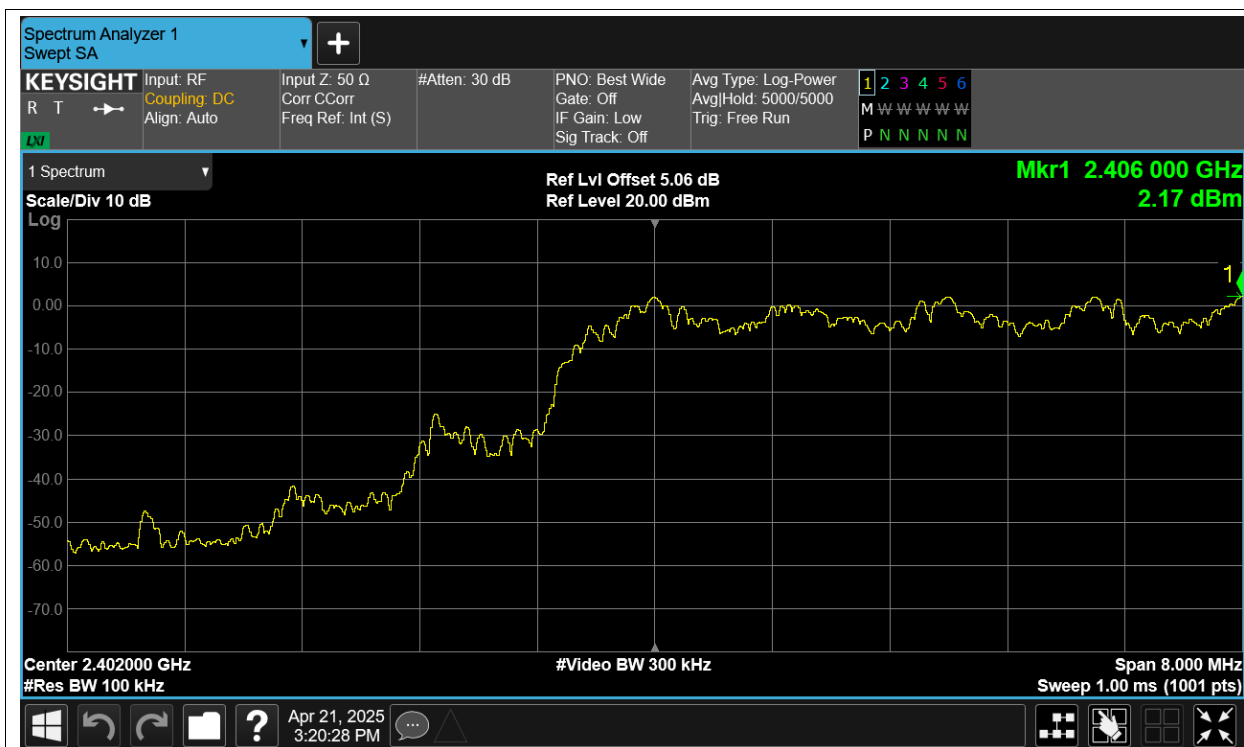


Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

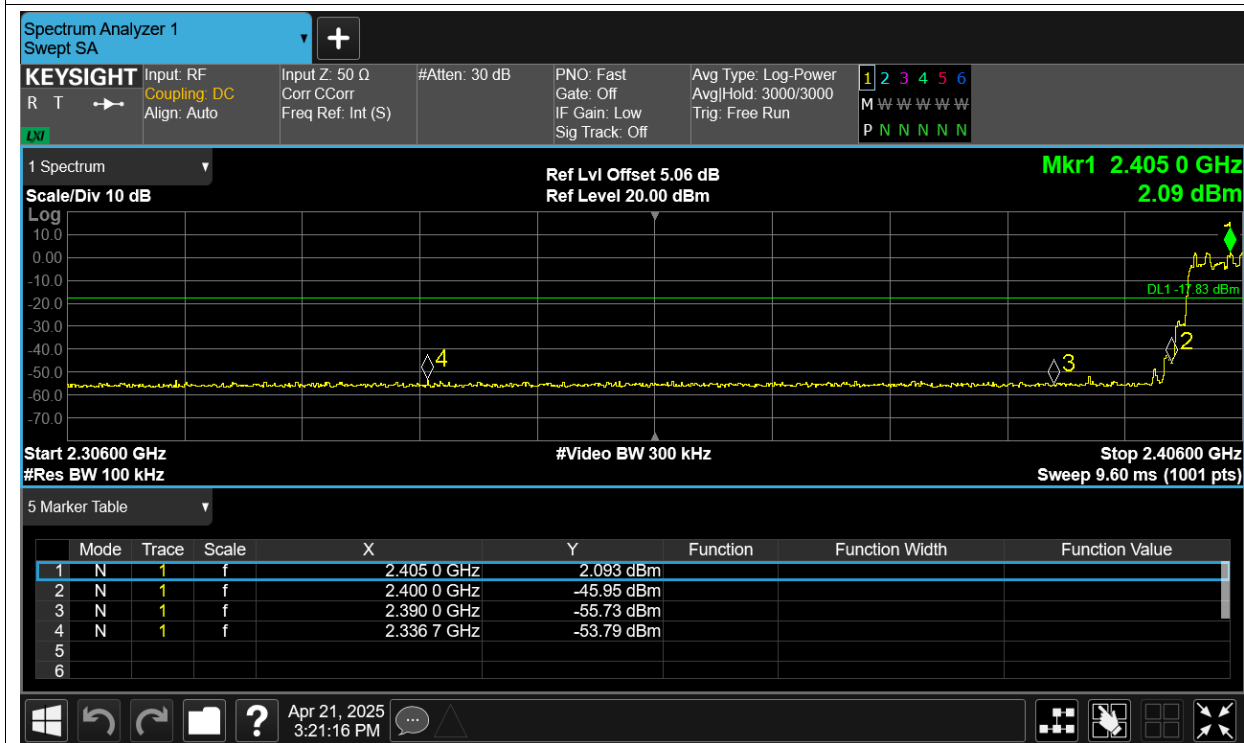

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref

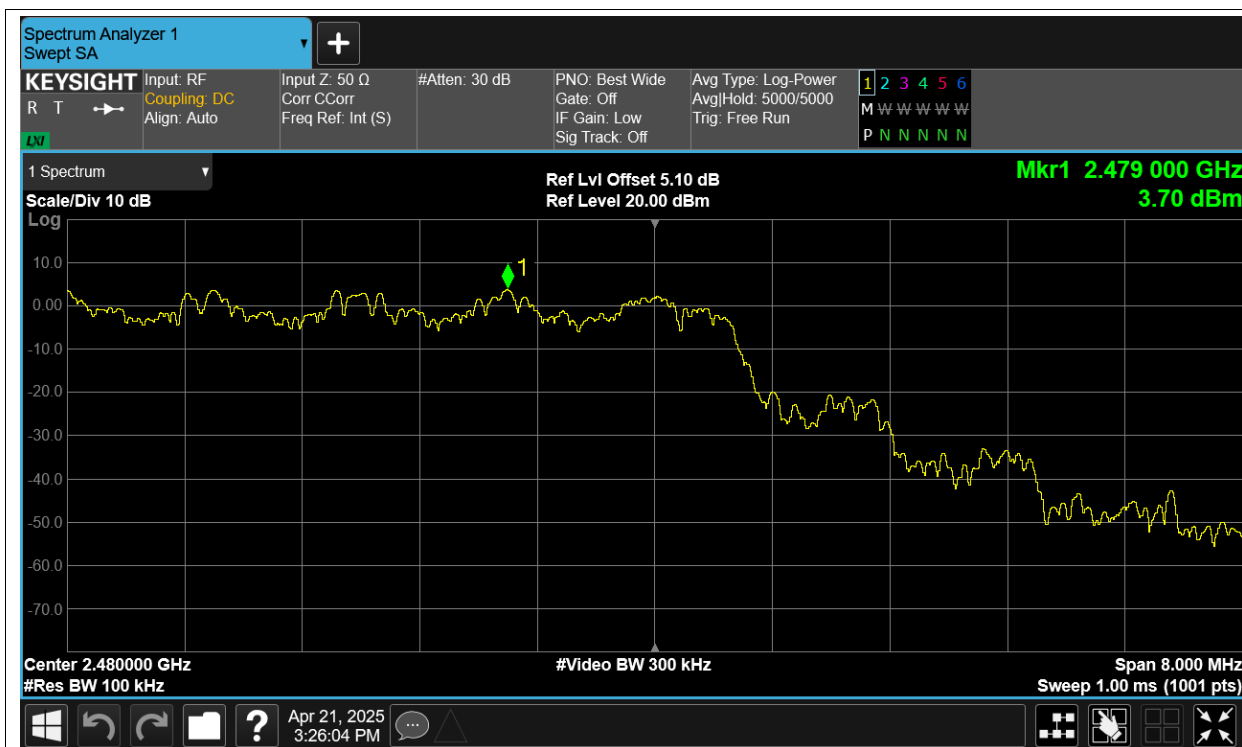


Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

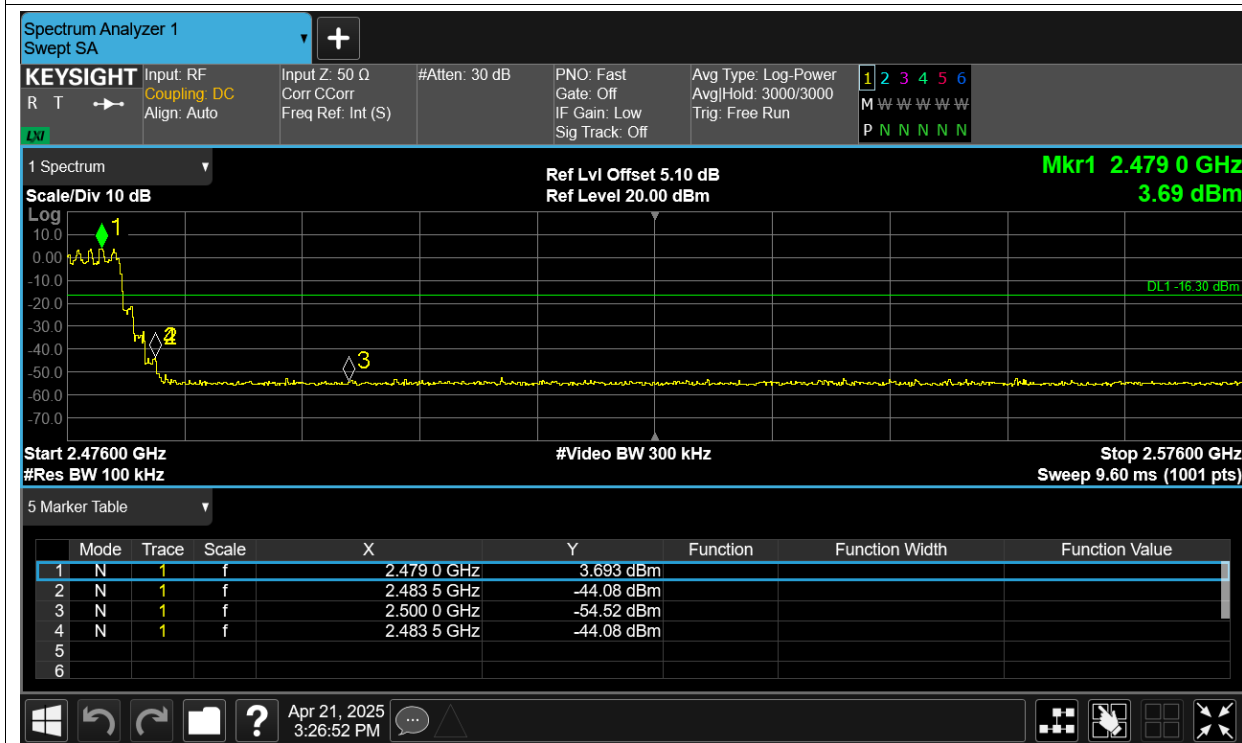


Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

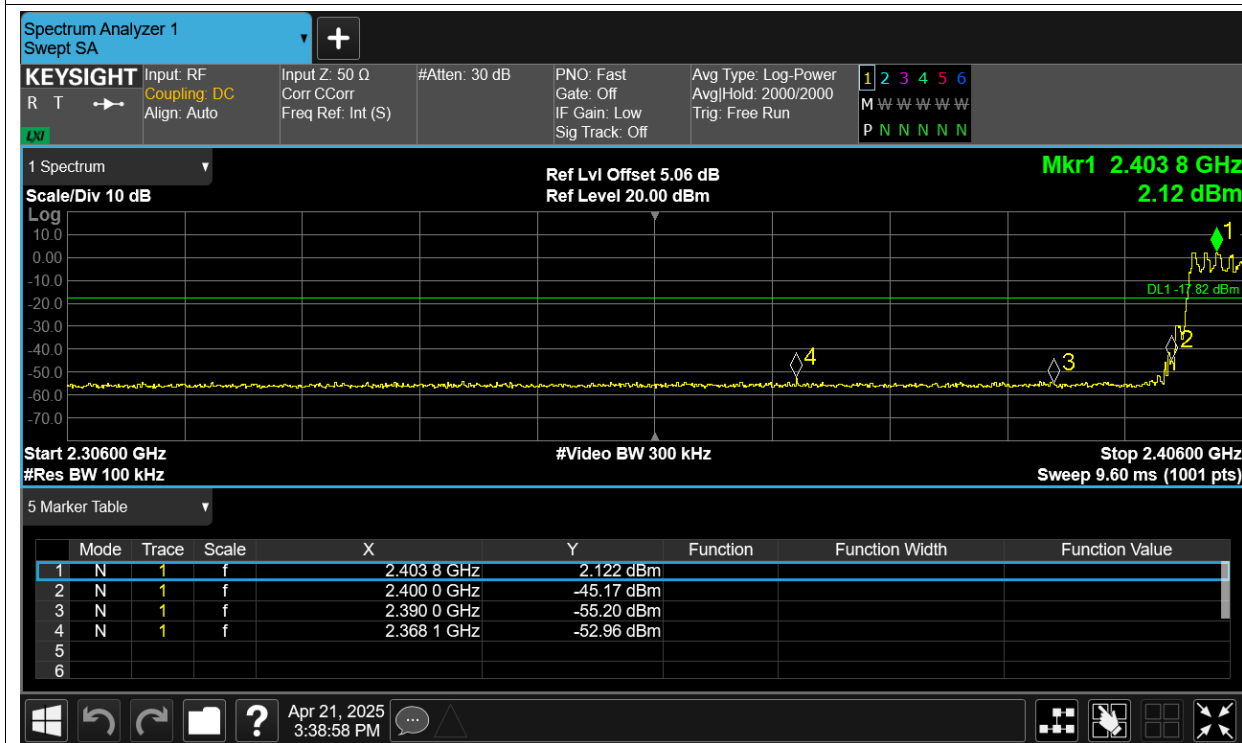

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref

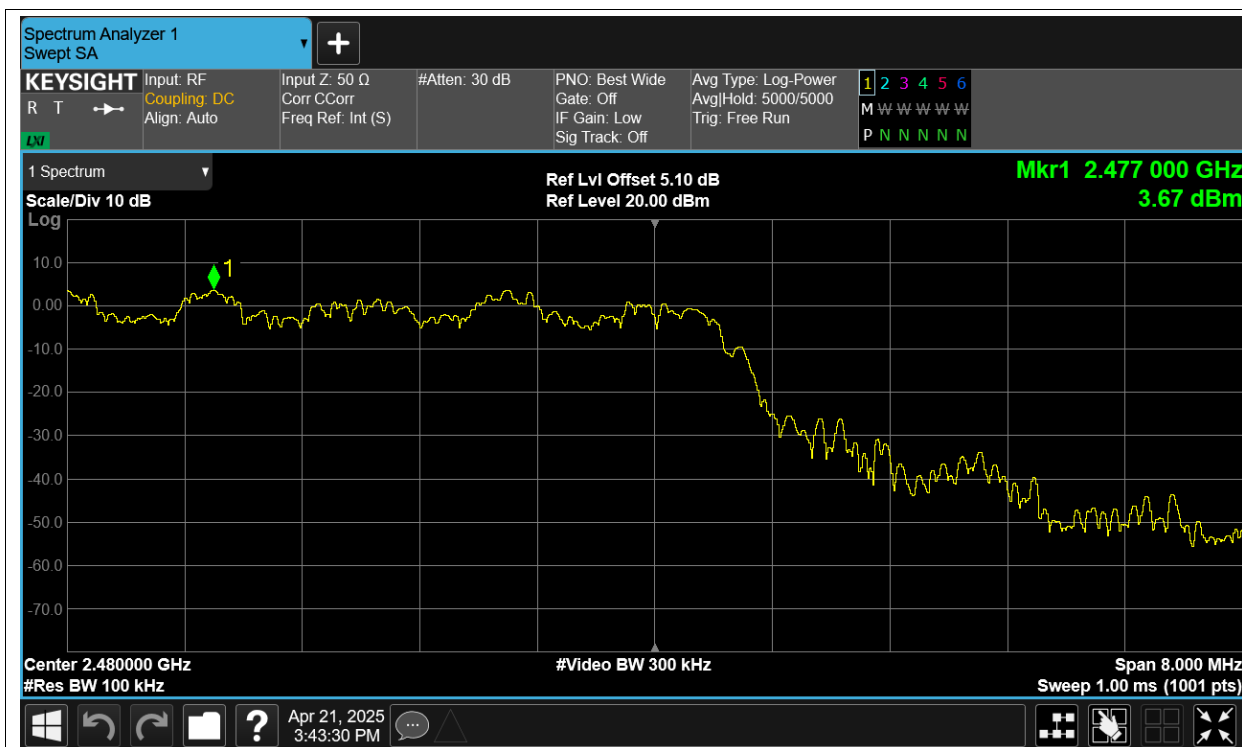

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

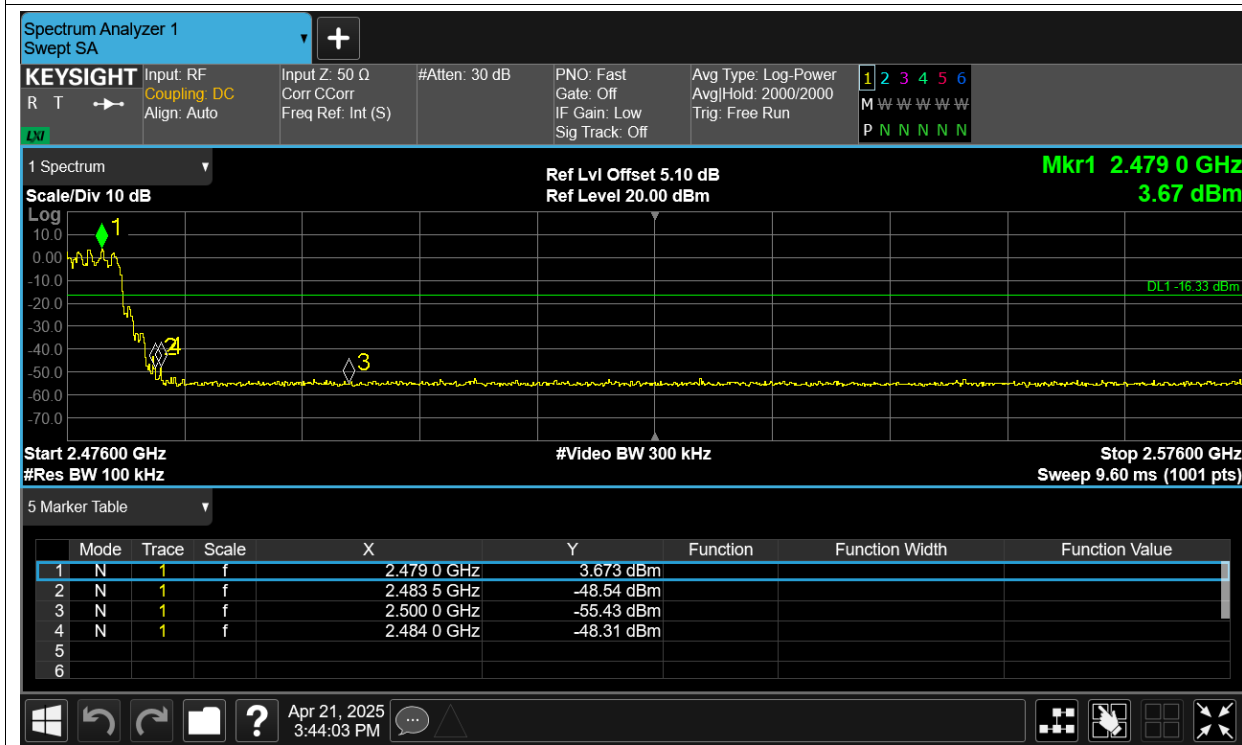


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-45.81	-20	Pass
NVNT	1-DH1	2441	Ant1	-42.23	-20	Pass
NVNT	1-DH1	2480	Ant1	-42.49	-20	Pass
NVNT	2-DH1	2402	Ant1	-47.29	-20	Pass
NVNT	2-DH1	2441	Ant1	-44.18	-20	Pass
NVNT	2-DH1	2480	Ant1	-46.37	-20	Pass
NVNT	3-DH1	2402	Ant1	-50.25	-20	Pass
NVNT	3-DH1	2441	Ant1	-45.25	-20	Pass
NVNT	3-DH1	2480	Ant1	-43.48	-20	Pass

Test Graphs


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

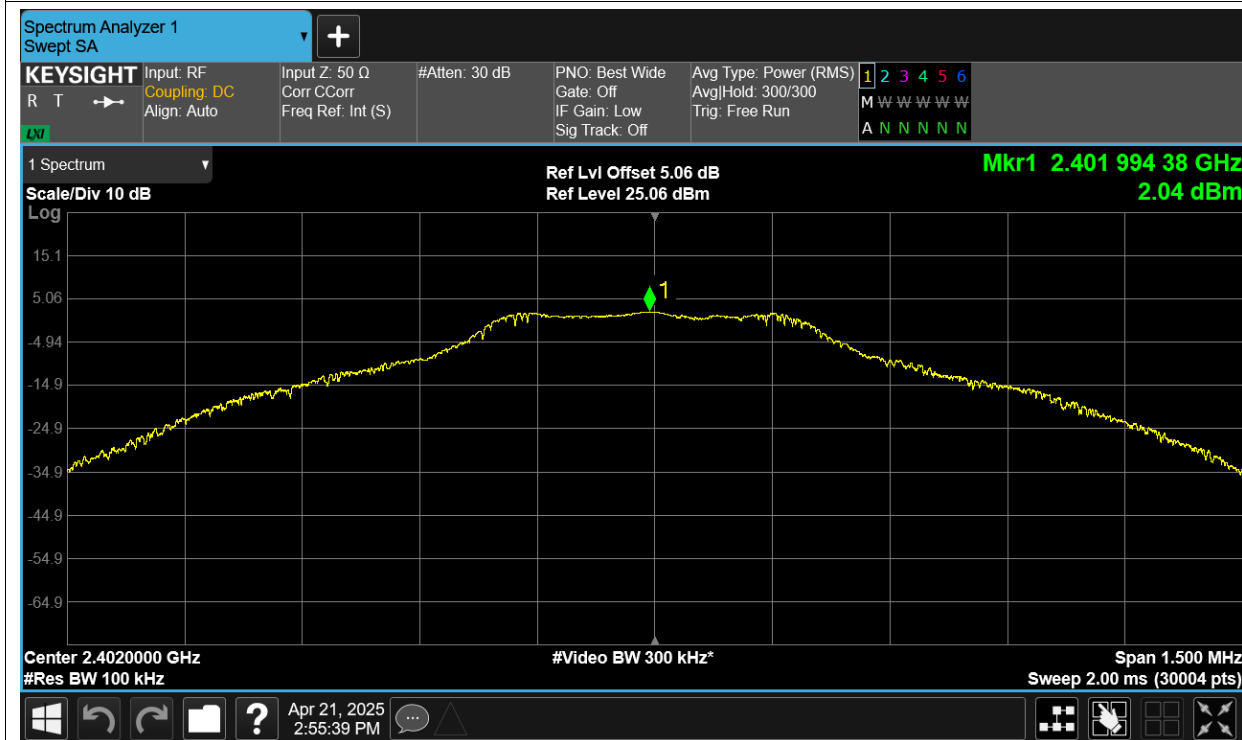


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

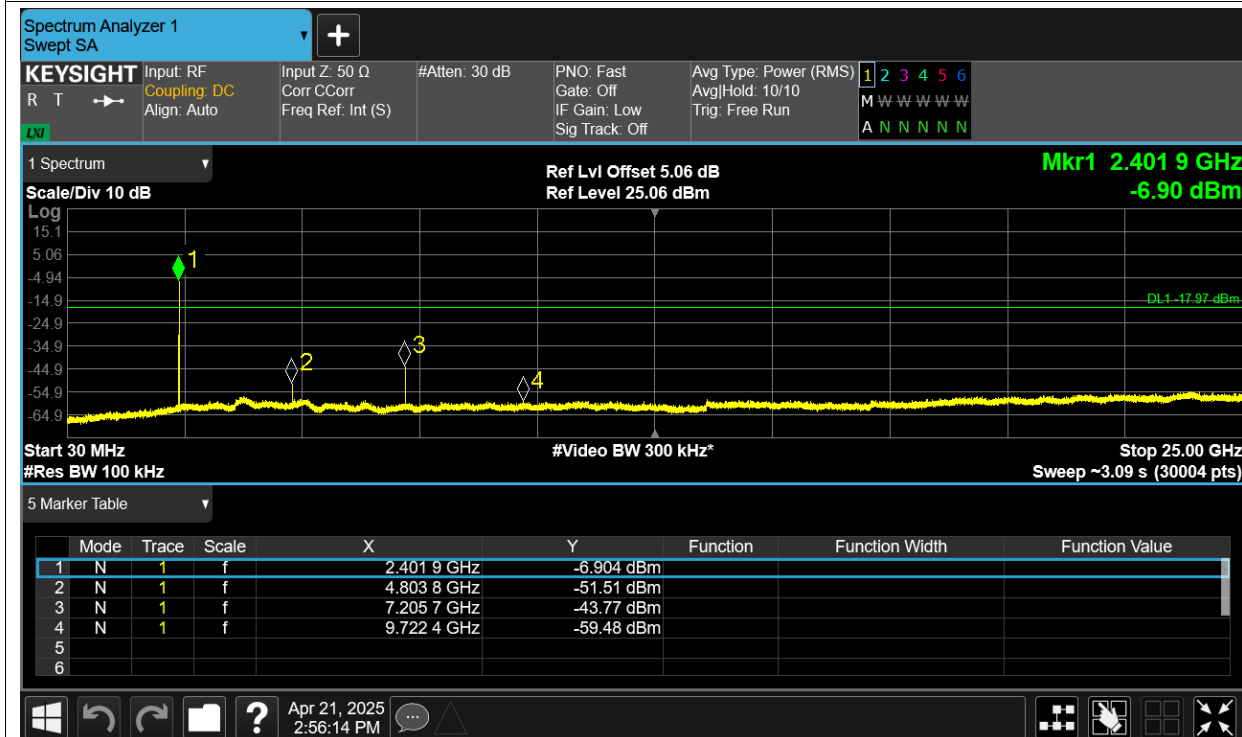


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

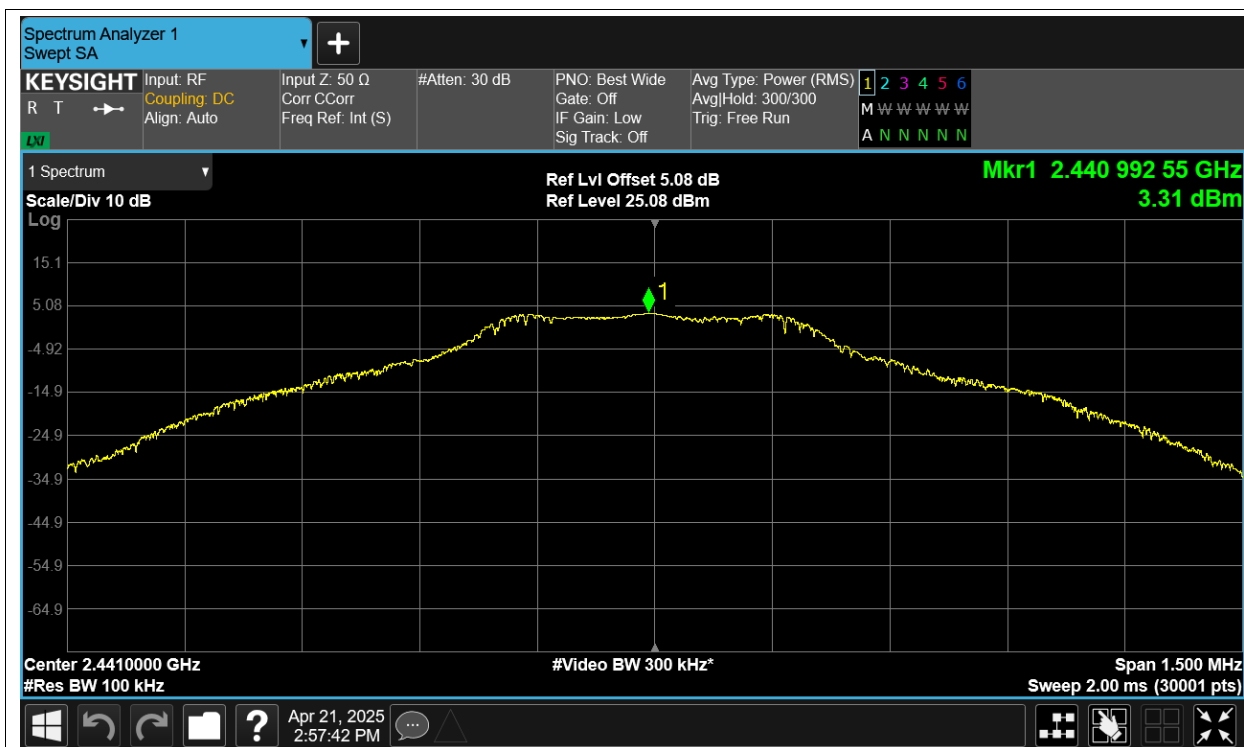


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

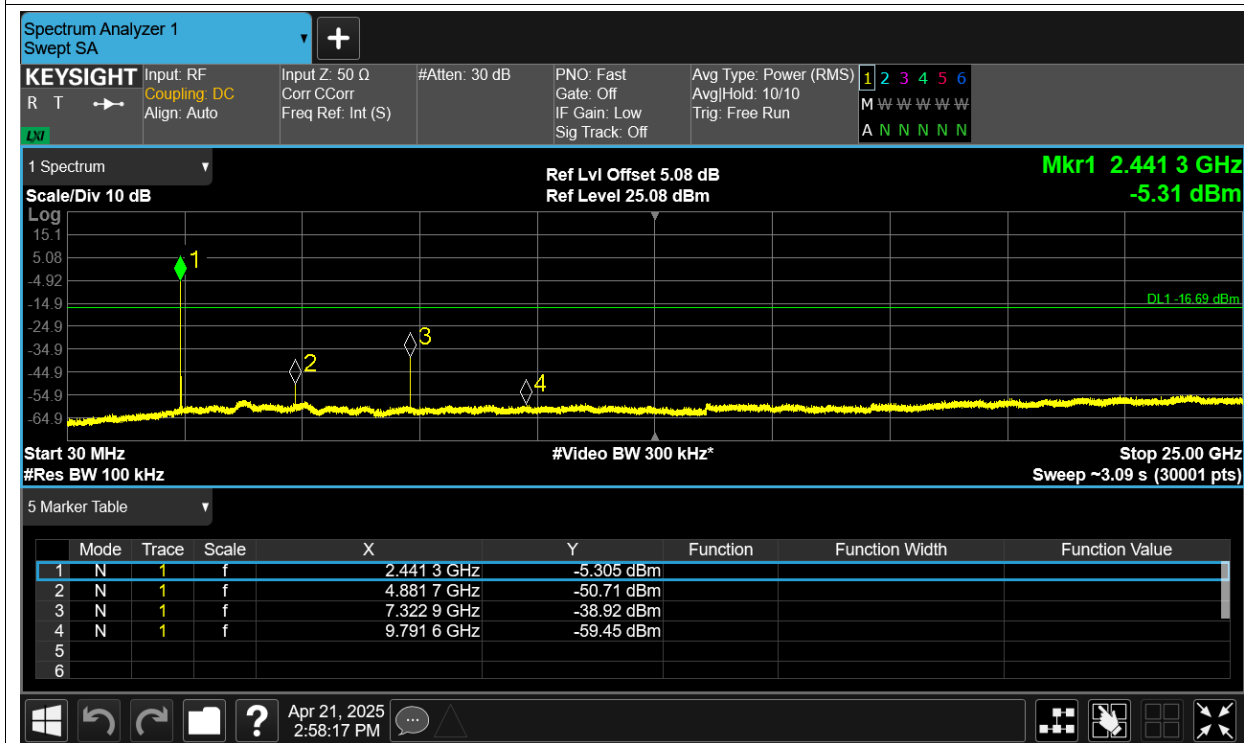


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

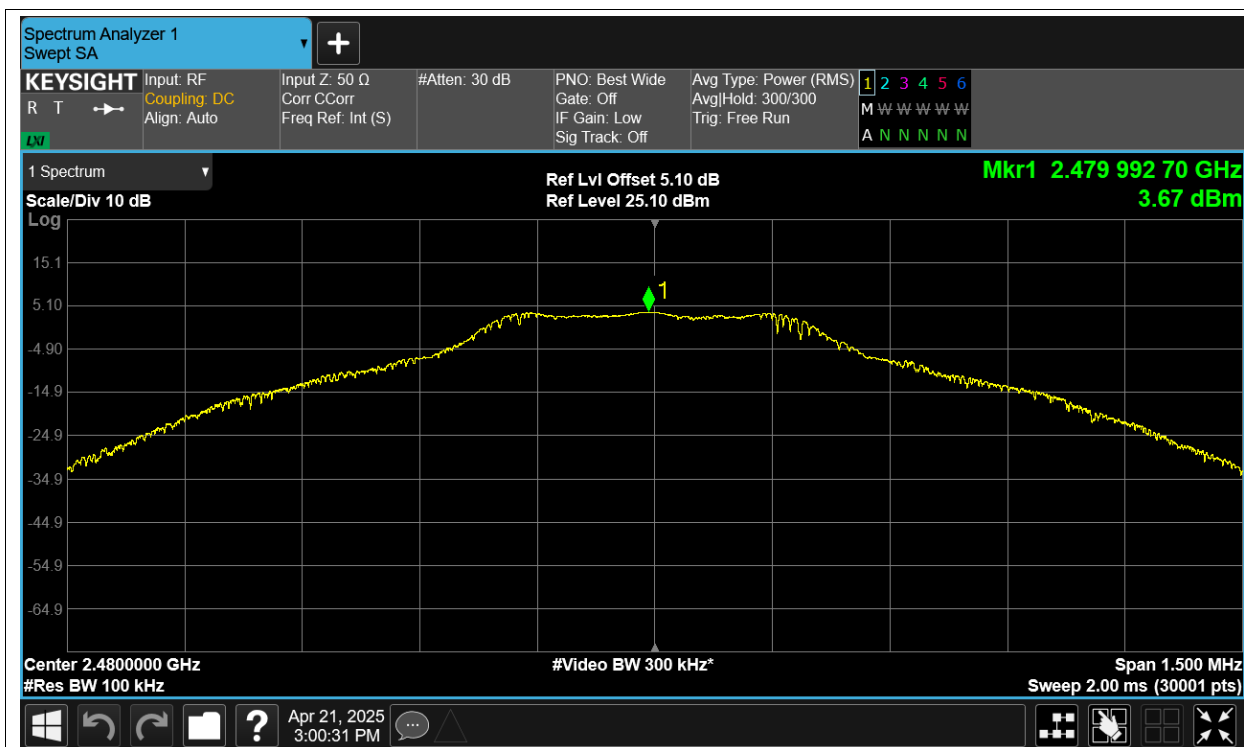


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

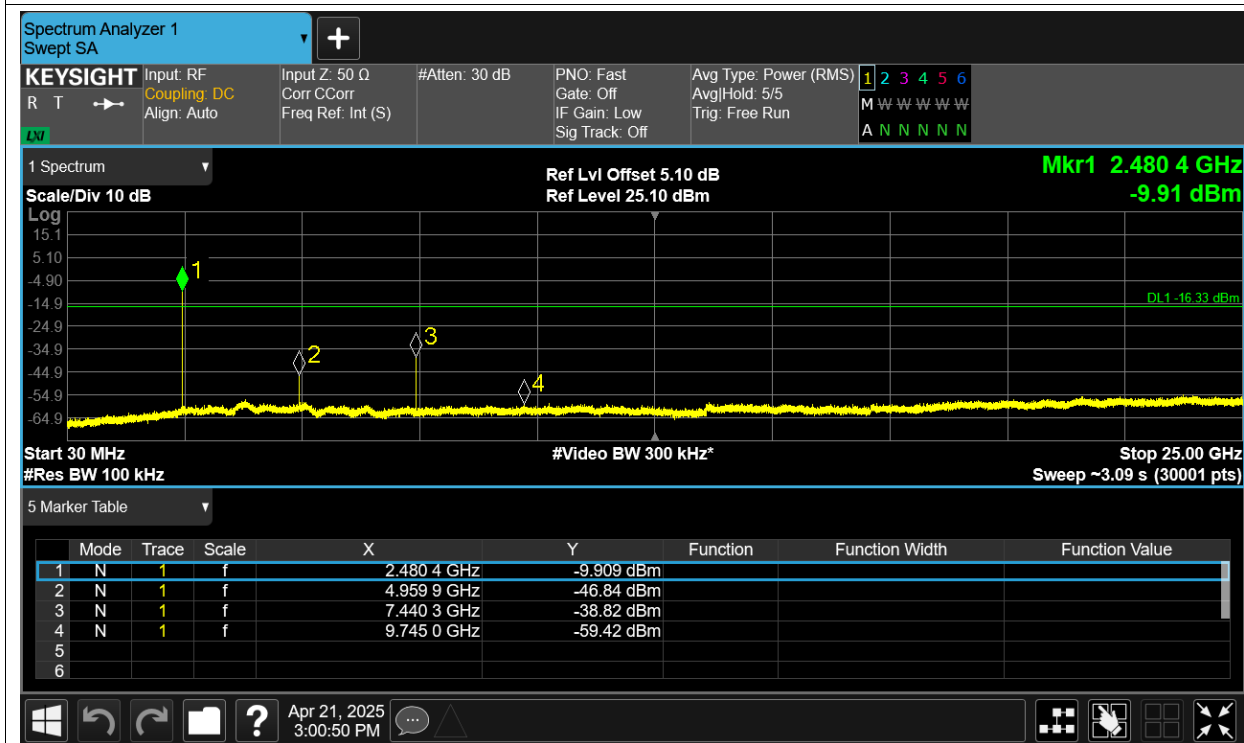


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

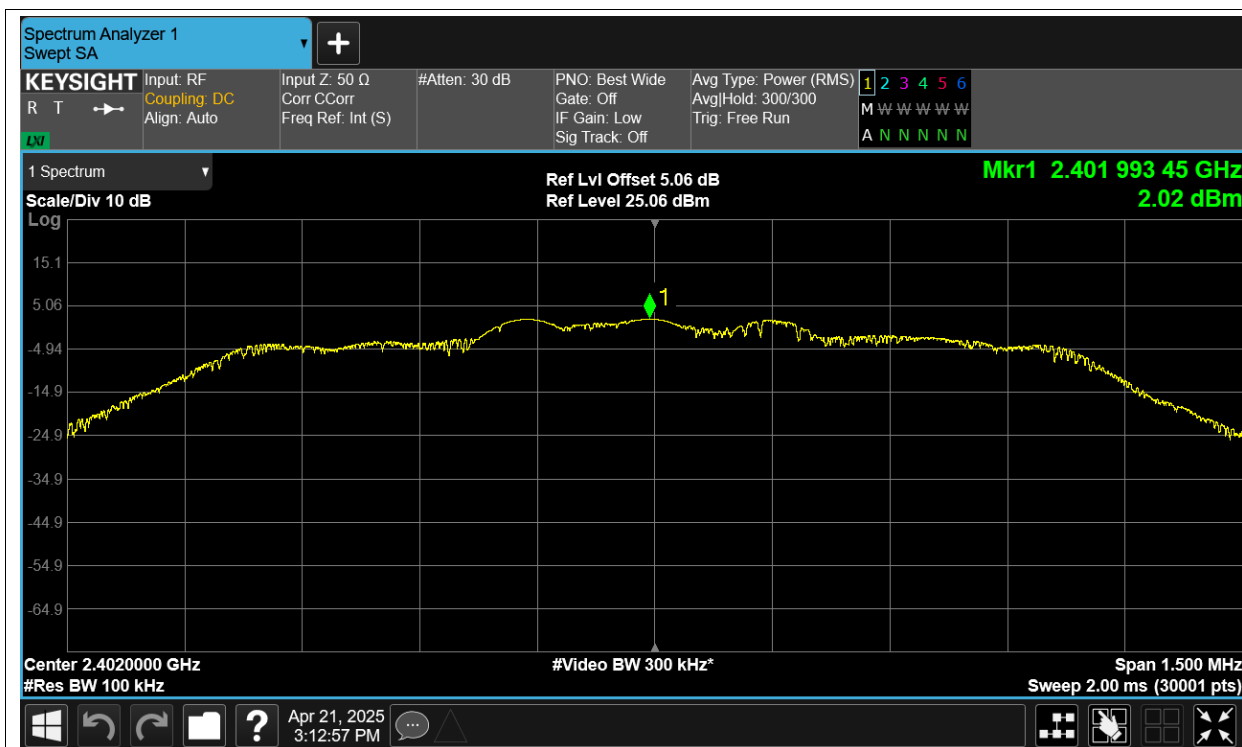


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

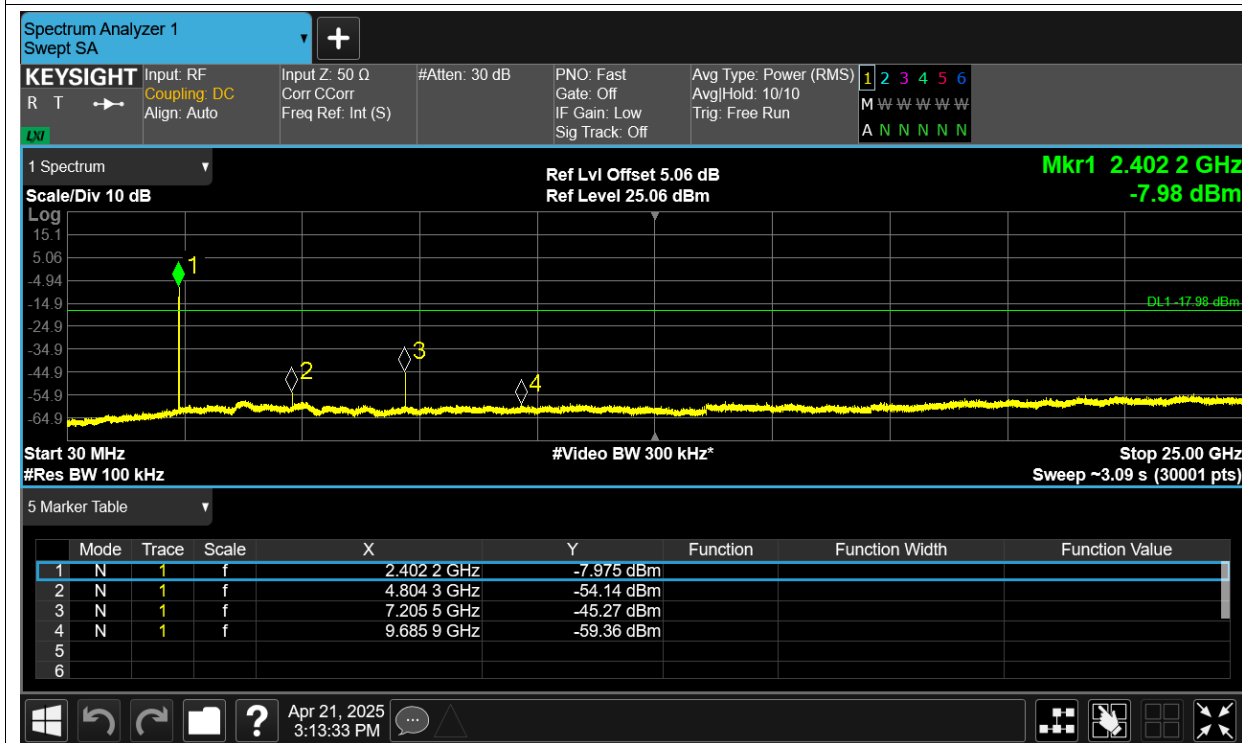


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

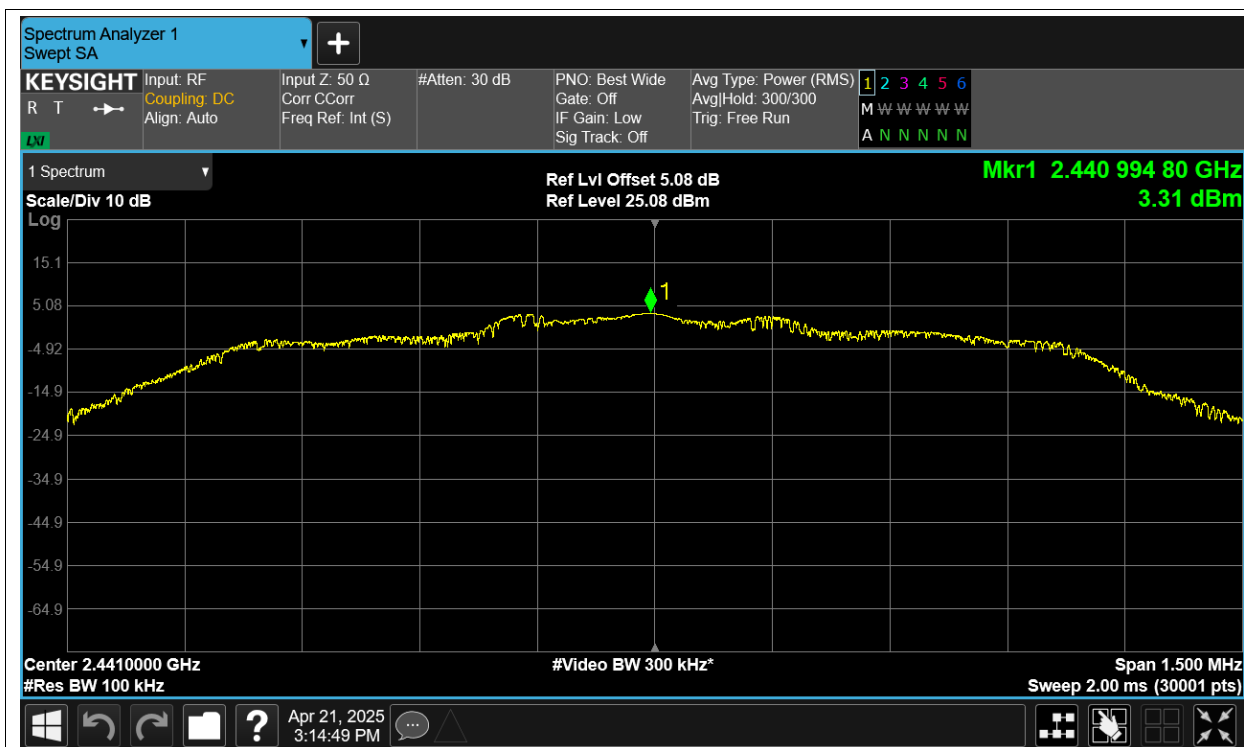


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

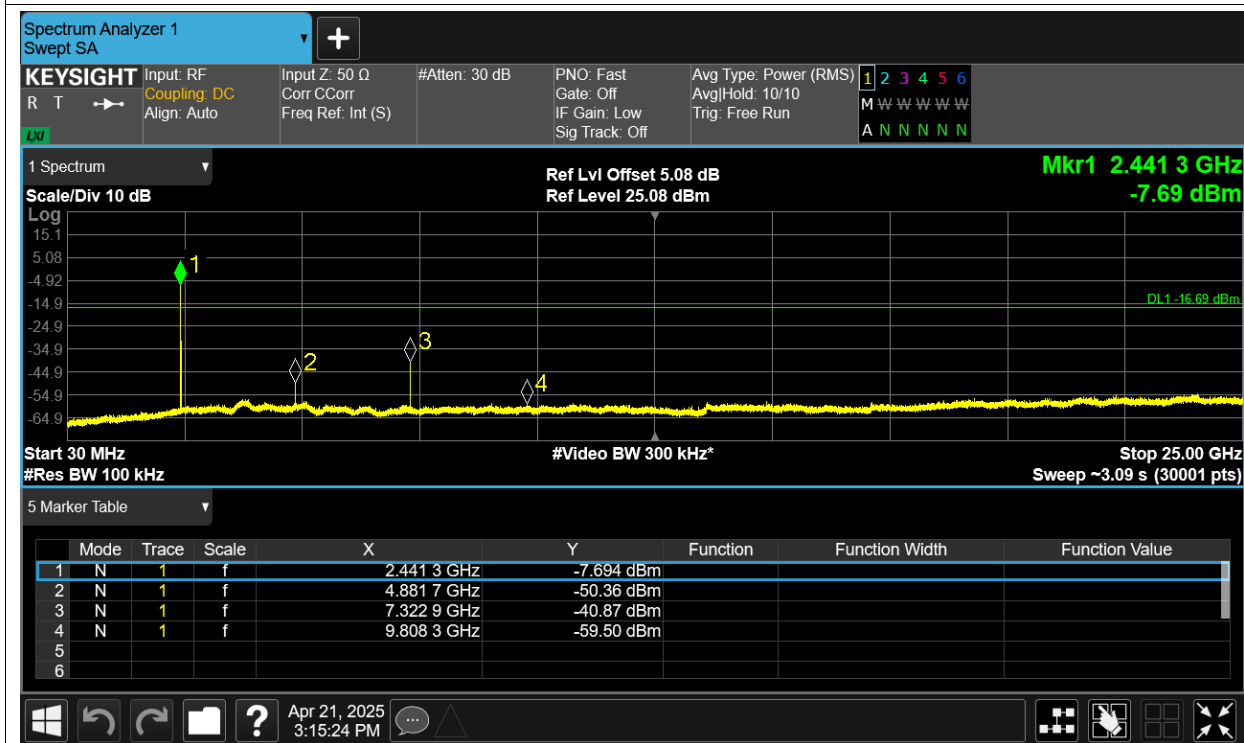


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

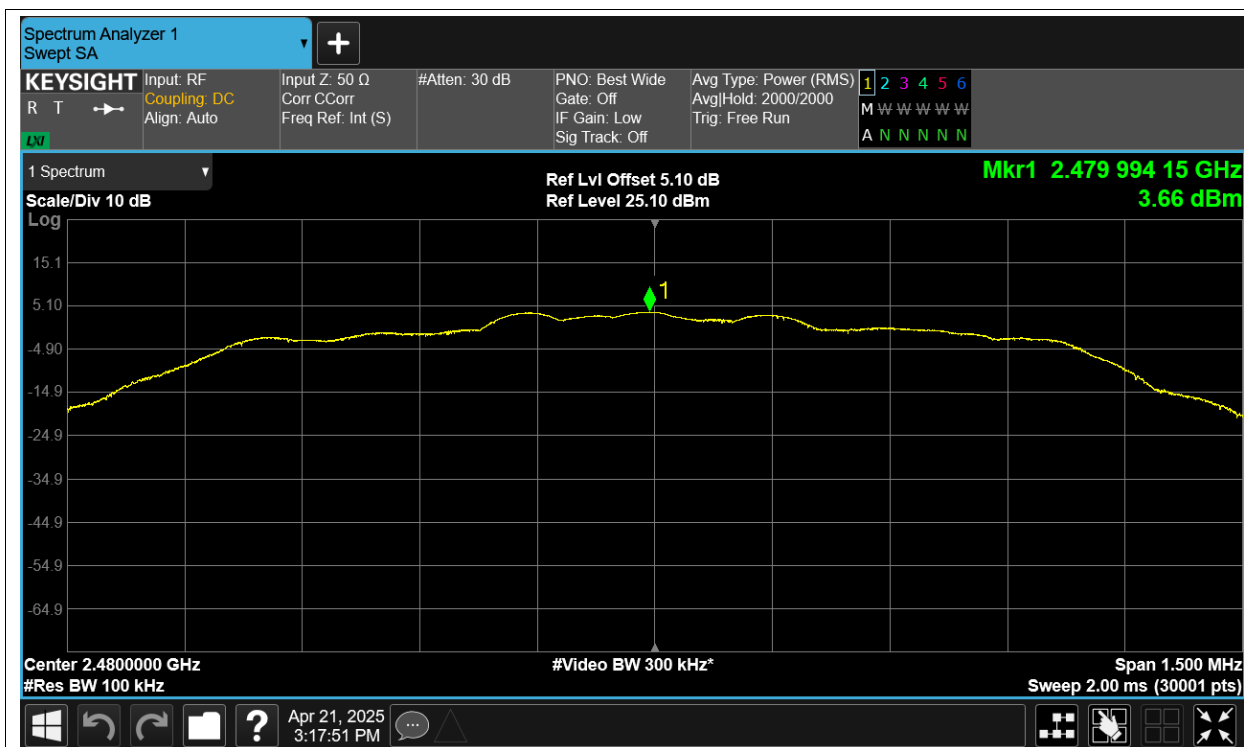


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

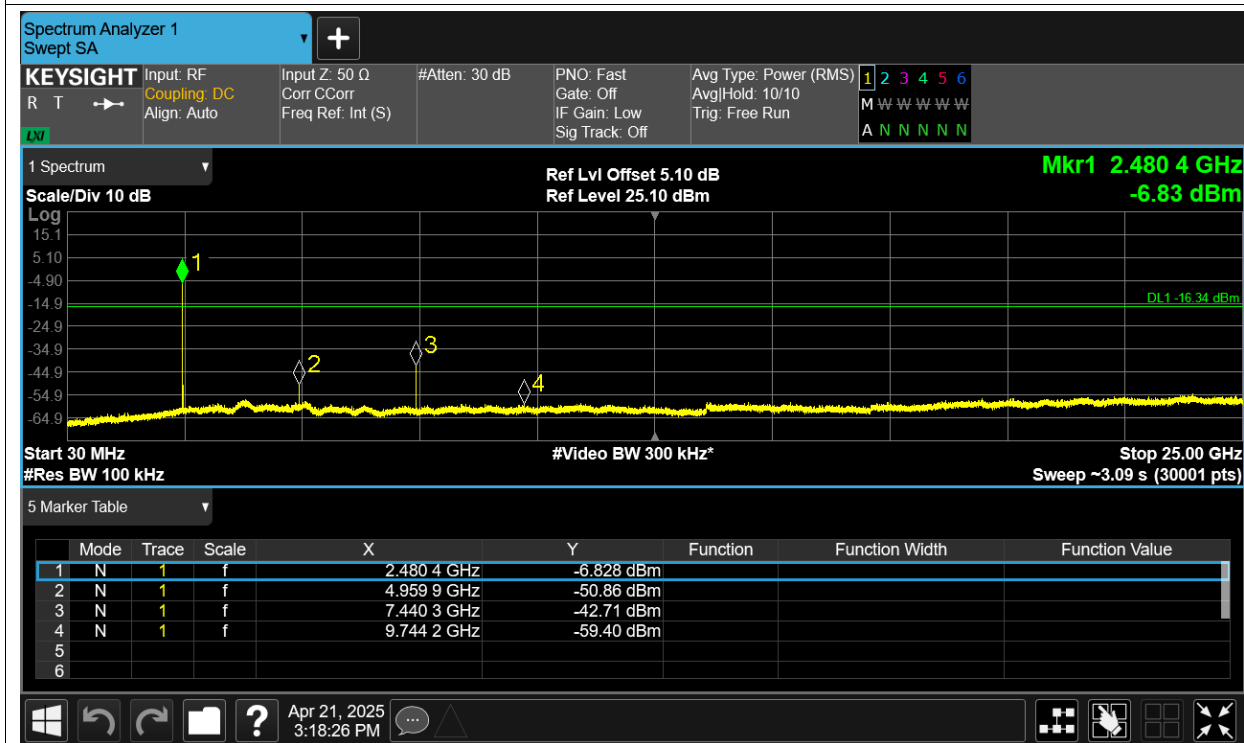


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

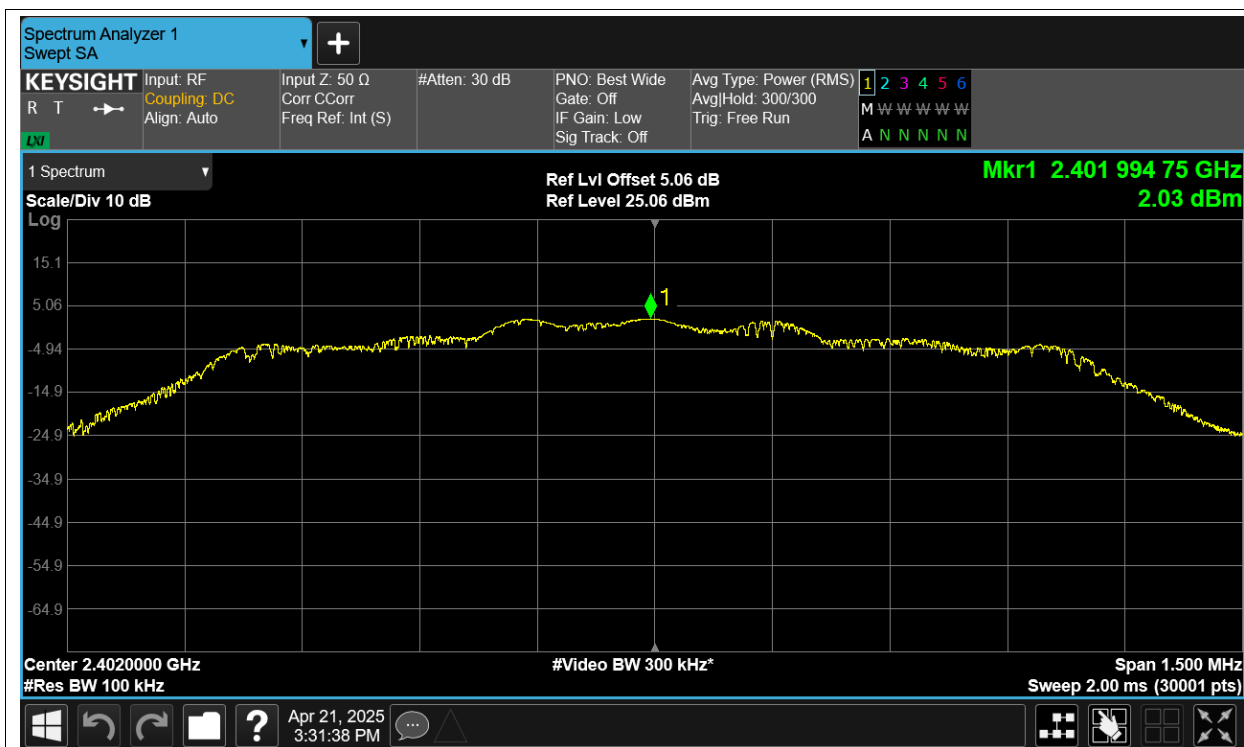


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

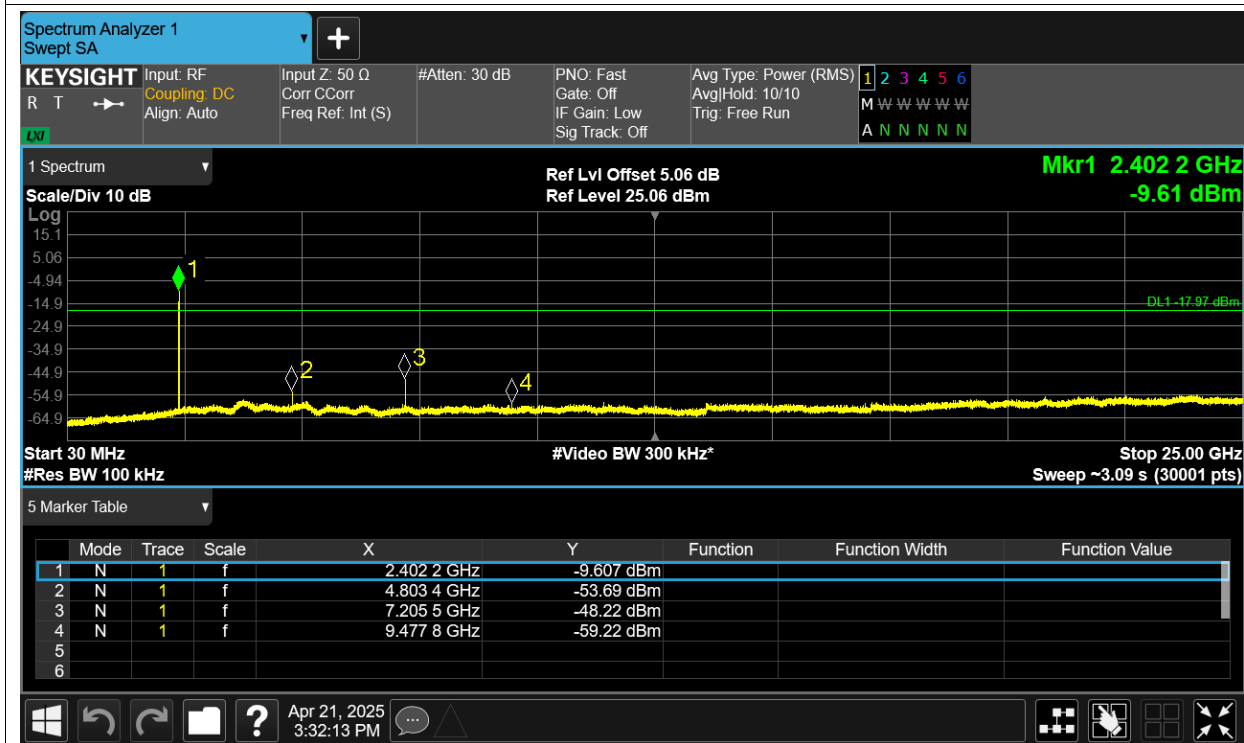


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

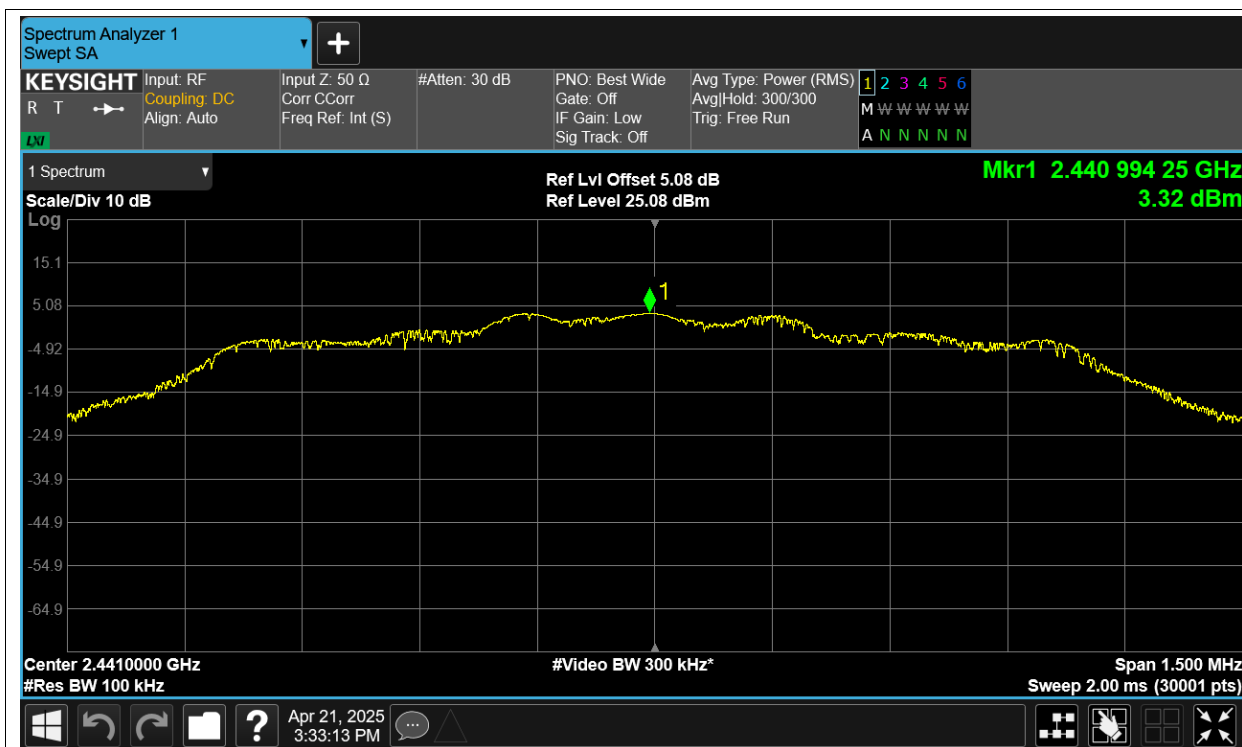


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

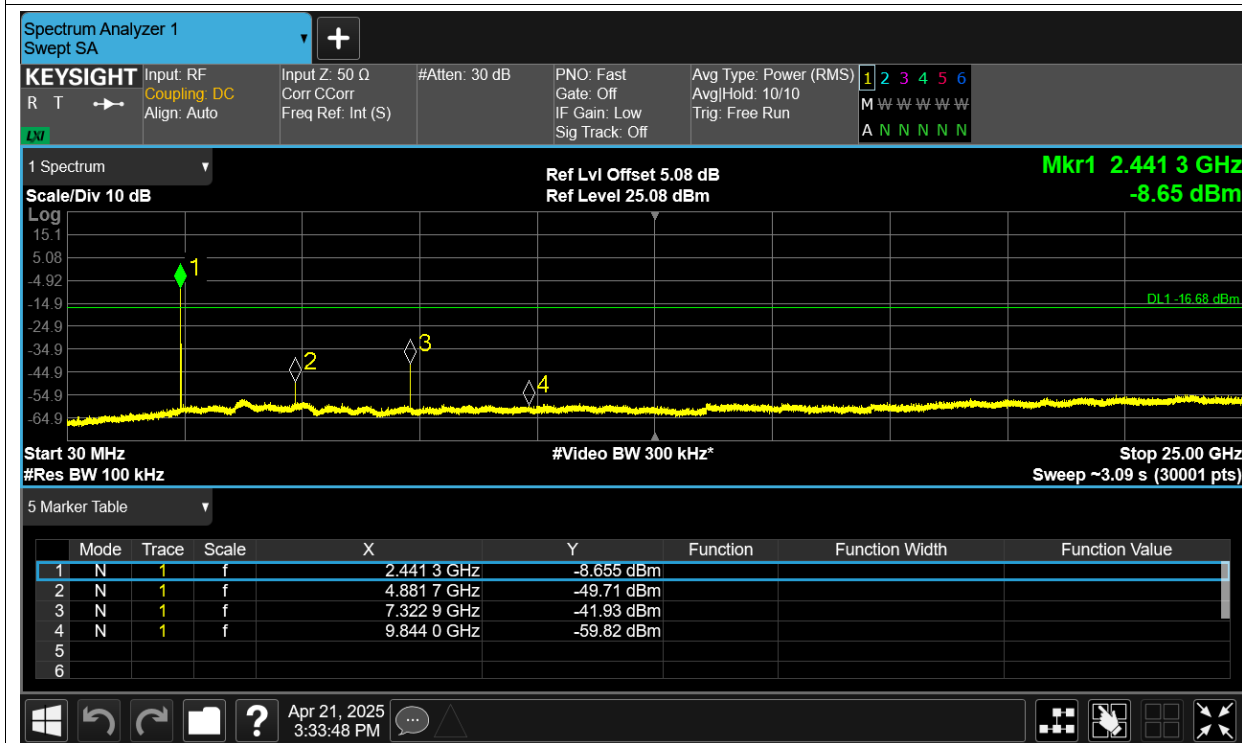

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

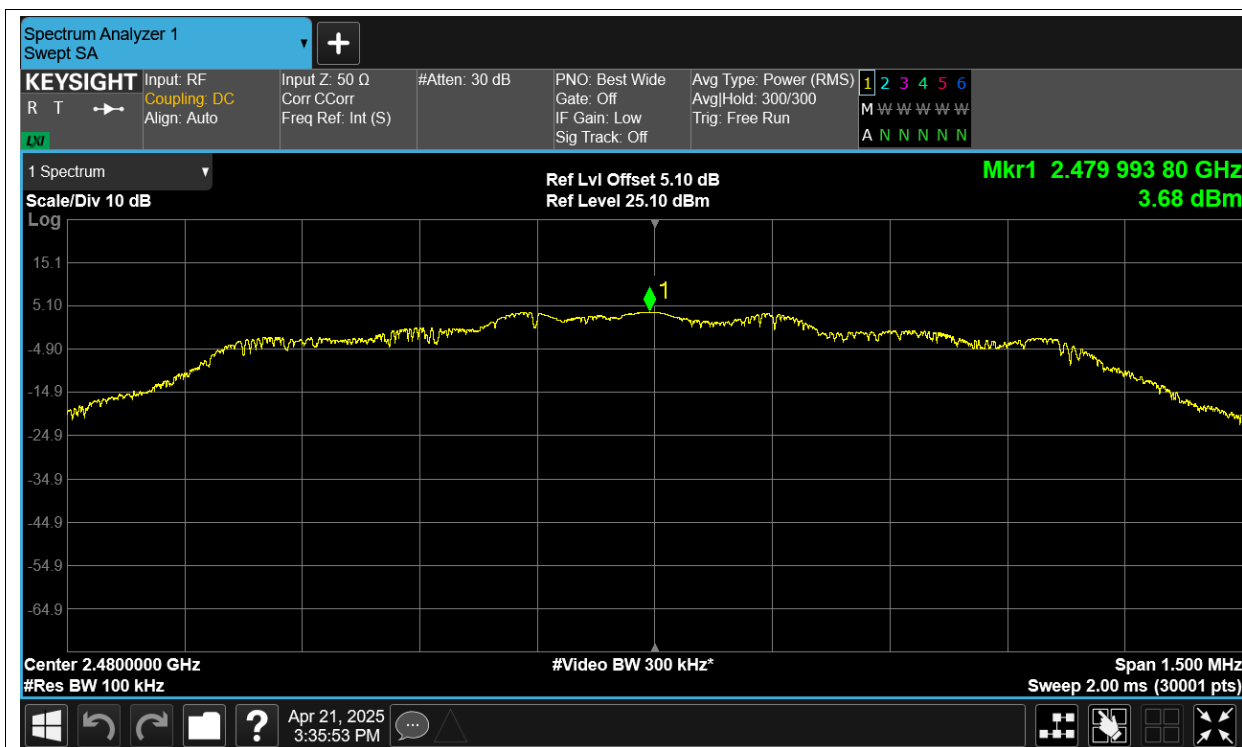

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

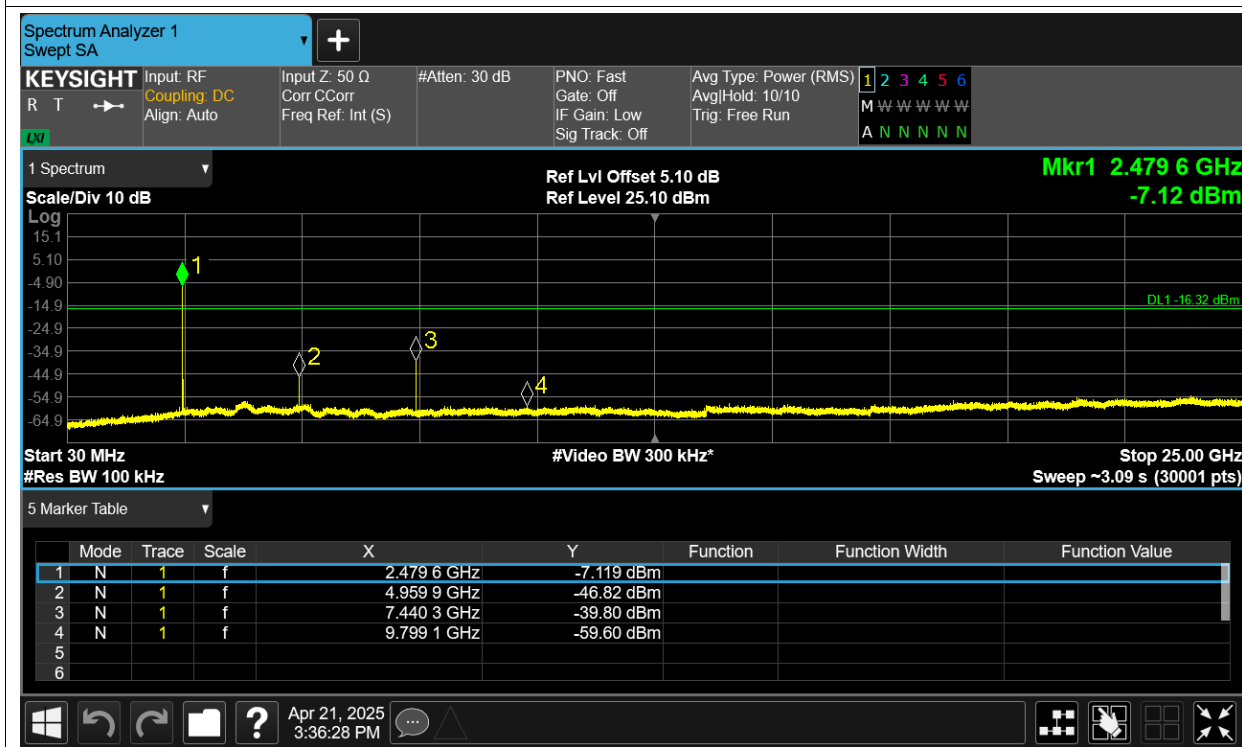


Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass

Test Graphs


Hopping No. NVNT 1-DH1 2441MHz Ant1.

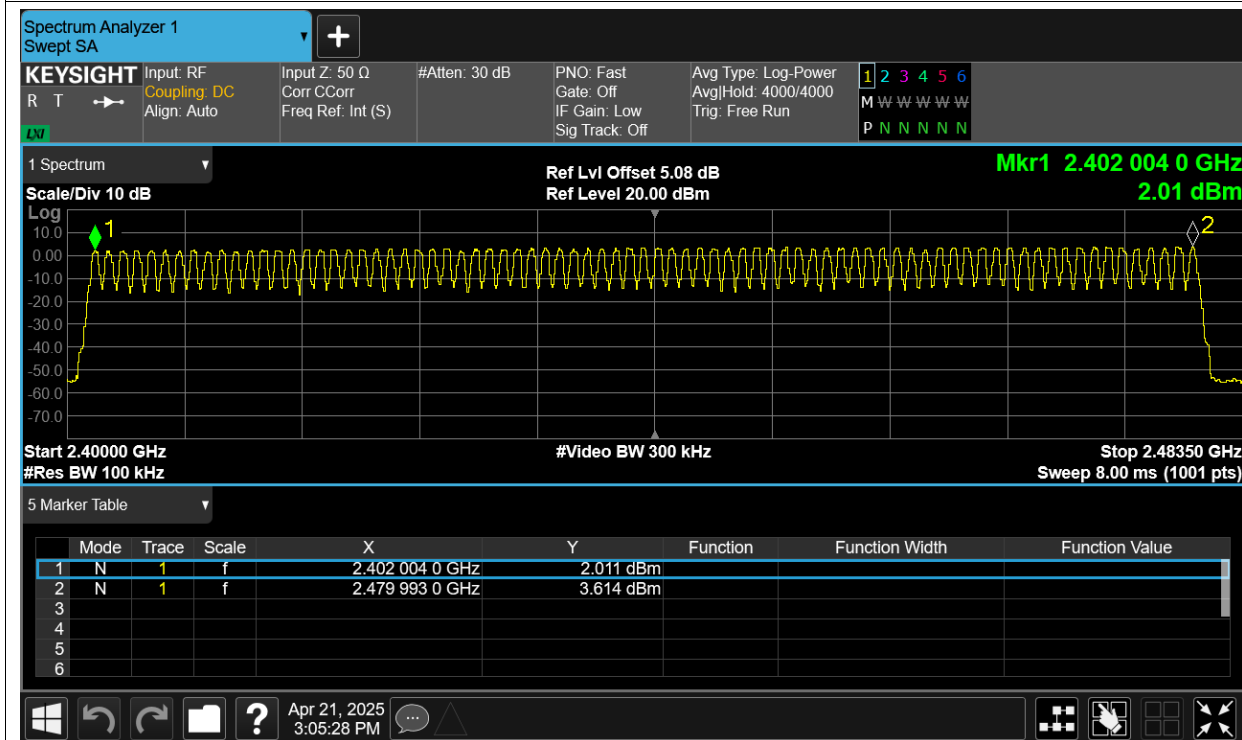

Hopping No. NVNT 2-DH1 2441MHz Ant1

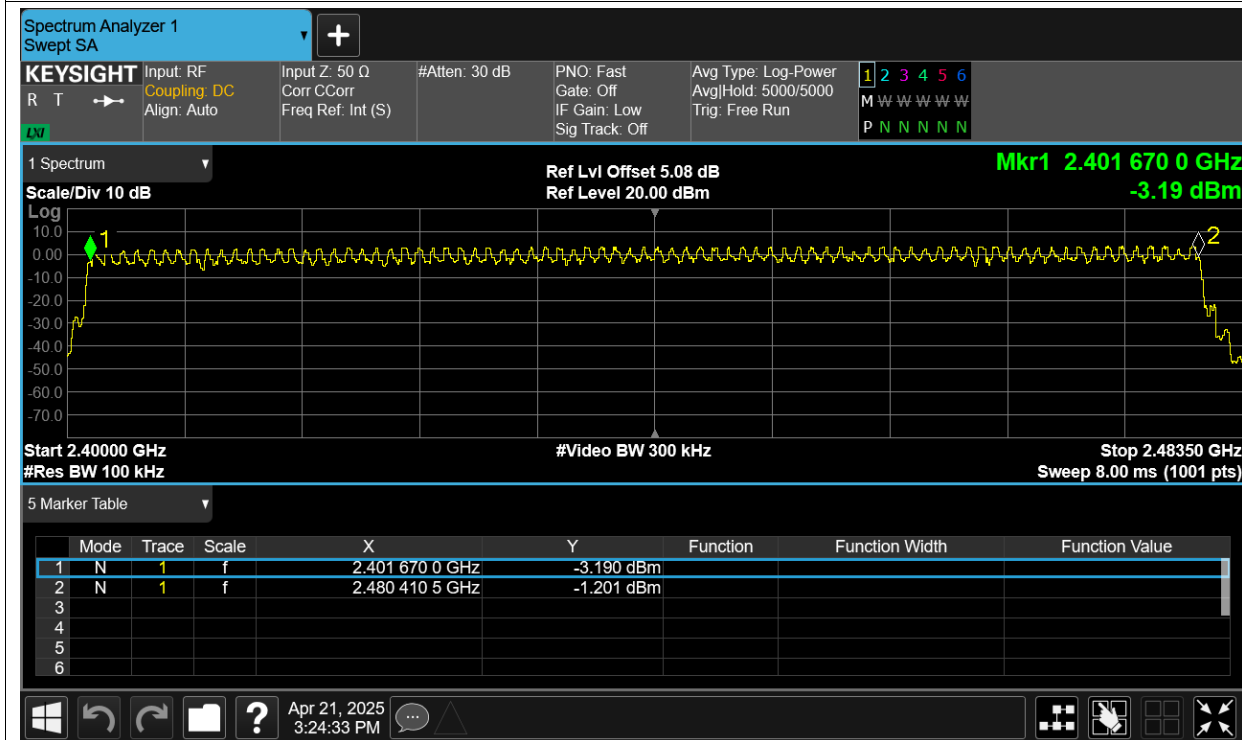

Hopping No. NVNT 3-DH1 2441MHz Ant1

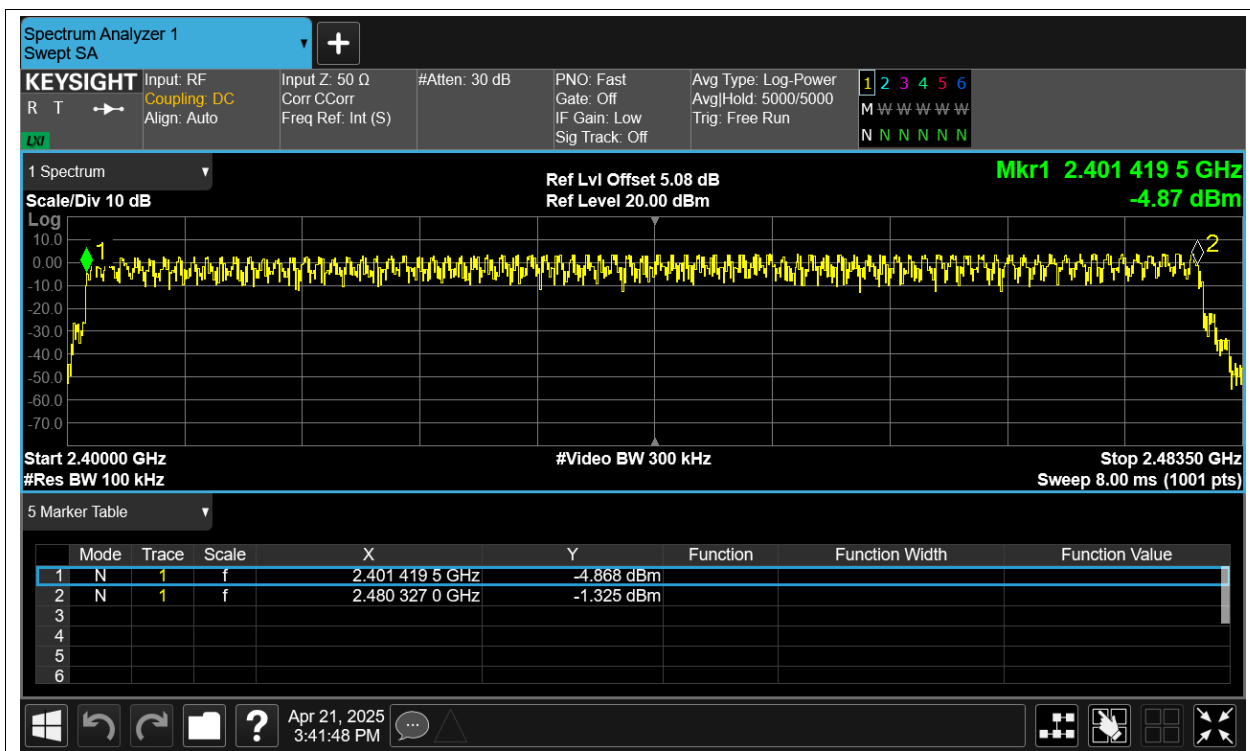


Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.407	130.24	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.665	266.4	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.913	310.72	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.414	132.48	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.671	267.36	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.917	311.147	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.417	133.44	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.669	267.04	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.917	311.147	31600	400	Pass

Test Graphs


Dwell NVNT 1-DH1 2441MHz Ant1

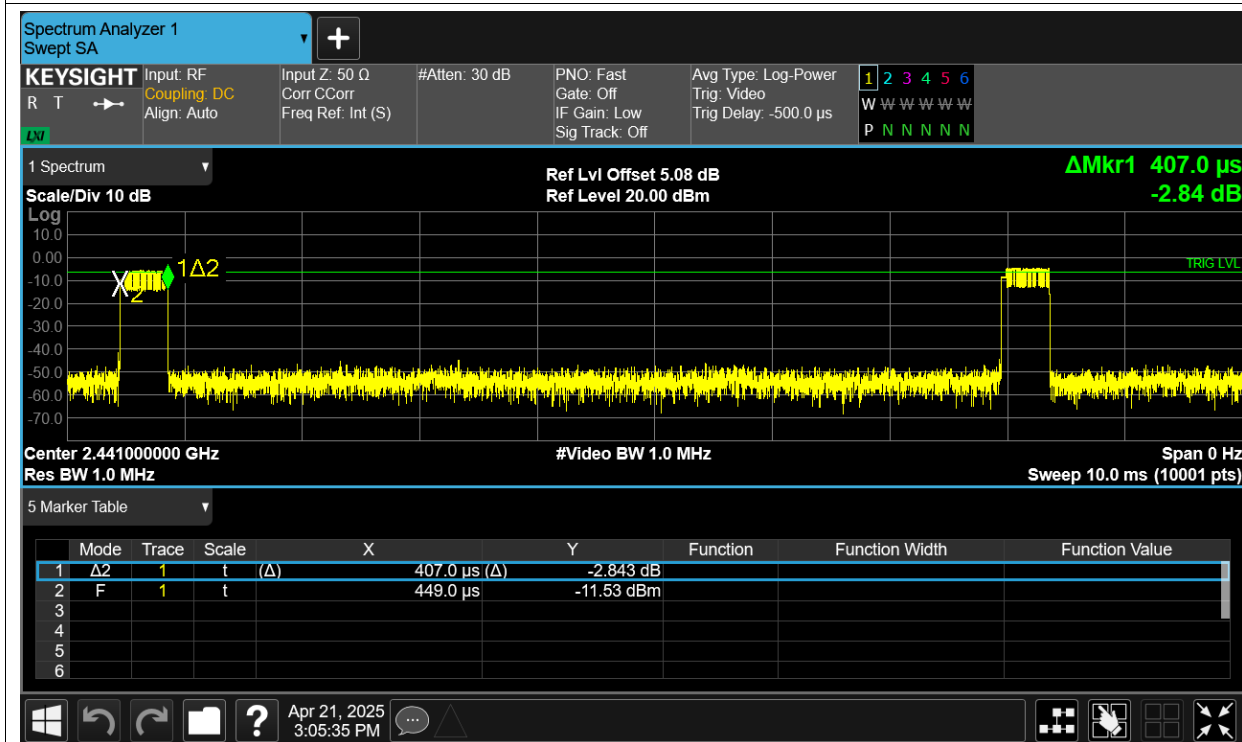


Dwell NVNT 1-DH3 2441MHz Ant1

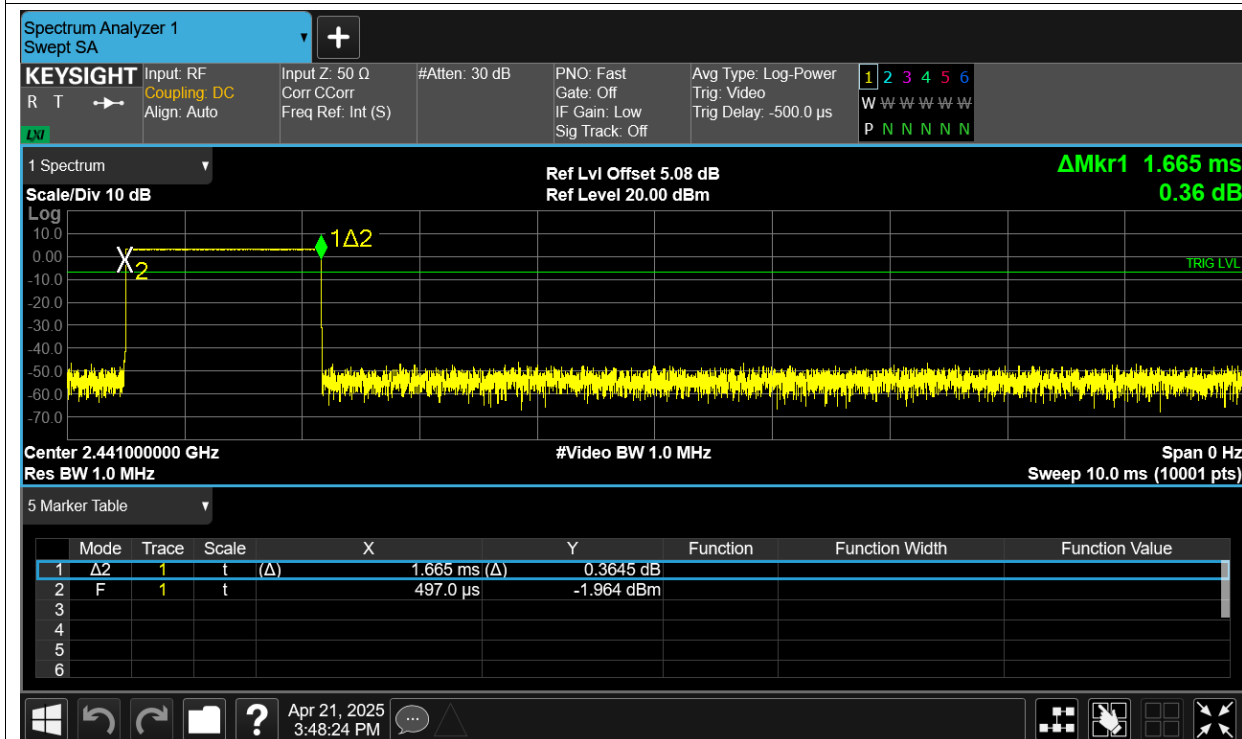


Dwell NVNT 1-DH5 2441MHz Ant1

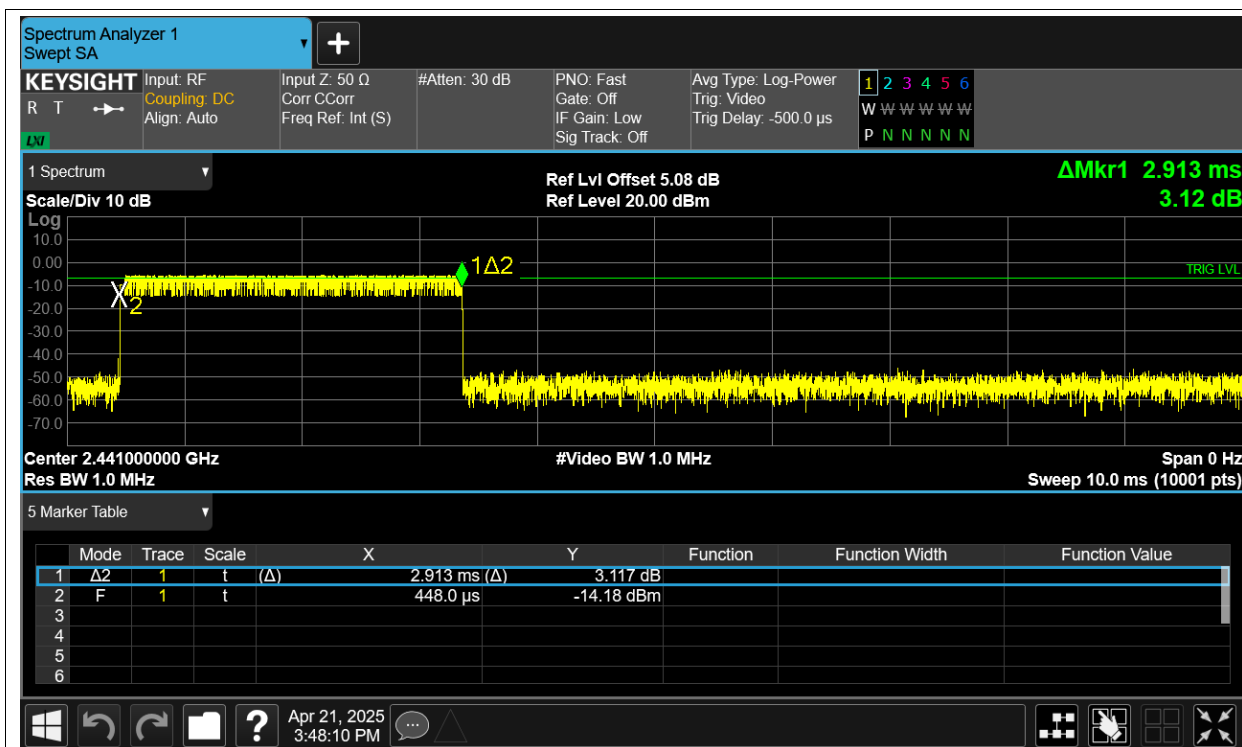


Dwell NVNT 2-DH1 2441MHz Ant1

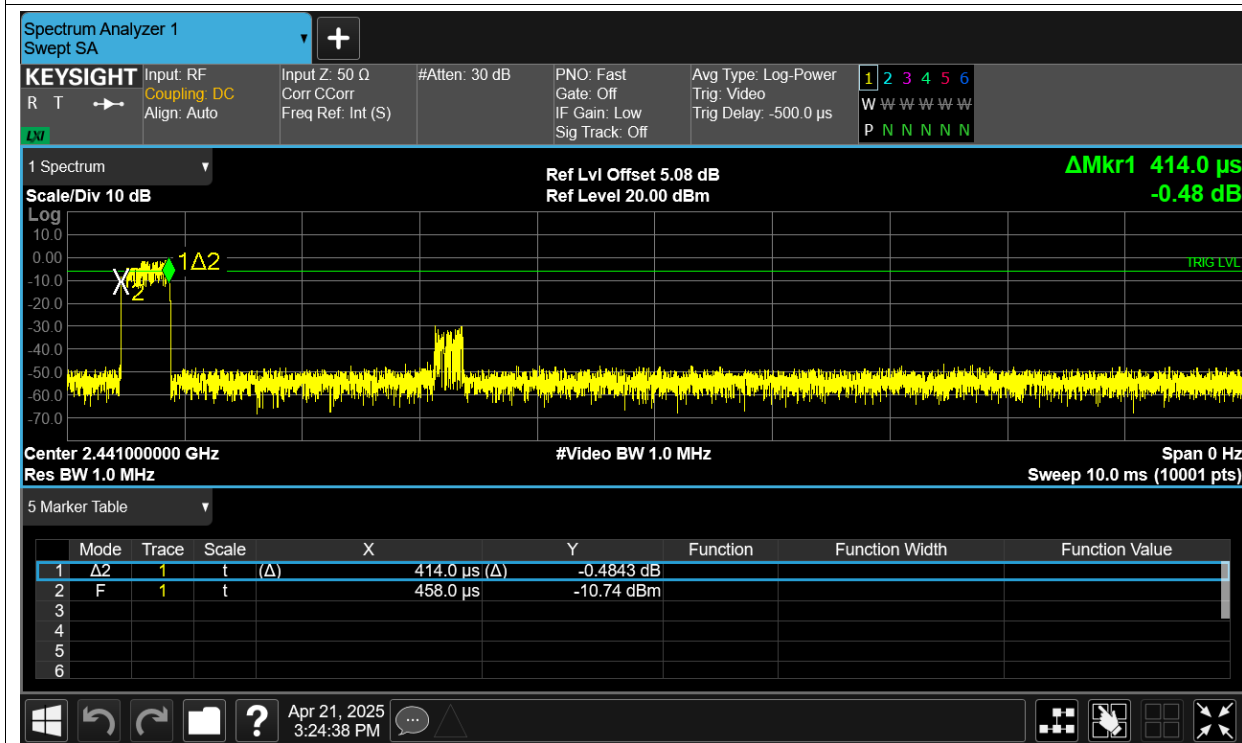

Dwell NVNT 2-DH3 2441MHz Ant1

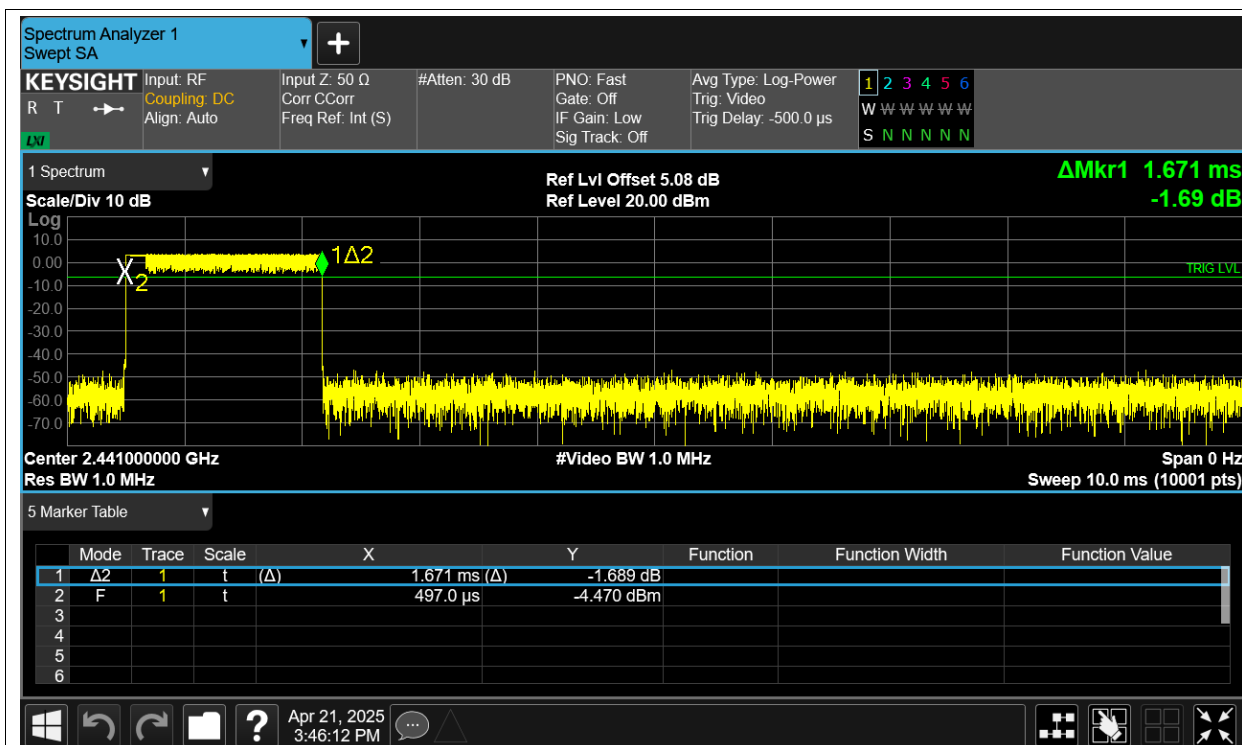


Dwell NVNT 2-DH5 2441MHz Ant1

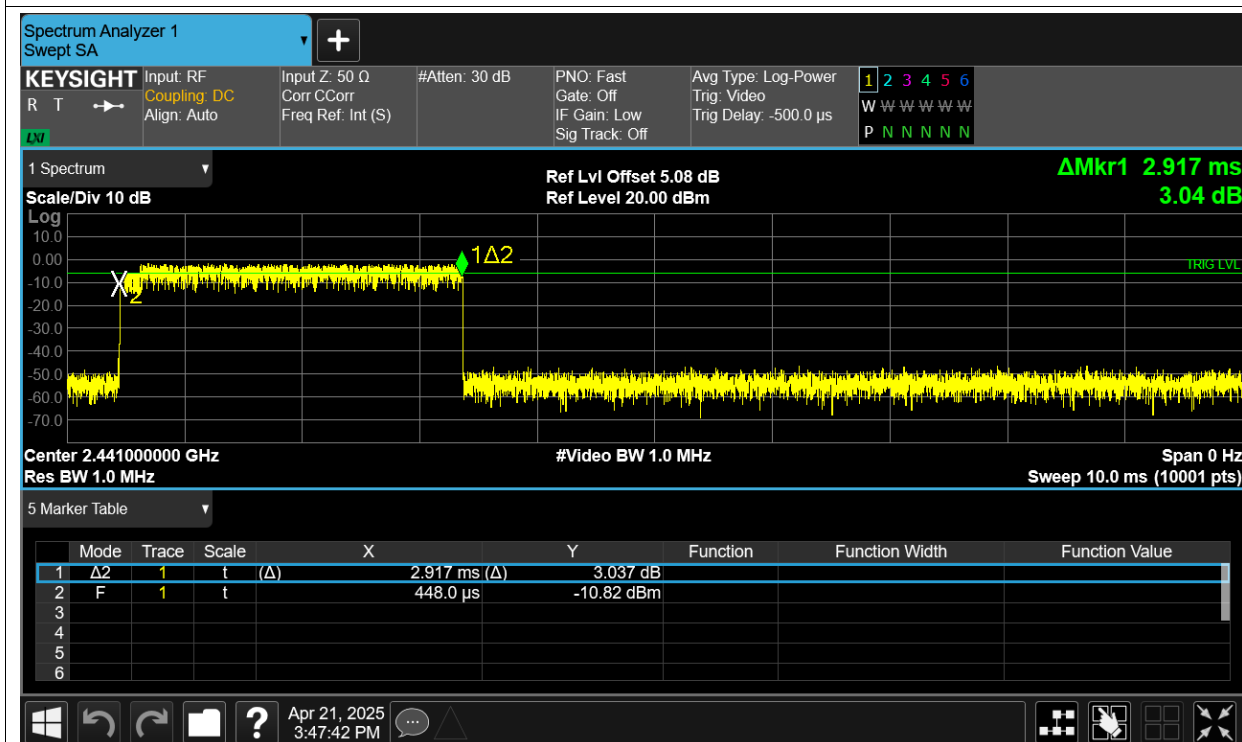

Dwell NVNT 3-DH1 2441MHz Ant1



Dwell NVNT 3-DH3 2441MHz Ant1

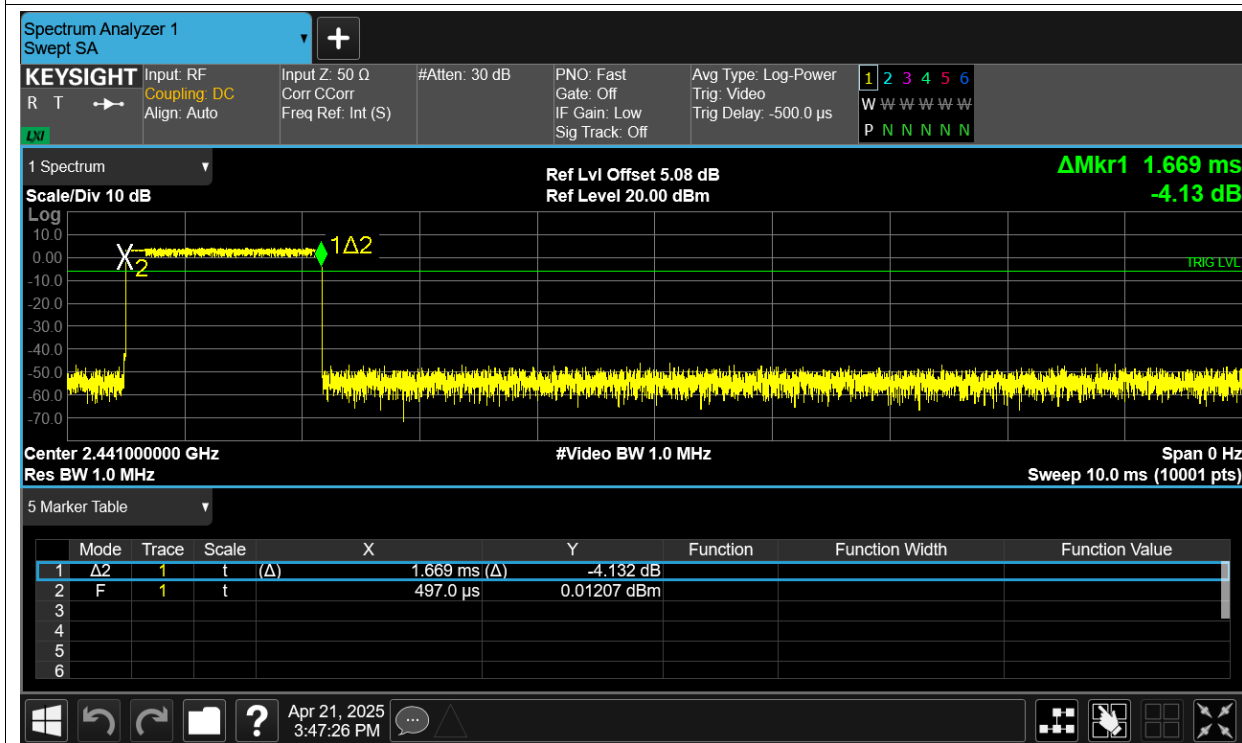

Dwell NVNT 3-DH5 2441MHz Ant1

