



Appendix G: Duty Cycle


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
Mode 1	Ant1	2402	0.39	0.63	61.90	2.08
		2440	0.39	0.63	61.90	2.08
		2480	0.39	0.63	61.90	2.08
Mode 2	Ant1	2402	0.20	0.62	32.26	4.91
		2440	0.20	0.62	32.26	4.91
		2480	0.20	0.62	32.26	4.91
Mode 3	Ant1	2402	1.07	1.88	56.91	2.45
		2440	1.06	1.87	56.68	2.47
		2480	1.07	1.88	56.91	2.45
Mode 4	Ant1	2402	3.10	3.75	82.67	0.83
		2440	3.10	3.75	82.67	0.83
		2480	3.10	3.75	82.67	0.83

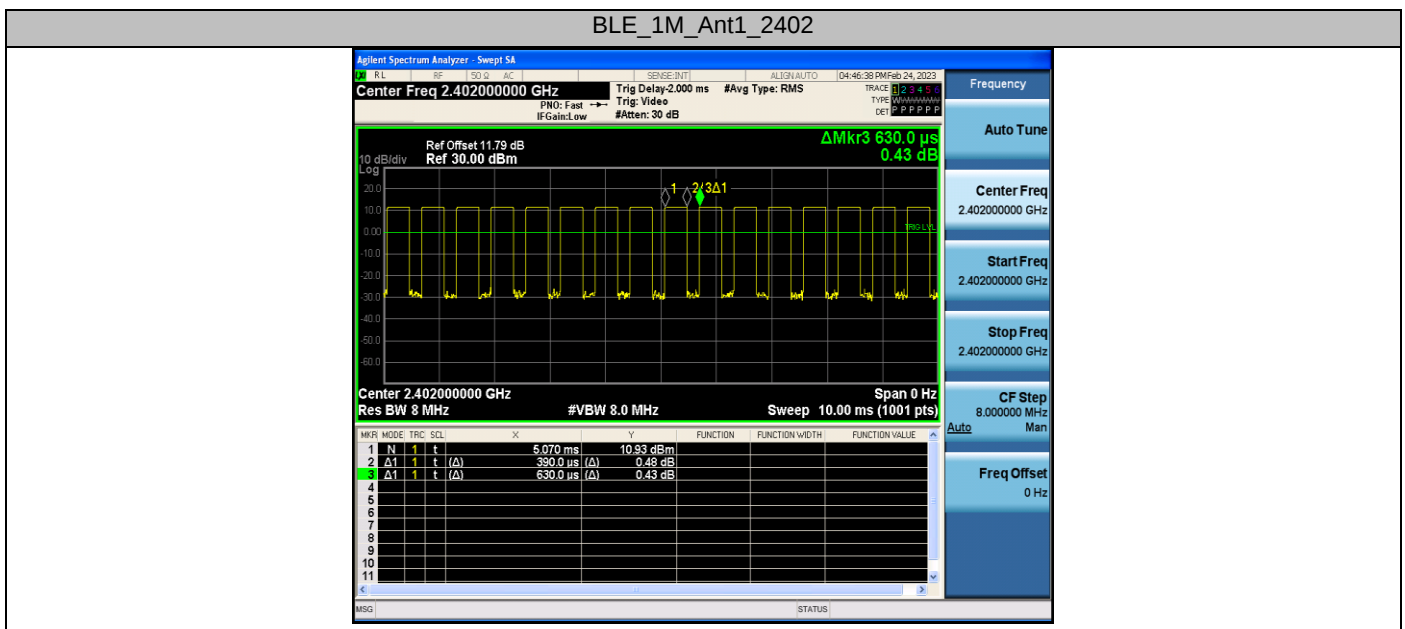


BLE_1M_Ant1_2440

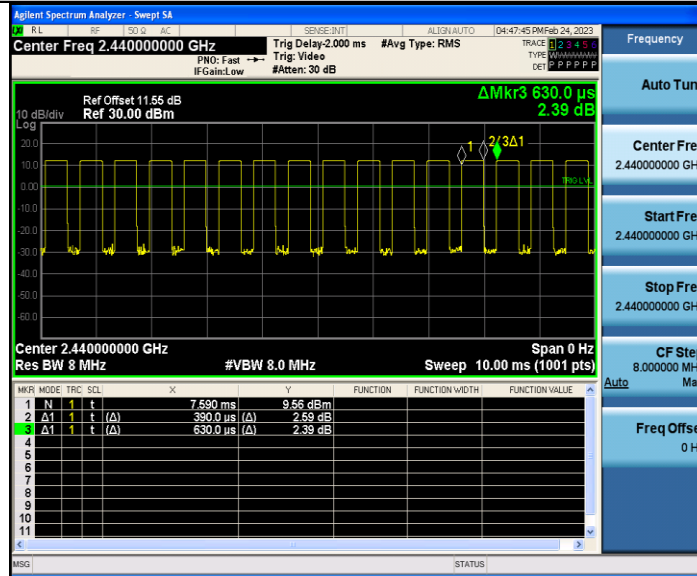


BLE_1M_Ant1_2480

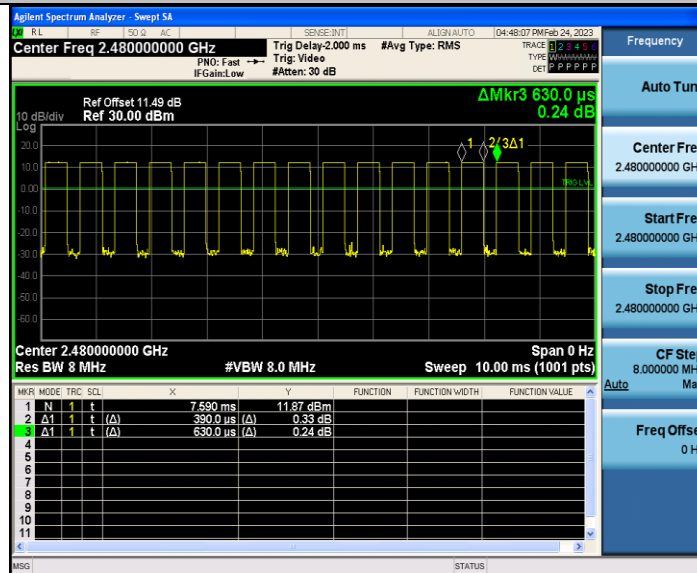


BLE_2M_Ant1_2402

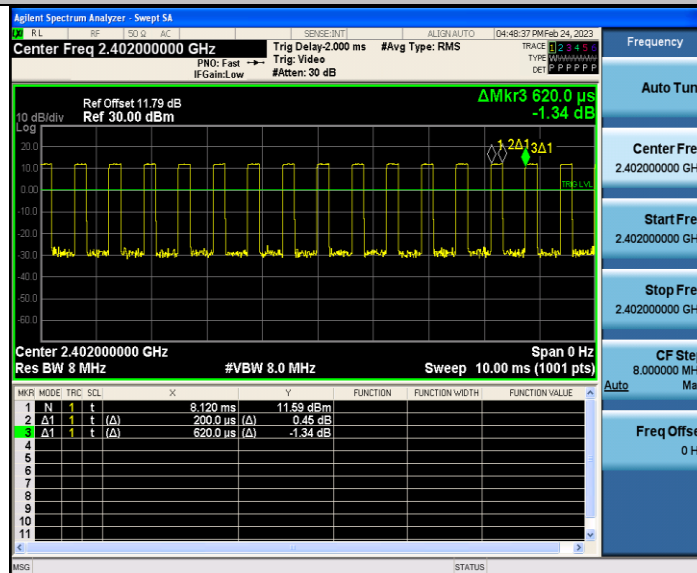


BLE_2M_Ant1_2440

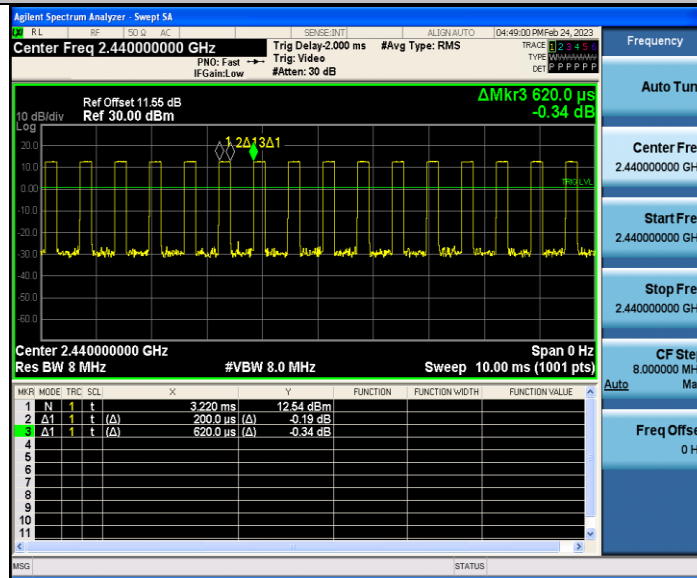


BLE_2M_Ant1_2480

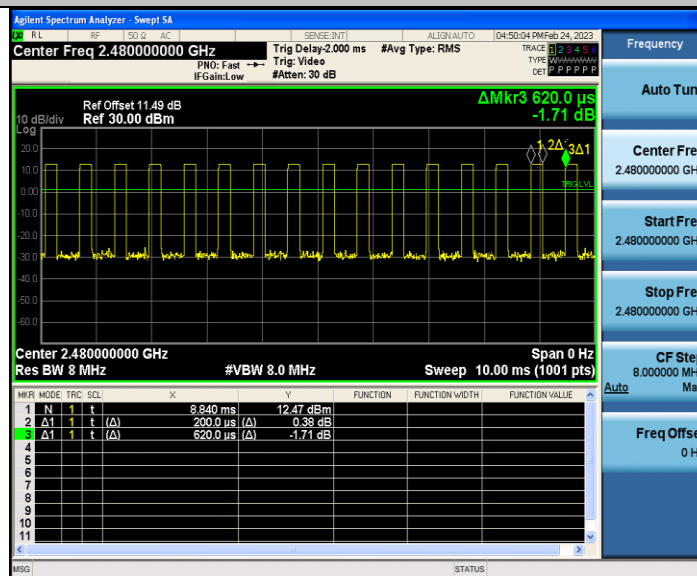


BLE_500K_Ant1_2402

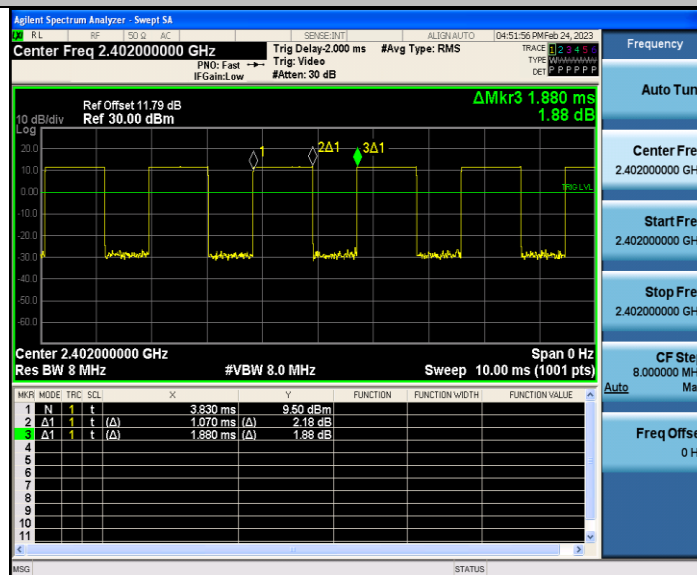


BLE_500K_Ant1_2440

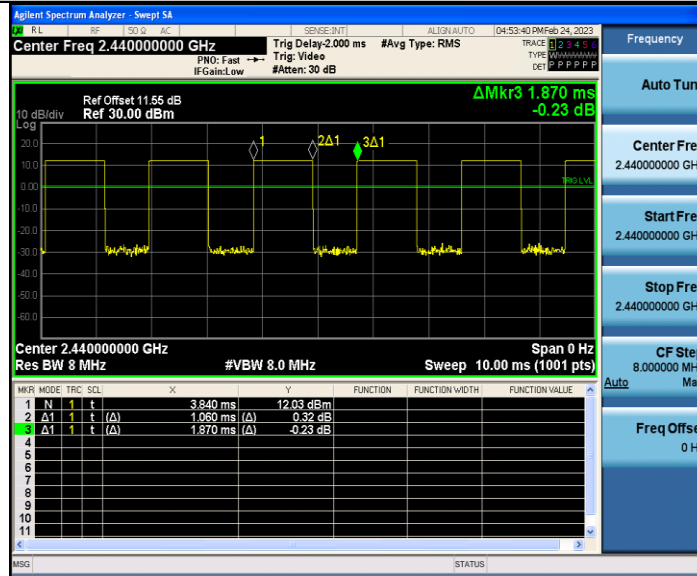


BLE_500K_Ant1_2480

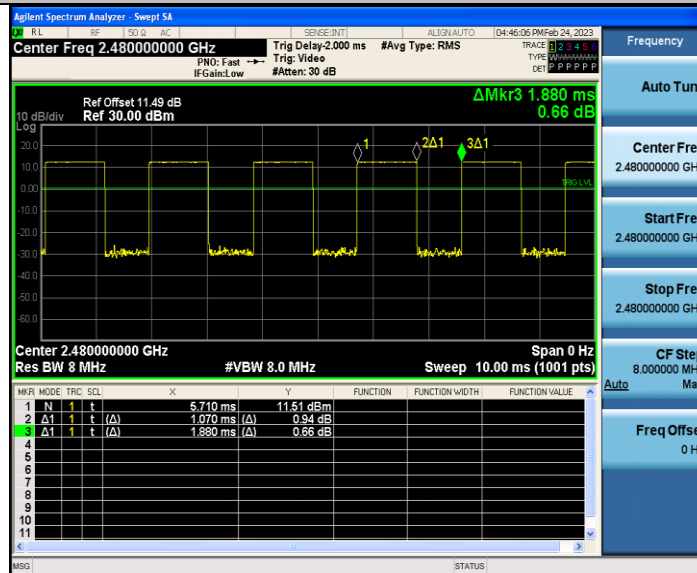


BLE_125K_Ant1_2402

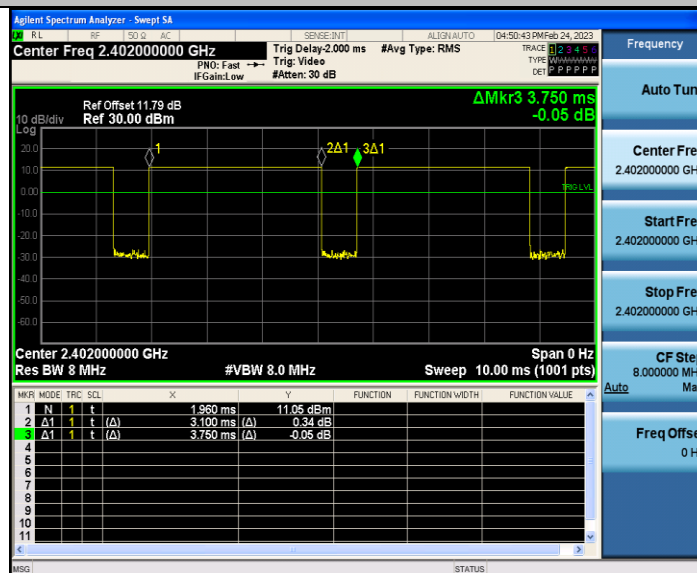

BLE_125K_Ant1_2440

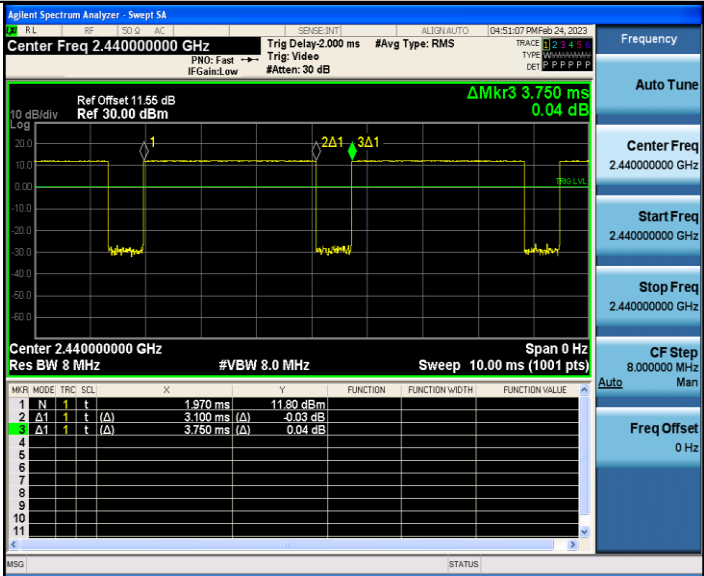


BLE_125K_Ant1_2480

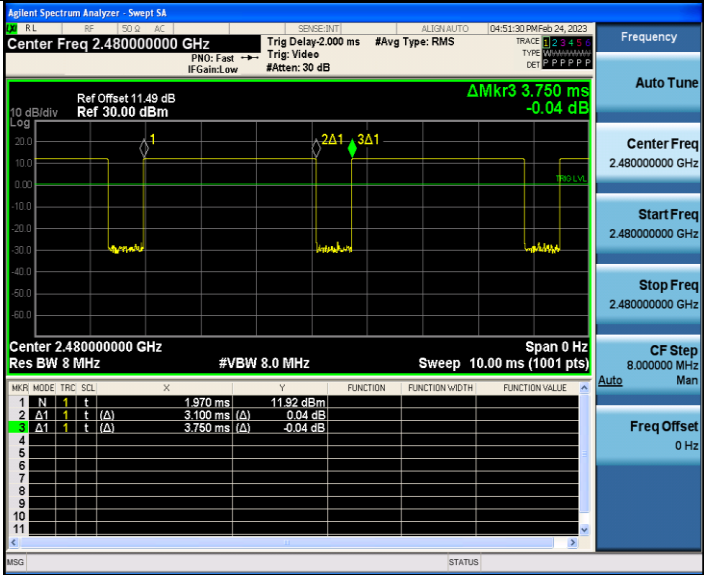



Appendix H: Emissions in Restricted Bands


Profile: 2310083R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

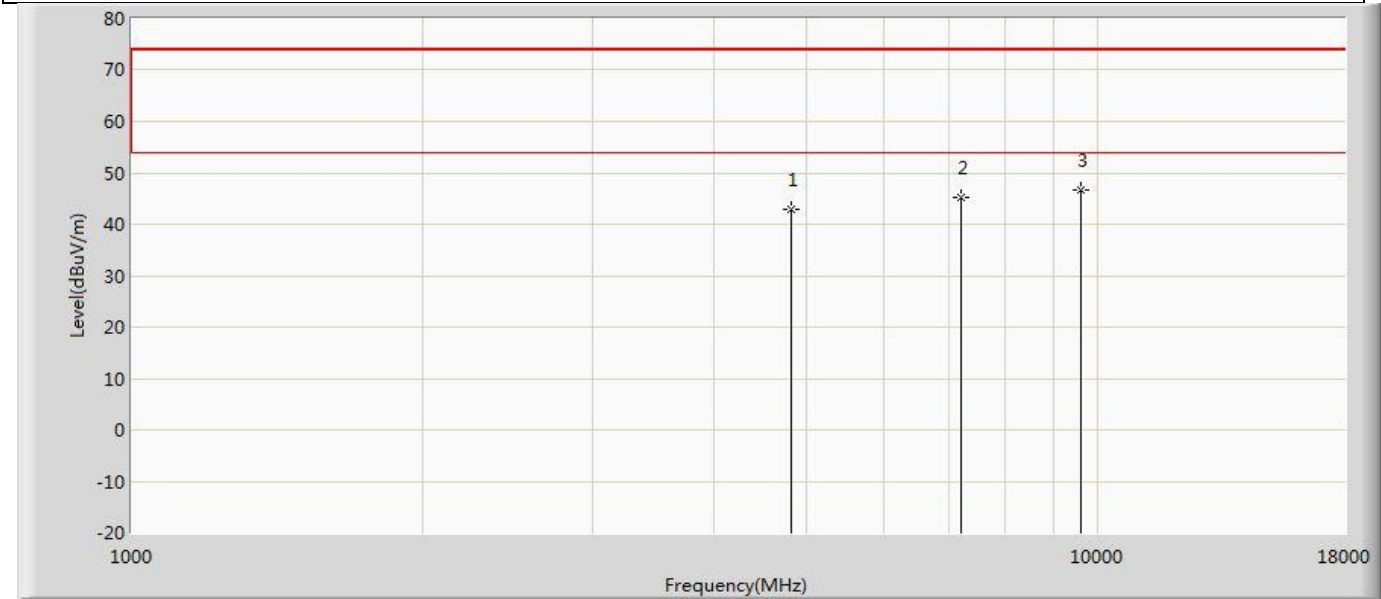

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4808.000	42.991	57.978	-31.009	74.000	-14.987	PK
2		7205.000	45.130	55.942	-28.870	74.000	-10.813	PK
3	*	9608.000	46.656	54.750	-27.344	74.000	-8.094	PK




Profile: 2310083R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

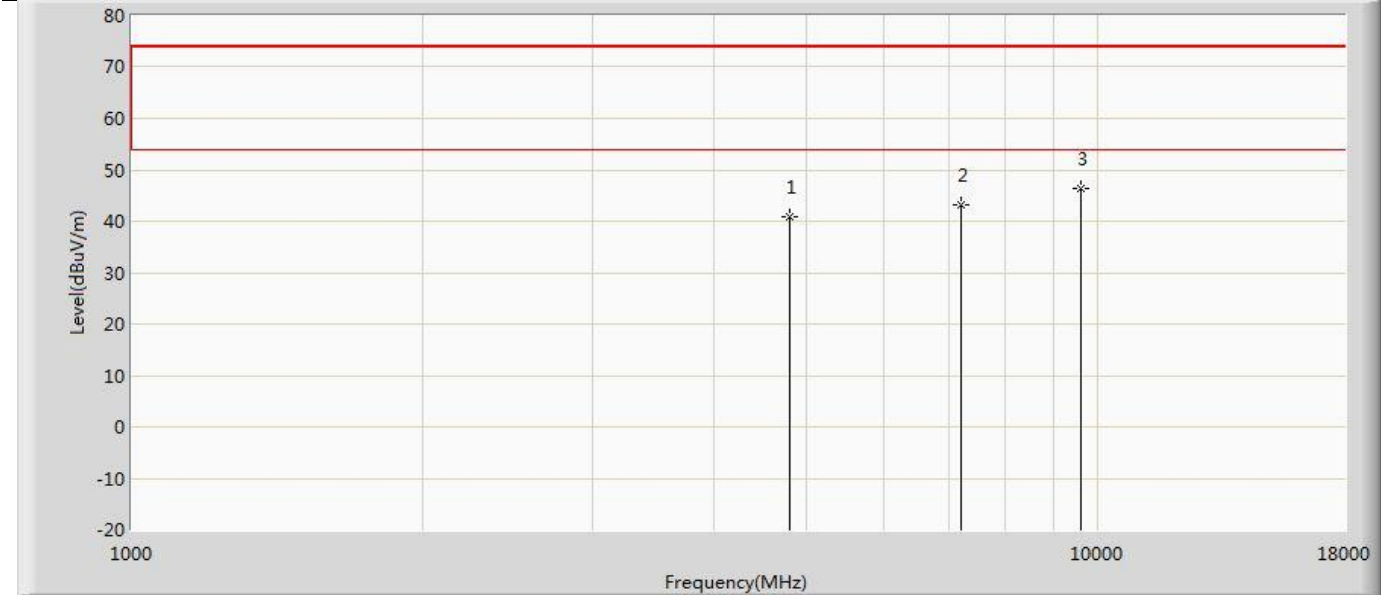

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.741	55.721	-33.259	74.000	-14.981	PK
2		7206.000	43.284	54.104	-30.716	74.000	-10.820	PK
3	*	9608.000	46.464	54.558	-27.536	74.000	-8.094	PK




Profile: 2310083R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2440MHz by LE_1Mbps	

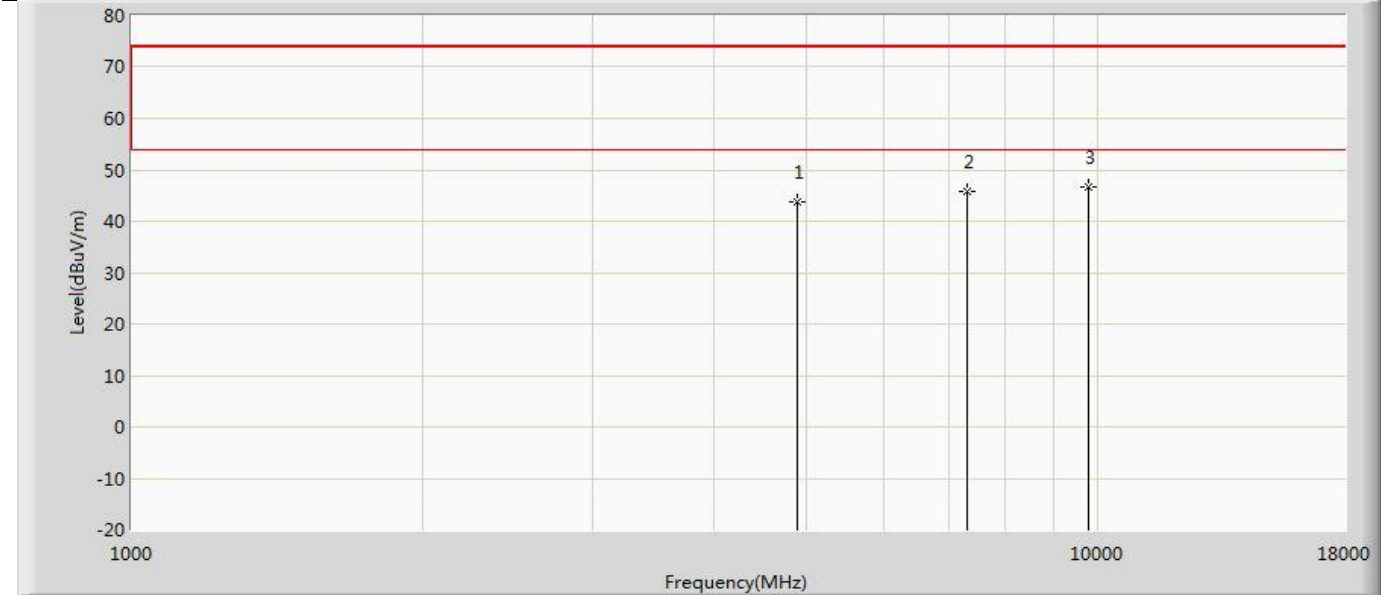

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4876.000	43.701	58.276	-30.299	74.000	-14.575	PK
2		7324.000	45.899	56.778	-28.101	74.000	-10.879	PK
3	*	9760.000	46.568	54.365	-27.432	74.000	-7.797	PK




Profile: 2310083R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2440MHz by LE_1Mbps	

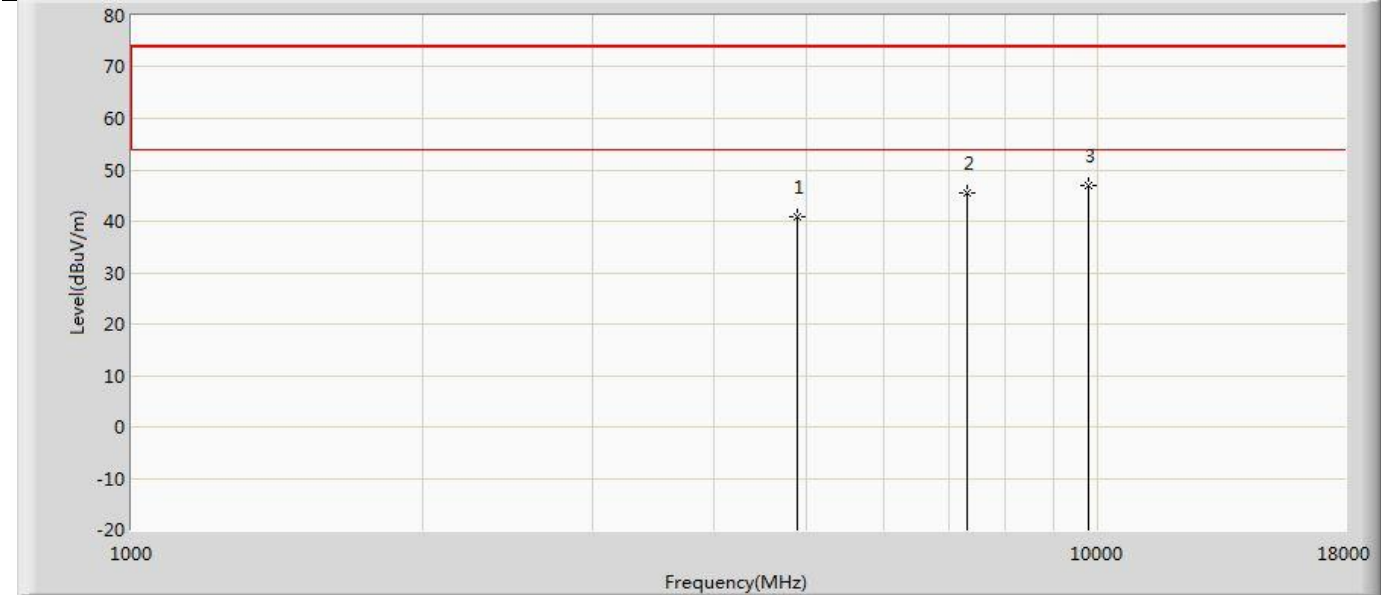

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.778	55.378	-33.222	74.000	-14.600	PK
2		7324.000	45.584	56.463	-28.416	74.000	-10.879	PK
3	*	9760.000	46.941	54.738	-27.059	74.000	-7.797	PK




Profile: 2310083R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2480MHz by LE_1Mbps	

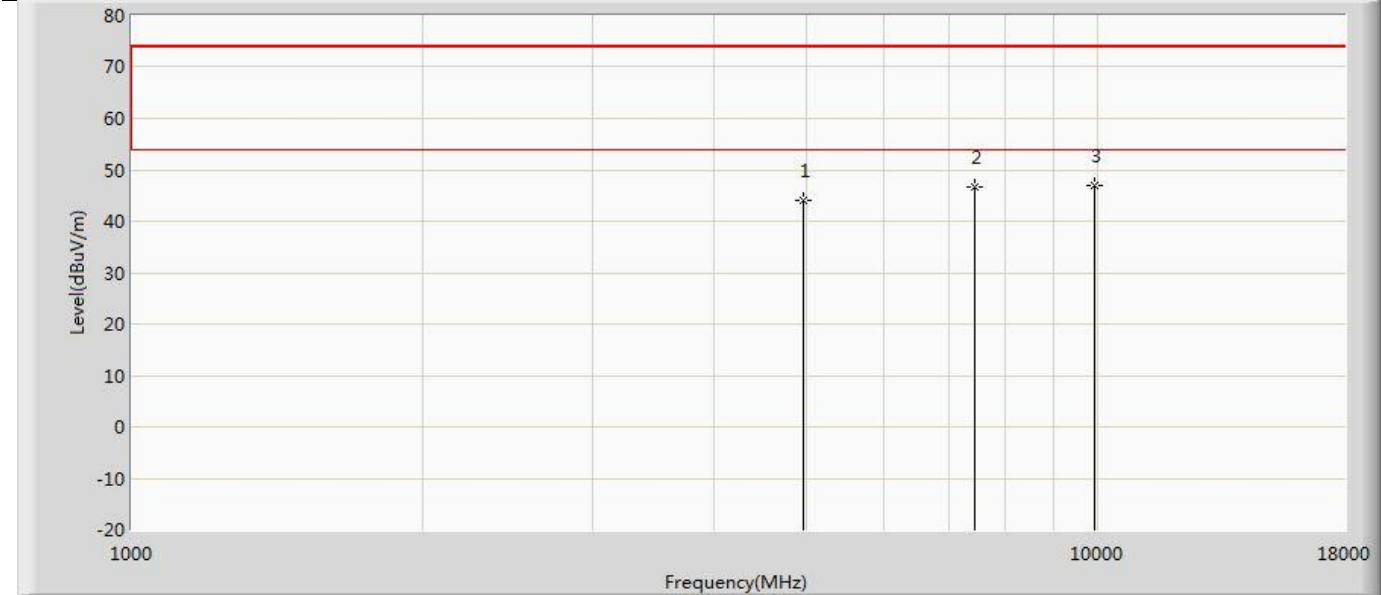

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4961.000	44.177	58.736	-29.823	74.000	-14.560	PK
2		7443.000	46.596	57.370	-27.404	74.000	-10.774	PK
3	*	9920.000	46.842	54.419	-27.158	74.000	-7.578	PK




Profile: 2310083R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2480MHz by LE_1Mbps	

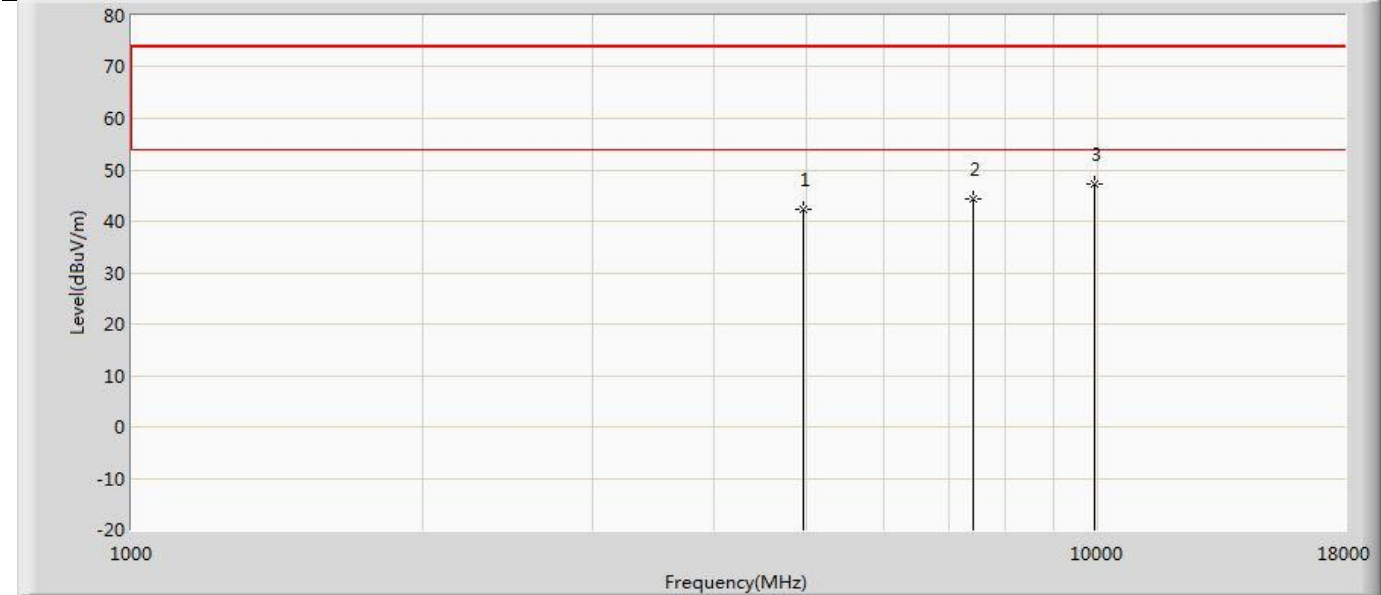

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.425	56.989	-31.575	74.000	-14.565	PK
2		7440.000	44.324	55.055	-29.676	74.000	-10.731	PK
3	*	9920.000	47.126	54.703	-26.874	74.000	-7.578	PK




Profile: 2310083R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2402MHz by LE_2Mbps	

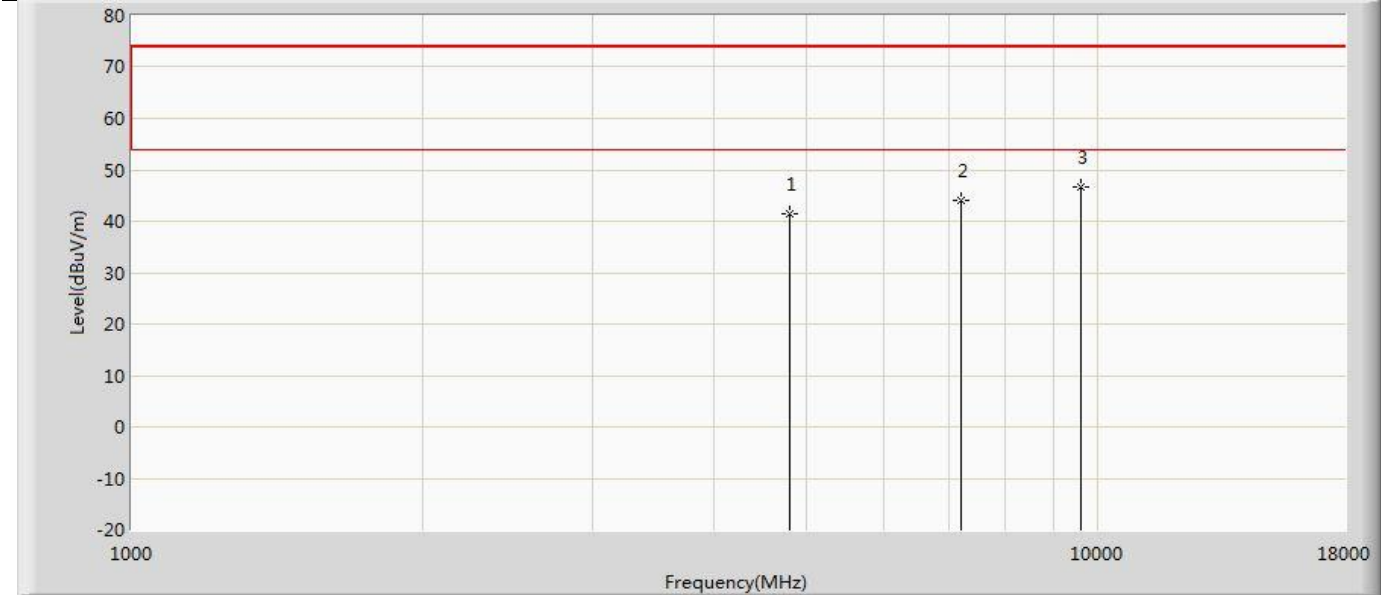

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.352	56.332	-32.648	74.000	-14.981	PK
2		7206.000	43.956	54.776	-30.044	74.000	-10.820	PK
3	*	9608.000	46.594	54.688	-27.406	74.000	-8.094	PK




Profile: 2310083R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2402MHz by LE_2Mbps	

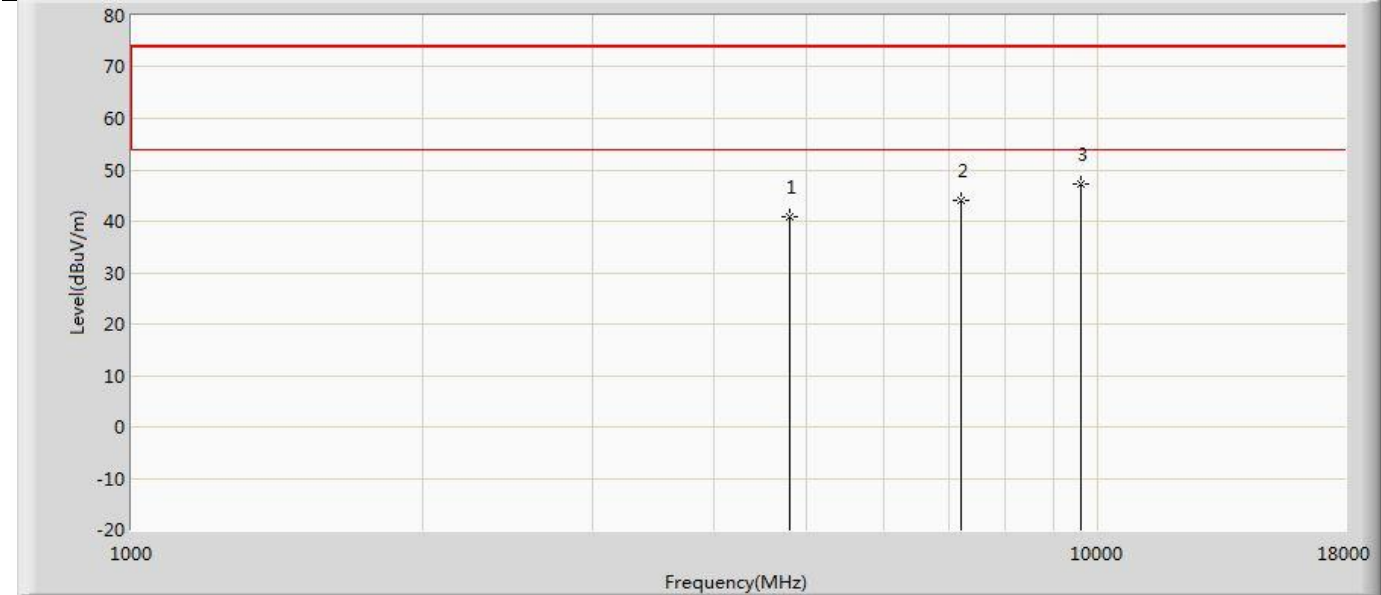

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.973	55.953	-33.027	74.000	-14.981	PK
2		7206.000	43.936	54.756	-30.064	74.000	-10.820	PK
3	*	9608.000	47.114	55.208	-26.886	74.000	-8.094	PK




Profile: 2310083R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2440MHz by LE_2Mbps	

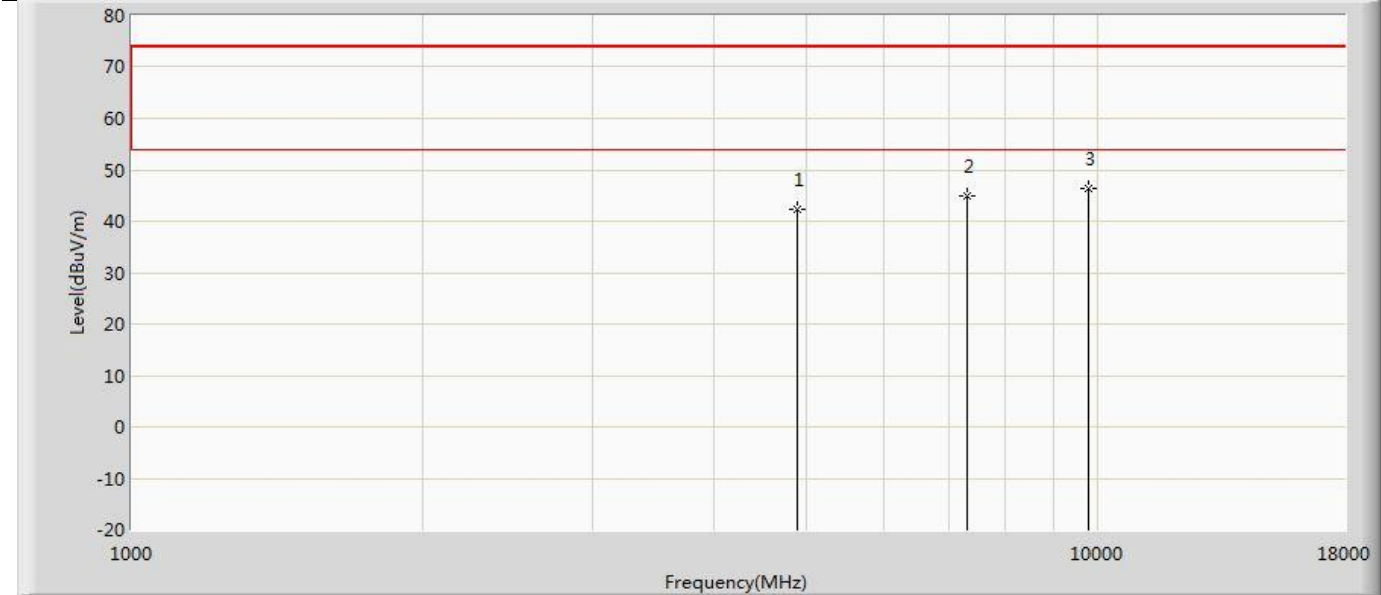

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	42.311	56.911	-31.689	74.000	-14.600	PK
2		7320.000	45.027	55.895	-28.973	74.000	-10.868	PK
3	*	9760.000	46.458	54.255	-27.542	74.000	-7.797	PK




Profile: 2310083R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2440MHz by LE_2Mbps	

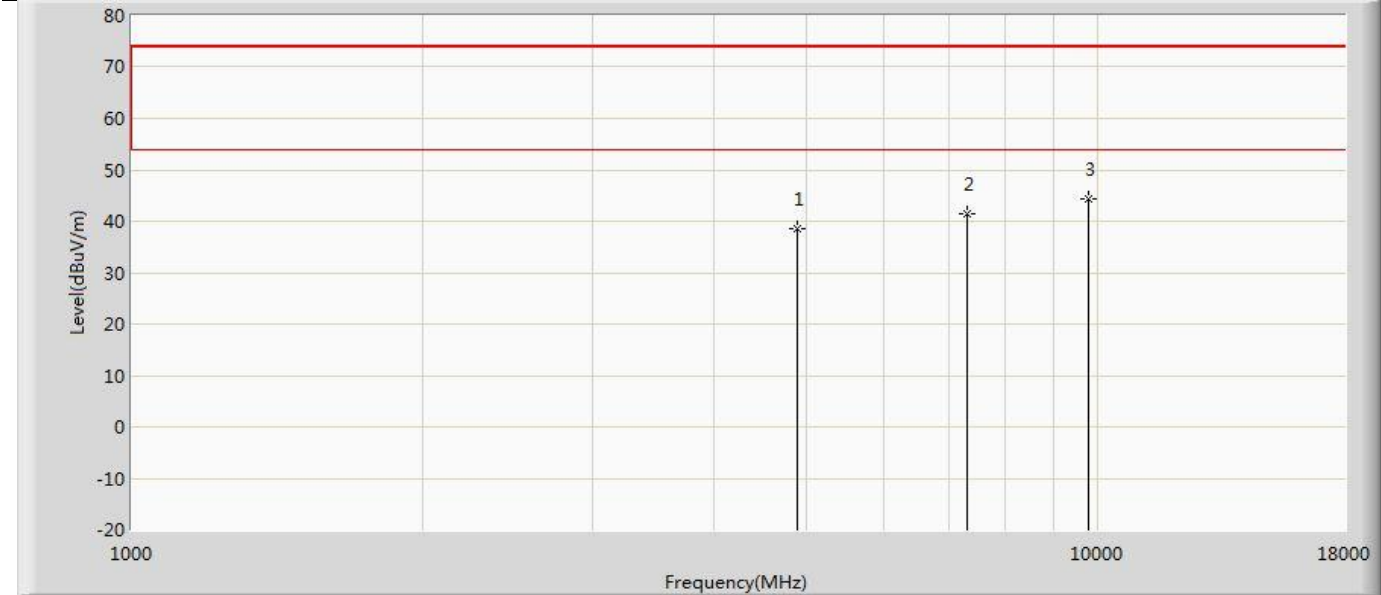

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	38.607	53.207	-35.393	74.000	-14.600	PK
2		7320.000	41.433	52.301	-32.567	74.000	-10.868	PK
3	*	9760.000	44.364	52.161	-29.636	74.000	-7.797	PK




Profile: 2310083R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2480MHz by LE_2Mbps	

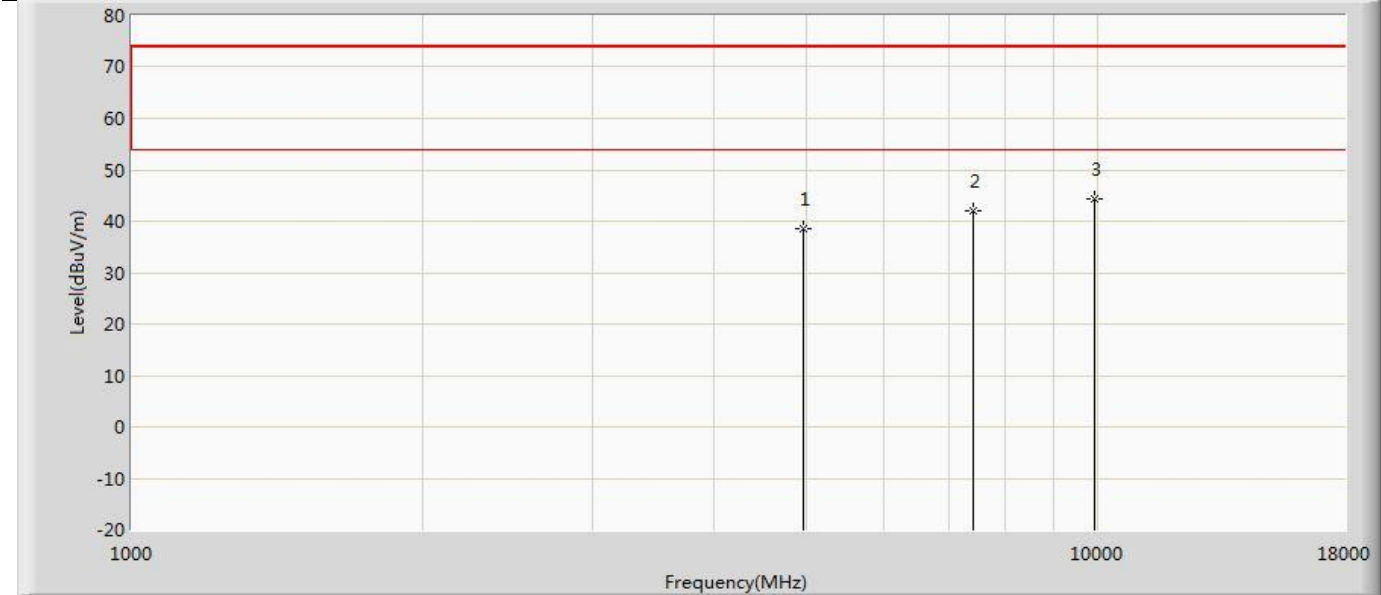

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	38.571	53.135	-35.429	74.000	-14.565	PK
2		7440.000	42.048	52.779	-31.952	74.000	-10.731	PK
3	*	9920.000	44.406	51.983	-29.594	74.000	-7.578	PK




Profile: 2310083R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 2 : Transmit at 2480MHz by LE_2Mbps	

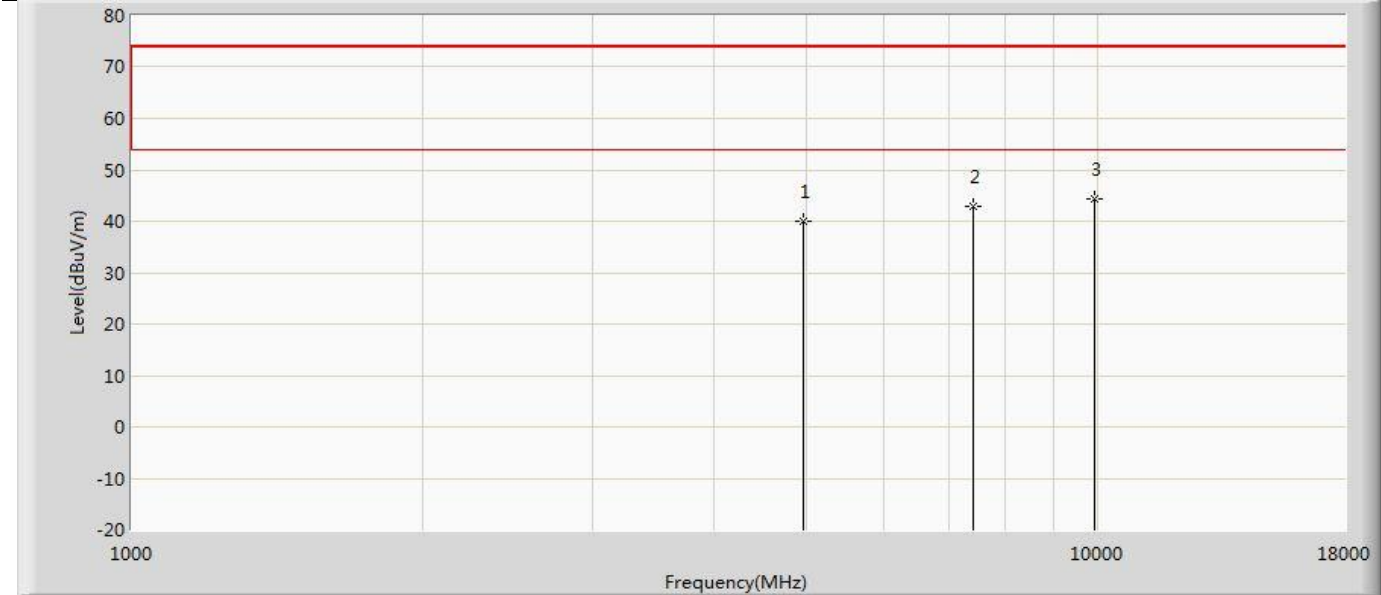

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.077	54.641	-33.923	74.000	-14.565	PK
2		7440.000	42.817	53.548	-31.183	74.000	-10.731	PK
3	*	9920.000	44.448	52.025	-29.552	74.000	-7.578	PK




Profile: 2310083R	Page No.: 37
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2402MHz by LE_Coded S=8	

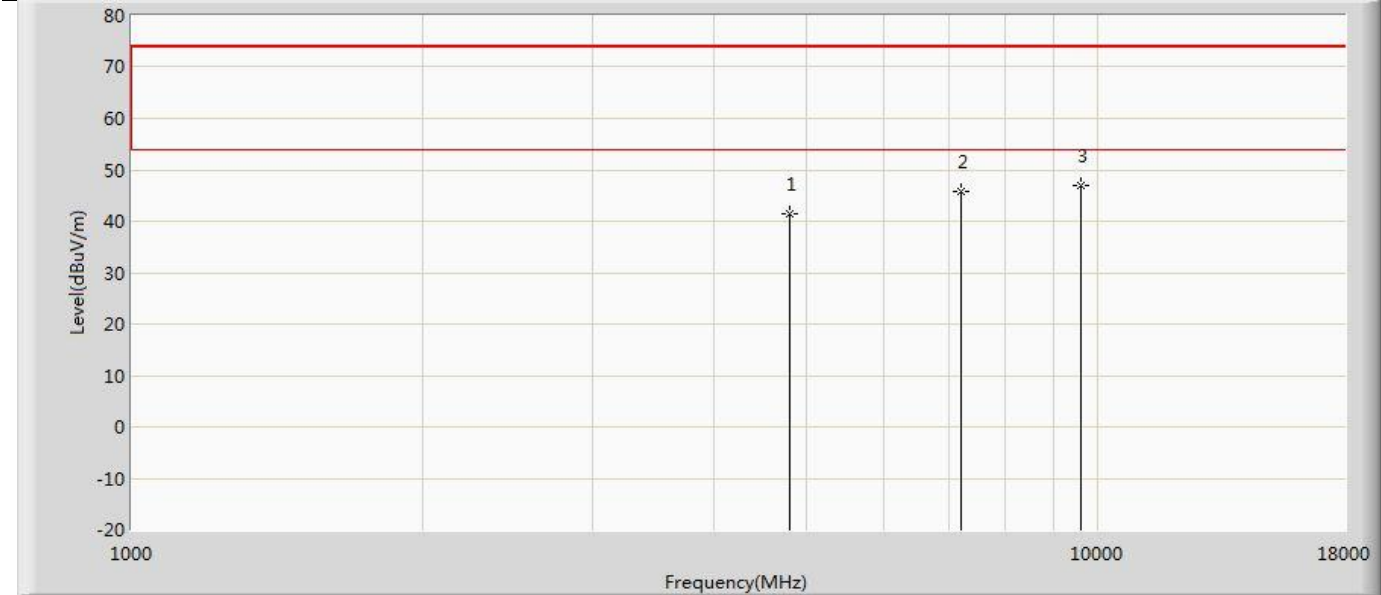

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.479	56.459	-32.521	74.000	-14.981	PK
2		7206.000	45.803	56.623	-28.197	74.000	-10.820	PK
3	*	9608.000	46.967	55.061	-27.033	74.000	-8.094	PK




Profile: 2310083R	Page No.: 38
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2402MHz by LE_Coded S=8	

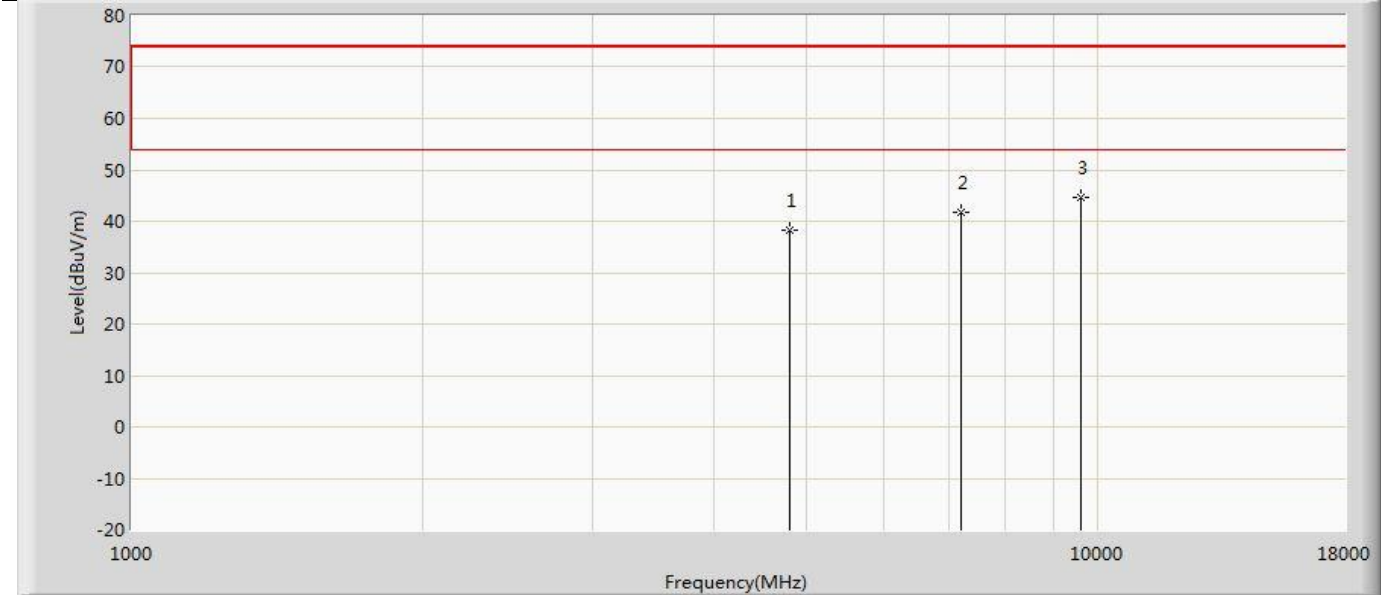

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	38.369	53.349	-35.631	74.000	-14.981	PK
2		7206.000	41.756	52.576	-32.244	74.000	-10.820	PK
3	*	9608.000	44.716	52.810	-29.284	74.000	-8.094	PK




Profile: 2310083R	Page No.: 39
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2440MHz by LE_Coded S=8	

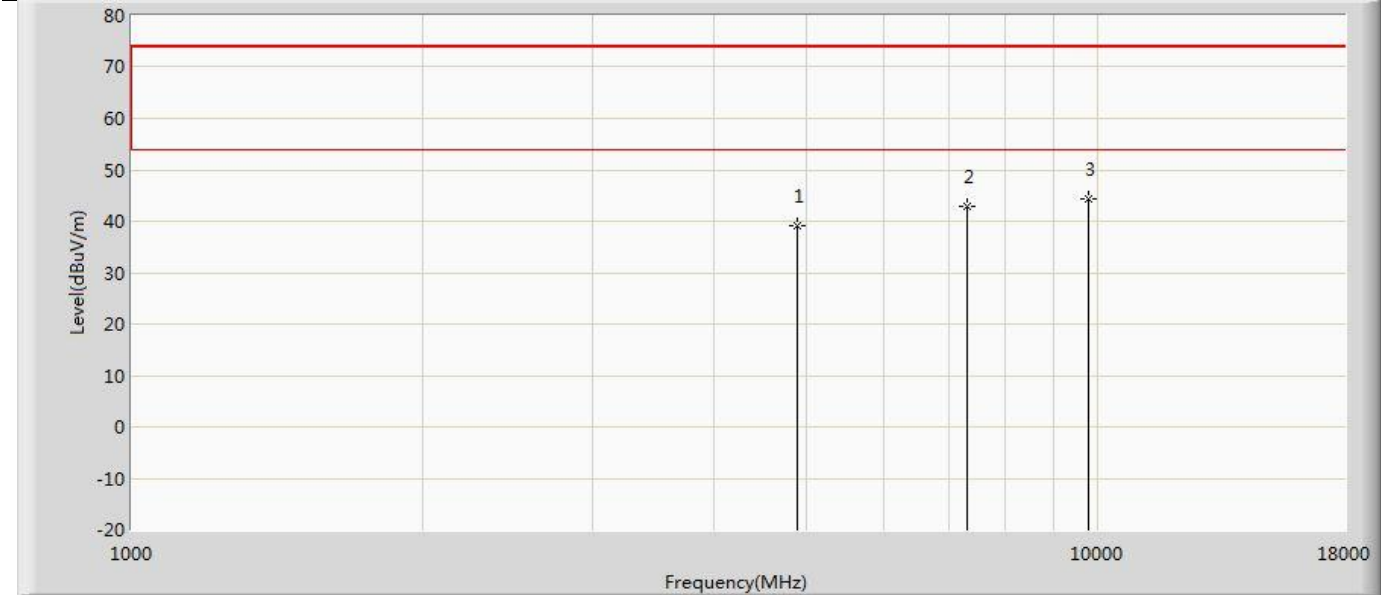

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	39.243	53.843	-34.757	74.000	-14.600	PK
2		7320.000	43.017	53.885	-30.983	74.000	-10.868	PK
3	*	9760.000	44.297	52.094	-29.703	74.000	-7.797	PK




Profile: 2310083R	Page No.: 40
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2440MHz by LE_Coded S=8	

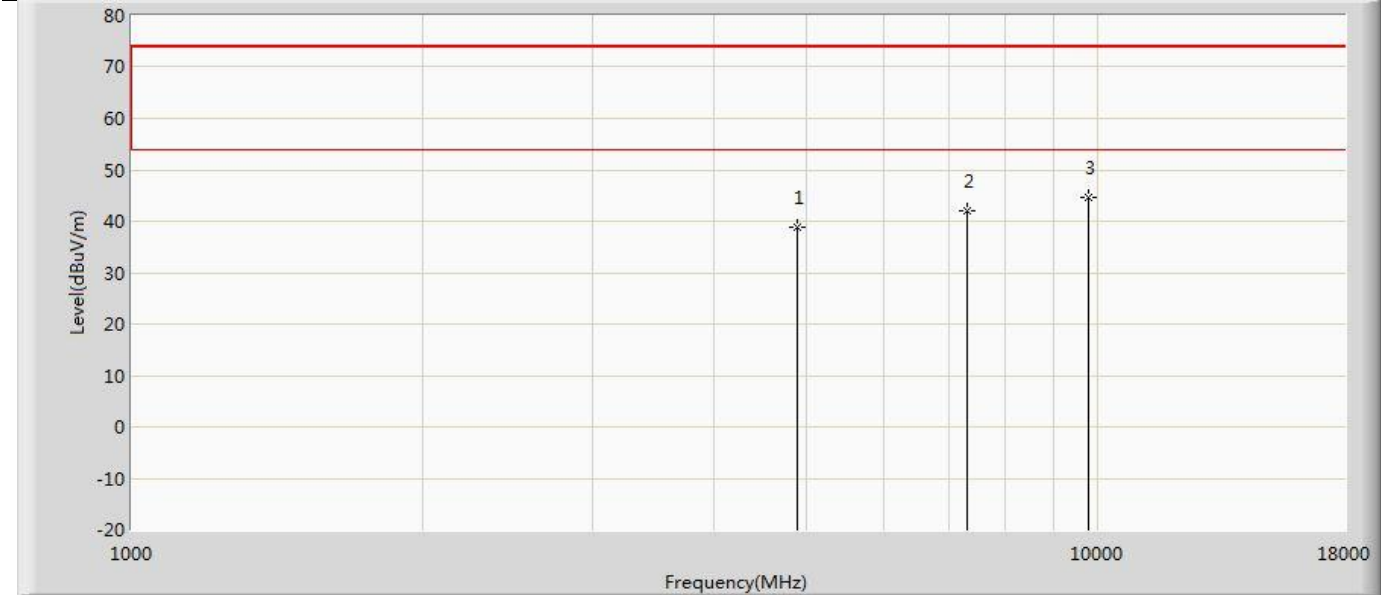

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	38.746	53.346	-35.254	74.000	-14.600	PK
2		7320.000	42.147	53.015	-31.853	74.000	-10.868	PK
3	*	9760.000	44.676	52.473	-29.324	74.000	-7.797	PK




Profile: 2310083R	Page No.: 41
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2480MHz by LE_Coded S=8	

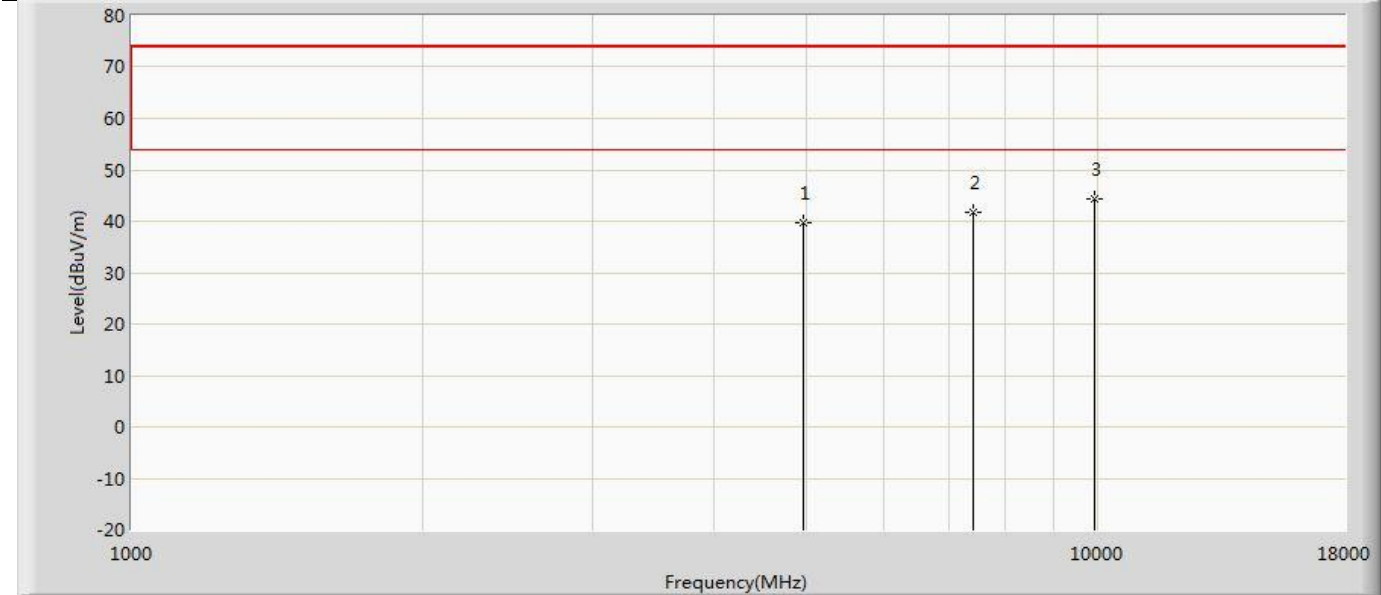

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.788	54.352	-34.212	74.000	-14.565	PK
2		7440.000	41.640	52.371	-32.360	74.000	-10.731	PK
3	*	9920.000	44.480	52.057	-29.520	74.000	-7.578	PK




Profile: 2310083R	Page No.: 42
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 3 : Transmit at 2480MHz by LE_Coded S=8	

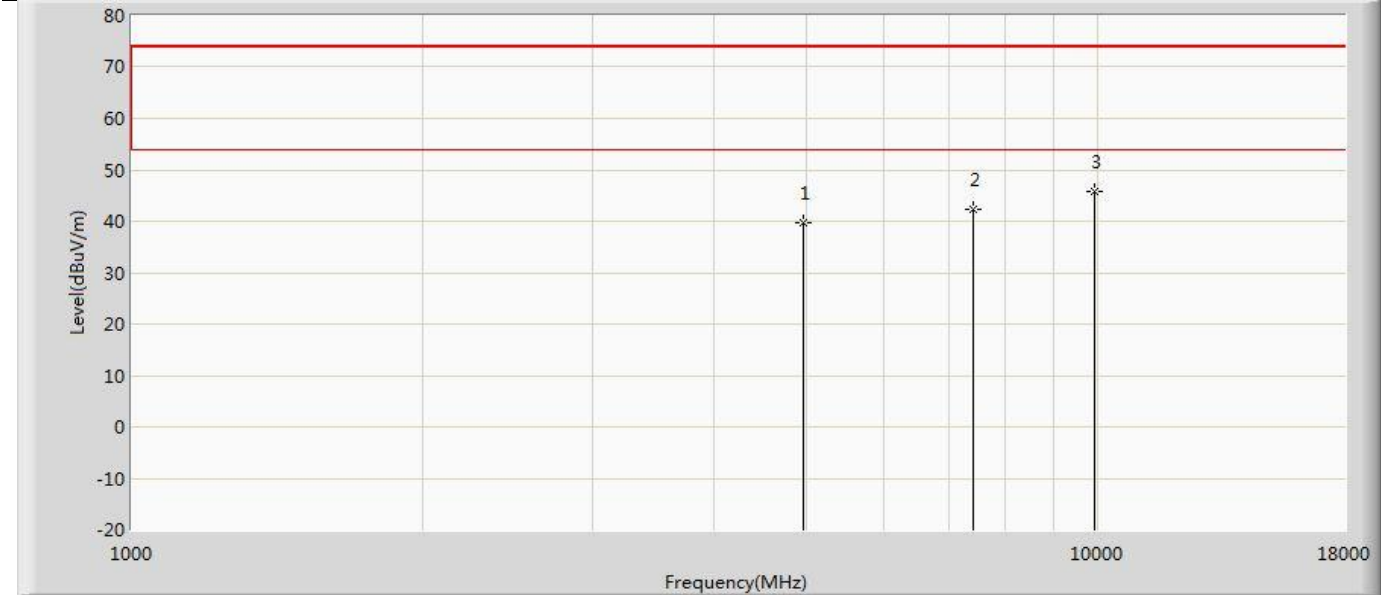

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.700	54.264	-34.300	74.000	-14.565	PK
2		7440.000	42.176	52.907	-31.824	74.000	-10.731	PK
3	*	9920.000	45.864	53.441	-28.136	74.000	-7.578	PK




Profile: 2310083R	Page No.: 43
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2402MHz by LE_Coded S=2	

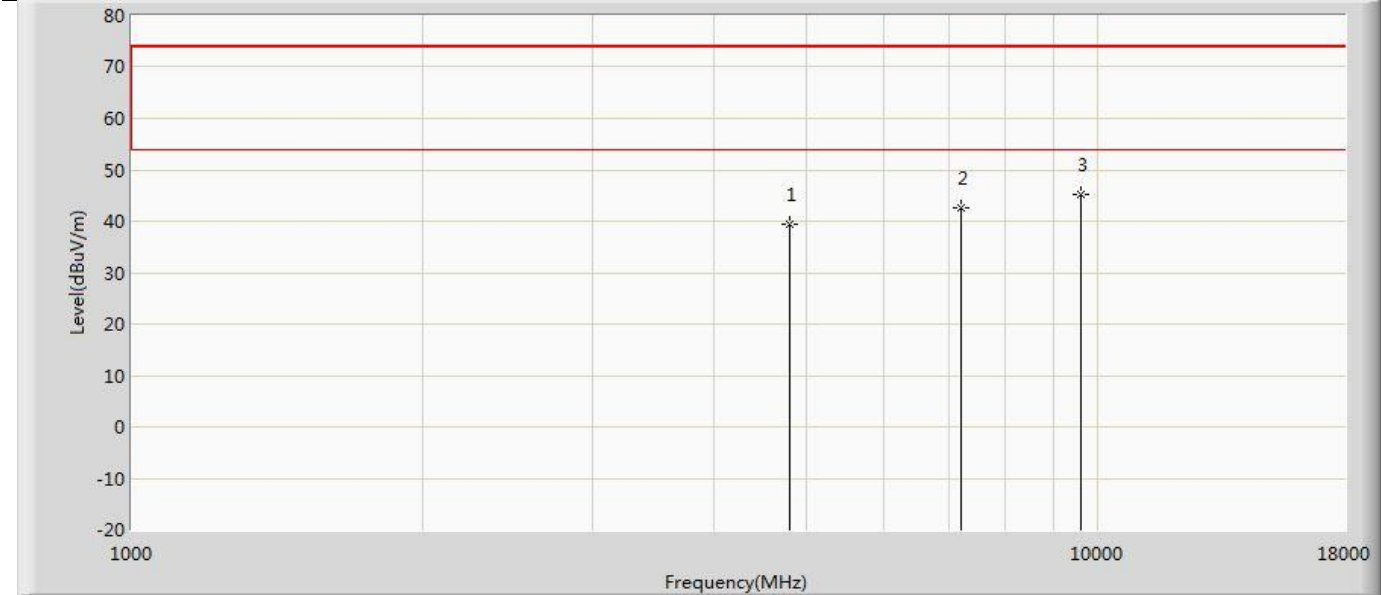

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	39.519	54.499	-34.481	74.000	-14.981	PK
2		7206.000	42.641	53.461	-31.359	74.000	-10.820	PK
3	*	9608.000	45.332	53.426	-28.668	74.000	-8.094	PK




Profile: 2310083R	Page No.: 44
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2402MHz by LE_Coded S=2	

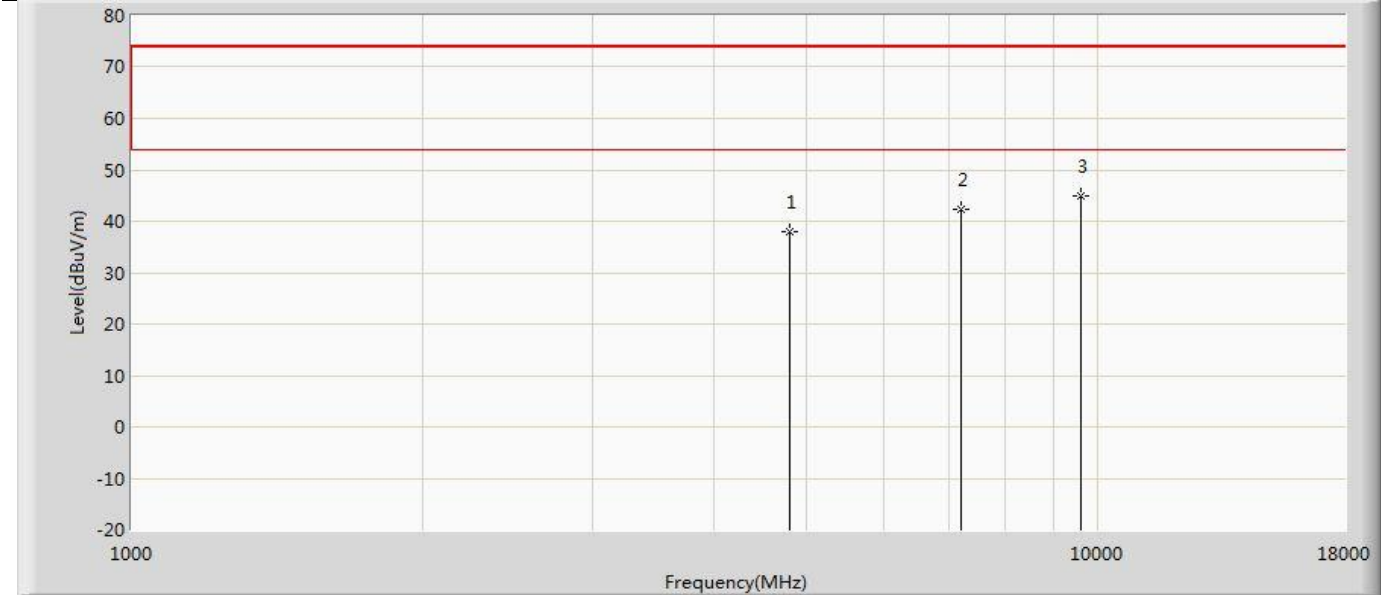

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	37.927	52.907	-36.073	74.000	-14.981	PK
2		7206.000	42.240	53.060	-31.760	74.000	-10.820	PK
3	*	9608.000	45.040	53.134	-28.960	74.000	-8.094	PK




Profile: 2310083R	Page No.: 45
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2440MHz by LE_Coded S=2	

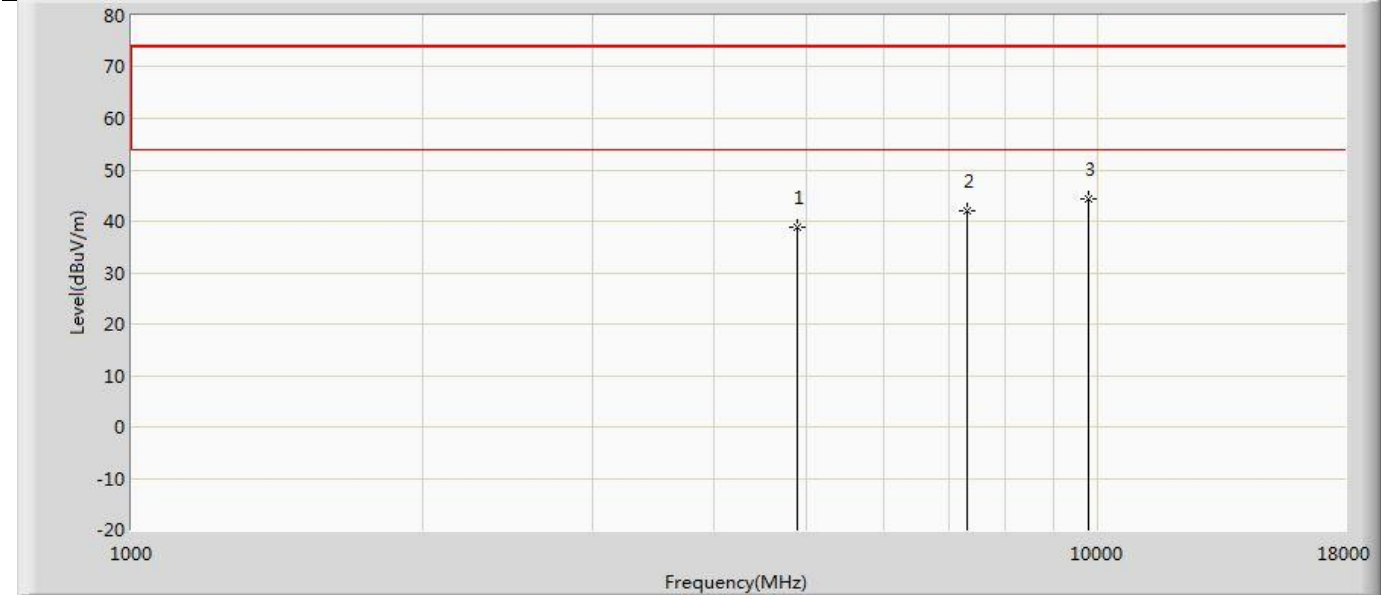

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	38.742	53.342	-35.258	74.000	-14.600	PK
2		7320.000	42.028	52.896	-31.972	74.000	-10.868	PK
3	*	9760.000	44.225	52.022	-29.775	74.000	-7.797	PK




Profile: 2310083R	Page No.: 46
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2440MHz by LE_Coded S=2	

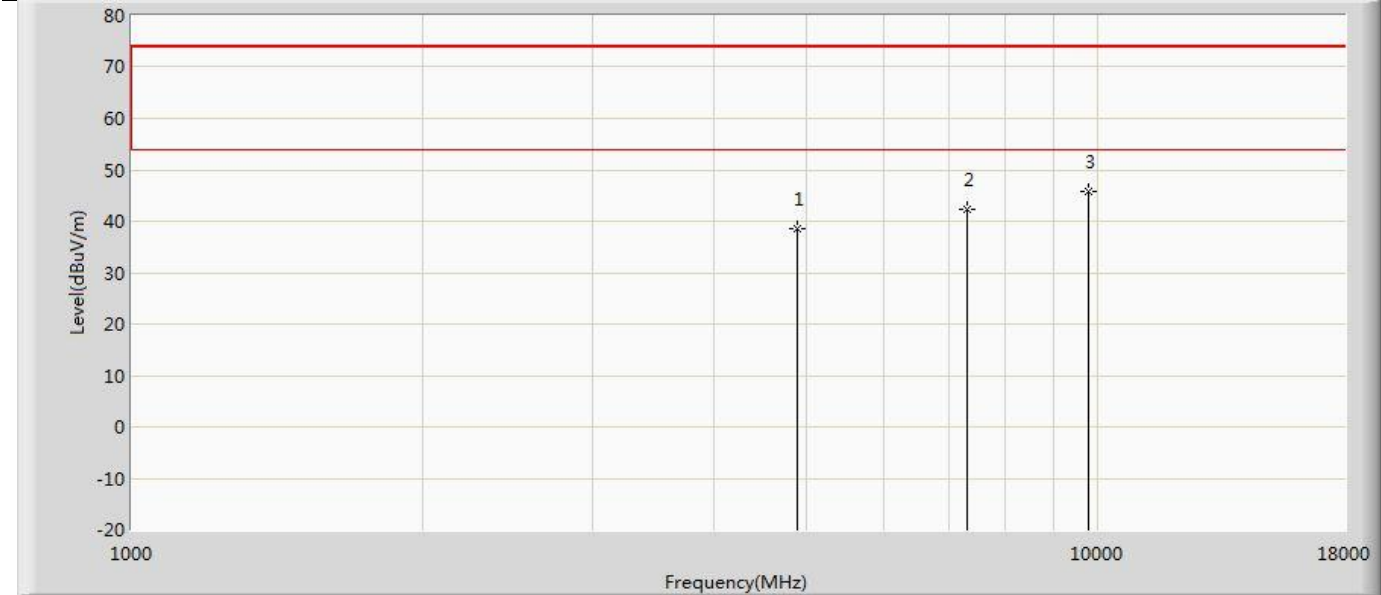

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	38.537	53.137	-35.463	74.000	-14.600	PK
2		7320.000	42.266	53.134	-31.734	74.000	-10.868	PK
3	*	9760.000	45.825	53.622	-28.175	74.000	-7.797	PK




Profile: 2310083R	Page No.: 47
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2480MHz by LE_Coded S=2	

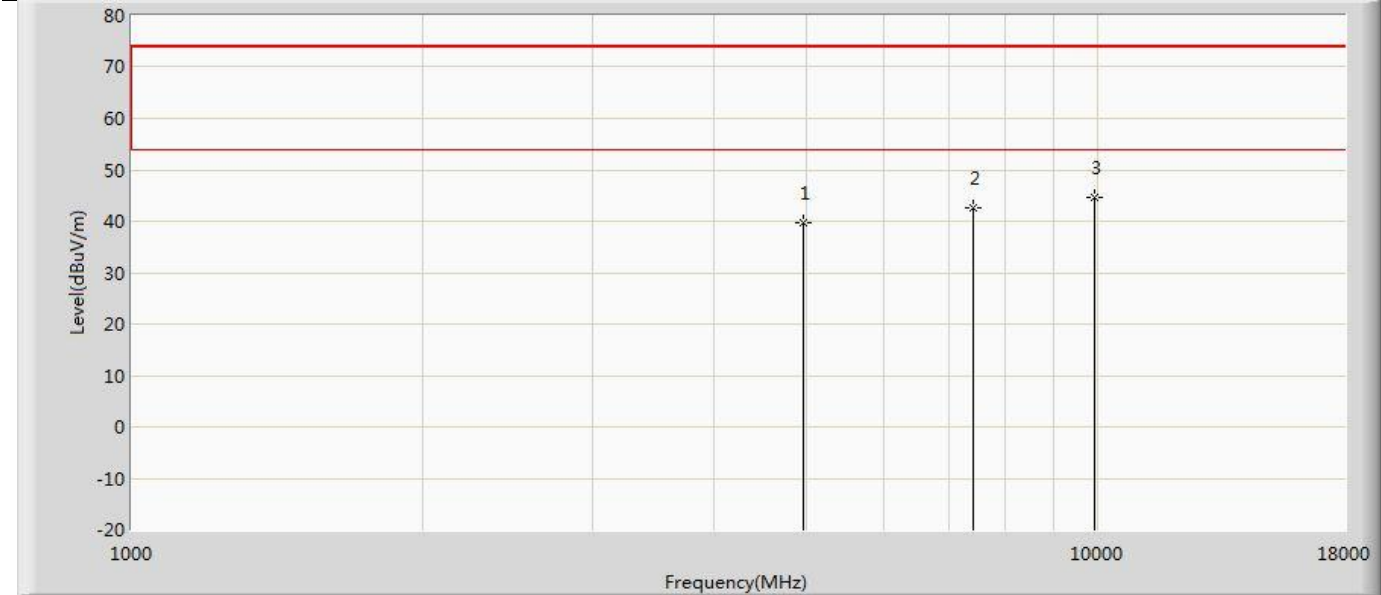

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.754	54.318	-34.246	74.000	-14.565	PK
2		7440.000	42.643	53.374	-31.357	74.000	-10.731	PK
3	*	9920.000	44.669	52.246	-29.331	74.000	-7.578	PK

Profile: 2310083R	Page No.: 48
Engineer: Yuliu	
Site: AC5	Time: 2023/02/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 4 : Transmit at 2480MHz by LE_Coded S=2	

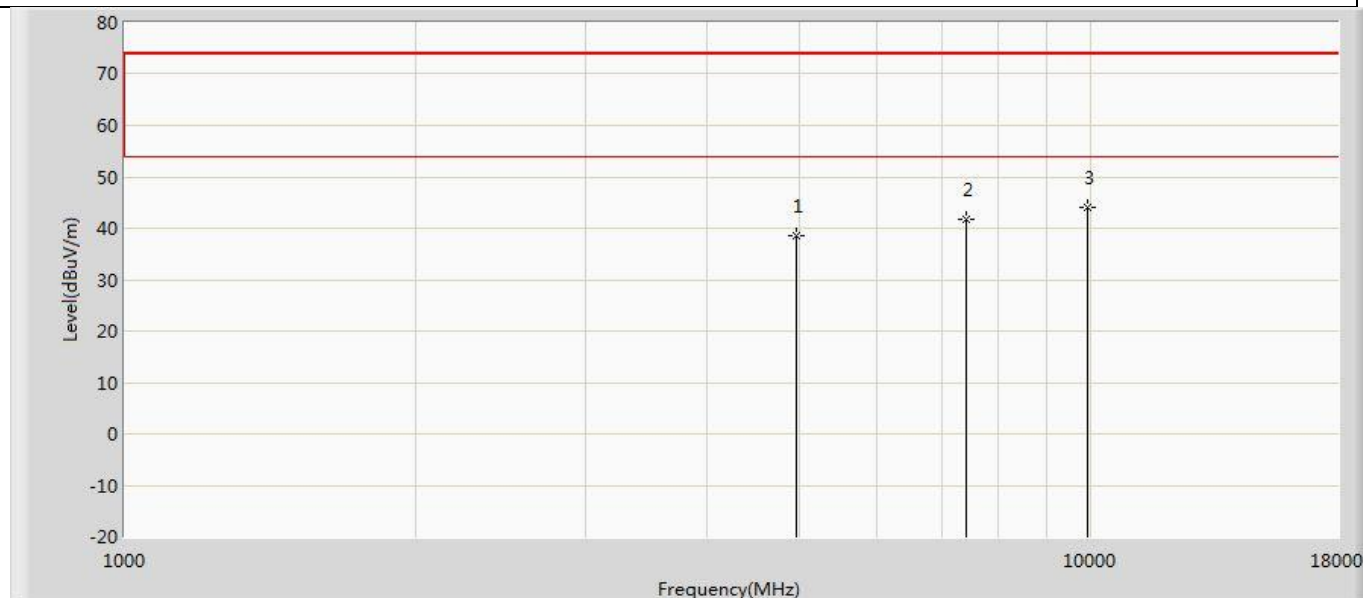


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	38.434	52.998	-35.566	74.000	-14.565	PK
2		7440.000	41.818	52.549	-32.182	74.000	-10.731	PK
3	*	9920.000	44.185	51.762	-29.815	74.000	-7.578	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

The worst case of Radiated Emission below 1GHz

Profile: 2310083R	Page No.: 139
Engineer: Yuliu	
Site: AC3	Time: 2023/02/08 - 05:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

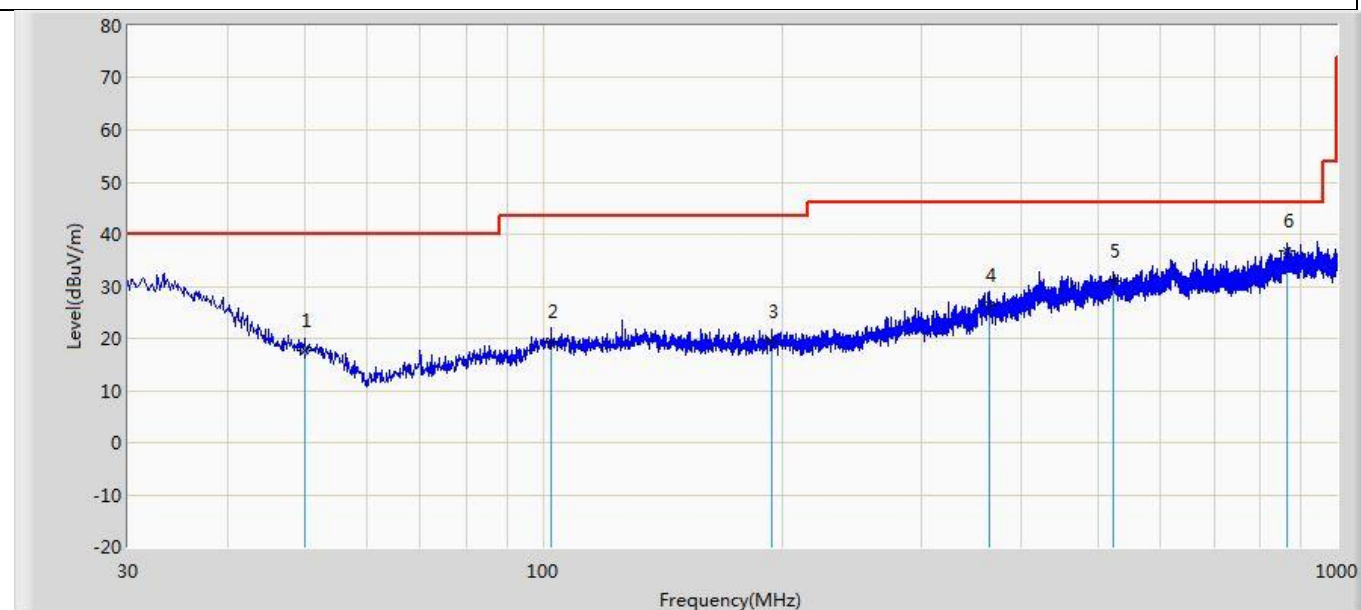


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		50.006	17.686	1.903	-22.314	40.000	15.783	QP
2		102.386	19.392	2.396	-24.108	43.500	16.996	QP
3		194.536	19.565	2.099	-23.935	43.500	17.466	QP
4		364.286	26.262	1.899	-19.738	46.000	24.363	QP
5		521.669	30.876	2.235	-15.124	46.000	28.641	QP
6	*	863.594	36.728	3.949	-9.272	46.000	32.779	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Profile: 2310083R	Page No.: 140
Engineer: Yuliu	
Site: AC3	Time: 2023/02/08 - 05:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

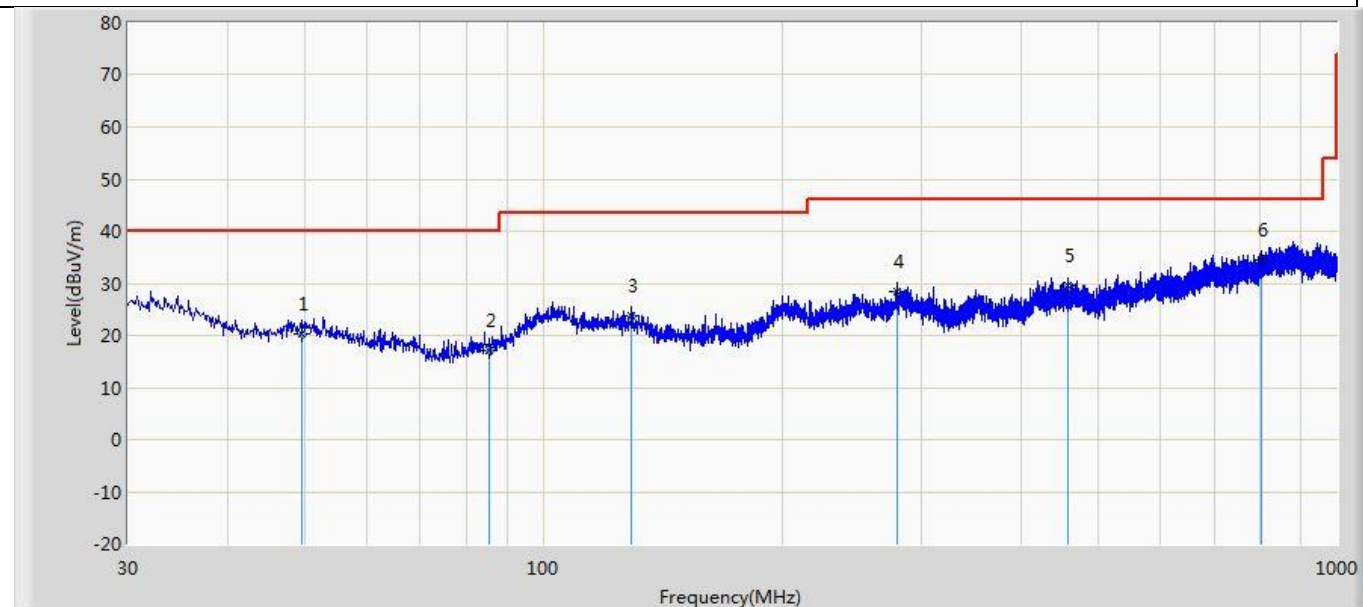


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		49.764	20.200	0.770	-19.800	40.000	19.430	QP
2		85.411	16.998	0.561	-23.002	40.000	16.437	QP
3		129.304	23.676	3.318	-19.824	43.500	20.358	QP
4		279.047	28.419	3.627	-17.581	46.000	24.792	QP
5		457.527	29.546	3.350	-16.454	46.000	26.196	QP
6	*	802.969	34.628	2.989	-11.372	46.000	31.640	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Appendix I: AC Power Line Conducted Emission

Profile: 2310083R	Page No.: 131
Engineer: Yuliu	
Site: TR1	Time: 2023/02/08 - 06:16
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

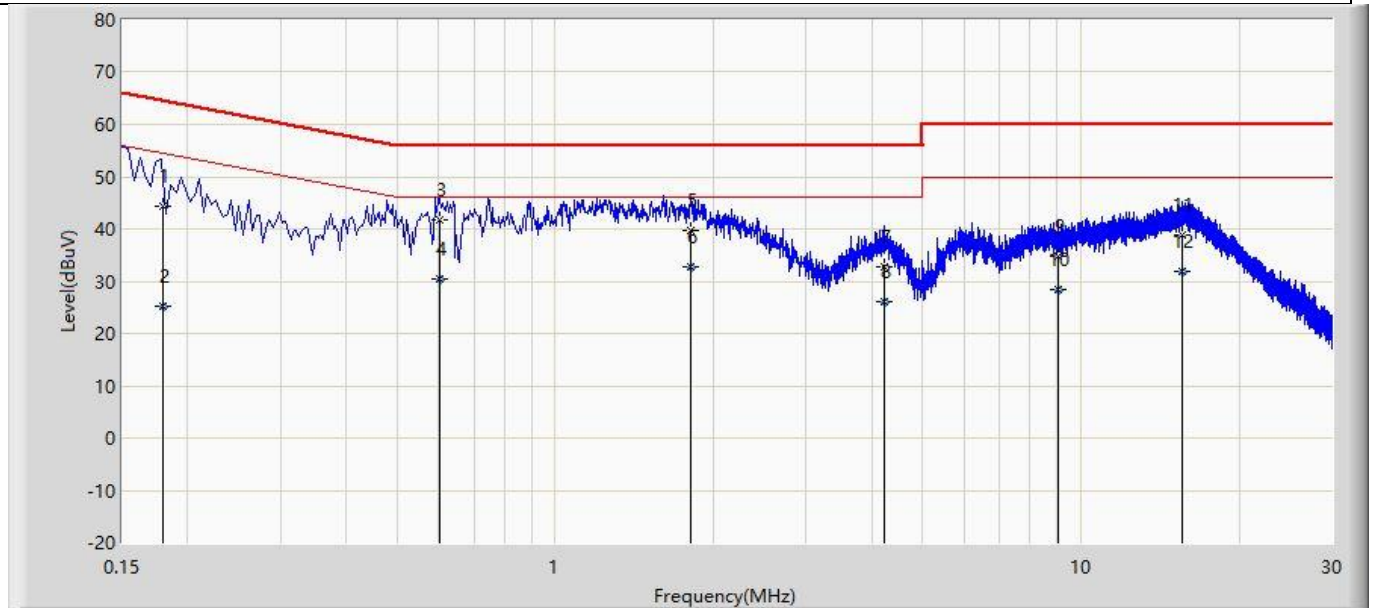


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.179	44.215	34.639	-20.339	64.554	9.576	QP
2		0.179	25.188	15.612	-29.366	54.554	9.576	AV
3		0.602	41.673	32.043	-14.327	56.000	9.630	QP
4		0.602	30.518	20.889	-15.482	46.000	9.630	AV
5		1.806	39.823	30.146	-16.177	56.000	9.677	QP
6	*	1.806	32.622	22.945	-13.378	46.000	9.677	AV
7		4.214	32.709	22.945	-23.291	56.000	9.763	QP
8		4.214	26.172	16.409	-19.828	46.000	9.763	AV
9		9.022	34.821	24.846	-25.179	60.000	9.975	QP
10		9.022	28.391	18.416	-21.609	50.000	9.975	AV
11		15.554	38.945	28.782	-21.055	60.000	10.163	QP
12		15.554	31.755	21.593	-18.245	50.000	10.163	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Profile: 2310083R	Page No.: 132
Engineer: Yuliu	
Site: TR1	Time: 2023/02/08 - 06:20
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps	

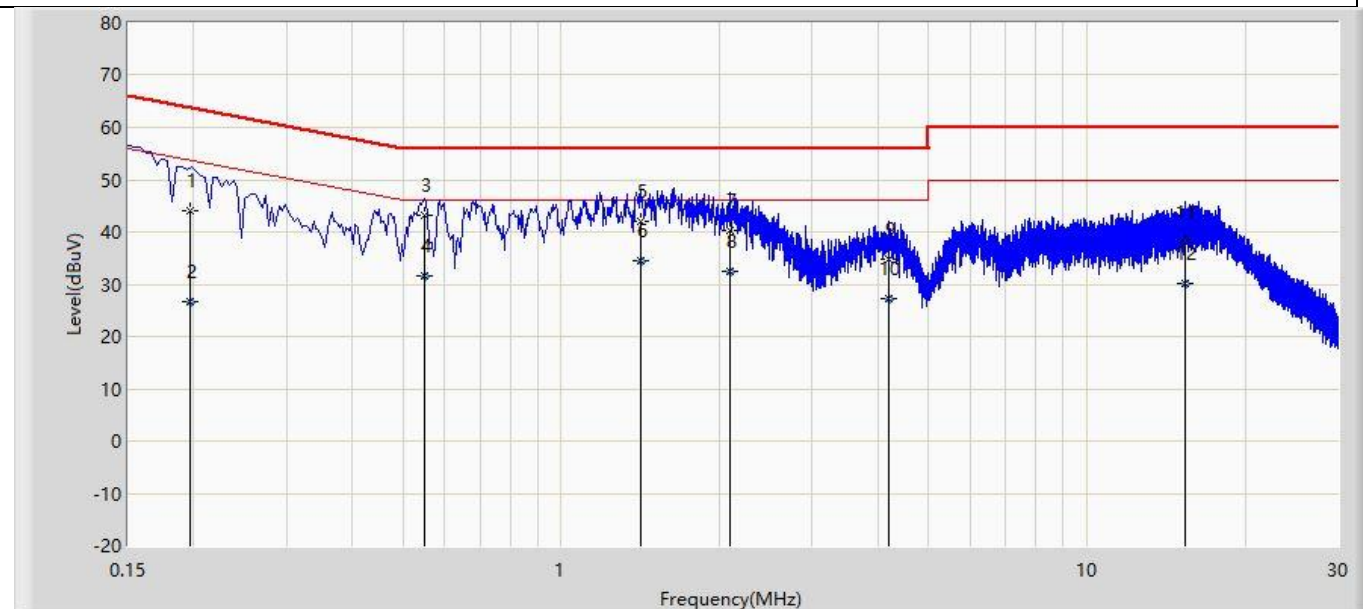

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.197	44.030	34.444	-19.697	63.727	9.587	QP
2		0.197	26.630	17.043	-27.098	53.727	9.587	AV
3		0.550	43.057	33.428	-12.943	56.000	9.628	QP
4		0.550	31.646	22.017	-14.354	46.000	9.628	AV
5		1.414	41.955	32.297	-14.045	56.000	9.658	QP
6	*	1.414	34.585	24.927	-11.415	46.000	9.658	AV
7		2.090	40.290	30.611	-15.710	56.000	9.679	QP
8		2.090	32.554	22.875	-13.446	46.000	9.679	AV
9		4.198	34.674	24.900	-21.326	56.000	9.774	QP
10		4.198	27.113	17.340	-18.887	46.000	9.774	AV
11		15.338	37.887	27.751	-22.113	60.000	10.136	QP
12		15.338	30.220	20.083	-19.780	50.000	10.136	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

The End
