


Profile: 2310083R	Page No.: 74
Engineer: Yuliu	
Site: AC5	Time: 2023/03/02 - 23:22
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 8 : Transmit at 5795MHz by 802.11ax(40MHz)	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.200	58.413	20.183	-58.770	117.183	38.230	PK
2	*	5863.000	56.855	18.555	-51.703	108.558	38.300	PK
3		5879.335	45.689	7.472	-56.291	101.980	38.216	PK

Profile: 2310083R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2023/03/15 - 01:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

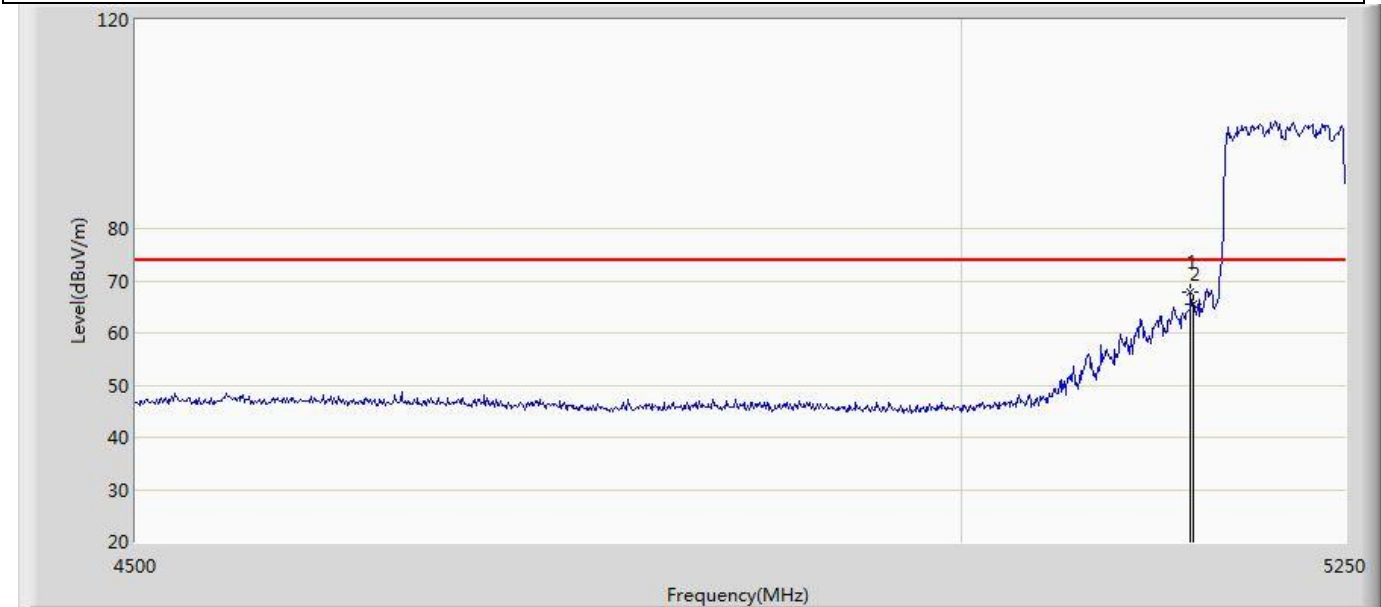


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5148.000	67.683	30.451	-6.317	74.000	37.232	PK
2		5150.000	65.428	28.200	-8.572	74.000	37.228	PK

Profile: 2310083R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2023/03/15 - 01:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

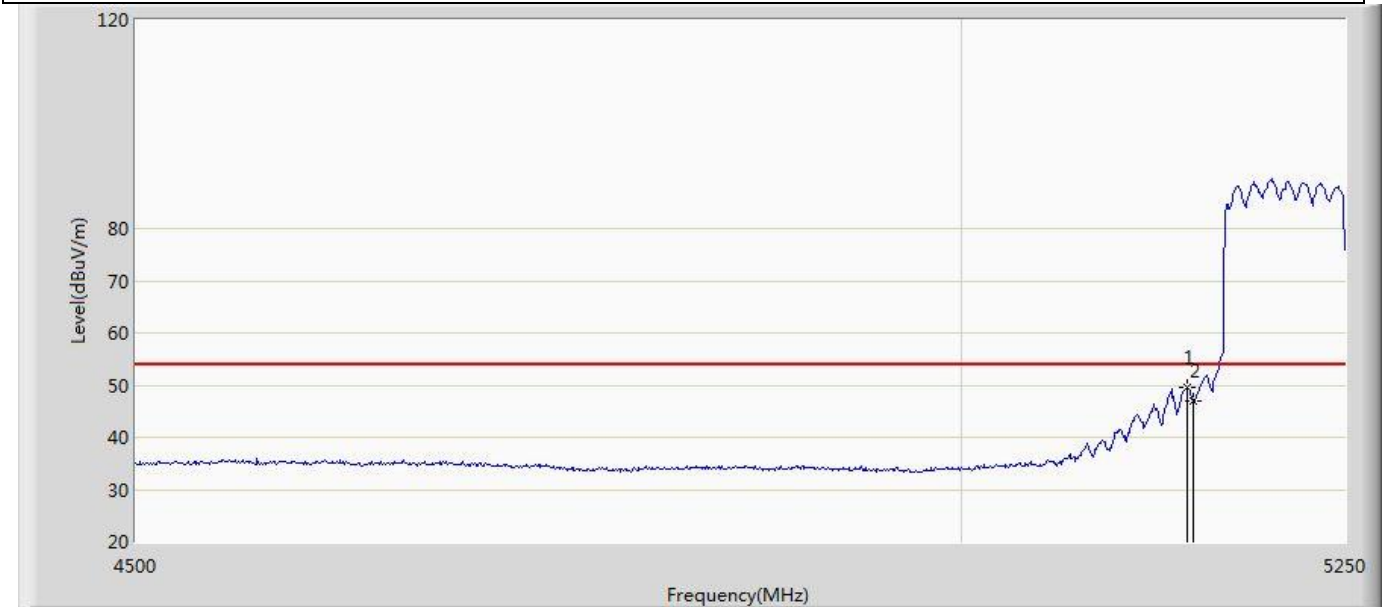


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5145.750	49.705	12.481	-4.295	54.000	37.224	AV
2		5150.000	46.856	9.628	-7.144	54.000	37.228	AV

Profile: 2310083R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2023/03/15 - 01:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

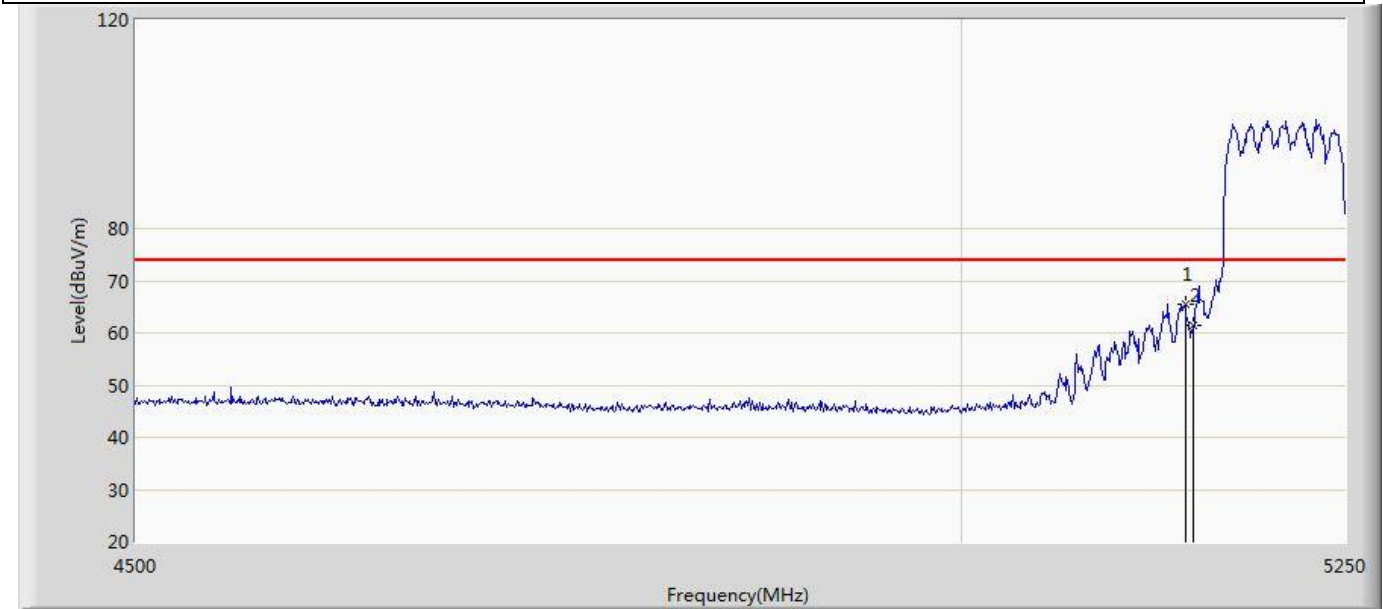


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5144.250	65.597	28.379	-8.403	74.000	37.218	PK
2		5150.000	61.314	24.086	-12.686	74.000	37.228	PK

Profile: 2310083R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2023/03/15 - 01:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5210MHz by 802.11ax(80MHz)	

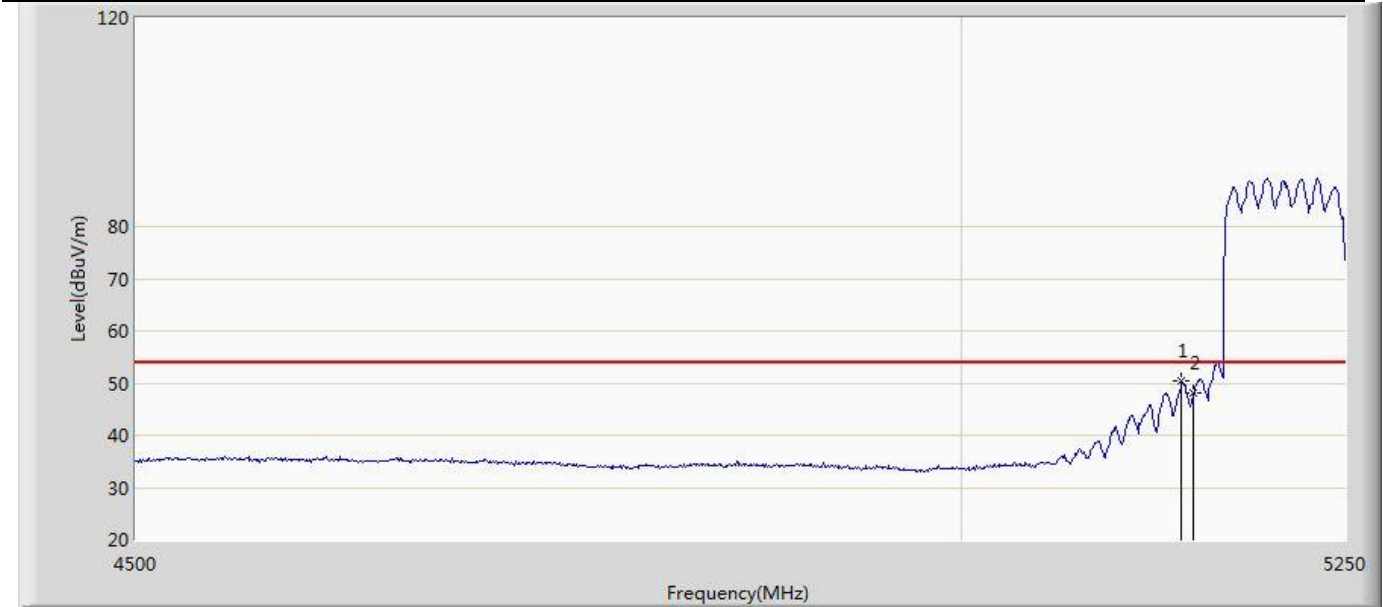


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5142.000	50.328	13.118	-3.672	54.000	37.209	AV
2		5150.000	48.106	10.878	-5.894	54.000	37.228	AV

Profile: 2150775R	Page No.: 137
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

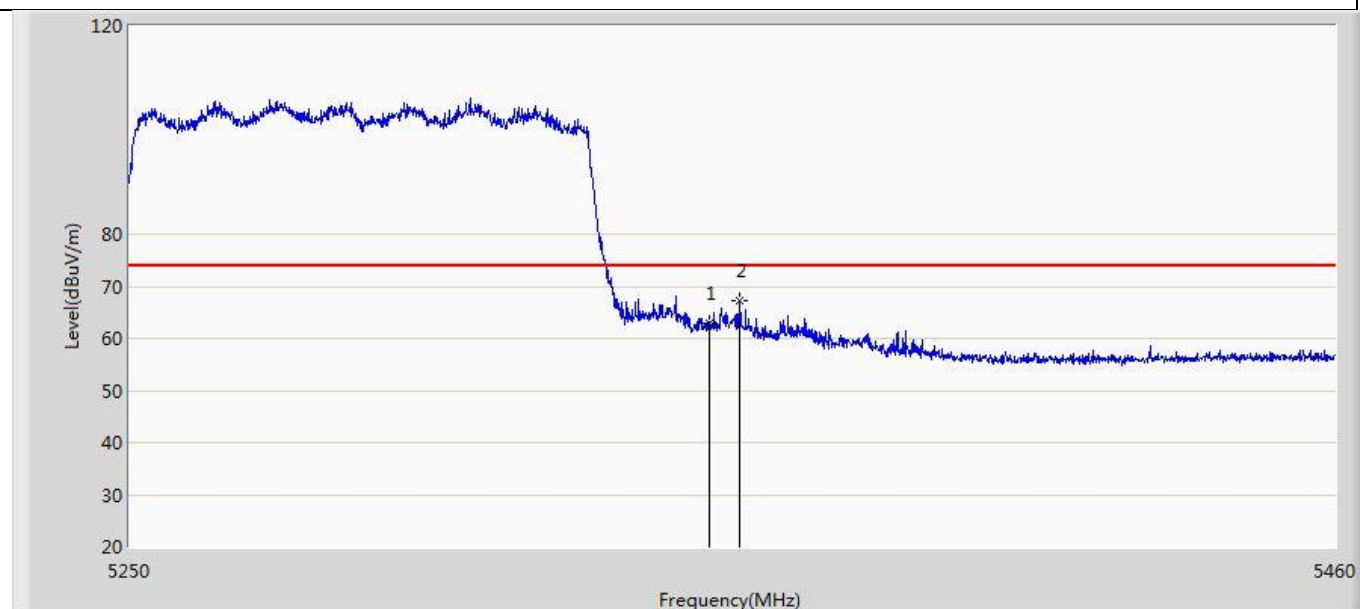


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	63.009	21.614	-10.991	74.000	41.395	PK
2	*	5355.315	67.325	25.927	-6.675	74.000	41.398	PK

Profile: 2150775R	Page No.: 138
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

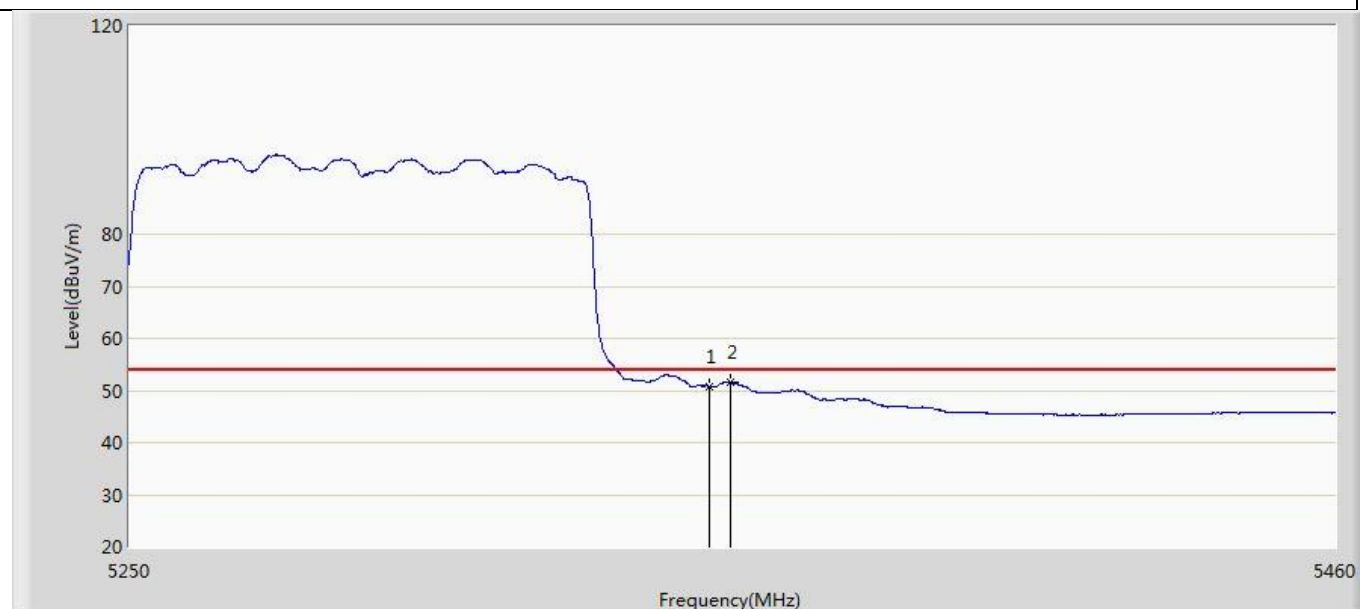


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	50.808	9.413	-3.192	54.000	41.395	AV
2	*	5353.740	51.696	10.294	-2.304	54.000	41.402	AV

Profile: 2150775R	Page No.: 139
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

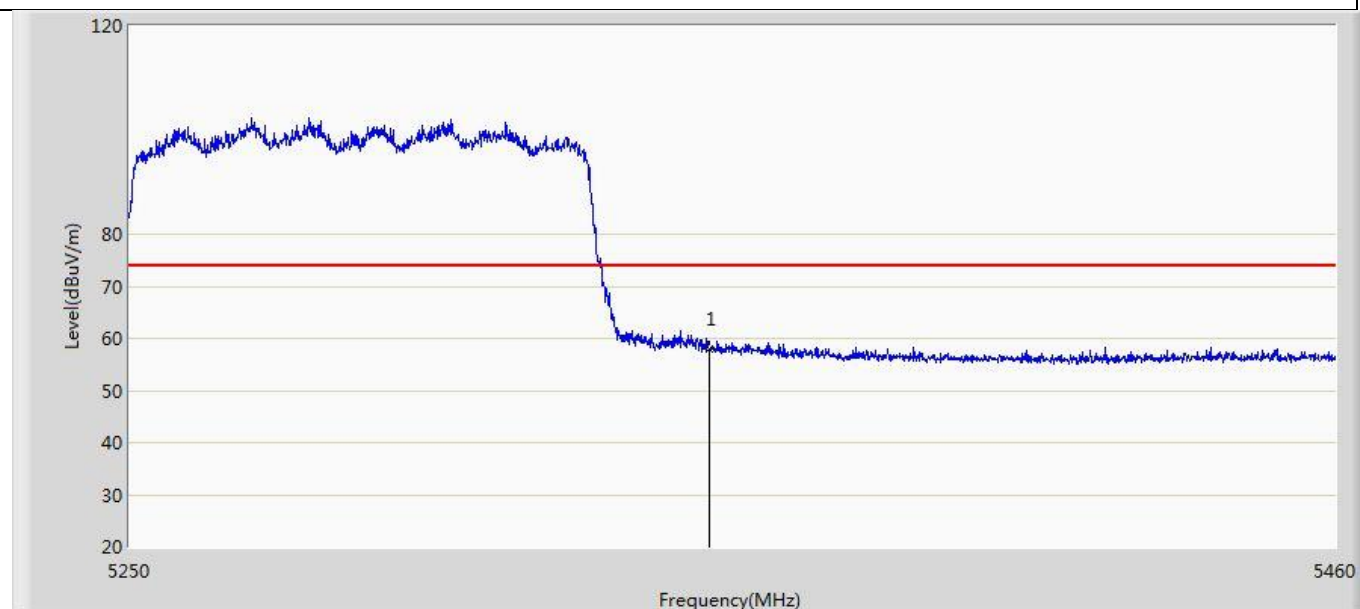


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	57.923	16.528	-16.077	74.000	41.395	PK

Profile: 2150775R	Page No.: 140
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

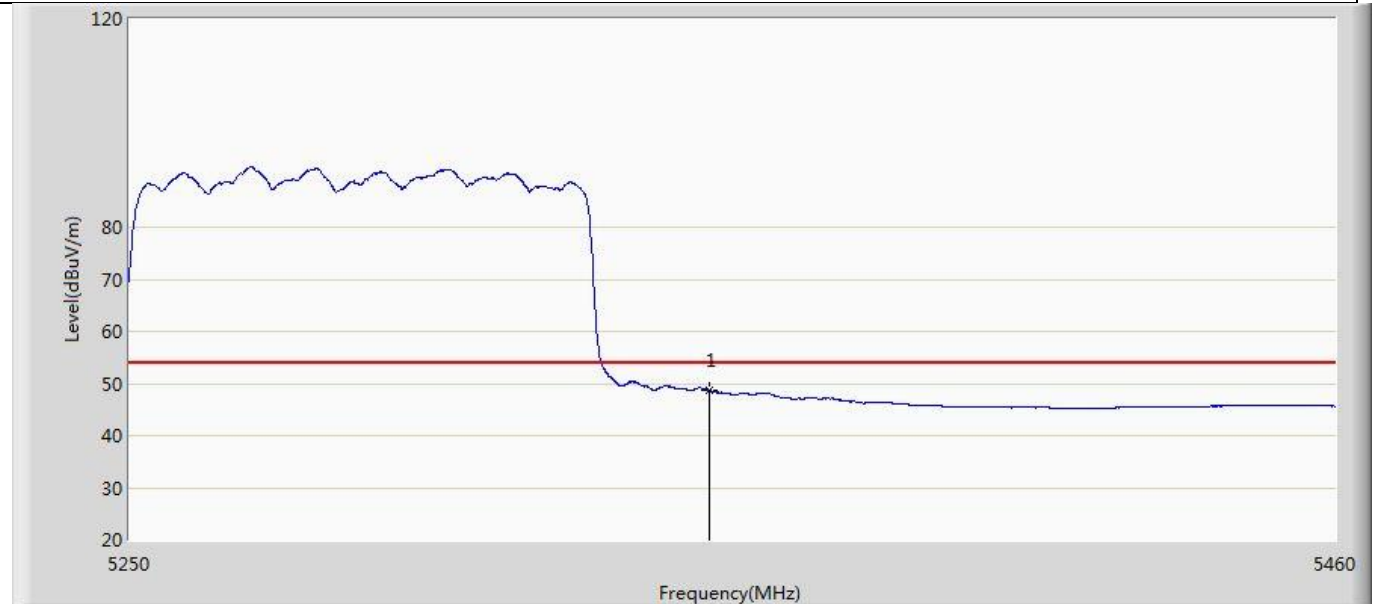


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.663	7.268	-5.337	54.000	41.395	AV

Profile: 2150775R	Page No.: 141
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

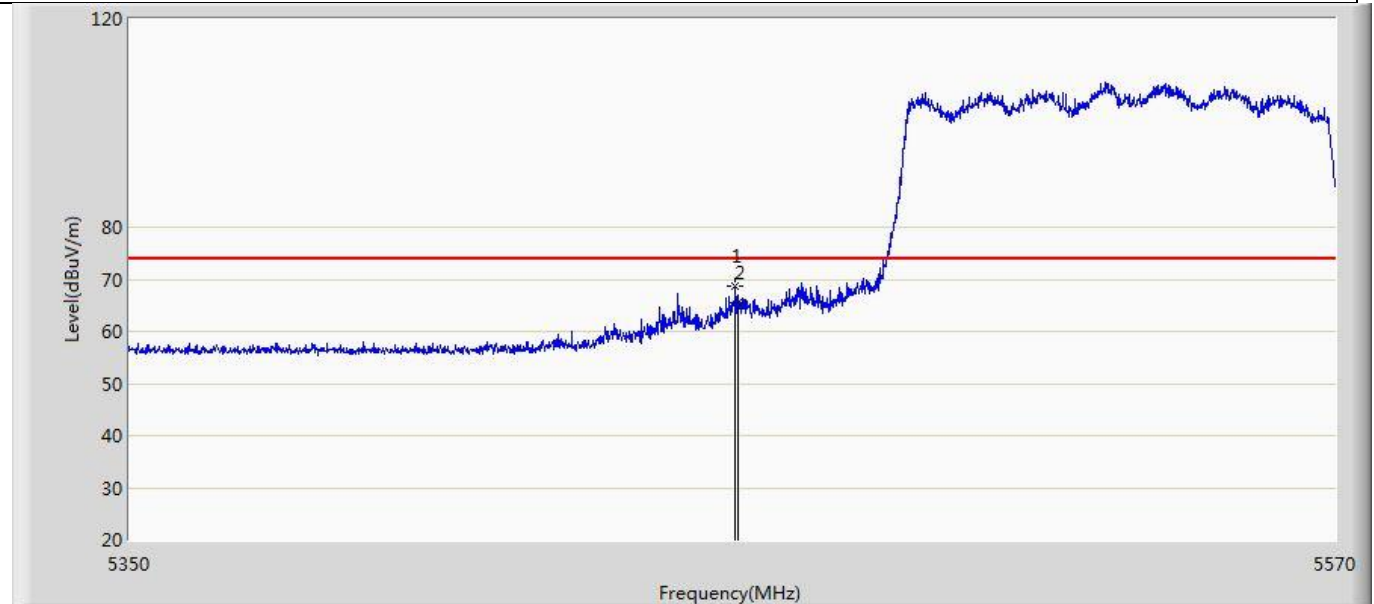


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5459.560	68.646	27.010	-5.354	74.000	41.636	PK
2		5460.000	65.379	23.747	-8.621	74.000	41.632	PK

Profile: 2150775R	Page No.: 142
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

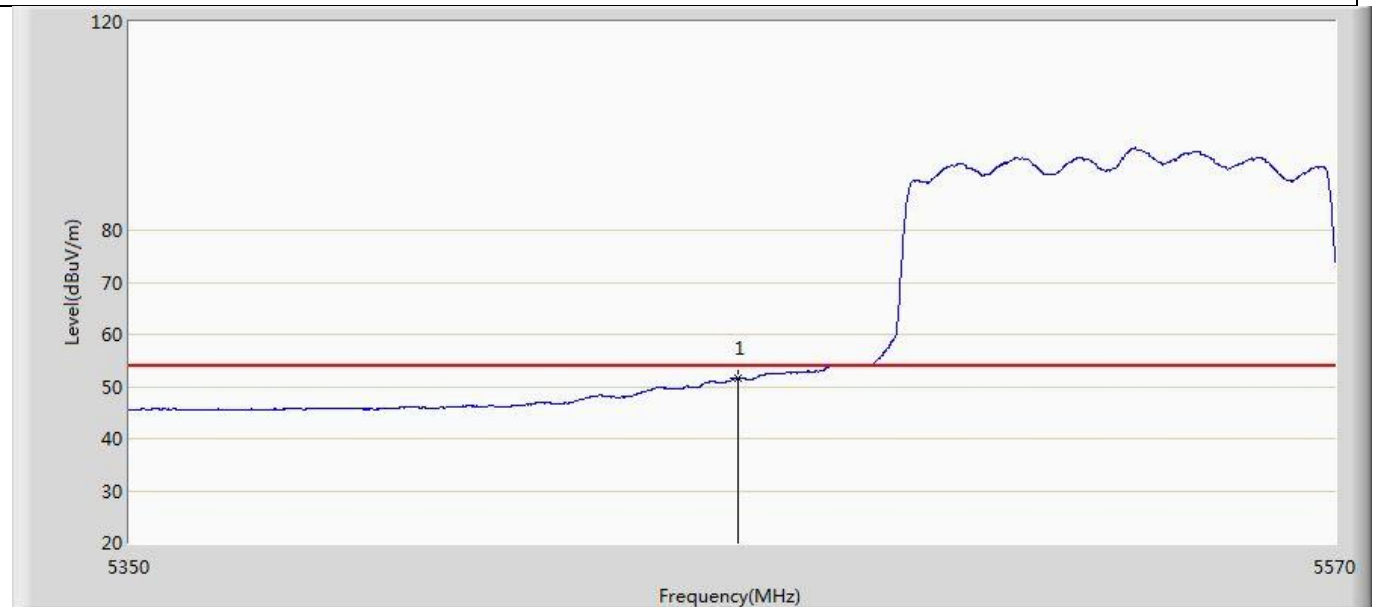


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.578	9.946	-2.422	54.000	41.632	AV

Profile: 2150775R	Page No.: 143
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

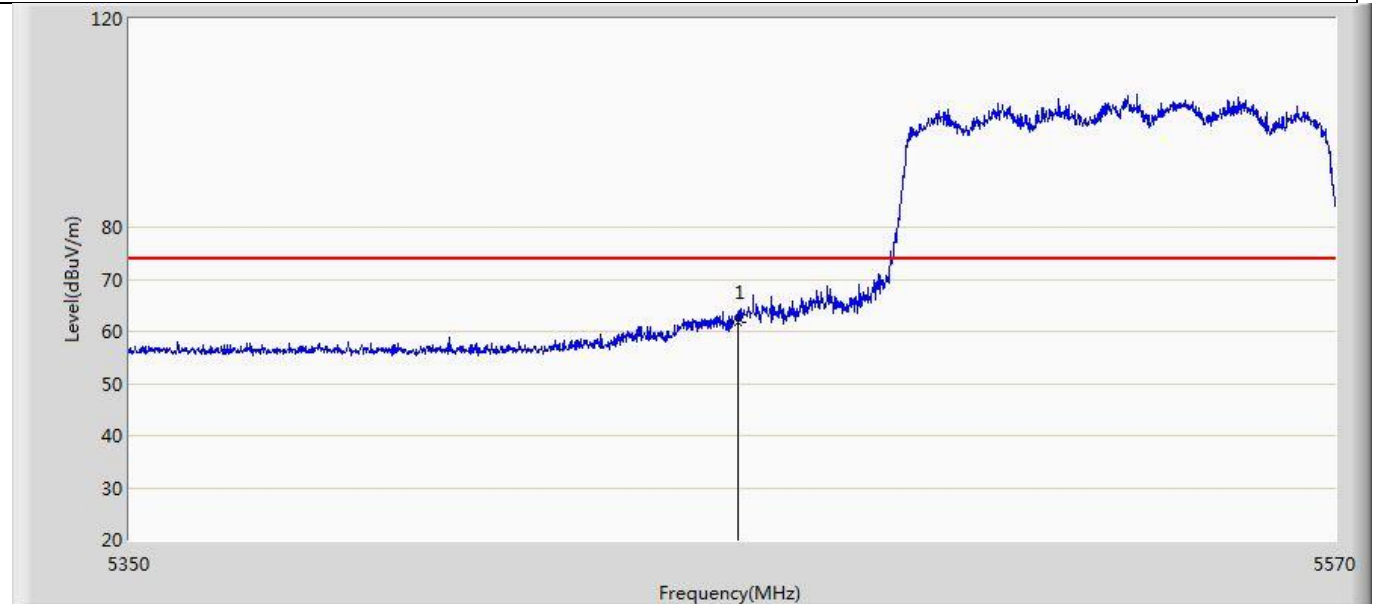


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	61.841	20.209	-12.159	74.000	41.632	PK

Profile: 2150775R	Page No.: 144
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

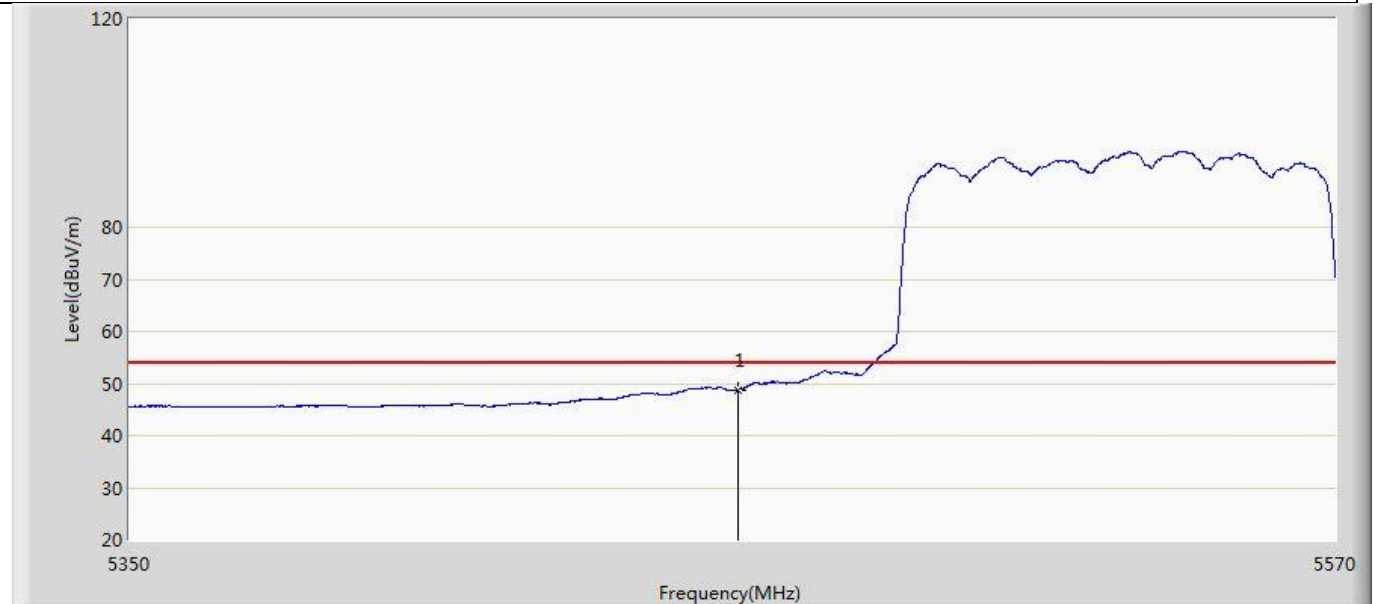

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	48.803	7.171	-5.197	54.000	41.632	AV


Profile: 2310083R	Page No.: 75
Engineer: Yuliu	
Site: AC5	Time: 2023/03/02 - 23:23
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5775MHz by 802.11ax(80MHz)	

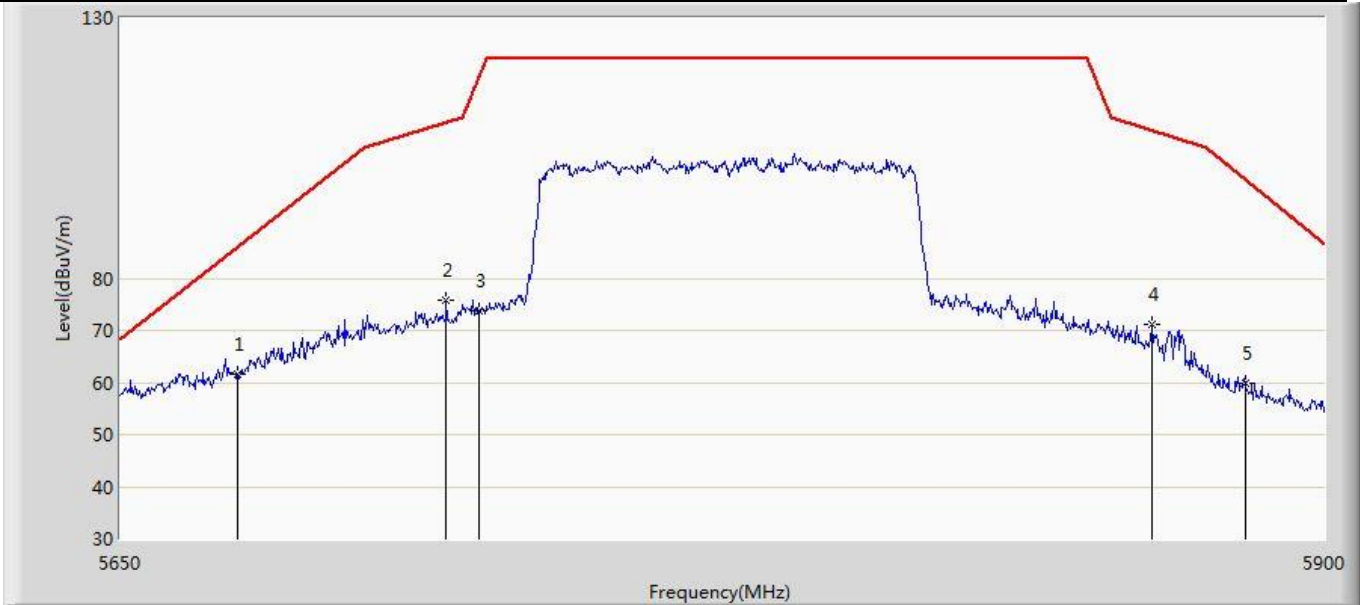

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5674.000	61.522	23.580	-24.479	86.001	37.942	PK
2		5716.750	75.866	37.793	-34.025	109.891	38.073	PK
3		5723.500	73.832	35.652	-44.949	118.781	38.179	PK
4		5863.750	71.131	32.835	-37.217	108.348	38.296	PK
5		5883.250	59.926	21.711	-39.148	99.073	38.215	PK



Profile: 2310083R	Page No.: 76
Engineer: Yuliu	
Site: AC5	Time: 2023/03/02 - 23:25
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By battery
Note: Mode 9 : Transmit at 5775MHz by 802.11ax(80MHz)	

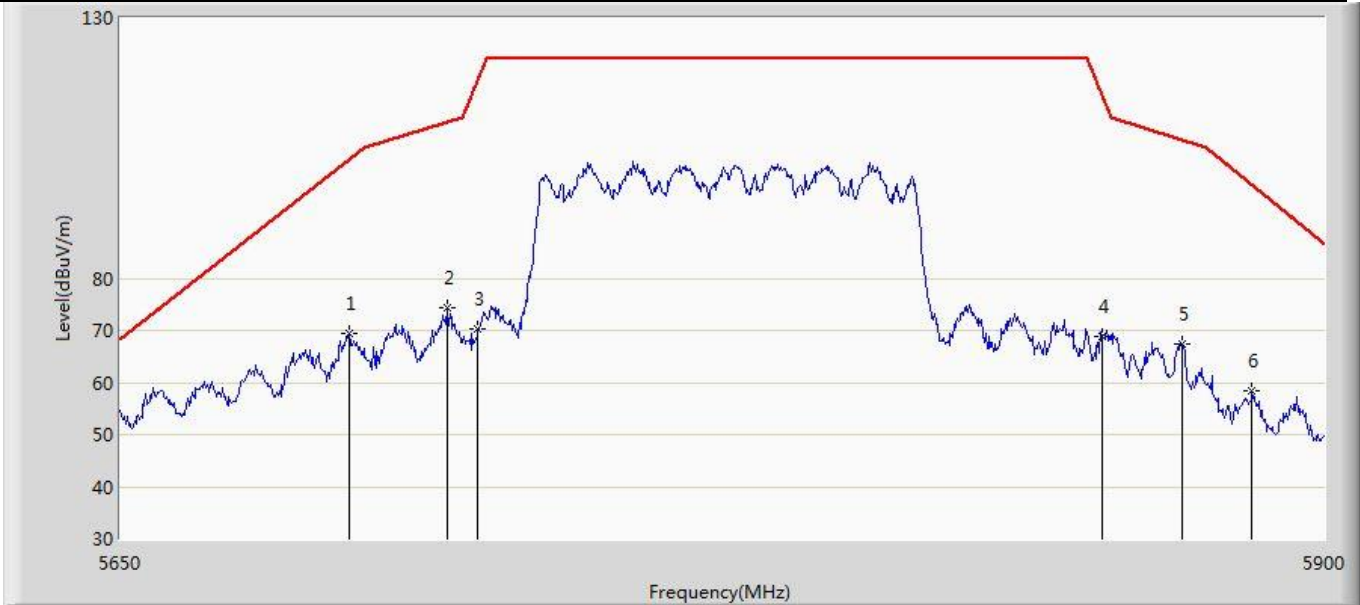

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5696.750	69.442	31.361	-33.363	102.805	38.080	PK
2		5717.000	74.217	36.140	-35.744	109.961	38.077	PK
3		5723.250	70.194	32.018	-48.017	118.211	38.176	PK
4		5853.000	68.742	30.506	-46.617	115.359	38.236	PK
5		5870.000	67.474	29.210	-39.125	106.598	38.264	PK
6		5884.750	58.479	20.265	-39.482	97.960	38.214	PK

Appendix I: Frequency Stability

Frequency Stability under Temperature at 0min				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	87	±20	Pass
10	5500.000	122	±20	Pass
20	5500.000	-41	±20	Pass
35	5500.000	143	±20	Pass

Frequency Stability under Temperature at 2min				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	102	±20	Pass
10	5500.000	144	±20	Pass
20	5500.000	107	±20	Pass
35	5500.000	128	±20	Pass

Frequency Stability under Temperature at 5min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	103	±20	Pass
10	5500.000	137	±20	Pass
20	5500.000	111	±20	Pass
35	5500.000	124	±20	Pass

Frequency Stability under Temperature at 10min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	111	±20	Pass
10	5500.000	141	±20	Pass
20	5500.000	123	±20	Pass
35	5500.000	134	±20	Pass

_____ The End _____