



Profile: 2250805R	Page No.: 290
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:34
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5260MHz by 11ax20	

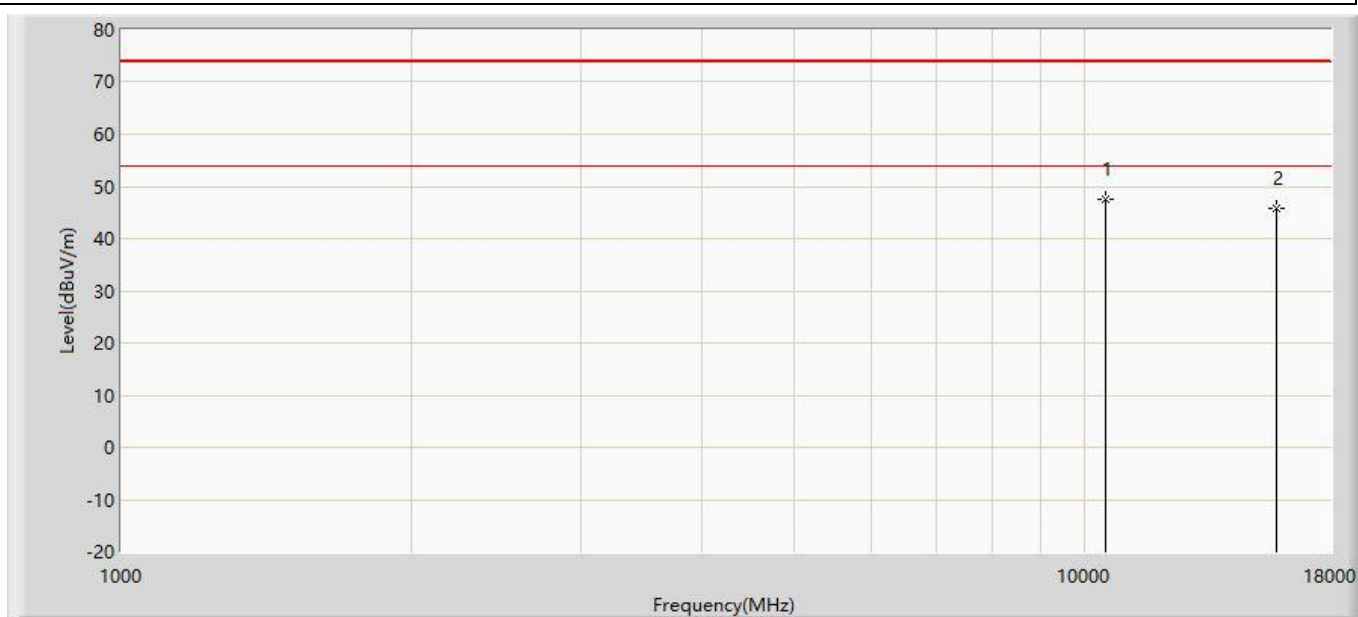


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10520.000	47.462	49.882	-26.538	74.000	-2.420	PK
2		15780.000	45.840	47.807	-28.160	74.000	-1.966	PK

Profile: 2250805R	Page No.: 291
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:34
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5300MHz by 11ax20	

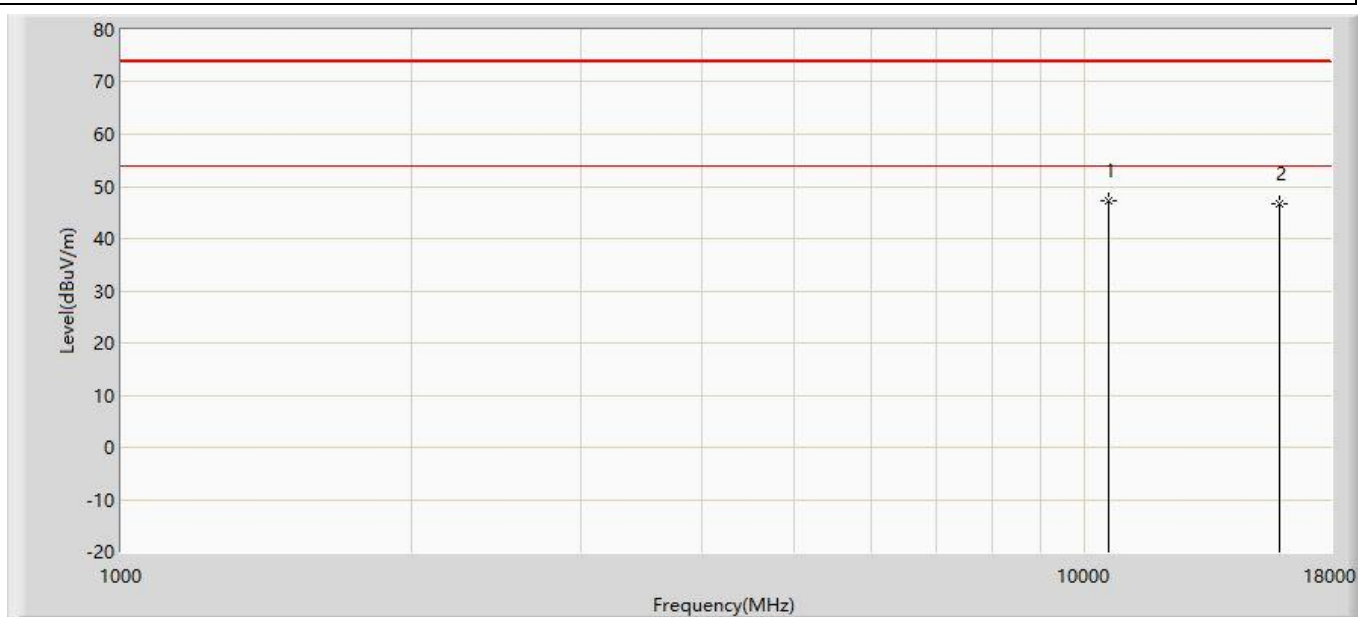


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10600.000	47.279	49.487	-26.721	74.000	-2.208	PK
2		15900.000	46.797	48.954	-27.203	74.000	-2.157	PK

Profile: 2250805R	Page No.: 292
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:34
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5300MHz by 11ax20	

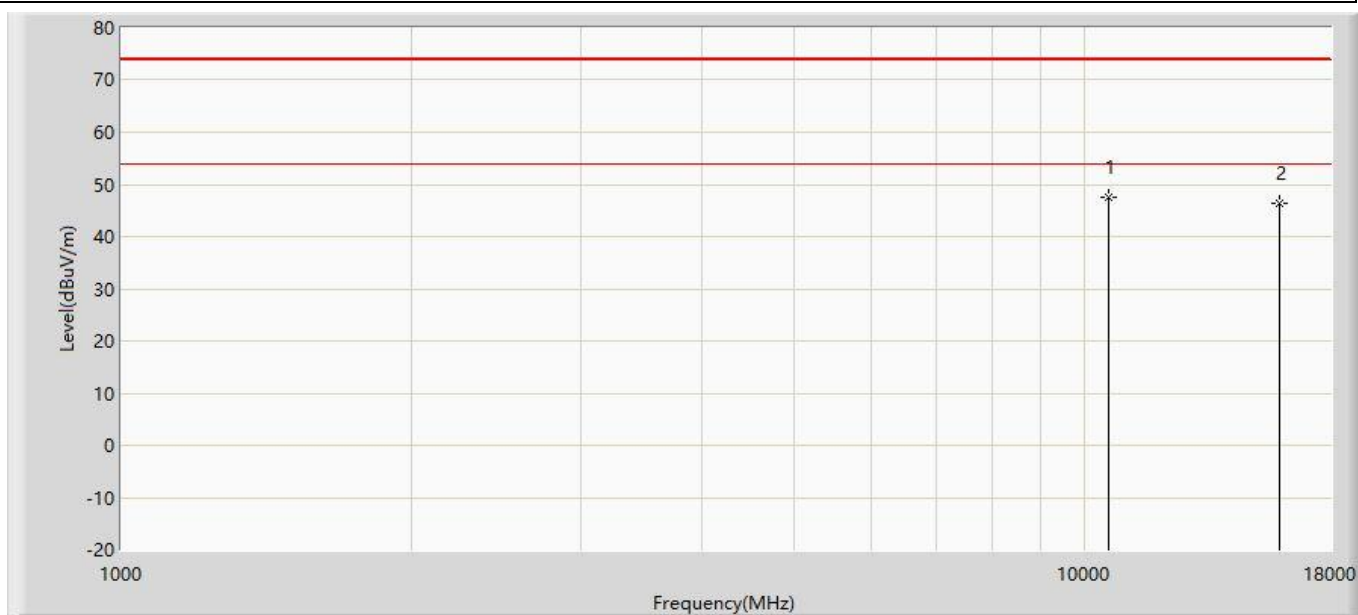


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10600.000	47.635	49.843	-26.365	74.000	-2.208	PK
2		15900.000	46.472	48.629	-27.528	74.000	-2.157	PK

Profile: 2250805R	Page No.: 293
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:34
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ax20	

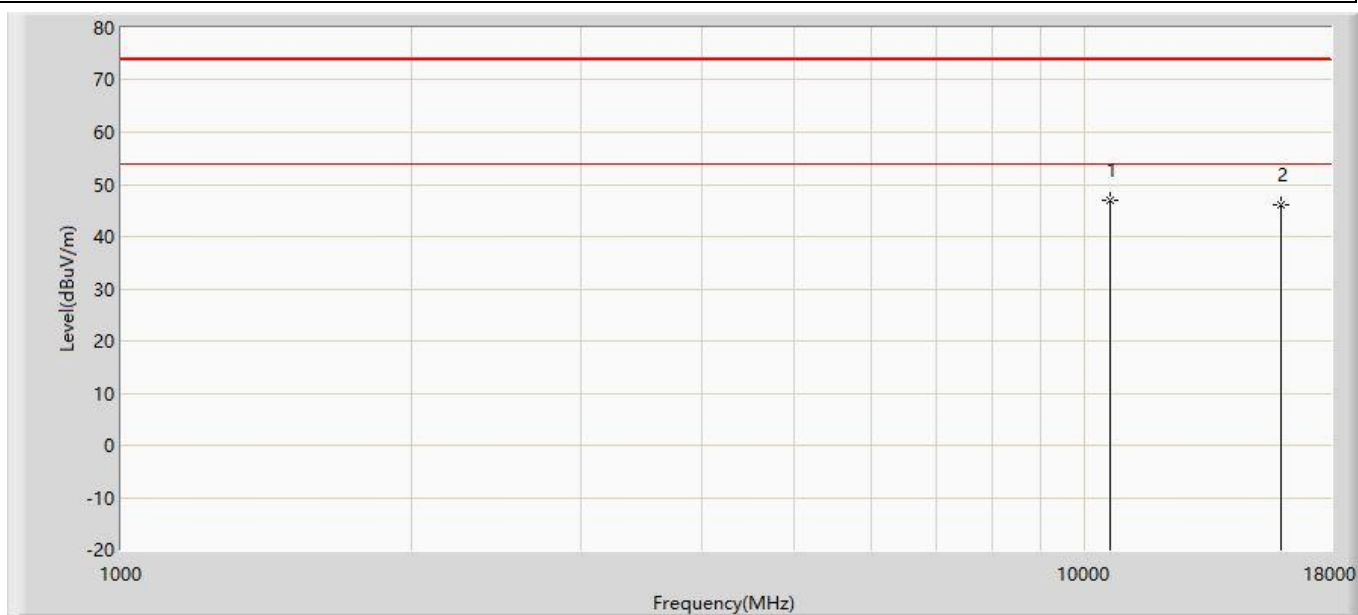


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10640.000	46.967	49.224	-27.033	74.000	-2.258	PK
2		15960.000	46.115	48.001	-27.885	74.000	-1.886	PK

Profile: 2250805R	Page No.: 294
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ax20	

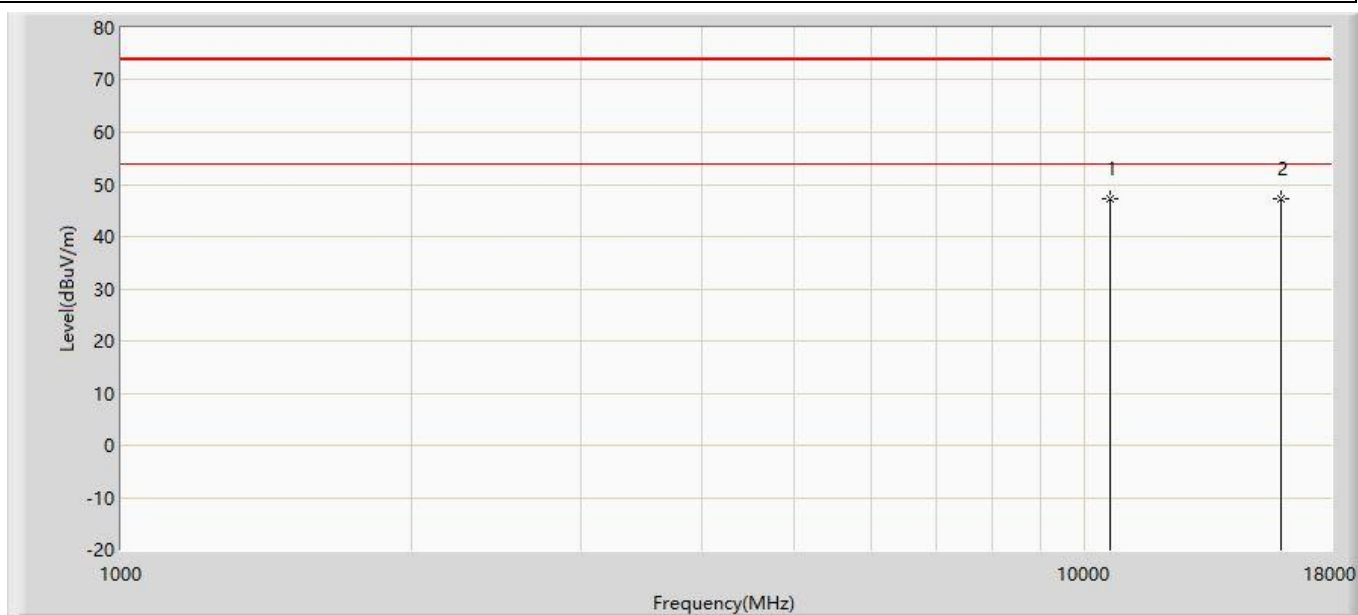


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10640.000	47.202	49.459	-26.798	74.000	-2.258	PK
2		15960.000	47.182	49.068	-26.818	74.000	-1.886	PK

Profile: 2250805R	Page No.: 295
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

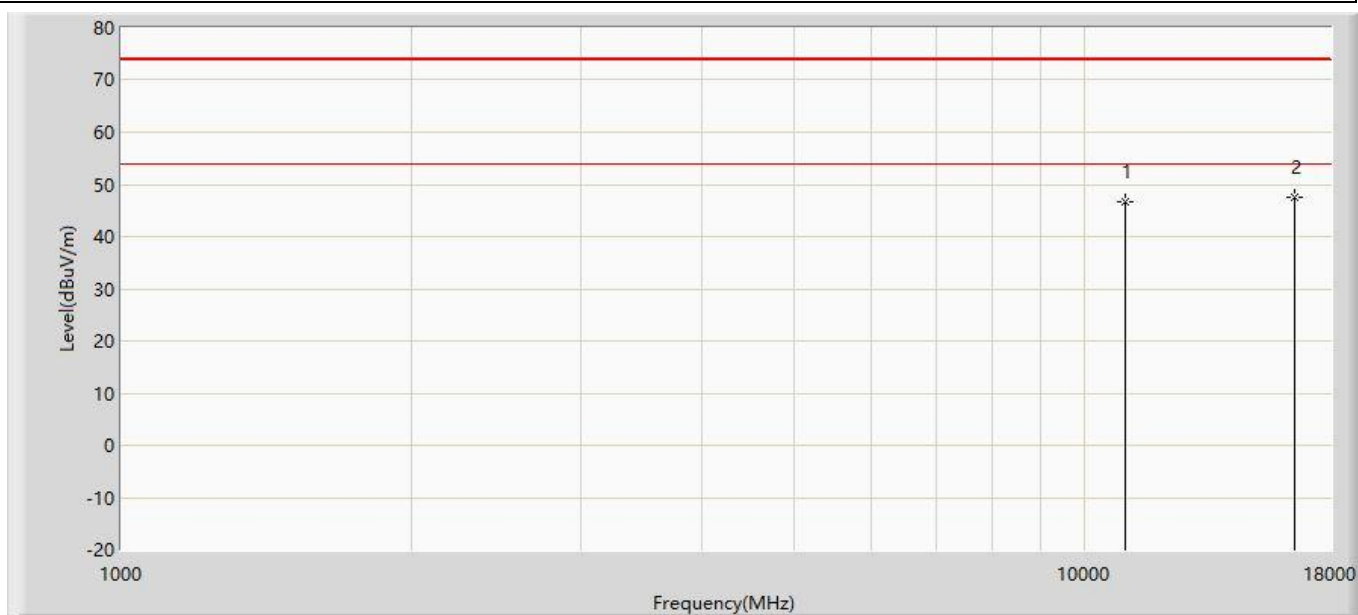


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	46.537	48.444	-27.463	74.000	-1.907	PK
2	*	16500.000	47.423	47.536	-26.577	74.000	-0.114	PK

Profile: 2250805R	Page No.: 296
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

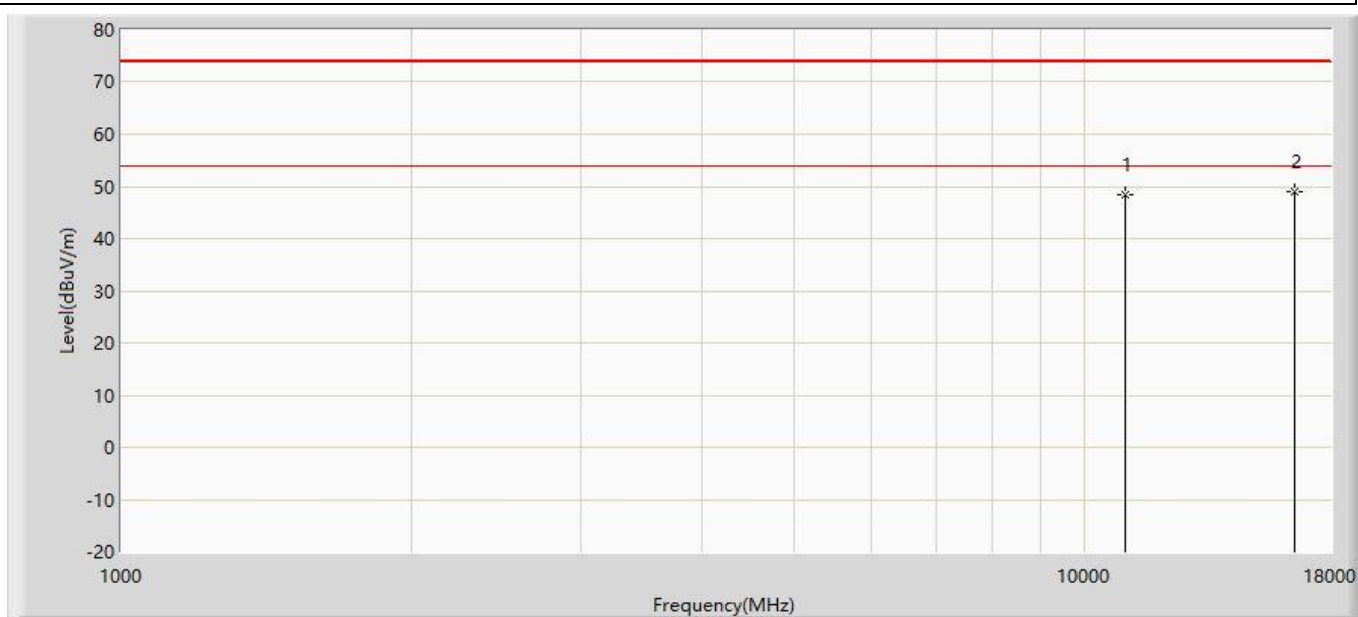


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	48.288	50.195	-25.712	74.000	-1.907	PK
2	*	16500.000	49.087	49.200	-24.913	74.000	-0.114	PK

Profile: 2250805R	Page No.: 297
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5580MHz by 11ax20	

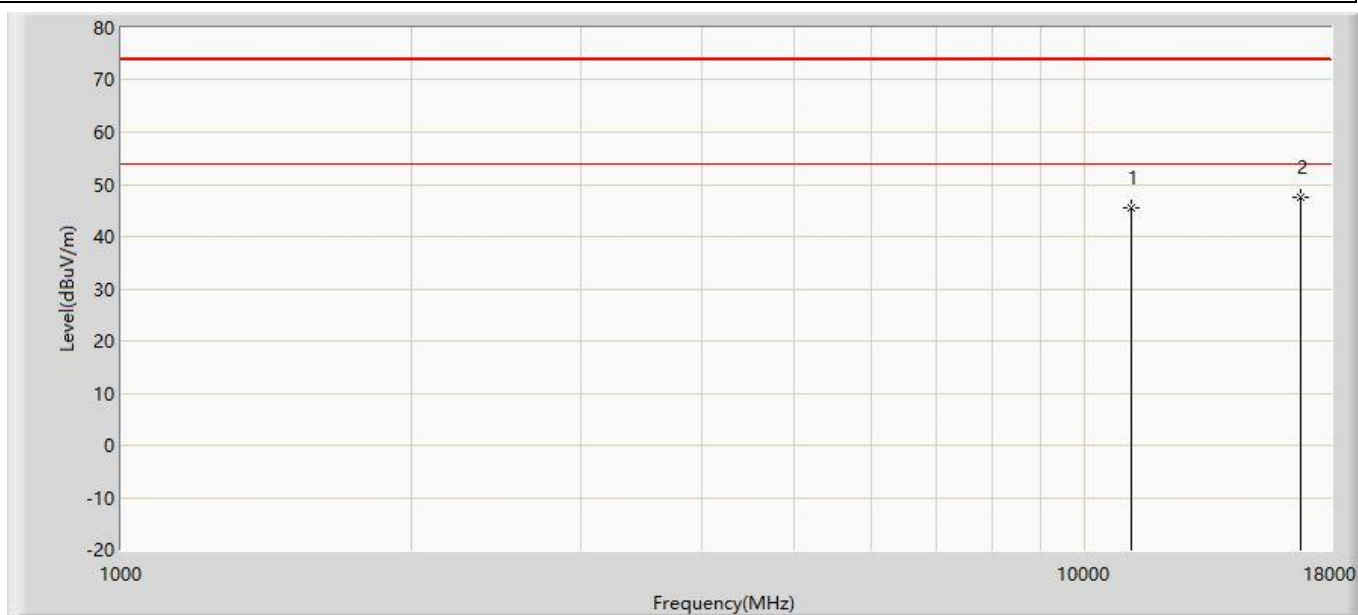


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	45.504	47.650	-28.496	74.000	-2.146	PK
2	*	16740.000	47.521	47.634	-26.479	74.000	-0.112	PK

Profile: 2250805R	Page No.: 298
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5580MHz by 11ax20	

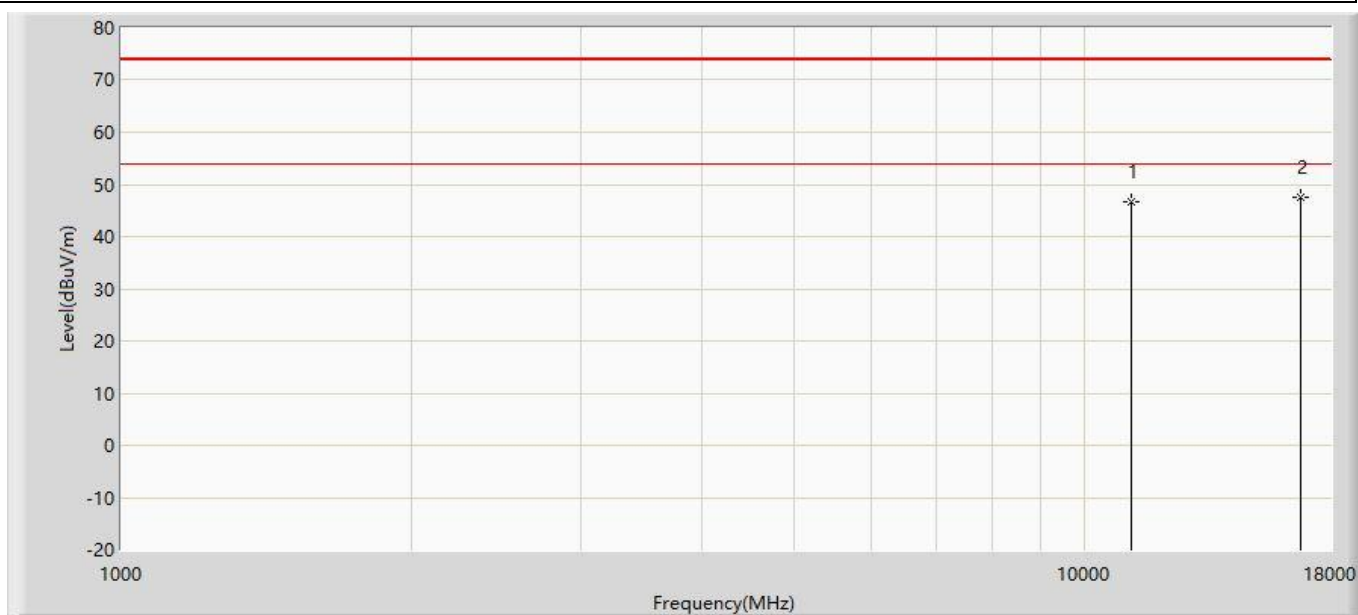


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.774	48.920	-27.226	74.000	-2.146	PK
2	*	16740.000	47.635	47.748	-26.365	74.000	-0.112	PK

Profile: 2250805R	Page No.: 299
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5700MHz by 11ax20	

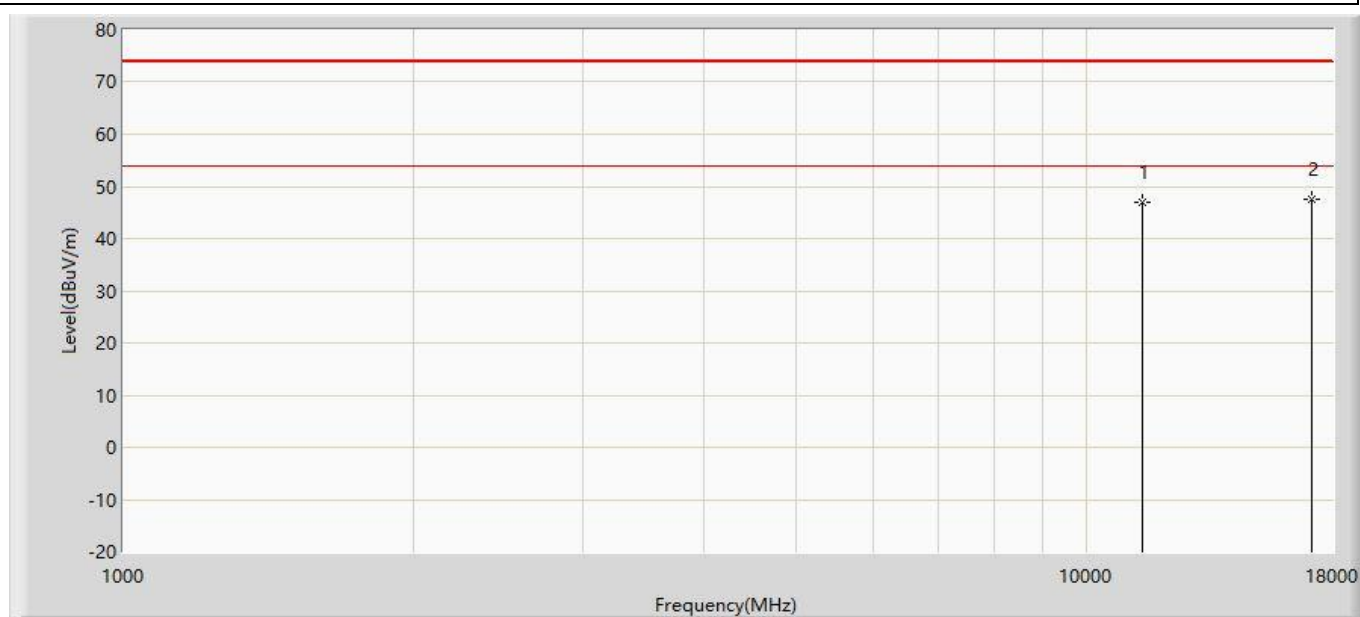


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.983	48.183	-27.017	74.000	-1.201	PK
2	*	17100.000	47.521	46.796	-26.479	74.000	0.726	PK

Profile: 2250805R	Page No.: 300
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5700MHz by 11ax20	

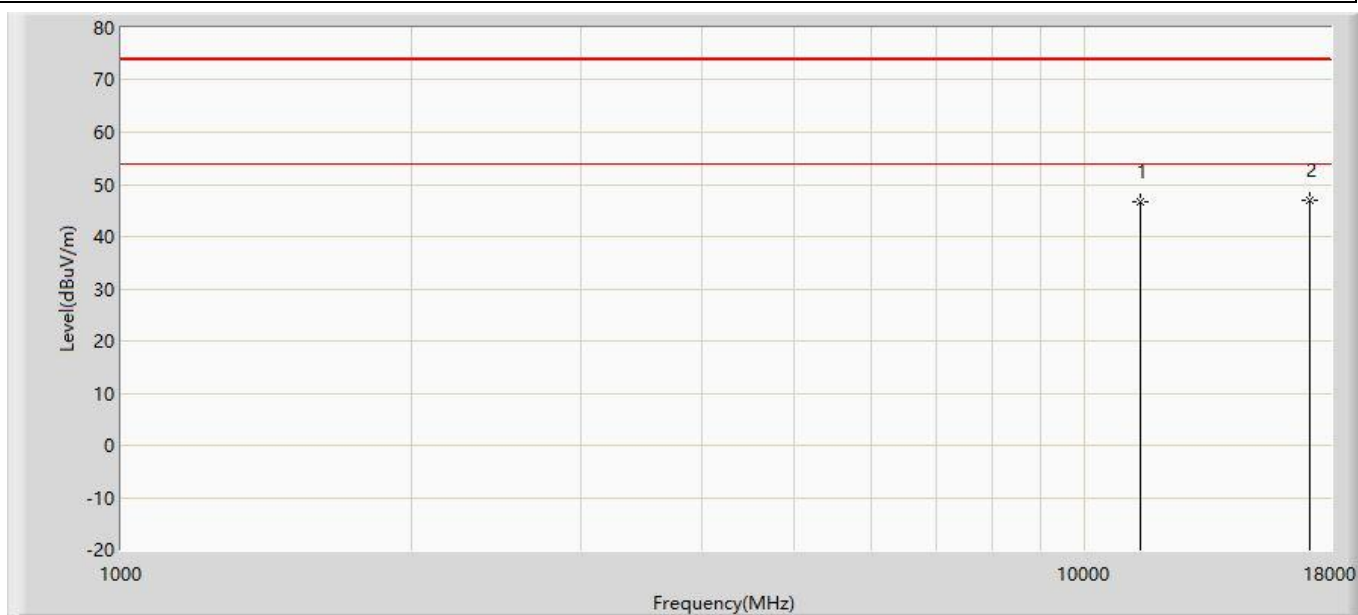


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.699	47.899	-27.301	74.000	-1.201	PK
2	*	17100.000	46.927	46.202	-27.073	74.000	0.726	PK

Profile: 2250805R	Page No.: 301
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5745MHz by 11ax20	

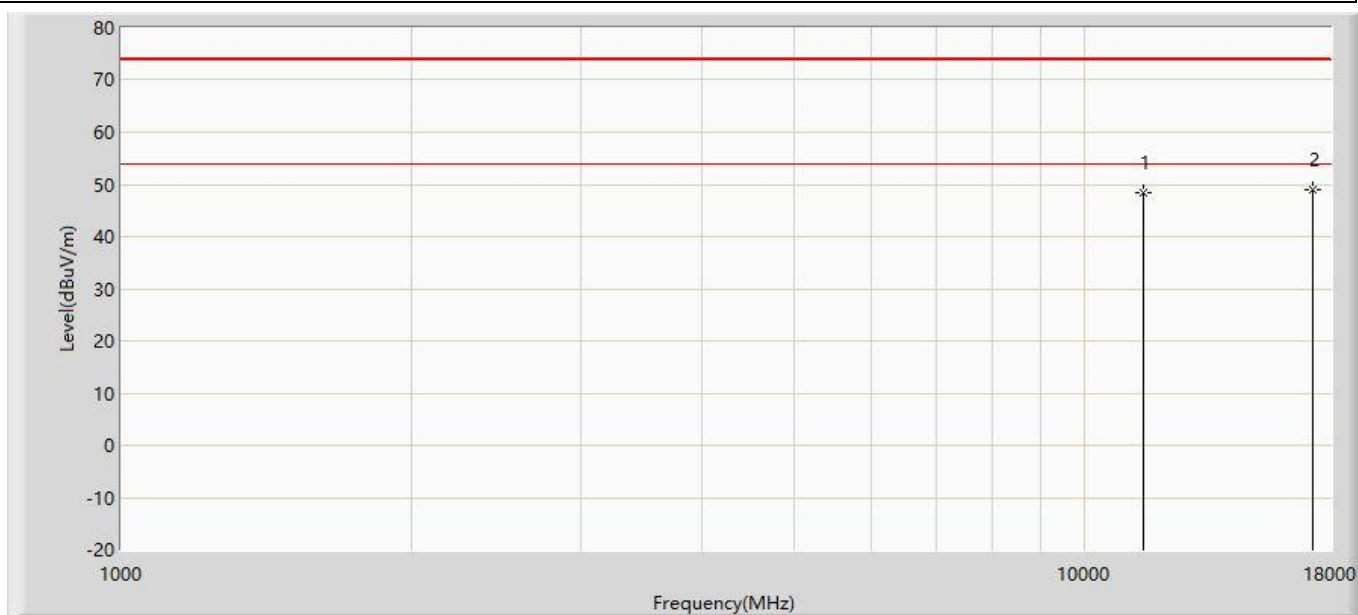


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	48.516	49.447	-25.484	74.000	-0.931	PK
2	*	17235.000	49.112	47.431	-24.888	74.000	1.681	PK

Profile: 2250805R	Page No.: 302
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5745MHz by 11ax20	

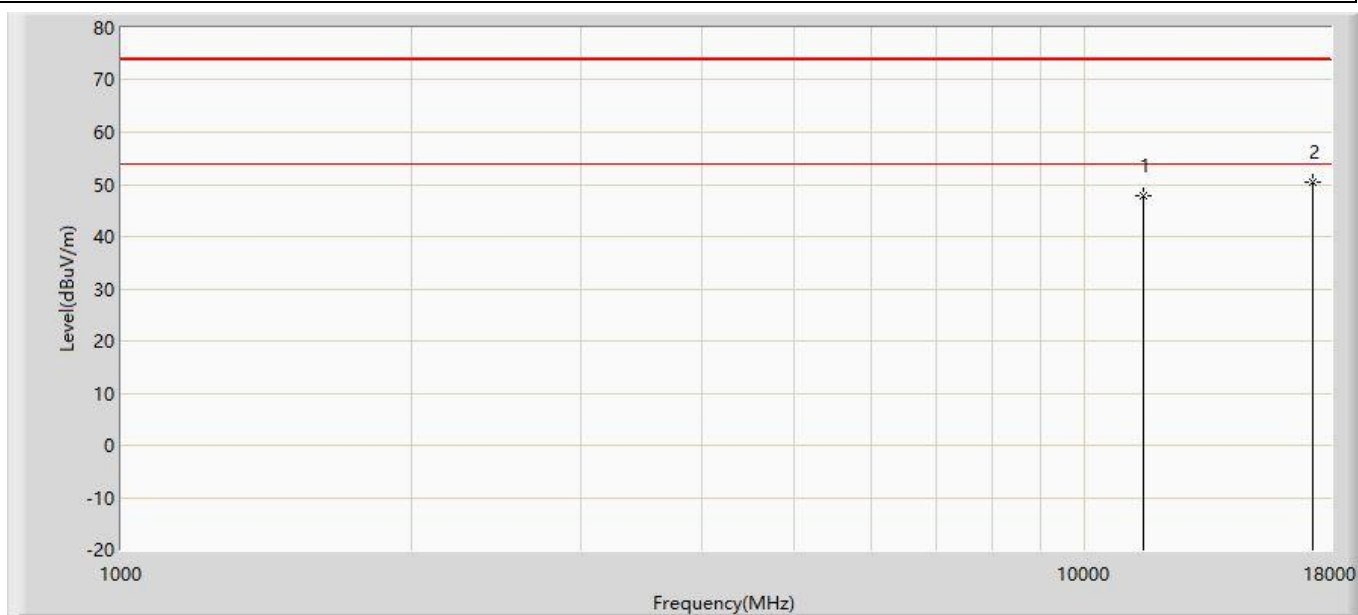


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	47.957	48.888	-26.043	74.000	-0.931	PK
2	*	17235.000	50.529	48.848	-23.471	74.000	1.681	PK

Profile: 2250805R	Page No.: 303
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5785MHz by 11ax20	

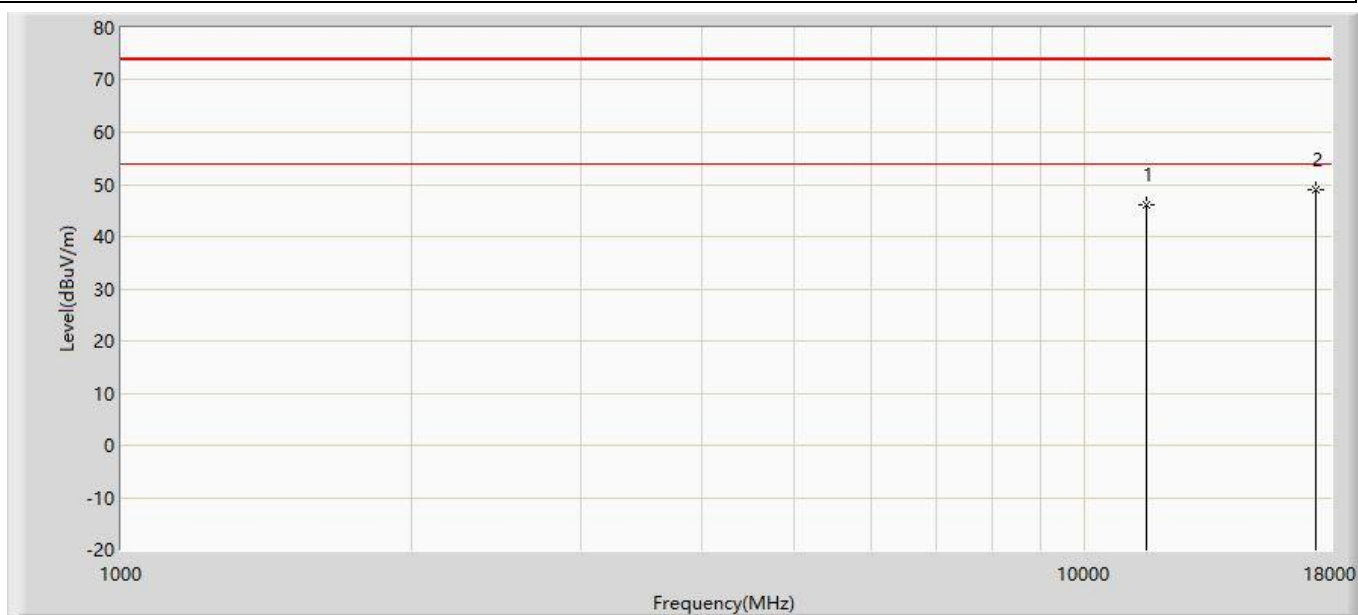


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.220	46.926	-27.780	74.000	-0.706	PK
2	*	17355.000	48.926	46.946	-25.074	74.000	1.980	PK

Profile: 2250805R	Page No.: 304
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5785MHz by 11ax20	

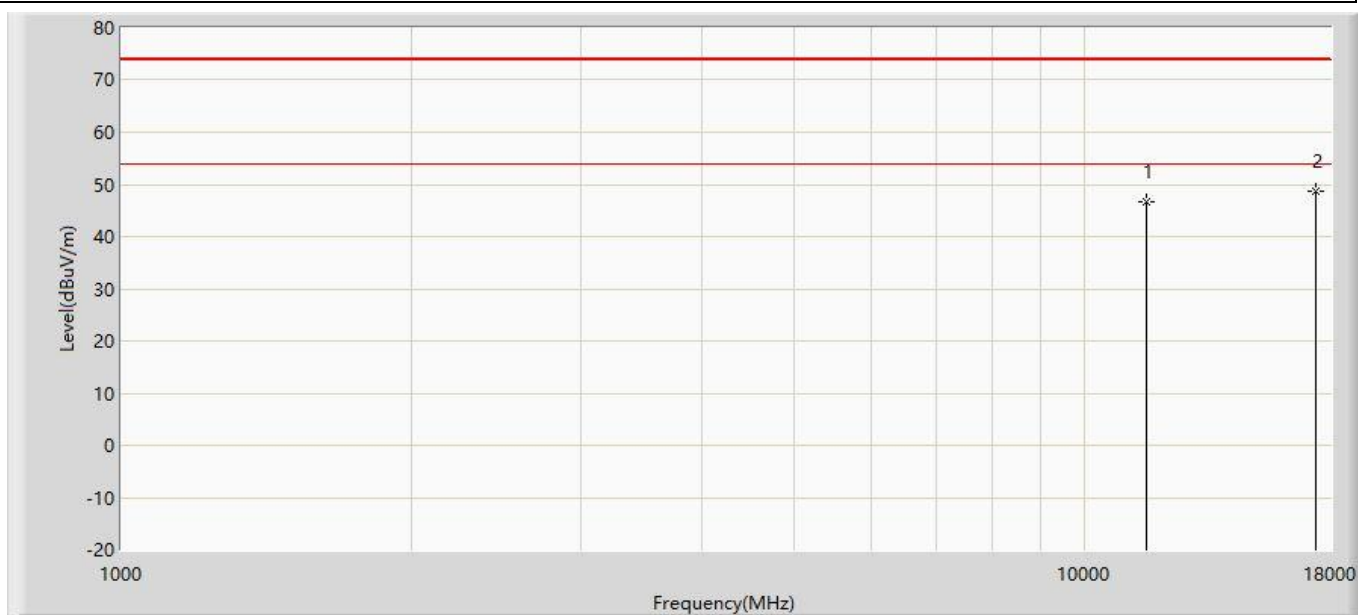


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.752	47.458	-27.248	74.000	-0.706	PK
2	*	17355.000	48.746	46.766	-25.254	74.000	1.980	PK

Profile: 2250805R	Page No.: 305
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5825MHz by 11ax20	

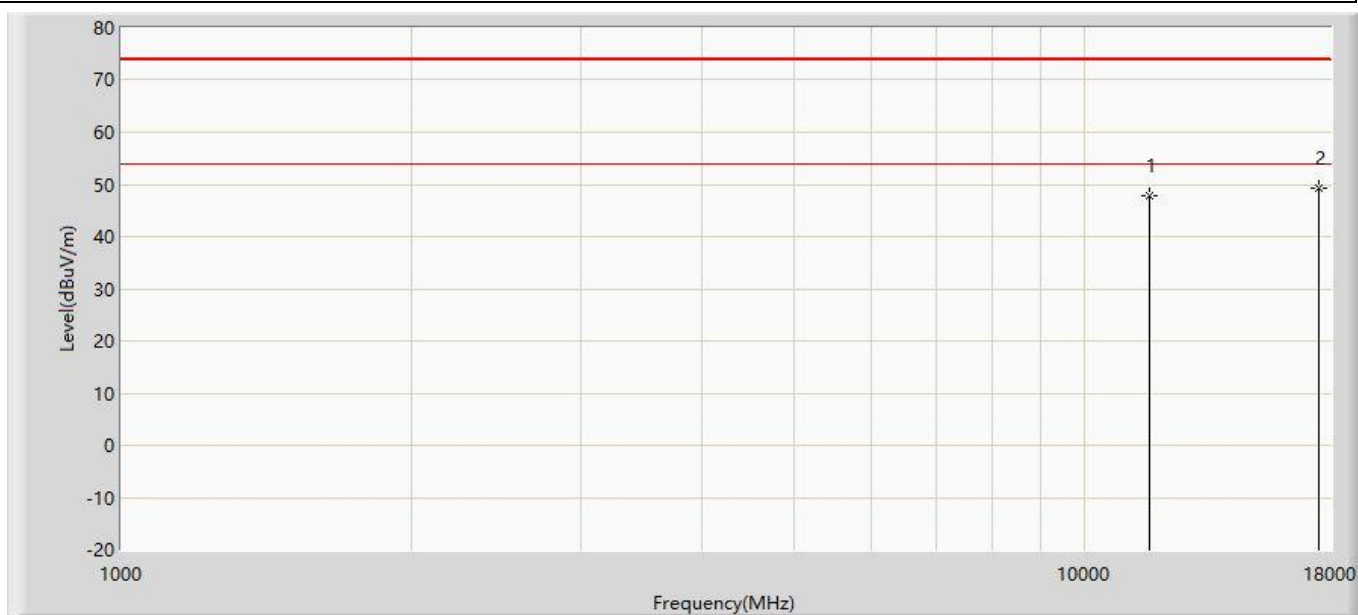


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	47.772	47.849	-26.228	74.000	-0.078	PK
2	*	17475.000	49.346	46.912	-24.654	74.000	2.434	PK

Profile: 2250805R	Page No.: 306
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:35
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5825MHz by 11ax20	

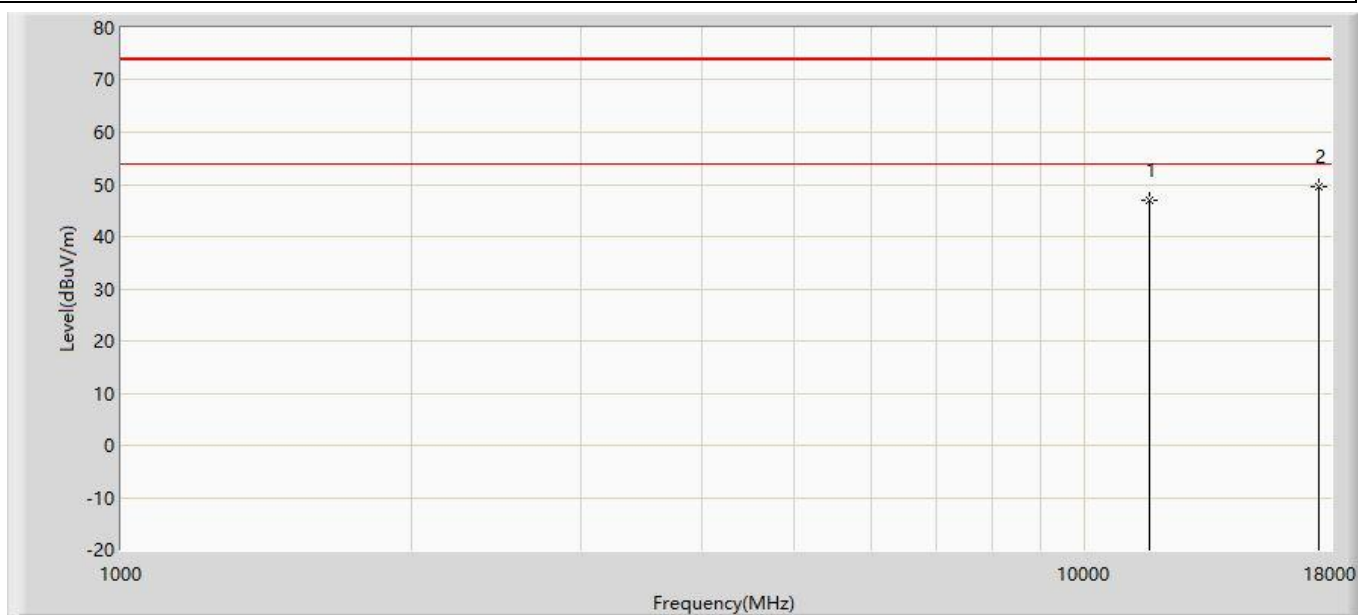


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	47.085	47.162	-26.915	74.000	-0.078	PK
2	*	17475.000	49.471	47.037	-24.529	74.000	2.434	PK

Profile: 2250805R	Page No.: 307
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

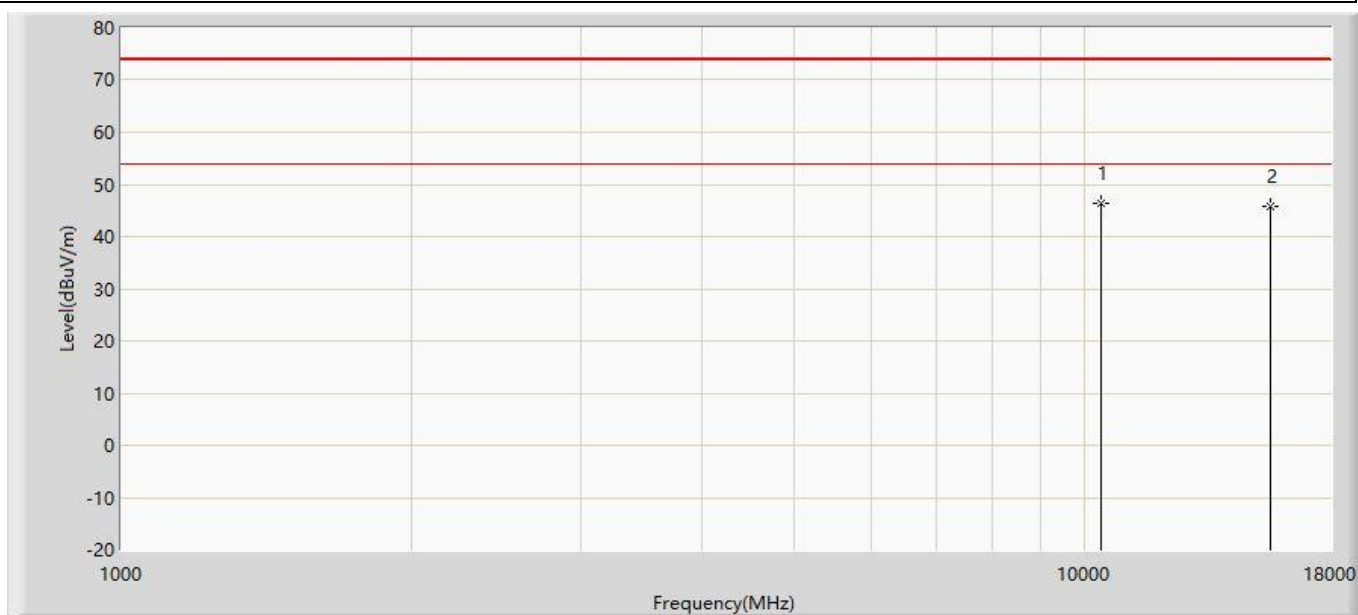


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10380.000	46.494	49.587	-27.506	74.000	-3.093	PK
2		15570.000	45.875	47.820	-28.125	74.000	-1.945	PK

Profile: 2250805R	Page No.: 308
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

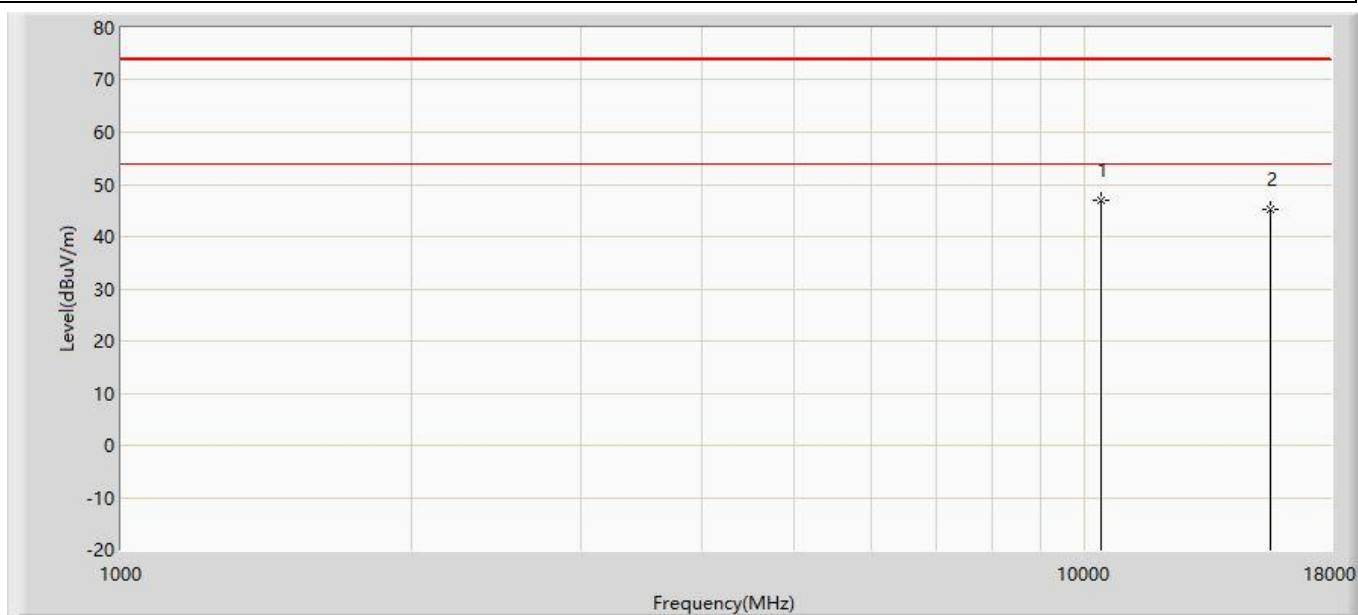


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10380.000	46.861	49.954	-27.139	74.000	-3.093	PK
2		15570.000	45.329	47.274	-28.671	74.000	-1.945	PK

Profile: 2250805R	Page No.: 309
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5230MHz by 11ax40	

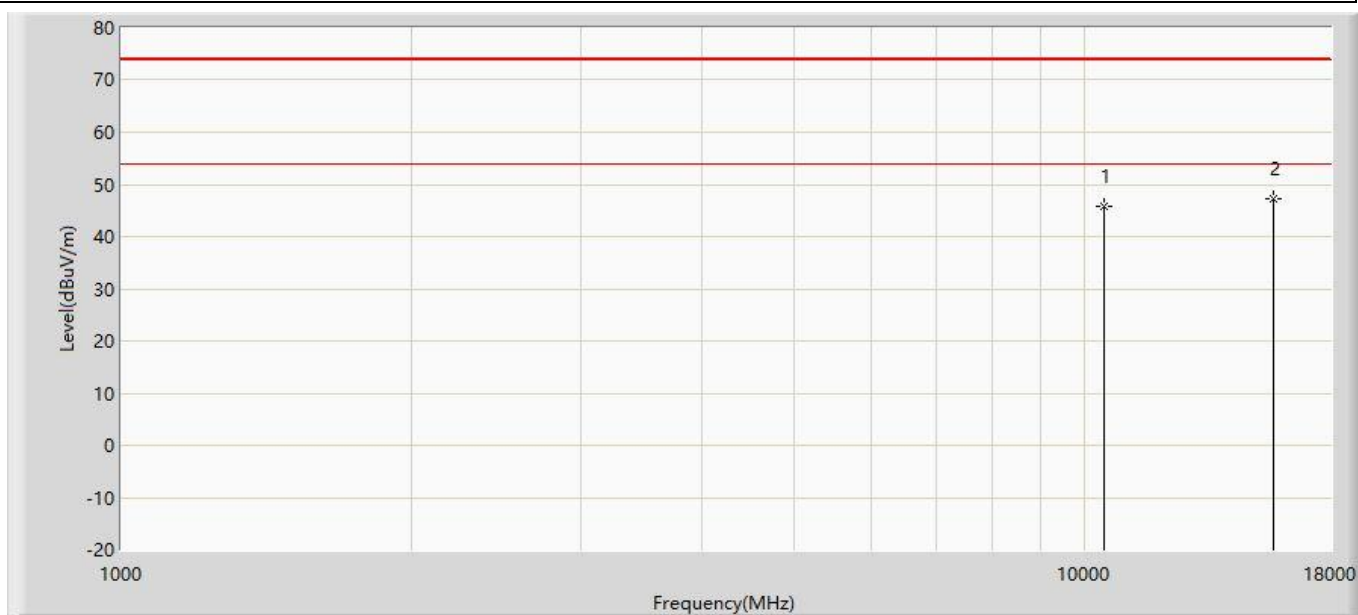


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	45.849	48.682	-28.151	74.000	-2.833	PK
2	*	15690.000	47.224	49.147	-26.776	74.000	-1.923	PK

Profile: 2250805R	Page No.: 310
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5230MHz by 11ax40	

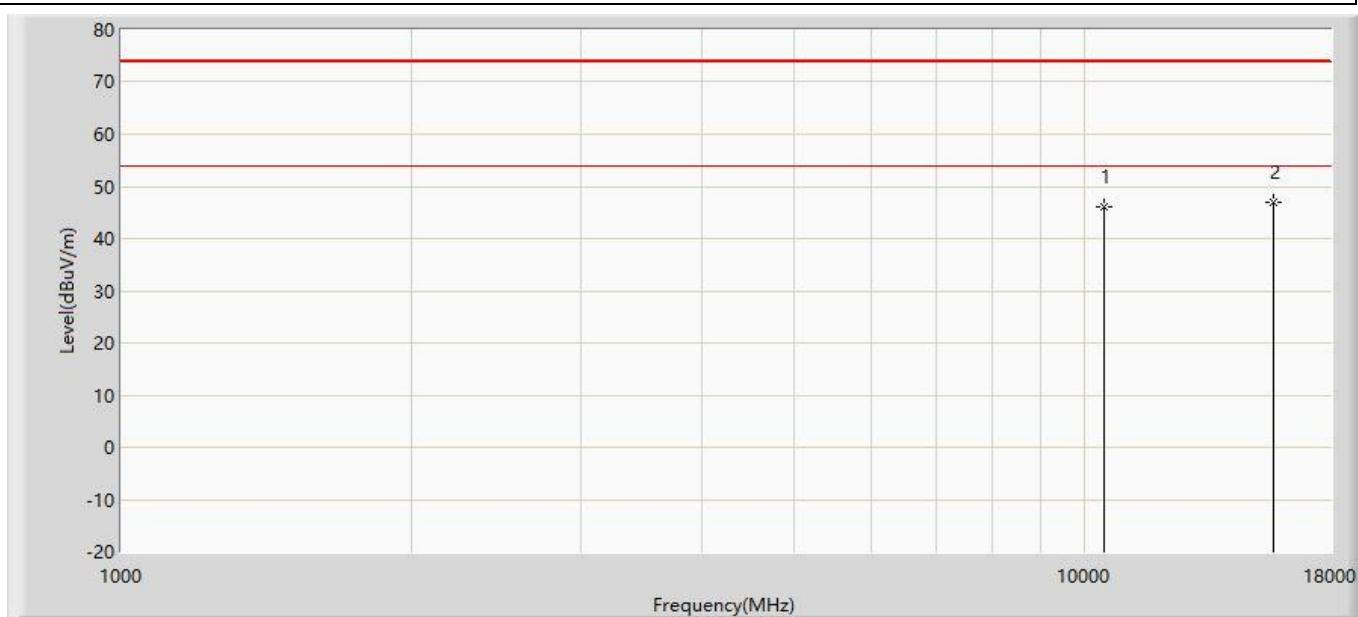


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	46.031	48.864	-27.969	74.000	-2.833	PK
2	*	15690.000	47.062	48.985	-26.938	74.000	-1.923	PK

Profile: 2250805R	Page No.: 311
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5270MHz by 11ax40	

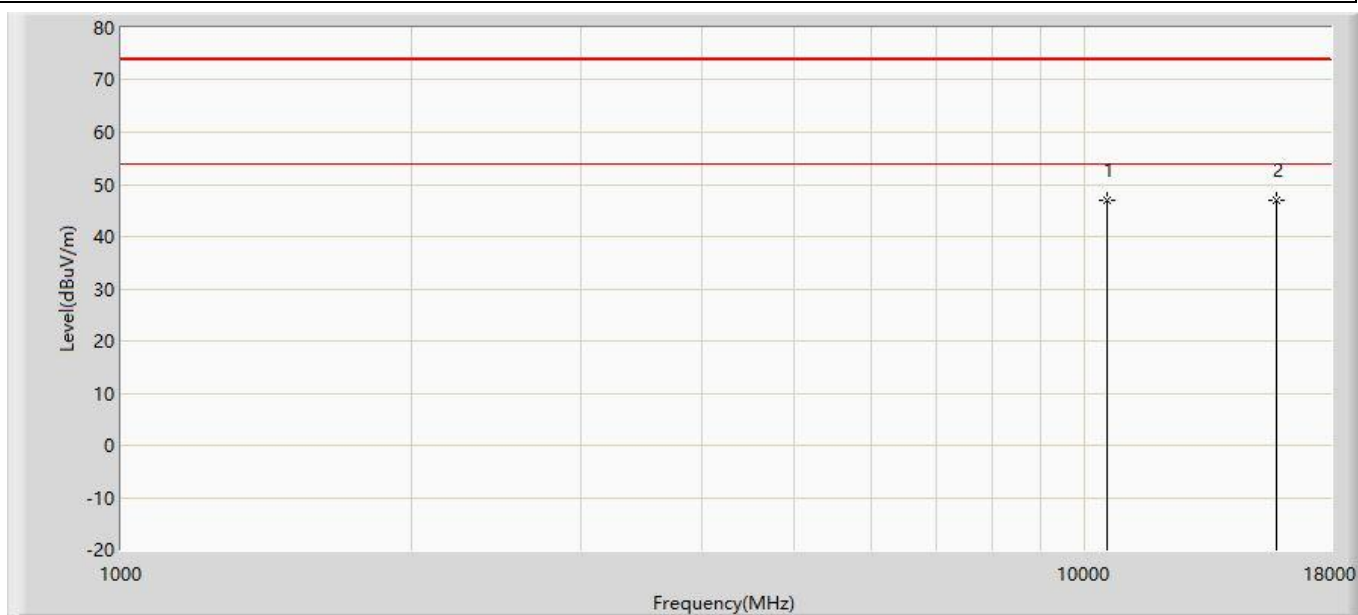


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10540.000	46.975	49.478	-27.025	74.000	-2.502	PK
2		15810.000	46.827	48.412	-27.173	74.000	-1.586	PK

Profile: 2250805R	Page No.: 312
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5270MHz by 11ax40	

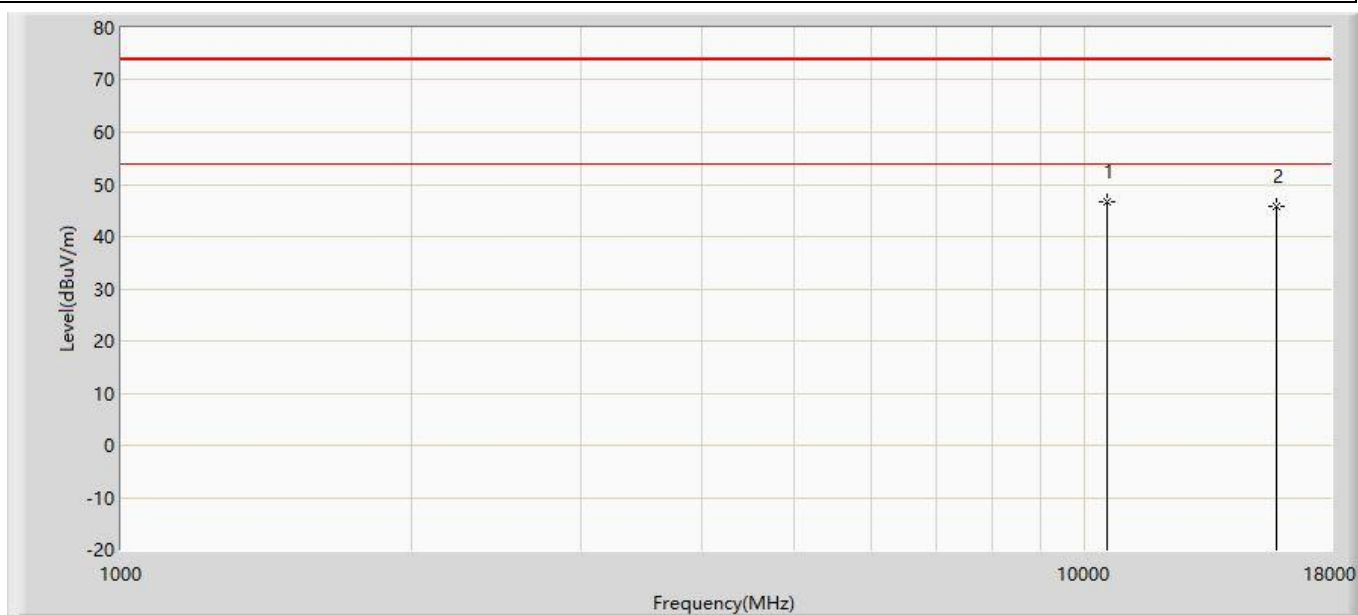


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10540.000	46.784	49.287	-27.216	74.000	-2.502	PK
2		15810.000	45.929	47.514	-28.071	74.000	-1.586	PK

Profile: 2250805R	Page No.: 313
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

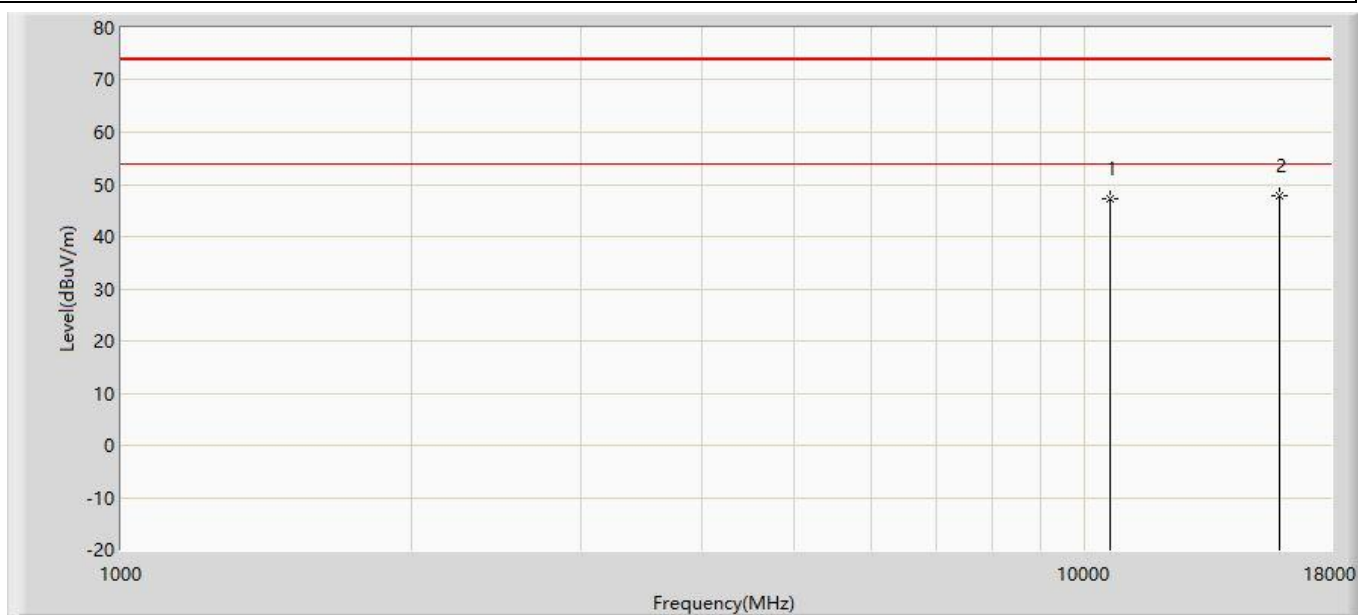


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	47.237	49.367	-26.763	74.000	-2.130	PK
2	*	15930.000	47.725	49.252	-26.275	74.000	-1.527	PK

Profile: 2250805R	Page No.: 314
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

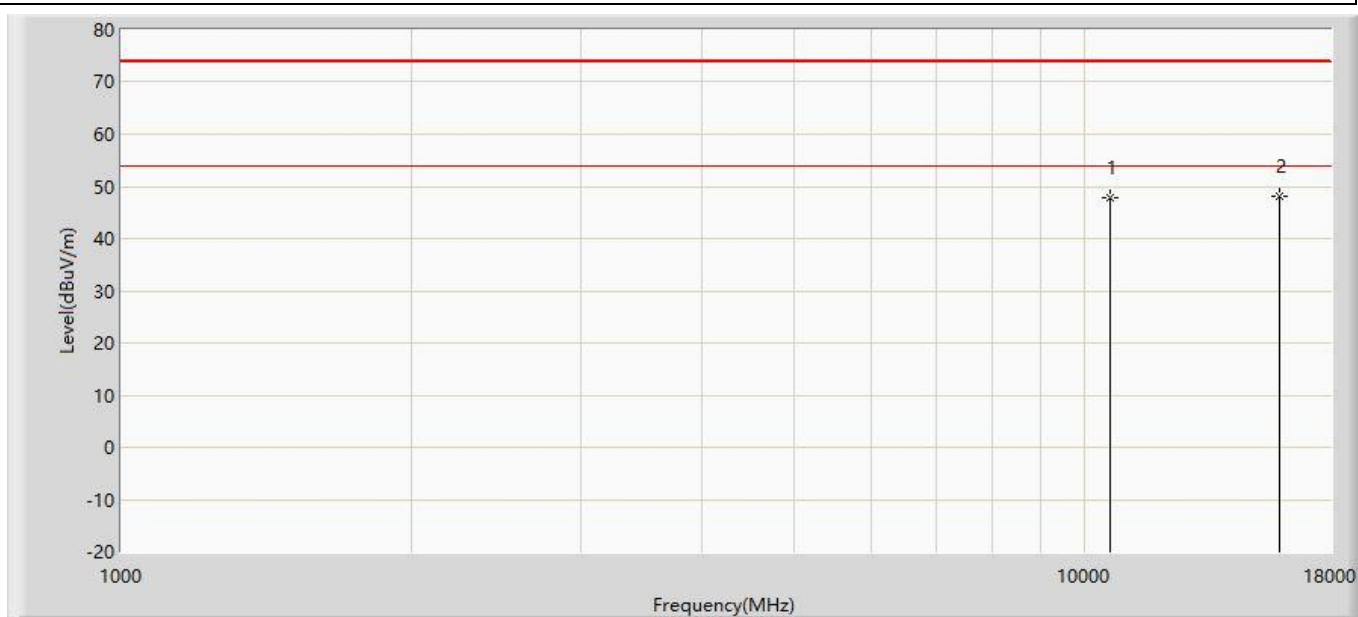


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	47.706	49.836	-26.294	74.000	-2.130	PK
2	*	15930.000	48.239	49.766	-25.761	74.000	-1.527	PK

Profile: 2250805R	Page No.: 315
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

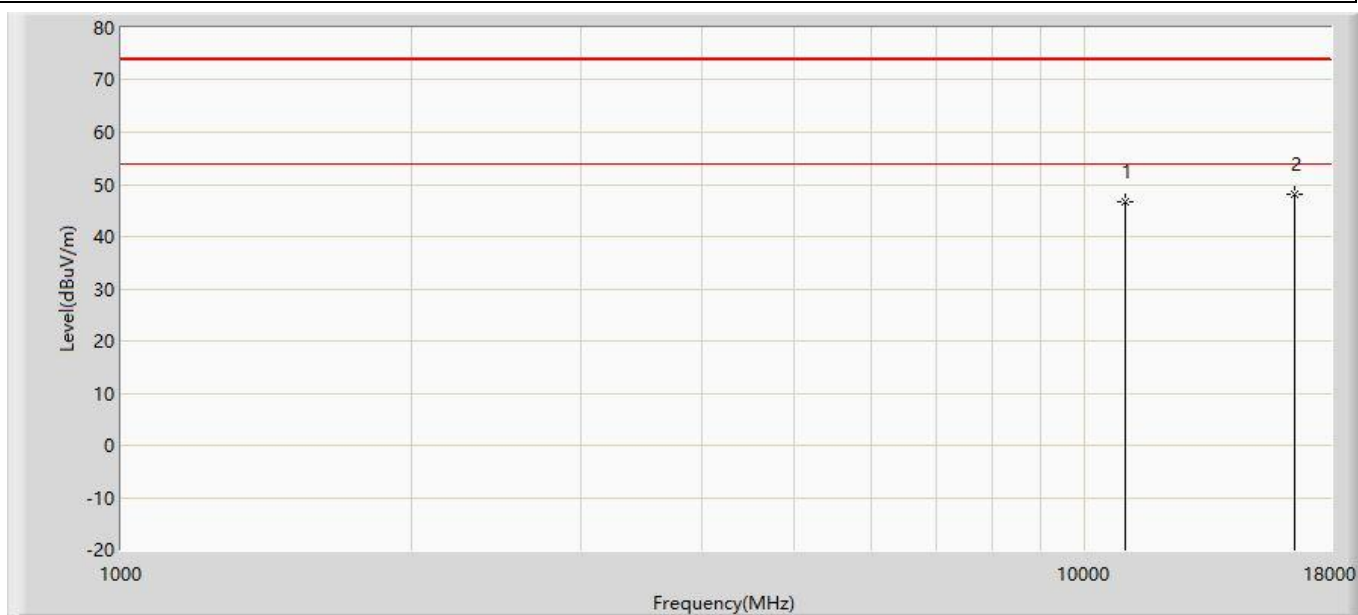


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	46.779	48.729	-27.221	74.000	-1.949	PK
2	*	16530.000	48.027	48.078	-25.973	74.000	-0.051	PK

Profile: 2250805R	Page No.: 316
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

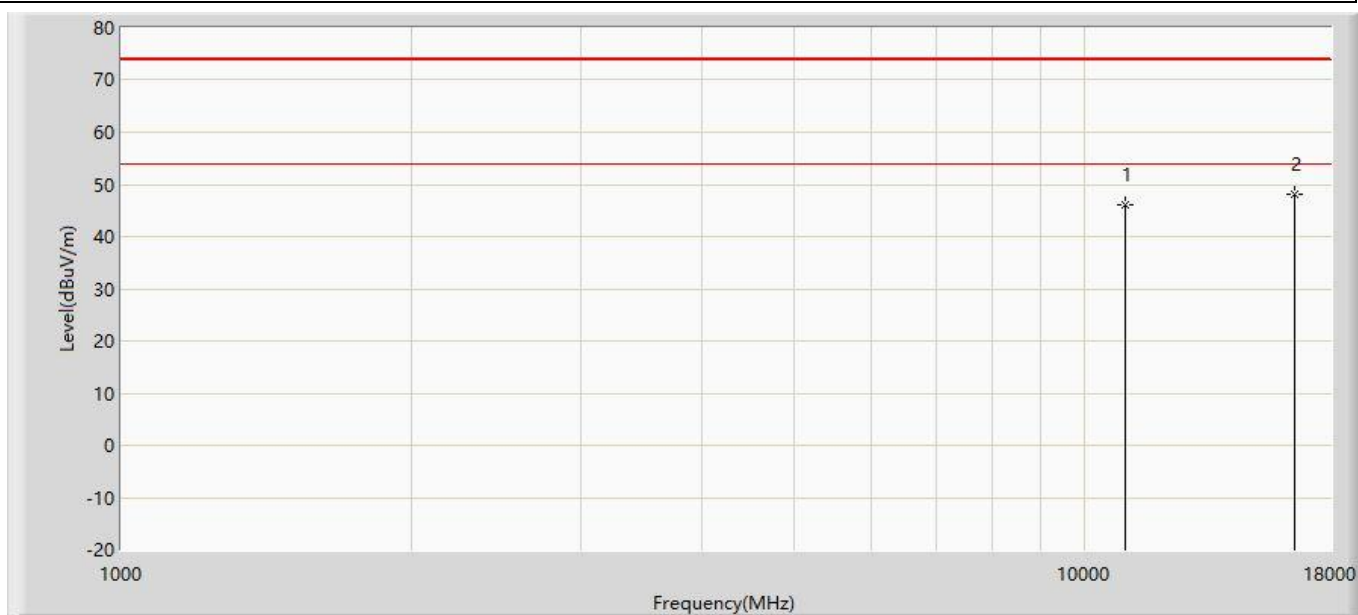


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	46.200	48.150	-27.800	74.000	-1.949	PK
2	*	16530.000	47.979	48.030	-26.021	74.000	-0.051	PK

Profile: 2250805R	Page No.: 317
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5590MHz by 11ax40	

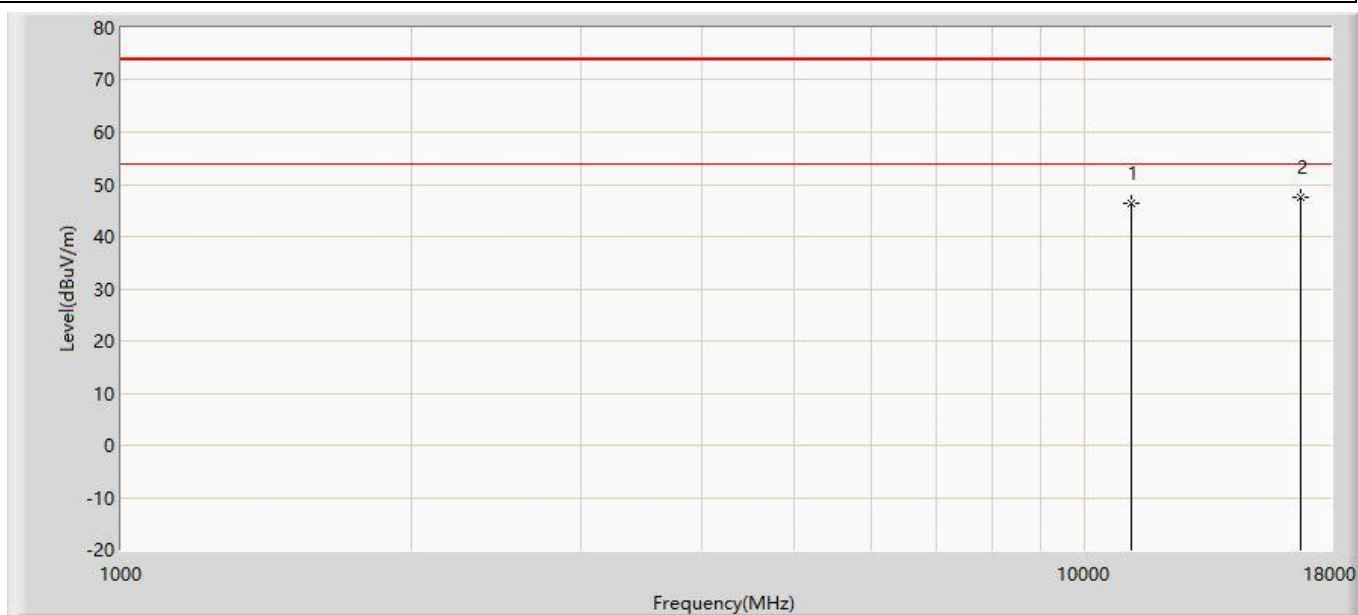


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.369	48.436	-27.631	74.000	-2.067	PK
2	*	16770.000	47.513	48.100	-26.487	74.000	-0.587	PK

Profile: 2250805R	Page No.: 318
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5590MHz by 11ax40	

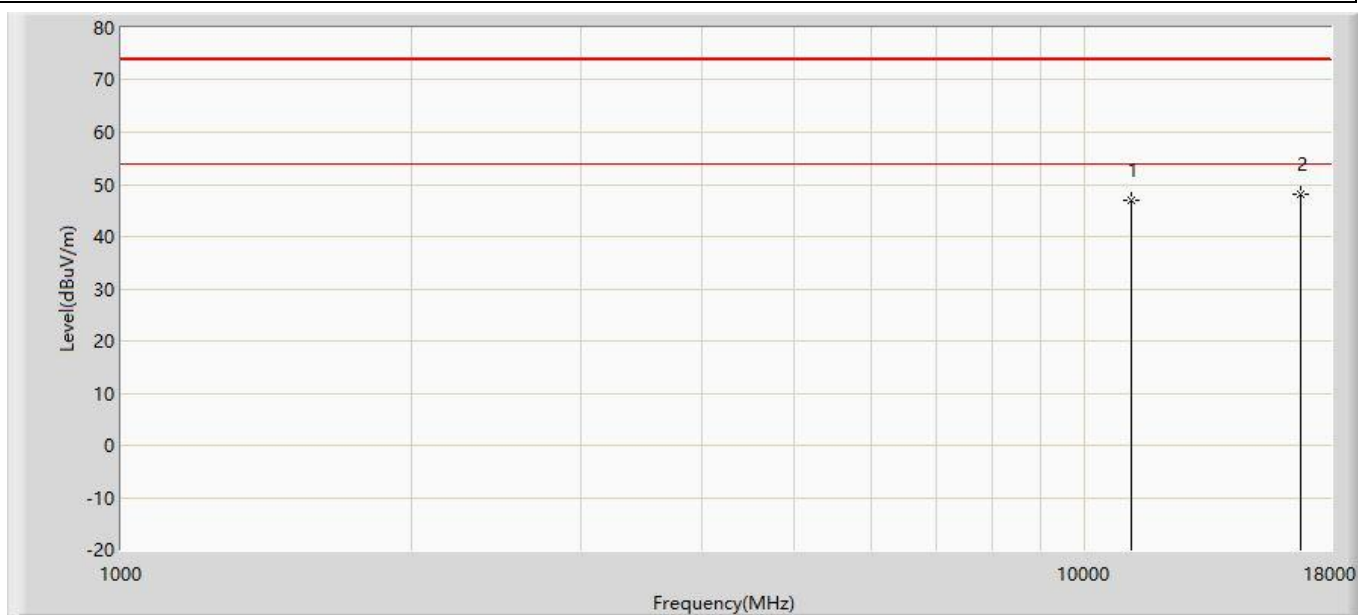


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	47.079	49.146	-26.921	74.000	-2.067	PK
2	*	16770.000	48.037	48.624	-25.963	74.000	-0.587	PK

Profile: 2250805R	Page No.: 319
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:36
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5670MHz by 11ax40	

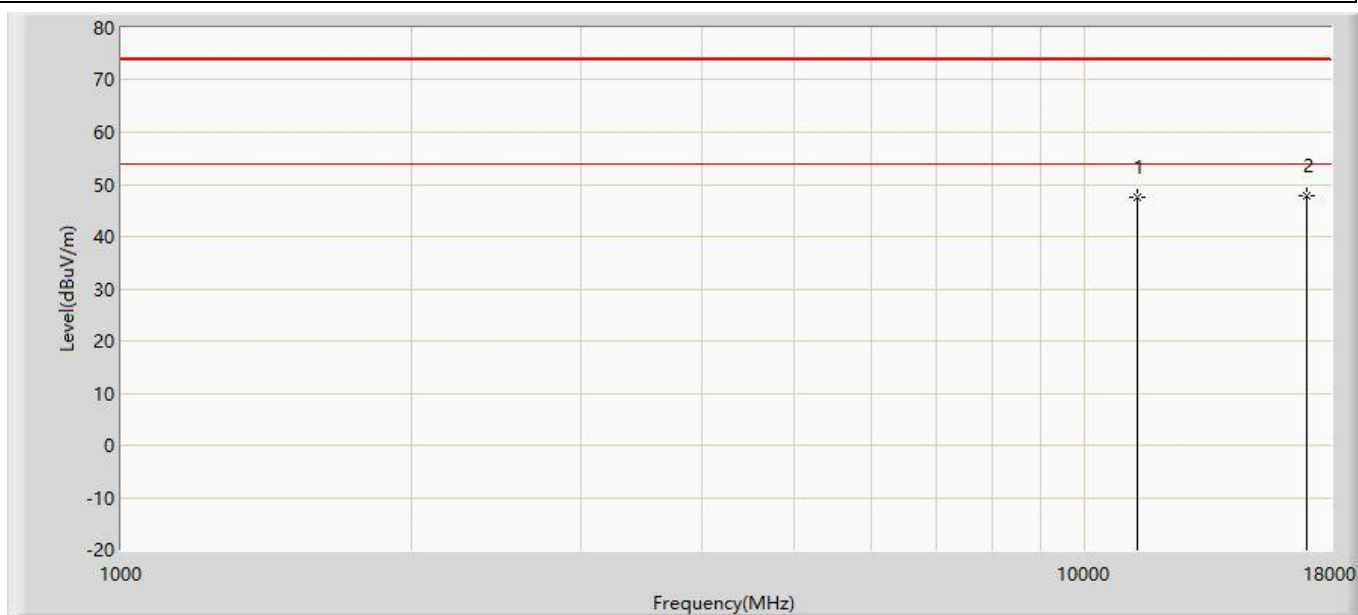


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	47.437	48.917	-26.563	74.000	-1.479	PK
2	*	17010.000	47.729	47.402	-26.271	74.000	0.326	PK

Profile: 2250805R	Page No.: 320
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5670MHz by 11ax40	

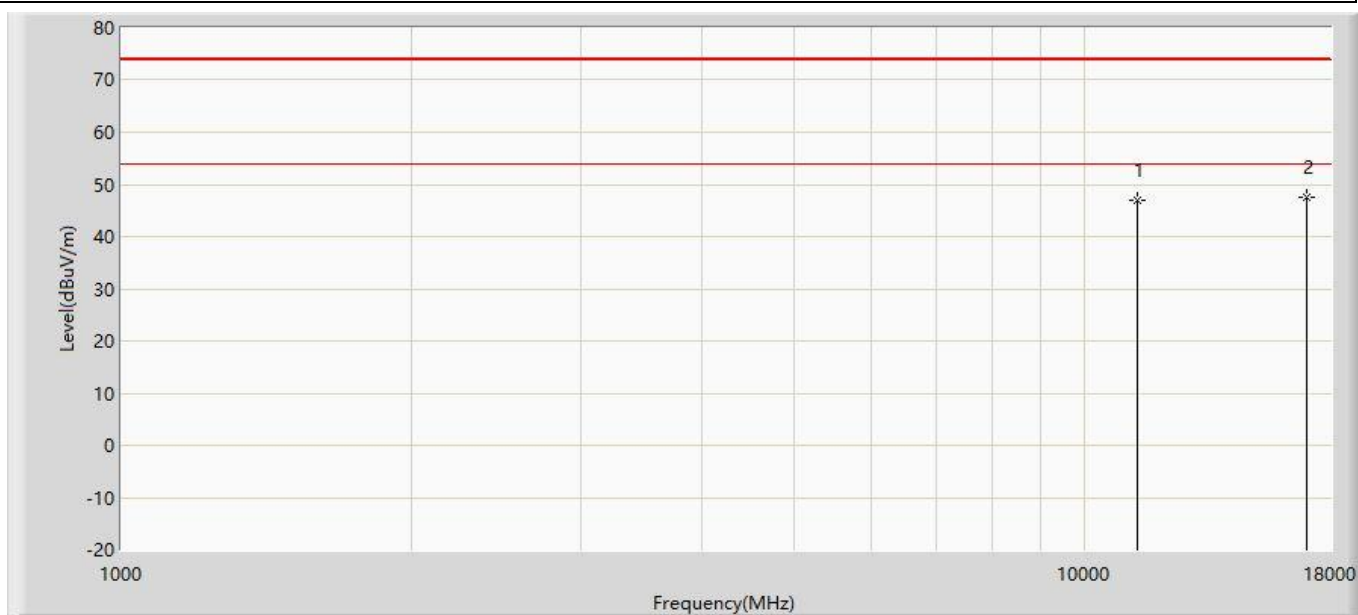


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	46.852	48.332	-27.148	74.000	-1.479	PK
2	*	17010.000	47.532	47.205	-26.468	74.000	0.326	PK

Profile: 2250805R	Page No.: 321
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5755MHz by 11ax40	

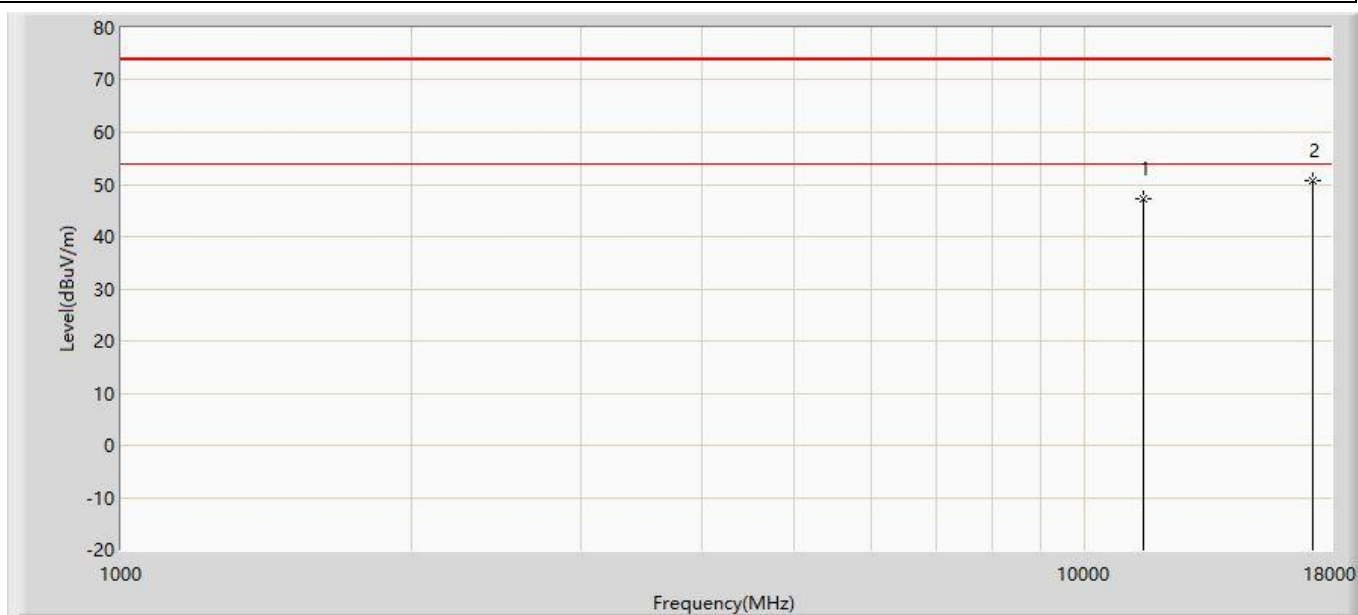


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	47.313	48.025	-26.687	74.000	-0.711	PK
2	*	17265.000	50.618	49.070	-23.382	74.000	1.548	PK

Profile: 2250805R	Page No.: 322
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5755MHz by 11ax40	

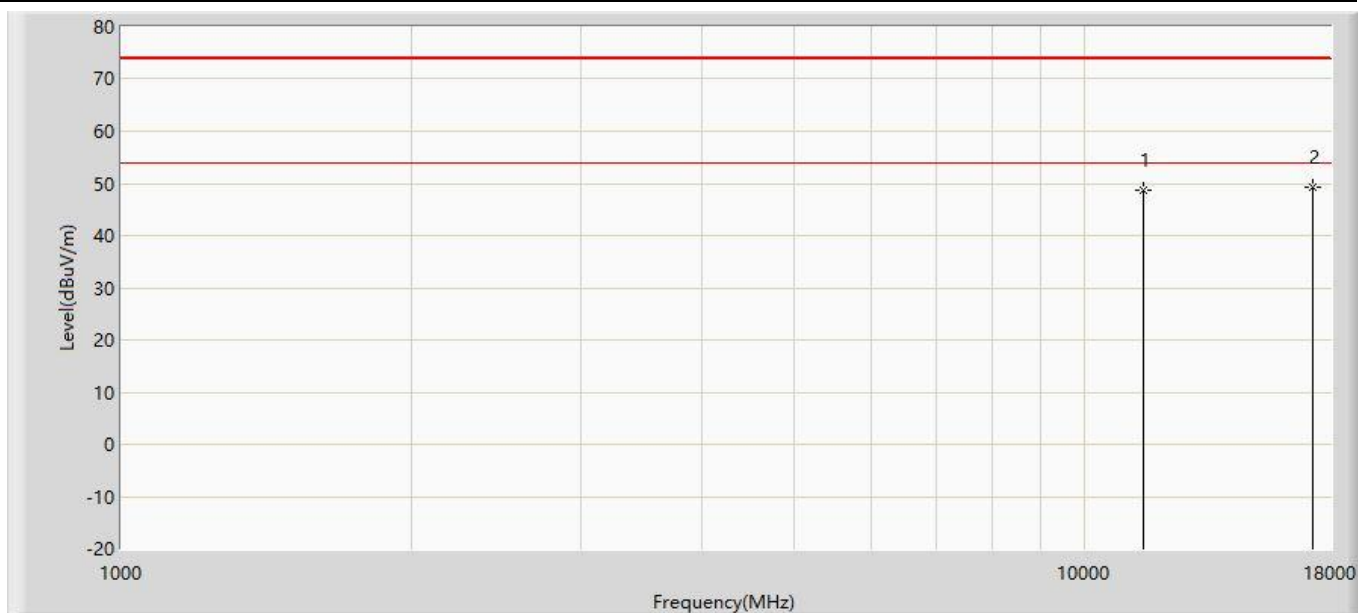


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	48.681	49.393	-25.319	74.000	-0.711	PK
2	*	17265.000	49.325	47.777	-24.675	74.000	1.548	PK

Profile: 2250805R	Page No.: 323
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5795MHz by 11ax40	

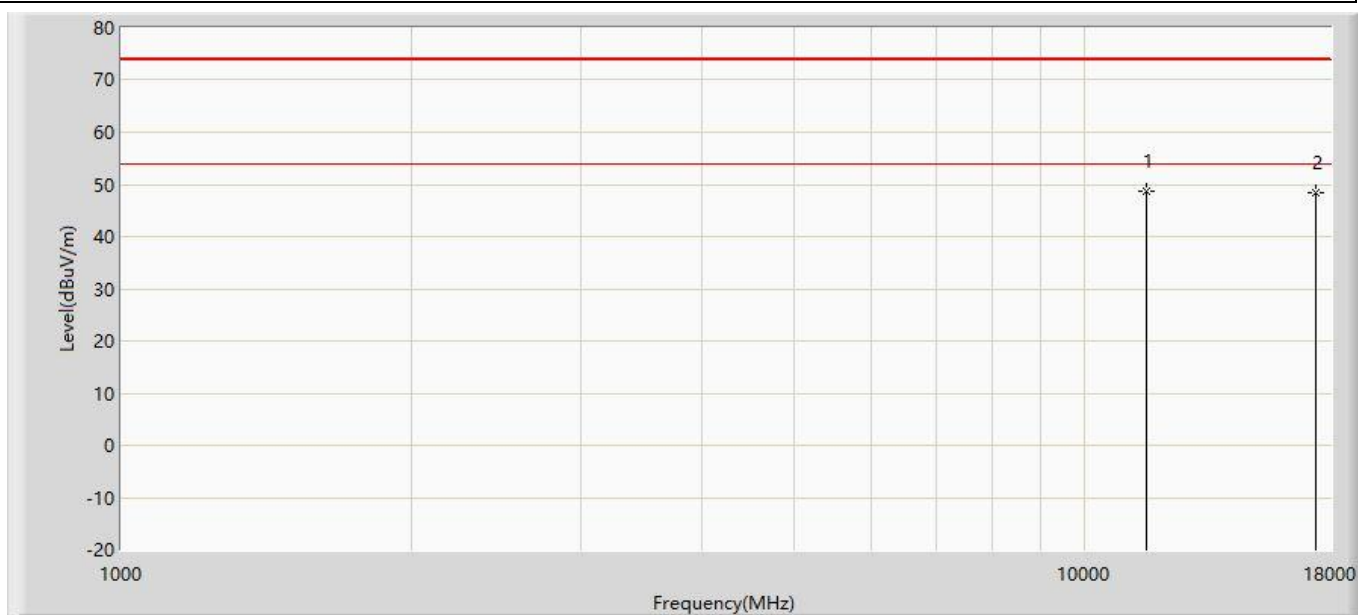


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11590.000	48.772	49.498	-25.228	74.000	-0.726	PK
2		17385.000	48.362	46.153	-25.638	74.000	2.210	PK

Profile: 2250805R	Page No.: 324
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5795MHz by 11ax40	

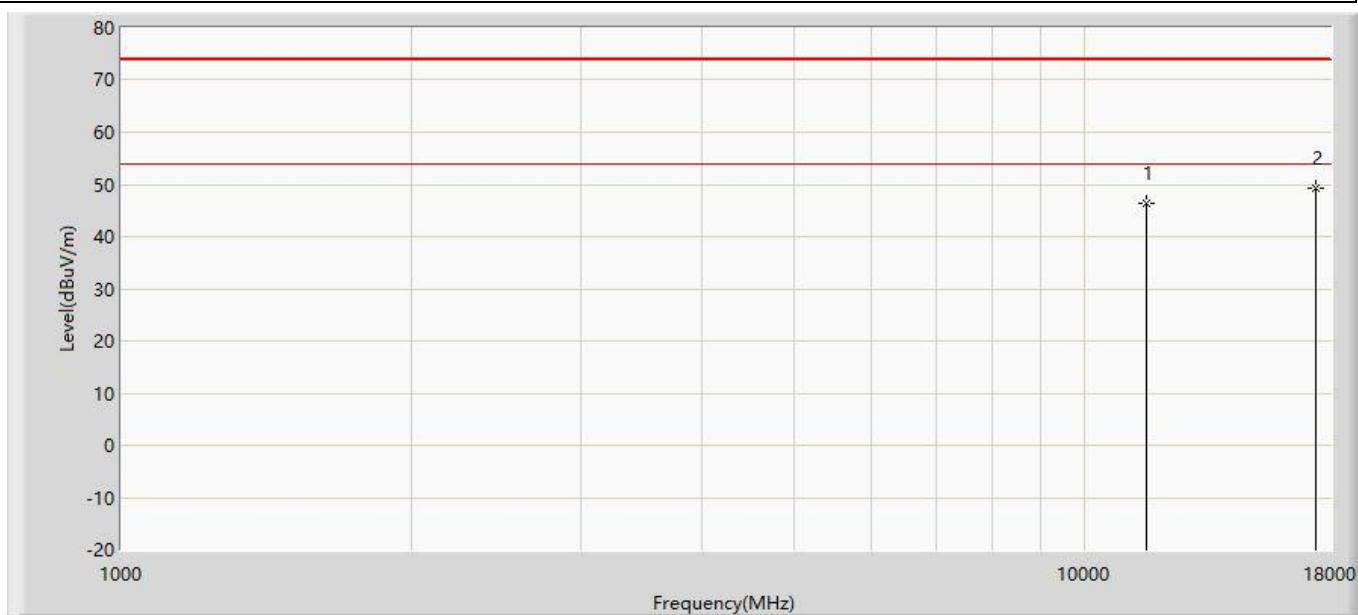


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	46.456	47.182	-27.544	74.000	-0.726	PK
2	*	17385.000	49.244	47.035	-24.756	74.000	2.210	PK

Profile: 2250805R	Page No.: 325
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	

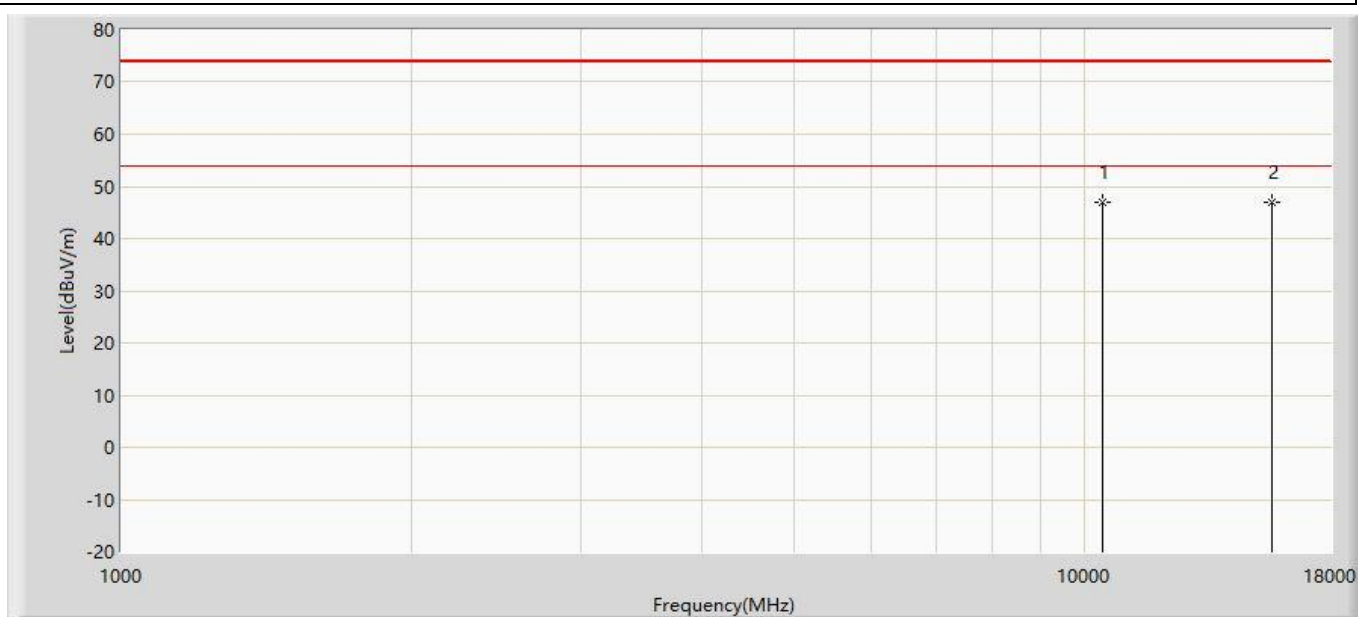


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	46.910	49.713	-27.090	74.000	-2.804	PK
2	*	15630.000	47.083	48.381	-26.917	74.000	-1.298	PK

Profile: 2250805R	Page No.: 326
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	

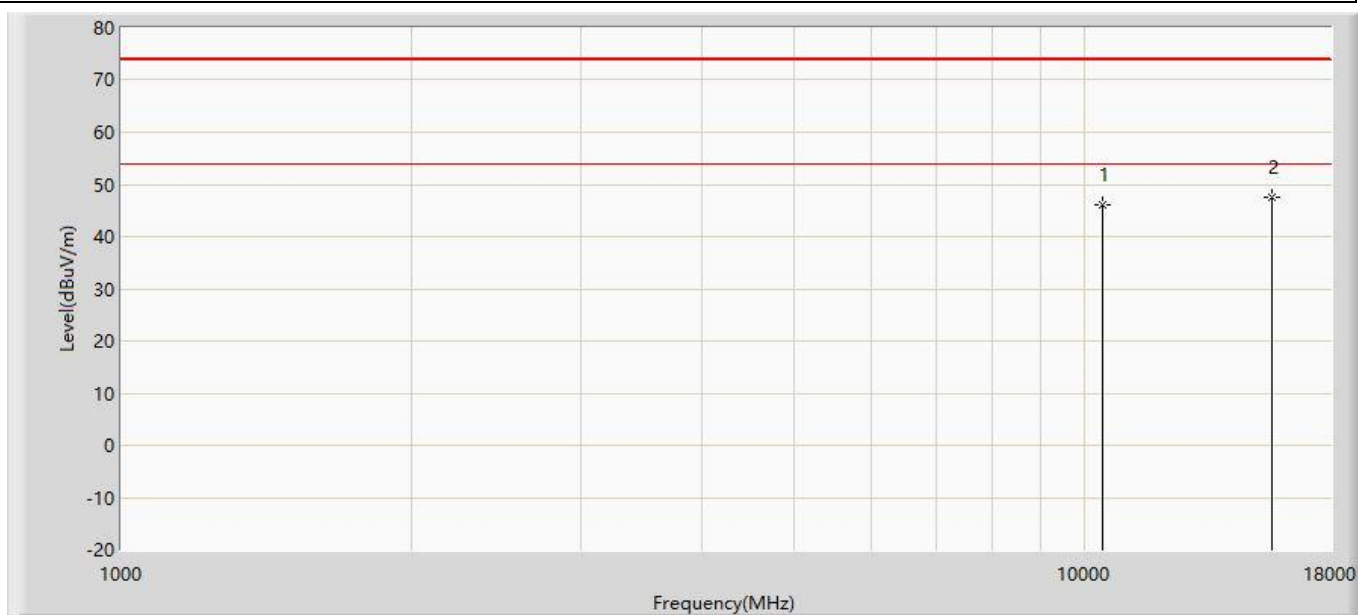


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	46.148	48.951	-27.852	74.000	-2.804	PK
2	*	15630.000	47.629	48.927	-26.371	74.000	-1.298	PK

Profile: 2250805R	Page No.: 327
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	

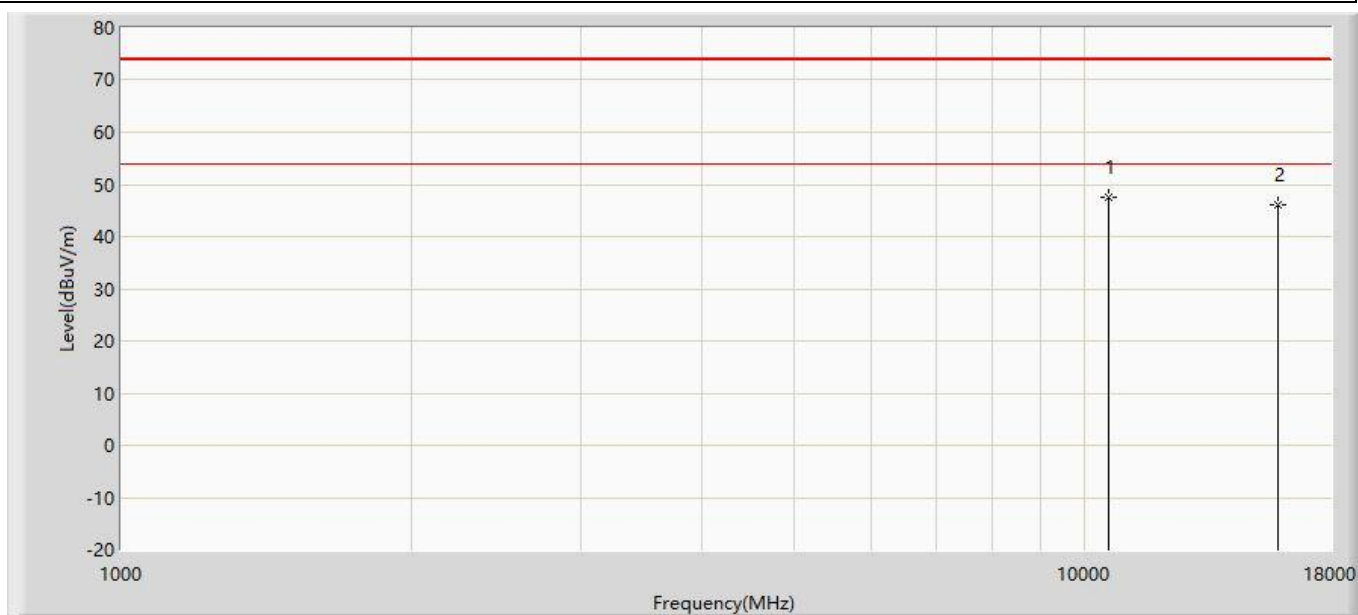


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10580.000	47.488	49.853	-26.512	74.000	-2.365	PK
2		15870.000	45.962	48.140	-28.038	74.000	-2.177	PK

Profile: 2250805R	Page No.: 328
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	

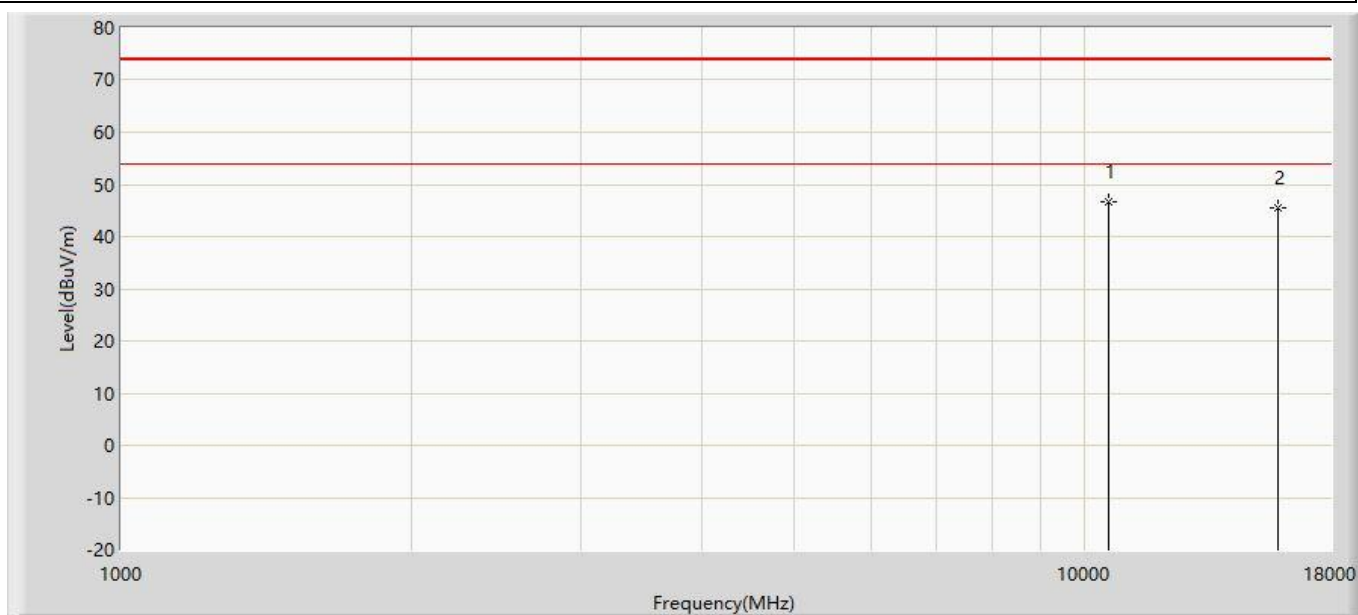


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10580.000	46.760	49.125	-27.240	74.000	-2.365	PK
2		15870.000	45.557	47.735	-28.443	74.000	-2.177	PK

Profile: 2250805R	Page No.: 329
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	

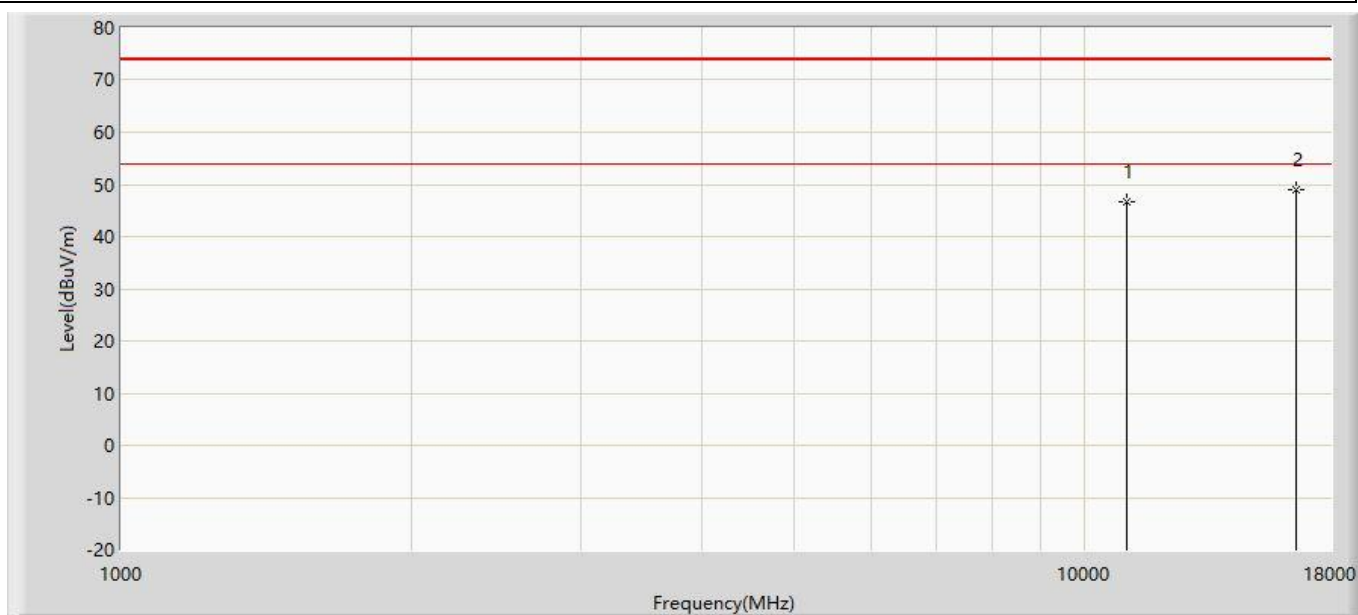


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	46.713	48.822	-27.287	74.000	-2.109	PK
2	*	16590.000	49.090	49.121	-24.910	74.000	-0.031	PK

Profile: 2250805R	Page No.: 330
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	

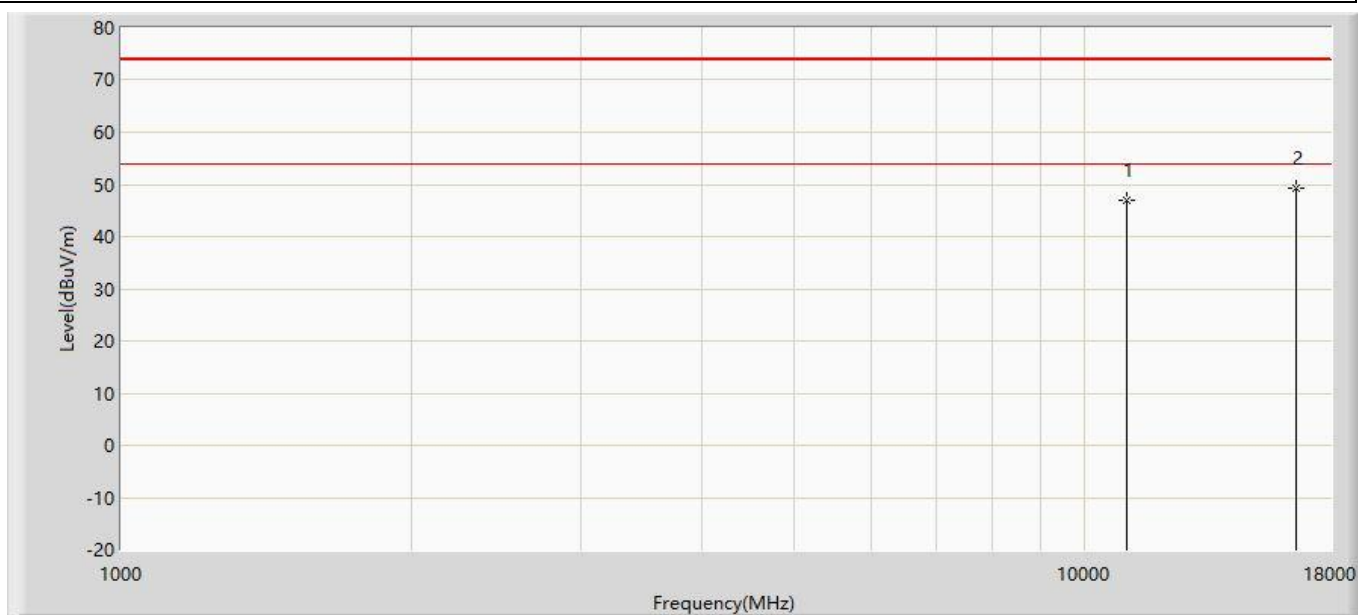


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	47.065	49.174	-26.935	74.000	-2.109	PK
2	*	16590.000	49.382	49.413	-24.618	74.000	-0.031	PK

Profile: 2250805R	Page No.: 23
Engineer: YuLiu	
Site: AC5	Time: 2022/06/30 - 02:14
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5610MHz by 11ax80	

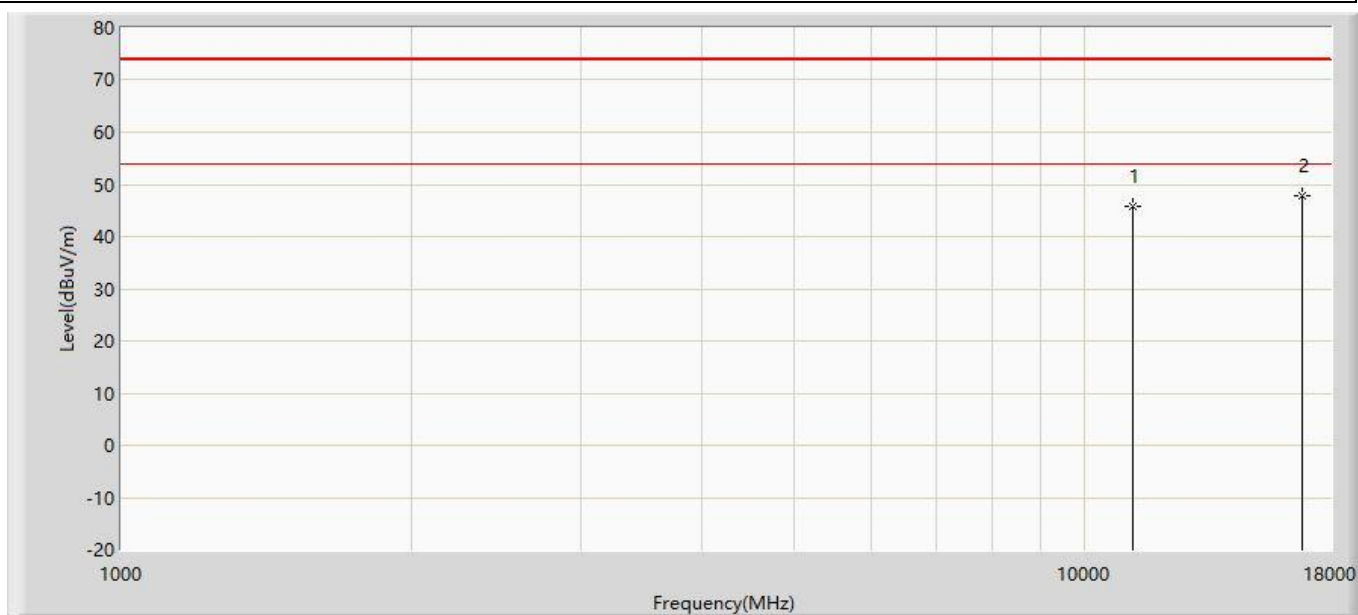


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11220.000	45.678	47.438	-28.322	74.000	-1.760	PK
2	*	16830.000	47.737	47.834	-26.263	74.000	-0.097	PK

Profile: 2250805R	Page No.: 24
Engineer: YuLiu	
Site: AC5	Time: 2022/06/30 - 02:14
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5610MHz by 11ax80	

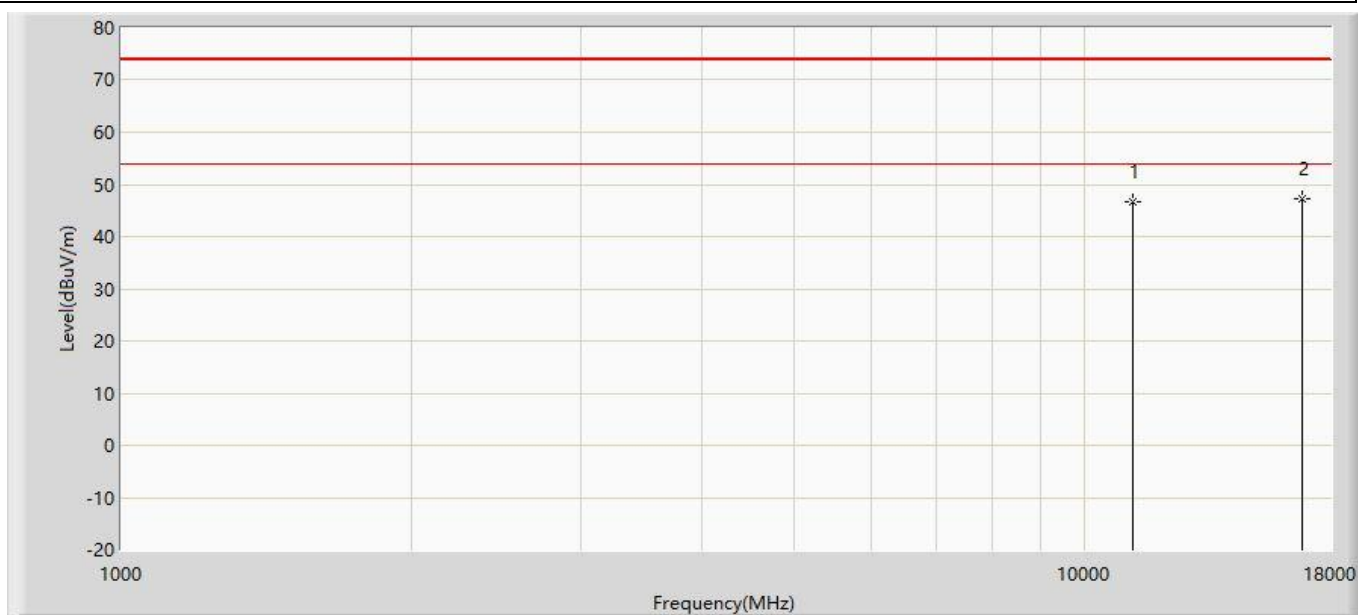


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11220.000	46.650	48.410	-27.350	74.000	-1.760	PK
2	*	16830.000	47.377	47.474	-26.623	74.000	-0.097	PK

Profile: 2250805R	Page No.: 331
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5775MHz by 11ax80	

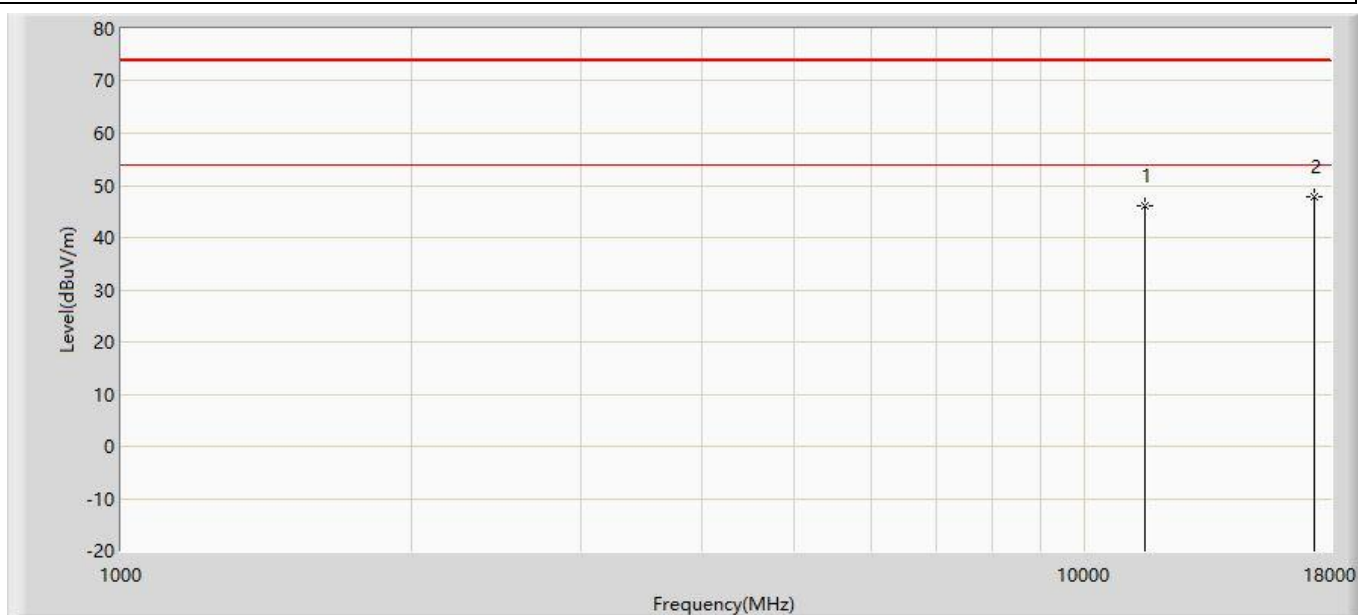

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	46.172	46.746	-27.828	74.000	-0.574	PK
2	*	17325.000	47.956	45.850	-26.044	74.000	2.106	PK

Profile: 2250805R	Page No.: 332
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:37
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5775MHz by 11ax80	

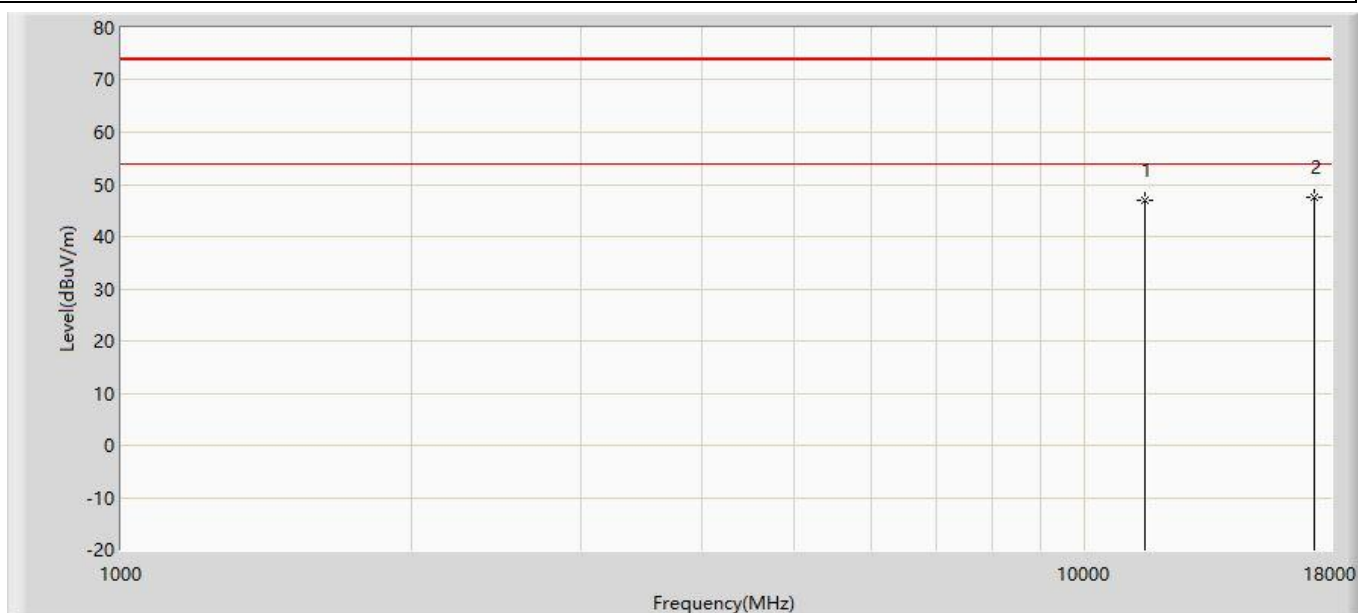


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	46.904	47.478	-27.096	74.000	-0.574	PK
2	*	17325.000	47.585	45.479	-26.415	74.000	2.106	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. The test frequency range, 18GHz~40GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
5. As the radiated emission was performed, so conducted emission was not tested.

The worst case of Radiated Emission below 1GHz:

Profile: 2250805R	Page No.: 41
Engineer: YuLiu	
Site: AC2	Time: 2022/06/20 - 20:53
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: 120V/60Hz
Note: Mode 1	

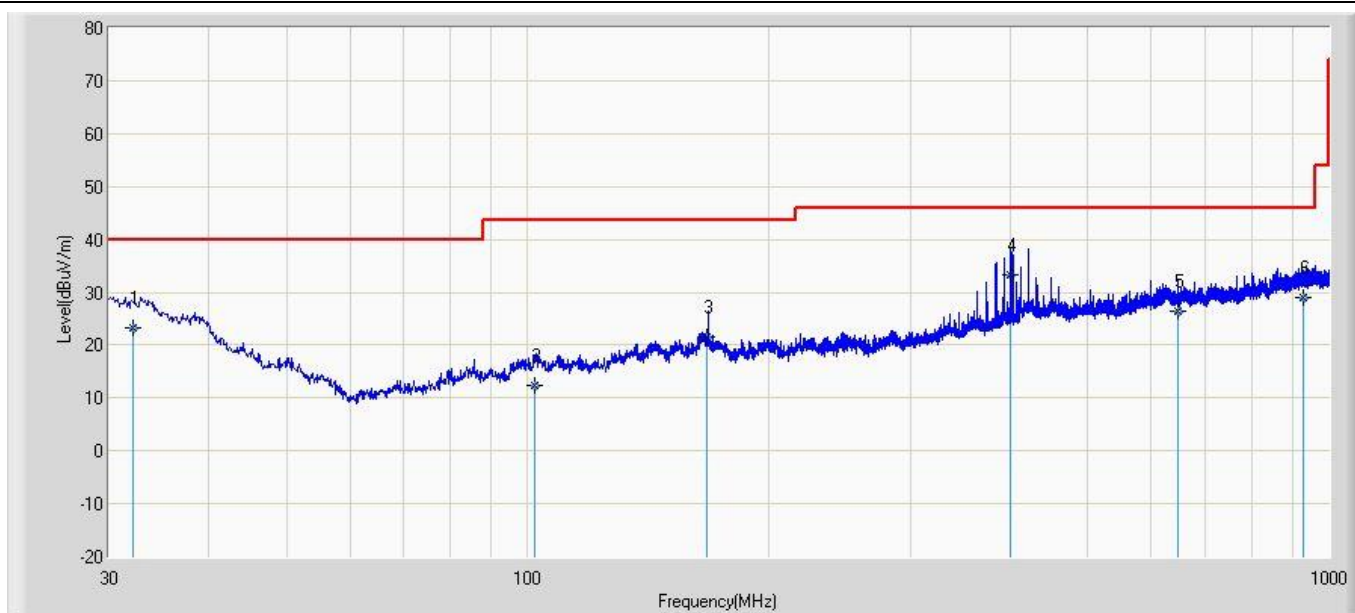


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		32.154	23.405	-3.200	-16.595	40.000	20.258	6.346	0.000	116	332	QP
2		102.164	12.343	-4.200	-31.157	43.500	9.779	6.764	0.000	114	285	QP
3		167.165	21.436	4.100	-22.064	43.500	10.292	7.044	0.000	165	224	QP
4	*	400.164	33.317	8.100	-12.683	46.000	17.427	7.789	0.000	169	225	QP
5		648.164	26.406	-2.100	-19.594	46.000	20.104	8.403	0.000	165	201	QP
6		930.135	29.049	-3.000	-16.951	46.000	23.045	9.004	0.000	150	210	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Profile: 2250805R	Page No.: 41
Engineer: YuLiu	
Site: AC2	Time: 2022/06/20 - 20:54
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: 120V/60Hz
Note: Mode 1	

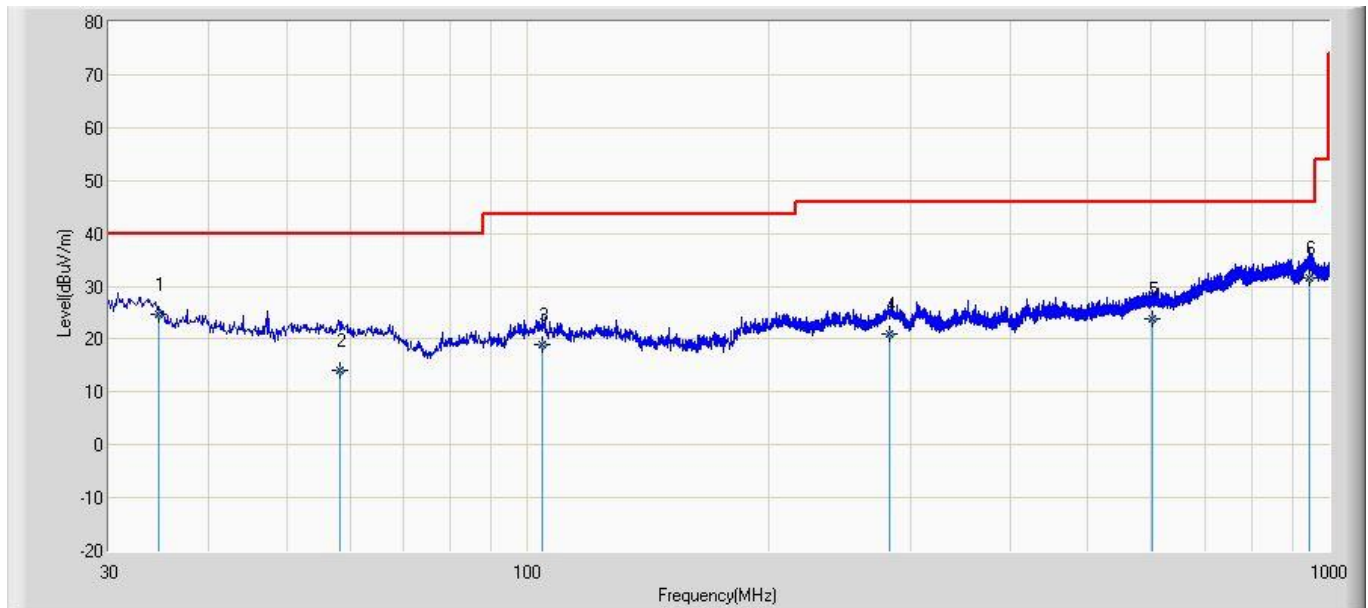


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		34.645	24.584	2.100	-15.416	40.000	16.121	6.364	0.000	196	301	QP
2		58.167	14.065	-2.500	-25.935	40.000	10.034	6.530	0.000	198	265	QP
3		104.164	18.841	-3.100	-24.659	43.500	15.169	6.773	0.000	130	158	QP
4		283.164	21.051	-3.600	-24.949	46.000	17.201	7.450	0.000	185	245	QP
5		601.164	23.923	-3.200	-22.077	46.000	18.824	8.299	0.000	147	201	QP
6	*	947.164	31.531	-3.100	-14.469	46.000	25.599	9.032	0.000	165	201	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)


The worst case of Simultaneous Radiated Emission:

Profile: 2250805R	Page No.: 11
Engineer: YuLiu	
Site: AC5	Time: 2022/07/04 - 09:31
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at BLE 2440MHz+ WIFI 5180MHz	

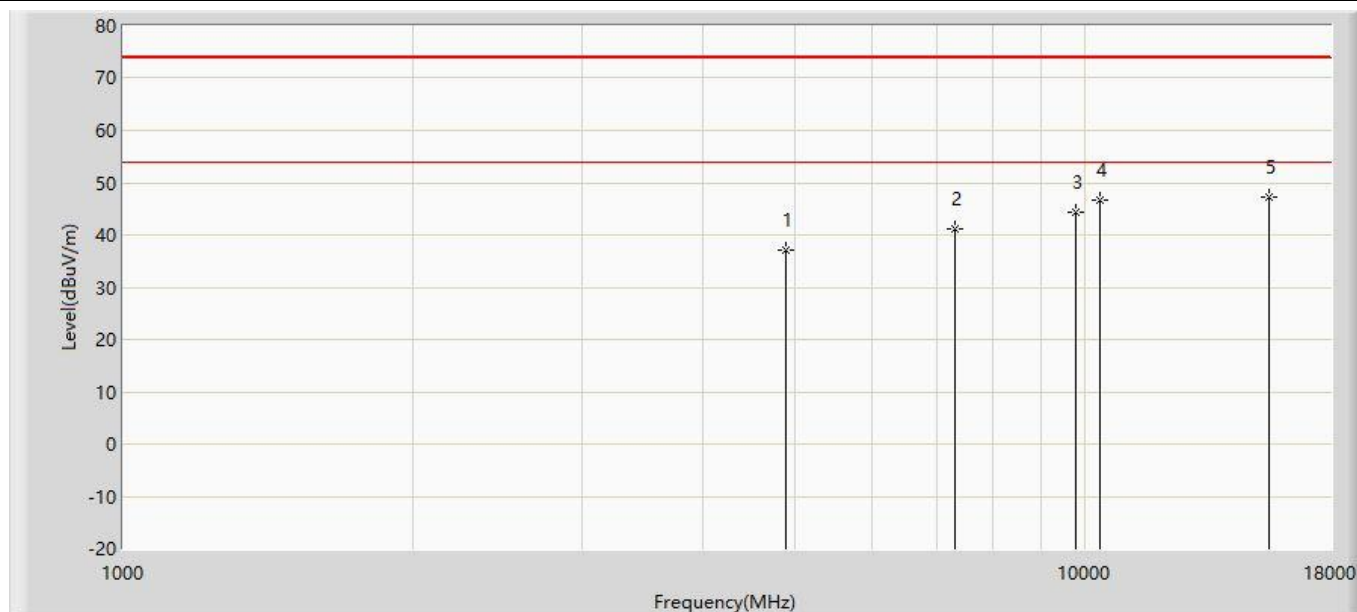

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	37.049	51.437	-36.951	74.000	-14.388	PK
2		7320.000	41.088	49.408	-32.912	74.000	-8.320	PK
3		9760.000	44.262	48.936	-29.738	74.000	-4.673	PK
4		10360.000	46.545	49.531	-27.455	74.000	-2.986	PK
5	*	15540.000	47.123	48.974	-26.877	74.000	-1.851	PK

Profile: 2250805R	Page No.: 12
Engineer: YuLiu	
Site: AC5	Time: 2022/07/04 - 09:31
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at BLE 2440MHz+ WIFI 5180MHz	

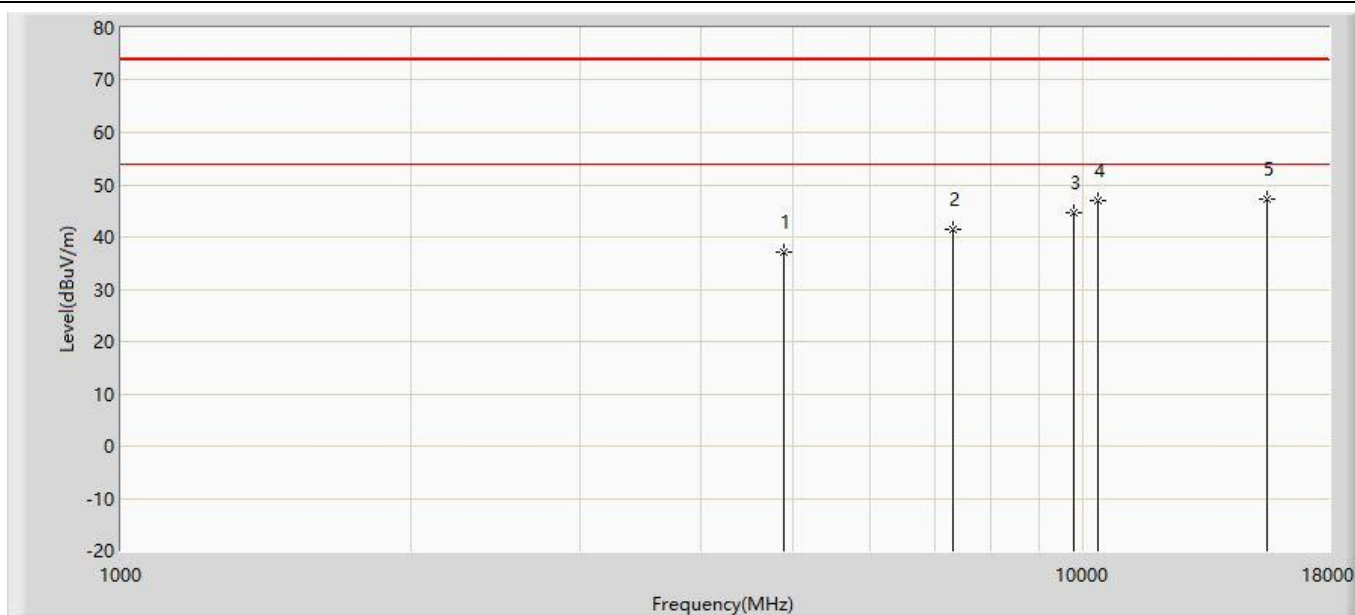


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	37.036	51.424	-36.964	74.000	-14.388	PK
2		7320.000	41.510	49.830	-32.490	74.000	-8.320	PK
3		9760.000	44.500	49.174	-29.500	74.000	-4.673	PK
4		10360.000	47.030	50.016	-26.970	74.000	-2.986	PK
5	*	15540.000	47.379	49.230	-26.621	74.000	-1.851	PK

5. Emission bandwidth and occupied bandwidth

5.1. Test Equipment

Emission bandwidth and occupied bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
Coaxial Cable	N/A	N/A	2180	2022.06.07	2023.06.06
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

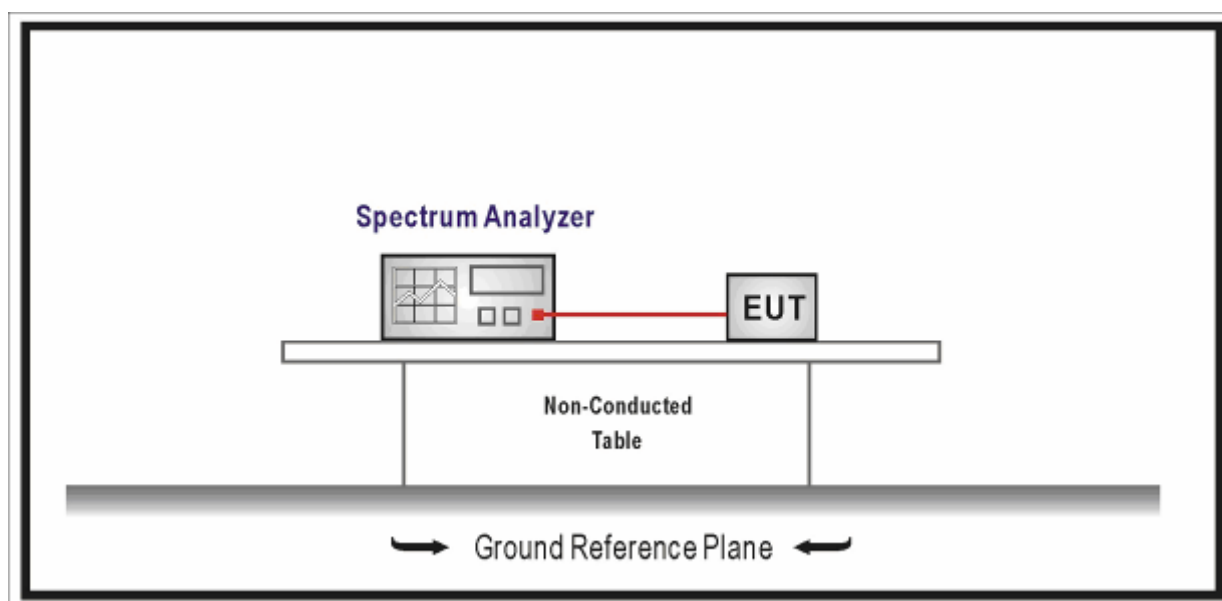






5.3. Limit

N/A

5.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
	☐ ANSI C63.10	12.4.1	Emission bandwidth (26dB)
	☐ ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
	☒ FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
	☐ FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☒	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

5.5. EUT test Axis definition

Item	Occupied bandwidth			
Device Category	☐	Indoor use		
	☐	Outdoor use		
	☐	Fix position use		
	☒	Client use		
Test mode	Mode 1-9			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☒	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				
	☐	Chain 1	Chain 2	Chain 3
				

5.6. Test Result

Product Name	:	VR All-In-One Headset
Test Mode	:	Mode 1-9

Mode 1: Transmit by 802.11a					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH36	5180	27.82	16.595	5171.7025	Pass
CH44	5220	28.27	16.616	N/A	Pass
CH48	5240	26.23	16.602	5248.301	Pass
CH52	5260	27.20	16.575	N/A	Pass
CH60	5300	23.57	16.544	N/A	Pass
CH64	5320	24.07	16.542	N/A	Pass
CH100	5500	28.41	16.645	N/A	Pass
CH116	5580	24.39	16.519	N/A	Pass
CH140	5700	28.54	16.639	N/A	Pass

Mode 2: Transmit by 802.11n(20MHz)					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH36	5180	22.47	17.655	5171.1725	Pass
CH44	5220	22.53	17.635	N/A	Pass
CH48	5240	23.26	17.648	5248.824	Pass
CH52	5260	24.50	17.704	N/A	Pass
CH60	5300	23.69	17.688	N/A	Pass
CH64	5320	23.49	17.678	N/A	Pass
CH100	5500	27.23	17.736	N/A	Pass
CH116	5580	23.53	17.664	N/A	Pass
CH140	5700	25.52	17.762	N/A	Pass

Mode 3: Transmit by 802.11n(40MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH38	5190	39.49	36.067	5171.9665	Pass
CH46	5230	39.38	36.070	5248.035	Pass
CH54	5270	39.15	36.069	N/A	Pass
CH62	5310	39.63	36.068	N/A	Pass
CH102	5510	39.90	36.065	N/A	Pass
CH134	5670	39.88	36.073	N/A	Pass

Mode 4: Transmit by 802.11ac(20MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH36	5180	22.96	17.660	5171.17	Pass
CH44	5220	22.50	17.668	N/A	Pass
CH48	5240	23.14	17.651	5248.8255	Pass
CH52	5260	21.47	17.632	N/A	Pass
CH60	5300	23.52	17.691	N/A	Pass
CH64	5320	23.94	17.681	N/A	Pass
CH100	5500	27.31	17.748	N/A	Pass
CH116	5580	24.46	17.685	N/A	Pass
CH140	5700	27.75	17.747	N/A	Pass

Mode 5: Transmit by 802.11ac(40MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH38	5190	39.74	36.049	5171.9755	Pass
CH46	5230	39.63	36.076	5248.038	Pass
CH54	5270	39.19	36.047	N/A	Pass
CH62	5310	39.39	36.103	N/A	Pass
CH102	5510	40.23	36.110	N/A	Pass
CH134	5670	39.60	36.103	N/A	Pass

Mode 6: Transmit by 802.11ac(80MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH42	5210	81.80	75.586	5172.207/5247.793	Pass
CH58	5290	81.05	75.399	N/A	Pass
CH106	5530	82.03	75.615	N/A	Pass

Mode 7: Transmit by 802.11ax(20MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH36	5180	21.05	18.987	5170.5065	Pass
CH44	5220	23.89	19.008	N/A	Pass
CH48	5240	22.59	18.989	5249.4945	Pass
CH52	5260	21.11	19.017	N/A	Pass
CH60	5300	22.18	18.966	N/A	Pass
CH64	5320	21.32	18.985	N/A	Pass
CH100	5500	26.18	19.052	N/A	Pass
CH116	5580	23.65	19.026	N/A	Pass
CH140	5700	27.98	19.038	N/A	Pass

Mode 8: Transmit by 802.11ax(40MHz)


Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH38	5190	40.47	37.749	5171.1255	Pass
CH46	5230	40.35	37.738	5248.8690	Pass
CH54	5270	39.72	37.656	N/A	Pass
CH62	5310	40.52	37.756	N/A	Pass
CH102	5510	40.49	37.735	N/A	Pass
CH134	5670	40.30	37.726	N/A	Pass

Mode 9: Transmit by 802.11ax(80MHz)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
CH42	5210	81.83	77.261	5171.3695/5248.6305	Pass
CH58	5290	81.53	77.111	N/A	Pass
CH106	5530	81.76	77.188	N/A	Pass

Note:

1. We have evaluated SISO and MIMO mode, shown in the report is the worst data. worst data Antenna is Antenna1.
- 2.The worst case of Occupied Bandwidth as below:

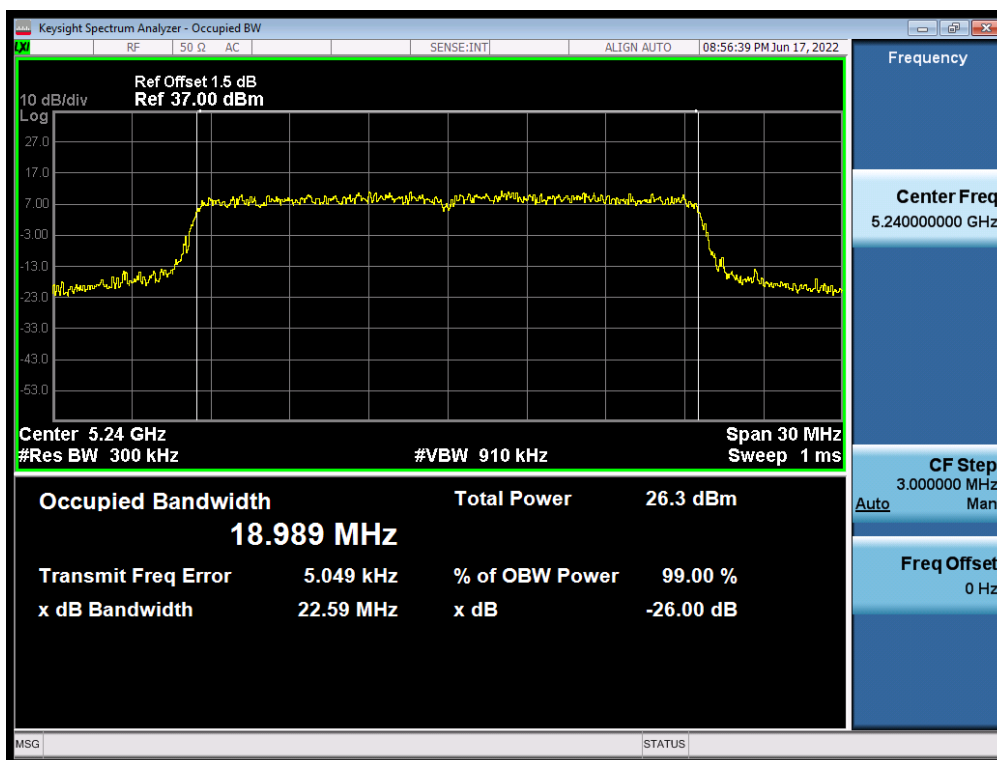
Mode 7: CH48 (5240MHz)

6. 6dB bandwidth

6.1. Test Equipment

6dB bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
Coaxial Cable	Woken	N/A	N/A	2022.01.18	2023.01.17
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

6.2. Test Setup

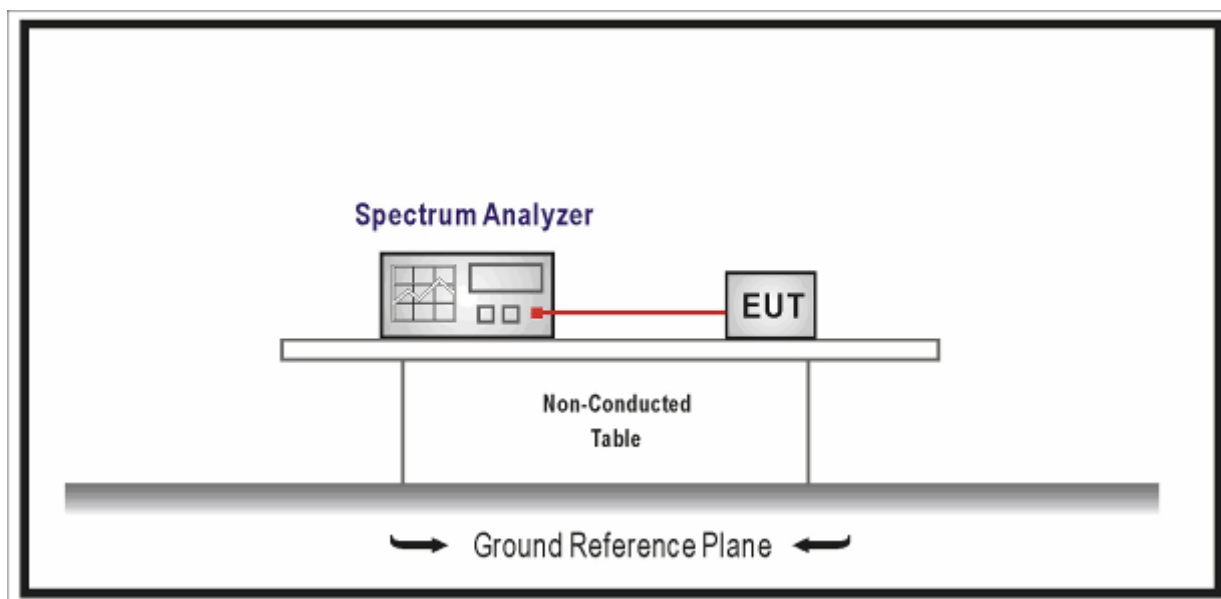




6.3. Limit

> 500 kHz

6.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
	☐ ANSI C63.10	12.4.1	Emission bandwidth (26dB)
	☐ ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
	☐ FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
	☒ FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☐	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

6.5. EUT test Axis definition

Item	6dB bandwidth				
Device Category	☐	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☒	Client use			
Test mode	Mode 1-9				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☒	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					

6.6. Test Result

Product Name	:	VR All-In-One Headset		
Test Mode	:	Mode 1-9		
Mode 1: Transmit by 802.11a				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
149	5745	16.33	>500	Pass
157	5785	16.05		Pass
165	5825	16.05		Pass
Mode 2: Transmit by 802.11n(20MHz)				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
149	5745	17.57	>500	Pass
157	5785	17.61		Pass
165	5825	17.22		Pass
Mode 3: Transmit by 802.11n(40MHz)				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
151	5755	36.07	>500	Pass
159	5795	36.34		Pass
Mode 4: Transmit by 802.11ac(20MHz)				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
149	5745	17.61	>500	Pass
157	5785	17.32		Pass
165	5825	17.61		Pass
Mode 5: Transmit by 802.11ac(40MHz)				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
151	5755	36.09	>500	Pass
159	5795	36.20		Pass
Mode 6: Transmit by 802.11ac(80MHz)				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
155	5775	75.73	>500	Pass

Mode 7: Transmit by 802.11ax(20MHz)

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
149	5745	18.89	>500	Pass
157	5785	18.83		Pass
165	5825	18.49		Pass

Mode 8: Transmit by 802.11ax(40MHz)

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
151	5755	38.10	>500	Pass
159	5795	37.44		Pass


Mode 9: Transmit by 802.11ax(80MHz)

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
155	5775	77.77	>500	Pass

Note:

1.We have evaluated SISO and MIMO mode, shown in the report is the worst data. worst data Antenna is Antenna1.

2.The worst case of 6dB Bandwidth as below:

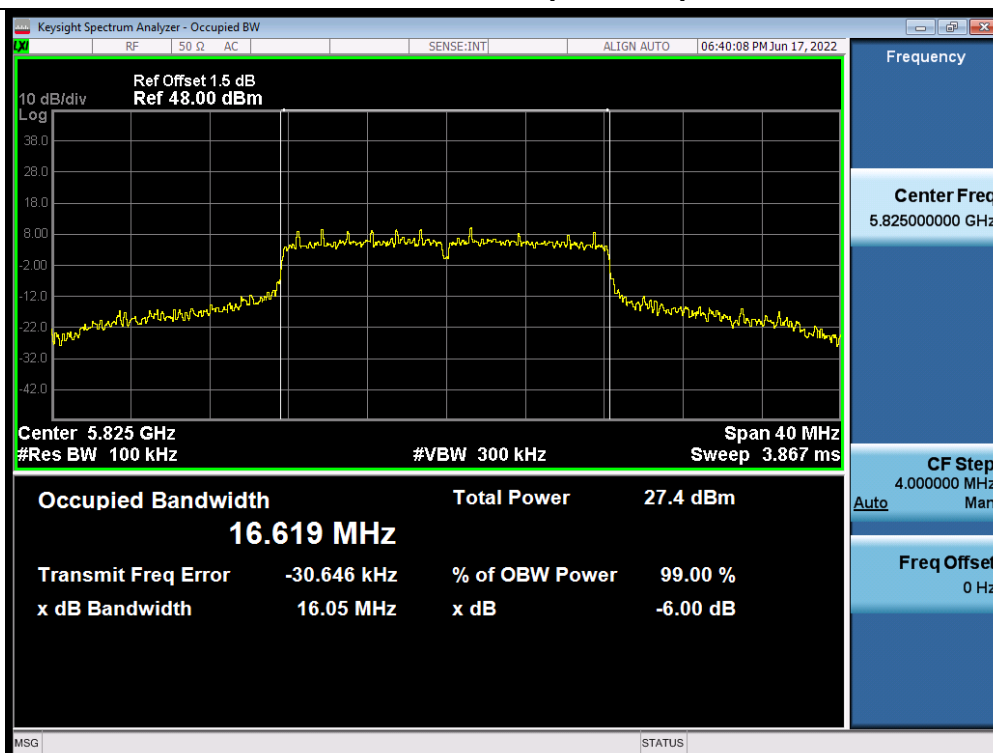
Mode 1: CH165 (5825MHz)

7. Power Output

7.1. Test Equipment

Power Output / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
Coaxial Cable	Woken	N/A	N/A	2022.01.18	2023.01.17
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

7.2. Test Setup

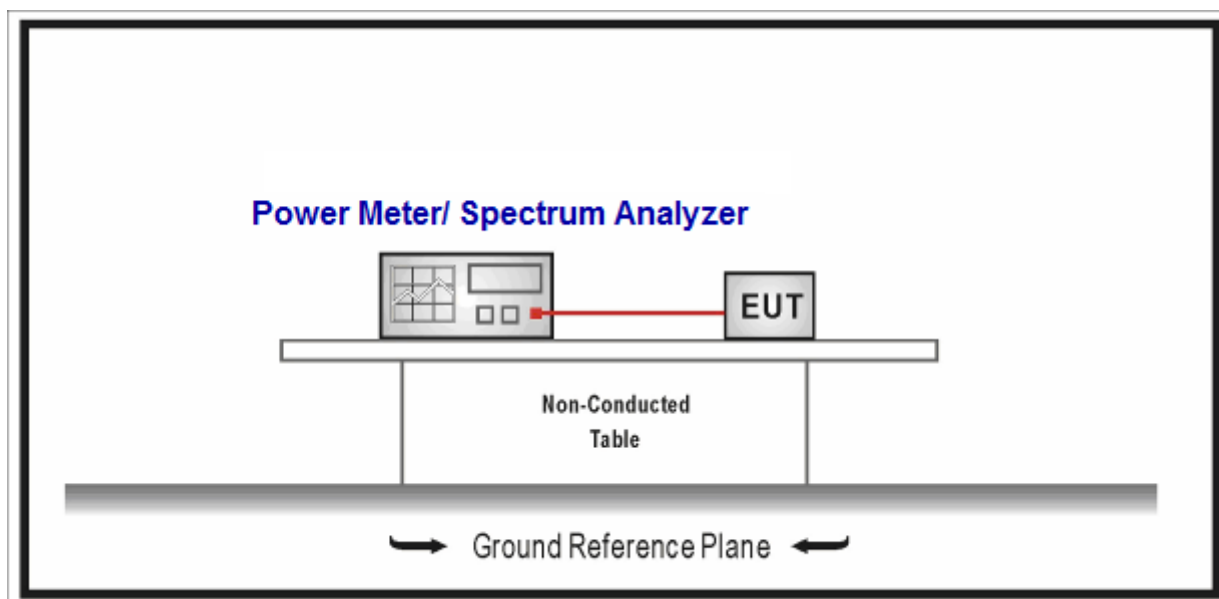

7.3. Limit




Fundamental emission output power Limit		
☒	For the band 5.15-5.25 GHz	
	☐	Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees
	☐	Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$
	☒	Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$
☒	For the band 5.25-5.35 GHz:	
	☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \text{ Log } B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \text{ Log } B) - (G_{TX} - 6)$
☒	For the 5.47-5.725 GHz:	
	☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \text{ Log } B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \text{ Log } B) - (G_{TX} - 6)$
☒	For the band 5.725-5.85 GHz:	
	☒	The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
Note 1 : G_{TX} directional gain of transmitting antennas.		
Note 2 : P_{out} is maximum conducted output power .		

7.4. Test Procedure

Fundamental emission output power Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		12.3	Maximum conducted output power
	☐	ANSI C63.10	12.3.2	Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver
		☐ ANSI C63.10	12.3.2.2	Method SA-1
		☐ ANSI C63.10	12.3.2.3	Method SA-1A (alternative)
		☐ ANSI C63.10	12.3.2.4	Method SA-2
		☐ ANSI C63.10	12.3.2.5	Method SA-2A (alternative)
		☐ ANSI C63.10	12.3.2.6	Method SA-3
		☐ ANSI C63.10	12.3.2.7	Method SA-3A (alternative)
	☒	ANSI C63.10	12.3.3	Maximum conducted output power using a power meter
		☐ ANSI C63.10	12.3.3.1	Method PM
		☒ ANSI C63.10	12.3.3.2	Method PM-G

Directional Gain Calculations for In-Band test method				
	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☐	KDB 662911		F2)e)	Spatial stream
	☒	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☐	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

7.5. EUT test Axis definition

Item	output power				
Device Category	☐	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☒	Client use			
Test mode	Mode 1-9				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☒	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					

7.6. Test Result

SISO: Antenna1

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	19.47	≤24	Pass
	44	5220	19.18	≤24	Pass
	48	5240	19.54	≤24	Pass
	52	5260	19.88	≤24	Pass
	60	5300	19.56	≤24	Pass
	64	5320	19.44	≤24	Pass
	100	5500	20.14	≤24	Pass
	116	5580	19.38	≤24	Pass
	140	5700	19.85	≤24	Pass
	149	5745	19.66	≤30	Pass
	157	5785	19.74	≤30	Pass
	165	5825	20.51	≤30	Pass
Mode 2	36	5180	18.44	≤24	Pass
	44	5220	18.11	≤24	Pass
	48	5240	18.42	≤24	Pass
	52	5260	19.72	≤24	Pass
	60	5300	19.45	≤24	Pass
	64	5320	19.31	≤24	Pass
	100	5500	20.01	≤24	Pass
	116	5580	19.23	≤24	Pass
	140	5700	19.69	≤24	Pass
	149	5745	19.51	≤30	Pass
	157	5785	19.61	≤30	Pass
	165	5825	20.39	≤30	Pass
Mode 3	38	5190	15.95	≤24	Pass
	46	5230	15.91	≤24	Pass

	54	5270	16.39	≤ 24	Pass
	62	5310	16.09	≤ 24	Pass
	102	5510	18.09	≤ 24	Pass
	118	5590	17.83	≤ 24	Pass
	134	5670	17.32	≤ 24	Pass
	151	5755	18.11	≤ 30	Pass
	159	5795	18.36	≤ 30	Pass
Mode 4	36	5180	18.41	≤ 24	Pass
	44	5220	18.05	≤ 24	Pass
	48	5240	18.37	≤ 24	Pass
	52	5260	19.69	≤ 24	Pass
	60	5300	19.38	≤ 24	Pass
	64	5320	19.27	≤ 24	Pass
	100	5500	19.95	≤ 24	Pass
	116	5580	19.21	≤ 24	Pass
	140	5700	19.70	≤ 24	Pass
	149	5745	19.51	≤ 30	Pass
	157	5785	19.59	≤ 30	Pass
	165	5825	20.41	≤ 30	Pass
Mode 5	38	5190	15.96	≤ 24	Pass
	46	5230	15.91	≤ 24	Pass
	54	5270	16.38	≤ 24	Pass
	62	5310	16.11	≤ 24	Pass
	102	5510	18.08	≤ 24	Pass
	118	5590	17.81	≤ 24	Pass
	134	5670	17.28	≤ 24	Pass
	151	5755	18.12	≤ 30	Pass
	159	5795	18.35	≤ 30	Pass
Mode 6	42	5210	14.99	≤ 24	Pass
	58	5290	15.22	≤ 24	Pass

	106	5530	15.62	≤ 24	Pass
	122	5610	15.46	≤ 24	Pass
	155	5775	16.41	≤ 30	Pass
Mode 7	36	5180	18.75	≤ 24	Pass
	44	5220	18.41	≤ 24	Pass
	48	5240	18.72	≤ 24	Pass
	52	5260	19.07	≤ 24	Pass
	60	5300	18.76	≤ 24	Pass
	64	5320	18.72	≤ 24	Pass
	100	5500	20.03	≤ 24	Pass
	116	5580	19.29	≤ 24	Pass
	140	5700	19.75	≤ 24	Pass
	149	5745	19.61	≤ 30	Pass
	157	5785	19.69	≤ 30	Pass
	165	5825	20.48	≤ 30	Pass
Mode 8	38	5190	15.85	≤ 24	Pass
	46	5230	15.79	≤ 24	Pass
	54	5270	15.28	≤ 24	Pass
	62	5310	15.05	≤ 24	Pass
	102	5510	17.15	≤ 24	Pass
	118	5590	16.82	≤ 24	Pass
	134	5670	16.25	≤ 24	Pass
	151	5755	17.15	≤ 30	Pass
	159	5795	17.41	≤ 30	Pass
Mode 9	42	5210	14.93	≤ 24	Pass
	58	5290	15.15	≤ 24	Pass
	106	5530	15.66	≤ 24	Pass
	122	5610	15.49	≤ 24	Pass
	155	5775	16.31	≤ 30	Pass

SISO: Antenna2

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	19.19	≤24	Pass
	44	5220	18.88	≤24	Pass
	48	5240	19.11	≤24	Pass
	52	5260	19.34	≤24	Pass
	60	5300	18.49	≤24	Pass
	64	5320	18.18	≤24	Pass
	100	5500	19.96	≤24	Pass
	116	5580	18.53	≤24	Pass
	140	5700	19.19	≤24	Pass
	149	5745	19.12	≤30	Pass
	157	5785	19.57	≤30	Pass
	165	5825	20.56	≤30	Pass
Mode 2	36	5180	18.79	≤24	Pass
	44	5220	18.61	≤24	Pass
	48	5240	18.84	≤24	Pass
	52	5260	18.85	≤24	Pass
	60	5300	18.23	≤24	Pass
	64	5320	18.12	≤24	Pass
	100	5500	19.07	≤24	Pass
	116	5580	18.01	≤24	Pass
	140	5700	18.66	≤24	Pass
	149	5745	18.61	≤30	Pass
	157	5785	19.04	≤30	Pass
	165	5825	19.63	≤30	Pass
Mode 3	38	5190	16.64	≤24	Pass
	46	5230	16.70	≤24	Pass
	54	5270	16.97	≤24	Pass

	62	5310	15.98	≤ 24	Pass
	102	5510	18.90	≤ 24	Pass
	118	5590	18.29	≤ 24	Pass
	134	5670	17.69	≤ 24	Pass
	151	5755	18.33	≤ 30	Pass
	159	5795	18.87	≤ 30	Pass
Mode 4	36	5180	18.78	≤ 24	Pass
	44	5220	18.58	≤ 24	Pass
	48	5240	18.83	≤ 24	Pass
	52	5260	18.80	≤ 24	Pass
	60	5300	18.52	≤ 24	Pass
	64	5320	18.55	≤ 24	Pass
	100	5500	19.07	≤ 24	Pass
	116	5580	18.42	≤ 24	Pass
	140	5700	18.61	≤ 24	Pass
	149	5745	18.58	≤ 30	Pass
	157	5785	19.02	≤ 30	Pass
	165	5825	19.59	≤ 30	Pass
Mode 5	38	5190	16.56	≤ 24	Pass
	46	5230	16.58	≤ 24	Pass
	54	5270	16.89	≤ 24	Pass
	62	5310	15.93	≤ 24	Pass
	102	5510	18.95	≤ 24	Pass
	118	5590	18.36	≤ 24	Pass
	134	5670	18.12	≤ 24	Pass
	151	5755	18.33	≤ 30	Pass
	159	5795	18.85	≤ 30	Pass
Mode 6	42	5210	15.55	≤ 24	Pass
	58	5290	15.33	≤ 24	Pass
	106	5530	16.35	≤ 24	Pass

	122	5610	15.96	≤ 24	Pass
	155	5775	17.08	≤ 30	Pass
Mode 7	36	5180	18.91	≤ 24	Pass
	44	5220	18.67	≤ 24	Pass
	48	5240	18.91	≤ 24	Pass
	52	5260	19.11	≤ 24	Pass
	60	5300	18.19	≤ 24	Pass
	64	5320	18.59	≤ 24	Pass
	100	5500	19.02	≤ 24	Pass
	116	5580	18.01	≤ 24	Pass
	140	5700	18.58	≤ 24	Pass
	149	5745	18.50	≤ 30	Pass
	157	5785	18.96	≤ 30	Pass
	165	5825	19.53	≤ 30	Pass
Mode 8	38	5190	16.57	≤ 24	Pass
	46	5230	16.62	≤ 24	Pass
	54	5270	15.91	≤ 24	Pass
	62	5310	15.83	≤ 24	Pass
	102	5510	17.88	≤ 24	Pass
	118	5590	17.30	≤ 24	Pass
	134	5670	16.67	≤ 24	Pass
	151	5755	17.45	≤ 30	Pass
	159	5795	18.39	≤ 30	Pass
Mode 9	42	5210	15.66	≤ 24	Pass
	58	5290	15.42	≤ 24	Pass
	106	5530	16.44	≤ 24	Pass
	122	5610	16.03	≤ 24	Pass
	155	5775	17.17	≤ 30	Pass

CDD: Aantenna1+2

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm) Antenna1	Conducted Power (dBm) Antenna2	Conducted Power (dBm) Antenna1+2	Conducted Power Limit (dBm)	Result
Mode 1	36	5180	15.67	15.98	18.84	≤24	Pass
	44	5220	15.27	15.65	18.47	≤24	Pass
	48	5240	15.57	15.86	18.73	≤24	Pass
	52	5260	15.93	16.08	19.02	≤24	Pass
	60	5300	15.56	15.73	18.66	≤24	Pass
	64	5320	15.52	15.51	18.53	≤24	Pass
	100	5500	16.32	16.61	19.48	≤24	Pass
	116	5580	15.52	15.55	18.55	≤24	Pass
	140	5700	15.98	16.02	19.01	≤24	Pass
	149	5745	15.37	15.68	18.54	≤30	Pass
	157	5785	15.43	16.03	18.75	≤30	Pass
	165	5825	16.24	16.61	19.44	≤30	Pass
Mode 2	36	5180	15.36	15.85	18.62	≤24	Pass
	44	5220	15.04	15.52	18.30	≤24	Pass
	48	5240	15.33	15.81	18.59	≤24	Pass
	52	5260	15.63	15.94	18.80	≤24	Pass
	60	5300	15.18	14.92	18.06	≤24	Pass
	64	5320	15.13	15.07	18.11	≤24	Pass
	100	5500	15.98	16.48	19.25	≤24	Pass
	116	5580	15.11	15.39	18.26	≤24	Pass
	140	5700	15.61	15.87	18.75	≤24	Pass
	149	5745	15.17	15.68	18.44	≤30	Pass
	157	5785	15.23	16.05	18.67	≤30	Pass
	165	5825	16.03	16.65	19.36	≤30	Pass
Mode 3	38	5190	12.79	13.30	16.06	≤24	Pass
	46	5230	12.76	13.27	16.03	≤24	Pass

	54	5270	13.19	13.61	16.42	≤24	Pass
	62	5310	12.98	12.64	15.82	≤24	Pass
	102	5510	14.24	15.09	17.70	≤24	Pass
	118	5590	15.08	15.63	18.37	≤24	Pass
	134	5670	14.61	15.03	17.84	≤24	Pass
	151	5755	15.38	15.90	18.66	≤30	Pass
	159	5795	15.37	16.32	18.88	≤30	Pass
Mode 4	36	5180	15.03	15.40	18.23	≤24	Pass
	44	5220	14.81	15.39	18.12	≤24	Pass
	48	5240	15.14	15.64	18.41	≤24	Pass
	52	5260	15.71	16.04	18.89	≤24	Pass
	60	5300	15.33	15.18	18.27	≤24	Pass
	64	5320	15.32	14.89	18.12	≤24	Pass
	100	5500	15.96	16.47	19.23	≤24	Pass
	116	5580	15.15	15.36	18.27	≤24	Pass
	140	5700	15.51	15.86	18.70	≤24	Pass
	149	5745	15.20	15.72	18.48	≤30	Pass
	157	5785	15.25	16.05	18.68	≤30	Pass
	165	5825	16.08	16.65	19.38	≤30	Pass
Mode 5	38	5190	13.33	13.74	16.55	≤24	Pass
	46	5230	13.24	13.77	16.52	≤24	Pass
	54	5270	13.70	14.07	16.90	≤24	Pass
	62	5310	13.48	13.10	16.30	≤24	Pass
	102	5510	14.47	15.32	17.93	≤24	Pass
	118	5590	14.08	14.67	17.40	≤24	Pass
	134	5670	14.09	14.52	17.32	≤24	Pass
	151	5755	14.38	14.83	17.62	≤30	Pass
	159	5795	14.63	15.70	18.21	≤30	Pass
Mode 6	42	5210	12.32	12.74	15.55	≤24	Pass
	58	5290	12.48	12.48	15.49	≤24	Pass

	106	5530	13.01	13.73	16.40	≤24	Pass
	122	5610	12.82	13.17	16.01	≤24	Pass
	155	5775	13.62	14.45	17.07	≤30	Pass
Mode 7	36	5180	15.87	16.28	19.09	≤24	Pass
	44	5220	15.48	15.92	18.72	≤24	Pass
	48	5240	15.77	16.13	18.96	≤24	Pass
	52	5260	16.14	16.33	19.25	≤24	Pass
	60	5300	15.71	15.46	18.60	≤24	Pass
	64	5320	15.74	15.13	18.46	≤24	Pass
	100	5500	15.75	16.22	19.00	≤24	Pass
	116	5580	15.01	15.24	18.14	≤24	Pass
	140	5700	15.54	15.71	18.64	≤24	Pass
	149	5745	14.94	15.28	18.12	≤30	Pass
	157	5785	14.67	15.49	18.11	≤30	Pass
	165	5825	15.92	16.44	19.20	≤30	Pass
Mode 8	38	5190	13.10	13.70	16.42	≤24	Pass
	46	5230	13.12	13.62	16.39	≤24	Pass
	54	5270	12.61	13.04	15.84	≤24	Pass
	62	5310	12.41	12.07	15.25	≤24	Pass
	102	5510	14.40	15.32	17.89	≤24	Pass
	118	5590	14.12	14.58	17.37	≤24	Pass
	134	5670	13.65	13.93	16.80	≤24	Pass
	151	5755	14.43	14.85	17.66	≤30	Pass
	159	5795	14.57	15.72	18.19	≤30	Pass
Mode 9	42	5210	11.91	12.43	15.19	≤24	Pass
	58	5290	12.13	12.06	15.11	≤24	Pass
	106	5530	12.61	13.21	15.93	≤24	Pass
	122	5610	12.63	12.92	15.79	≤24	Pass
	155	5775	13.20	14.01	16.63	≤30	Pass

Power Setting:

Mode	Channel	Test Frequency (MHz)	Power Setting		
			SISO Antenna1	SISO Antenna2	CDD Antenna1+2
Mode 1	36	5180	21.00	20.00	17.00
	44	5220	21.00	20.00	17.00
	48	5240	21.00	20.00	17.00
	52	5260	21.00	20.00	17.00
	60	5300	21.00	20.00	17.00
	64	5320	21.00	20.00	17.00
	100	5500	21.00	20.00	17.00
	116	5580	21.00	20.00	17.00
	140	5700	21.00	20.00	17.00
	149	5745	21.00	19.00	16.00
	157	5785	21.00	19.00	16.00
	165	5825	21.00	19.00	16.00
Mode 2	36	5180	20.00	20.00	17.00
	44	5220	20.00	20.00	17.00
	48	5240	20.00	20.00	17.00
	52	5260	21.00	20.00	17.00
	60	5300	21.00	20.00	17.00
	64	5320	21.00	20.00	17.00
	100	5500	21.00	20.00	17.00
	116	5580	21.00	20.00	17.00
	140	5700	21.00	20.00	17.00
	149	5745	21.00	19.00	16.00
	157	5785	21.00	19.00	16.00
	165	5825	21.00	19.00	16.00
Mode 3	38	5190	17.00	17.00	14.00
	46	5230	17.00	17.00	14.00
	54	5270	17.00	17.00	14.00

	62	5310	17.00	17.00	14.00
	102	5510	19.00	19.00	17.00
	118	5590	19.00	19.00	17.00
	134	5670	19.00	19.00	17.00
	151	5755	19.00	19.00	17.00
	159	5795	19.00	19.00	17.00
Mode 4	36	5180	20.00	20.00	17.00
	44	5220	20.00	20.00	17.00
	48	5240	20.00	20.00	17.00
	52	5260	21.00	20.00	17.00
	60	5300	21.00	20.00	17.00
	64	5320	21.00	20.00	17.00
	100	5500	21.00	20.00	17.00
	116	5580	21.00	20.00	17.00
	140	5700	21.00	20.00	17.00
	149	5745	21.00	19.00	16.00
	157	5785	21.00	19.00	16.00
	165	5825	21.00	19.00	16.00
Mode 5	38	5190	17.00	17.00	15.00
	46	5230	17.00	17.00	15.00
	54	5270	17.00	17.00	15.00
	62	5310	17.00	17.00	15.00
	102	5510	19.00	19.00	16.00
	118	5590	19.00	19.00	16.00
	134	5670	19.00	19.00	16.00
	151	5755	19.00	19.00	16.00
	159	5795	19.00	19.00	16.00
Mode 6	42	5210	16.00	16.00	14.00
	58	5290	16.00	16.00	14.00
	106	5530	17.00	17.00	14.00


	122	5610	17.00	17.00	14.00
	155	5775	17.00	17.00	14.00
Mode 7	36	5180	20.00	20.00	17.00
	44	5220	20.00	20.00	17.00
	48	5240	20.00	20.00	17.00
	52	5260	20.00	20.00	17.00
	60	5300	20.00	20.00	17.00
	64	5320	20.00	20.00	17.00
	100	5500	21.00	20.00	17.00
	116	5580	21.00	20.00	17.00
	140	5700	21.00	20.00	17.00
	149	5745	21.00	19.00	16.00
	157	5785	21.00	19.00	16.00
	165	5825	21.00	19.00	16.00
Mode 8	38	5190	17.00	17.00	15.00
	46	5230	17.00	17.00	15.00
	54	5270	16.00	16.00	14.00
	62	5310	16.00	16.00	14.00
	102	5510	18.00	18.00	16.00
	118	5590	18.00	18.00	16.00
	134	5670	18.00	18.00	16.00
	151	5755	18.00	18.00	16.00
	159	5795	18.00	18.00	16.00
Mode 9	42	5210	16.00	16.00	13.00
	58	5290	16.00	16.00	13.00
	106	5530	17.00	17.00	14.00
	122	5610	17.00	17.00	14.00
	155	5775	17.00	17.00	14.00

8. Maximum Power Spectral Density

8.1. Test Equipment

Maximum Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
Coaxial Cable	Woken	N/A	N/A	2022.01.18	2023.01.17
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

8.2. Test Setup

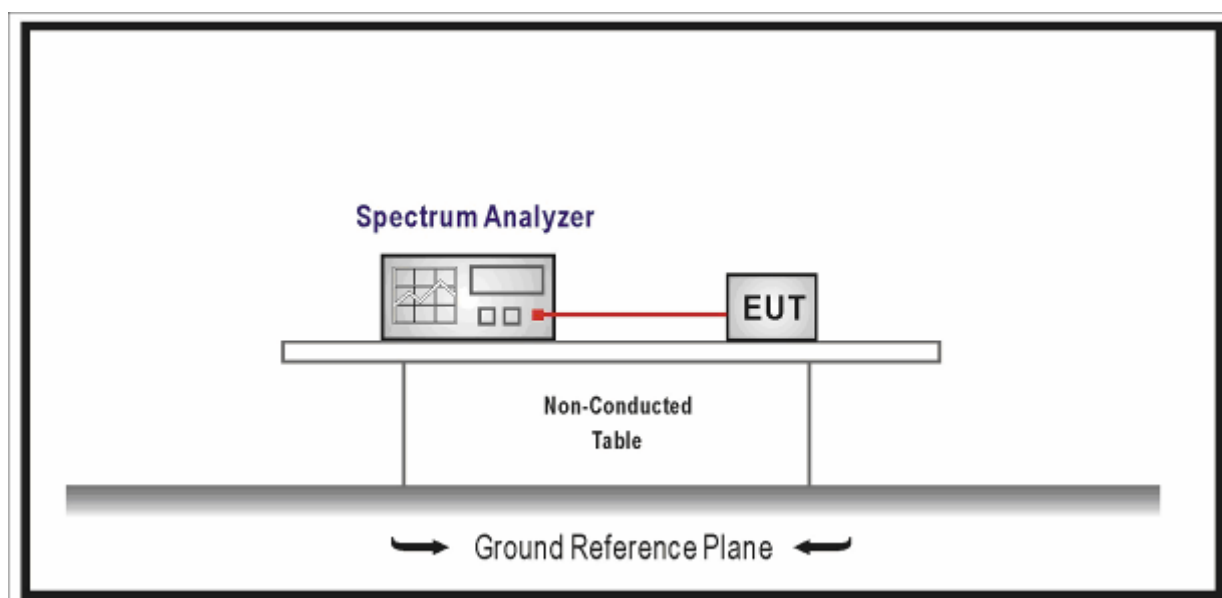

8.3. Limit





Maximum power spectral density Limit	
☒	For the band 5.15-5.25 GHz
☐	Outdoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
☐	Indoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
☐	Fixed point-to-point access points: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 23)$
☒	Mobile and portable client devices: the maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.25-5.35 GHz:
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.47-5.725 GHz:
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the band 5.725-5.85 GHz:
☒	The maximum power spectral density shall not exceed 30 dBm/500KHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
Note 1: G_{TX} directional gain of transmitting antennas.	
Note 2: P_{out} is maximum power spectral density.	

Directional Gain Calculations for In-Band test method				
	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☐	KDB 662911		F2)e)	Spatial stream
	☒	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☐	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

8.4. Test Procedure

Fundamental emission output power Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	12.5	Peak power spectral density
☒	FCC KDB 789033 D02v02r01	F	Maximum Power Spectral Density (PSD)

8.5. EUT test Axis definition

Item	Power Spectral Density			
Device Category	☐	Indoor use		
	☐	Outdoor use		
	☐	Fix position use		
	☒	Client use		
Test mode	Mode 1-9			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☒	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				
	☐	Chain 1	Chain 2	Chain 3
				

8.6. Test Result

Product Name	:	VR All-In-One Headset
Test Mode	:	Mode 1~9

SISO: worst Antenna1

Mode 1: Transmit by 802.11a						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	8.355	0.07	8.425	11	Pass
CH44	5220	7.479	0.07	7.549	11	Pass
CH48	5240	8.138	0.07	8.208	11	Pass
CH52	5260	8.371	0.07	8.441	11	Pass
CH60	5300	8.071	0.07	8.141	11	Pass
CH64	5320	8.051	0.07	8.121	11	Pass
CH100	5500	8.319	0.07	8.389	11	Pass
CH116	5580	7.791	0.07	7.861	11	Pass
CH140	5700	8.431	0.07	8.501	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	5.709	0.07	5.779	30	Pass
CH157	5785	5.956	0.07	6.026	30	Pass
CH165	5825	6.943	0.07	7.013	30	Pass

Mode 2: Transmit by 802.11n(20MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	6.837	0	6.837	11	Pass
CH44	5220	6.610	0	6.610	11	Pass
CH48	5240	6.754	0	6.754	11	Pass
CH52	5260	8.423	0	8.423	11	Pass
CH60	5300	8.235	0	8.235	11	Pass
CH64	5320	7.423	0	7.423	11	Pass
CH100	5500	8.582	0	8.582	11	Pass
CH116	5580	7.843	0	7.843	11	Pass
CH140	5700	8.262	0	8.262	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	5.399	0	5.399	30	Pass
CH157	5785	5.485	0	5.485	30	Pass
CH165	5825	5.988	0	5.988	30	Pass

Mode 3: Transmit by 802.11n(40MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	1.033	0	1.033	11	Pass
CH46	5230	1.098	0	1.098	11	Pass
CH54	5270	1.321	0	1.321	11	Pass
CH62	5310	0.902	0	0.902	11	Pass
CH102	5510	3.027	0	3.027	11	Pass
CH134	5670	2.977	0	2.977	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	0.760	0	0.760	30	Pass
CH159	5795	1.058	0	1.058	30	Pass

Mode 4: Transmit by 802.11ac(20MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	7.161	0	7.161	11	Pass
CH44	5220	6.517	0	6.517	11	Pass
CH48	5240	7.300	0	7.300	11	Pass
CH52	5260	8.195	0	8.195	11	Pass
CH60	5300	8.230	0	8.230	11	Pass
CH64	5320	8.335	0	8.335	11	Pass
CH100	5500	8.861	0	8.861	11	Pass
CH116	5580	8.034	0	8.034	11	Pass
CH140	5700	8.297	0	8.297	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	4.934	0	4.934	30	Pass
CH157	5785	5.423	0	5.423	30	Pass
CH165	5825	6.210	0	6.210	30	Pass

Mode 5: Transmit by 802.11ac(40MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	0.972	0	0.972	11	Pass
CH46	5230	0.902	0	0.902	11	Pass
CH54	5270	1.085	0	1.085	11	Pass
CH62	5310	1.088	0	1.088	11	Pass
CH102	5510	3.232	0	3.232	11	Pass
CH134	5670	2.811	0	2.811	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	0.922	0	0.922	30	Pass
CH159	5795	1.734	0	1.734	30	Pass

Mode 6: Transmit by 802.11ac(80MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH42	5210	-3.066	0	-3.066	11	Pass
CH58	5290	-2.430	0	-2.430	11	Pass
CH106	5530	-1.790	0	-1.790	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH155	5775	-3.620	0	-3.620	30	Pass

Mode 7: Transmit by 802.11ax(20MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	6.630	0	6.630	11	Pass
CH44	5220	6.324	0	6.324	11	Pass
CH48	5240	6.615	0	6.615	11	Pass
CH52	5260	7.000	0	7.000	11	Pass
CH60	5300	6.859	0	6.859	11	Pass
CH64	5320	6.721	0	6.721	11	Pass
CH100	5500	7.917	0	7.917	11	Pass
CH116	5580	7.497	0	7.497	11	Pass
CH140	5700	8.100	0	8.100	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	5.078	0	5.078	30	Pass
CH157	5785	5.490	0	5.490	30	Pass
CH165	5825	5.727	0	5.727	30	Pass

Mode 8: Transmit by 802.11ax(40MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	0.914	0	0.914	11	Pass
CH46	5230	0.823	0	0.823	11	Pass
CH54	5270	0.207	0	0.207	11	Pass
CH62	5310	0.075	0	0.075	11	Pass
CH102	5510	2.451	0	2.451	11	Pass
CH134	5670	2.224	0	2.224	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	-0.712	0	-0.712	30	Pass
CH159	5795	0.061	0	0.061	30	Pass

Mode 9: Transmit by 802.11ax(80MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH42	5210	-3.004	0	-3.004	11	Pass
CH58	5290	-2.291	0	-2.291	11	Pass
CH106	5530	-1.896	0	-1.896	11	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH155	5775	-3.677	0	-3.677	30	Pass

Note:

- 1.We have evaluated Ant1 and Ant2 mode, shown in the report is the worst data.
- 2.Total Measurement PSD= Measurement Power Spectral Density+ Duty factor

CDD:

Mode 1: Transmit by 802.11a						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	6.993	0.07	7.063	7.89	Pass
CH44	5220	7.333	0.07	7.403	7.89	Pass
CH48	5240	7.177	0.07	7.247	7.89	Pass
CH52	5260	6.718	0.07	6.788	7.89	Pass
CH60	5300	6.141	0.07	6.211	7.89	Pass
CH64	5320	6.025	0.07	6.095	7.89	Pass
CH100	5500	7.334	0.07	7.404	7.89	Pass
CH116	5580	6.287	0.07	6.357	7.89	Pass
CH140	5700	7.092	0.07	7.162	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	4.677	0.07	4.747	26.89	Pass
CH157	5785	5.974	0.07	6.044	26.89	Pass
CH165	5825	6.292	0.07	6.362	26.89	Pass

Mode 2: Transmit by 802.11n(20MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	6.295	0	6.295	7.89	Pass
CH44	5220	6.258	0	6.258	7.89	Pass
CH48	5240	6.337	0	6.337	7.89	Pass
CH52	5260	6.380	0	6.380	7.89	Pass
CH60	5300	5.866	0	5.866	7.89	Pass
CH64	5320	5.081	0	5.081	7.89	Pass
CH100	5500	7.206	0	7.206	7.89	Pass
CH116	5580	6.883	0	6.883	7.89	Pass
CH140	5700	6.895	0	6.895	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	4.923	0	4.923	26.89	Pass
CH157	5785	5.427	0	5.427	26.89	Pass
CH165	5825	5.861	0	5.861	26.89	Pass

Mode 3: Transmit by 802.11n(40MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	1.255	0	1.255	7.89	Pass
CH46	5230	0.759	0	0.759	7.89	Pass
CH54	5270	1.360	0	1.360	7.89	Pass
CH62	5310	0.558	0	0.558	7.89	Pass
CH102	5510	4.149	0	4.149	7.89	Pass
CH134	5670	2.317	0	2.317	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	-0.127	0	-0.127	26.89	Pass
CH159	5795	0.803	0	0.803	26.89	Pass

Mode 4: Transmit by 802.11ac(20MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	5.704	0	5.704	7.89	Pass
CH44	5220	5.226	0	5.226	7.89	Pass
CH48	5240	5.588	0	5.588	7.89	Pass
CH52	5260	6.607	0	6.607	7.89	Pass
CH60	5300	6.179	0	6.179	7.89	Pass
CH64	5320	5.325	0	5.325	7.89	Pass
CH100	5500	6.880	0	6.880	7.89	Pass
CH116	5580	6.561	0	6.561	7.89	Pass
CH140	5700	6.540	0	6.540	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	4.531	0	4.531	26.89	Pass
CH157	5785	5.325	0	5.325	26.89	Pass
CH165	5825	6.344	0	6.344	26.89	Pass

Mode 5: Transmit by 802.11ac(40MHz)

Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	1.184	0	1.184	7.89	Pass
CH46	5230	0.880	0	0.880	7.89	Pass
CH54	5270	1.593	0	1.593	7.89	Pass
CH62	5310	0.131	0	0.131	7.89	Pass
CH102	5510	3.656	0	3.656	7.89	Pass
CH134	5670	2.263	0	2.263	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	-0.214	0	-0.214	26.89	Pass
CH159	5795	0.100	0	0.100	26.89	Pass

Mode 6: Transmit by 802.11ac(80MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH42	5210	-2.669	0	-2.669	7.89	Pass
CH58	5290	-2.221	0	-2.221	7.89	Pass
CH106	5530	-1.247	0	-1.247	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH155	5775	-3.965	0	-3.965	26.89	Pass

Mode 7: Transmit by 802.11ax(20MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH36	5180	4.679	0	4.679	7.89	Pass
CH44	5220	4.625	0	4.625	7.89	Pass
CH48	5240	4.396	0	4.396	7.89	Pass
CH52	5260	5.119	0	5.119	7.89	Pass
CH60	5300	4.173	0	4.173	7.89	Pass
CH64	5320	3.654	0	3.654	7.89	Pass
CH100	5500	6.716	0	6.716	7.89	Pass
CH116	5580	6.227	0	6.227	7.89	Pass
CH140	5700	6.239	0	6.239	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH149	5745	4.022	0	4.022	26.89	Pass
CH157	5785	4.811	0	4.811	26.89	Pass
CH165	5825	5.215	0	5.215	26.89	Pass

Mode 8: Transmit by 802.11ax(40MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH38	5190	0.540	0	0.540	7.89	Pass
CH46	5230	0.768	0	0.768	7.89	Pass
CH54	5270	0.552	0	0.552	7.89	Pass
CH62	5310	-0.934	0	-0.934	7.89	Pass
CH102	5510	2.448	0	2.448	7.89	Pass
CH134	5670	0.843	0	0.843	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH151	5755	-1.213	0	-1.213	26.89	Pass
CH159	5795	-1.014	0	-1.014	26.89	Pass

Mode 9: Transmit by 802.11ax(80MHz)						
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/MHz)	Duty factor	Total Measurement PSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Worst Chain				
CH42	5210	-3.149	0	-3.149	7.89	Pass
CH58	5290	-2.982	0	-2.982	7.89	Pass
CH106	5530	-1.742	0	-1.742	7.89	Pass
Channel No.	Frequency (MHz)	Measurement Power Spectral Density (dBm/500KHz)	Duty factor	Total Measurement PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
		Worst Chain				
CH155	5775	-4.109	0	-4.109	26.89	Pass

Note:

- 5150-5725MHz PSD Limit = $11\text{dBm/MHz} - 10 \cdot \text{LOG}(\text{Antenna number}) - (3.09 + 10 \cdot \text{LOG}(\text{Antenna number}) - 6)$
5725-5850MHz PSD Limit = $30\text{dBm/MHz} - 10 \cdot \text{LOG}(\text{Antenna number}) - (3.09 + 10 \cdot \text{LOG}(\text{Antenna number}) - 6)$
- Total Measurement PSD= Measurement Power Spectral Density+ Duty factor


9. Band Edge

9.1. Test Equipment

Band Edge/ AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EXASpectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
Amplifier	SKET	LNPA_0118G-45	SK2021041201	2022.04.15	2023.04.14
Preamplifier	EMCI	EMC184045SE	980263	2022.05.21	2023.05.20
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2021.08.23	2022.08.22
Broad-BandHornAntenna	Schwarzbeck	BBHA9170	294	2022.05.19	2023.05.18
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.30	2023.03.29
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2022.03.21	2023.03.20
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

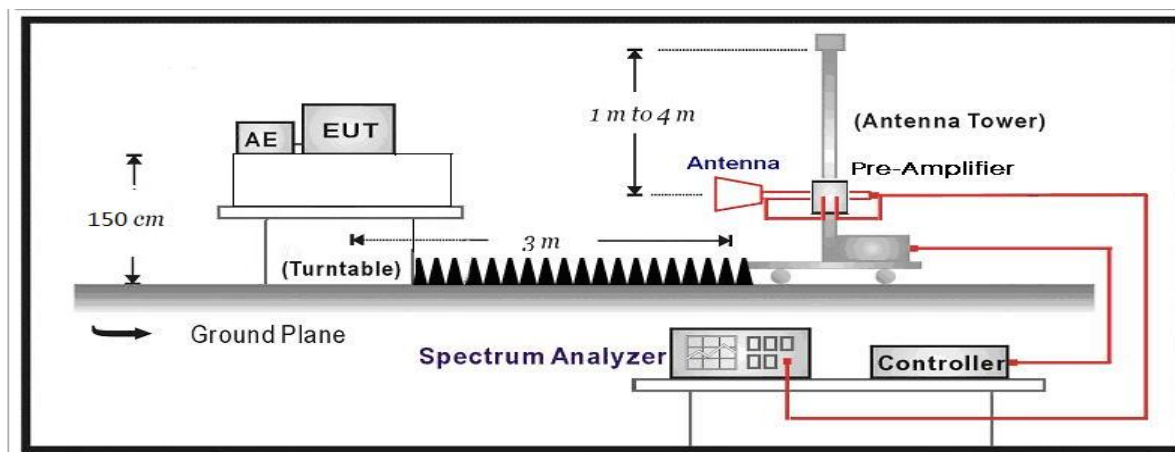


9.3. Limit

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)		
Frequency (MHz)	Distance (m)	Level (dB μ V/m)
0.009-0.490	300	2400/F(kHz)
0.490-1.705	30	24000/F(kHz)
1.705-30.0	30	30
30-88	3	100**
88-216	3	150**
216-960	3	200**
Above 960	3	500

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).






FCC Part 15 Subpart C Paragraph 15.205 (Restricted Band)			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

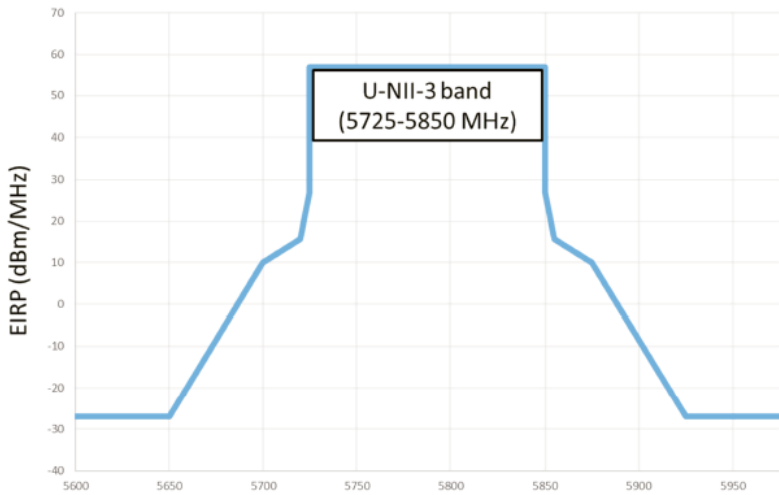FCC Part 15 Subpart E Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)		
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850	 U-NII-3 band (5725-5850 MHz)	

9.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10		12.7.2	Emissions in restricted frequency bands
	☐	ANSI C63.10	12.7.5	Radiated emission measurements
	☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
	☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
	☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
	☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
	☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☐	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
☐	FCC KDB 789033 D02v02r01		G.2	Unwanted Emissions that fall Outside of the Restricted Bands
☐	FCC KDB 789033 D02v02r01		G.1	Unwanted Emissions in the Restricted Bands
	☐	FCC KDB 789033 D02v02r01	G.4	Procedure for Unwanted Emissions Measurements below 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.5	Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6	Procedures for Average Unwanted Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6.c	Method AD (Average detection)—primary method
	☐	FCC KDB 789033 D02v02r01	G.6.d	Method VB (Averaging using reduced video bandwidth): Alternative method.


9.5. EUT test Axis definition

Item	Band Edge				
Device Category	☐	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☒	Client use			
Test mode	Mode 1-9				
Test method	☒	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐	
	☐	Conducted			
	☐	Chain 1			
					
	☐	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					

9.6. Test Result


SISO: Worst Antenna1:

Profile: 2250805R	Page No.: 1
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 11a	

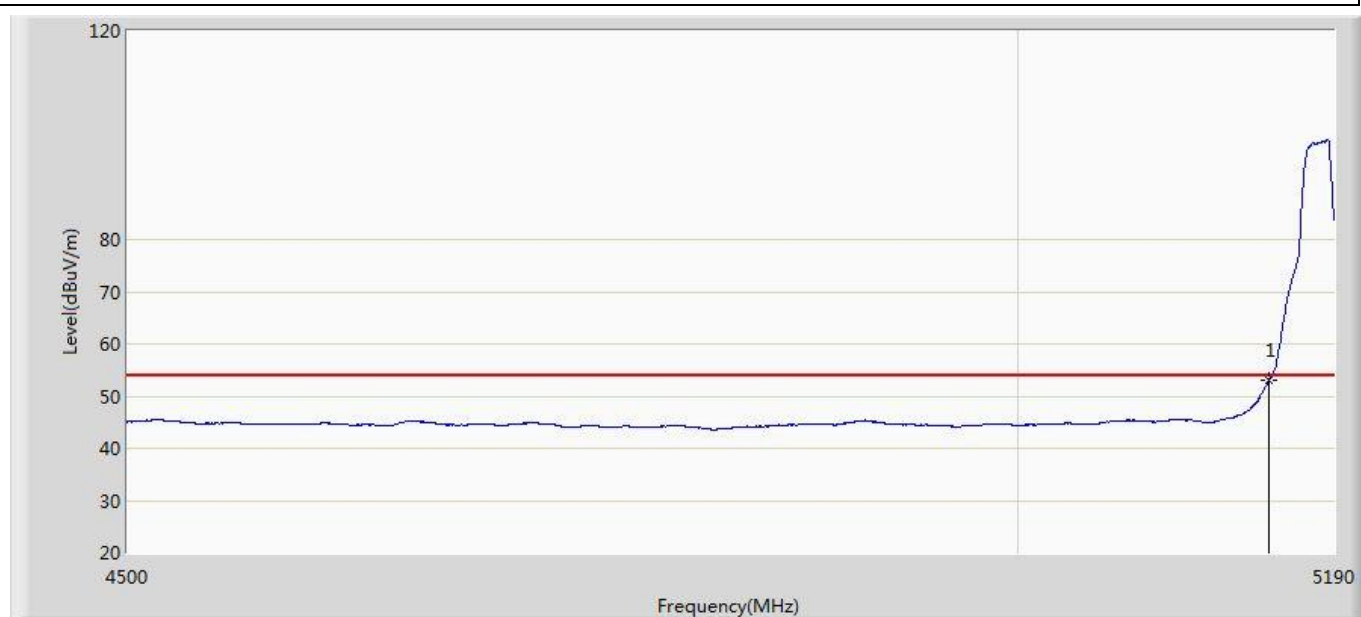


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	53.040	12.579	-0.960	54.000	40.461	AV

Profile: 2250805R	Page No.: 2
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 11a	

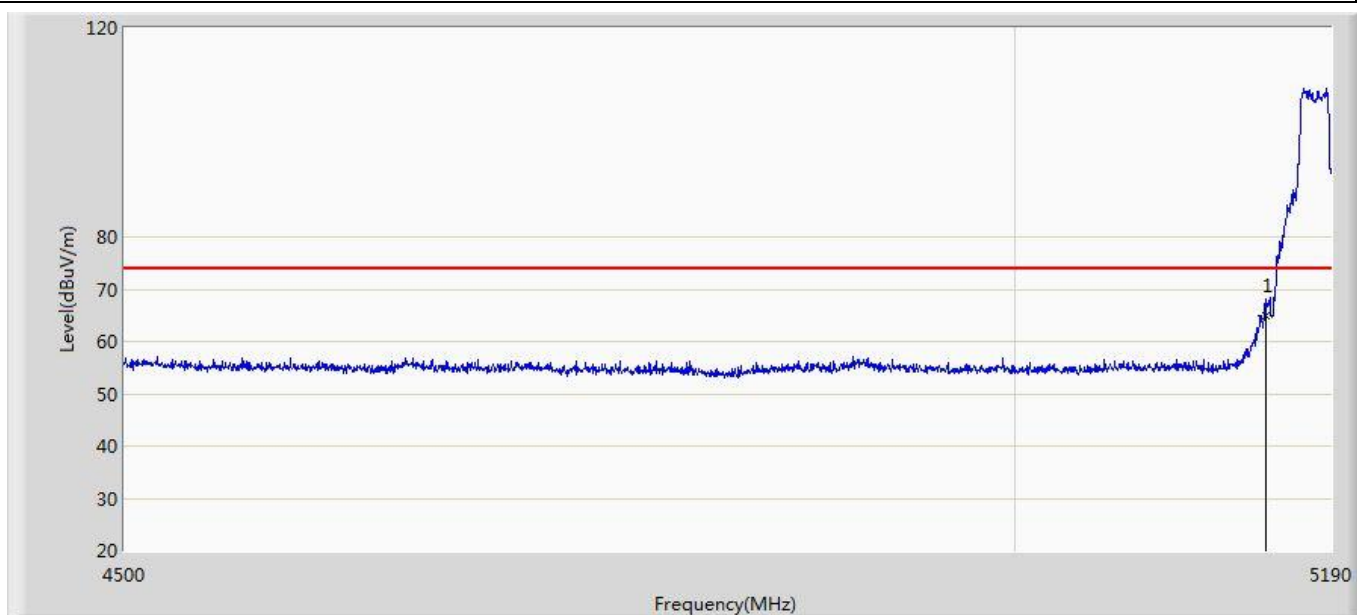


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	64.946	24.485	-9.054	74.000	40.461	PK

Profile: 2250805R	Page No.: 3
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 11a	

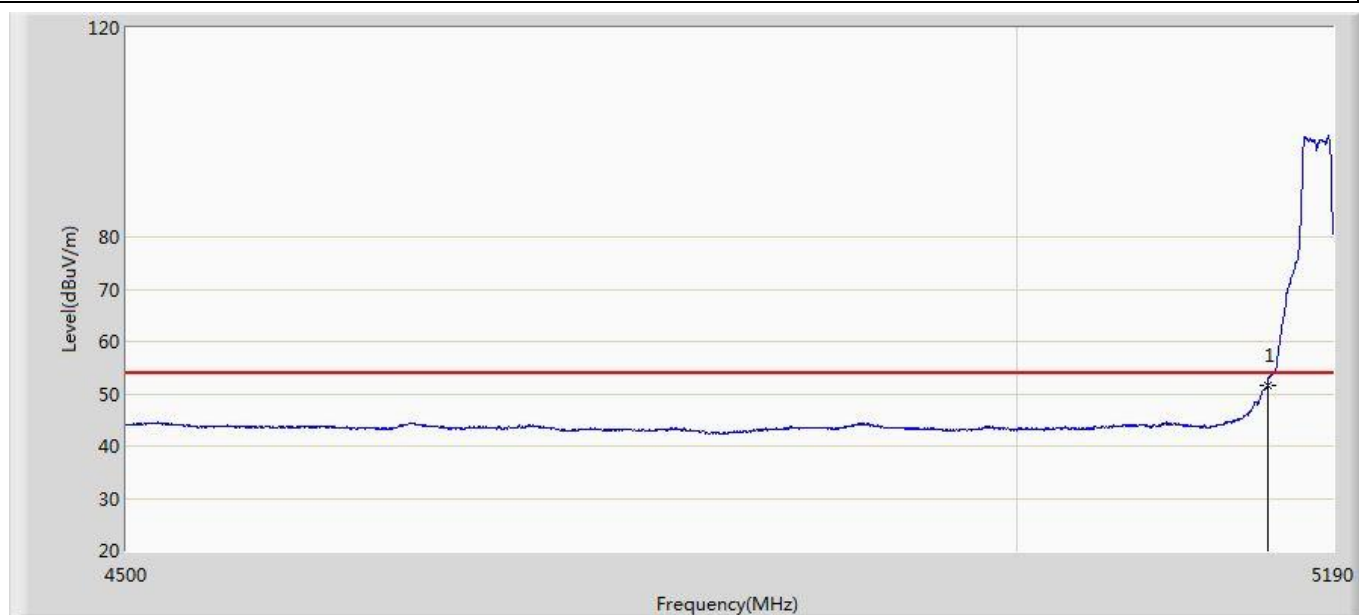


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.606	111.145	-2.394	54.000	40.461	AV

Profile: 2250805R	Page No.: 4
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 11a	

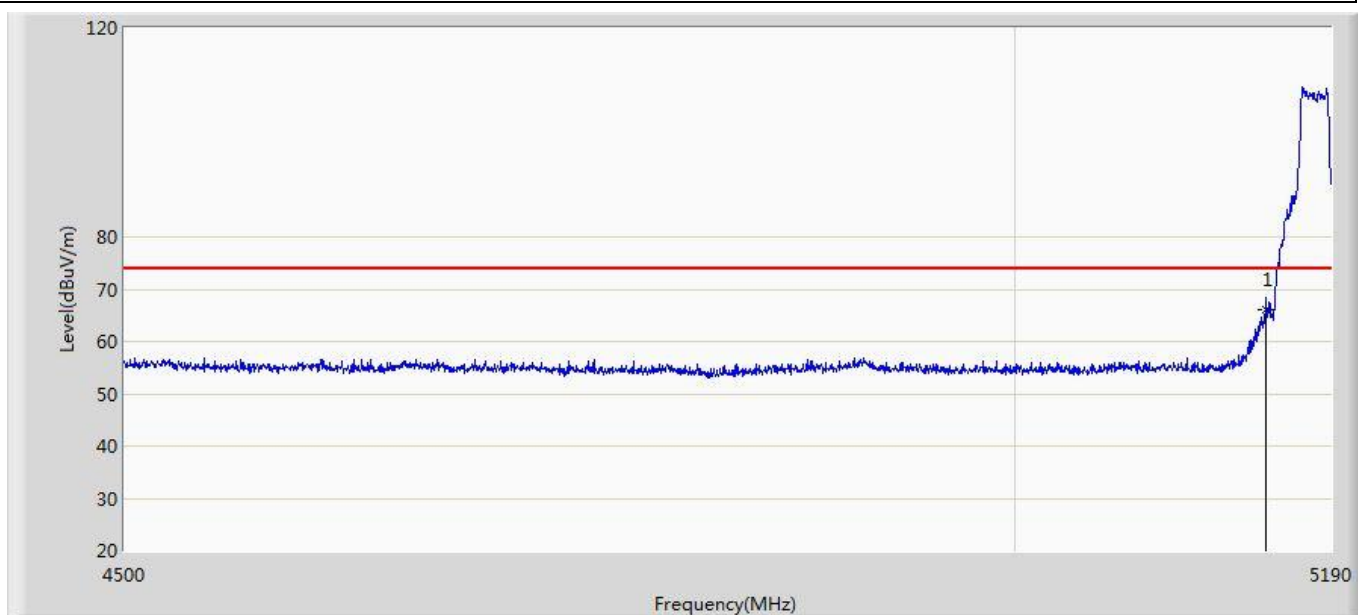


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	66.007	25.546	-7.993	74.000	40.461	PK

Profile: 2250805R	Page No.: 5
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 11a	

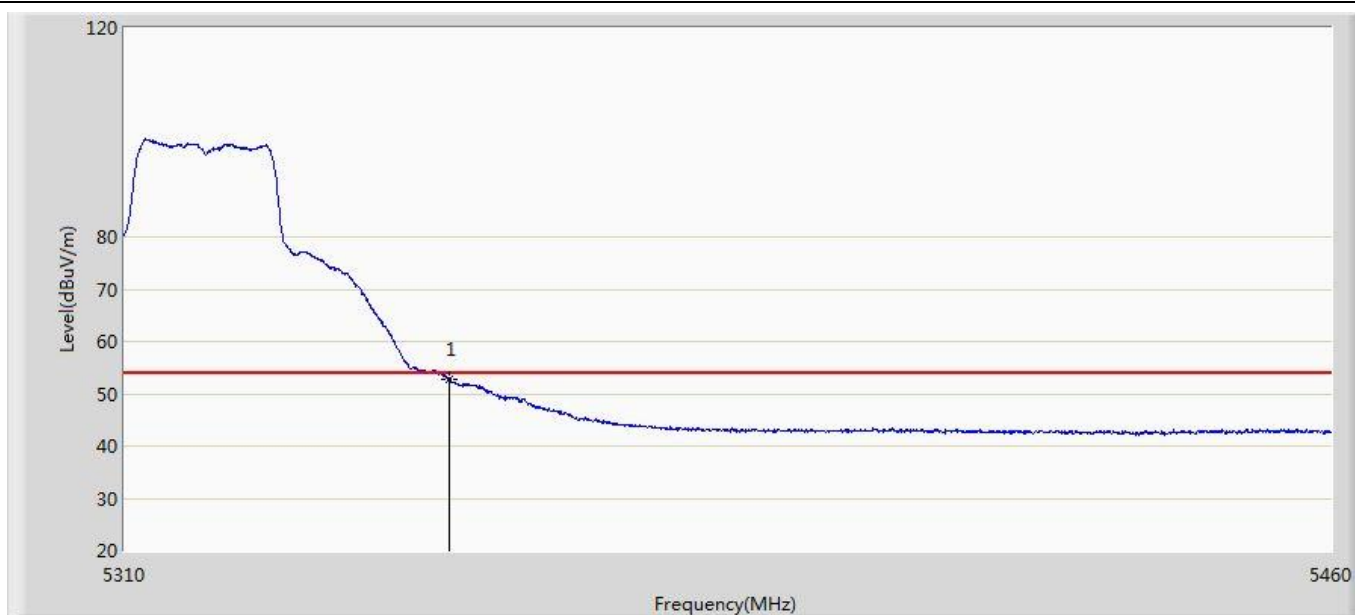


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	52.892	11.776	-1.108	54.000	41.116	AV

Profile: 2250805R	Page No.: 6
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 11a	

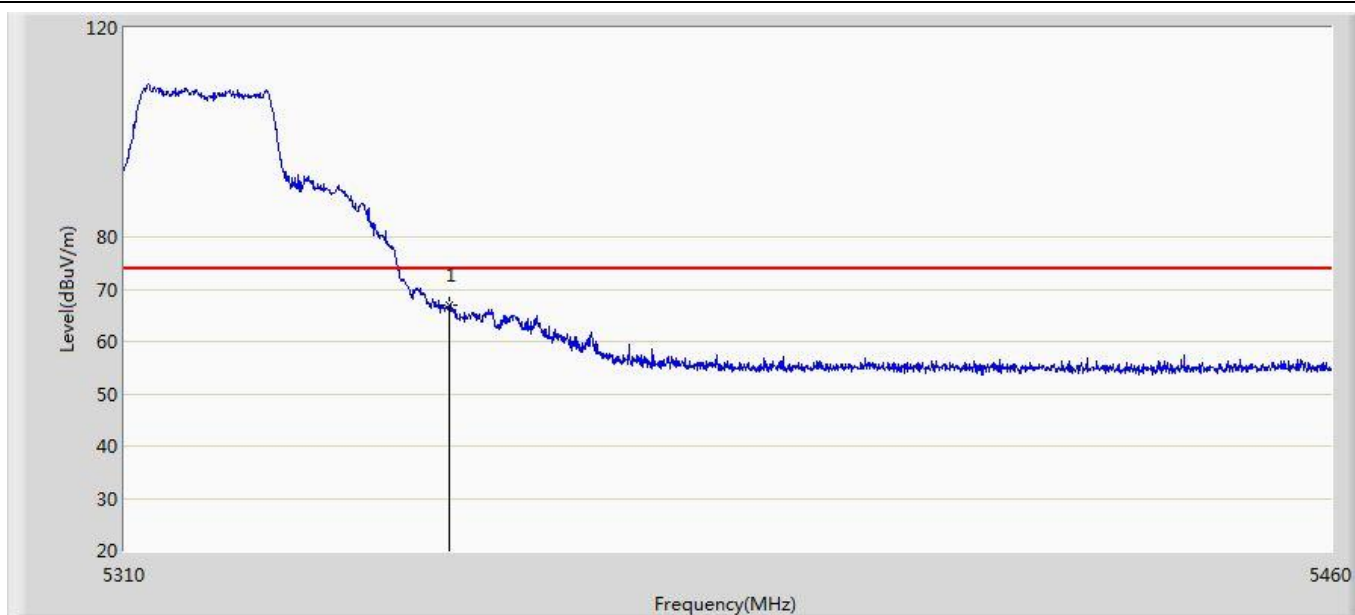

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	66.887	25.771	-7.113	74.000	41.116	PK

Profile: 2250805R	Page No.: 7
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 11a	

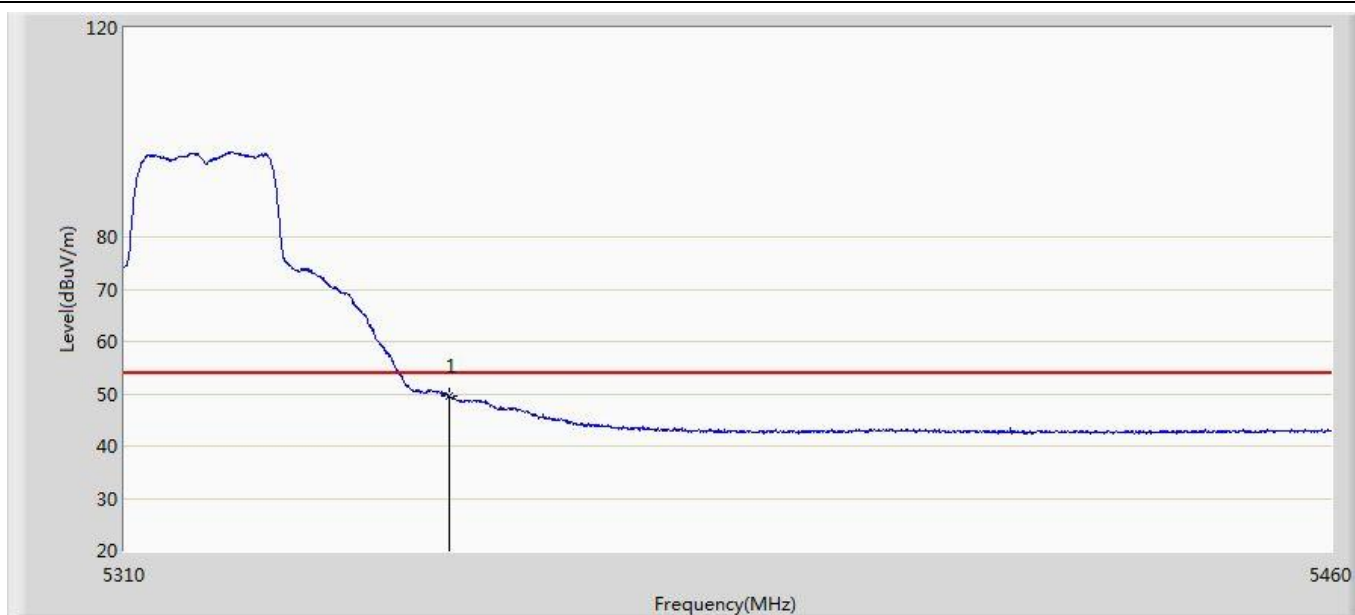


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.543	8.427	-4.457	54.000	41.116	AV

Profile: 2250805R	Page No.: 8
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 11a	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	62.613	21.497	-11.387	74.000	41.116	PK

Profile: 2250805R	Page No.: 9
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 11a	

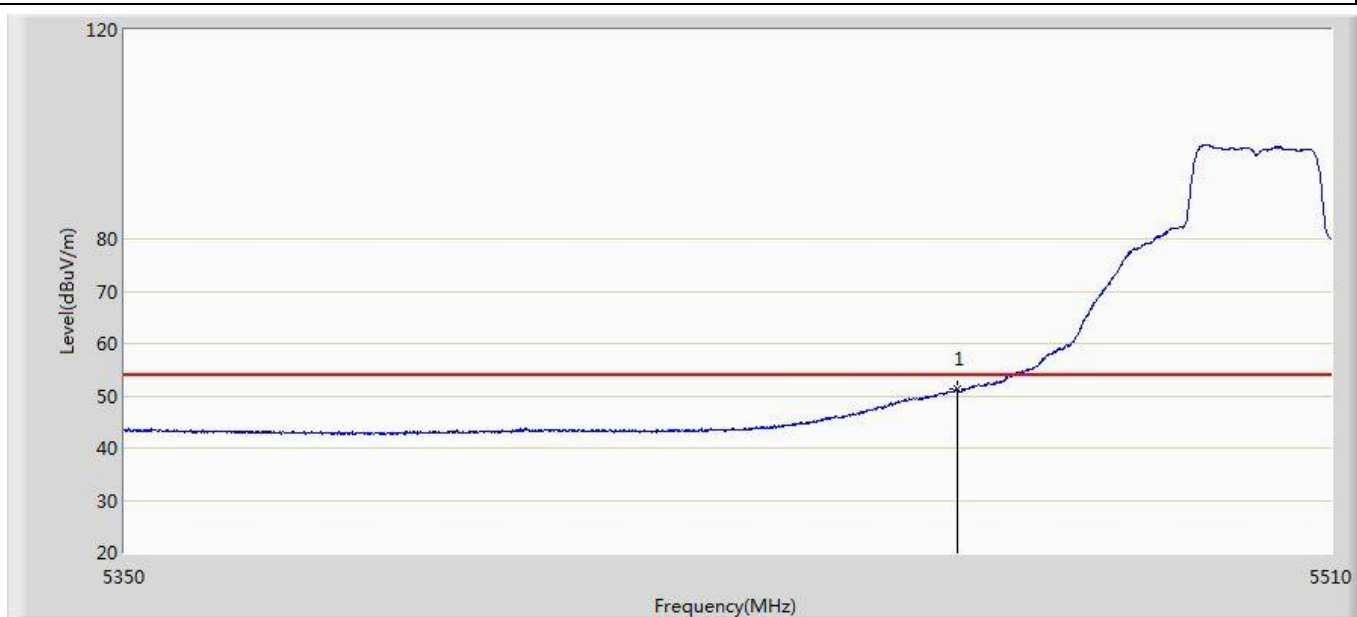

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.217	10.211	-2.783	54.000	41.006	AV

Profile: 2250805R	Page No.: 10
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 23:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5500MHz by 11a	

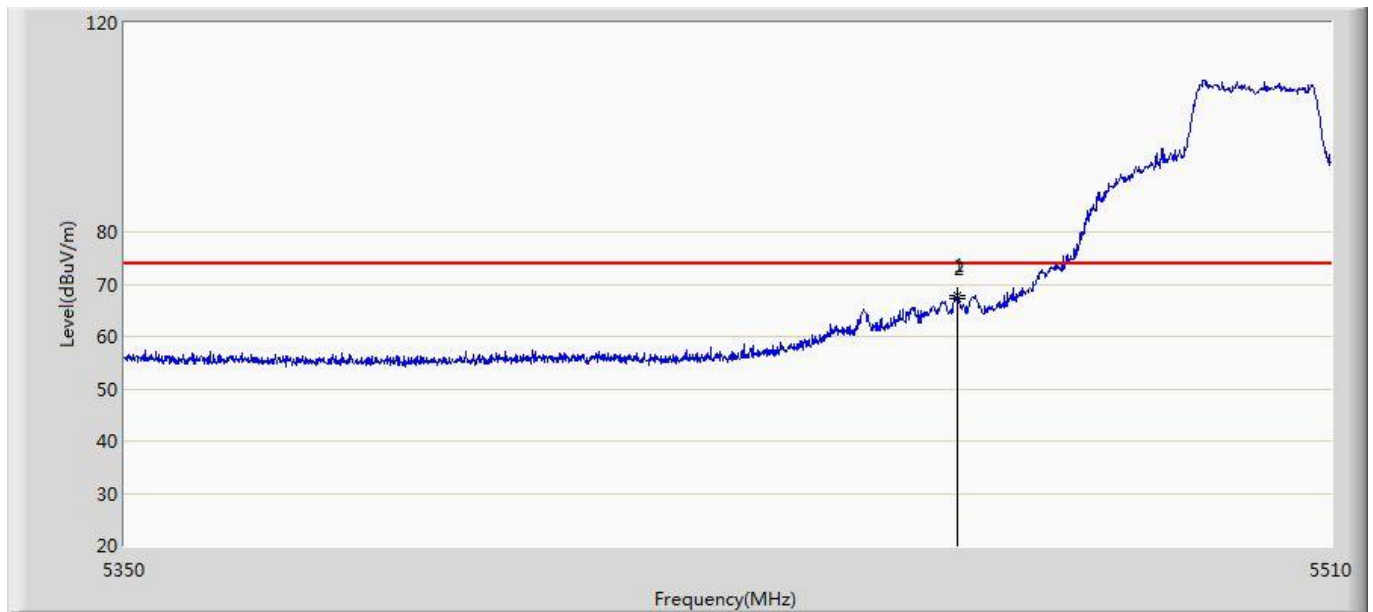


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5459.920	67.753	26.747	-6.247	74.000	41.006	PK
2		5460.000	67.232	26.226	-6.768	74.000	41.006	PK

Profile: 2250805R	Page No.: 11
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 11a	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	49.804	8.798	-4.196	54.000	41.006	AV

Profile: 2250805R	Page No.: 12
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 11a	

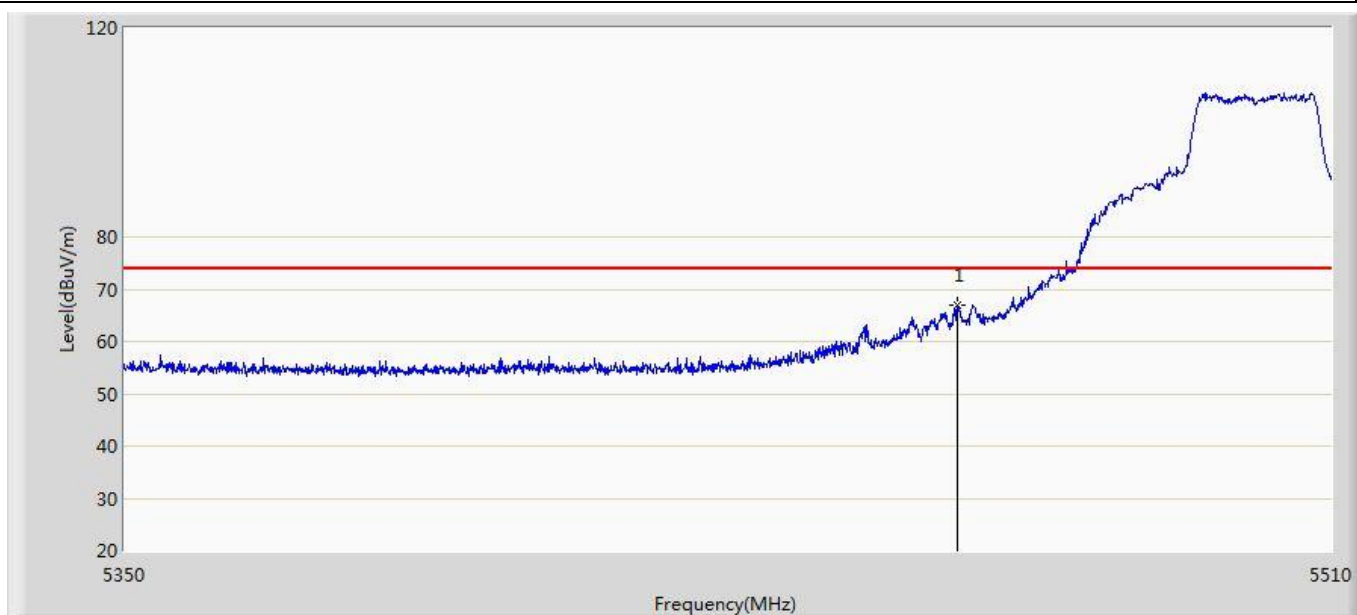


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	67.024	26.018	-6.976	74.000	41.006	PK

Profile: 2250805R	Page No.: 1
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 02:47
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5745MHz by 11a	

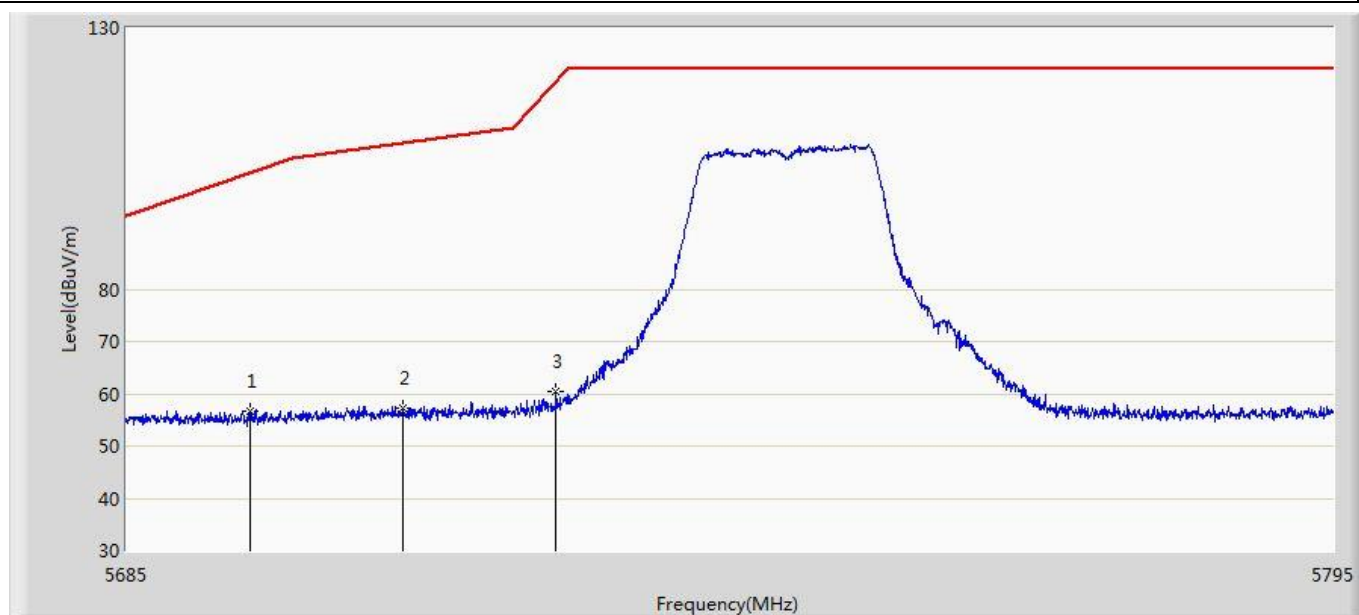


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5696.165	56.697	14.868	-45.677	102.374	41.829	PK
2		5710.025	57.294	14.856	-50.716	108.009	42.437	PK
3		5723.940	60.332	18.360	-59.452	119.784	41.972	PK

Profile: 2250805R	Page No.: 2
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 02:54
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5745MHz by 11a	

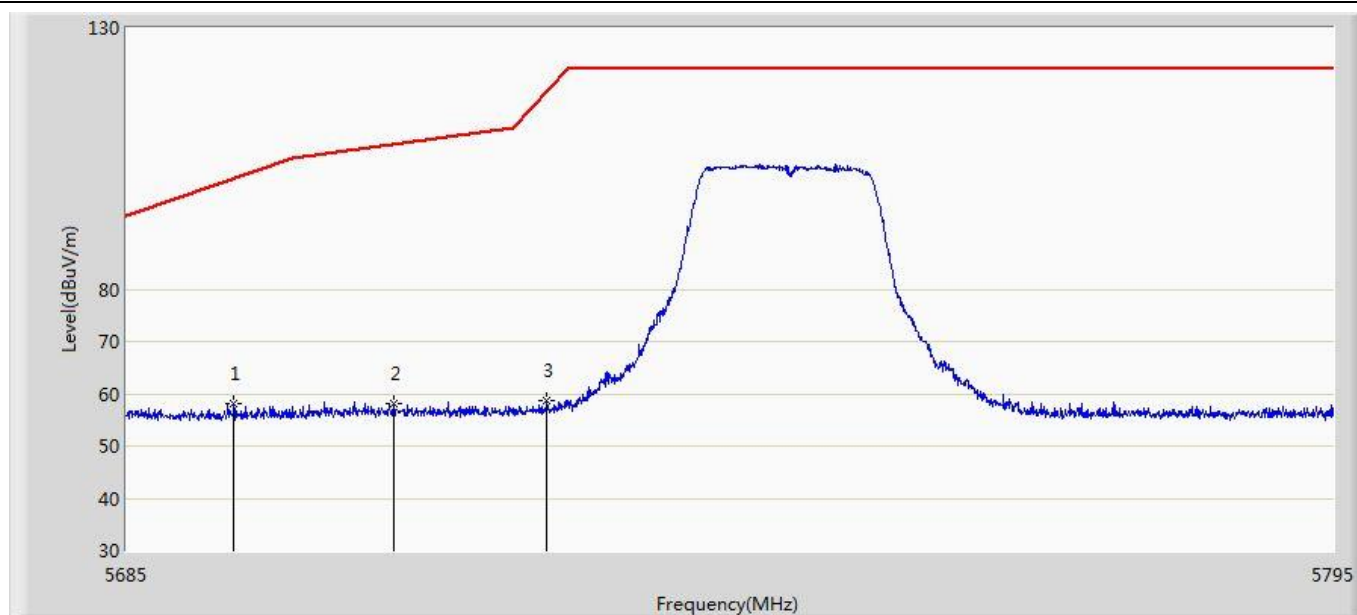


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.735	58.188	16.431	-43.131	101.319	41.757	PK
2		5709.200	58.240	15.775	-49.538	107.778	42.465	PK
3		5723.115	58.685	16.685	-59.219	117.903	41.999	PK

Profile: 2250805R	Page No.: 3
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 02:55
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5785MHz by 11a	

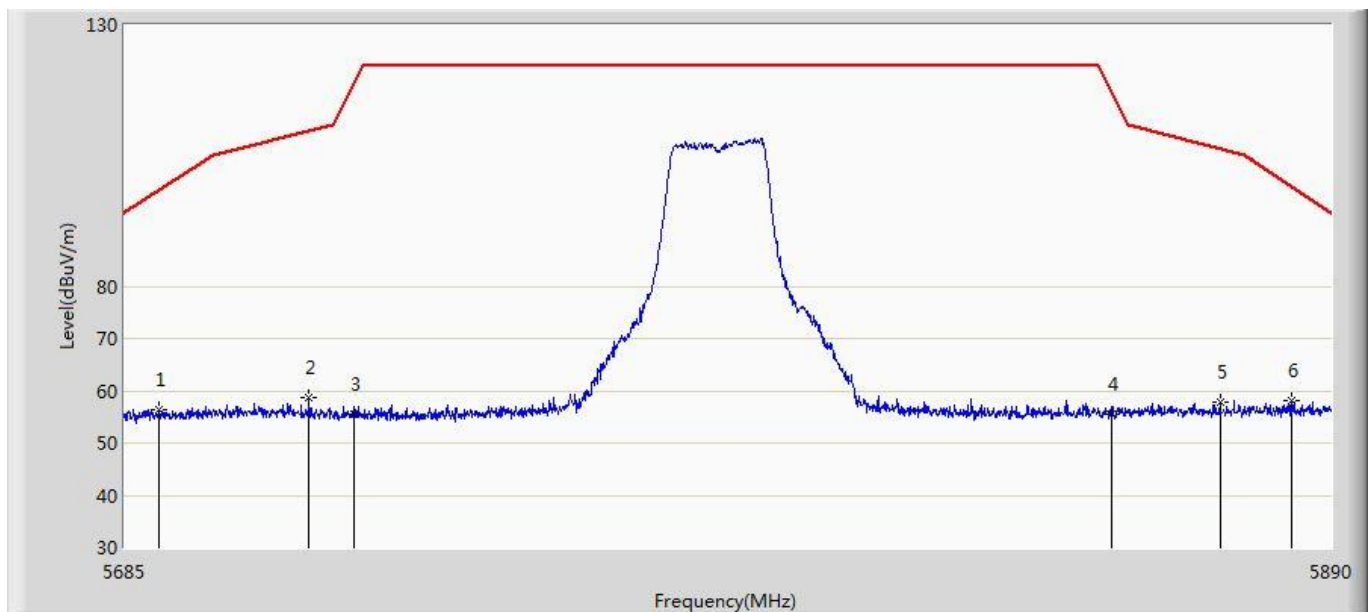


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5690.740	56.270	14.639	-42.102	98.372	41.631	PK
2		5715.955	58.702	16.463	-50.967	109.669	42.239	PK
3		5723.437	55.393	13.404	-63.245	118.637	41.989	PK
4		5852.178	55.600	13.589	-61.633	117.233	42.011	PK
5		5870.935	57.953	15.737	-48.383	106.337	42.217	PK
6	*	5883.132	58.174	15.884	-40.987	99.161	42.291	PK

Profile: 2250805R	Page No.: 4
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 02:58
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5785MHz by 11a	

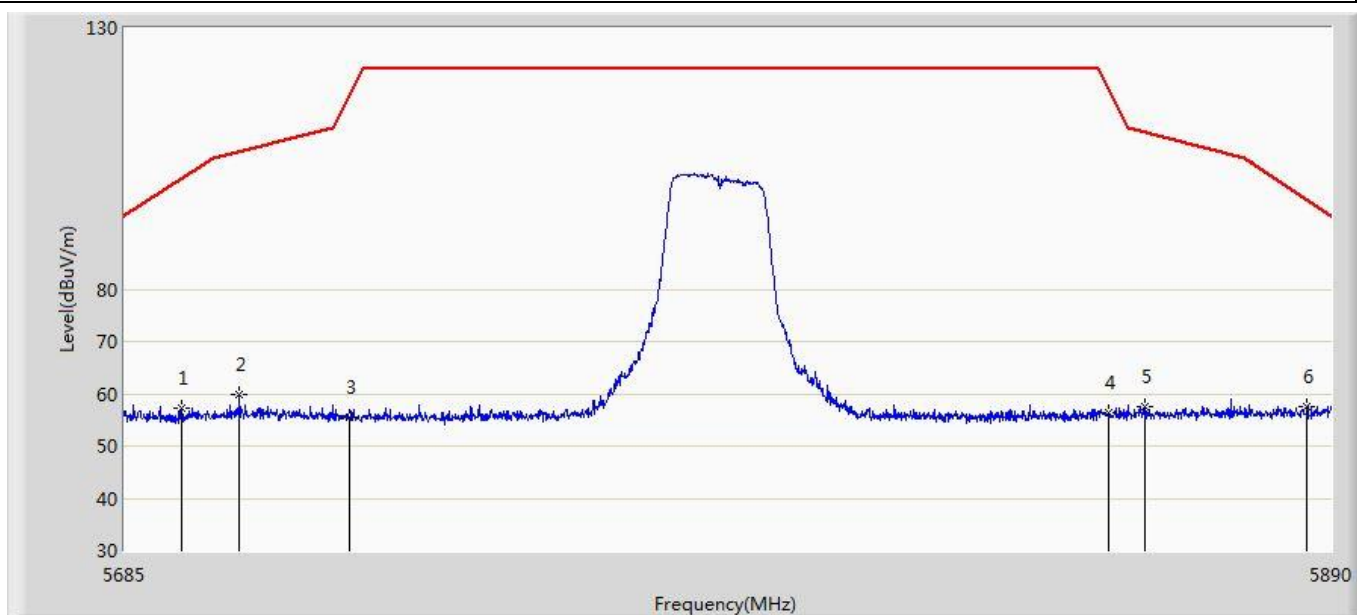

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5694.635	57.232	15.480	-44.013	101.245	41.752	PK
2		5704.270	59.778	17.543	-46.619	106.397	42.235	PK
3		5722.822	55.508	13.499	-61.727	117.235	42.010	PK
4		5851.768	56.281	14.277	-61.887	118.168	42.005	PK
5		5857.815	57.497	15.394	-52.514	110.011	42.103	PK
6	*	5885.797	57.670	15.358	-39.514	97.184	42.312	PK

Profile: 2250805R	Page No.: 5
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 02:59
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5825MHz by 11a	

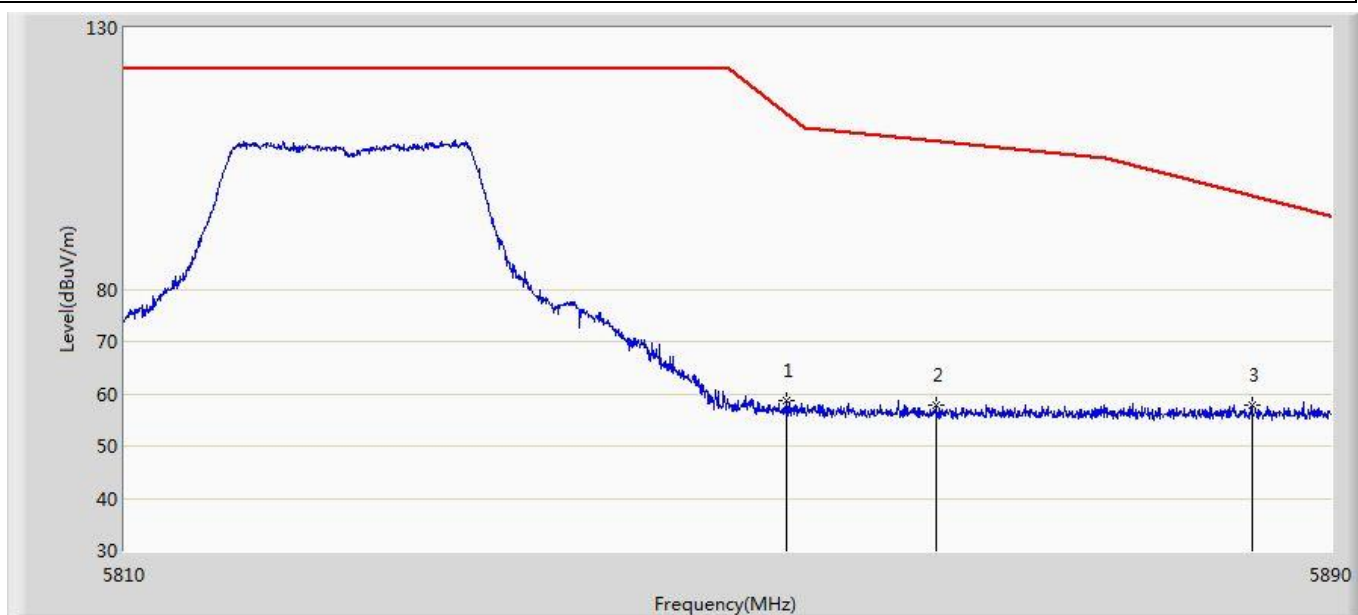


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5853.800	58.648	16.611	-54.887	113.535	42.037	PK
2		5863.680	57.784	15.605	-50.583	108.367	42.179	PK
3	*	5884.720	57.888	15.585	-40.095	97.983	42.303	PK

Profile: 2250805R	Page No.: 6
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:00
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5825MHz by 11a	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5853.160	57.628	15.601	-57.366	114.994	42.027	PK
2		5868.080	57.231	15.029	-49.905	107.135	42.202	PK
3	*	5881.680	57.648	15.369	-42.591	100.239	42.279	PK

Profile: 2250805R	Page No.: 13
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 11n20	

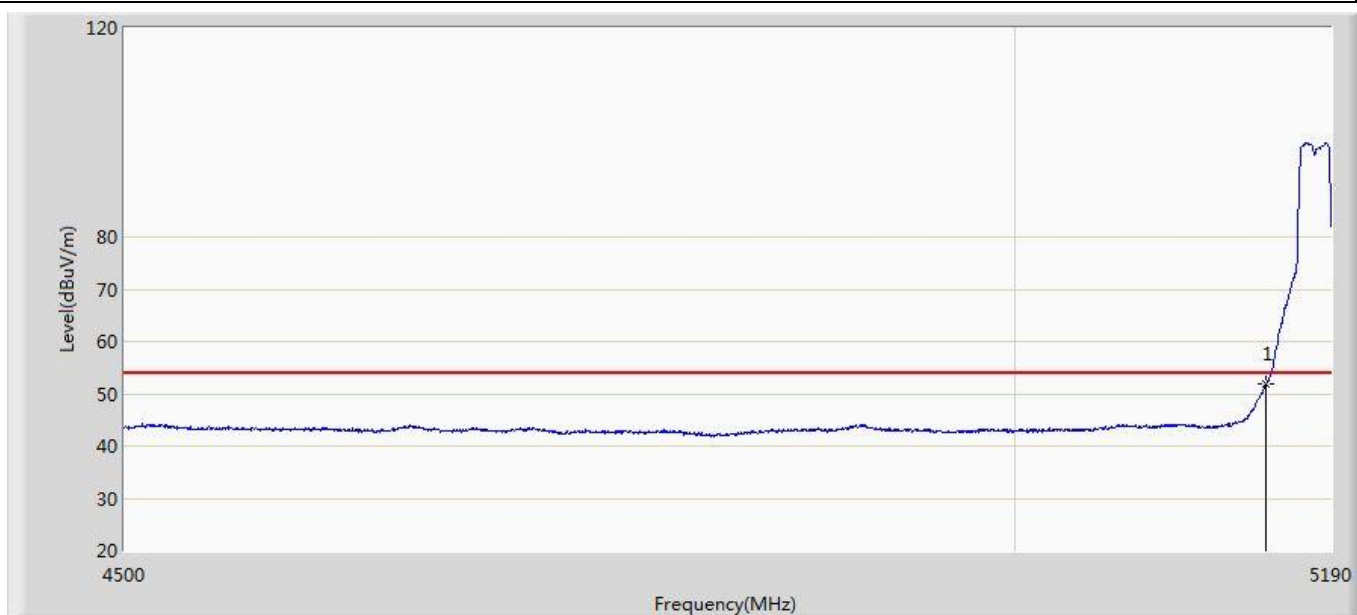


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.792	11.331	-2.208	54.000	40.461	AV

Profile: 2250805R	Page No.: 14
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 23:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5180MHz by 11n20	

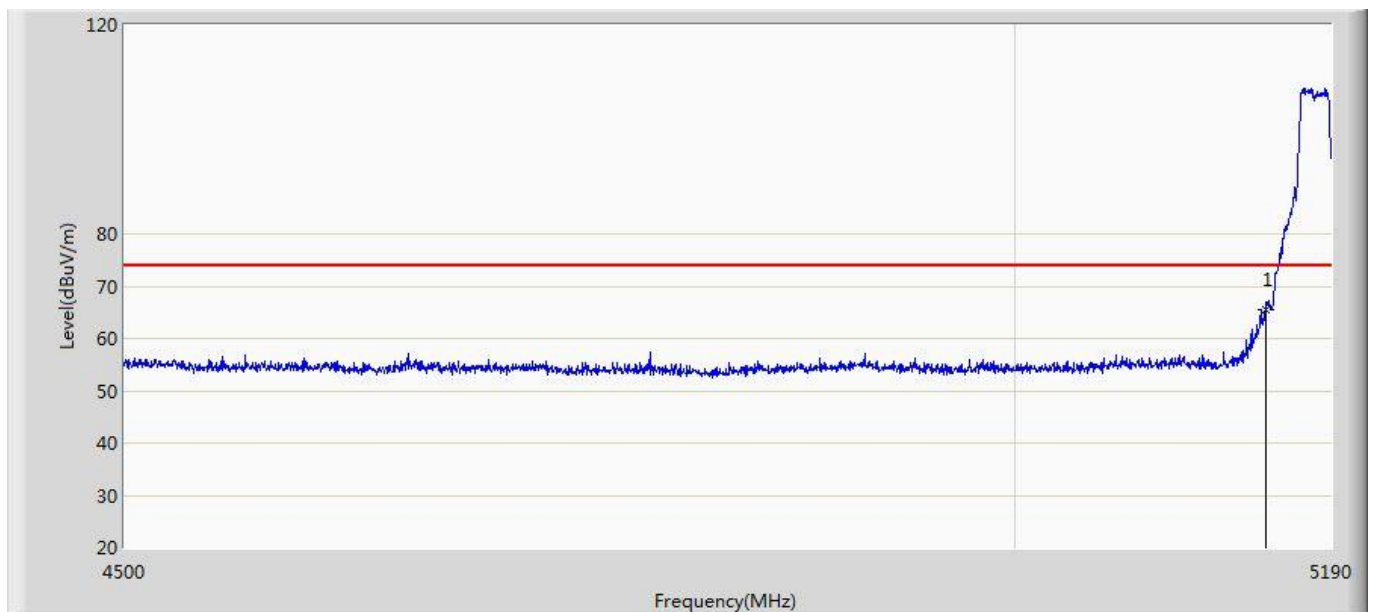


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	65.419	24.958	-8.581	74.000	40.461	PK

Profile: 2250805R	Page No.: 15
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 23:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 11n20	

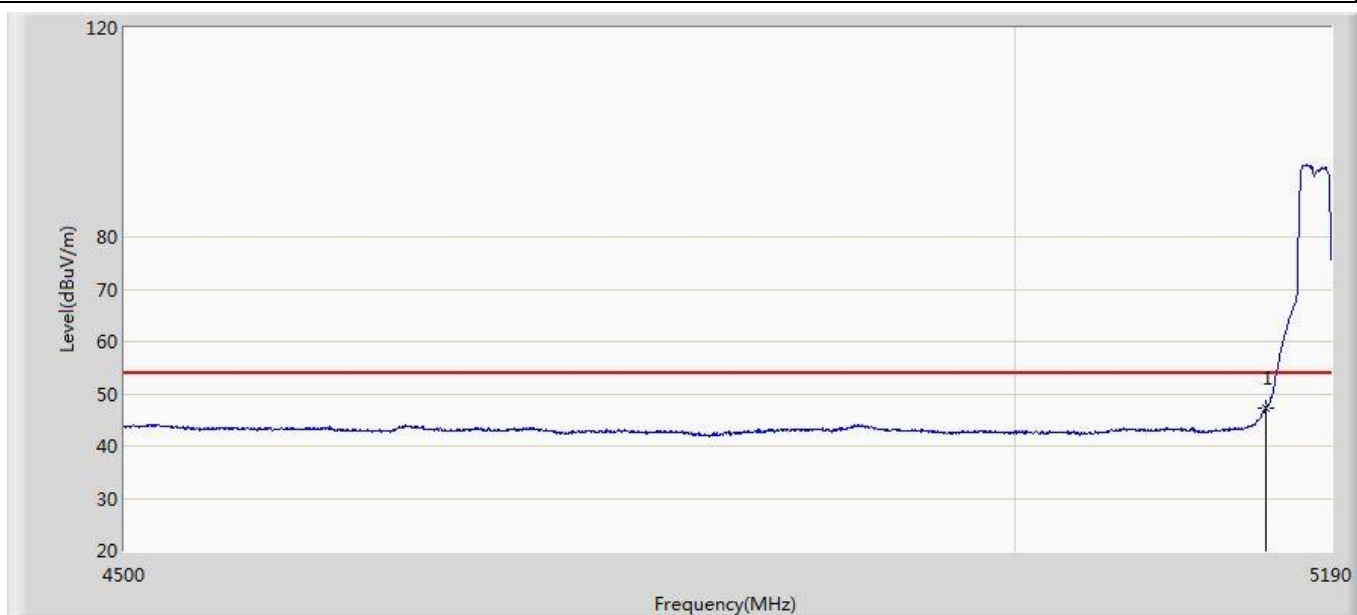


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	47.156	6.695	-6.844	54.000	40.461	AV

Profile: 2250805R	Page No.: 16
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5180MHz by 11n20	

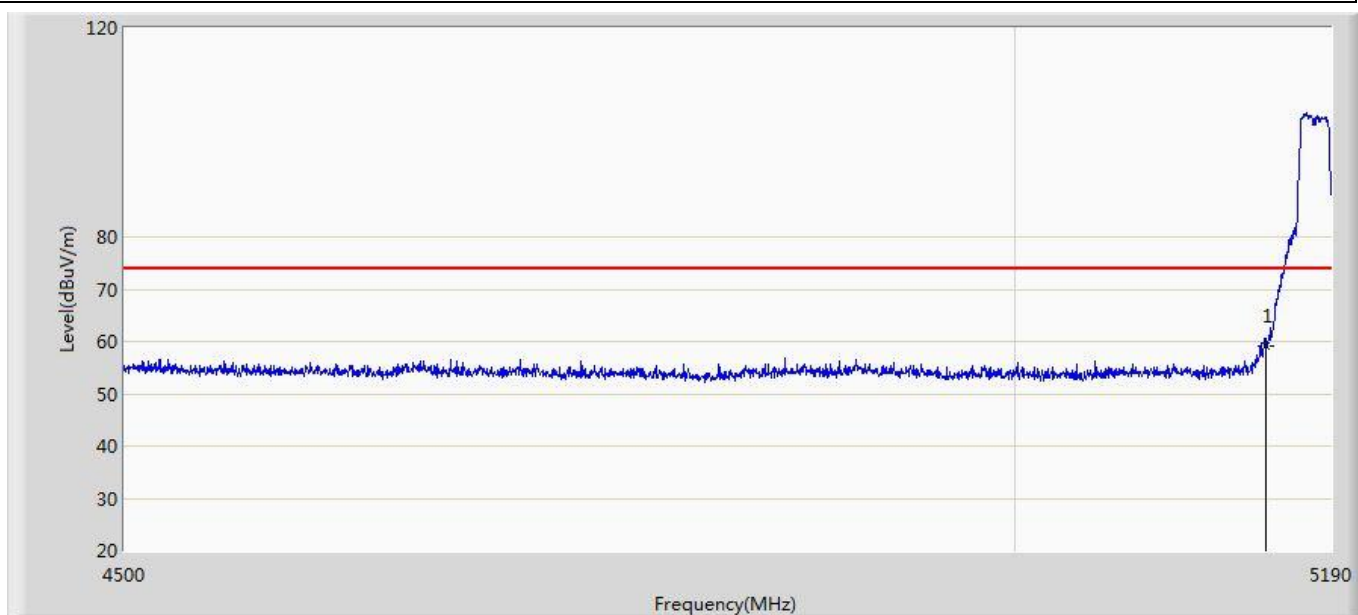


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	59.182	18.721	-14.818	74.000	40.461	PK

Profile: 2250805R	Page No.: 17
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 11n20	

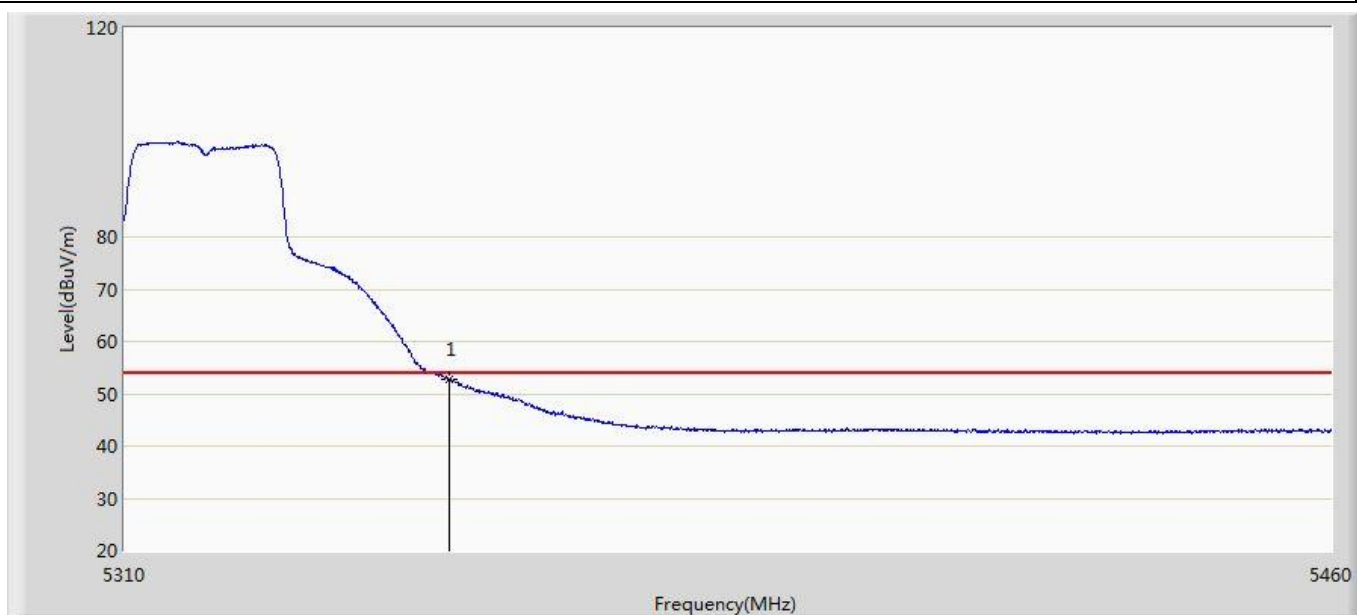


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	52.637	11.521	-1.363	54.000	41.116	AV

Profile: 2250805R	Page No.: 18
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 11n20	

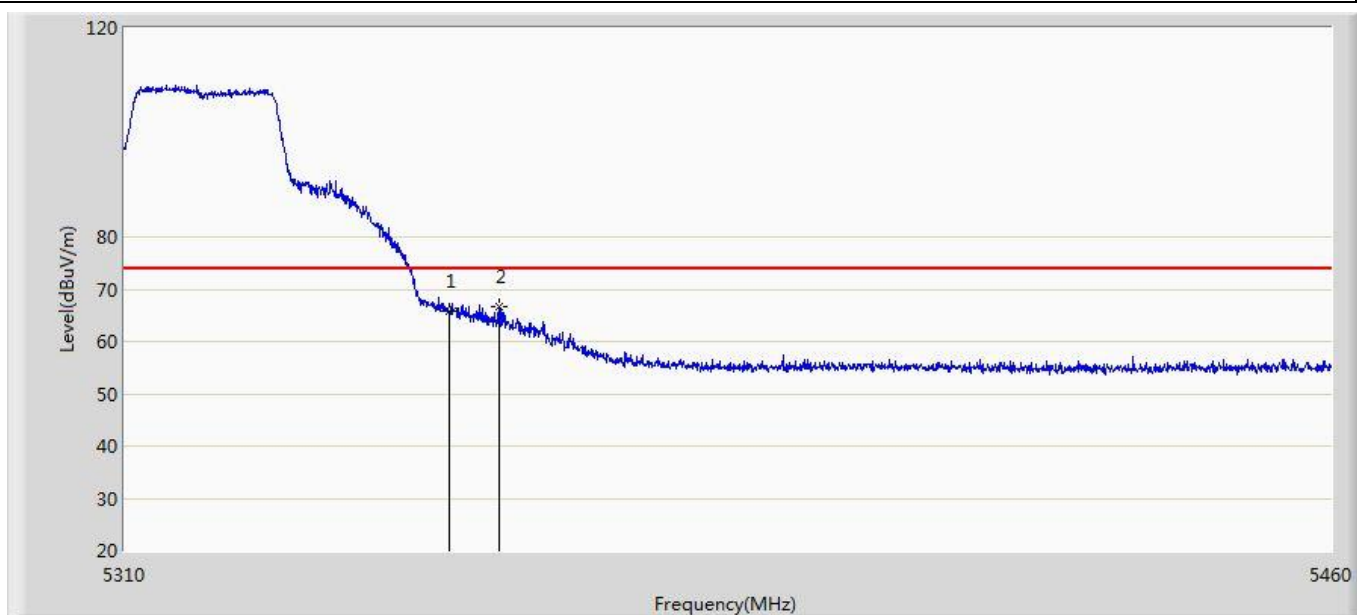


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	65.795	24.679	-8.205	74.000	41.116	PK
2	*	5356.125	66.781	25.712	-7.219	74.000	41.069	PK

Profile: 2250805R	Page No.: 19
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 11n20	

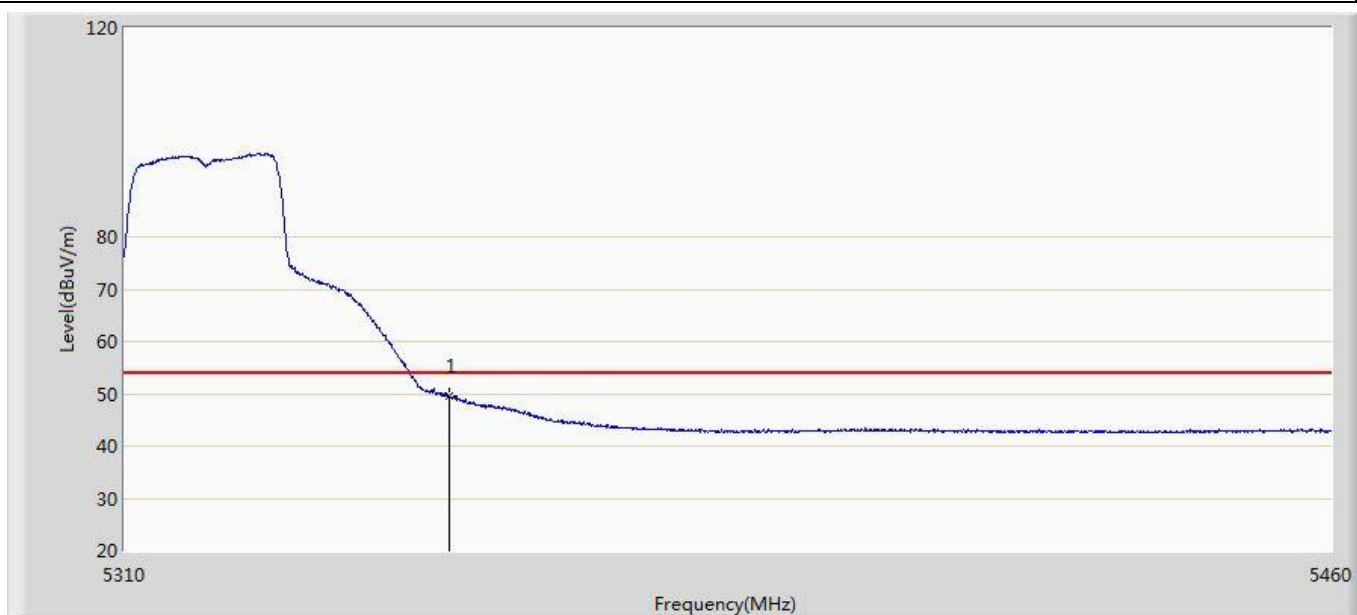


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.569	8.453	-4.431	54.000	41.116	AV

Profile: 2250805R	Page No.: 20
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 11n20	

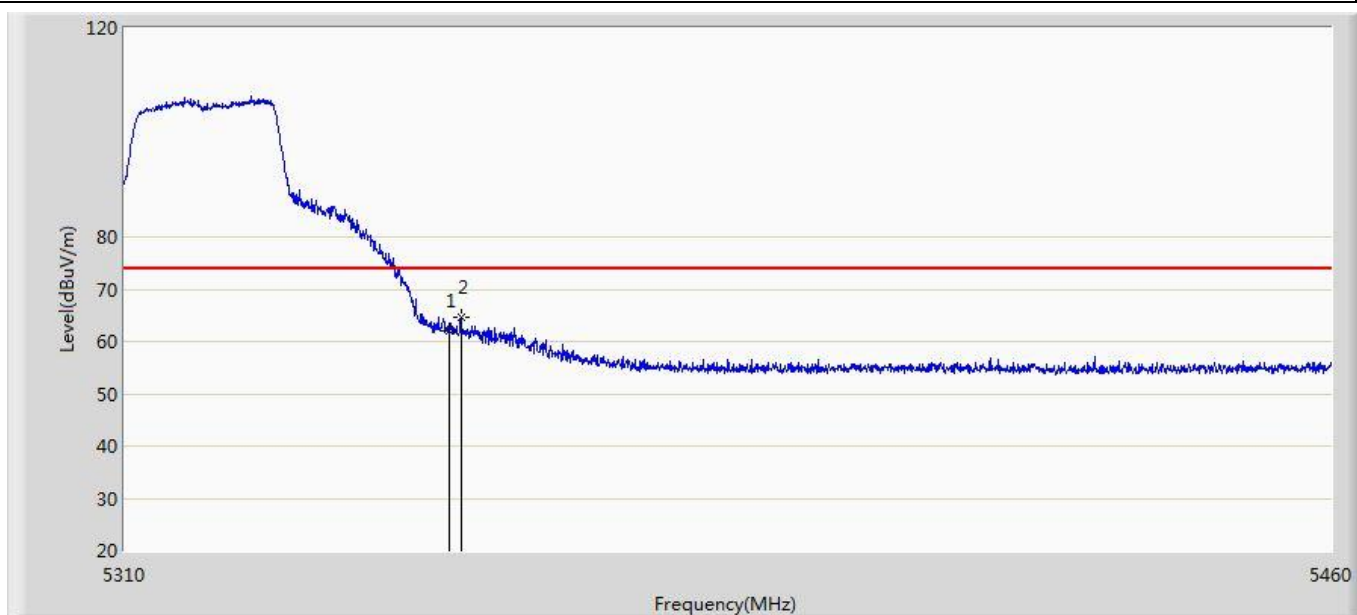


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	61.921	20.805	-12.079	74.000	41.116	PK
2	*	5351.475	64.533	23.386	-9.467	74.000	41.147	PK

Profile: 2250805R	Page No.: 21
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 11n20	

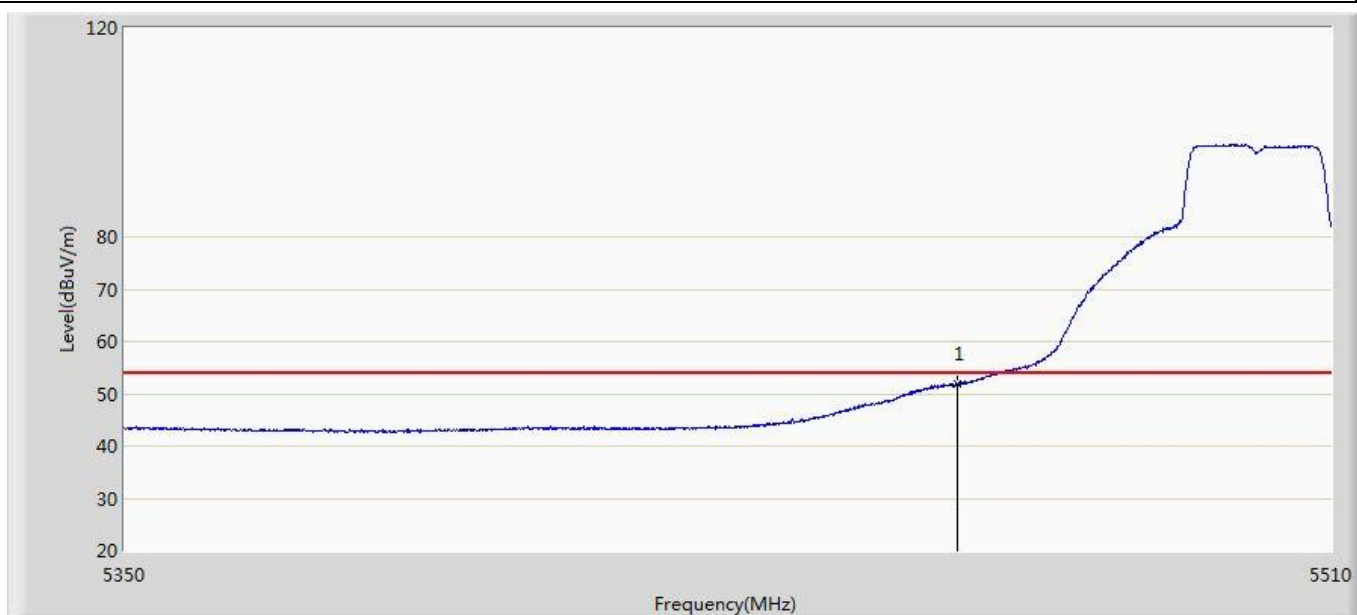

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.771	10.765	-2.229	54.000	41.006	AV

Profile: 2250805R	Page No.: 22
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 00:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5500MHz by 11n20	

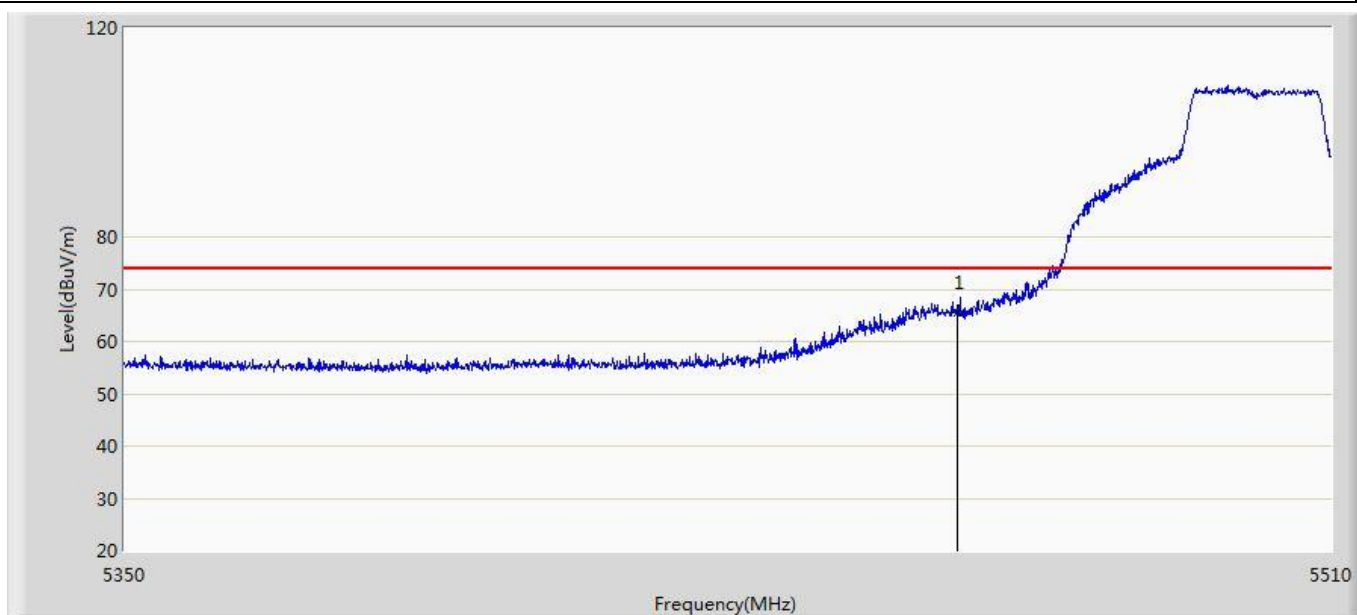


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	65.644	24.638	-8.356	74.000	41.006	PK

Profile: 2250805R	Page No.: 23
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 11n20	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	50.491	9.485	-3.509	54.000	41.006	AV

Profile: 2250805R	Page No.: 24
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 11n20	

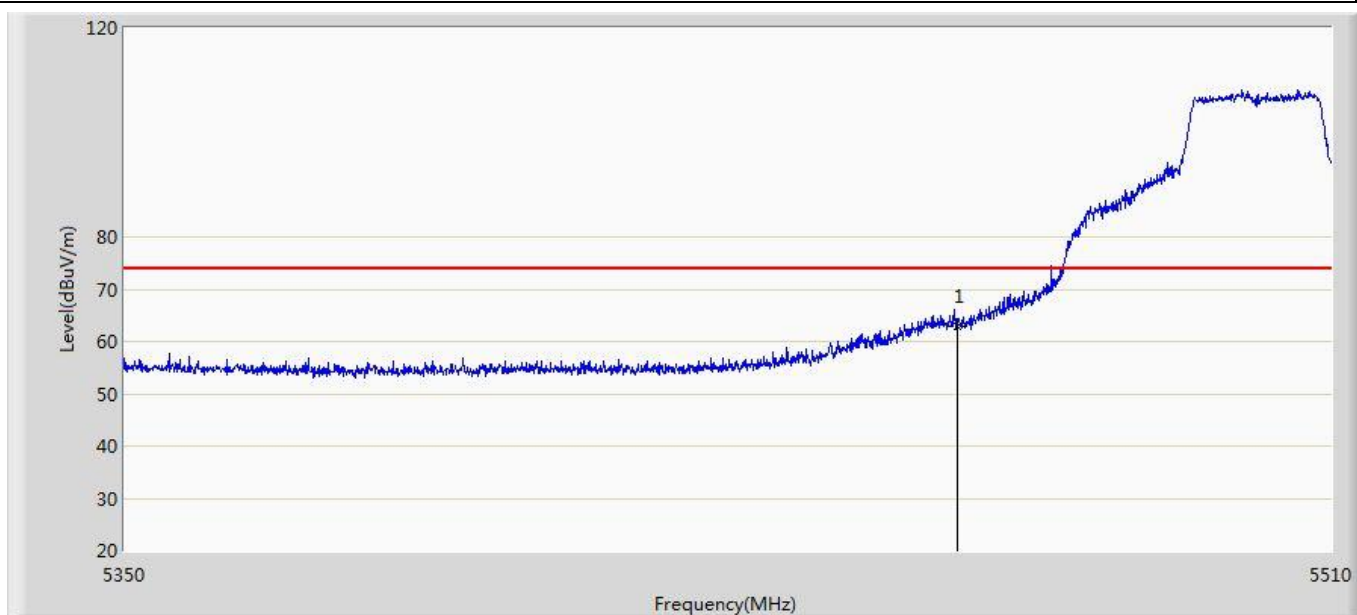


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	62.859	21.853	-11.141	74.000	41.006	PK

Profile: 2250805R	Page No.: 7
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:01
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5745MHz by 11n20	

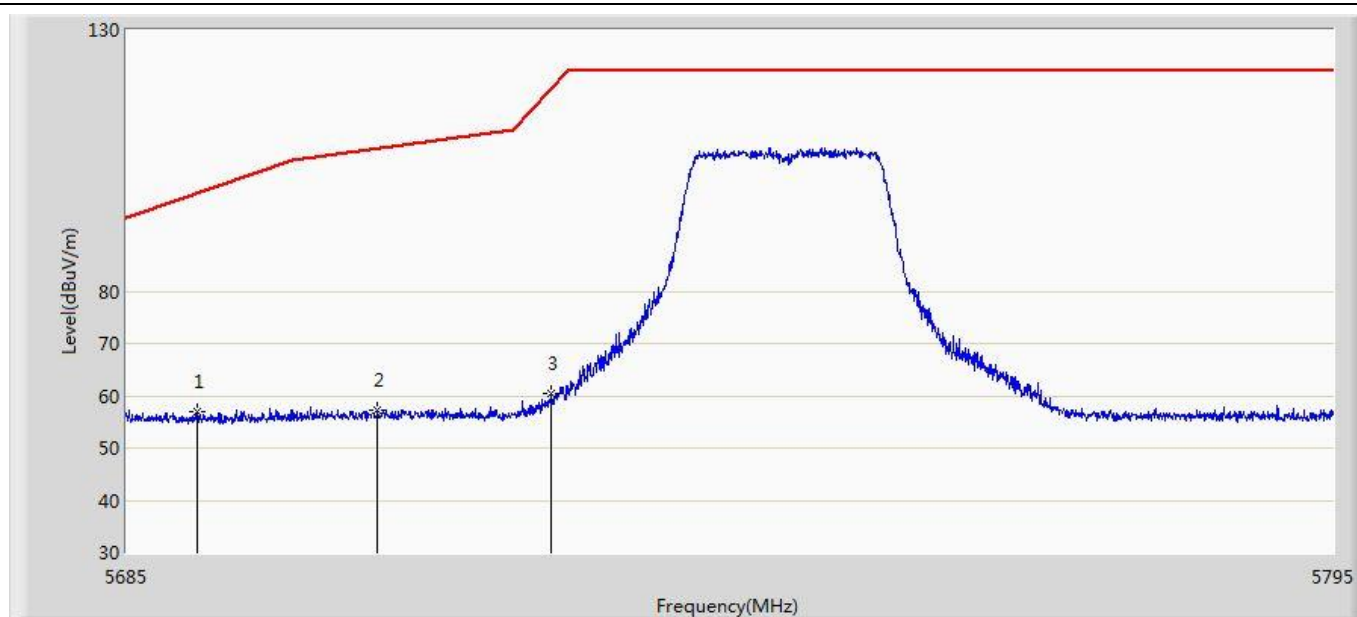


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5691.380	56.868	15.243	-41.976	98.844	41.625	PK
2		5707.770	57.356	14.946	-50.022	107.378	42.410	PK
3		5723.555	60.407	18.422	-58.500	118.906	41.985	PK

Profile: 2250805R	Page No.: 8
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:01
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5745MHz by 11n20	

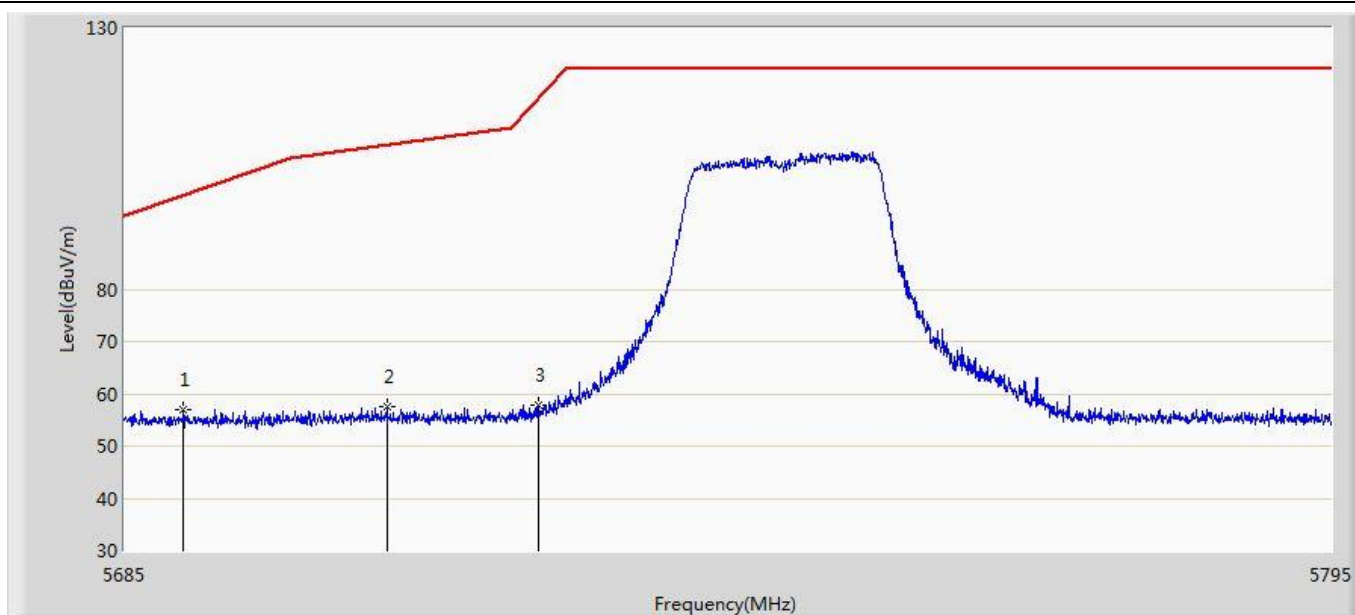


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5690.390	56.965	15.331	-41.149	98.114	41.634	PK
2		5708.760	57.476	15.016	-50.179	107.655	42.460	PK
3		5722.565	57.711	15.693	-58.938	116.649	42.018	PK

Profile: 2250805R	Page No.: 9
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:02
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5785MHz by 11n20	

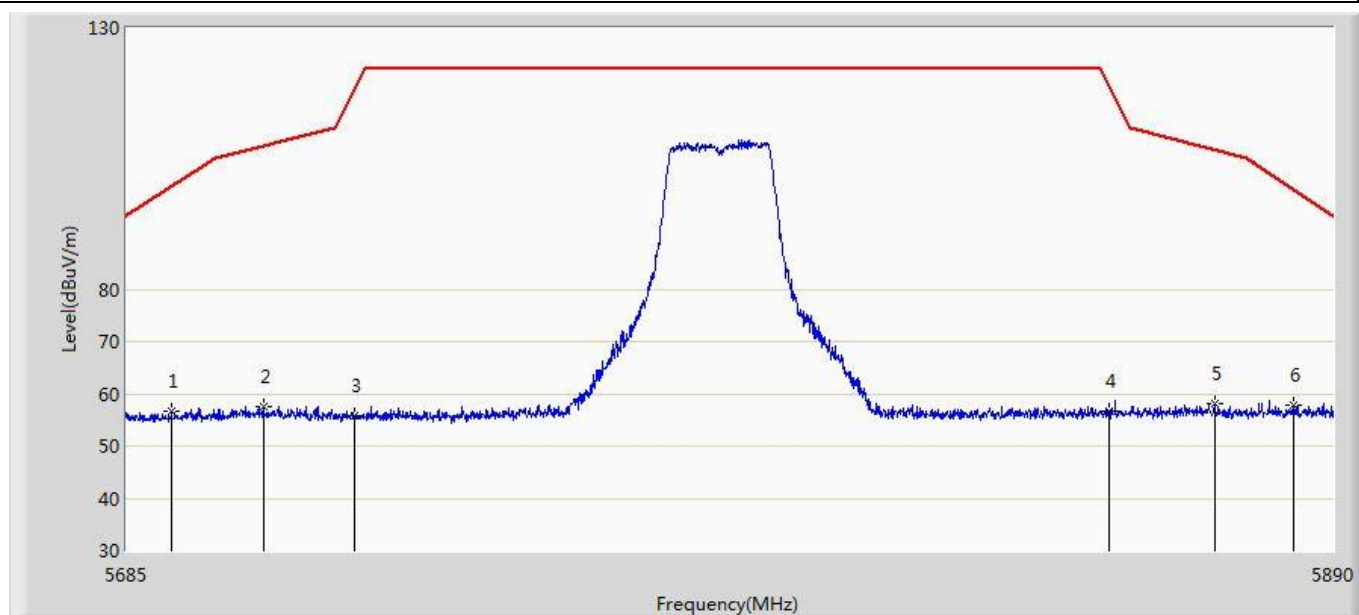


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5692.585	56.621	14.972	-43.112	99.733	41.649	PK
2		5707.960	57.542	15.122	-49.889	107.431	42.420	PK
3		5723.130	55.736	13.737	-62.202	117.938	41.999	PK
4		5851.460	56.631	14.632	-62.239	118.870	41.999	PK
5		5869.603	57.988	15.779	-48.721	106.709	42.210	PK
6	*	5883.132	57.714	15.424	-41.447	99.161	42.291	PK

Profile: 2250805R	Page No.: 10
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:04
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5785MHz by 11n20	

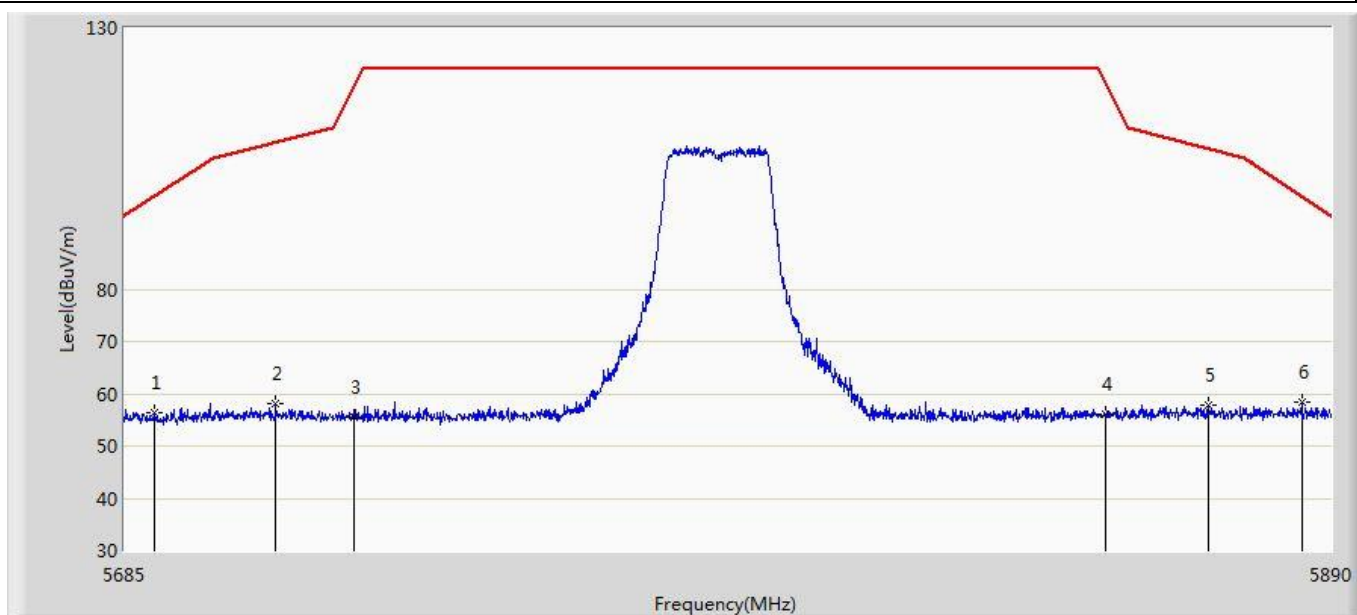


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5690.125	56.288	14.652	-41.630	97.918	41.636	PK
2		5710.317	58.094	15.666	-49.997	108.091	42.428	PK
3		5723.437	55.468	13.479	-63.170	118.637	41.989	PK
4		5851.152	56.070	14.076	-63.502	119.573	41.995	PK
5		5868.783	57.959	15.754	-48.979	106.939	42.206	PK
6	*	5884.978	58.363	16.058	-39.428	97.791	42.305	PK

Profile: 2250805R	Page No.: 11
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:05
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5825MHz by 11n20	

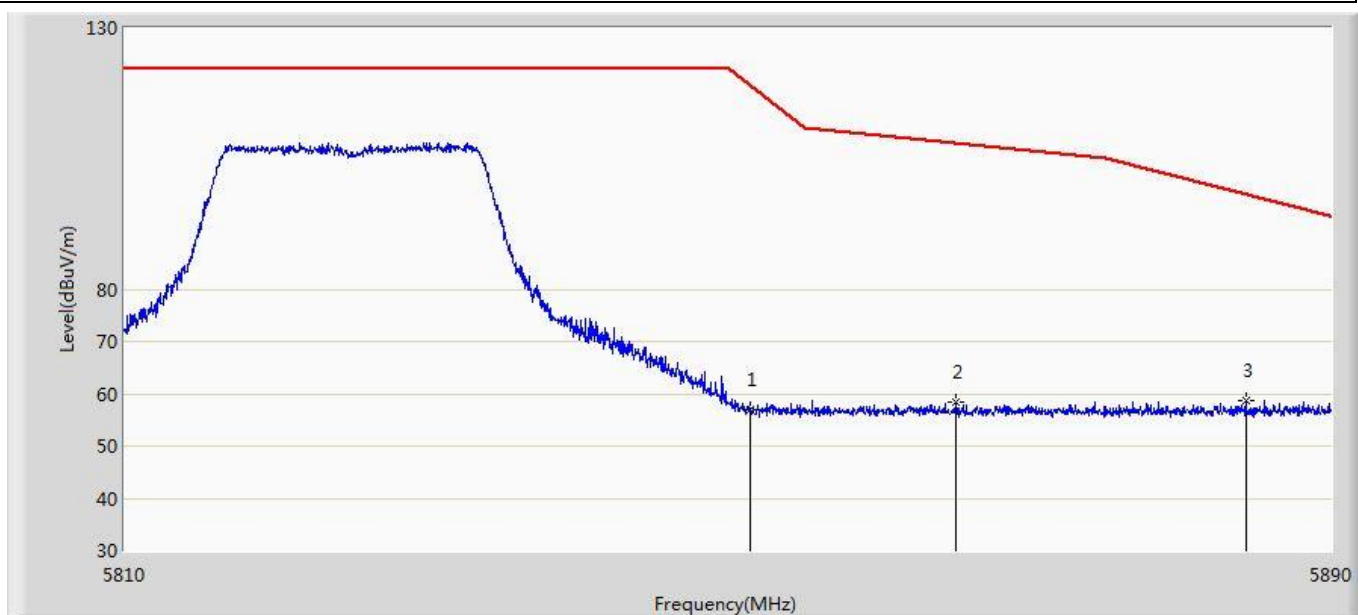


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5851.400	57.035	15.037	-61.972	119.007	41.998	PK
2		5865.040	58.397	16.211	-49.589	107.986	42.186	PK
3	*	5884.320	58.667	16.367	-39.613	98.279	42.300	PK

Profile: 2250805R	Page No.: 12
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:05
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5825MHz by 11n20	

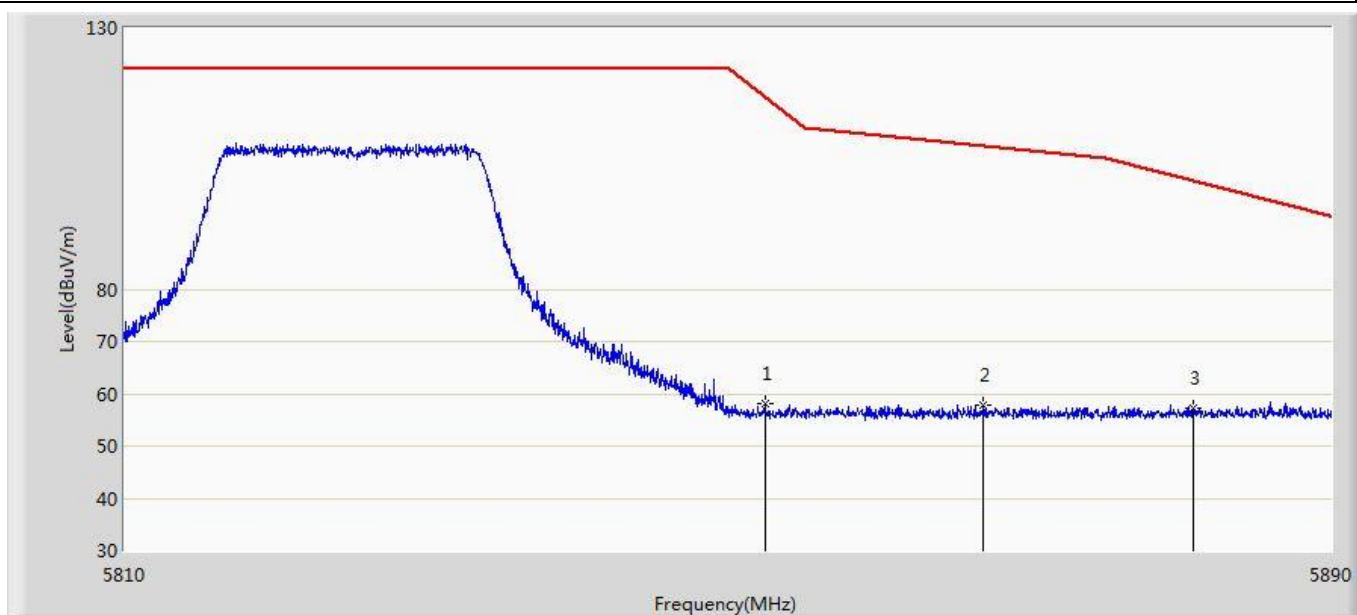


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.360	58.244	16.230	-58.574	116.818	42.014	PK
2		5866.880	57.903	15.707	-49.569	107.471	42.196	PK
3	*	5880.840	57.366	15.094	-43.496	100.862	42.271	PK

Profile: 2250805R	Page No.: 25
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 11n40	

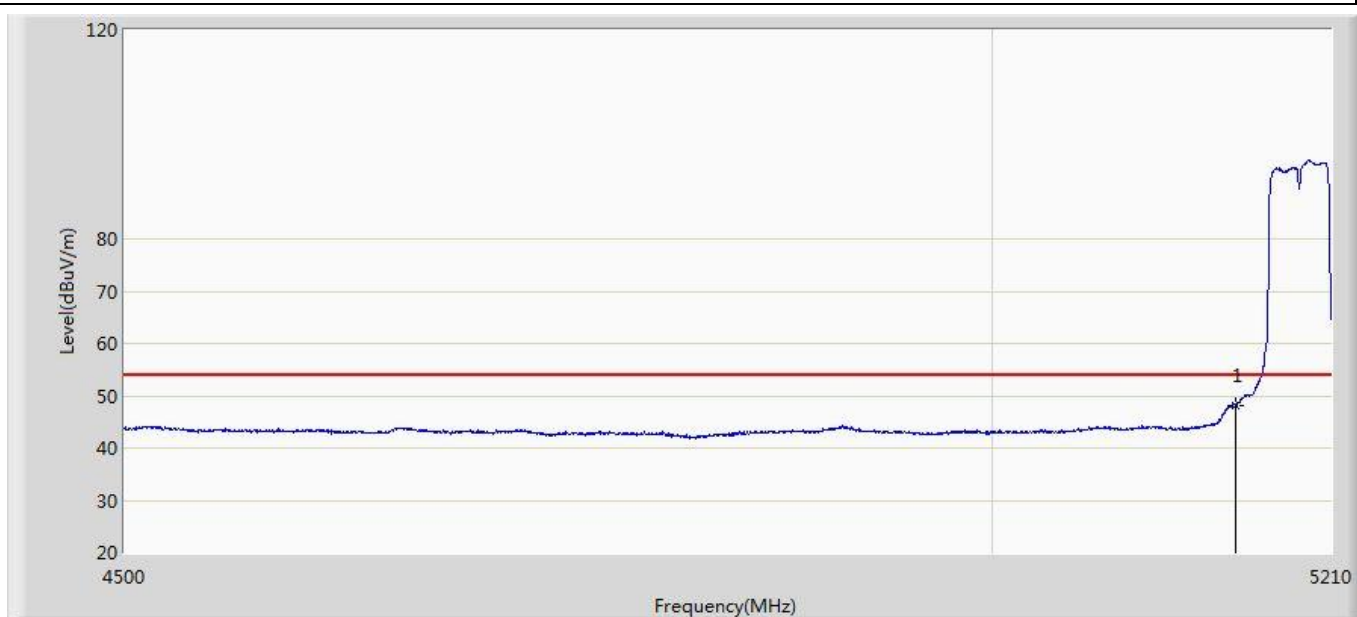


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.064	7.603	-5.936	54.000	40.461	AV

Profile: 2250805R	Page No.: 26
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 11n40	

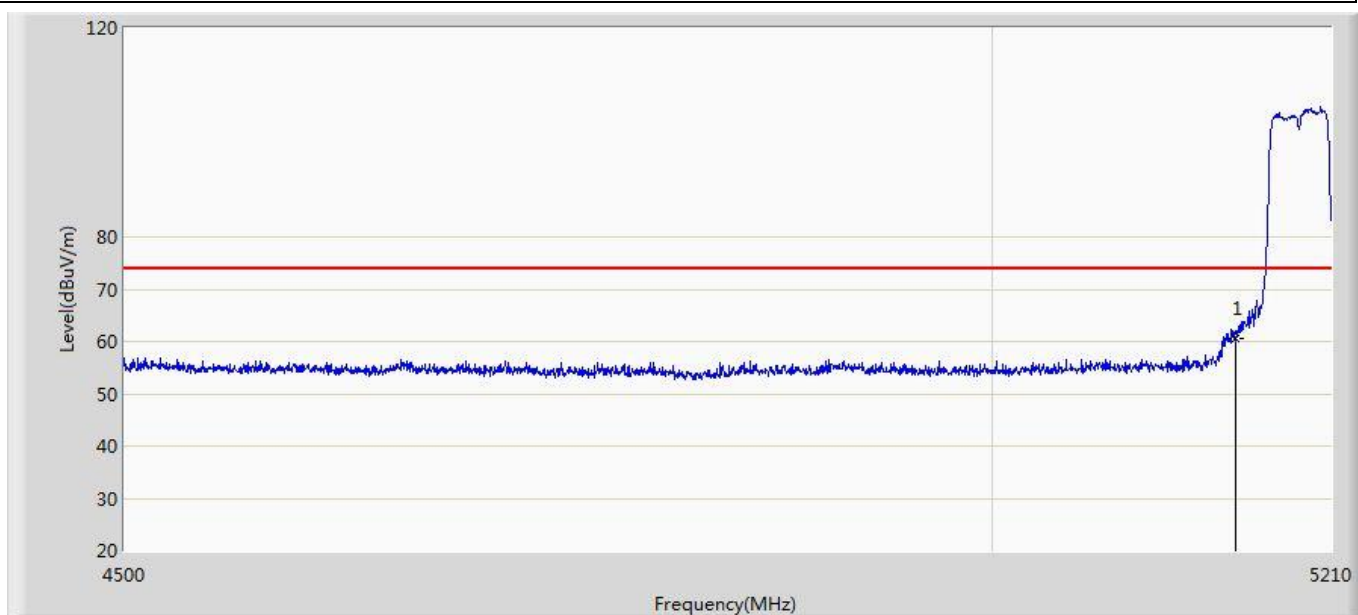


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	60.664	20.203	-13.336	74.000	40.461	PK

Profile: 2250805R	Page No.: 27
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 11n40	

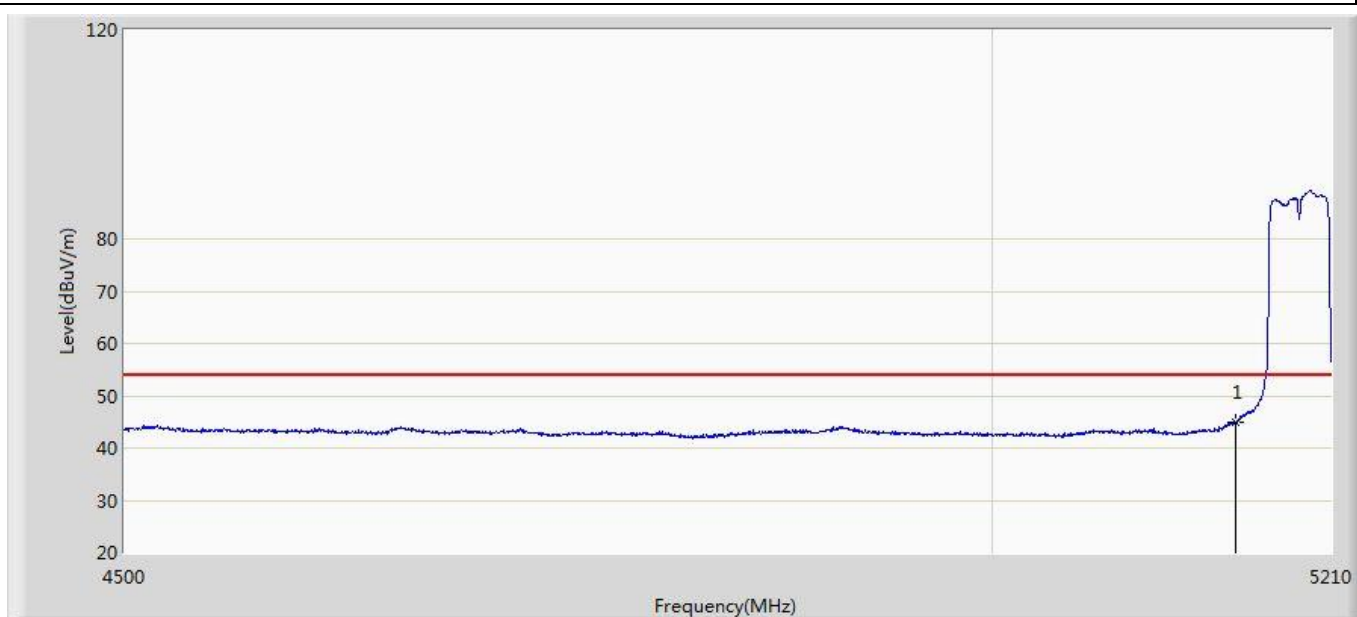


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	44.894	4.433	-9.106	54.000	40.461	AV

Profile: 2250805R	Page No.: 28
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 11n40	

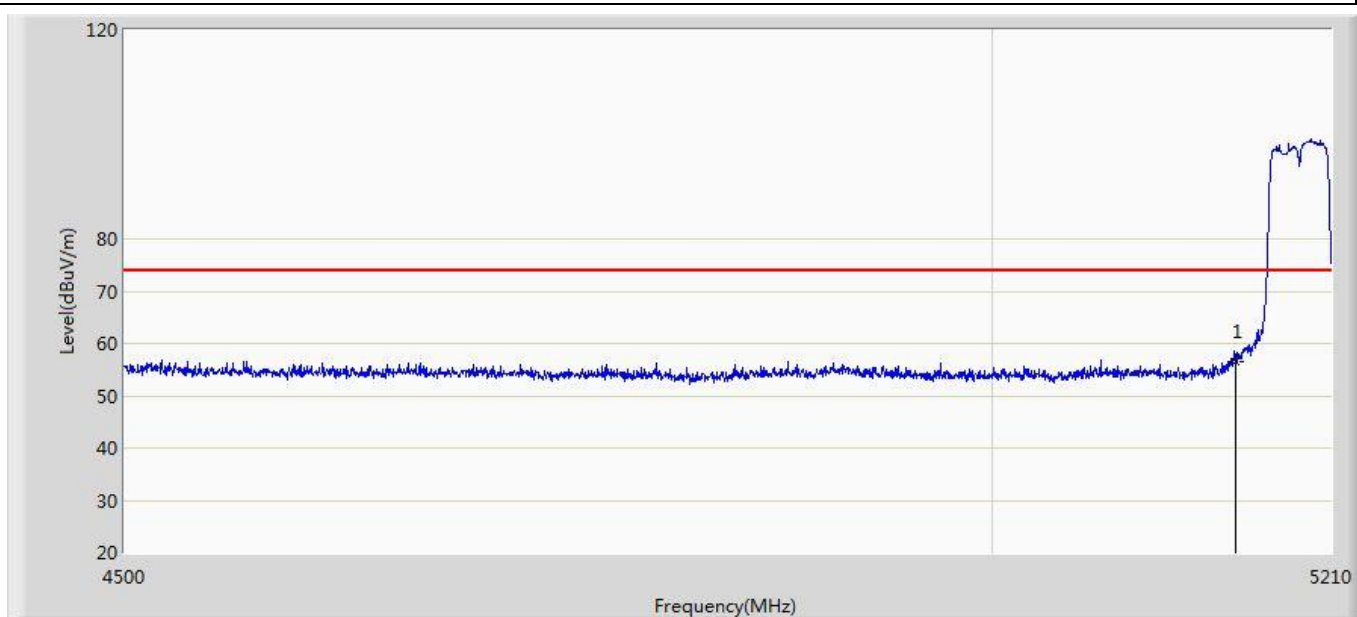


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	56.431	15.970	-17.569	74.000	40.461	PK

Profile: 2250805R	Page No.: 29
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 00:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 11n40	

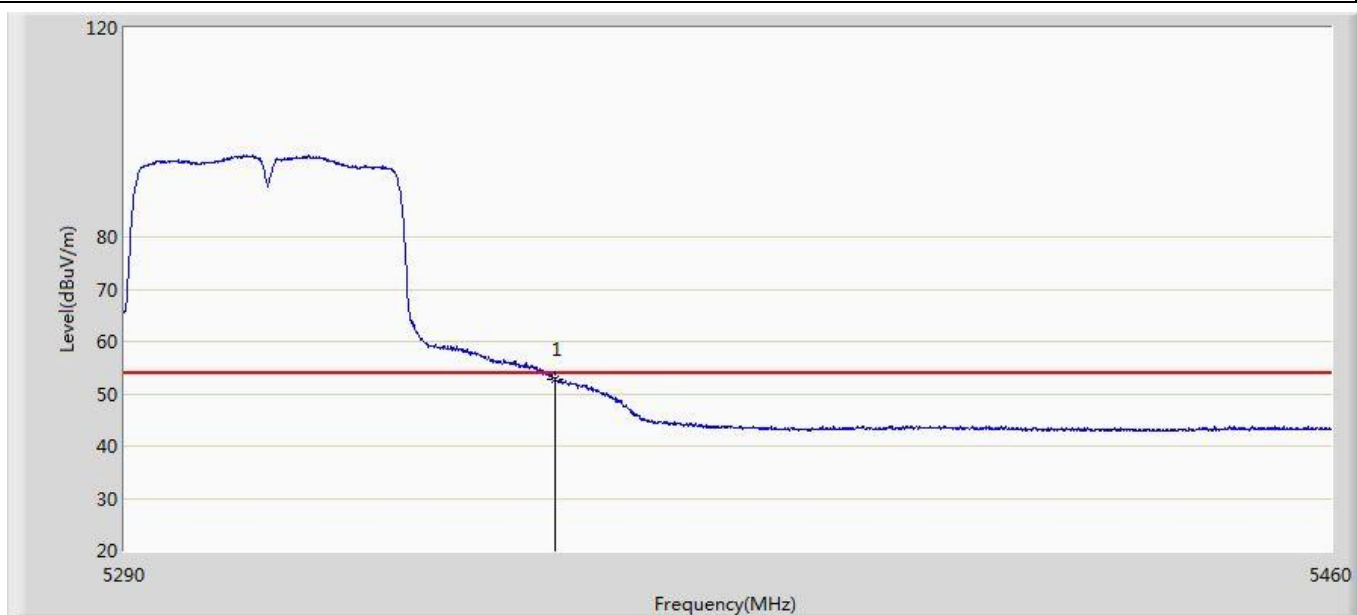


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	52.809	11.693	-1.191	54.000	41.116	AV

Profile: 2250805R	Page No.: 30
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 11n40	

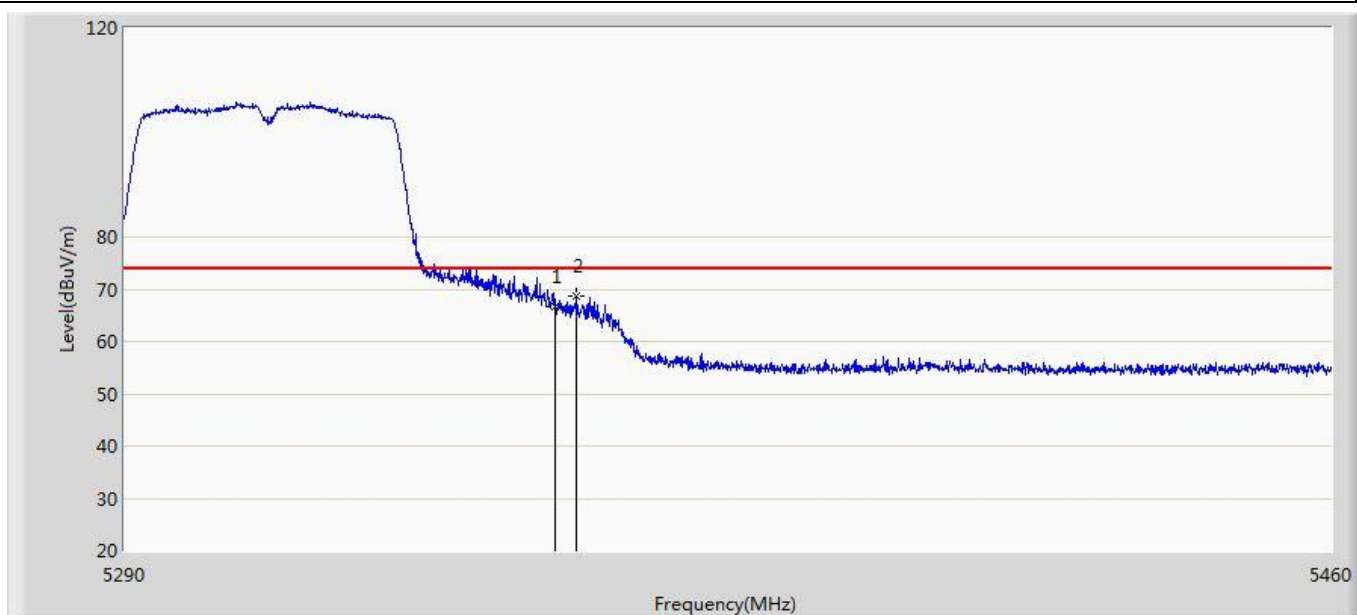


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	66.681	25.565	-7.319	74.000	41.116	PK
2	*	5353.155	68.790	27.657	-5.210	74.000	41.133	PK

Profile: 2250805R	Page No.: 31
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5310MHz by 11n40	

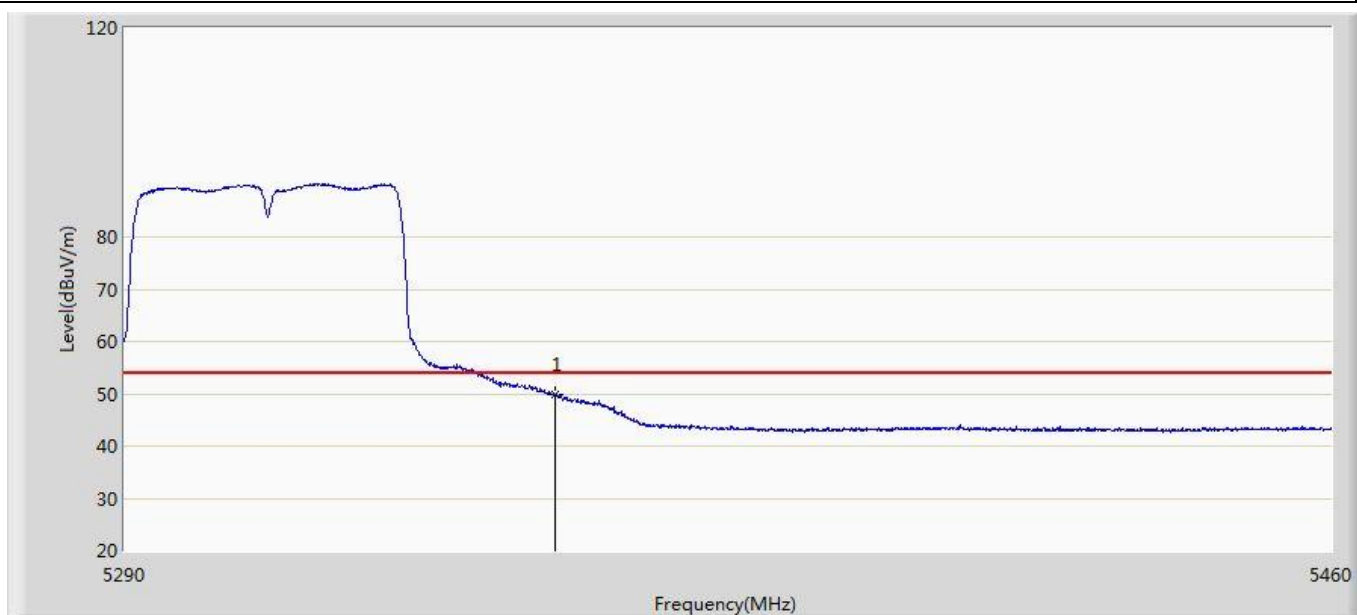


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.956	8.840	-4.044	54.000	41.116	AV

Profile: 2250805R	Page No.: 32
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 11n40	

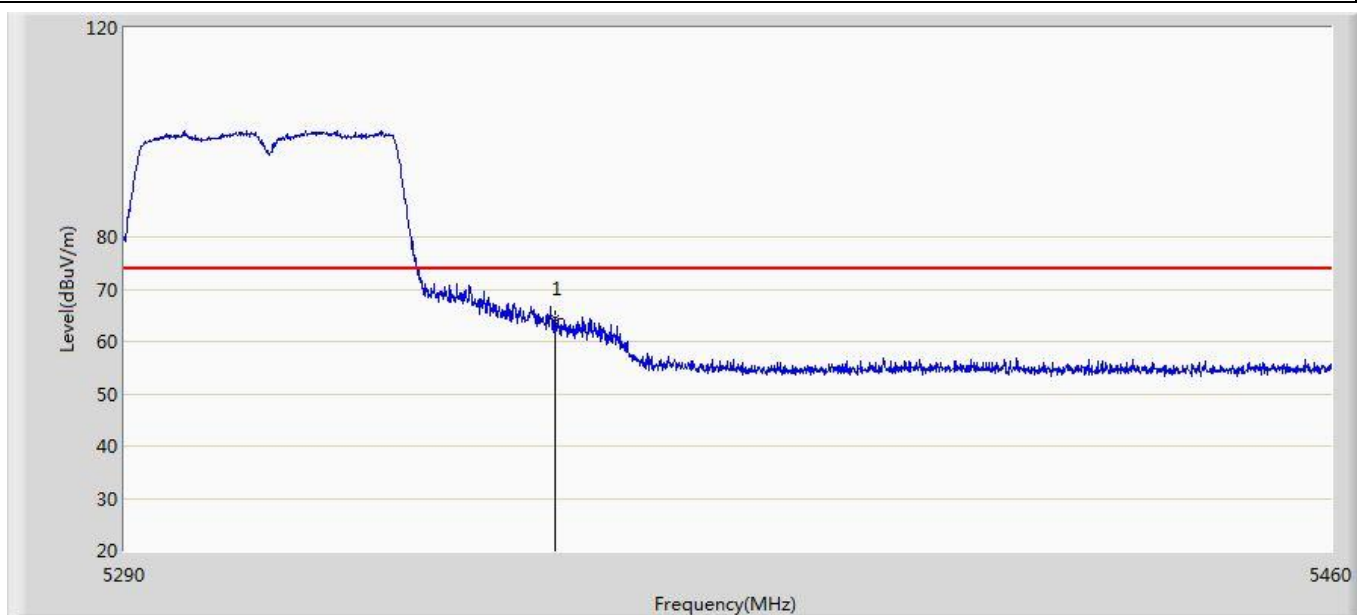


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	64.345	23.229	-9.655	74.000	41.116	PK

Profile: 2250805R	Page No.: 33
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 11n40	

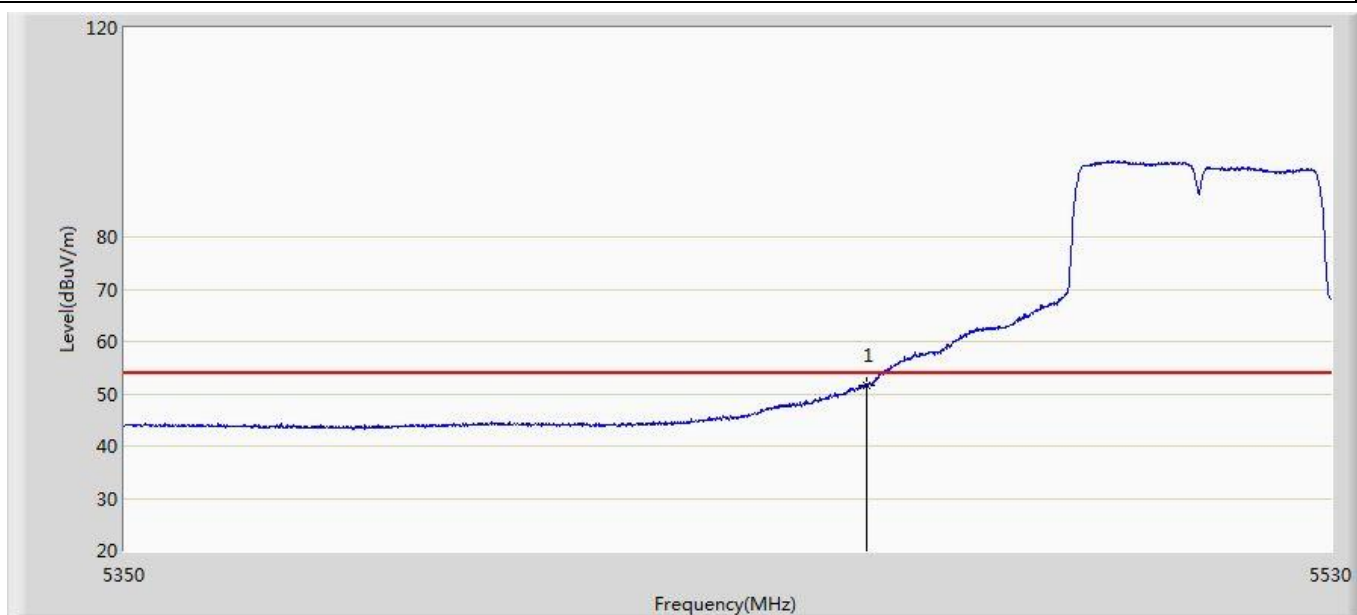


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.703	10.697	-2.297	54.000	41.006	AV

Profile: 2250805R	Page No.: 34
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5510MHz by 11n40	

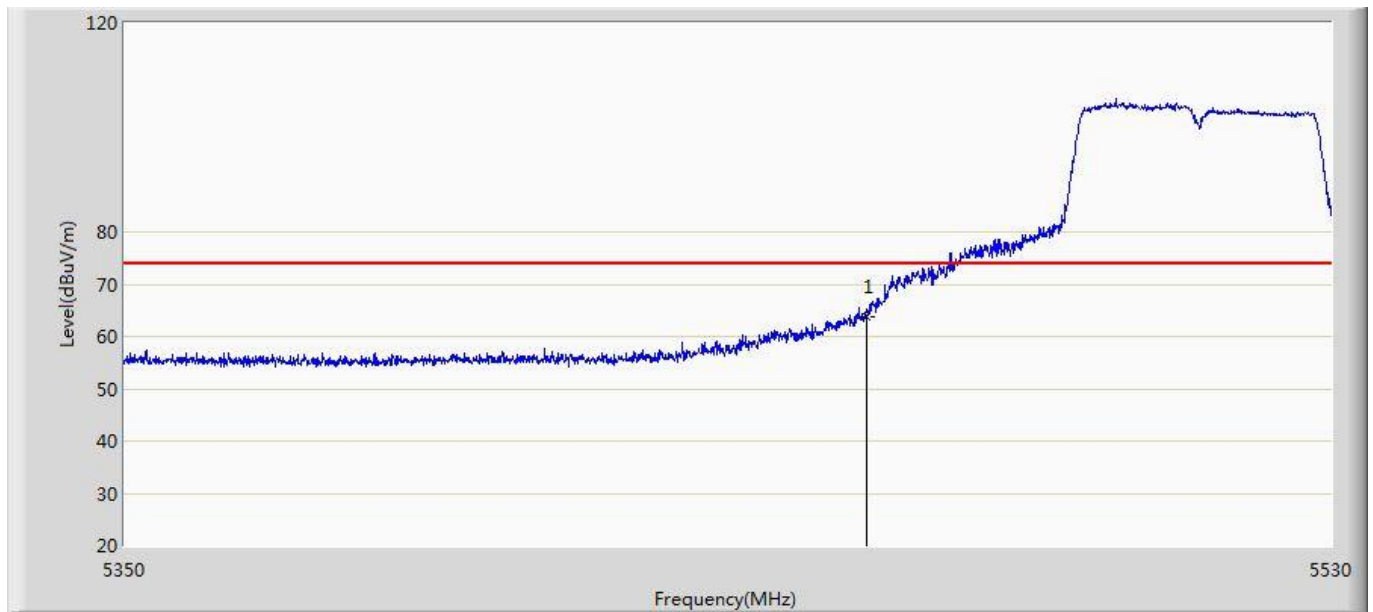


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	63.712	22.706	-10.288	74.000	41.006	PK

Profile: 2250805R	Page No.: 35
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 11n40	

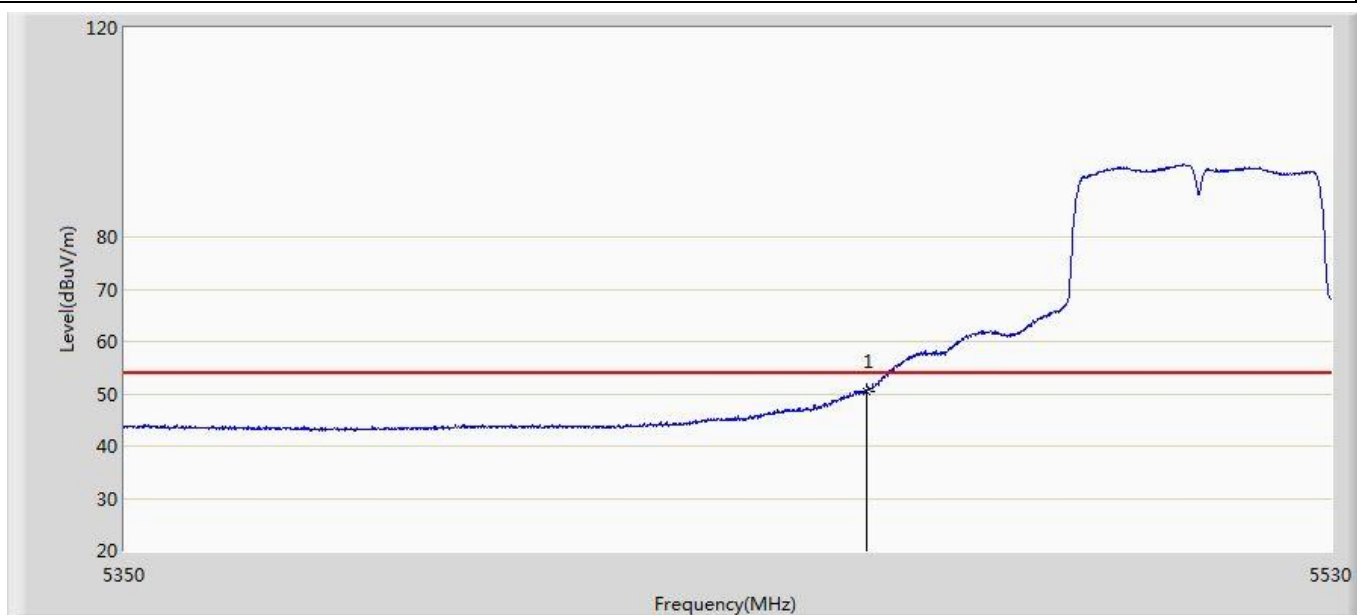


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	50.579	9.573	-3.421	54.000	41.006	AV

Profile: 2250805R	Page No.: 36
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5510MHz by 11n40	

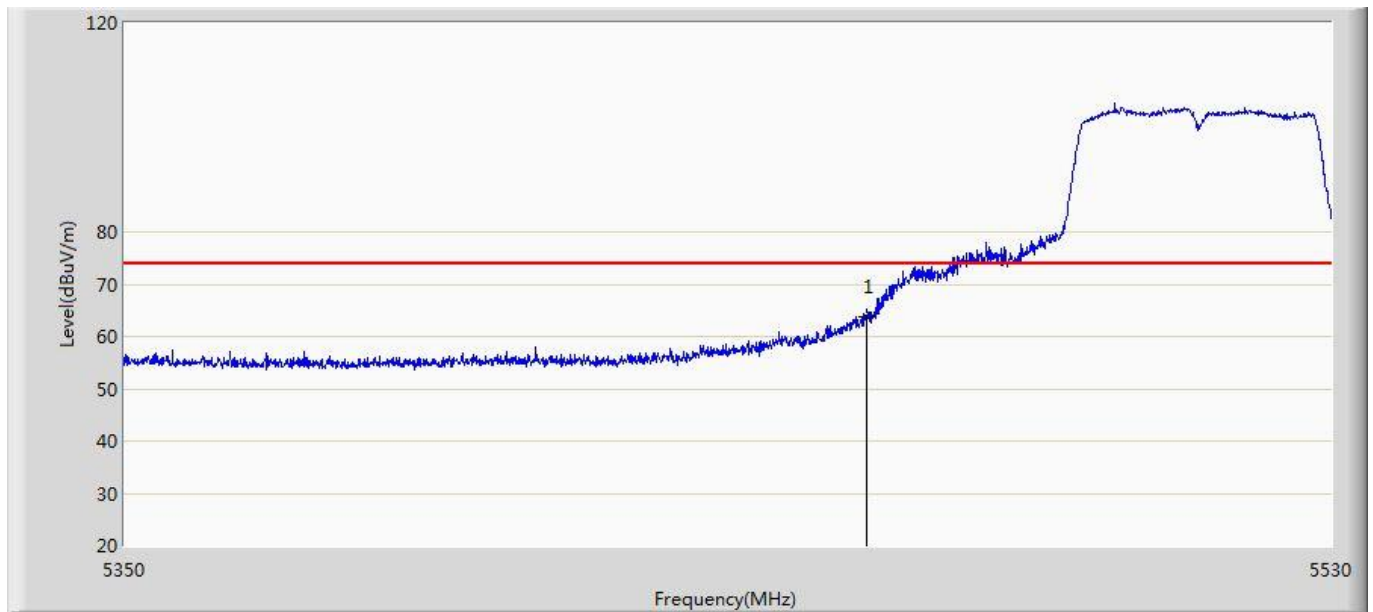


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	63.811	22.805	-10.189	74.000	41.006	PK

Profile: 2250805R	Page No.: 13
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:06
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5755MHz by 11n40	

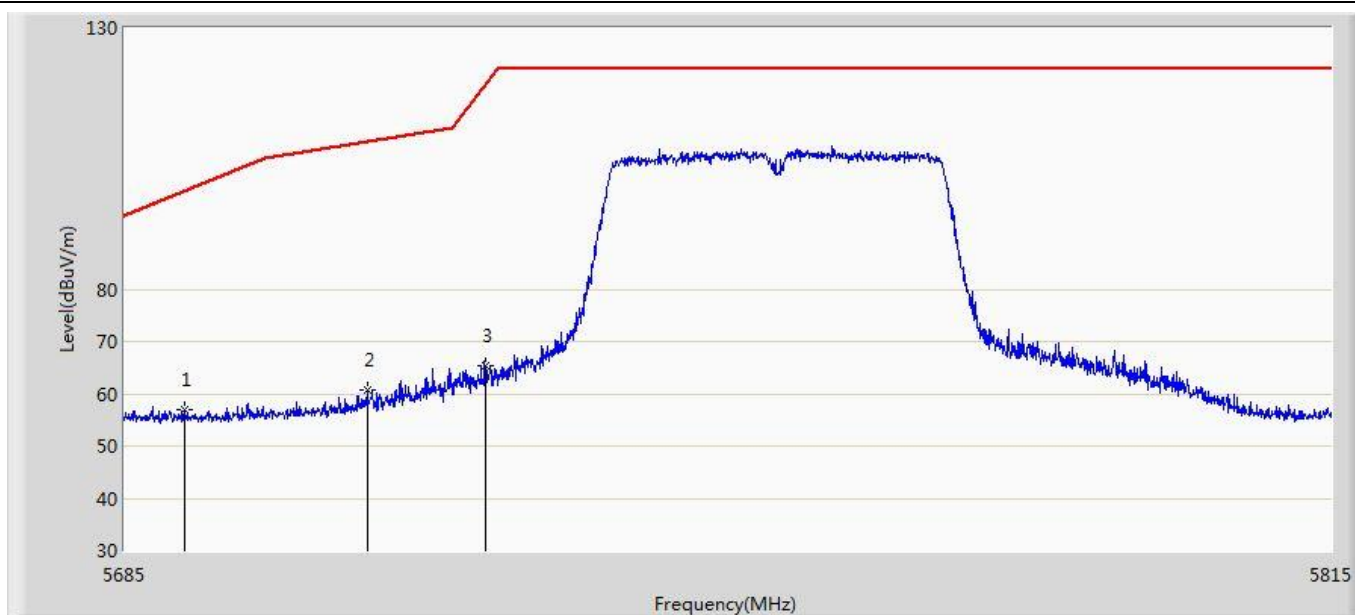


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5691.370	57.036	15.411	-41.801	98.837	41.625	PK
2		5710.935	60.670	18.263	-47.594	108.264	42.408	PK
3		5723.675	65.218	23.237	-53.962	119.180	41.981	PK

Profile: 2250805R	Page No.: 14
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:13
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5755MHz by 11n40	

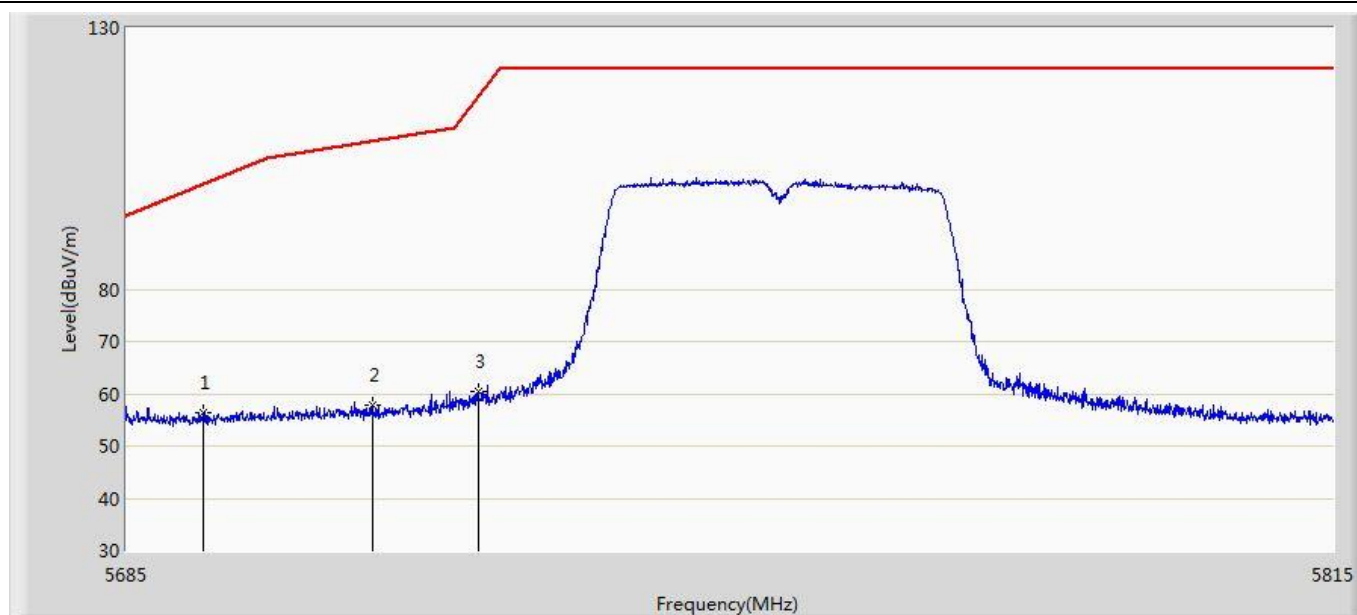


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.190	56.514	14.834	-43.666	100.180	41.680	PK
2		5711.325	57.902	15.508	-50.471	108.373	42.394	PK
3		5722.635	60.385	18.369	-56.424	116.809	42.015	PK

Profile: 2250805R	Page No.: 15
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:13
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5795MHz by 11n40	

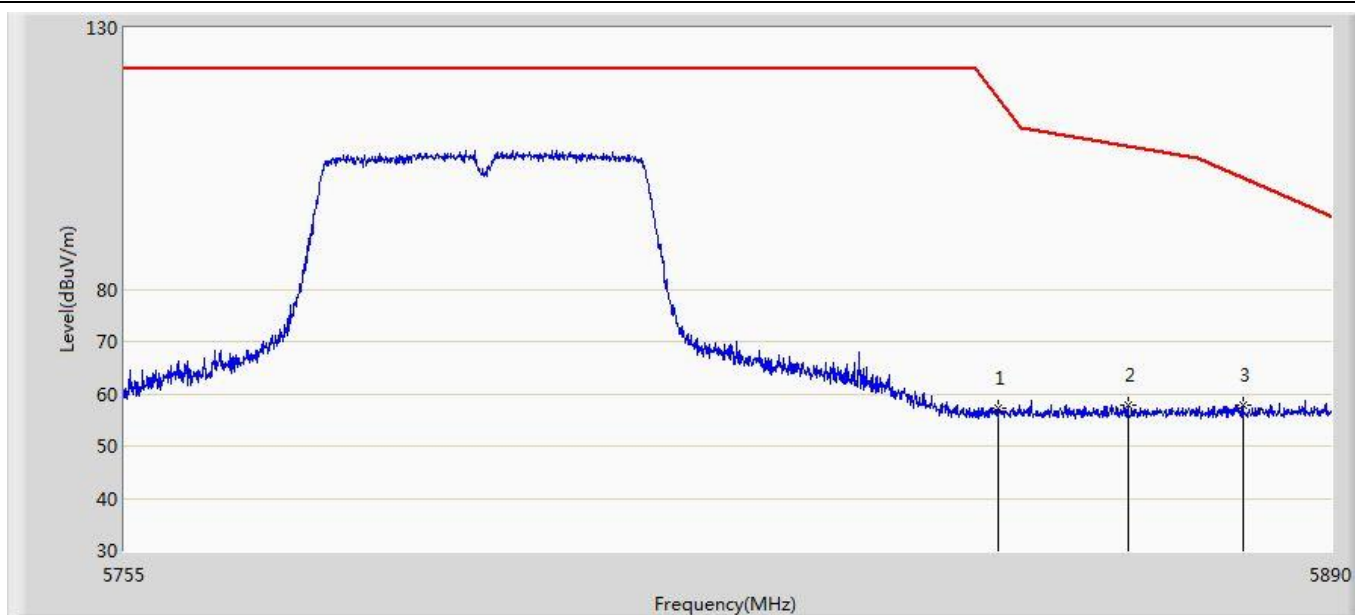


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.470	57.224	15.208	-59.343	116.567	42.016	PK
2		5867.118	57.895	15.698	-49.510	107.405	42.197	PK
3	*	5880.010	57.870	15.605	-43.608	101.478	42.265	PK

Profile: 2250805R	Page No.: 16
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:14
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5795MHz by 11n40	

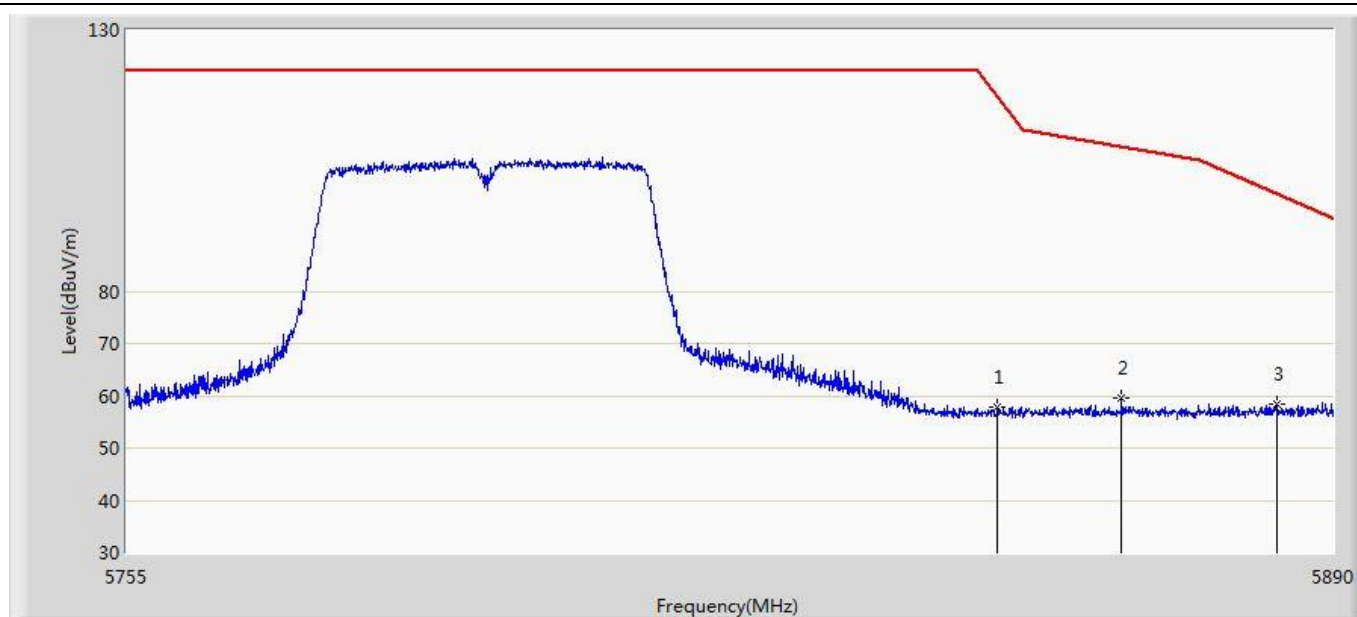


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.200	57.711	15.700	-59.471	117.183	42.011	PK
2		5866.172	59.531	17.339	-48.138	107.669	42.192	PK
3	*	5883.723	58.433	16.138	-40.289	98.722	42.295	PK

Profile: 2250805R	Page No.: 37
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 11ac20	

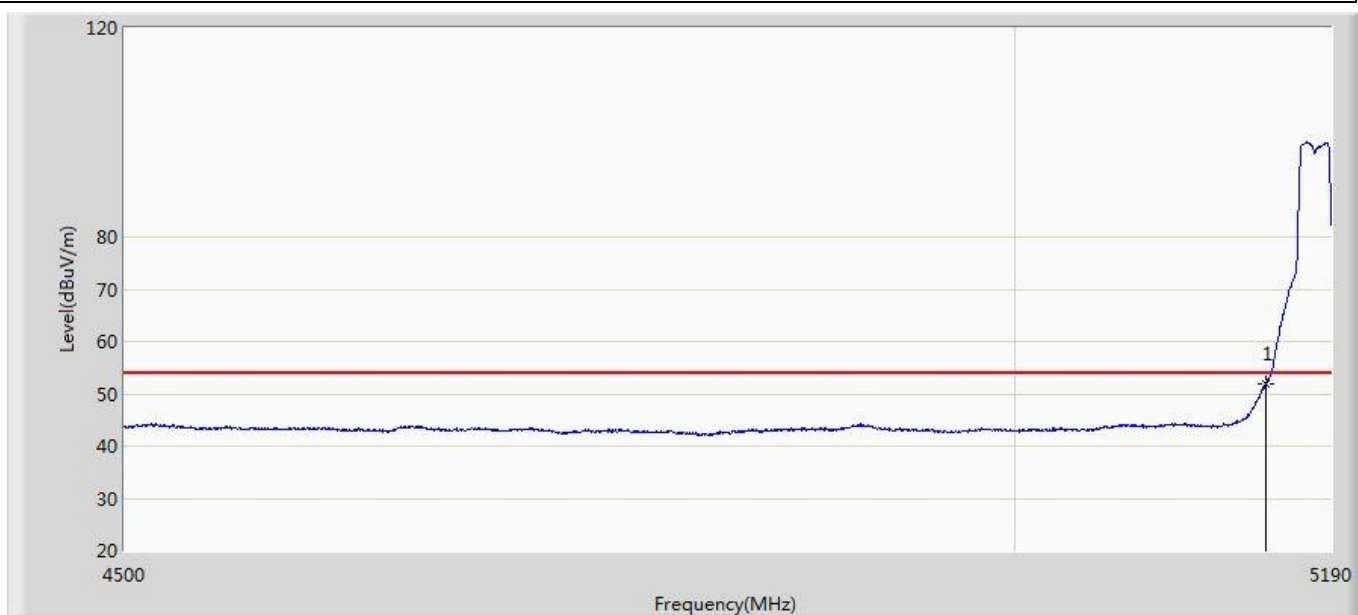


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	52.005	11.544	-1.995	54.000	40.461	AV

Profile: 2250805R	Page No.: 38
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5180MHz by 11ac20	

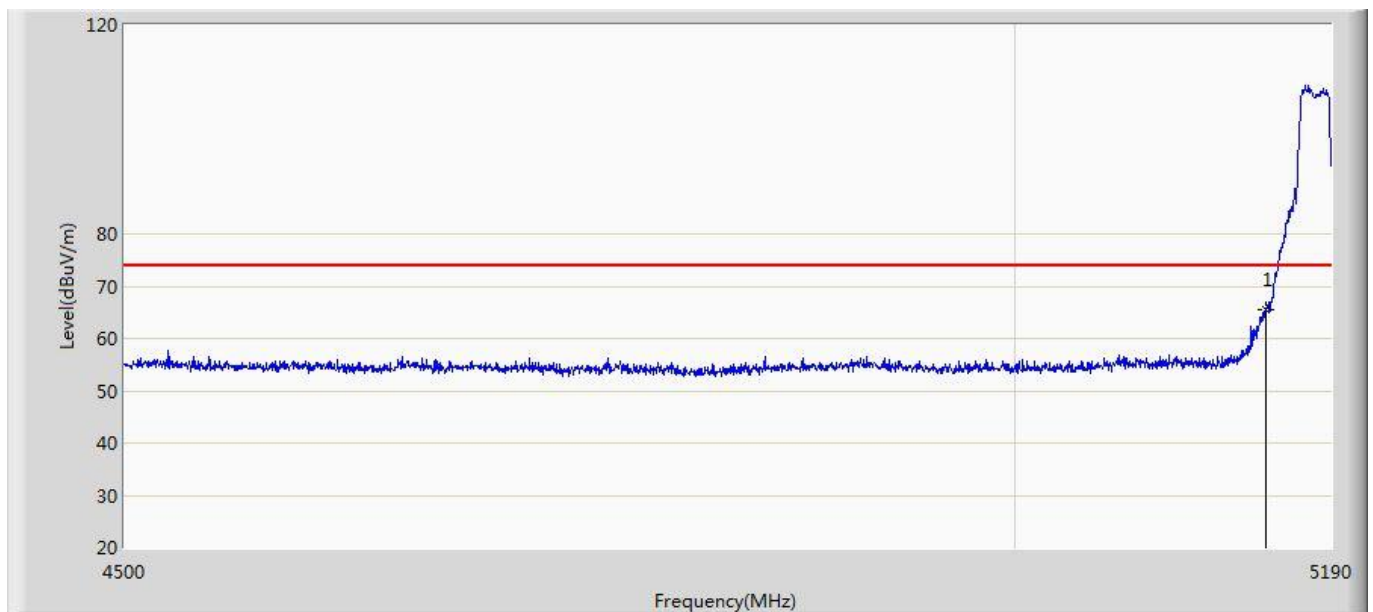


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	65.431	24.970	-8.569	74.000	40.461	PK

Profile: 2250805R	Page No.: 39
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 11ac20	

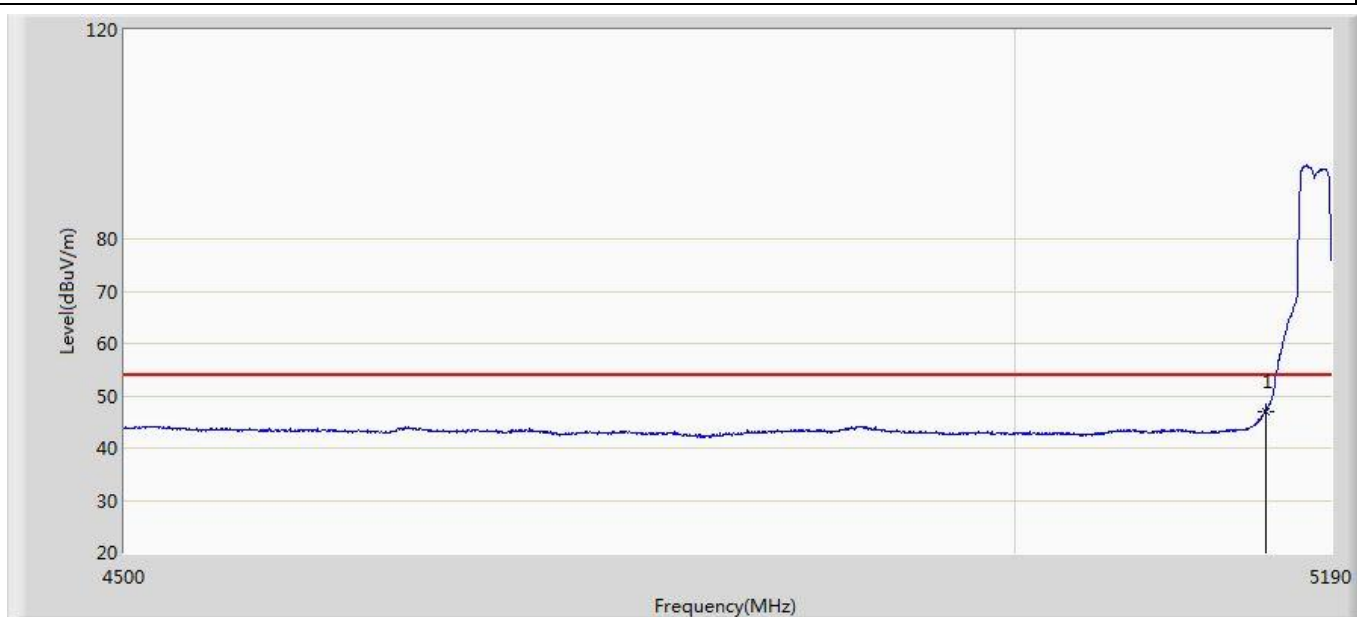


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	47.046	6.585	-6.954	54.000	40.461	AV

Profile: 2250805R	Page No.: 40
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5180MHz by 11ac20	

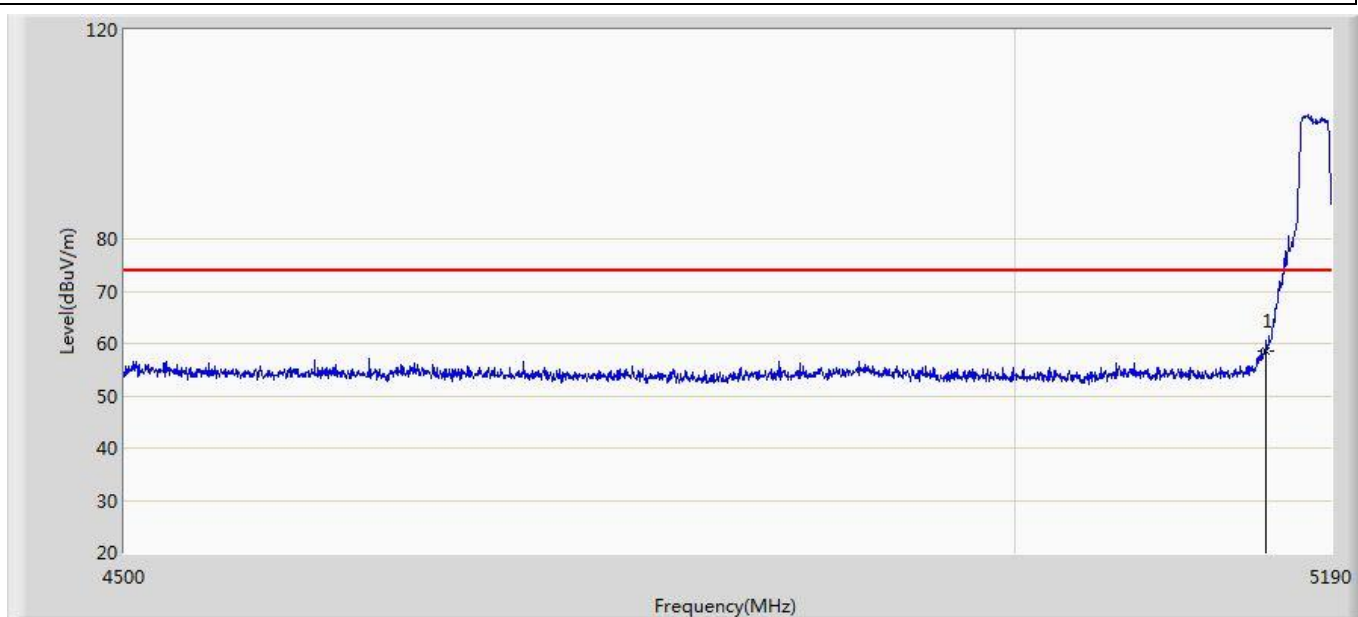


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	58.478	18.017	-15.522	74.000	40.461	PK

Profile: 2250805R	Page No.: 41
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 11ac20	

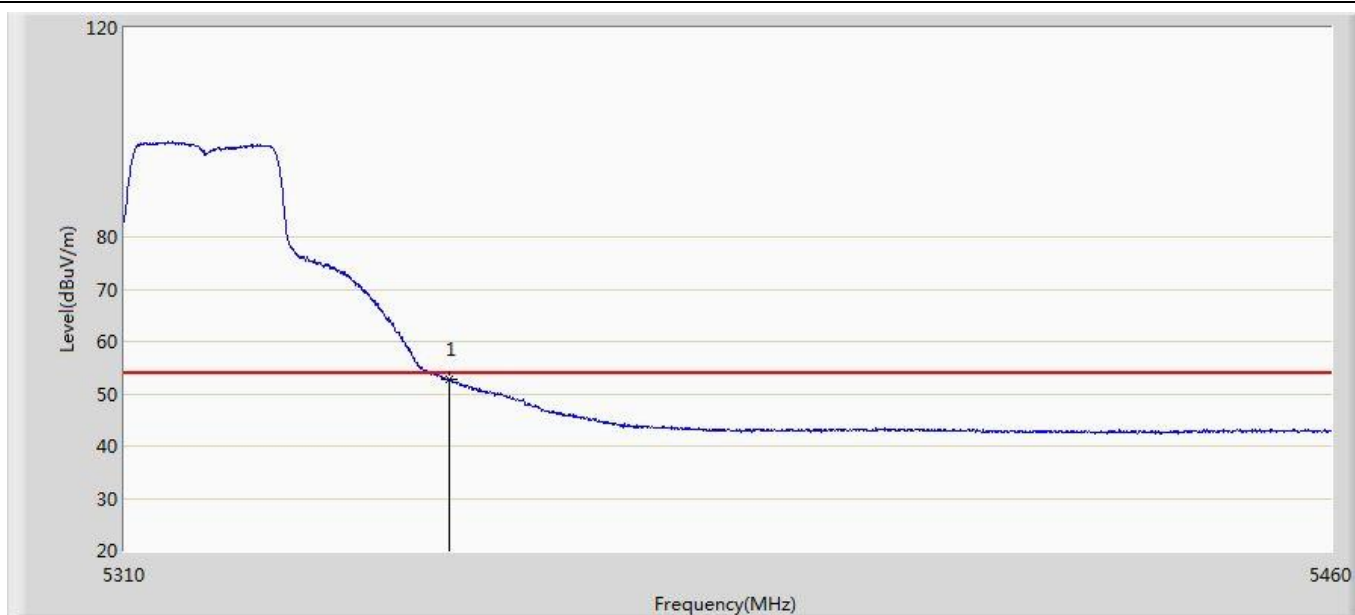


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	52.710	11.594	-1.290	54.000	41.116	AV

Profile: 2250805R	Page No.: 42
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 11ac20	

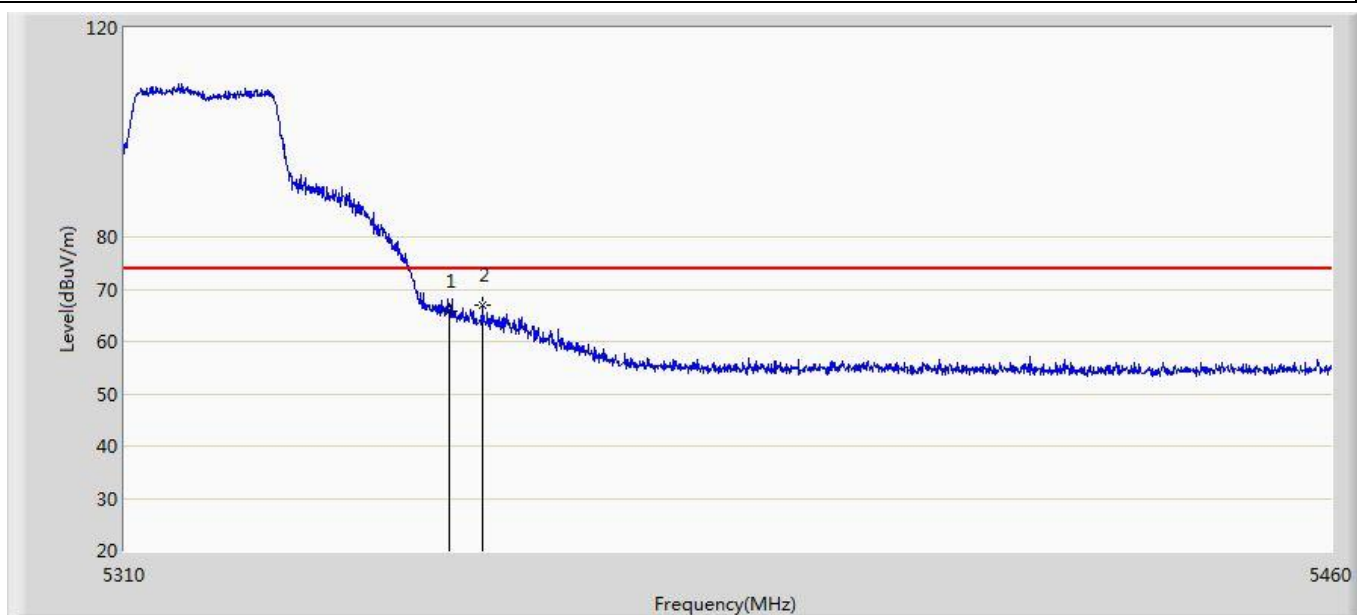


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	65.915	24.799	-8.085	74.000	41.116	PK
2	*	5354.025	67.001	25.887	-6.999	74.000	41.115	PK

Profile: 2250805R	Page No.: 43
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 11ac20	

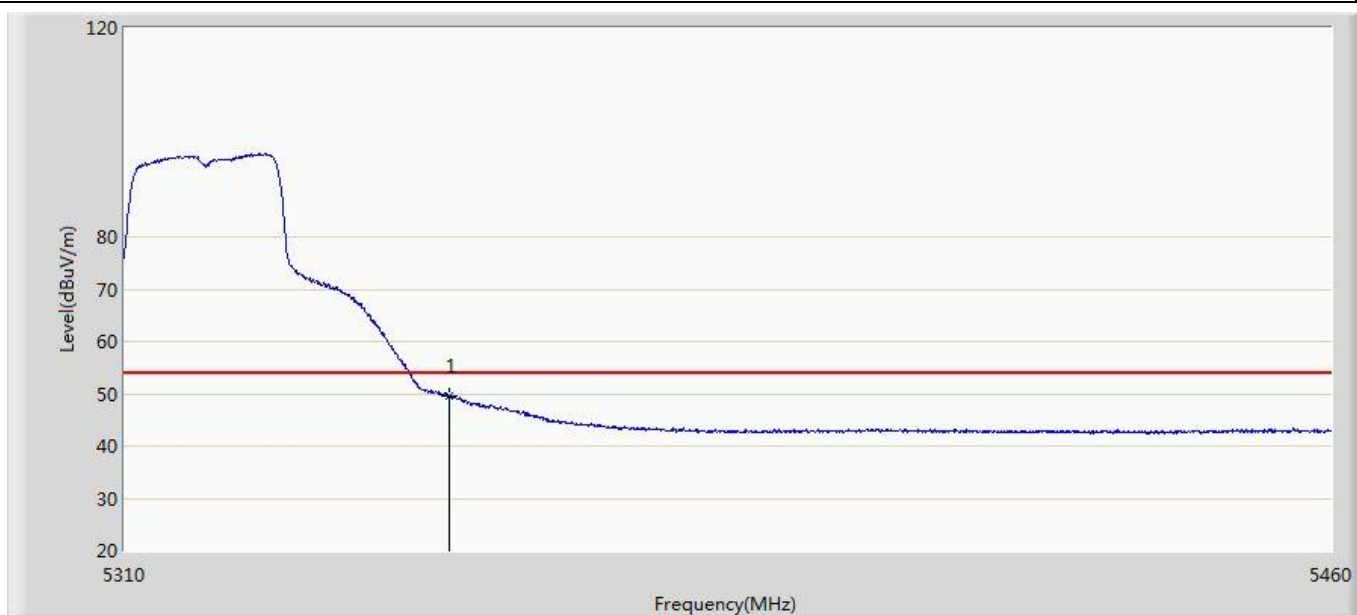


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.458	8.342	-4.542	54.000	41.116	AV

Profile: 2250805R	Page No.: 44
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 11ac20	

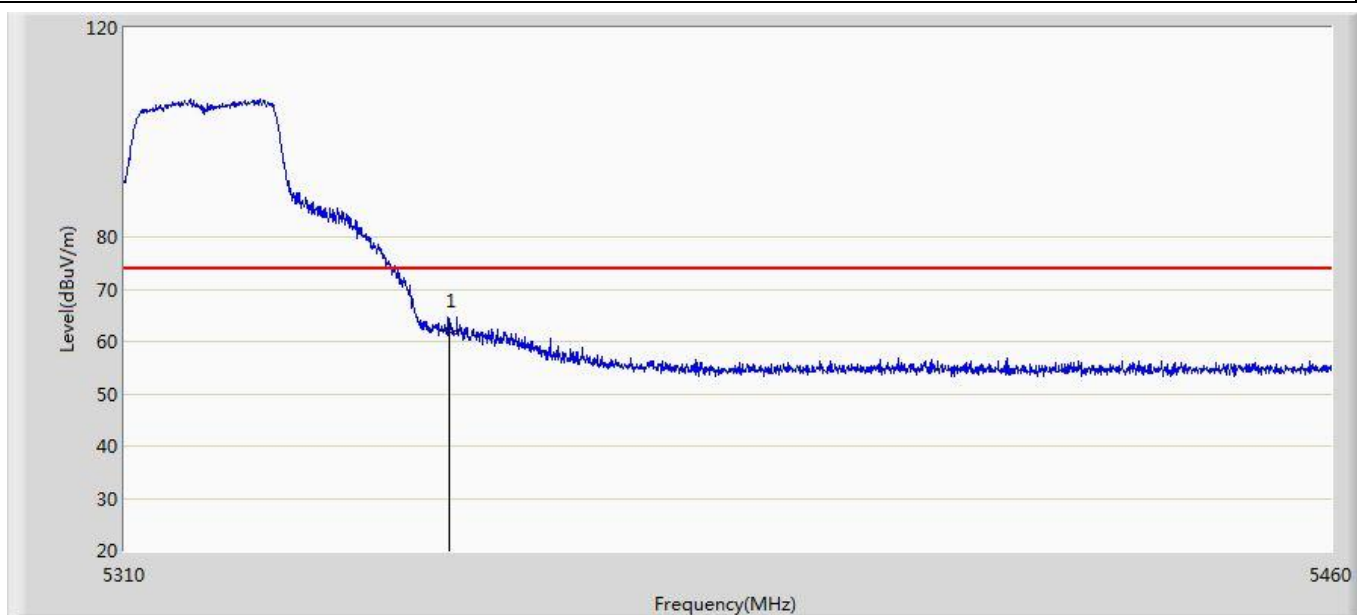


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	61.963	20.847	-12.037	74.000	41.116	PK

Profile: 2250805R	Page No.: 45
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 11ac20	

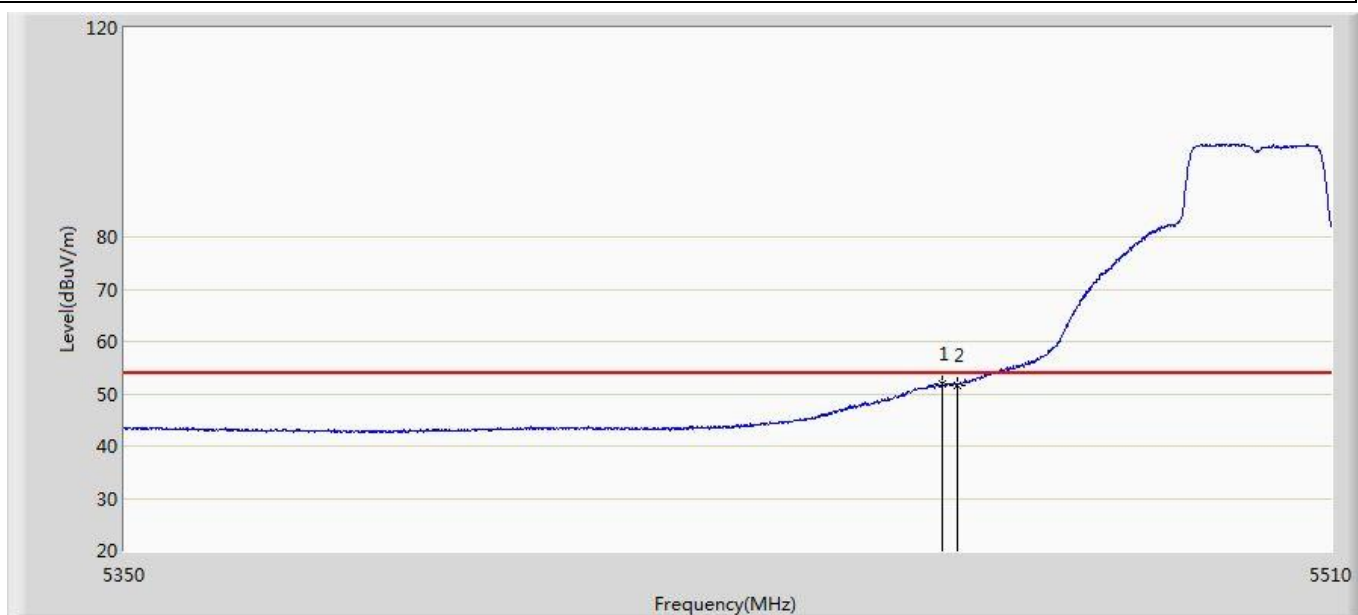

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.920	51.870	10.871	-2.130	54.000	40.999	AV
2		5460.000	51.739	10.733	-2.261	54.000	41.006	AV

Profile: 2250805R	Page No.: 46
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 11ac20	

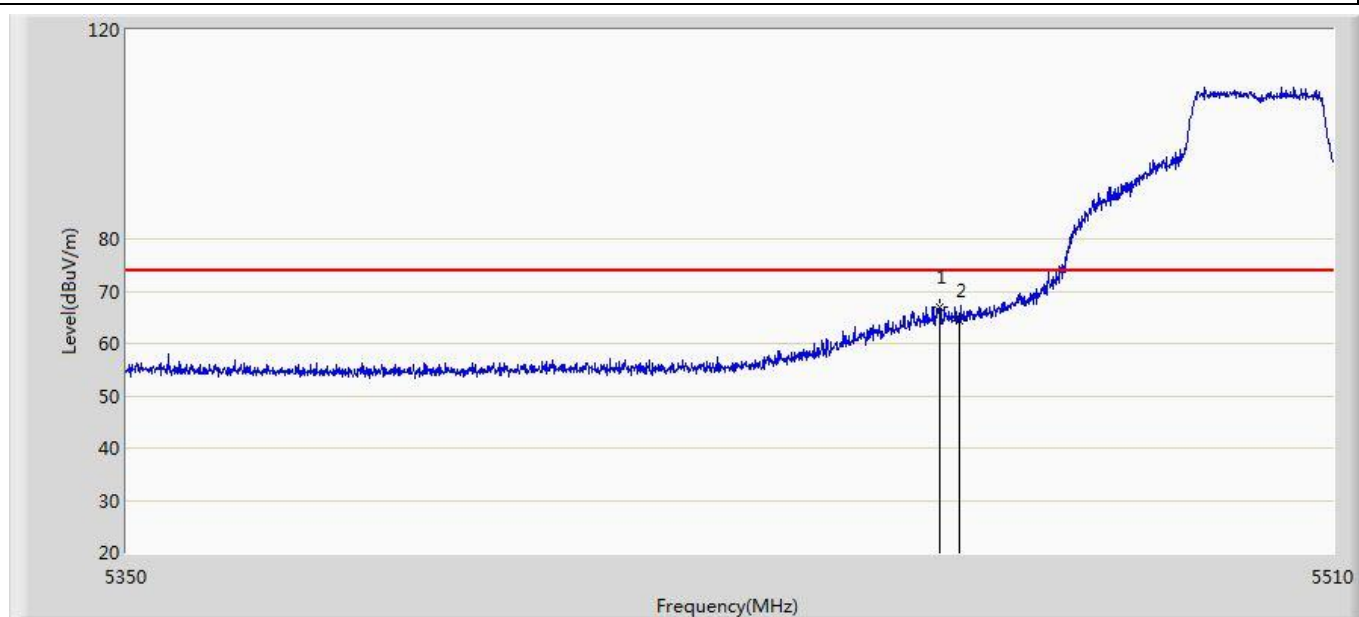


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.280	66.855	25.858	-7.145	74.000	40.997	PK
2		5460.000	64.446	23.440	-9.554	74.000	41.006	PK

Profile: 2250805R	Page No.: 47
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 11ac20	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	50.823	9.817	-3.177	54.000	41.006	AV

Profile: 2250805R	Page No.: 48
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 11ac20	

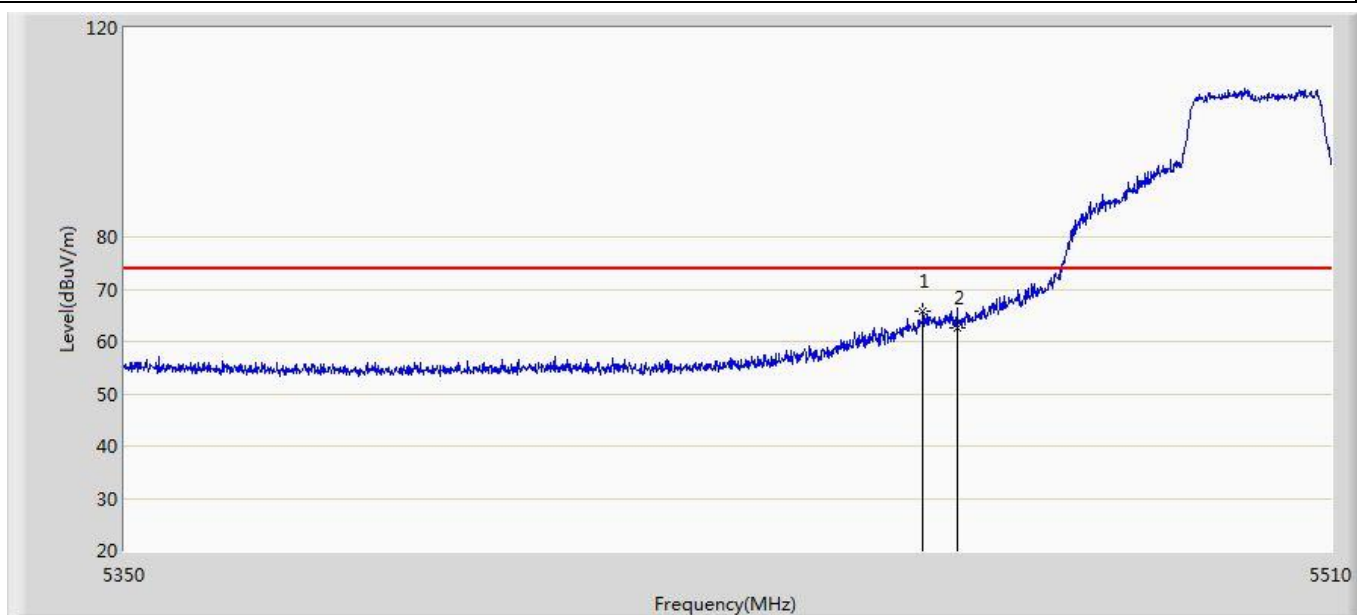


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5455.360	65.851	24.860	-8.149	74.000	40.991	PK
2		5460.000	62.605	21.599	-11.395	74.000	41.006	PK

Profile: 2250805R	Page No.: 17
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:15
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5745MHz by 11ac20	

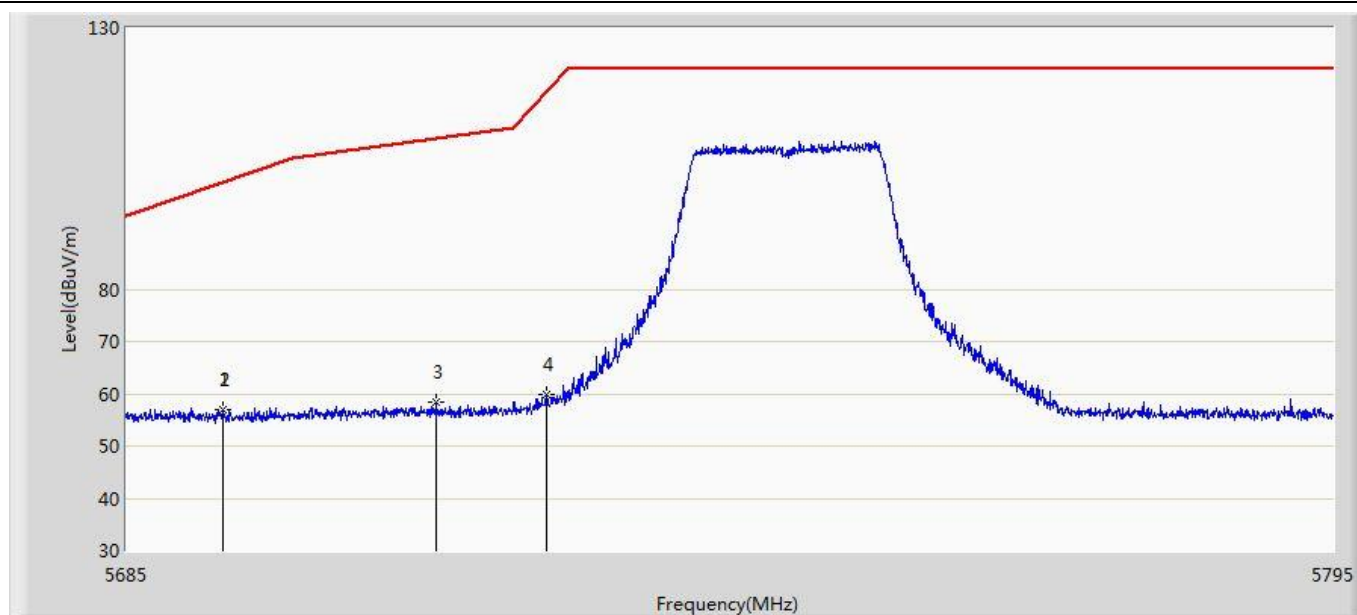


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.690	56.953	15.248	-43.596	100.549	41.704	PK
2		5693.690	56.953	15.248	-43.596	100.549	41.704	PK
3		5713.105	58.356	16.021	-50.516	108.872	42.335	PK
4		5723.060	59.851	17.850	-57.927	117.778	42.001	PK

Profile: 2250805R	Page No.: 18
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:19
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5745MHz by 11ac20	

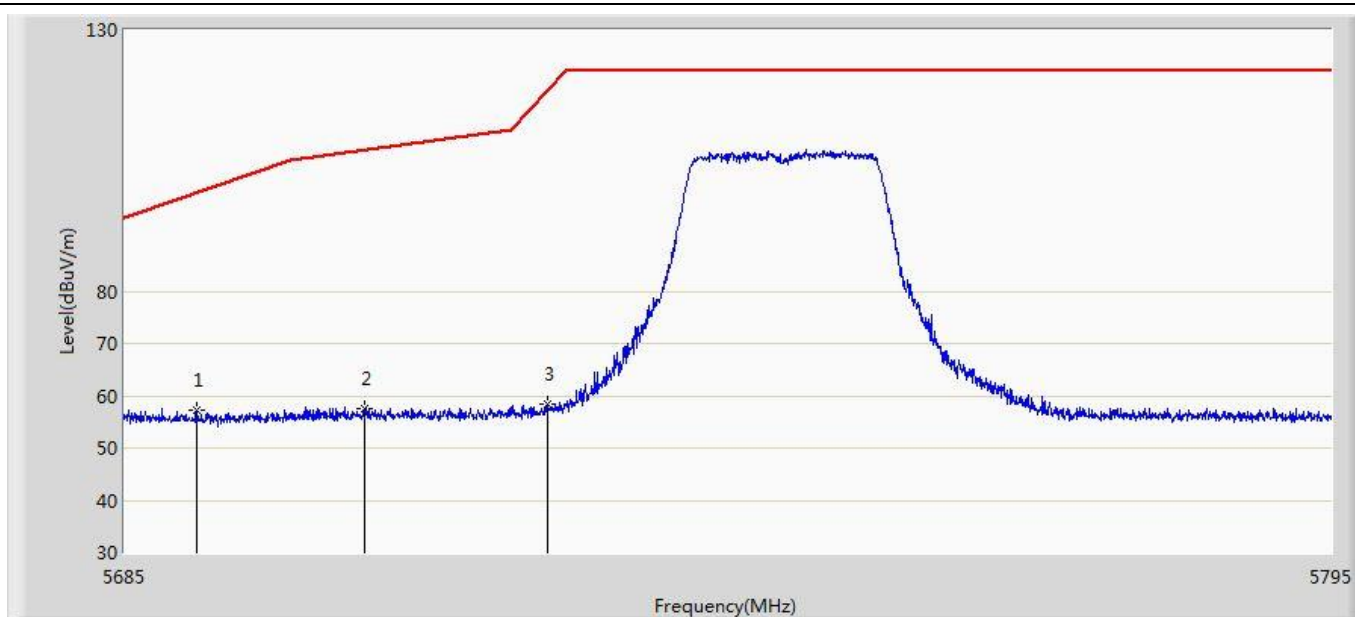


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5691.600	57.207	15.584	-41.799	99.007	41.623	PK
2		5706.780	57.562	15.201	-49.539	107.101	42.361	PK
3		5723.335	58.366	16.374	-60.039	118.405	41.992	PK

Profile: 2250805R	Page No.: 19
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:21
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5785MHz by 11ac20	

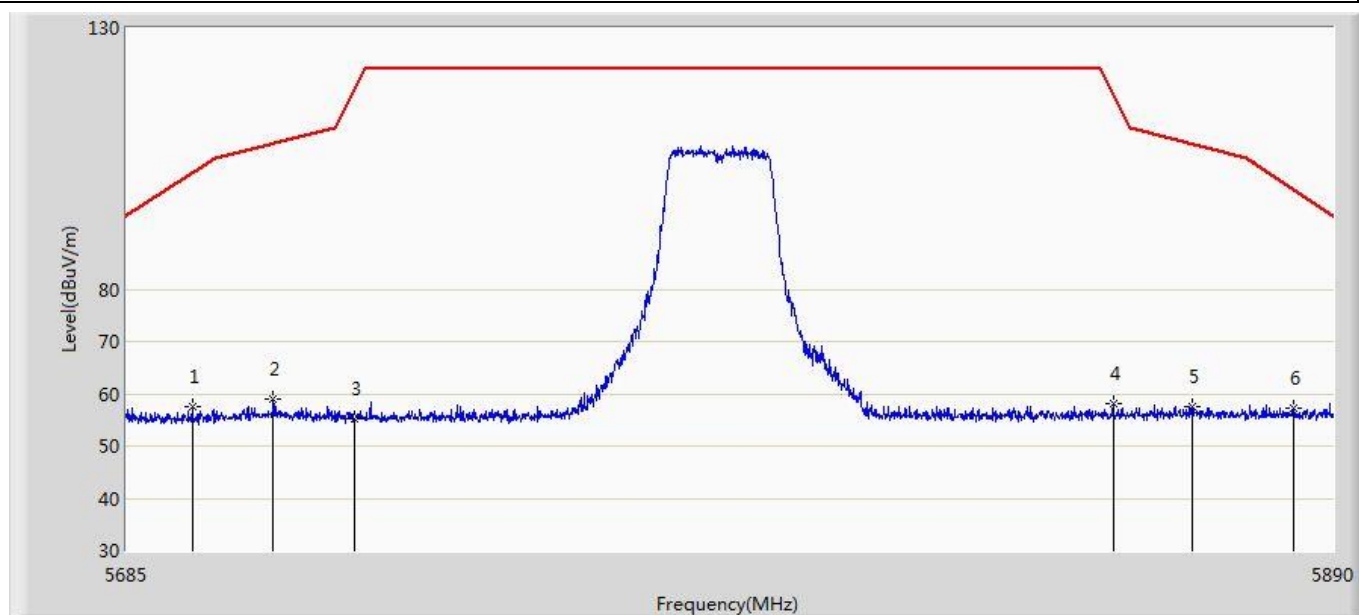


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.070	57.551	15.727	-44.753	102.304	41.824	PK
2		5709.600	58.899	16.447	-48.992	107.890	42.452	PK
3		5723.130	55.178	13.179	-62.760	117.938	41.999	PK
4		5852.178	58.089	16.078	-59.144	117.233	42.011	PK
5		5865.810	57.515	15.325	-50.256	107.771	42.190	PK
6	*	5883.235	57.272	14.981	-41.812	99.084	42.291	PK

Profile: 2250805R	Page No.: 20
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:21
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5785MHz by 11ac20	

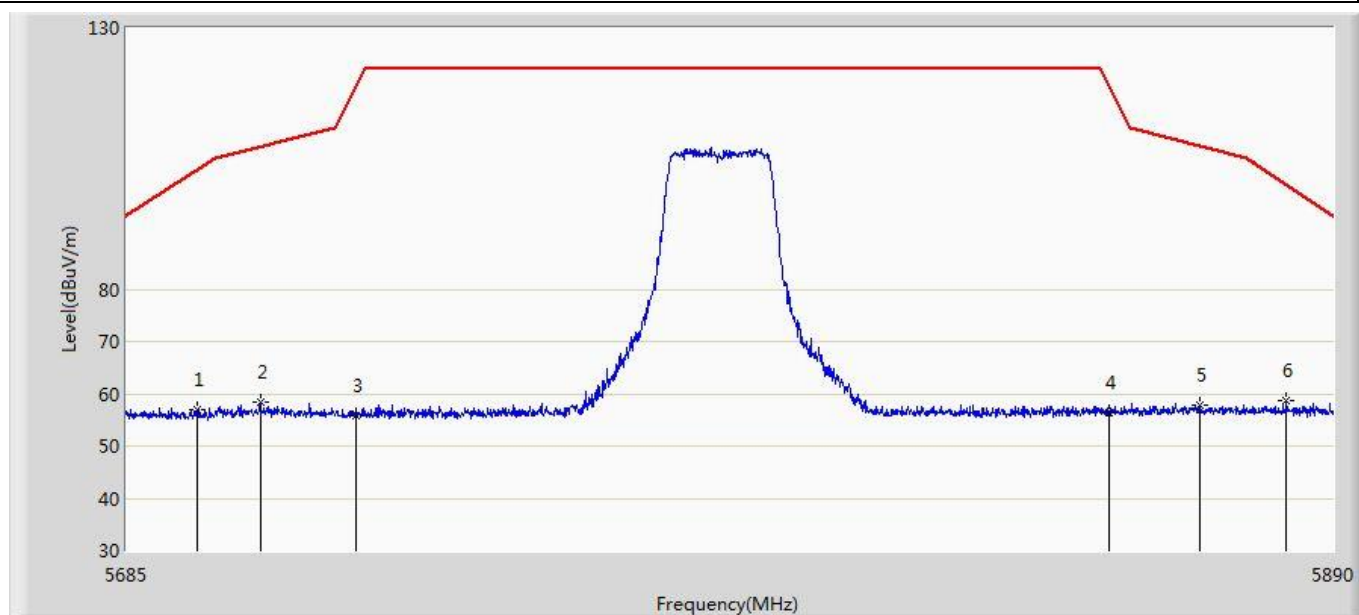


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.993	56.948	15.078	-46.036	102.984	41.870	PK
2		5707.447	58.390	15.996	-48.897	107.287	42.394	PK
3		5723.437	55.685	13.696	-62.953	118.637	41.989	PK
4		5851.460	56.404	14.405	-62.466	118.870	41.999	PK
5		5867.143	57.829	15.632	-49.569	107.398	42.197	PK
6	*	5882.005	58.680	16.399	-41.317	99.997	42.281	PK

Profile: 2250805R	Page No.: 21
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:22
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5825MHz by 11ac20	

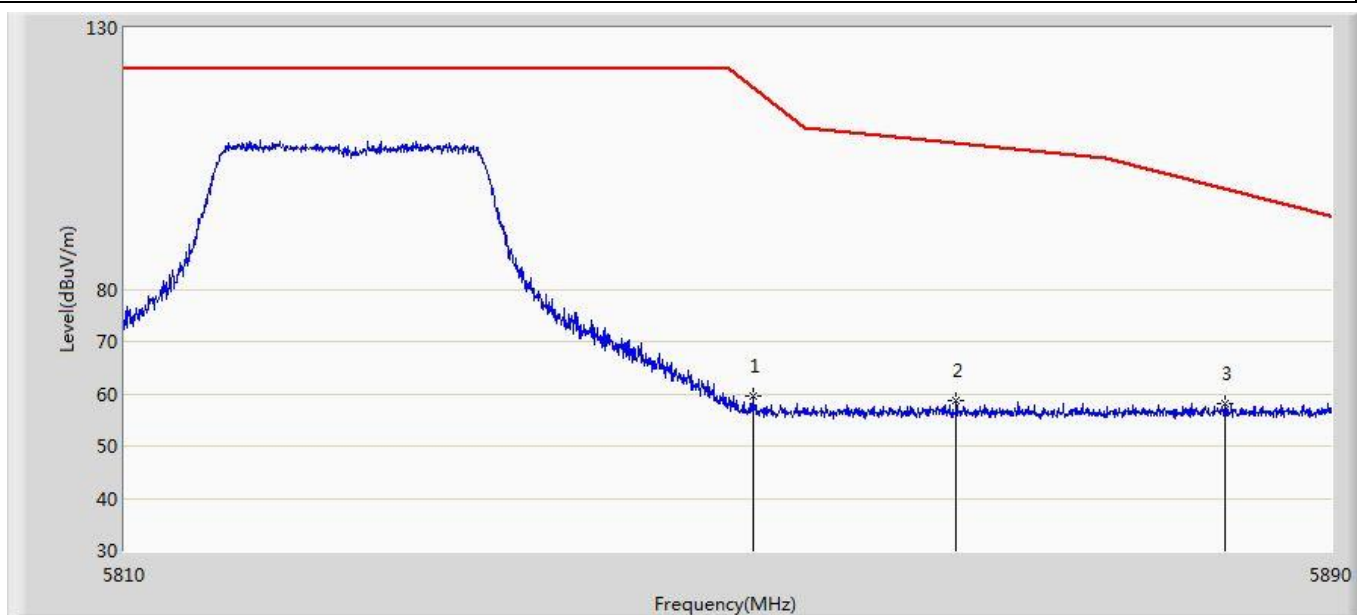


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5851.520	59.440	17.440	-59.293	118.733	42.000	PK
2		5865.040	58.740	16.554	-49.246	107.986	42.186	PK
3	*	5882.920	57.986	15.697	-41.333	99.318	42.288	PK

Profile: 2250805R	Page No.: 22
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 03:22
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5825MHz by 11ac20	

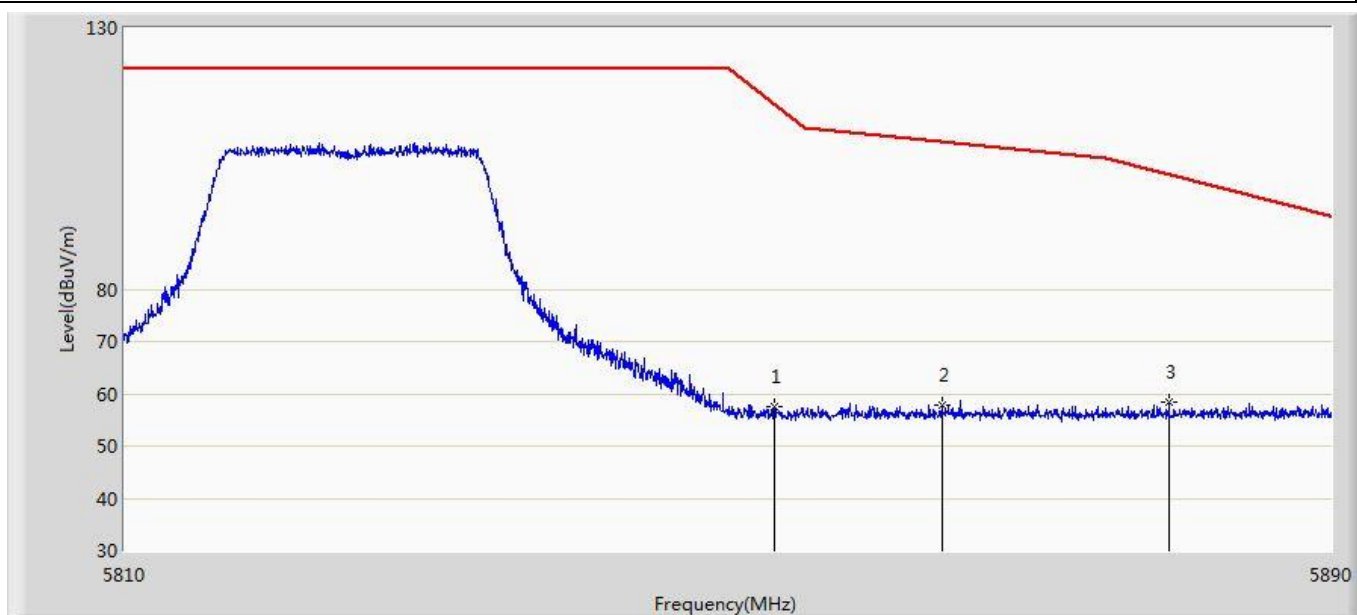


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.960	57.680	15.656	-57.770	115.450	42.023	PK
2		5864.080	57.830	15.648	-50.426	108.255	42.182	PK
3	*	5879.200	58.336	16.077	-43.744	102.080	42.258	PK

Profile: 2250805R	Page No.: 49
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5190MHz by 11ac40	

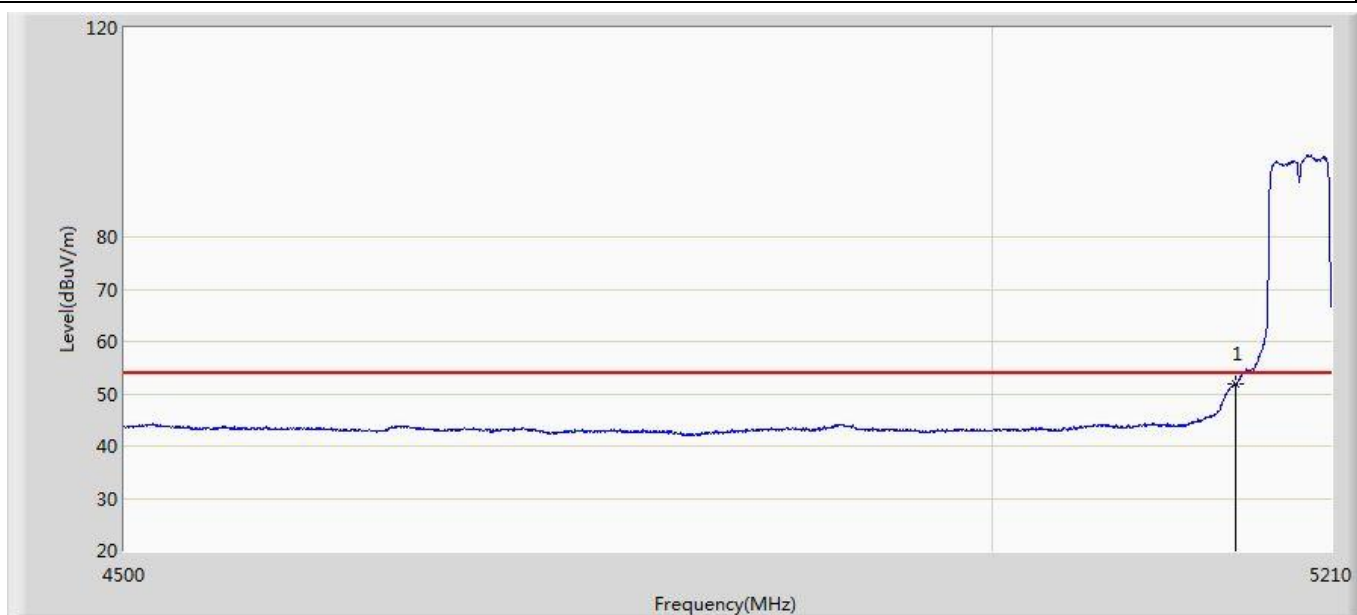


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.827	11.366	-2.173	54.000	40.461	AV

Profile: 2250805R	Page No.: 50
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5190MHz by 11ac40	

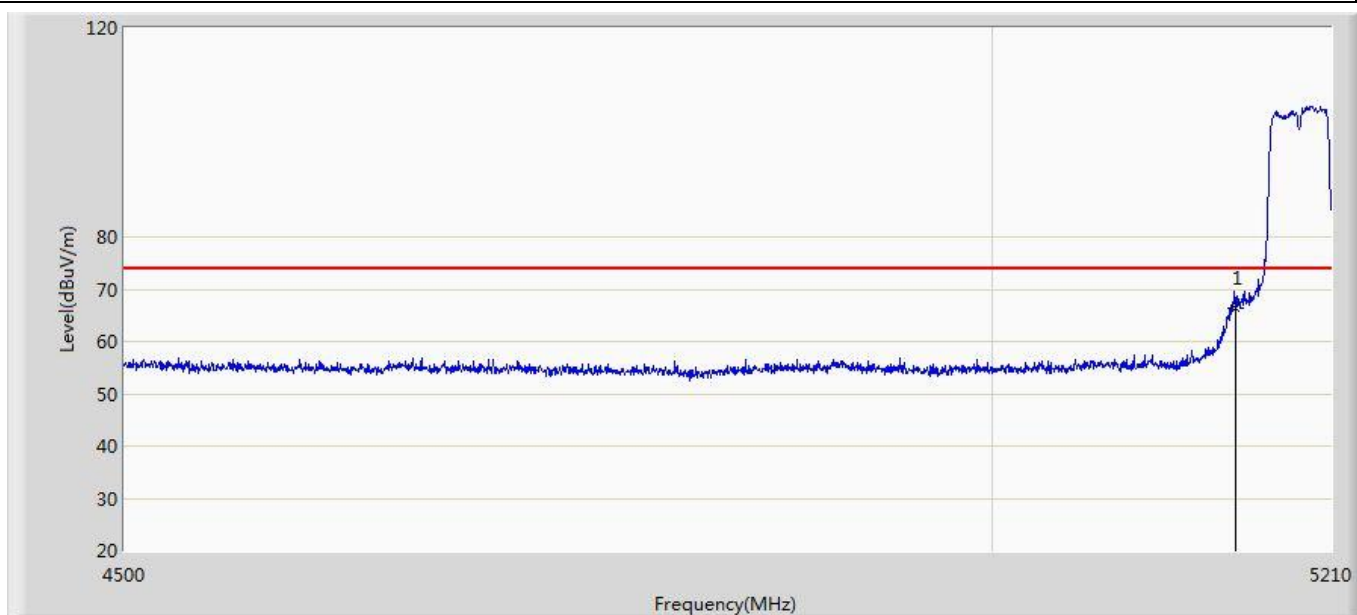


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	66.276	25.815	-7.724	74.000	40.461	PK

Profile: 2250805R	Page No.: 51
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5190MHz by 11ac40	

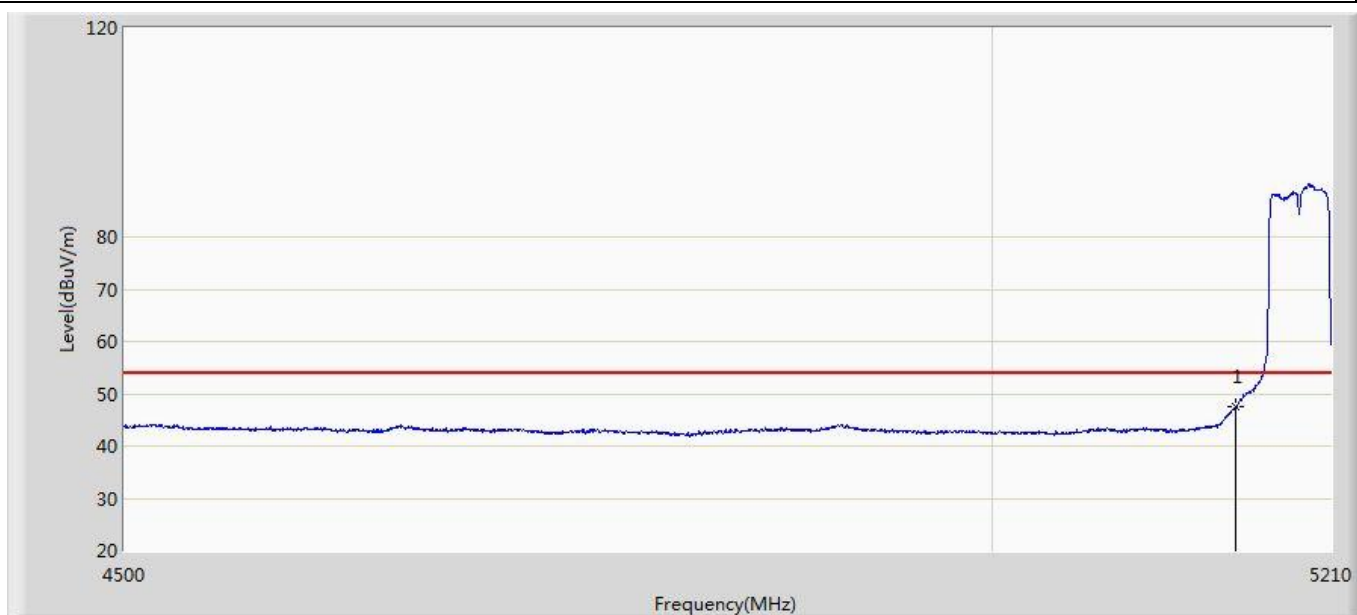


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	47.408	6.947	-6.592	54.000	40.461	AV

Profile: 2250805R	Page No.: 52
Engineer:YuLiu	
Site: AC5	Time: 2022/06/12 - 01:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5190MHz by 11ac40	

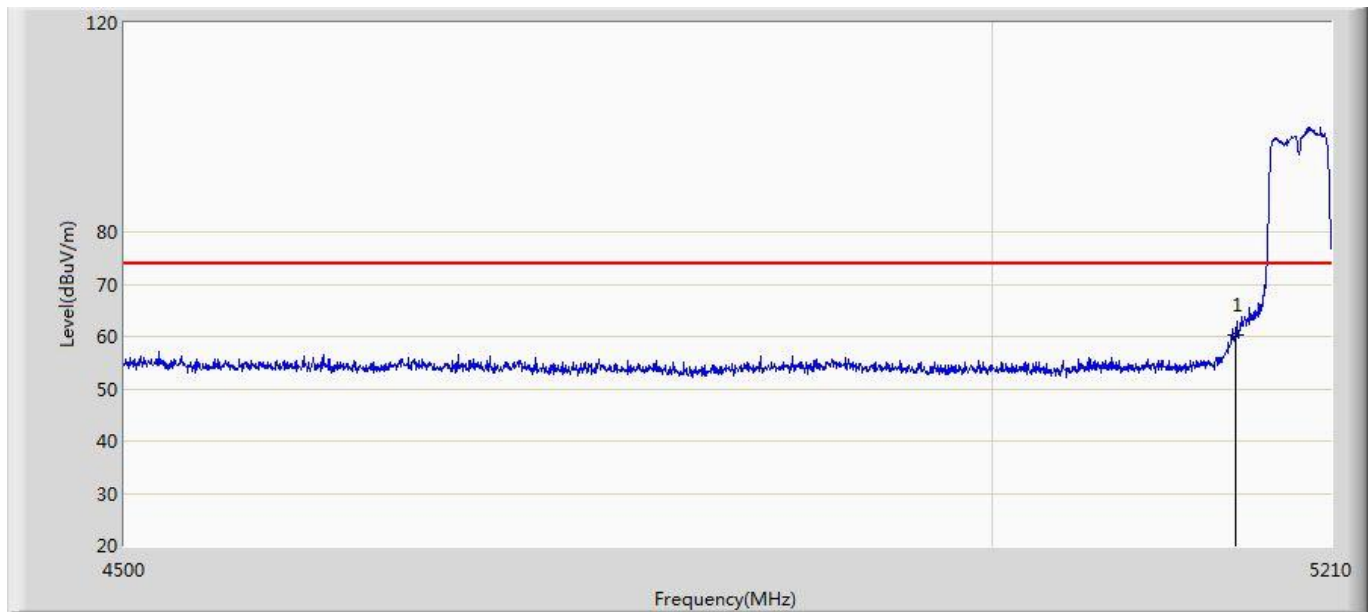


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	60.194	19.733	-13.806	74.000	40.461	PK

Profile: 2250805R	Page No.: 53
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 11ac40	

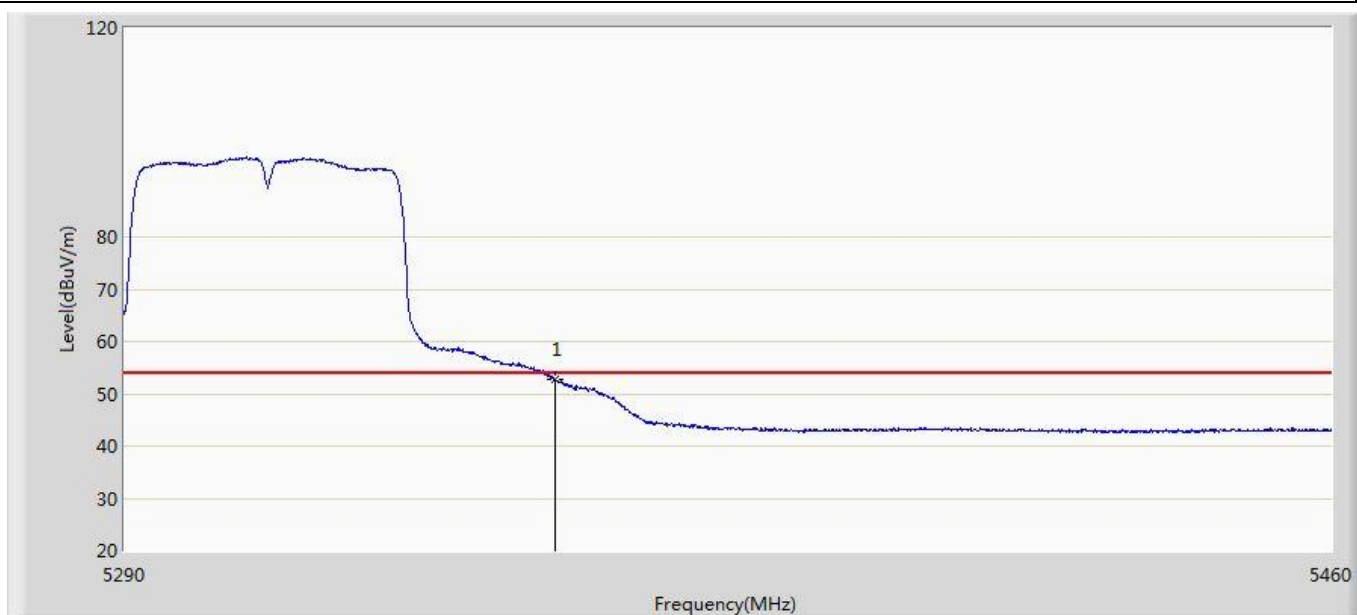

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	52.796	11.680	-1.204	54.000	41.116	AV

Profile: 2250805R	Page No.: 54
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 11ac40	

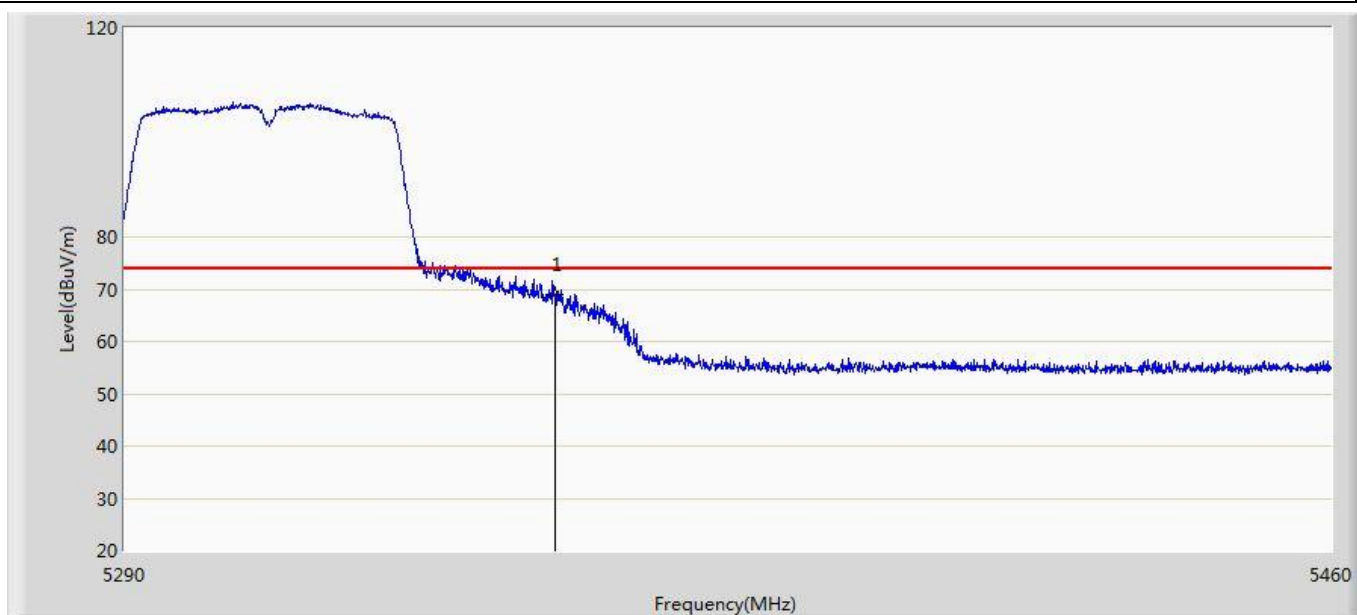


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	69.090	27.974	-4.910	74.000	41.116	PK

Profile: 2250805R	Page No.: 55
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 11ac40	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.526	8.410	-4.474	54.000	41.116	AV

Profile: 2250805R	Page No.: 56
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 11ac40	

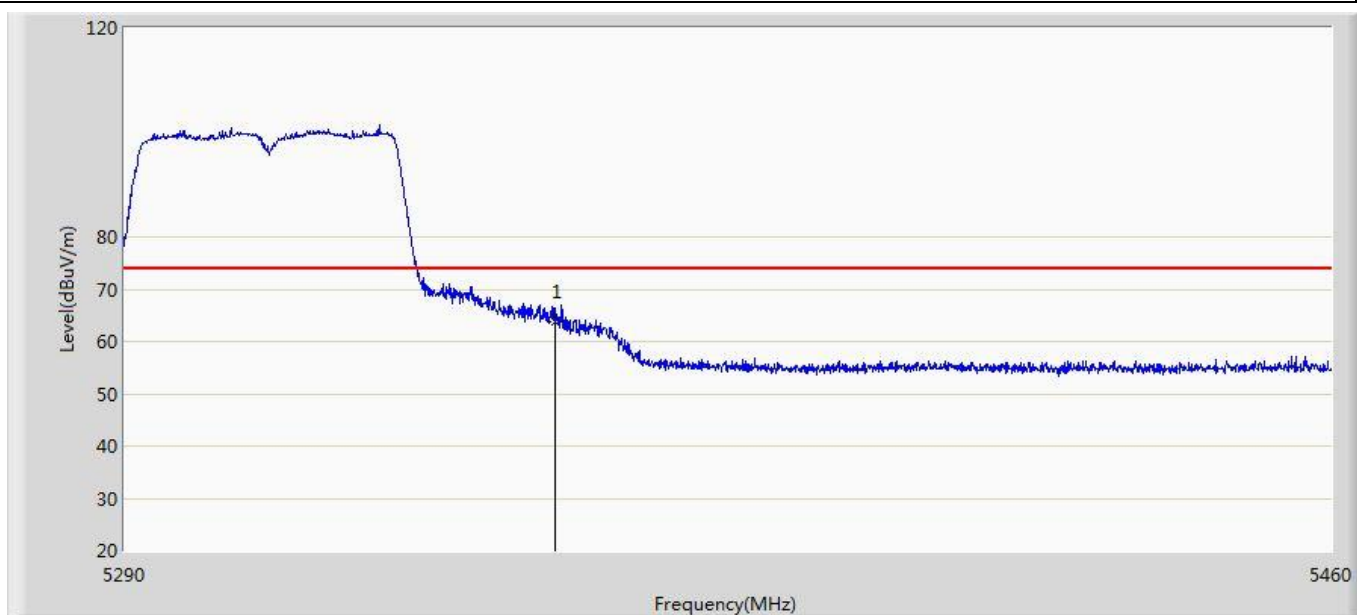


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	63.816	22.700	-10.184	74.000	41.116	PK

Profile: 2250805R	Page No.: 57
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5510MHz by 11ac40	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	52.045	11.039	-1.955	54.000	41.006	AV

Profile: 2250805R	Page No.: 58
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5510MHz by 11ac40	

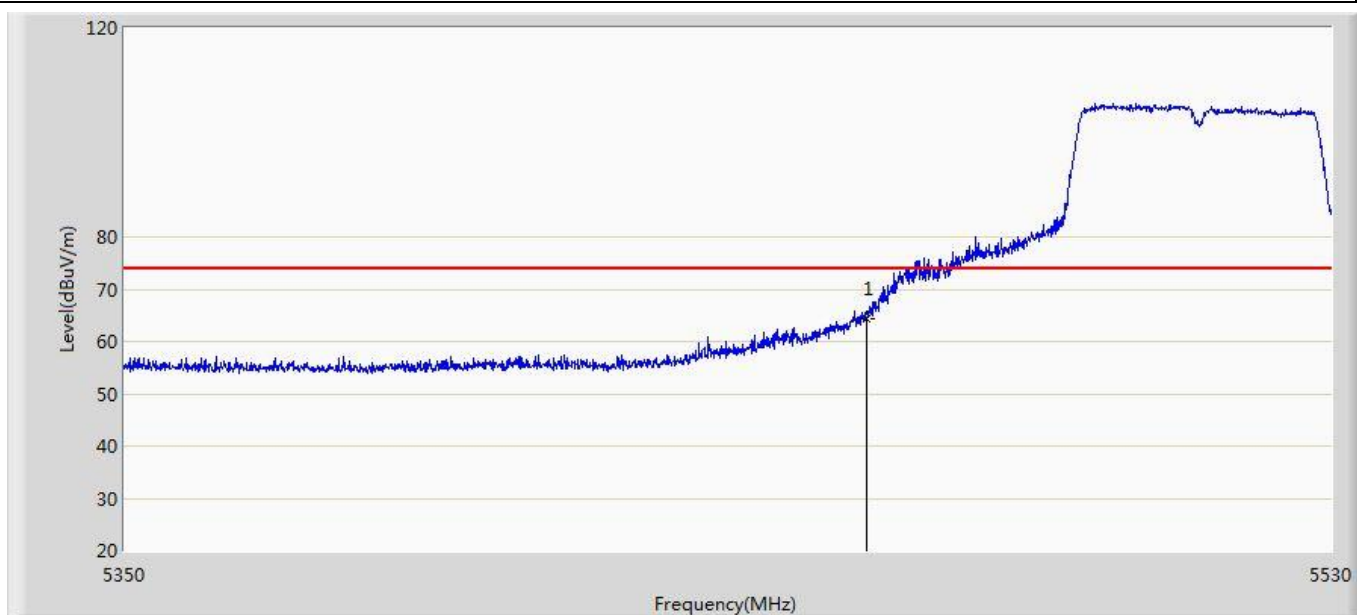

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	64.431	23.425	-9.569	74.000	41.006	PK

Profile: 2250805R	Page No.: 59
Engineer: YuLiu	
Site: AC5	Time: 2022/06/12 - 01:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5510MHz by 11ac40	

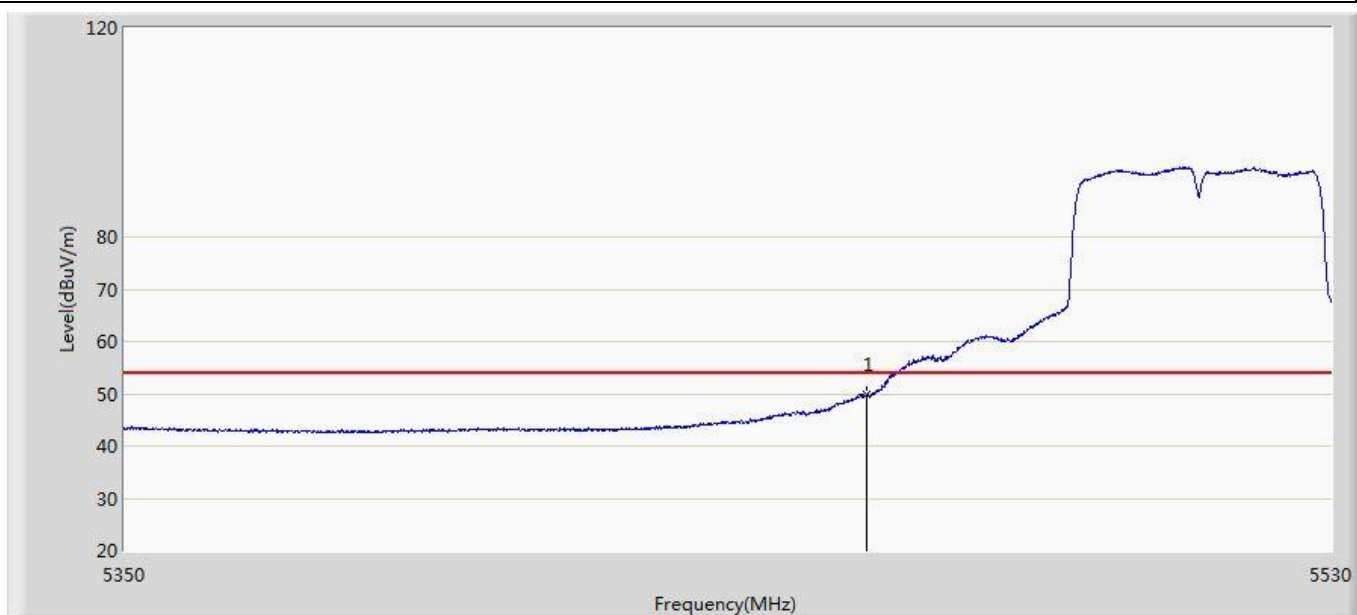

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	49.715	8.709	-4.285	54.000	41.006	AV