





Test report No:
2250805R-RF-US-P03V01

SAR TEST REPORT

Product Name	VR All-In-One Headset
Trademark	
Model and /or type reference	A8110
FCC ID	2A5NV-A8110
IC	28409-A8110
Applicant's name / address	Qingdao Chuangjian Weilai Technology Co., Ltd Room 401, 4th Floor, Building 3, Qingdao Research Institute, 393 Songling Road, Laoshan District, Qingdao City, Shandong Province, P.R.China
Test method requested, standard	FCC KDB Publication 248227 D01v02r02 FCC KDB Publication 447498 D01v06 FCC KDB Publication 865664 D01v01r04 IEEE Std. 1528-2013 FCC 47CFR §2.1093 ANSI C95.1-2005 EN 62209-2: 2010 RSS - 102 Issue 5: 2015
Test Result	Max. SAR Simultaneous Transmission Head SAR 1g SAR 2.4G WIFI + Bluetooth: 0.78W/kg 5G WIFI + Bluetooth: 1.17W/kg Extremity SAR 10g SAR 2.4G WIFI + Bluetooth: 3.66W/kg 5G WIFI + Bluetooth: 3.86W/kg
Verdict Summary	IN COMPLIANCE

Documented by (name / position & signature)	Tim Cao /Project Engineer 
Approved by (name / position & signature)	Jack Zhang/Manager 
Date of issue	2022-07-21
Report Version	V1.1
Report template No	Template_FCC SAR-RF-V1.0

INDEX

Page

COMPETENCES AND GUARANTEES	5
GENERAL CONDITIONS	5
ENVIRONMENTAL CONDITIONS	6
POSSIBLE TEST CASE VERDICTS	6
DOCUMENT HISTORY	7
REMARKS AND COMMENTS.....	7
1 GENERAL INFORMATION	8
1.1 General Description of the Item(s)	8
1.2 Antenna Information	11
1.3 Antenna Location	12
1.4 Channel List	14
2 SAR MEASUREMENT SYSTEM.....	19
2.1 DASY5 System Description	19
2.1.1. Applications	20
2.1.2. Area Scans	20
2.1.3. Zoom Scan (Cube Scan Averaging)	20
2.1.4. Uncertainty of Inter-/Extrapolation and Averaging	21
2.2 DASY5 E-Field Probe	22
2.3 Boundary Detection Unit and Probe Mounting Device	23
2.4 DATA Acquisition Electronics (DAE) and Measurement Server	23
2.5 Robot	24
2.6 Light Beam Unit	24
2.7 Device Holder	25
2.8 SAM Twin Phantom	25
3 TISSUE SIMULATING LIQUID.....	26
3.1 The composition of the tissue simulating liquid	26
3.2 Tissue Calibration Result	27
3.3 Tissue Dielectric Parameters for Head and Body Phantoms	30
4 SAR MEASUREMENT PROCEDURE.....	31
4.1 SAR System Validation	31
4.1.1. Validation Dipoles	31

4.1.2.	Validation Result	32
4.2	SAR Measurement Procedure	33
4.3	SAR Measurement Procedure	34
4.3.1.	Duty Factor Control	34
4.3.2.	Initial Test Position SAR Test Reduction Procedure	34
5	SAR EXPOSURE LIMITS.....	35
6	TEST EQUIPMENT LIST.....	36
7	MEASUREMENT UNCERTAINTY.....	37
8	CONDUCTED POWER MEASUREMENT	40
9	TEST PROCEDURES	67
9.1	SAR Test Results Summary	67
9.2	Simultaneous Transmission Analysis	73
9.3	Test position and configuration	74
	APPENDIX A. SAR SYSTEM VALIDATION DATA.....	75
	APPENDIX B. SAR MEASUREMENT DATA	75
	APPENDIX C. PROBE CALIBRATION DATA.....	97
	APPENDIX D. DIPOLE CALIBRATION DATA	106
	APPENDIX E. DAE CALIBRATION DATA.....	126

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and Maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowlEdge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the Maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 27, 2022
Date (start test)	May. 30, 2022
Date (finish test)	Jul. 10, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	18 °C – 25 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2250805R-RF-US-P03V01	V1.0	Initial issue of report.	2022-07-18
2250805R-RF-US-P03V01	V1.1	Changed the modulation type on page 8 and the channel list on page 14. The V1.0 report is out of date.	2022-07-21

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with FCC KDB Publication 248227 D01v02r02, FCC KDB Publication 447498 D01v06, FCC KDB Publication 865664 D01v01r04, IEEE Std. 1528-2013, FCC 47CFR §2.1093, ANSI C95.1-2005, RSS 102: Issue 5, EN 62209-2: 2010.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.
8. There are two versions for EUT model A8110, one is 'Pico 4 Pro' another is 'Pico 4', both are identical except additional eye tracking & face tracking function for 'Pico 4 Pro'. 'Pico 4 Pro' and 'Pico 4' There are models with 2nd material supplier; we did all the tests on 'Pico 4 Pro', since 'Pico 4 Pro' and 'Pico 4' have the same 2nd supplier material it won't affect RF circuit and PCB Layout, So we only evaluated the worst channel spurious emissions for the second material supplier model of "Pico 4 Pro", The second material supplier of "Pico 4" has no evaluation test, We also evaluate the worst channel spurious emissions for "Pico 4", Verify that spurious emissions are not degraded, so only test data for 'Pico 4 Pro' is shown in the report.

1 General Information

1.1 General Description of the Item(s)

Product Name..... :	VR All-In-One Headset
Model No. :	A8110
Hardware Version :	PHOENIX MB
Software Version :	Android Q
Firmware Version..... :	BTFM.HST.2.0.0.c3-00452-QCACHROMZ-1
FCC ID :	2A5NV-A8110
IC :	28409-A8110
Manufacturer :	Qingdao Chuangjian Weilai Technology Co., Ltd
Manufacturer address :	Room 401, 4th Floor, Building 3, Qingdao Research Institute, 393 Songling Road, Laoshan District, Qingdao City, Shandong Province, P.R.China
Factory :	Goertek Inc.
Address :	No.8877 Yingqian Street,High-Tech Industrial DevelopmentDistrict,Weifang,Shandong,261031, P.R.China

Wireless specification.....:	WIFI
Operating frequency range(s):	2400MHz~2483.5MHz 5150MHz~5250MHz 5250MHz~5350MHz 5470MHz~5725MHz 5725MHz~5850MHz
Type of modulation.....:	For 2.4G WIFI: 802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n/ax:OFDM-BPSK, QPSK, 16QAM, 64QAM, 1024QAM, OFDMA For 5G WIFI: 802.11a/n/ac/ax:OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, OFDMA
Number of channel.....:	WIFI 2.4G: 802.11b/g/n/ax(20MHz) : 11

	802.11n/ax(40MHz) : 07 WIFI 5G For FCC: 802.11a/n/ac/ax(20MHz) : 24 802.11n/ac/ax(40MHz) : 11 802.11ac/ax(80MHz) : 5 WIFI 5G For ISSED: 802.11a/n/ac/ax(20MHz) : 21 802.11n/ac/ax(40MHz) : 9 802.11ac/ax(80MHz) : 4	
Data Rate.....:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps 802.11ax: up to 1200Mbps	
Channel Control.....:	Auto	
Device category.....:	☐	Fixed point-to-point
	☐	Emit multiple directional beams, simultaneously or sequentially
	☒	Other cases

Support Bands.....:	☒	5150MHz~5250MHz	☐	Outdoor AP
			☐	Indoor AP
			☐	Fixed point-to-point AP
			☒	Mobile Client
	☒	5250MHz~5350MHz		
	☒	5470MHz~5725MHz	☒	With TDWR Channels
			☐	Without TDWR Channels
	☒	5725MHz~5850MHz		

Note:AX only supports Full RU,not partial RU.


Wireless specification.....:	Bluetooth
Frequency Range.....:	2402- 2483.5 MHz
Channel Number.....:	79 For Bluetooth 3.0 40 For Bluetooth 5.0
Type of Modulation.....:	GFSK, Pi/4 DQPSK, 8DPSK
Data Rate.....:	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK) LE 1M(1Mbit/s), LE 1M(2Mbit/s), LE Coded S=2/8(500/125 Kbit/s)

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☒	Adapter: Input:100-240V,50/60Hz,0.5A Output:5.0V,3A /9.0V,2.23A /12V,1.67A/3.3-5.9V,3A/3.3-11V,2.2A
	☒	HMD: 9V,2.23A or 5V,3A
	☒	Battery:3.85V
Mounting position.....	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Hand-held equipment
	☐	Other:



1.2 Antenna Information

Antenna Delivery	☒	1TX + 1RX	
	☒	2TX + 2RX	
	☐	Others:.....	
Antenna technology	☒	SISO	
	☒	MIMO	☒ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ PIFA
			☐ Sectorized
	☒	Internal	☐ PIFA
			☒ FPC
			☐ Others.....

1.3 Antenna Location

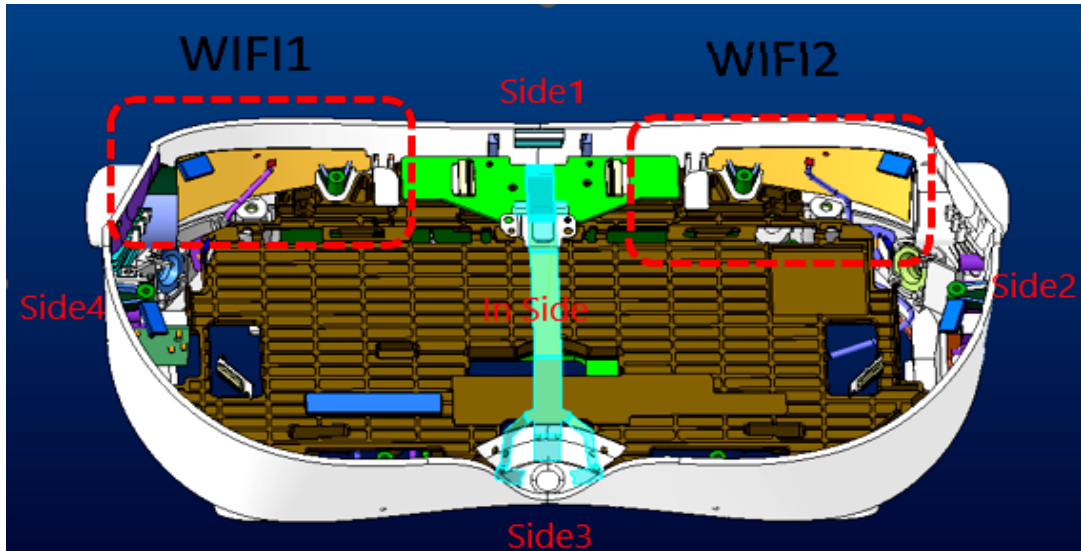

Note: Bluetooth antenna and WIFI 1 share one antenna.

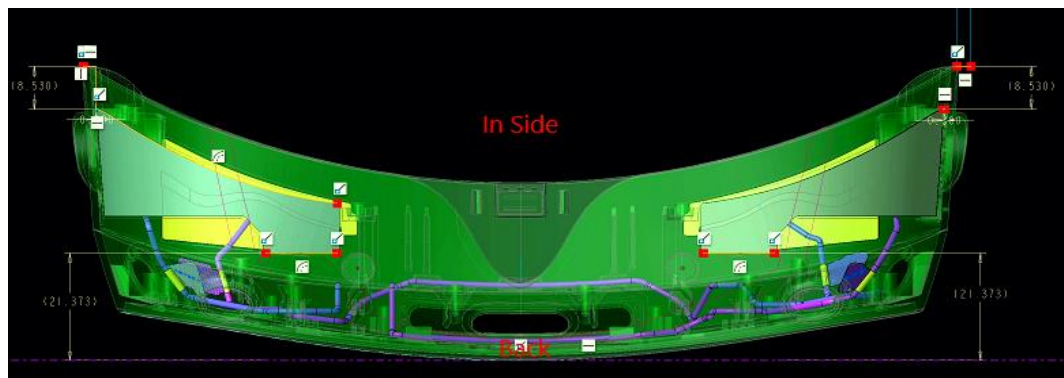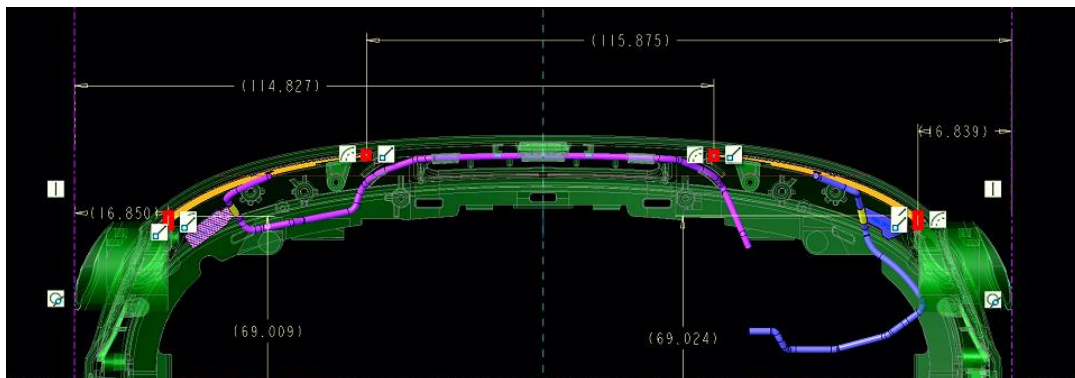

Distance from the test surface		
Test Position	Range antenna 1	Range antenna 2
Side1	0mm	0mm
Side2	115.9mm	16.9mm
Side3	69mm	69mm
Side4	16.9mm	114.8mm
In Side	8.5mm	8.5mm
Back	21.4mm	21.4mm

Note: Test evaluation: when the head is used, the front end is located near the cheek, all head SAR only evaluates the front end close to the cheek, the other five positions evaluate the Extremity SAR, and with reference to the standard FCC KDB 447498 D04 formula, it is calculated that part of the test surface meets the exemption conditions, the antenna position is located on the left and right sides of the upper end of the VR glasses.

1.4 Channel List

For 2.4GWIFI

IEEE 802.11b/g & IEEE 802.11n/ax (20MHz) For FCC / ISCED

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	2	2417 MHz	3	2422 MHz	4	2427 MHz
5	2432 MHz	6	2437 MHz	7	2442 MHz	8	2447 MHz
9	2452 MHz	10	2457 MHz	11	2462 MHz	-	-

IEEE 802.11n/ax(40MHz) For FCC / ISCED

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422 MHz	4	2427 MHz	5	2432 MHz	6	2437 MHz
7	2442 MHz	8	2447 MHz	9	2452 MHz	-	-

For FCC 5GWIFI**802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel:**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n/ac/ax(40MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz	N/A	N/A

802.11ac/ax(80MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz	122	5610 MHz
155	5775 MHz	N/A	N/A	N/A	N/A	N/A	N/A

For ISED 5GWIFI

802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	132	5660 MHz	136	5680 MHz	140	5700 MHz
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A
802.11n/ac/ax(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	134	5670 MHz	151	5755 MHz
159	5795 MHz	N/A	N/A	N/A	N/A	N/A	N/A
802.11ac/ax(80MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz	155	5775 MHz

For Bluetooth


Bluetooth Working Frequency of Each Channel: (FHSS)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

Bluetooth Working Frequency of Each Channel: (BT 5.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

Note: The General Description of the Item, antenna information and Channel List in clause 1 are provided and confirmed by the client.

2 SAR MEASUREMENT SYSTEM

2.1 DASY5 System Description

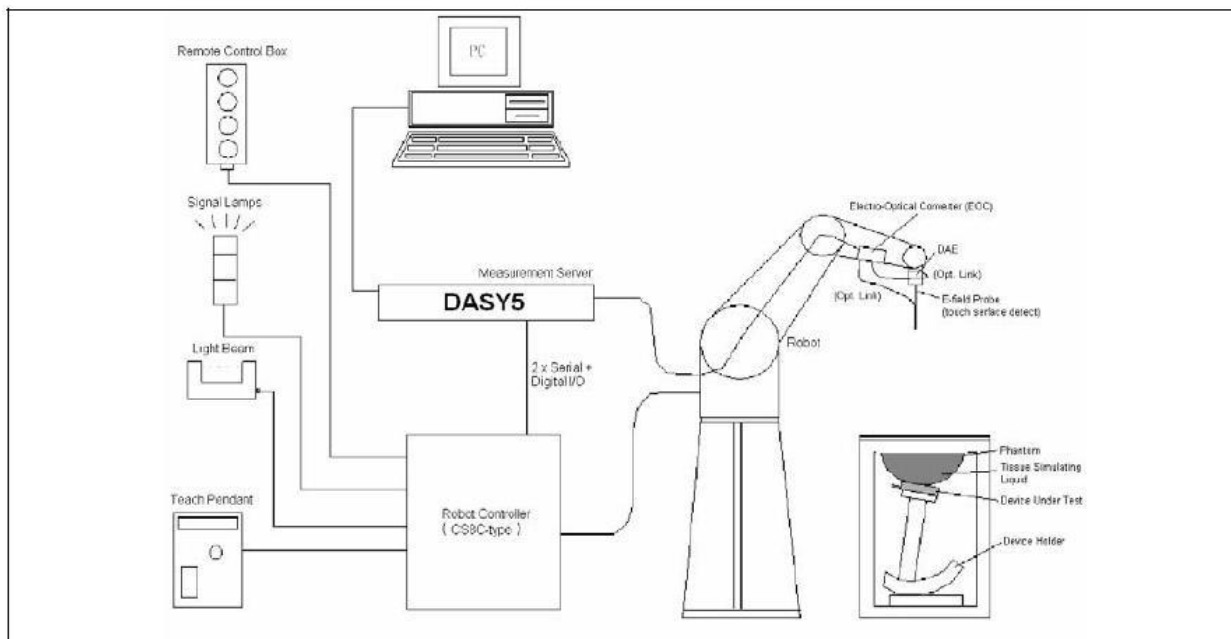

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
3. The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
4. The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
5. A computer running WinXP and the DASY5 software.
6. Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
7. The phantom, the device holder and other accessories according to the targeted measurement.

2.1.1. Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383, EN62311 and others.

2.1.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

2.1.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and Body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 7x7x7 (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

2.1.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY5 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = A e^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi}{2} \frac{\sqrt{x'^2 + y'^2}}{5a} \right)$$

$$f_2(x, y, z) = A e^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi}{2} \frac{y'}{3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

2.2 DASY5 E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025. The calibration data are in Appendix D.

Model	EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

2.3 Boundary Detection Unit and Probe Mounting Device

The DASY probes use a precise connector and an additional holder for the probe, consisting of a plastic tube and a flexible silicon ring to center the probe. The connector at the DAE is flexibly mounted and held in the default position with magnets and springs. Two switching systems in the connector mount detect Frontal and lateral probe collisions and trigger the necessary software response.



2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



2.5 Robot

The DASY5 system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS8C robot controller version from Stäubli is used. The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



2.6 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



2.7 Device Holder

The DASY5 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the Body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY5 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



2.8 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

3 TISSUE SIMULATING LIQUID

3.1 The composition of the tissue simulating liquid

INGREDIENT (% Weight)	2450MHz Head	5250/5600/5750 MHz Head
Water	73.2	75.68
Salt	0.01	0.43
Sugar	0.00	0.00
HEC	0.00	0.00
Preventol	0.00	0.00
DGBE	26.7	4.42
Triton X-100	0.00	19.47

3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY5 Dielectric Probe Kit and Agilent Vector Network Analyzer E5071C

Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [S/m]	
2450MHz	Reference result ± 5% window	39.2 37.24 to 41.16	1.80 1.71 to 1.89	N/A
	07-01-2022	39.156	1.824	21.0
5250MHz	Reference result ± 5% window	39.5 37.53 to 41.48	4.71 4.47 to 4.95	N/A
	07-03-2022	37.727	4.626	21.0
5600MHz	Reference result ± 5% window	35.5 33.74 to 37.28	5.07 4.82 to 5.32	N/A
	07-03-2022	35.947	5.035	21.0
5750MHz	Reference result ± 5% window	35.4 33.63 to 37.17	5.22 4.96 to 5.48	N/A
	07-03-2022	35.621	5.216	21.0

Body Tissue Simulant Measurement								
Frequency [MHz]	Channel	Dielectric Parameters						Tissue Temp. [°C]
		Permittivity ϵ_r	Conductivity σ	Permittivity Target ϵ_r	Conductivity Target σ	Delta (ϵ_r) %	Delta (σ) %	
2412	Low	39.26	1.79	39.27	1.77	-0.10	1.13	21.0
2437	Mid	39.2	1.81	39.22	1.79	0.00	1.12	21.0
2462	High	39.14	1.83	39.18	1.81	-0.15	1.10	21.0
2402	Low	39.27	1.79	39.29	1.76	-0.08	1.70	21.0
2441	Mid	39.18	1.82	39.22	1.79	-0.05	1.68	21.0
2480	High	39.13	1.84	39.15	1.83	-0.18	0.55	21.0
5260	Low	36.71	4.64	35.94	4.72	2.26	-1.69	21.0
5300	Mid	36.62	4.68	35.90	4.76	2.01	-1.68	21.0
5320	High	36.57	4.71	35.87	4.78	1.87	-1.46	21.0
5500	Low	36.17	4.91	35.63	4.97	1.60	-1.21	21.0
5580	Mid	35.99	5.01	35.53	5.05	1.38	-0.79	21.0
5700	High	35.73	5.16	35.40	5.17	0.93	-0.19	21.0
5745	Low	35.63	5.22	35.36	5.22	0.65	0.00	21.0
5785	Mid	35.55	5.26	35.32	5.26	0.71	0.00	21.0
5825	High	35.47	5.30	35.28	5.30	0.48	0.00	21.0
Note: - The delta (ϵ_r) and (σ) are within $\pm 5\%$, delta SAR value was not calculated in this report. - As per IEC 62209-2 Annex F, the SAR correction factor is given by: $\Delta SAR = C_\epsilon \Delta \epsilon_r + C_\sigma \Delta \sigma$ For the 1g average SAR C_ϵ and C_σ are given by: $C_\epsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f - 0.2026$ $C_\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$ Where f is the frequency in GHz.								

Body Tissue Simulant Measurement							
Frequency [MHz]	Channel	Dielectric Parameters					Tissue Temp. [°C]
		Delta (ϵ_r) %	Delta (σ) %	C ϵ	C σ	Delta SAR%	
2412	Low	-0.10	1.13	-0.23	0.49	0.57	21.0
2437	Mid	0.00	1.12	-0.22	0.48	0.54	21.0
2462	High	-0.15	1.10	-0.22	0.48	0.56	21.0
2402	Low	-0.08	1.70	-0.23	0.49	0.85	21.0
2441	Mid	-0.05	1.68	-0.22	0.48	0.82	21.0
2480	High	-0.18	0.55	-0.22	0.47	0.30	21.0
5260	Low	2.26	-1.69	-0.20	-0.03	-0.40	21.0
5300	Mid	2.01	-1.68	-0.20	-0.03	-0.35	21.0
5320	High	1.87	-1.46	-0.20	-0.03	-0.33	21.0
5500	Low	1.60	-1.21	-0.20	-0.04	-0.27	21.0
5580	Mid	1.38	-0.79	-0.20	-0.04	-0.24	21.0
5720	High	0.93	-0.19	-0.20	-0.05	-0.18	21.0
5745	Low	0.65	0.00	-0.20	-0.05	-0.13	21.0
5785	Mid	0.71	0.00	-0.20	-0.05	-0.14	21.0
5825	High	0.48	0.00	-0.20	-0.04	-0.10	21.0
Note: The Δ SAR refers to the percent change in SAR relative to the percent change in dielectric properties versus the target values. A negative Δ SAR would translate to a lower measured SAR value than what would be measured if using dielectric properties equal to the target values. A positive Δ SAR would translate to a higher measured SAR value than what would be measured if using dielectric properties equal to the target values. SAR correction shall not be made when the Δ SAR has a positive sign to provide a conservative SAR value. The SAR is only corrected when Δ SAR has a negative sign.							

3.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and Body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5800	35.3	5.07

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

4 SAR MEASUREMENT PROCEDURE

4.1 SAR System Validation

4.1.1. Validation Dipoles

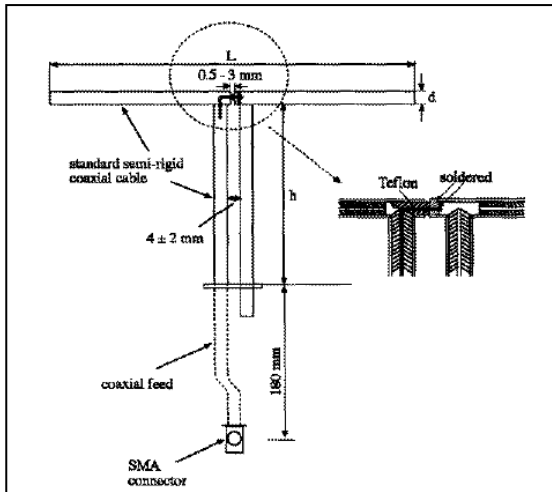

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
2450MHz	53.5	30.4	3.6
5250MHz	20.6	14.2	3.6
5600MHz	20.6	14.2	3.6
5750MHz	20.6	14.2	3.6

4.1.2. Validation Result

System Performance Check Body at 2450MHz, 5250MHz, 5600MHz and 5750MHz				
Validation Dipole: D2450V2, SN: 839; D5GHzV2, SN: 1078				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 10% window	52.6 47.34 to 57.86	24.3 21.87 to 26.73	N/A
	07-01-2022	51.2	23.56	21.0
5250 MHz	Reference result ± 10% window	76.0 68.4 to 83.6	21.6 19.44 to 23.76	N/A
	07-03-2022	77.1	22.1	21.0
5600 MHz	Reference result ± 10% window	79.5 71.55 to 87.45	22.4 20.16 to 24.64	N/A
	07-03-2022	78.2	22.2	21.0
5750 MHz	Reference result ± 10% window	75.7 68.13 to 83.27	21.3 19.17 to 23.43	N/A
	07-03-2022	80.5	22.2	21.0
Note: All SAR values are normalized to 1W forward power.				

4.2 SAR Measurement Procedure

The DASY 5 calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

4.3 SAR Measurement Procedure

4.3.1. Duty Factor Control

Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

4.3.2. Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁶ The initial test position procedure is described in the following:

When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (reMaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).

a) When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and Edges) are tested.

b) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

5 SAR EXPOSURE LIMITS

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or Body)	1.6 W/kg
Spatial Average SAR (whole Body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

6 TEST EQUIPMENT LIST

Instrument	Manufacturer	Model No.	Serial No.	Cali. Due Date
Stäubli Robot TX60L	Stäubli	TX60L	F10/5C90A1/A/01	N/A
Controller	Stäubli	SP1	S-0034	N/A
Dipole Validation Kits	Speag	D900V2	1d096	2023.03.28
Dipole Validation Kits	Speag	D2450V2	839	2023.03.31
Dipole Validation Kits	Speag	D5GHzV2	1078	2023.03.27
SAM Twin Phantom	Speag	SAM	TP-1561/1562	N/A
ELI1 Phantom	Speag	QDOVA002AA	TP:2106	N/A
Device Holder	Speag	SD 000 H01 HA	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1220	2023.03.23
E-Field Probe	Speag	EX3DV4	3710	2023.04.17
SAR Software	Speag	DASY5	V5.2 Build 162	N/A
Power Amplifier	Mini-Circuit	ZVA-183-S+	N657400950	N/A
Directional Coupler	Agilent	778D	20160	N/A
Vector Network	Agilent	E5071C	MY48367267	2023.03.09
Signal Generator	Agilent	E4438C	MY49070163	2023.03.09
Spectrum Analyzer	Agilent	N9010A	MY48030494	2022.08.24
Temperature/Humidity Meter	Zhichen	ZC1-2	N/A	2023.04.16
Temperature Meter	Dretec	O-274	RF-001	2023.11.05

7 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty according to IEEE std. 1528-2013								
Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram.								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±11.0%	±10.8%	387
Expanded STD Uncertainty						±22.0%	±21.5%	

DASY5 Uncertainty according to IEEE std. 1528-2013								
Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram / 10 gram.								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±9.9%	R	$\sqrt{3}$	1	1	±5.7%	±5.7%	∞
Max. SAR Eval.	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±12.8%	±12.6%	330
Expanded STD Uncertainty						±25.6%	±25.2%	

Measurement uncertainty evaluation template for system repeatability

Measurement uncertainty for 30 MHz to 6 GHz averaged over 1 gram / 10 gram.

Error Description	Uncert. Value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±6.5%	N	1	1	1	±6.5%	±6.5%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0%	R	$\sqrt{3}$	0	0	±1.2%	±1.2%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
Modulation Response	±2.4%	R	$\sqrt{3}$	0	0	±1.4%	±1.4%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	0	0	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	0	0	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	0	0	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	0	0	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	0	0	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	0	0	±1.7%	±1.7%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%	∞
Post-processing	±4.0%	R	$\sqrt{3}$	0	0	±2.3%	±2.3%	∞
Test Sample Related								
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%	∞
Power Scaling	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%	∞
SAR correction	±1.9%	R	$\sqrt{3}$	1	1	±1.1%	±0.9%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%	∞
Temp. unc. - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%	∞
Temp. unc. - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined Std. Uncertainty						±12.8%	±12.7%	748
Expanded STD Uncertainty						±25.6%	±25.4%	

8 CONDUCTED POWER MEASUREMENT

2.4GHz WLAN Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Tx On + Tx Off (ms)	Duty Cycle (%)
802.11b	--	--	--	100
802.11g	1.97	0.03	1.99	98.74
802.11n(20MHz)	--	--	--	100
802.11n(40MHz)	--	--	--	100
802.11ac(20MHz)	--	--	--	100
802.11ac(40MHz)	--	--	--	100
802.11ax(20MHz)	--	--	--	100
802.11ax(40MHz)	--	--	--	100

5GHz WLAN Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Tx On + Tx Off (ms)	Duty Cycle (%)
802.11a	1.97	0.03	2.00	98.5
802.11n(20MHz)	--	--	--	100
802.11n(40MHz)	--	--	--	100
802.11ac(20MHz)	--	--	--	100
802.11ac(40MHz)	--	--	--	100
802.11ac(80MHz)	--	--	--	100
802.11ax(20MHz)	--	--	--	100
802.11ax(40MHz)	--	--	--	100
802.11ax(80MHz)	--	--	--	100

Bluetooth Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Tx On + Tx Off (ms)	Duty Cycle (%)
DH5	2.88	0.89	3.76	76.41
2DH5	2.88	0.88	3.75	76.61
3DH5	2.89	0.87	3.75	76.91
LE_1M	386.5	239.7	626.2	61.72
LE_2M	200	424	624	32.05

For 2.4G:

2.4GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11b	Tnom (25°C)	2412	20.80	21.50	100	1.175
		2437	20.79	21.50	100	1.178
		2462	21.21	21.50	100	1.069
802.11g	Tnom (25°C)	2412	18.82	19.50	98.74	1.169
		2437	18.79	19.50	98.74	1.178
		2462	19.19	19.50	98.74	1.074
802.11n(20MHz)	Tnom (25°C)	2412	18.67	19.50	100	1.211
		2437	18.62	19.50	100	1.225
		2462	19.08	19.50	100	1.102
802.11n(40MHz)	Tnom (25°C)	2422	17.11	18.00	100	1.227
		2437	17.09	18.00	100	1.233
		2452	17.28	18.00	100	1.180
802.11ac(20MHz)	Tnom (25°C)	2412	18.65	19.50	100	1.216
		2437	18.64	19.50	100	1.219
		2462	19.03	19.50	100	1.114
802.11ac(40MHz)	Tnom (25°C)	2422	17.09	18.00	100	1.233
		2437	17.12	18.00	100	1.225
		2452	17.24	18.00	100	1.191
802.11ax(20MHz)	Tnom (25°C)	2412	17.71	18.50	100	1.199
		2437	17.66	18.50	100	1.213
		2462	18.04	18.50	100	1.112
802.11ax(40MHz)	Tnom (25°C)	2422	17.13	18.00	100	1.222
		2437	17.14	18.00	100	1.219
		2452	17.22	18.00	100	1.197

2.4GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11b	Tnom (25°C)	2412	21.20	21.50	100	1.072
		2437	21.25	21.50	100	1.059
		2462	21.47	21.50	100	1.007
802.11g	Tnom (25°C)	2412	18.98	19.50	98.74	1.127
		2437	19.11	19.50	98.74	1.094
		2462	19.45	19.50	98.74	1.012
802.11n(20MHz)	Tnom (25°C)	2412	17.89	19.50	100	1.449
		2437	18.04	19.50	100	1.400
		2462	18.31	19.50	100	1.315
802.11n(40MHz)	Tnom (25°C)	2422	17.18	18.00	100	1.208
		2437	17.17	18.00	100	1.211
		2452	17.35	18.00	100	1.161
802.11ac(20MHz)	Tnom (25°C)	2412	18.92	19.50	100	1.143
		2437	19.07	19.50	100	1.104
		2462	19.27	19.50	100	1.054
802.11ac(40MHz)	Tnom (25°C)	2422	17.16	18.00	100	1.213
		2437	17.13	18.00	100	1.222
		2452	17.31	18.00	100	1.172
802.11ax(20MHz)	Tnom (25°C)	2412	17.91	18.50	100	1.146
		2437	18.07	18.50	100	1.104
		2462	18.28	18.50	100	1.052
802.11ax(40MHz)	Tnom (25°C)	2422	17.21	18.00	100	1.199
		2437	17.16	18.00	100	1.213
		2452	17.37	18.00	100	1.156

2.4GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11b	Tnom (25°C)	2412	20.71	21.50	100	1.199
		2437	20.80	21.50	100	1.175
		2462	21.20	21.50	100	1.072
802.11g	Tnom (25°C)	2412	19.03	19.50	98.74	1.114
		2437	19.00	19.50	98.74	1.122
		2462	19.41	19.50	98.74	1.021
802.11n(20MHz)	Tnom (25°C)	2412	18.76	19.50	100	1.186
		2437	18.77	19.50	100	1.183
		2462	19.13	19.50	100	1.089
802.11n(40MHz)	Tnom (25°C)	2422	17.09	18.00	100	1.233
		2437	17.08	18.00	100	1.236
		2452	17.33	18.00	100	1.167
802.11ac(20MHz)	Tnom (25°C)	2412	18.75	19.50	100	1.189
		2437	18.74	19.50	100	1.191
		2462	19.13	19.50	100	1.089
802.11ac(40MHz)	Tnom (25°C)	2422	17.09	18.00	100	1.233
		2437	17.07	18.00	100	1.239
		2452	17.30	18.00	100	1.175
802.11ax(20MHz)	Tnom (25°C)	2412	17.78	18.50	100	1.180
		2437	17.77	18.50	100	1.183
		2462	17.63	18.50	100	1.222
802.11ax(40MHz)	Tnom (25°C)	2422	17.10	18.00	100	1.230
		2437	17.07	18.00	100	1.239
		2452	17.36	18.00	100	1.159

For 5G

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11a	Tnom (25°C)	5180	19.47	20.00	98.5	1.130
		5220	19.18	20.00	98.5	1.208
		5240	19.54	20.00	98.5	1.112
		5260	19.88	20.00	98.5	1.028
		5300	19.56	20.00	98.5	1.107
		5320	19.44	20.00	98.5	1.138
		5500	20.14	20.50	98.5	1.086
		5580	19.38	20.00	98.5	1.153
		5700	19.85	20.00	98.5	1.035
		5745	19.66	20.00	98.5	1.081
		5785	19.74	20.00	98.5	1.062
		5825	20.51	21.00	98.5	1.119

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11a	Tnom (25°C)	5180	19.19	20.00	98.5	1.205
		5220	18.88	20.00	98.5	1.294
		5240	19.11	20.00	98.5	1.227
		5260	19.34	20.00	98.5	1.164
		5300	18.49	20.00	98.5	1.416
		5320	18.18	20.00	98.5	1.521
		5500	19.96	20.50	98.5	1.132
		5580	18.53	20.00	98.5	1.403
		5700	19.19	20.00	98.5	1.205
		5745	19.12	20.00	98.5	1.225
		5785	19.57	20.00	98.5	1.104
		5825	20.56	21.00	98.5	1.107

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11a	Tnom (25°C)	5180	18.84	20.00	98.5	1.306
		5220	18.47	20.00	98.5	1.422
		5240	18.73	20.00	98.5	1.340
		5260	19.02	20.00	98.5	1.253
		5300	18.66	20.00	98.5	1.361
		5320	18.53	20.00	98.5	1.403
		5500	19.48	20.50	98.5	1.265
		5580	18.55	20.00	98.5	1.396
		5700	19.01	20.00	98.5	1.256
		5745	18.54	20.00	98.5	1.400
		5785	18.75	20.00	98.5	1.334
		5825	19.44	21.00	98.5	1.432

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(20M)	Tnom (25°C)	5180	18.44	20.00	100	1.432
		5220	18.11	20.00	100	1.545
		5240	18.42	20.00	100	1.439
		5260	19.72	20.00	100	1.067
		5300	19.45	20.00	100	1.135
		5320	19.31	20.00	100	1.172
		5500	20.01	20.50	100	1.119
		5580	19.23	20.00	100	1.194
		5700	19.69	20.00	100	1.074
		5745	19.51	20.00	100	1.119
		5785	19.61	20.00	100	1.094
		5825	20.39	21.00	100	1.151

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(20M)	Tnom (25°C)	5180	18.79	20.00	100	1.321
		5220	18.61	20.00	100	1.377
		5240	18.84	20.00	100	1.306
		5260	18.85	20.00	100	1.303
		5300	18.23	20.00	100	1.503
		5320	18.12	20.00	100	1.542
		5500	19.07	20.50	100	1.390
		5580	18.01	20.00	100	1.581
		5700	18.66	20.00	100	1.361
		5745	18.61	20.00	100	1.377
		5785	19.04	20.00	100	1.247
		5825	19.63	21.00	100	1.371

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(20M)	Tnom (25°C)	5180	18.62	20.00	100	1.374
		5220	18.30	20.00	100	1.479
		5240	18.59	20.00	100	1.384
		5260	18.80	20.00	100	1.318
		5300	18.06	20.00	100	1.563
		5320	18.11	20.00	100	1.545
		5500	19.25	20.50	100	1.334
		5580	18.26	20.00	100	1.493
		5700	18.75	20.00	100	1.334
		5745	18.44	20.00	100	1.432
		5785	18.67	20.00	100	1.358
		5825	19.36	21.00	100	1.459

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(40M)	Tnom (25°C)	5190	15.95	17.00	100	1.274
		5230	15.91	17.00	100	1.285
		5270	16.39	17.00	100	1.151
		5310	16.09	17.00	100	1.233
		5510	18.09	19.00	100	1.233
		5590	17.83	19.00	100	1.309
		5670	17.32	19.00	100	1.472
		5755	18.11	19.00	100	1.227
		5795	18.36	19.00	100	1.159

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(40M)	Tnom (25°C)	5190	16.64	17.00	100	1.086
		5230	16.70	17.00	100	1.072
		5270	16.97	17.00	100	1.007
		5310	15.98	17.00	100	1.265
		5510	18.90	19.00	100	1.023
		5590	18.29	19.00	100	1.178
		5670	17.69	19.00	100	1.352
		5755	18.33	19.00	100	1.167
		5795	18.87	19.00	100	1.030

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11n(40M)	Tnom (25°C)	5190	16.06	17.00	100	1.242
		5230	16.03	17.00	100	1.250
		5270	16.42	17.00	100	1.143
		5310	15.82	17.00	100	1.312
		5510	17.70	19.00	100	1.349
		5590	18.37	19.00	100	1.156
		5670	17.84	19.00	100	1.306
		5755	18.66	19.00	100	1.081
		5795	18.88	19.00	100	1.028

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(20M)	Tnom (25°C)	5180	18.41	20.00	100	1.442
		5220	18.05	20.00	100	1.567
		5240	18.37	20.00	100	1.455
		5260	19.69	20.00	100	1.074
		5300	19.38	20.00	100	1.153
		5320	19.27	20.00	100	1.183
		5500	19.95	20.50	100	1.135
		5580	19.21	20.00	100	1.199
		5700	19.70	20.00	100	1.072
		5745	19.51	20.00	100	1.119
		5785	19.59	20.00	100	1.099
		5825	20.41	21.00	100	1.146

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(20M)	Tnom (25°C)	5180	18.78	20.00	100	1.324
		5220	18.58	20.00	100	1.387
		5240	18.83	20.00	100	1.309
		5260	18.80	20.00	100	1.318
		5300	18.52	20.00	100	1.406
		5320	18.55	20.00	100	1.396
		5500	19.07	20.50	100	1.390
		5580	18.42	20.00	100	1.439
		5700	18.61	20.00	100	1.377
		5745	18.58	20.00	100	1.387
		5785	19.02	20.00	100	1.253
		5825	19.59	21.00	100	1.384

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(20M)	Tnom (25°C)	5180	18.23	20.00	100	1.503
		5220	18.12	20.00	100	1.542
		5240	18.41	20.00	100	1.442
		5260	18.89	20.00	100	1.291
		5300	18.27	20.00	100	1.489
		5320	18.12	20.00	100	1.542
		5500	19.23	20.50	100	1.340
		5580	18.27	20.00	100	1.489
		5700	18.70	20.00	100	1.349
		5745	18.48	20.00	100	1.419
		5785	18.68	20.00	100	1.355
		5825	19.38	21.00	100	1.452

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(40M)	Tnom (25°C)	5190	15.96	17.00	100	1.271
		5230	15.91	17.00	100	1.285
		5270	16.38	17.00	100	1.153
		5310	16.11	17.00	100	1.227
		5510	18.08	19.00	100	1.236
		5590	17.81	19.00	100	1.315
		5670	17.28	19.00	100	1.486
		5755	18.12	19.00	100	1.225
		5795	18.35	19.00	100	1.161

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(40M)	Tnom (25°C)	5190	16.56	17.00	100	1.107
		5230	16.58	17.00	100	1.102
		5270	16.89	17.00	100	1.026
		5310	15.93	17.00	100	1.279
		5510	18.95	19.00	100	1.012
		5590	18.36	19.00	100	1.159
		5670	18.12	19.00	100	1.225
		5755	18.33	19.00	100	1.167
		5795	18.85	19.00	100	1.035

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(40M)	Tnom (25°C)	5190	16.55	17.00	100	1.109
		5230	16.52	17.00	100	1.117
		5270	16.90	17.00	100	1.023
		5310	16.30	17.00	100	1.175
		5510	17.93	19.00	100	1.279
		5590	17.40	19.00	100	1.445
		5670	17.32	19.00	100	1.472
		5755	17.62	19.00	100	1.374
		5795	18.21	19.00	100	1.199

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(80M)	Tnom (25°C)	5210	14.99	16.00	100	1.262
		5290	15.22	16.00	100	1.197
		5530	15.62	17.50	100	1.542
		5775	16.41	17.50	100	1.285

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(80M)	Tnom (25°C)	5210	15.55	16.00	100	1.109
		5290	15.33	16.00	100	1.167
		5530	16.35	17.50	100	1.303
		5775	17.08	17.50	100	1.102

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ac(80M)	Tnom (25°C)	5210	15.55	16.00	100	1.109
		5290	15.49	16.00	100	1.125
		5530	16.40	17.50	100	1.288
		5775	17.07	17.50	100	1.104

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(20M)	Tnom (25°C)	5180	18.75	20.00	100	1.334
		5220	18.41	20.00	100	1.442
		5240	18.72	20.00	100	1.343
		5260	19.07	20.00	100	1.239
		5300	18.76	20.00	100	1.330
		5320	18.72	20.00	100	1.343
		5500	20.03	20.50	100	1.114
		5580	19.29	20.00	100	1.178
		5700	19.75	20.00	100	1.059
		5745	19.61	20.00	100	1.094
		5785	19.69	20.00	100	1.074
		5825	20.48	21.00	100	1.127

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(20M)	Tnom (25°C)	5180	18.91	20.00	100	1.285
		5220	18.67	20.00	100	1.358
		5240	18.91	20.00	100	1.285
		5260	19.11	20.00	100	1.227
		5300	18.19	20.00	100	1.517
		5320	18.59	20.00	100	1.384
		5500	19.02	20.50	100	1.406
		5580	18.01	20.00	100	1.581
		5700	18.58	20.00	100	1.387
		5745	18.50	20.00	100	1.413
		5785	18.96	20.00	100	1.271
		5825	19.53	21.00	100	1.403

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(20M)	Tnom (25°C)	5180	19.09	20.00	100	1.233
		5220	18.72	20.00	100	1.343
		5240	18.96	20.00	100	1.271
		5260	19.25	20.00	100	1.189
		5300	18.60	20.00	100	1.380
		5320	18.46	20.00	100	1.426
		5500	19.00	20.50	100	1.413
		5580	18.14	20.00	100	1.535
		5700	18.64	20.00	100	1.368
		5745	18.12	20.00	100	1.542
		5785	18.11	20.00	100	1.545
		5825	19.20	21.00	100	1.514

5GHz WLAN Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(40M)	Tnom (25°C)	5190	15.85	17.00	100	1.303
		5230	15.79	17.00	100	1.321
		5270	15.28	17.00	100	1.486
		5310	15.05	17.00	100	1.567
		5510	17.15	19.00	100	1.531
		5590	16.82	18.00	100	1.312
		5670	16.25	18.00	100	1.496
		5755	17.15	19.00	100	1.531
		5795	17.41	19.00	100	1.442

5GHz WLAN Ant2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(40M)	Tnom (25°C)	5190	16.57	17.00	100	1.104
		5230	16.62	17.00	100	1.091
		5270	15.91	17.00	100	1.285
		5310	15.83	17.00	100	1.309
		5510	17.88	19.00	100	1.294
		5590	17.30	18.00	100	1.175
		5670	16.67	18.00	100	1.358
		5755	17.45	19.00	100	1.429
		5795	18.39	19.00	100	1.151

5GHz WLAN Ant1+2						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
802.11ax(40M)	Tnom (25°C)	5190	16.42	17.00	100	1.143
		5230	16.39	17.00	100	1.151
		5270	15.84	17.00	100	1.306
		5310	15.25	17.00	100	1.496
		5510	17.89	19.00	100	1.291
		5590	17.37	18.00	100	1.156
		5670	16.80	18.00	100	1.318
		5755	17.66	19.00	100	1.361
		5795	18.19	19.00	100	1.205

For Bluetooth

Bluetooth Ant1						
Test Mode	Test Conditions	Frequency (MHz)	Avg. Power (dBm)	Tune-up Power (dBm)	Duty cycle (%)	Scaling Factor
GFSK	Tnom (25°C)	2402	16.30	17.00	76.41	1.175
		2441	15.87	17.00	76.41	1.297
		2480	16.20	17.00	76.41	1.202
Pi/4 DQPSK		2402	15.22	16.00	76.61	1.197
		2441	14.80	16.00	76.61	1.318
		2480	15.10	16.00	76.61	1.230
8DPSK		2402	15.20	16.00	76.91	1.202
		2441	15.73	16.00	76.91	1.064
		2480	15.17	16.00	76.91	1.211
LE 1M		2402	1.57	2.50	61.72	1.239
		2440	1.82	2.50	61.72	1.169
		2480	2.08	2.50	61.72	1.102
LE 2M		2402	1.31	2.50	32.05	1.315
		2440	1.60	2.50	32.05	1.230
		2480	1.85	2.50	32.05	1.161

9 TEST PROCEDURES

9.1 SAR Test Results Summary

SAR Measurement									
Ambient Temperature (°C) : 21.5 ± 2					Relative Humidity (%): 52				
Liquid Temperature (°C) : 21.0 ± 2					Depth of Liquid (cm):>15				
VR All-In-One Headset									
Head SAR: Spacing 0mm									
Test Mode	Test Position	Frequency (MHz)	Max Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Scaling Factor	Duty factor	Scaled SAR 1g (W/kg)	Limit (W/kg)
Head SAR Antenna 1- Pico 4 Pro									
802.11b	In Side	2462	21.21	-0.08	0.608	1.069	1.000	0.650	1.6
802.11b	In Side	2412	20.8	0.02	0.400	1.175	1.000	0.470	1.6
802.11b	In Side	2437	20.79	0.12	0.408	1.178	1.000	0.480	1.6
DH5	In Side	2402	16.3	0.02	0.095	1.047	1.309	0.130	1.6
DH5	In Side	2441	15.87	0.02	0.083	1.156	1.309	0.126	1.6
DH5	In Side	2480	16.2	-0.12	0.081	1.072	1.309	0.114	1.6
802.11a	In Side	5260	19.88	0.06	0.711	1.069	1.015	0.730	1.6
802.11a	In Side	5300	19.56	0.08	0.571	1.175	1.015	0.630	1.6
802.11a	In Side	5320	19.44	0.06	0.521	1.178	1.015	0.590	1.6
802.11a	In Side	5500	20.14	-0.08	0.514	1.047	1.015	0.560	1.6
802.11a	In Side	5580	19.38	0.06	0.900	1.156	1.015	1.040	1.6
802.11a	In Side	5700	19.85	-0.01	0.841	1.072	1.015	0.915	1.6
802.11a	In Side	5825	20.51	0.16	0.926	1.119	1.015	1.040	1.6
802.11a	In Side	5745	19.66	0.19	0.661	1.081	1.015	0.710	1.6
802.11a	In Side	5785	19.74	0.11	0.86	1.062	1.015	0.910	1.6
Head SAR Antenna 1- Pico 4									
802.11b	In Side	2462	21.21	0.01	0.534	1.069	1.000	0.571	1.6
802.11a	In Side	5825	20.51	-0.01	0.901	1.119	1.015	1.023	1.6

SAR Measurement									
Ambient Temperature (°C) : 21.5 ± 2					Relative Humidity (%): 52				
Liquid Temperature (°C) : 21.0 ± 2					Depth of Liquid (cm):>15				
VR All-In-One Headset									
Head SAR: Spacing 0mm									
Test Mode	Test Position	Frequency (MHz)	Max Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Scaling Factor	Duty factor	Scaled SAR 1g (W/kg)	Limit (W/kg)
Head SAR Antenna 2- Pico 4 Pro									
802.11b	In Side	2462	21.47	0.01	0.601	1.007	1.000	0.610	1.6
802.11b	In Side	2412	21.2	0.02	0.479	1.072	1.000	0.510	1.6
802.11b	In Side	2437	21.25	0.12	0.491	1.059	1.000	0.520	1.6
802.11a	In Side	5260	19.34	0.01	0.386	1.164	1.015	0.450	1.6
802.11a	In Side	5300	18.49	0.12	0.386	1.416	1.015	0.550	1.6
802.11a	In Side	5320	18.18	0.01	0.390	1.521	1.015	0.590	1.6
802.11a	In Side	5500	19.96	-0.19	0.489	1.132	1.015	0.550	1.6
802.11a	In Side	5580	18.53	0.13	0.559	1.403	1.015	0.780	1.6
802.11a	In Side	5700	19.19	0.19	0.763	1.205	1.015	0.920	1.6
802.11a	In Side	5825	20.56	-0.05	0.741	1.107	1.015	0.820	1.6
802.11a	In Side	5745	19.12	0.03	0.615	1.225	1.015	0.750	1.6
802.11a	In Side	5785	19.57	0.11	0.629	1.104	1.015	0.690	1.6
Head SAR Antenna 2- Pico 4									
802.11b	In Side	2462	21.47	-0.12	0.583	1.007	1.000	0.587	1.6
802.11a	In Side	5700	19.19	0.02	0.713	1.205	1.015	0.872	1.6

SAR Measurement									
Ambient Temperature (°C) : 21.5 ± 2					Relative Humidity (%): 52				
Liquid Temperature (°C) : 21.0 ± 2					Depth of Liquid (cm):>15				
VR All-In-One Headset									
Extremity SAR: Spacing 0mm									
Test Mode	Test Position	Frequency (MHz)	Max Power (dBm)	Power Drift (<±0.2)	SAR 10g (W/kg)	Scaling Factor	Duty factor	Scaled SAR 10g (W/kg)	Limit (W/kg)
Extremity SAR Antenna 1- Pico 4 Pro									
802.11b	Side1	2462	21.21	0.08	3.070	1.069	1.000	3.280	4.0
802.11b	Side1	2412	20.8	-0.11	2.630	1.175	1.000	3.090	4.0
802.11b	Side1	2437	20.79	0.03	2.630	1.178	1.000	3.100	4.0
802.11b	Side2	2462	21.21	0.02	0.248	1.069	1.000	0.270	4.0
802.11b	Back	2462	21.21	0.07	0.042	1.069	1.000	0.040	4.0
DH5	Side1	2402	16.3	0.04	0.219	1.047	1.309	0.300	4.0
DH5	Side1	2441	15.87	0.12	0.192	1.156	1.309	0.291	4.0
DH5	Side1	2480	16.2	0.14	0.186	1.072	1.309	0.261	4.0
802.11a	Side1	5260	19.88	0.16	2.100	1.028	1.015	2.160	4.0
802.11a	Side1	5300	19.56	0.12	1.650	1.107	1.015	1.830	4.0
802.11a	Side1	5320	19.44	0.09	1.780	1.138	1.015	2.020	4.0
802.11a	Side2	5260	19.88	0.18	0.309	1.028	1.015	0.320	4.0
802.11a	Back	5260	19.88	0.12	0.099	1.028	1.015	0.100	4.0
802.11a	Side1	5500	20.14	0.03	2.010	1.086	1.015	2.180	4.0
802.11a	Side1	5580	19.38	0.05	1.760	1.153	1.015	2.030	4.0
802.11a	Side1	5700	19.85	-0.05	2.170	1.035	1.015	2.250	4.0
802.11a	Side2	5500	20.14	0.17	0.348	1.086	1.015	0.380	4.0
802.11a	Back	5500	20.14	0.02	0.118	1.086	1.015	0.130	4.0
802.11a	Side1	5825	20.51	-0.12	2.820	1.119	1.015	3.160	4.0
802.11a	Side1	5745	19.66	0.01	1.890	1.081	1.015	2.040	4.0
802.11a	Side1	5785	19.74	0.03	2.060	1.062	1.015	2.190	4.0
802.11a	Side2	5825	20.51	-0.09	0.396	1.119	1.015	0.440	4.0
802.11a	Back	5825	20.51	-0.18	0.177	1.119	1.015	0.200	4.0
Extremity SAR Antenna 1- Pico 4									
802.11b	Side1	2462	21.21	0.11	2.840	1.069	1.000	3.036	4.0



802.11a	Side1	5825	20.51	-0.12	2.650	1.119	1.015	3.010	4.0
---------	-------	------	-------	-------	-------	-------	-------	-------	-----

SAR Measurement									
Ambient Temperature (°C) : 21.5 ± 2					Relative Humidity (%): 52				
Liquid Temperature (°C) : 21.0 ± 2					Depth of Liquid (cm):>15				
VR All-In-One Headset									
Extremity SAR: Spacing 0mm									
Test Mode	Test Position	Frequency (MHz)	Max Power (dBm)	Power Drift (<±0.2)	SAR 10g (W/kg)	Scaling Factor	Duty factor	Scaled SAR 10g (W/kg)	Limit (W/kg)
Extremity SAR Antenna 2- Pico 4 Pro									
802.11b	Side1	2462	21.47	0.05	3.340	1.007	1.000	3.360	4.0
802.11b	Side1	2412	21.2	-0.11	3.140	1.072	1.000	3.360	4.0
802.11b	Side1	2437	21.25	-0.13	3.060	1.059	1.000	3.240	4.0
802.11b	Side4	2462	21.47	0.03	0.397	1.007	1.000	0.400	4.0
802.11b	Back	2462	21.47	-0.11	0.044	1.007	1.000	0.040	4.0
802.11a	Side1	5260	19.34	-0.11	2.740	1.164	1.015	3.190	4.0
802.11a	Side1	5300	18.49	0.02	2.260	1.416	1.015	3.200	4.0
802.11a	Side1	5320	18.18	0.02	2.290	1.521	1.015	3.480	4.0
802.11a	Side4	5260	19.34	0.14	0.189	1.164	1.015	0.220	4.0
802.11a	Back	5260	19.34	0.09	0.107	1.164	1.015	0.120	4.0
802.11a	Side1	5500	19.96	-0.09	3.090	1.132	1.015	3.500	4.0
802.11a	Side1	5580	18.53	0.02	1.990	1.403	1.015	2.790	4.0
802.11a	Side1	5700	19.19	0.05	2.560	1.205	1.015	3.080	4.0
802.11a	Side4	5500	19.96	0.13	0.200	1.132	1.015	0.230	4.0
802.11a	Back	5500	19.96	0.12	0.123	1.132	1.015	0.140	4.0
802.11a	Side1	5825	20.56	-0.04	3.220	1.107	1.015	3.560	4.0
802.11a	Side1	5745	19.12	0.03	2.810	1.225	1.015	3.440	4.0
802.11a	Side1	5785	19.57	0.12	2.930	1.104	1.015	3.230	4.0
802.11a	Side4	5825	20.56	0.19	0.182	1.107	1.015	0.200	4.0
802.11a	Back	5825	20.56	0.08	0.113	1.107	1.015	0.130	4.0
Extremity SAR Antenna 2- Pico 4									
802.11b	Side1	2462	21.47	-0.12	3.030	1.007	1.000	3.051	4.0
802.11a	Side1	5825	20.56	-0.03	2.980	1.107	1.015	3.348	4.0

Note:

1. Referring to the standard KDB 865664, when the actual measurement SAR ≥ 0.8 W/kg (Extremity SAR ≥ 2 W/kg), the measurement needs to be repeated once. We evaluated all test items and only show the worst data.
2. The worst data are marked in bold color.
3. Model Pico 4 Pro just updated the function on the basis of Pico 4, and the wireless module has not changed. Pico 4 only evaluates the worst value of Pico 4 Pro for test evaluation.

9.2 Simultaneous Transmission Analysis

1	WLAN 2.4GHz + Bluetooth For Head SAR
2	WLAN 5GHz + Bluetooth For Head SAR
3	WLAN 2.4GHz + Bluetooth For Extremity SAR
4	WLAN 5GHz + Bluetooth For Extremity SAR

Simultaneous Transmission of Wi-Fi and other wireless technologies

Head SAR 1g(W/kg)	WLAN 2.4GHz SAR (W/kg)	WLAN 5GHz SAR (W/kg)	Bluetooth SAR (W/kg)	Simultaneous Transmission
WLAN 2.4GHz + Bluetooth	0.65	--	0.13	0.78
WLAN 5GHz + Bluetooth	--	1.04	0.13	1.17

Extremity SAR 10g(W/kg)	WLAN 2.4GHz SAR (W/kg)	WLAN 5GHz SAR (W/kg)	Bluetooth SAR (W/kg)	Simultaneous Transmission
WLAN 2.4GHz + Bluetooth	3.36	--	0.30	3.66
WLAN 5GHz + Bluetooth	--	3.56	0.30	3.86

Note:

1. The sum of value is less than 1.6W/kg or The ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for SAR test exclusion.
2. The sum of value is less than 4.0W/kg or The ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.1 for all antenna pairs in the configuration to qualify for SAR test exclusion.
3. All modes were evaluated and only data for the worst antenna positions are shown.

9.3 Test position and configuration

1. Liquid tissue depth was at least 15.0 cm for all frequencies.
2. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
3. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
4. Reported SAR were scaled to the maximum duty factor to demonstrate compliance per FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02.
5. SAR was performed with the device configured in the positions according to KDB 447498 D01 SAR Procedures for general, Body SAR was performed with the device to phantom separation distance of 10mm.
6. SAR was performed with the device configured in the positions according to KDB 447498 D01 SAR Procedures for general, Limb SAR was performed with the device to phantom separation distance of 0mm.
7. Because of the Hand-held device, so addition tests are performed at five positions (Front, Back, Top, Right, Left).

WLAN Notes:

When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other default channels is not required.

Appendix A. SAR System Validation Data

Date: 7/1/2022

Test Laboratory: DEKRA Lab

System Check Head 2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2

Communication System: UID 0, CW (0); Communication System Band: Exported from older format (data unavailable - please correct).; Duty Cycle: 1:1; Frequency: 2450 MHz; Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 39.156$; $\rho = 1000$ kg/m³; Phantom section: Flat Section; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39); Calibrated: 4/18/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

System Check Head 2450MHz/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 13.1 W/kg


System Check Head 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.44 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.89 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

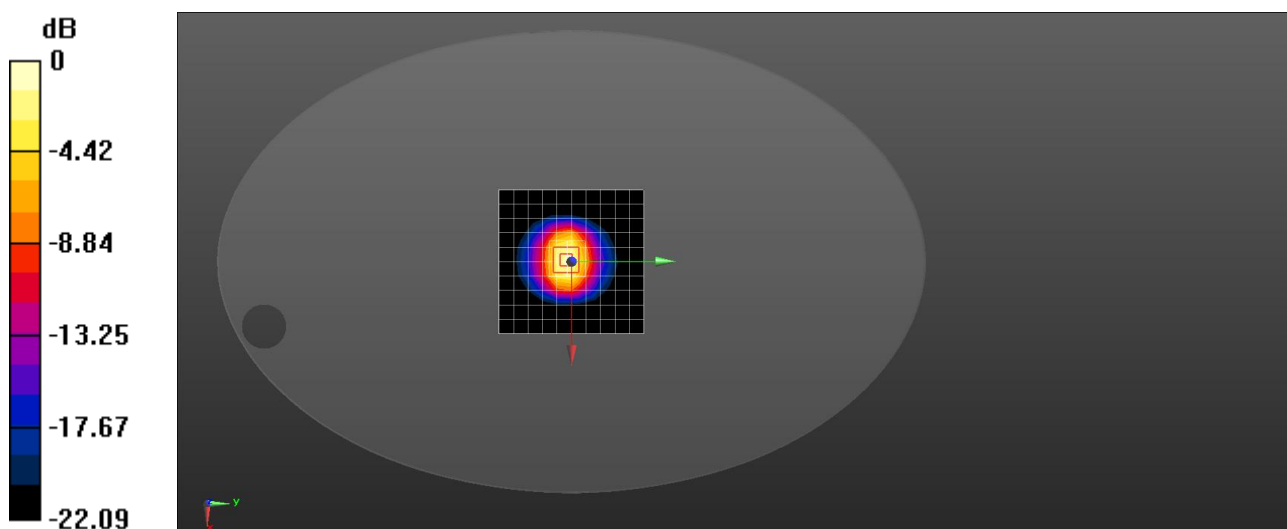

$$0 \text{ dB} = 14.6 \text{ W/kg} = 11.64 \text{ dBW/kg}$$

Date: 7/3/2022

Test Laboratory: DEKRA Lab

System Check Head 5250MHz

DUT: Dipole 5000 MHz D5000V2; Type: D5000V2

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5250 MHz; Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.626$ S/m; $\epsilon_r = 37.727$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(5.4, 5.4, 5.4) ; Calibrated: 4/18/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

System Check Head 5250MHz/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.51 W/kg


System Check Head 5250MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 35.04 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 8.88 W/kg

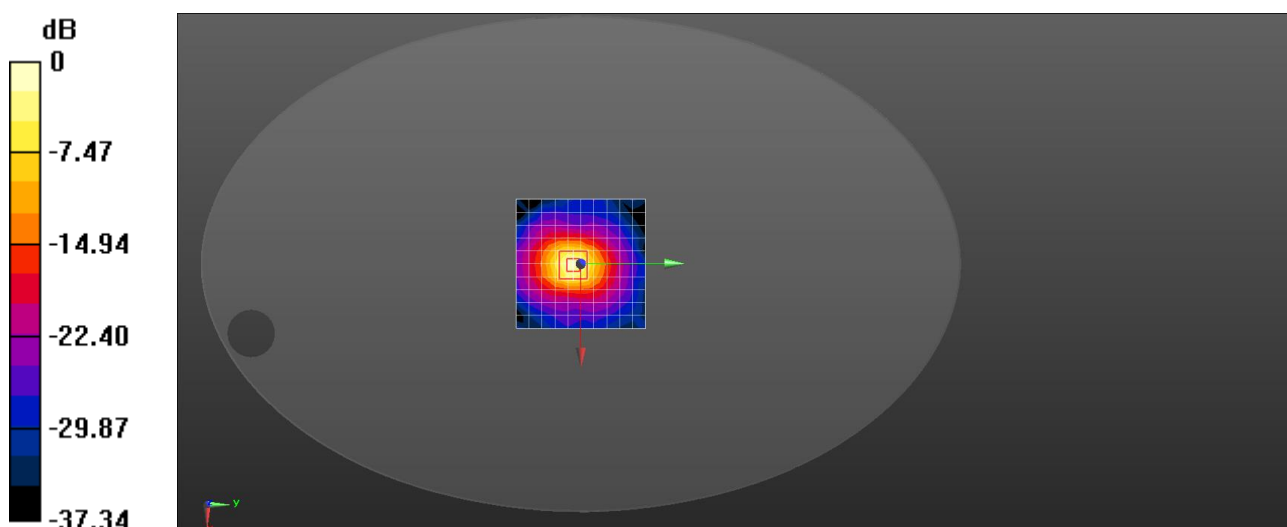

$$0 \text{ dB} = 8.88 \text{ W/kg} = 9.48 \text{ dBW/kg}$$

Date: 7/3/2022

Test Laboratory: DEKRA Lab

System Check Head 5600MHz

DUT: Dipole 5000 MHz D5000V2; Type: D5000V2

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5600 MHz; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.035$ S/m; $\epsilon_r = 35.947$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.85, 4.85, 4.85); Calibrated: 4/18/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

System Check Head 5600MHz/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.32 W/kg


System Check Head 5600MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 33.20 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 8.73 W/kg

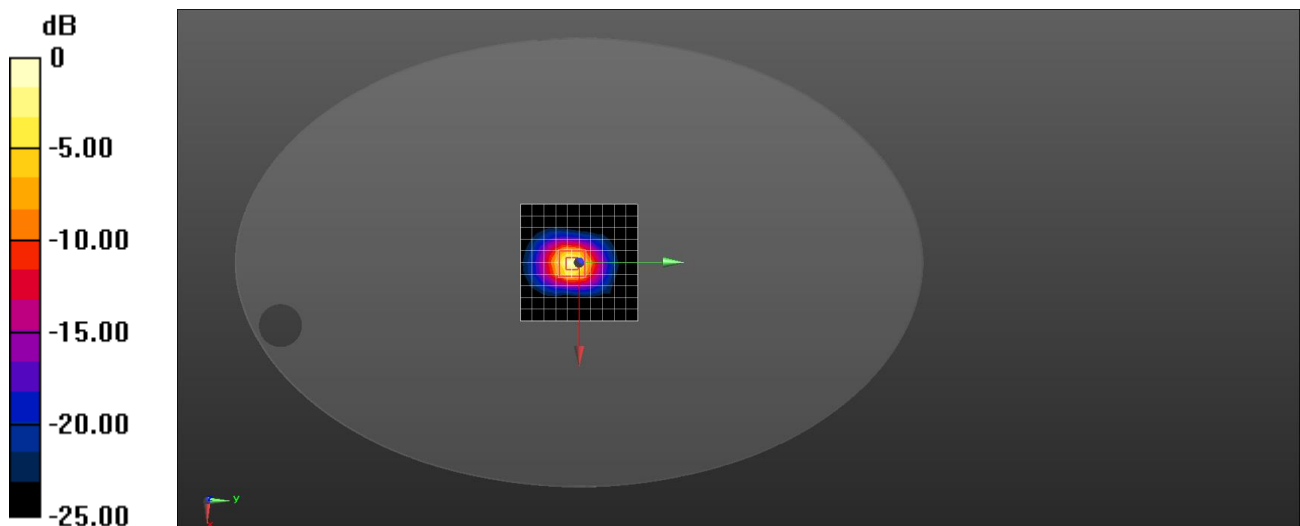

0 dB = 8.73 W/kg = 9.41 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

System Check Head 5750MHz

DUT: Dipole 5000 MHz D5000V2; Type: D5000V2

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5750 MHz; Medium parameters used: $f = 5750$ MHz; $\sigma = 5.216$ S/m; $\epsilon_r = 35.621$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.88, 4.88, 4.88) ; Calibrated: 4/18/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

System Check Head 5750MHz/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.15 W/kg


System Check Head 5750MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 32.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 8.53 W/kg

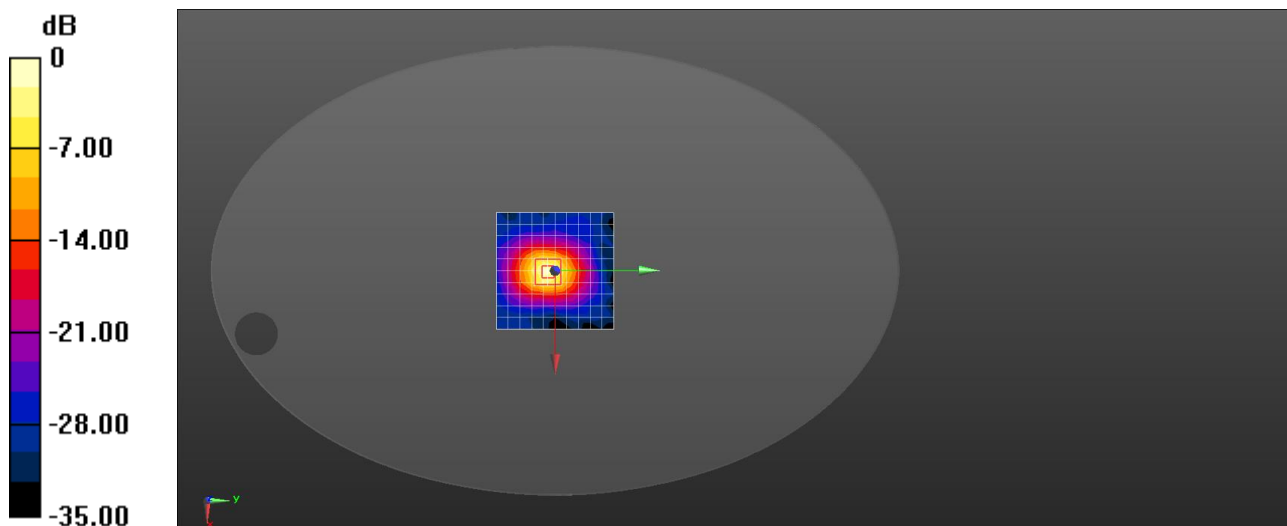

0 dB = 8.53 W/kg = 9.31 dBW/kg

Appendix B. SAR measurement Data

Date: 7/1/2022

Test Laboratory: DEKRA Lab

WLAN2.4G_802.11b_1Mbps_CH11_2462MHz_In Side_Ant1

DUT: VR;

Communication System: UID 0, Wi-Fi (0); Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.139$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN2.4G_802.11b_CH11/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.806 W/kg


WLAN2.4G_802.11b_CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.68 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.856 W/kg

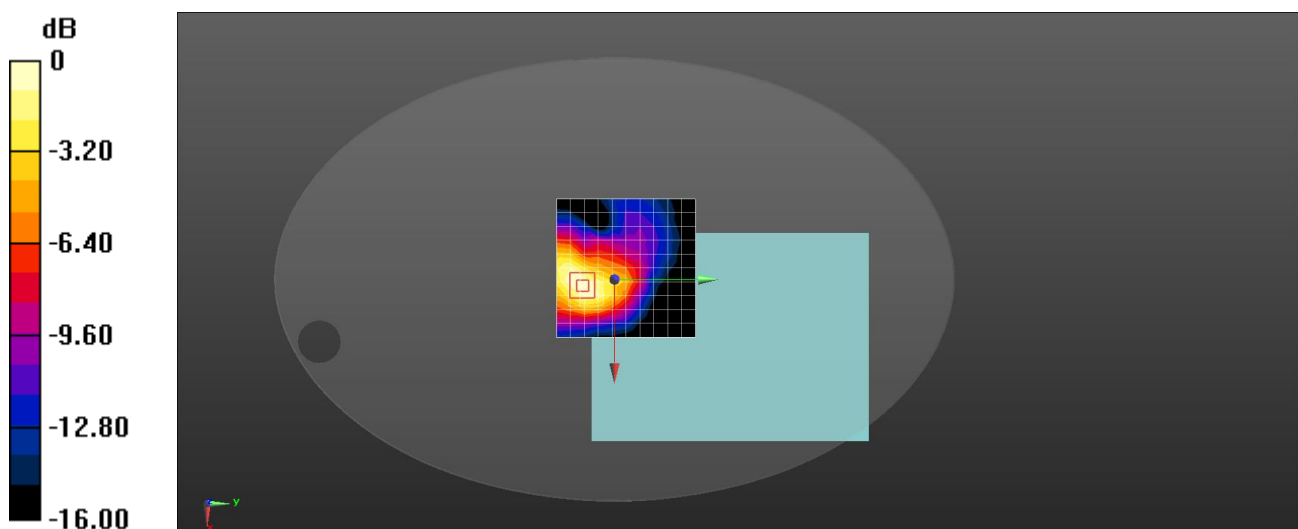

0 dB = 0.856 W/kg = -0.68 dBW/kg

Date: 7/1/2022

Test Laboratory: DEKRA Lab

WLAN2.4G_802.11b_1Mbps_CH11_2462MHz_In Side_Ant2_

DUT: VR;

Communication System: UID 0, Wi-Fi (0); Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.139$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN2.4G_802.11b_CH11/Area Scan (12x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.674 W/kg


WLAN2.4G_802.11b_CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.286 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.693 W/kg

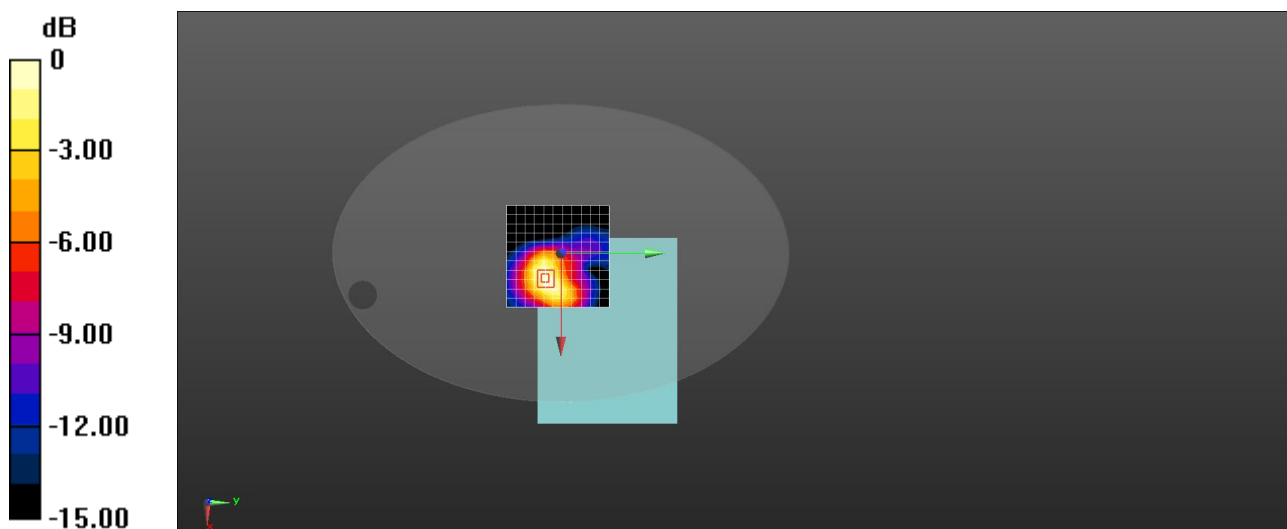

0 dB = 0.693 W/kg = -1.59 dBW/kg

Date: 7/1/2022

Test Laboratory: DEKRA Lab

Bluetooth_DH5_1Mbps_CH0_2402MHz_In Side_

DUT: VR;

Communication System: UID 0, Bluetooth (0); Communication System Band: ISM Band; Duty Cycle: 1:1;

Frequency: 2402 MHz; Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 39.272$;

$\rho = 1000$ kg/m³; Phantom section: Flat Section; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

BT_CH0/Area Scan (12x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.122 W/kg


BT_CH0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.572 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

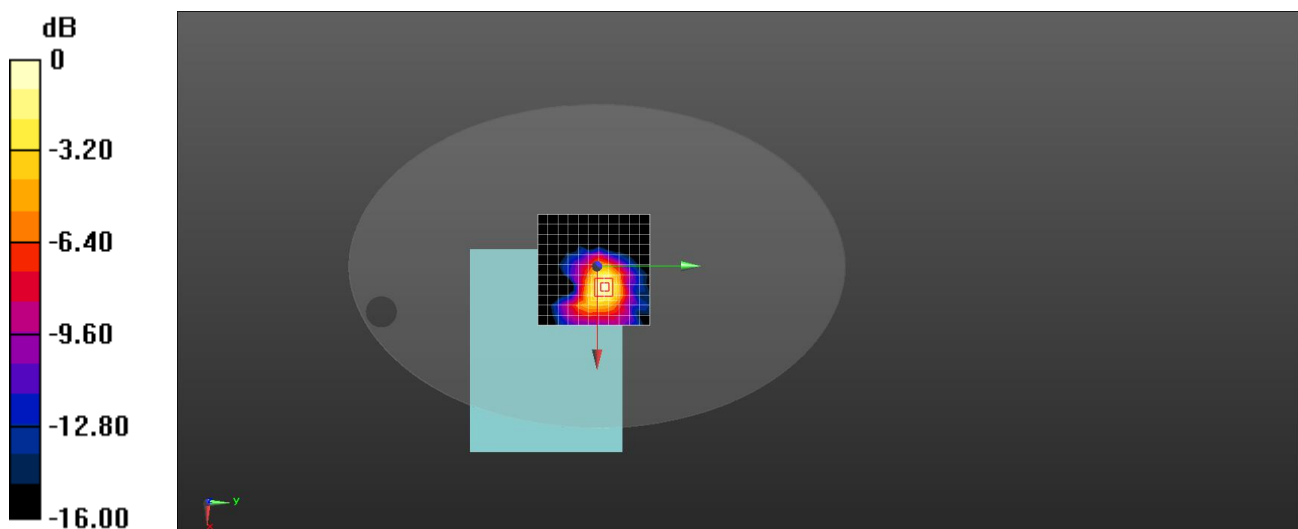

0 dB = 0.139 W/kg = -8.57 dBW/kg

Date: 7/1/2022

Test Laboratory: DEKRA Lab

WLAN2.4G_802.11b_1Mbps_CH11_2462MHz_Side1_Ant1

DUT: VR;

Communication System: UID 0, Wi-Fi (0); Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.139$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN2.4G_802.11b_CH11/Area Scan (12x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 13.9 W/kg


WLAN2.4G_802.11b_CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.538 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 20.6 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 3.07 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

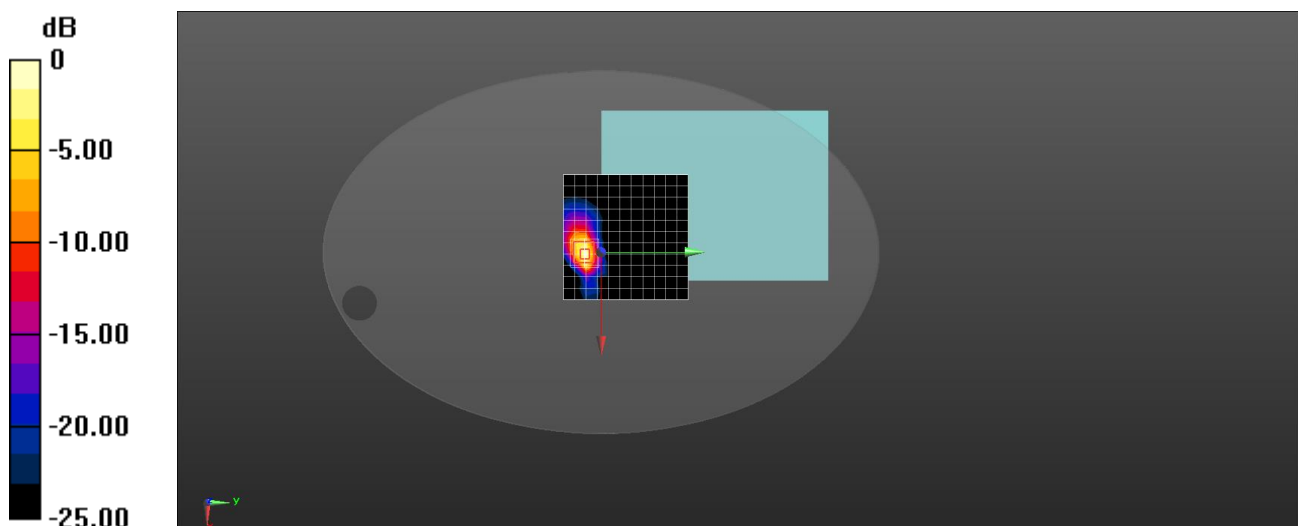

0 dB = 14.1 W/kg = 11.49 dBW/kg

Date: 7/1/2022

Test Laboratory: DEKRA Lab

WLAN2.4G_802.11b_1Mbps_CH11_2462MHz_Side1_Ant2

DUT: VR;

Communication System: UID 0, Wi-Fi (0); Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.139$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN2.4G_802.11b_CH11/Area Scan (11x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 16.0 W/kg


WLAN2.4G_802.11b_CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.38 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.1 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 3.34 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

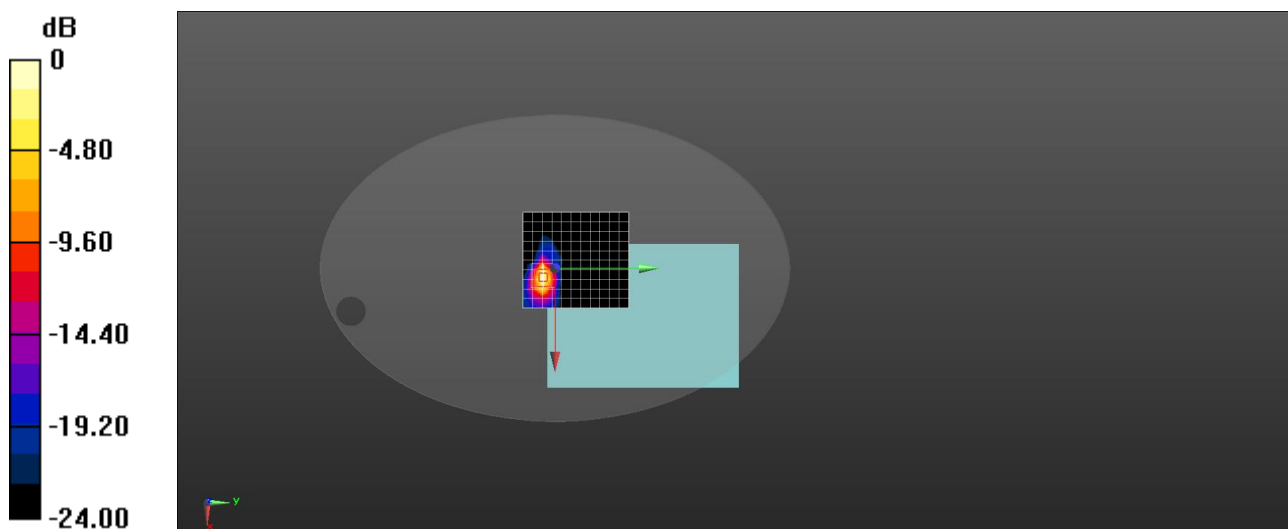

0 dB = 17.4 W/kg = 12.41 dBW/kg

Date: 7/1/2022

Test Laboratory: DEKRA Lab

Bluetooth_DH5_1Mbps_CH0_2402MHz_Side1

DUT: VR;

Communication System: UID 0, Bluetooth (0); Communication System Band: ISM Band; Duty Cycle: 1:1;

Frequency: 2402 MHz; Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 39.272$;

$\rho = 1000$ kg/m³; Phantom section: Flat Section; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(7.39, 7.39, 7.39); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

BT_CH0/Area Scan (12x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.13 W/kg


BT_CH0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.158 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.73 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

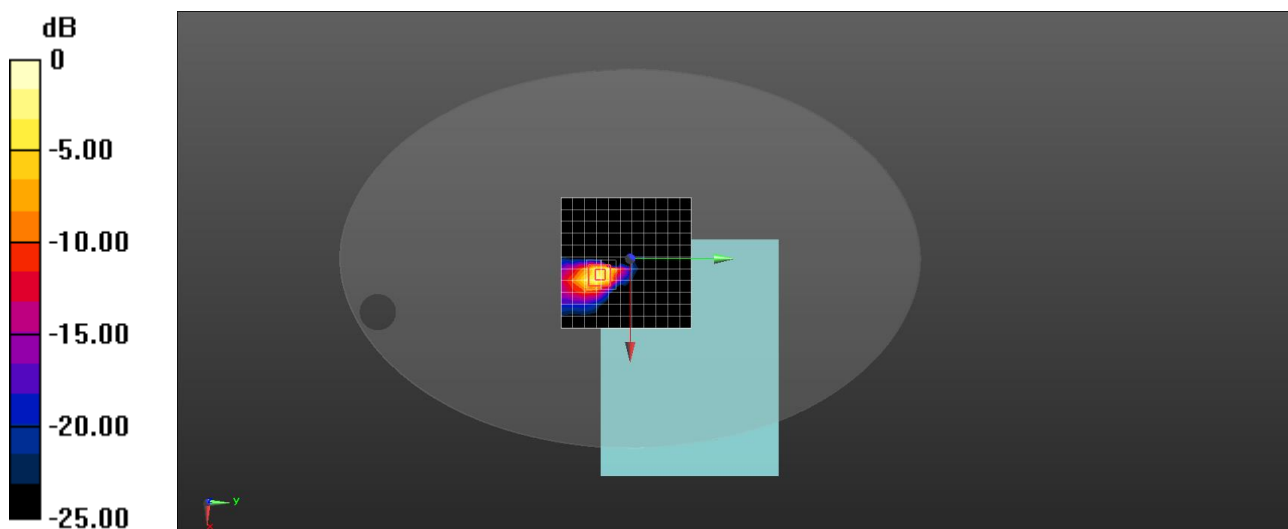

0 dB = 1.71 W/kg = 2.33 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH52_5260MHz_In Side_Ant1

DUT: VR;

Communication System: UID 0, Wi-Fi (0); Communication System Band: 802.11a; Duty Cycle: 1:1.0;

Frequency: 5260 MHz; Medium parameters used: $f = 5260$ MHz; $\sigma = 4.638$ S/m; $\epsilon_r = 36.706$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(5.4, 5.4, 5.4); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH52/Area Scan (13x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg


WLAN5G_802.11a_CH52/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.307 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

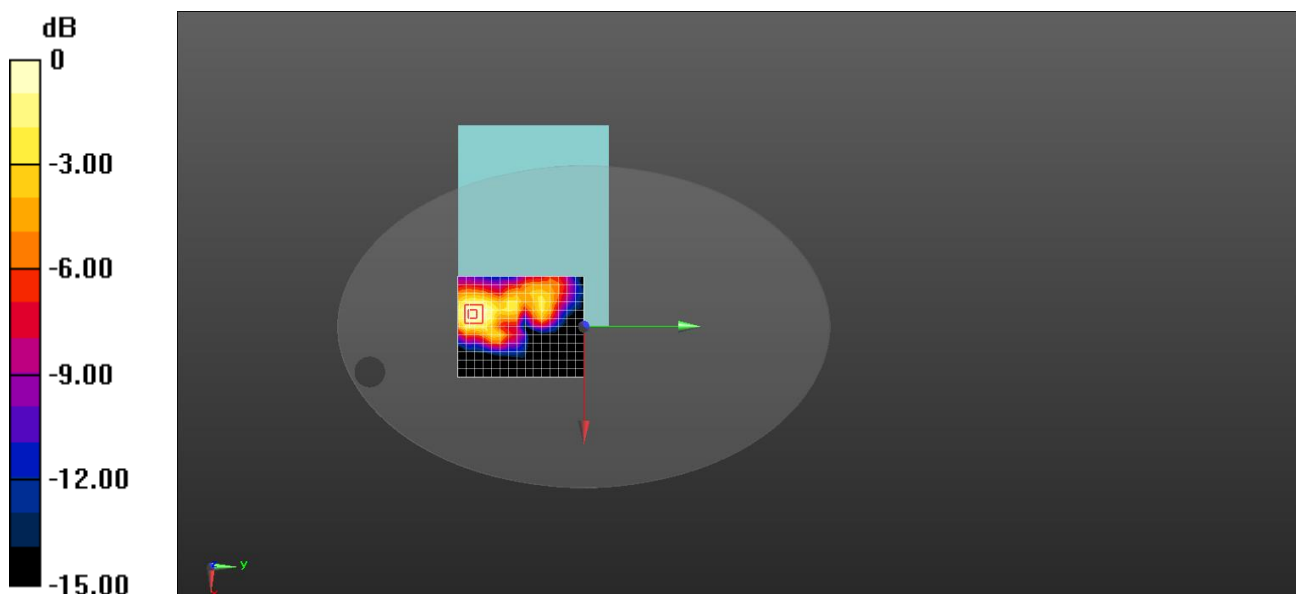

0 dB = 1.24 W/kg = 0.93 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH116_5580MHz_In Side_Ant1

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5580 MHz; Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.01 \text{ S/m}$; $\epsilon_r = 35.993$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.85, 4.85, 4.85) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH116/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


WLAN5G_802.11a_CH116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.659 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

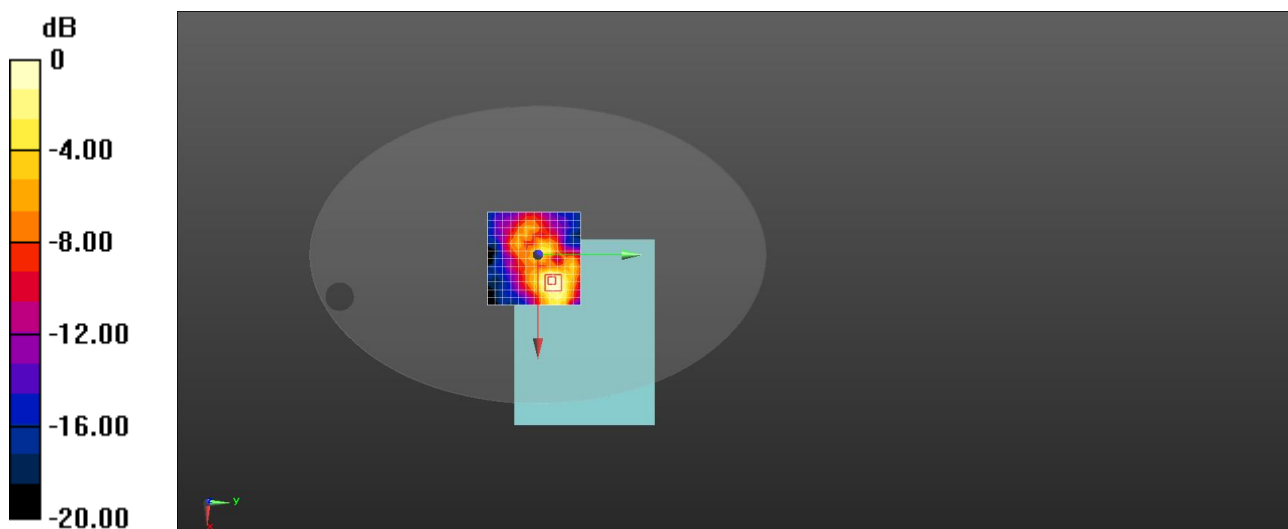

0 dB = 1.62 W/kg = 2.10 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH165_5825MHz_In Side_Ant1

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5825 MHz; Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.304$ S/m; $\epsilon_r = 35.465$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.88, 4.88, 4.88) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH165/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.60 W/kg


WLAN5G_802.11a_CH165/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.165 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.926 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

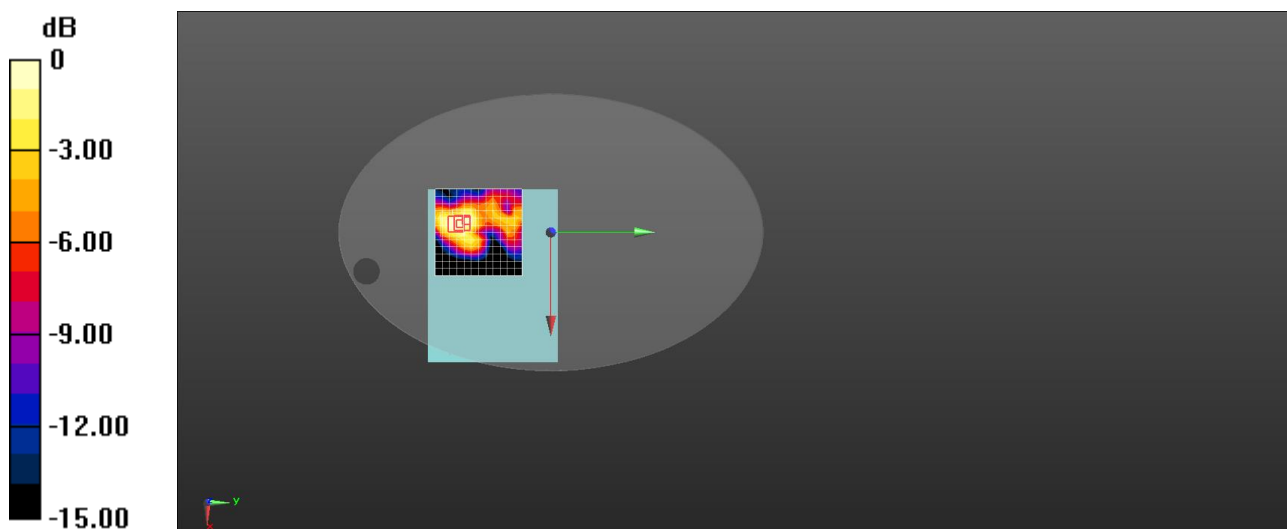

0 dB = 1.63 W/kg = 2.12 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH64_5320MHz_In Side_Ant2

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5320 MHz; Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.706 \text{ S/m}$; $\epsilon_r = 36.571$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(5.4, 5.4, 5.4) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH64/Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.666 W/kg


WLAN5G_802.11a_CH64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.445 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

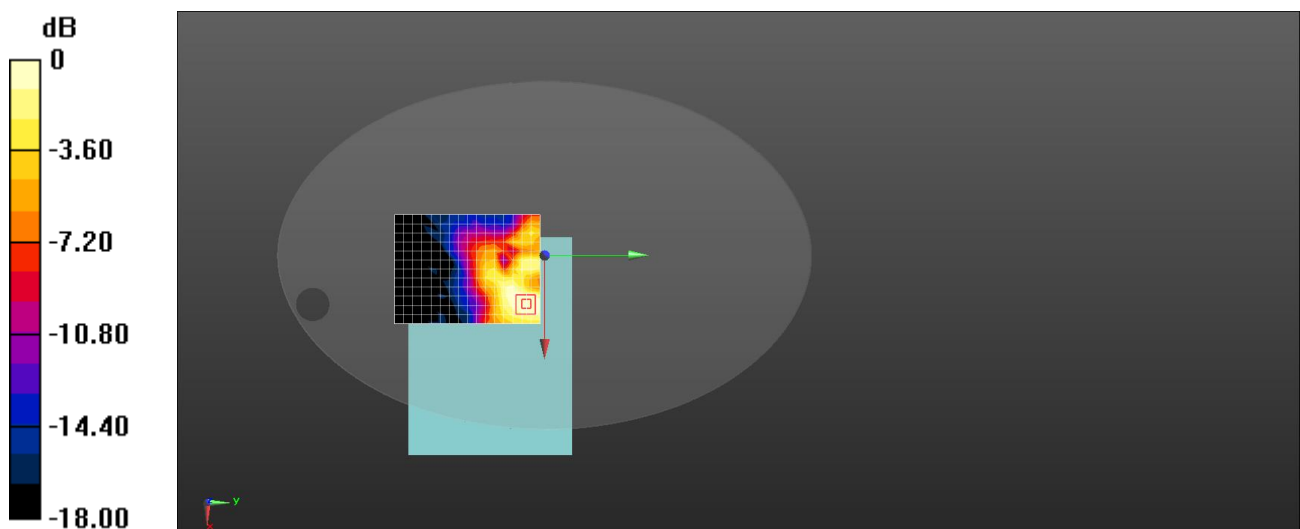

0 dB = 0.672 W/kg = -1.73 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH140_5700MHz_In Side_Ant2

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5700 MHz; Medium parameters used (interpolated): $f = 5700$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 35.731$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.85, 4.85, 4.85) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH140/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.989 W/kg


WLAN5G_802.11a_CH140/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.084 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.990 W/kg

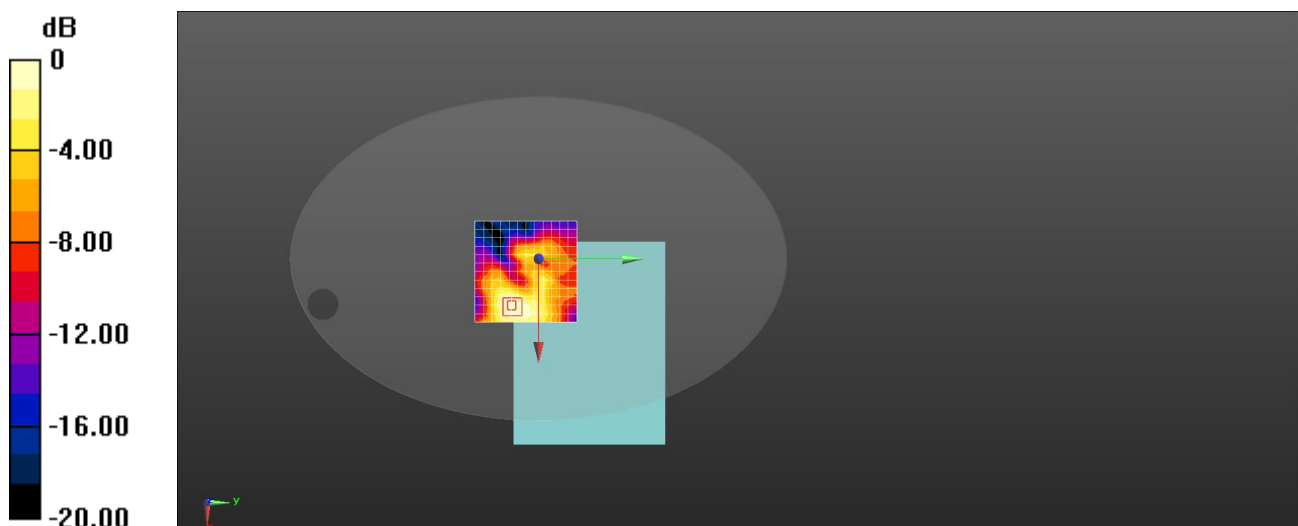

0 dB = 0.990 W/kg = -0.04 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH165_5825MHz_In Side_Ant2

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5825 MHz; Medium parameters used (interpolated): $f = 5825 \text{ MHz}$; $\sigma = 5.304 \text{ S/m}$; $\epsilon_r = 35.465$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.88, 4.88, 4.88) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH165/Area Scan (14x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.29 W/kg


WLAN5G_802.11a_CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.993 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

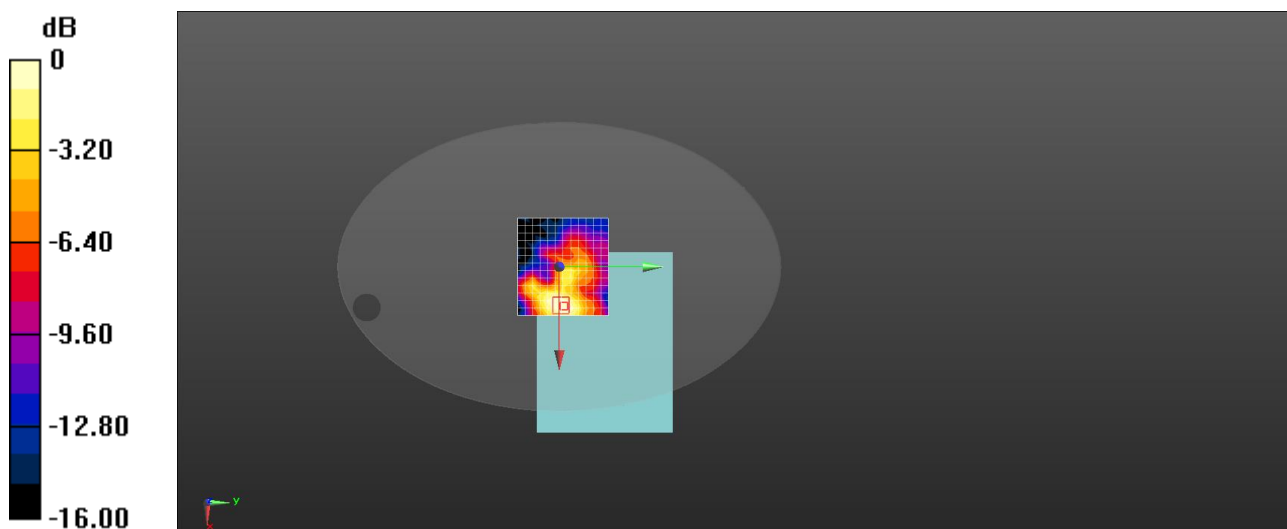

0 dB = 1.31 W/kg = 1.17 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH52_5260MHz_Side1_Ant1

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5260 MHz; Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.638 \text{ S/m}$; $\epsilon_r = 36.706$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(5.4, 5.4, 5.4) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH52/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.2 W/kg


WLAN5G_802.11a_CH52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 33.79 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 5.94 W/kg; SAR(10 g) = 2.10 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

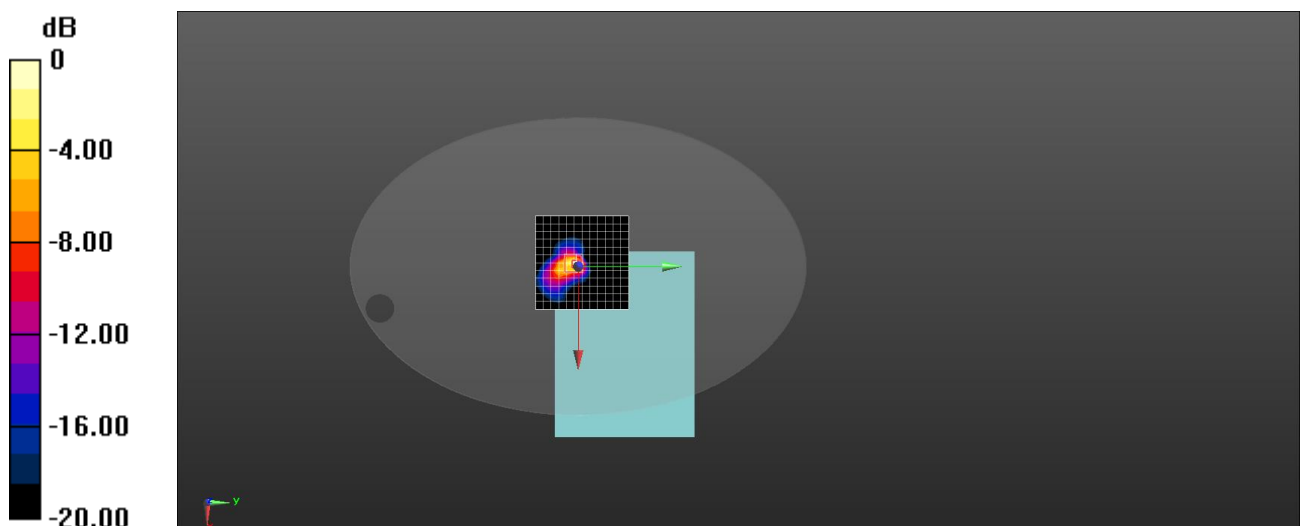

0 dB = 13.0 W/kg = 11.14 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH140_5700MHz_Side1_Ant1

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5700 MHz; Medium parameters used (interpolated): $f = 5700$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 35.731$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.85, 4.85, 4.85); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH116/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.4 W/kg


WLAN5G_802.11a_CH116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 36.29 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 46.8 W/kg

SAR(1 g) = 8.88 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 21.3 W/kg

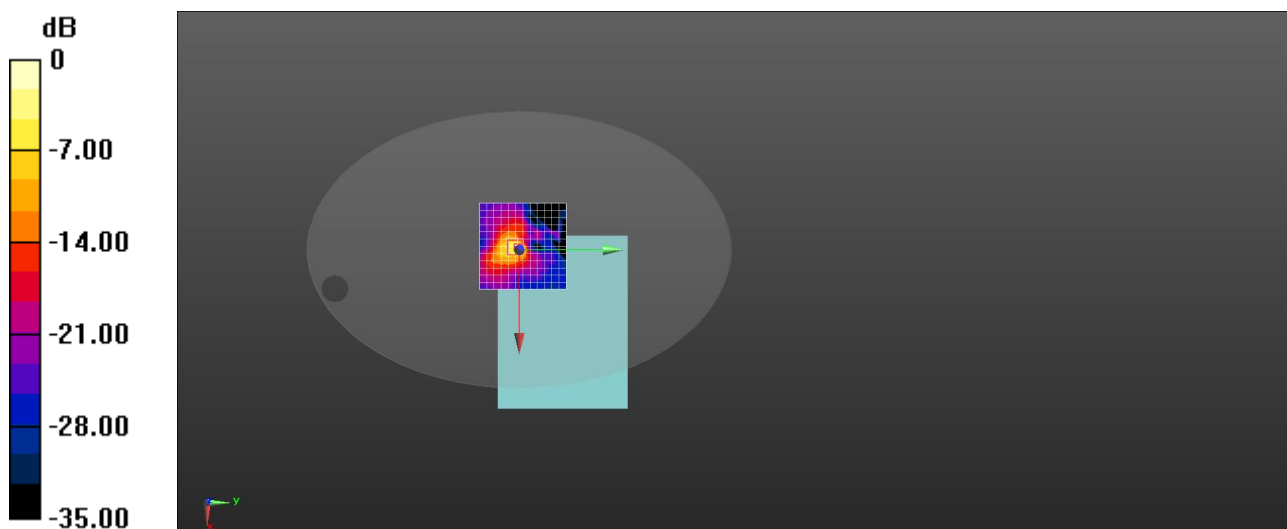

0 dB = 21.3 W/kg = 13.28 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH165_5825MHz_Side1_Ant1

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5825 MHz; Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.304$ S/m; $\epsilon_r = 35.465$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.88, 4.88, 4.88) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH165/Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.6 W/kg


WLAN5G_802.11a_CH165/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 30.77 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 66.7 W/kg

SAR(1 g) = 11.3 W/kg; SAR(10 g) = 2.82 W/kg

Maximum value of SAR (measured) = 24.7 W/kg

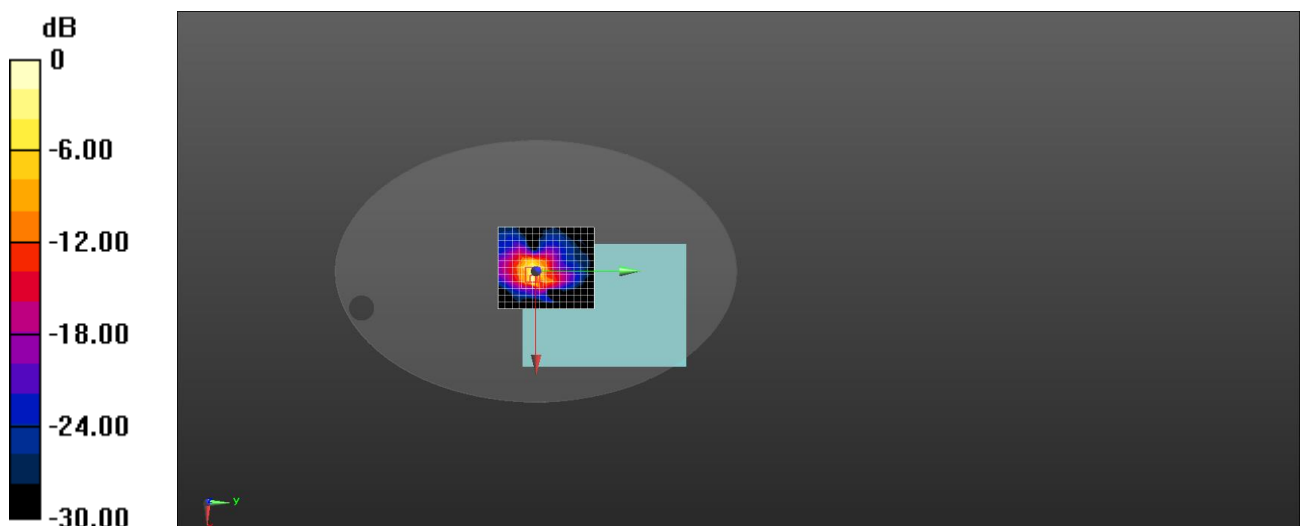

0 dB = 24.7 W/kg = 13.93 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH64_5320MHz_Side1_Ant2

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5320 MHz; Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.706 \text{ S/m}$; $\epsilon_r = 36.571$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(5.4, 5.4, 5.4) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH64/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.8 W/kg


WLAN5G_802.11a_CH64/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 41.0 W/kg

SAR(1 g) = 8.88 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

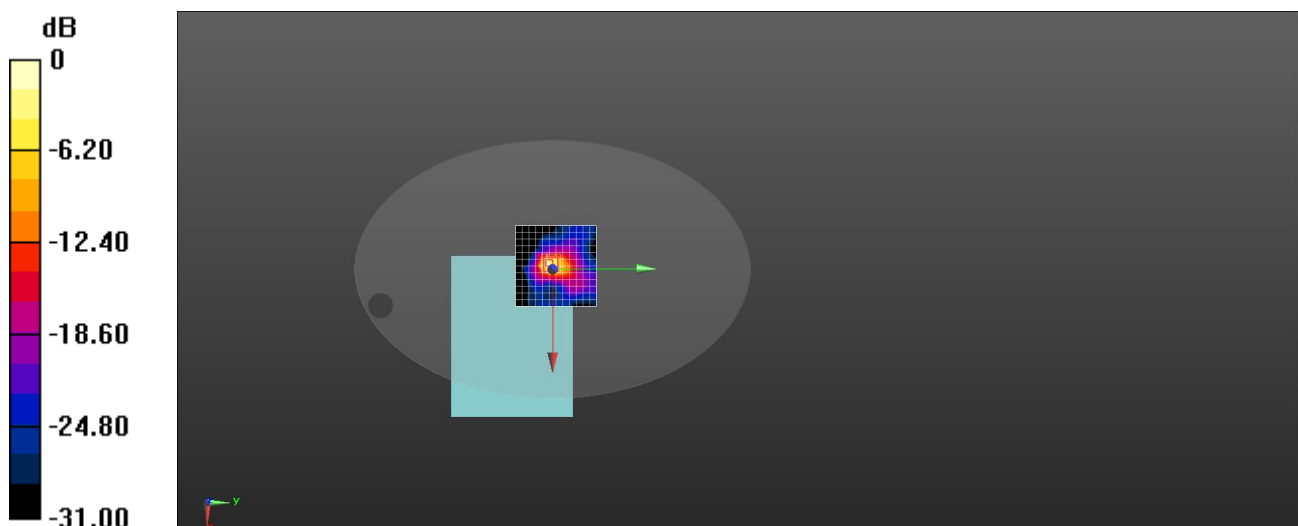

0 dB = 17.8 W/kg = 12.50 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH100_5500MHz_Side1_Ant2

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5500 MHz; Medium parameters used: $f = 5500$ MHz; $\sigma = 4.913$ S/m; $\epsilon_r = 36.172$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.85, 4.85, 4.85); Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH100/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.3 W/kg


WLAN5G_802.11a_CH100/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 27.63 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 84.9 W/kg

SAR(1 g) = 14.8 W/kg; SAR(10 g) = 3.09 W/kg

Maximum value of SAR (measured) = 35.3 W/kg

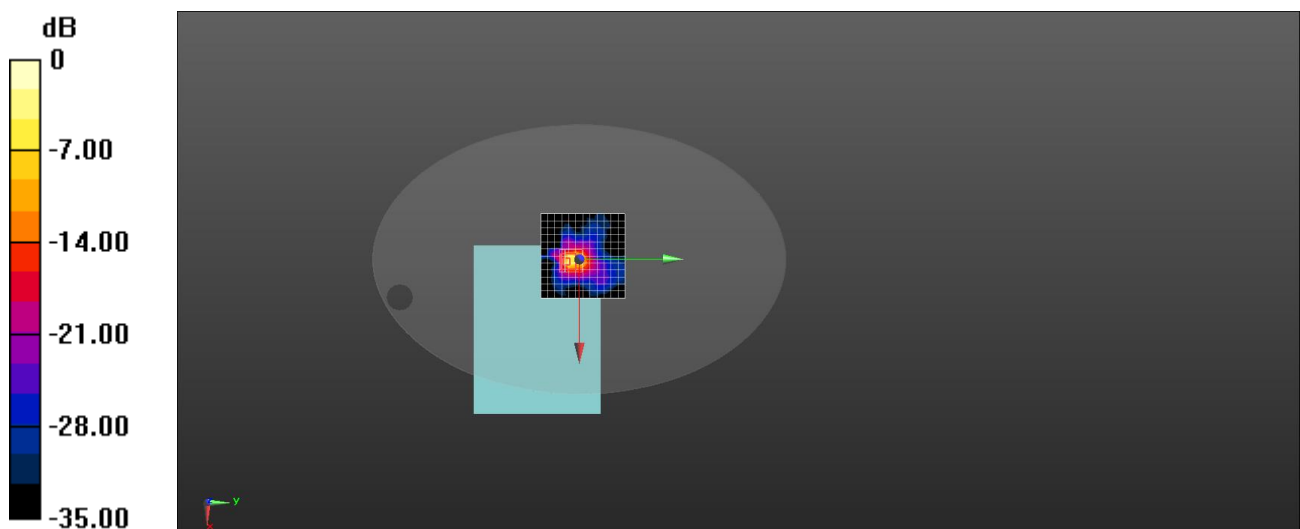

0 dB = 35.3 W/kg = 15.48 dBW/kg

Date: 7/3/2022

Test Laboratory: DEKRA Lab

WLAN5G_802.11a_6Mbps_CH165_5825MHz_Side1_Ant2_Power Setting19

DUT: VR;

Communication System: UID 0, CW (0); Communication System Band: 5GHz(5000.0-6000.0MHz); Duty Cycle: 1:1.0; Frequency: 5825 MHz; Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.304$ S/m; $\epsilon_r = 35.465$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3710; ConvF(4.88, 4.88, 4.88) ; Calibrated: 4/18/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1220; Calibrated: 3/24/2022
- Phantom: ELI1; Type: QDOVA002AA; Serial: TP:2106
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WLAN5G_802.11a_CH165/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.6 W/kg


WLAN5G_802.11a_CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 28.35 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 117 W/kg

SAR(1 g) = 17.2 W/kg; SAR(10 g) = 3.22 W/kg

Maximum value of SAR (measured) = 47.5 W/kg

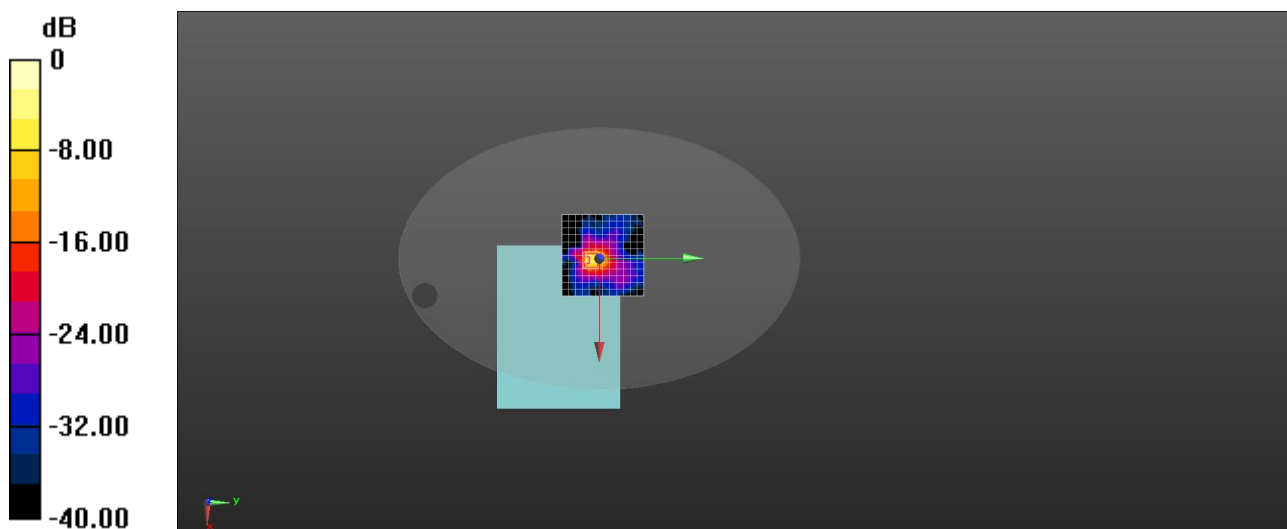

0 dB = 47.5 W/kg = 16.77 dBW/kg

Note:

We evaluate and test all channel and only show data for the worst channel.

Appendix C. Probe Calibration Data



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client **Dekra-CN**Certificate No: **Z22-60083**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 3710**Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field ProbesCalibration date: **April 18, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Power sensor NRP-Z91	101547	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Power sensor NRP-Z91	101548	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Reference 10dBAttenuator	18N50W-10dB	20-Jan-21(CTTL, No.J21X00486)	Jan-23
Reference 20dBAttenuator	18N50W-20dB	20-Jan-21(CTTL, No.J21X00485)	Jan-23
Reference Probe EX3DV4	SN 7307	26-May-21(SPEAG, No.EX3-7307_May21)	May-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1555	20-Aug-21(SPEAG, No.DAE4-1555_Aug21/2)	Aug-22
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	16-Jun-21(CTTL, No.J21X04467)	Jun-22
Network Analyzer E5071C	MY46110673	14-Jan-22(CTTL, No.J22X00406)	Jan-23

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: April 19, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60083

Page 1 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No: Z22-60083

Page 2 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



DASY/EASY – Parameters of Probe: EX3DV4 – SN:3710

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V/m})^2$) ^A	0.37	0.41	0.49	±10.0%
DCP(mV) ^B	101.9	102.3	102.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	140.6	±2.1%
		Y	0.0	0.0	1.0		148.8	
		Z	0.0	0.0	1.0		170.6	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



DASY/EASY – Parameters of Probe: EX3DV4 – SN:3710

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.60	9.60	9.60	0.17	1.28	±12.1%
835	41.5	0.90	9.31	9.31	9.31	0.15	1.41	±12.1%
900	41.5	0.97	9.30	9.30	9.30	0.17	1.27	±12.1%
1810	40.0	1.40	7.90	7.90	7.90	0.30	0.93	±12.1%
1900	40.0	1.40	7.80	7.80	7.80	0.32	0.94	±12.1%
2300	39.5	1.67	7.66	7.66	7.66	0.57	0.71	±12.1%
2450	39.2	1.80	7.39	7.39	7.39	0.61	0.69	±12.1%
2600	39.0	1.96	7.18	7.18	7.18	0.53	0.76	±12.1%
3300	38.2	2.71	7.00	7.00	7.00	0.43	0.93	±13.3%
3500	37.9	2.91	6.78	6.78	6.78	0.45	0.98	±13.3%
3700	37.7	3.12	6.49	6.49	6.49	0.42	1.02	±13.3%
3900	37.5	3.32	6.55	6.55	6.55	0.35	1.35	±13.3%
4100	37.2	3.53	6.53	6.53	6.53	0.40	1.15	±13.3%
4200	37.1	3.63	6.44	6.44	6.44	0.40	1.25	±13.3%
4400	36.9	3.84	6.34	6.34	6.34	0.40	1.25	±13.3%
4600	36.7	4.04	6.23	6.23	6.23	0.45	1.25	±13.3%
4800	36.4	4.25	6.18	6.18	6.18	0.45	1.30	±13.3%
4950	36.3	4.40	5.87	5.87	5.87	0.45	1.30	±13.3%
5250	35.9	4.71	5.40	5.40	5.40	0.45	1.30	±13.3%
5600	35.5	5.07	4.85	4.85	4.85	0.55	1.20	±13.3%
5750	35.4	5.22	4.88	4.88	4.88	0.55	1.20	±13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

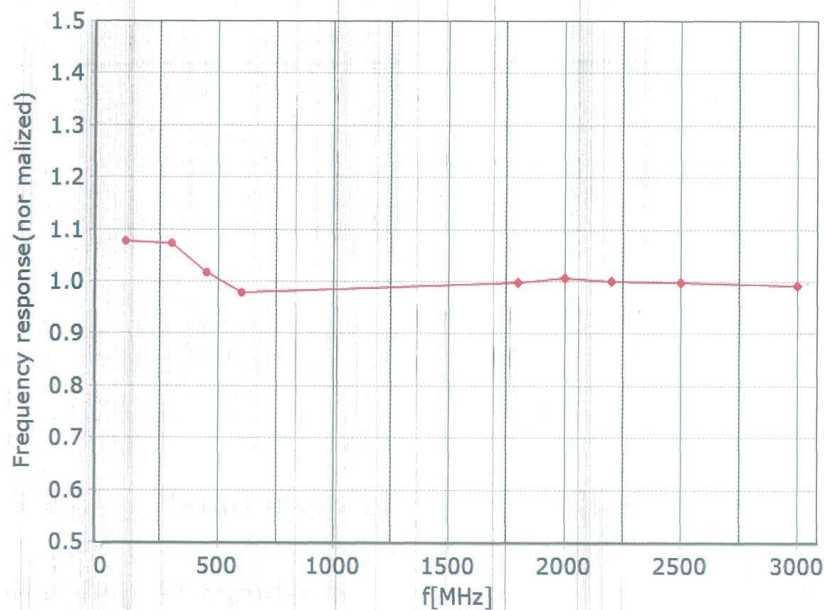

• TEM

♦ R22

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)





Receiving Pattern (Φ), $\theta=0^\circ$


f=600 MHz, TEM

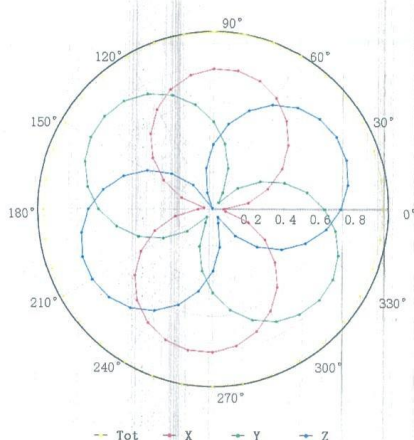

f=1800 MHz, R22

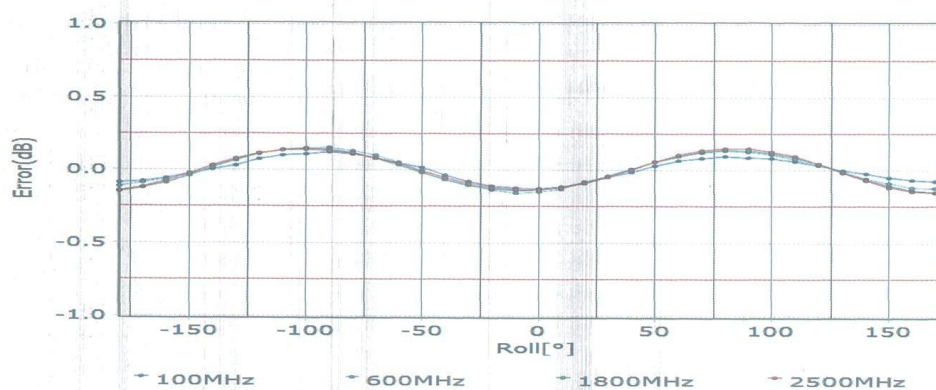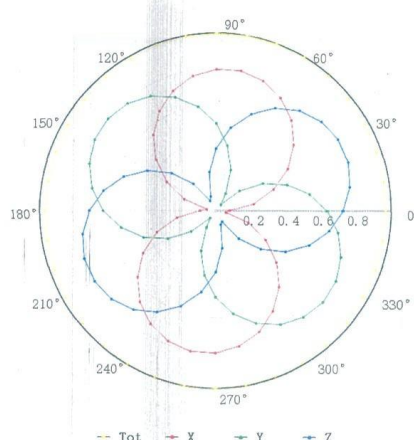


Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

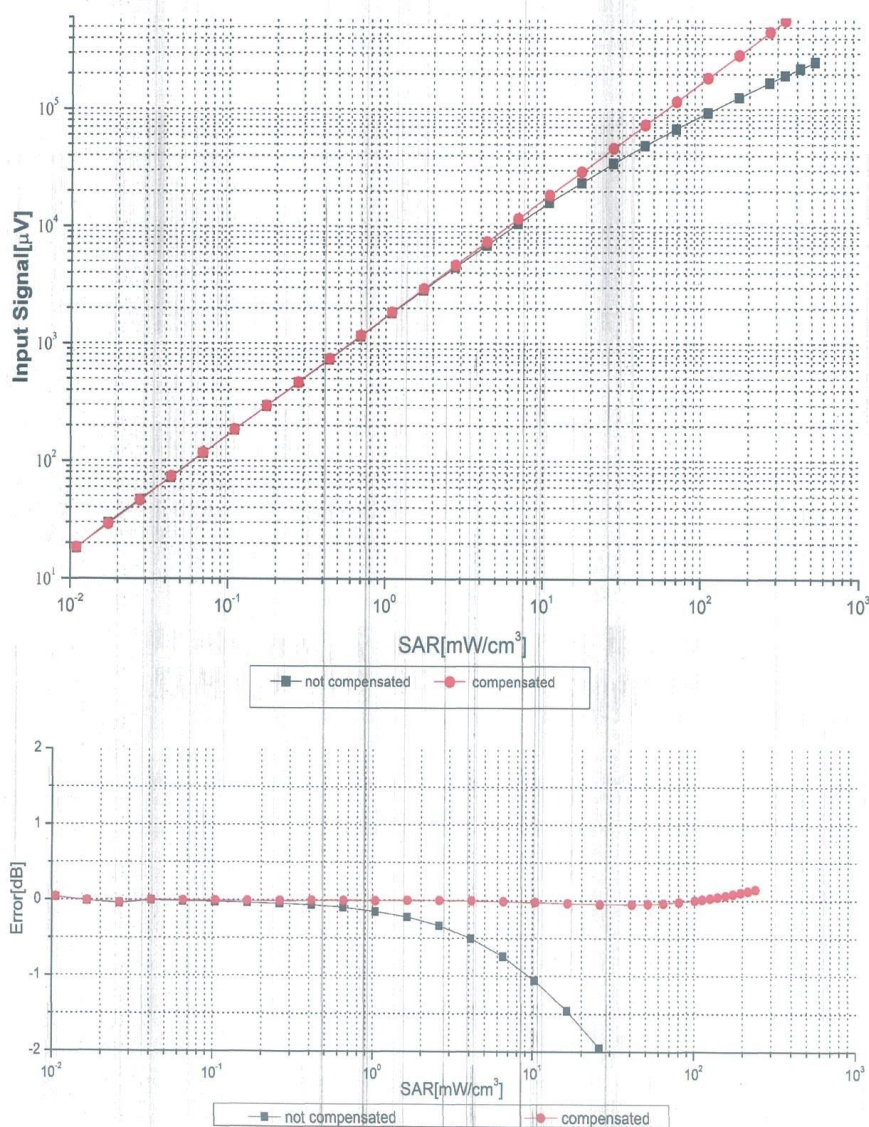

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)

Certificate No: Z22-60083

Page 7 of 9





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)




Conversion Factor Assessment

f=750 MHz,WGLS R9(H_convF)

f=1810 MHz,WGLS R22(H_convF)

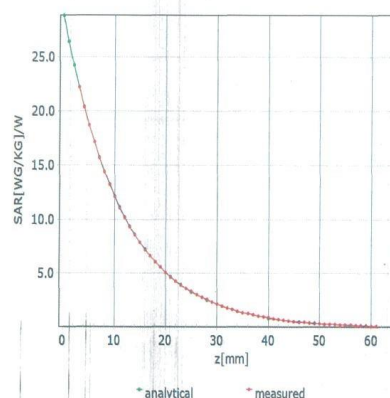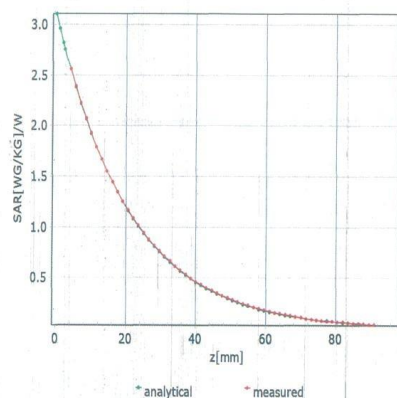


Deviation from Isotropy in Liquid

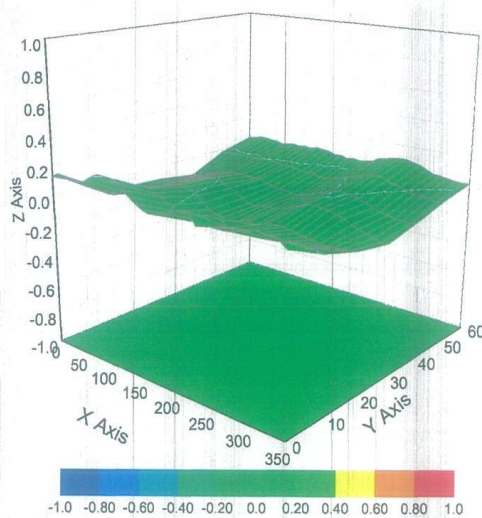

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)

Certificate No:Z22-60083

Page 8 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



DASY/EASY – Parameters of Probe: EX3DV4 – SN:3710

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	81.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

Appendix D. Dipole Calibration Data



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client **Dekra-CN**Certificate No: **Z22-60085**

CALIBRATION CERTIFICATE

Object **D900V2 - SN: 1d096**Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kitsCalibration date: **March 29, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21(SPEAG,No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG,No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: April 3, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60085

Page 1 of 6



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn



Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.