



Profile: 2250805R	Page No.: 62
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5210MHz by 11ac80	

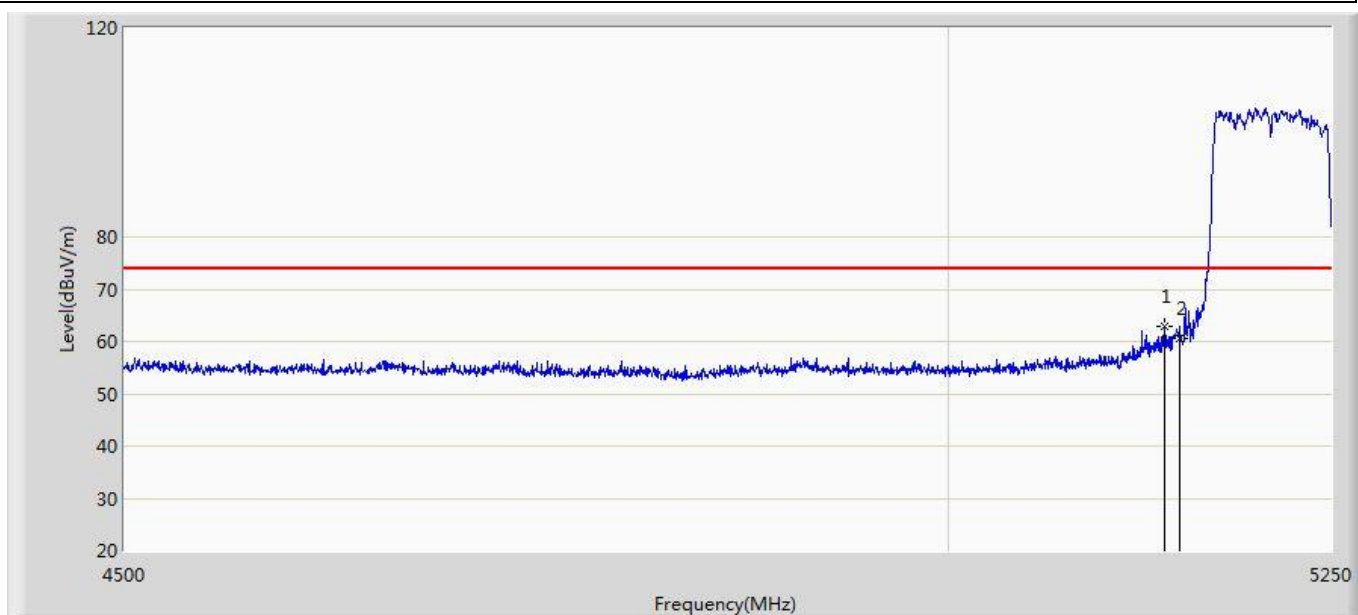


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5139.375	62.977	22.518	-11.023	74.000	40.459	PK
2		5150.000	60.644	20.183	-13.356	74.000	40.461	PK

Profile: 2250805R	Page No.: 63
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5210MHz by 11ac80	

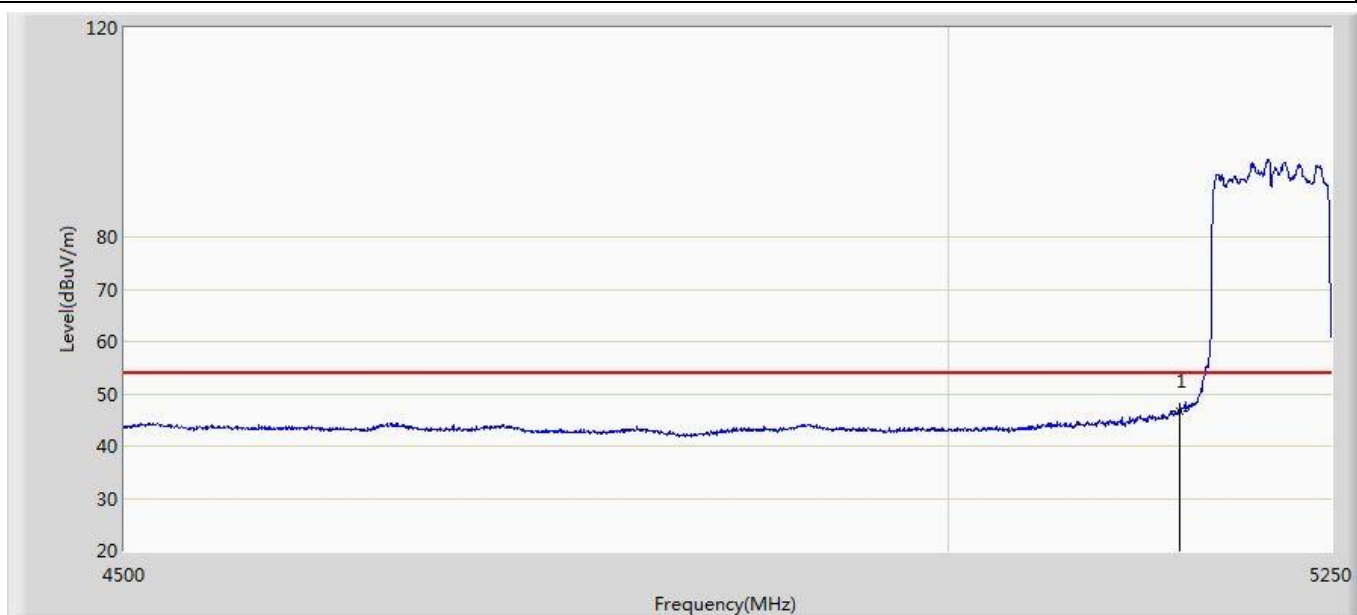

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	46.628	6.167	-7.372	54.000	40.461	AV

Profile: 2250805R	Page No.: 64
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5210MHz by 11ac80	

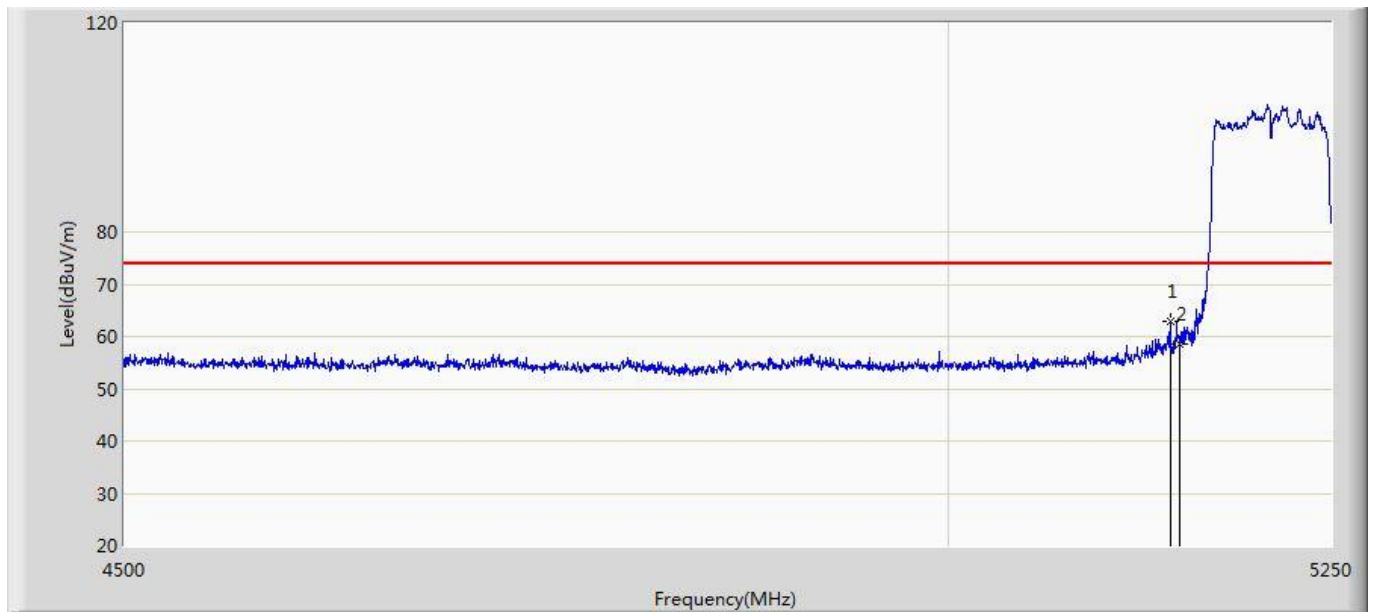


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5143.500	62.764	22.344	-11.236	74.000	40.420	PK
2		5150.000	58.452	17.991	-15.548	74.000	40.461	PK

Profile: 2250805R	Page No.: 65
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5290MHz by 11ac80	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.963	8.847	-4.037	54.000	41.116	AV

Profile: 2250805R	Page No.: 66
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5290MHz by 11ac80	

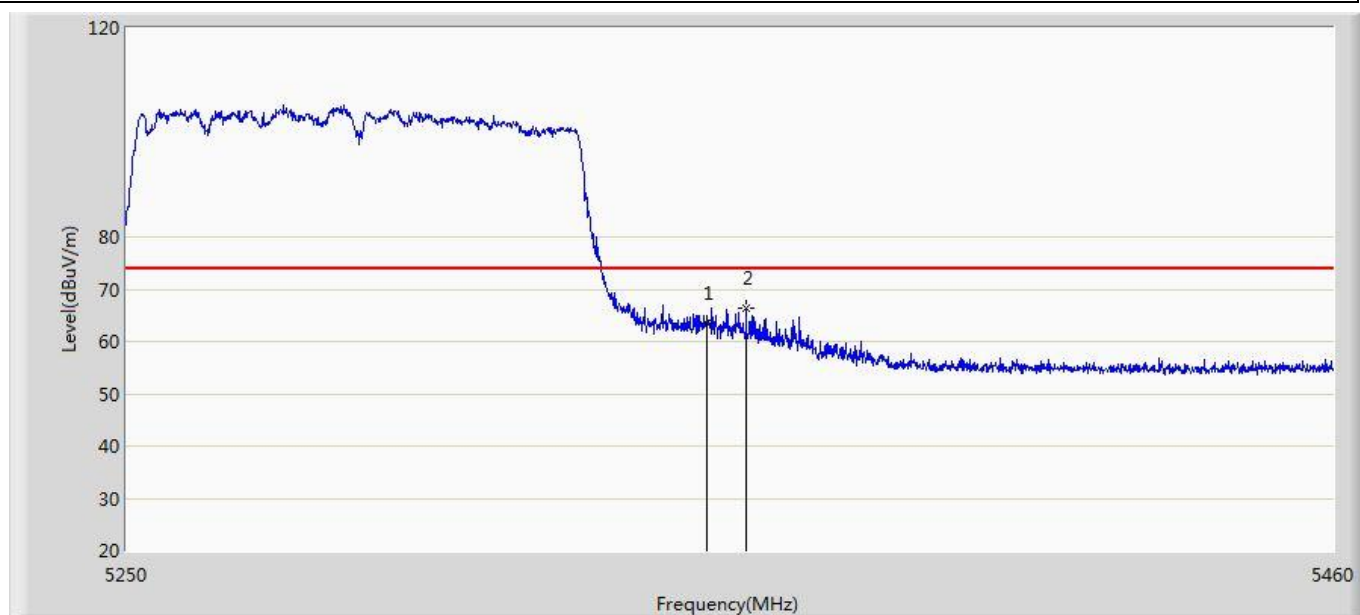


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	63.474	22.358	-10.526	74.000	41.116	PK
2	*	5356.890	66.414	25.362	-7.586	74.000	41.053	PK

Profile: 2250805R	Page No.: 67
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5290MHz by 11ac80	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	50.072	8.956	-3.928	54.000	41.116	AV
2	*	5354.475	50.974	9.869	-3.026	54.000	41.104	AV

Profile: 2250805R	Page No.: 68
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5290MHz by 11ac80	

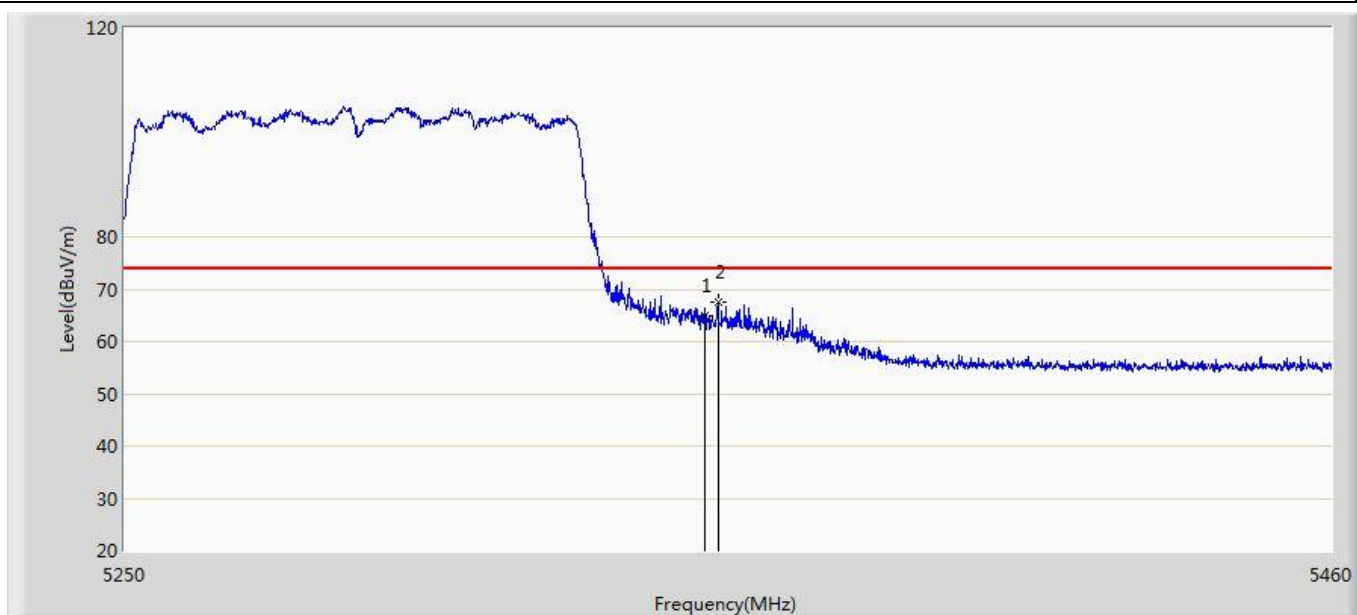


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	65.050	23.934	-8.950	74.000	41.116	PK
2	*	5352.270	67.465	26.313	-6.535	74.000	41.152	PK

Profile: 2250805R	Page No.: 69
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5530MHz by 11ac80	

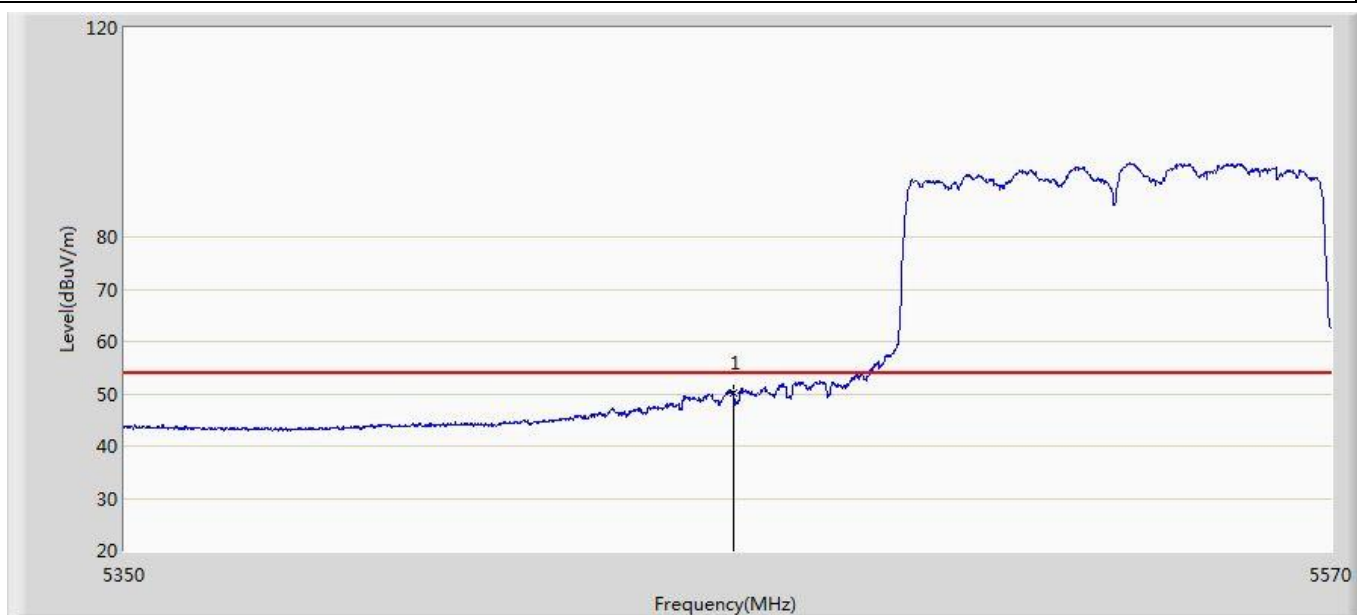


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	50.070	9.064	-3.930	54.000	41.006	AV

Profile: 2250805R	Page No.: 70
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5530MHz by 11ac80	

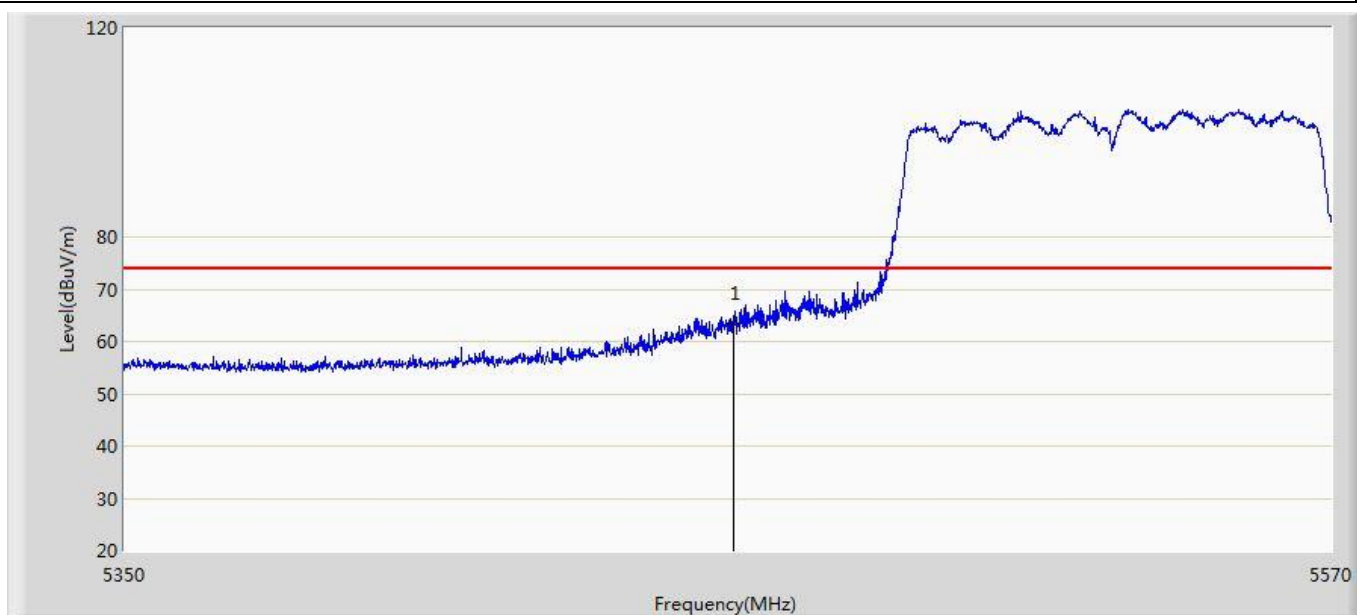


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	63.477	22.471	-10.523	74.000	41.006	PK

Profile: 2250805R	Page No.: 71
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5530MHz by 11ac80	

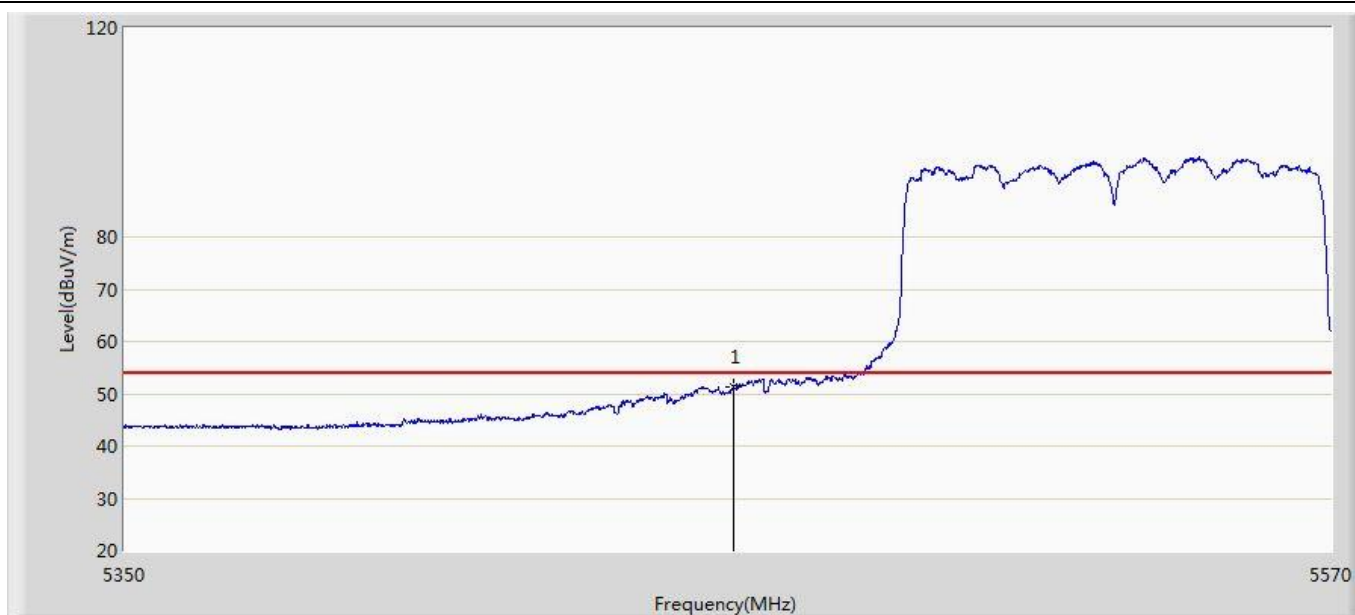


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.248	10.242	-2.752	54.000	41.006	AV

Profile: 2250805R	Page No.: 72
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 02:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5530MHz by 11ac80	

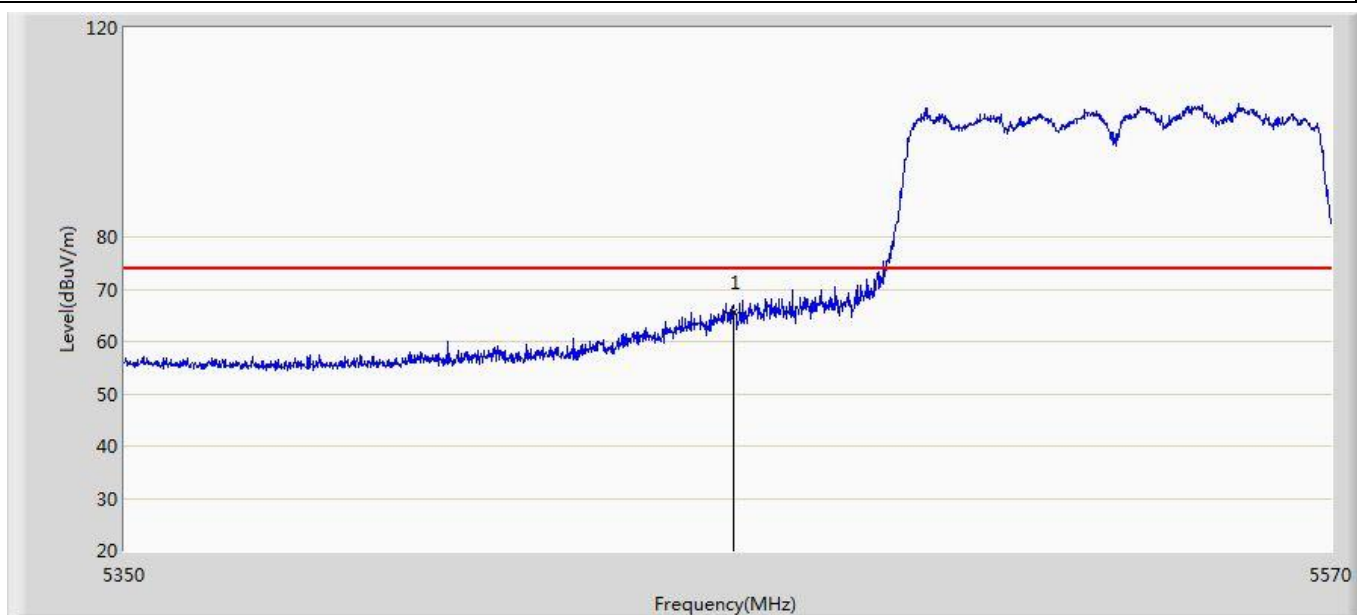


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	65.601	24.595	-8.399	74.000	41.006	PK

Profile: 2250805R	Page No.: 27
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:26
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5775MHz by 11ac80	

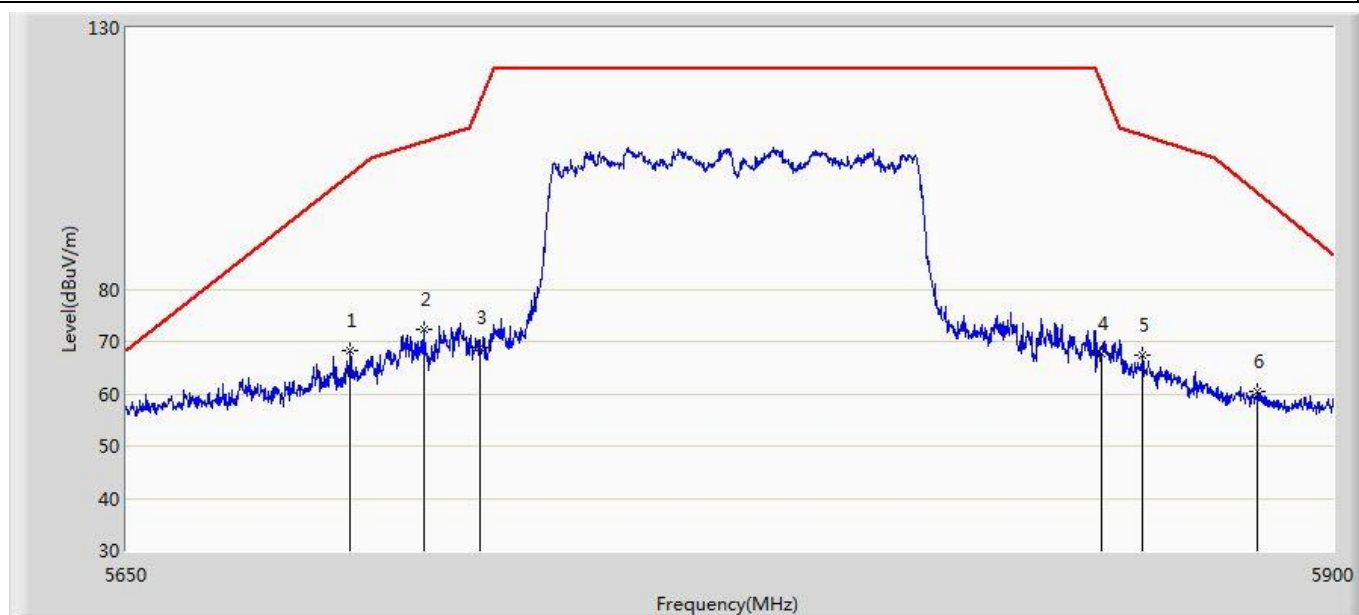


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5695.625	68.136	26.334	-33.840	101.975	41.802	PK
2		5710.750	72.295	29.882	-35.917	108.212	42.413	PK
3		5722.250	68.956	26.927	-46.976	115.931	42.029	PK
4		5851.250	67.555	25.559	-51.794	119.349	41.996	PK
5		5859.875	67.407	25.271	-42.026	109.433	42.136	PK
6		5884.125	60.502	18.204	-37.922	98.424	42.298	PK

Profile: 2250805R	Page No.: 28
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:27
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 5775MHz by 11ac80	

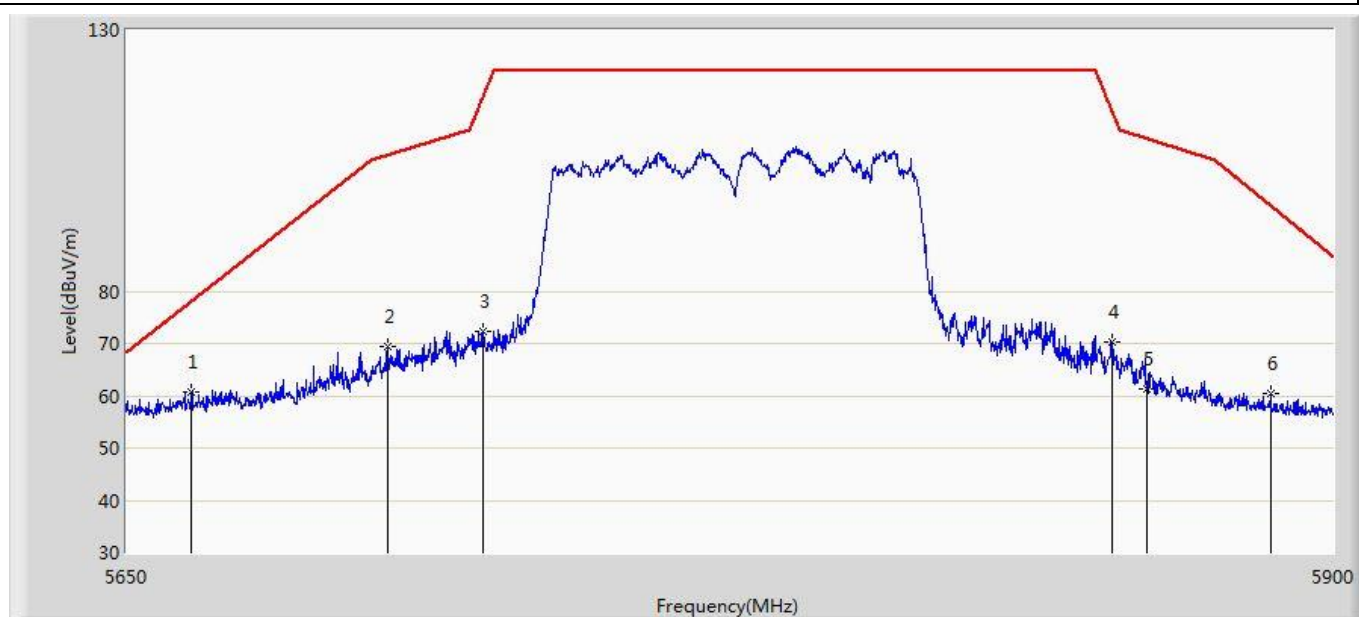


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5663.250	60.620	18.761	-17.417	78.037	41.859	PK
2		5703.375	69.383	27.193	-36.763	106.146	42.190	PK
3		5722.750	72.436	30.424	-44.635	117.071	42.012	PK
4		5853.375	70.237	28.207	-44.266	114.504	42.031	PK
5		5860.875	61.306	19.153	-47.847	109.153	42.152	PK
6		5886.750	60.298	17.979	-36.178	96.477	42.319	PK

Profile: 2250805R	Page No.: 73
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5180MHz by 11ax20	

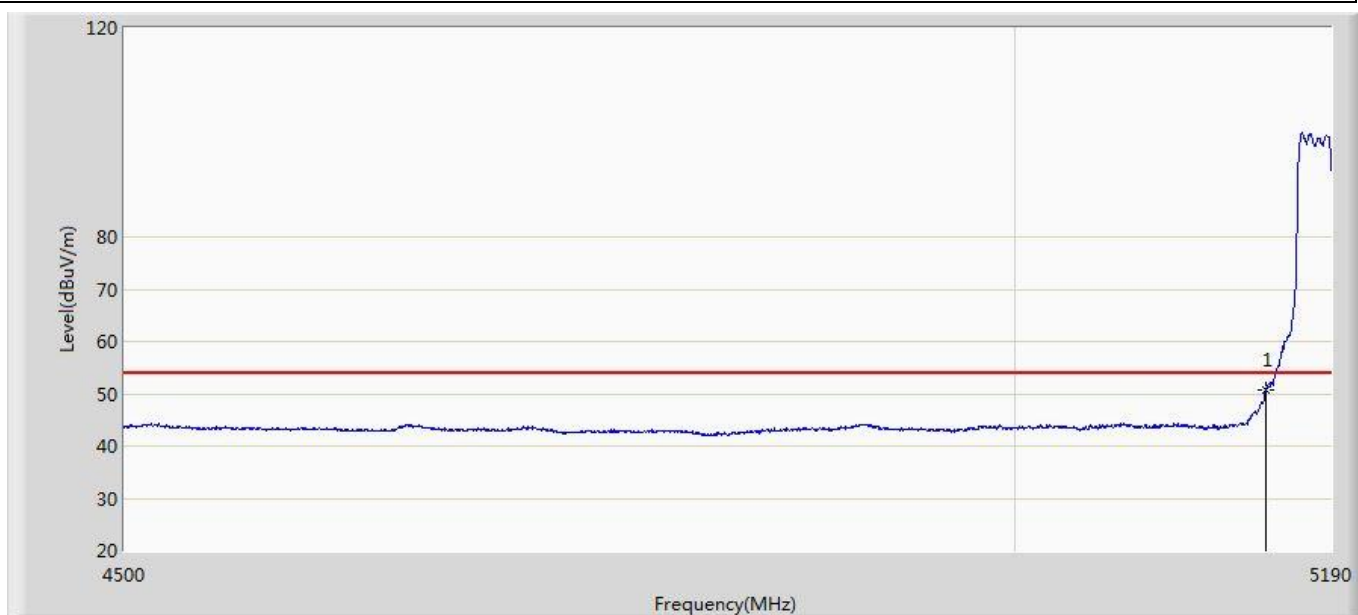


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	50.652	10.191	-3.348	54.000	40.461	AV

Profile: 2250805R	Page No.: 74
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5180MHz by 11ax20	

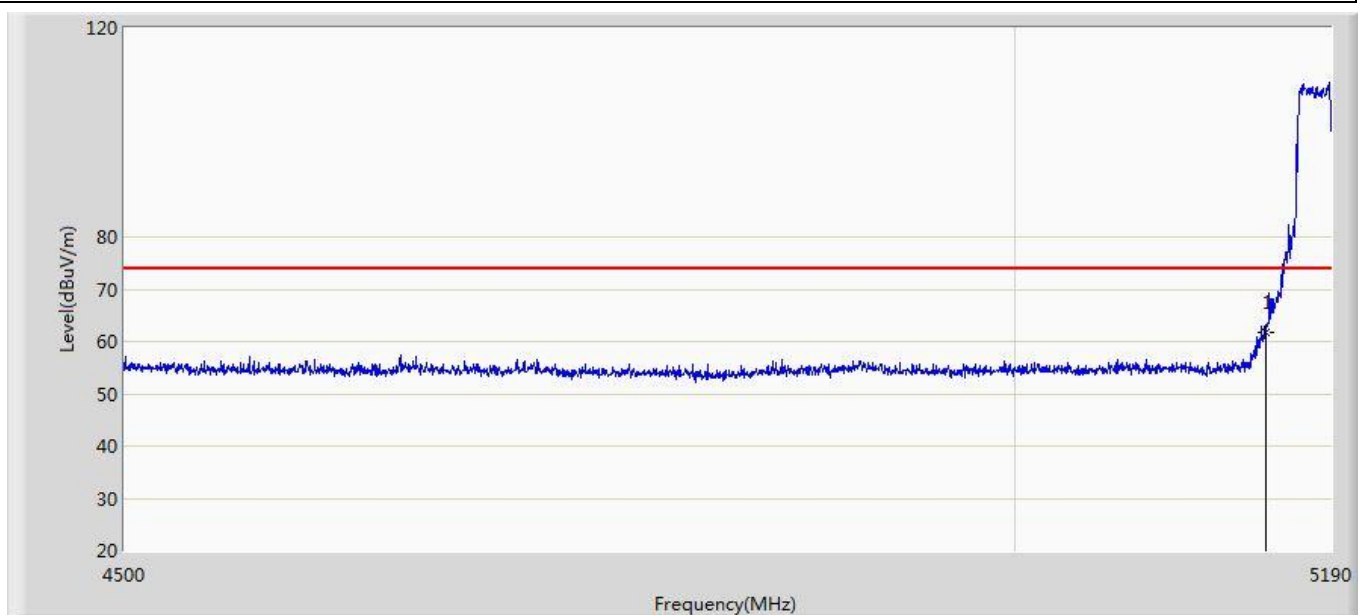


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	61.833	21.372	-12.167	74.000	40.461	PK

Profile: 2250805R	Page No.: 75
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5180MHz by 11ax20	

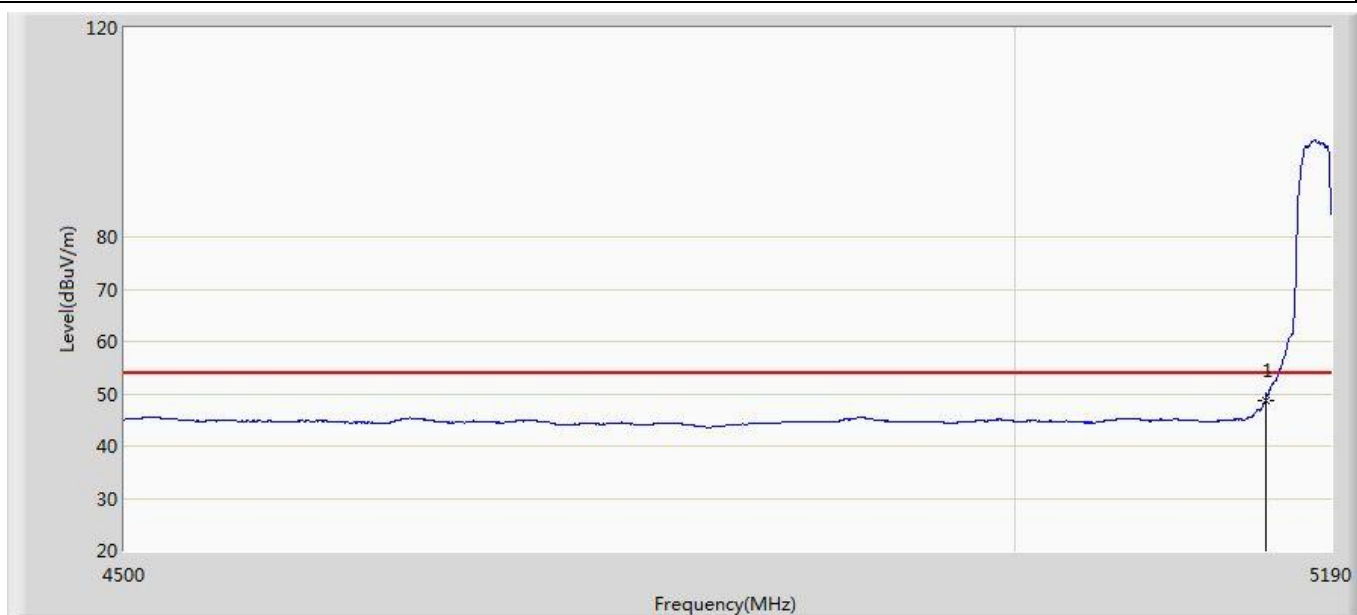


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.812	8.351	-5.188	54.000	40.461	AV

Profile: 2250805R	Page No.: 76
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5180MHz by 11ax20	

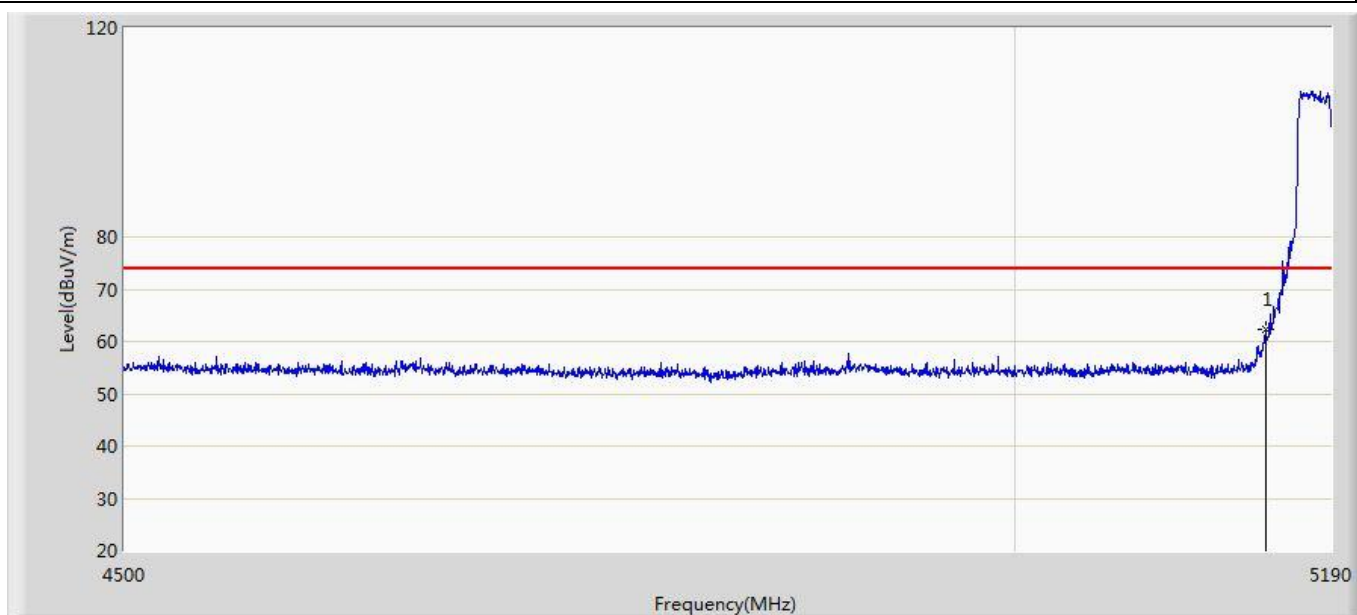


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	62.185	21.724	-11.815	74.000	40.461	PK

Profile: 2250805R	Page No.: 77
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ax20	

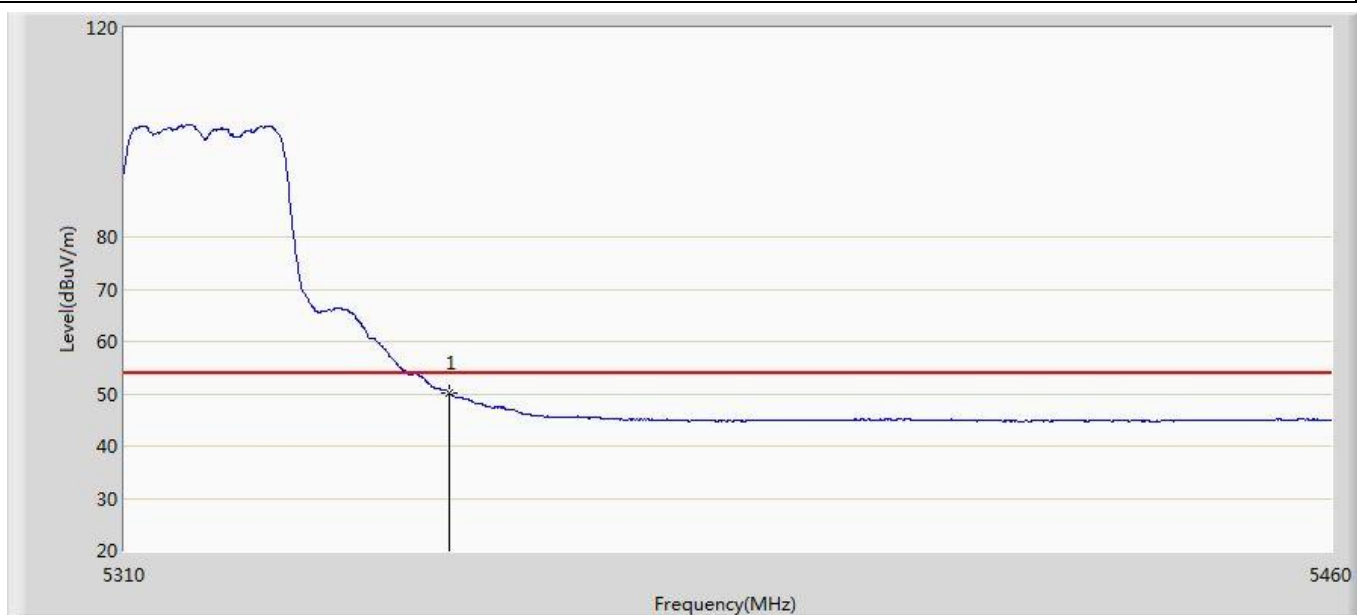


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	50.111	8.995	-3.889	54.000	41.116	AV

Profile: 2250805R	Page No.: 78
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ax20	

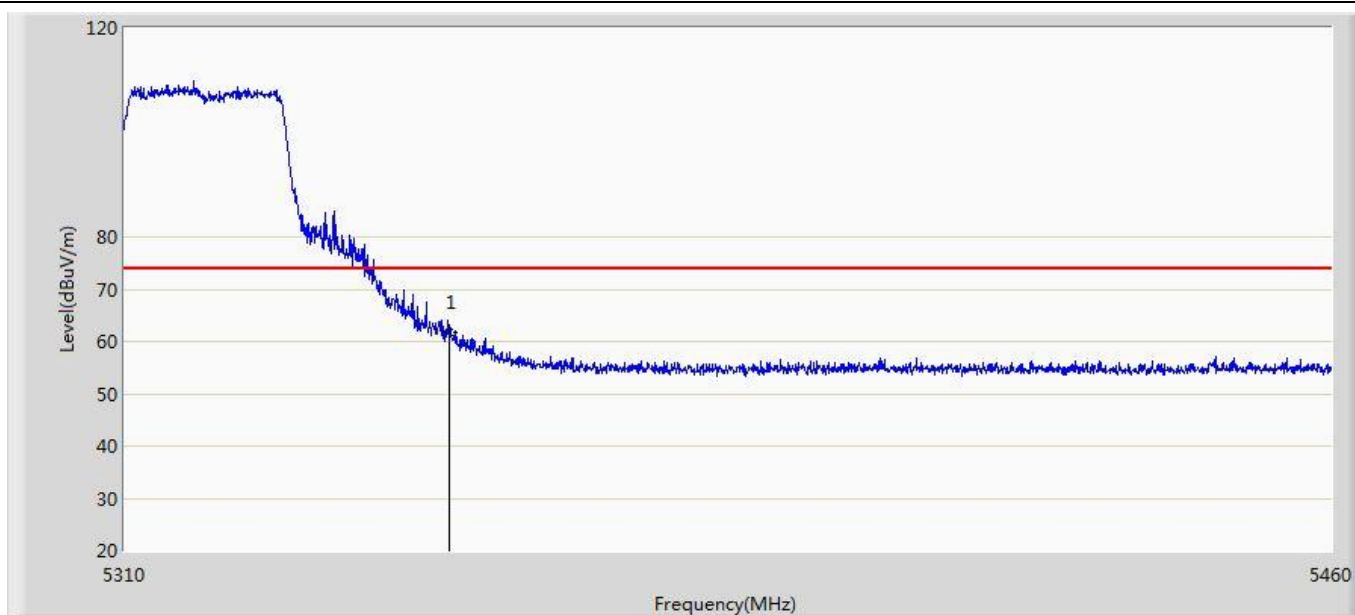


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	61.852	20.736	-12.148	74.000	41.116	PK

Profile: 2250805R	Page No.: 79
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ax20	

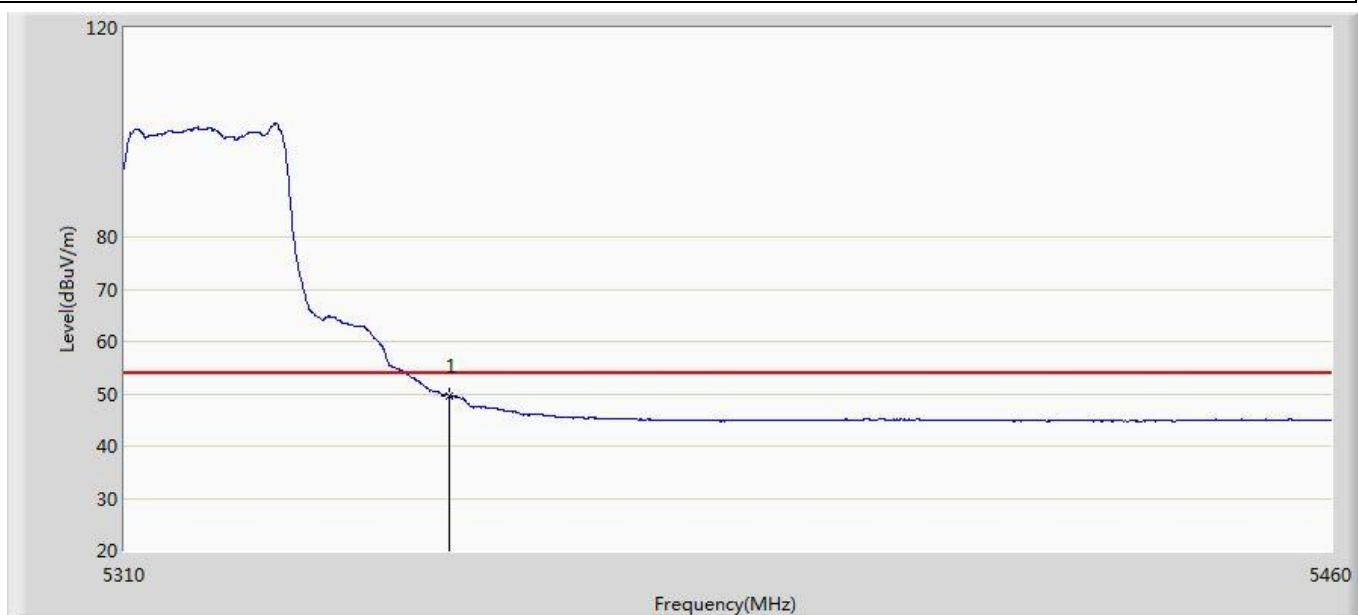


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.673	8.557	-4.327	54.000	41.116	AV

Profile: 2250805R	Page No.: 80
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5320MHz by 11ac20	

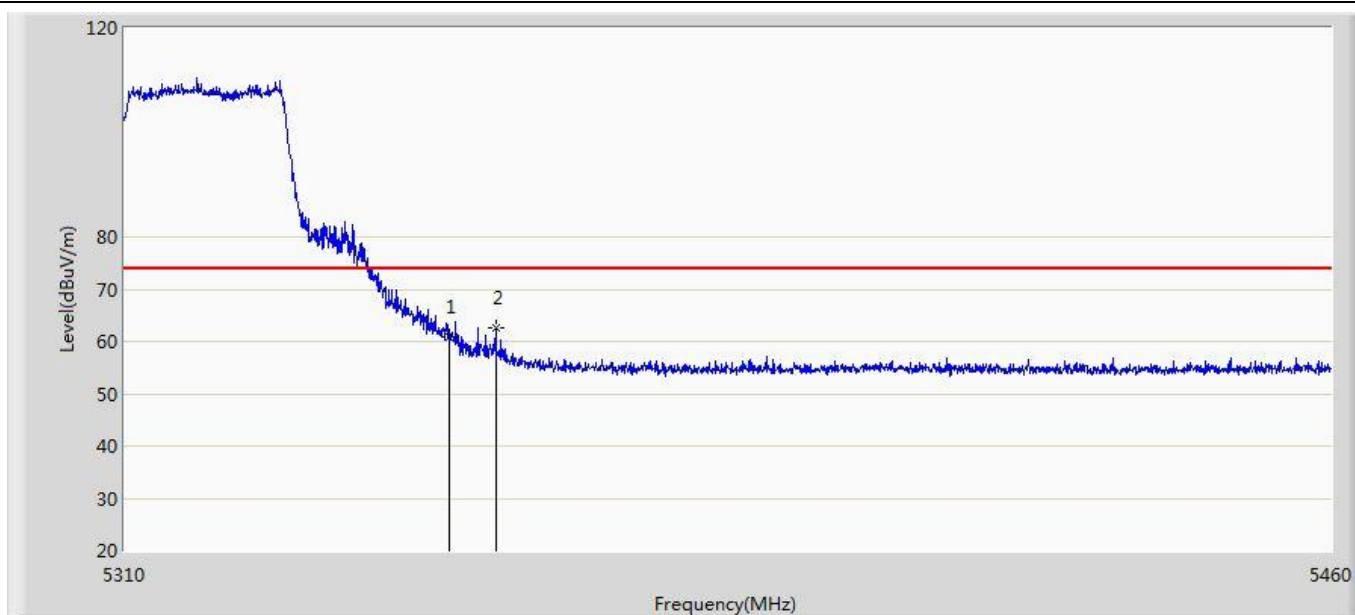


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	60.902	19.786	-13.098	74.000	41.116	PK
2	*	5355.750	62.464	21.387	-11.536	74.000	41.077	PK

Profile: 2250805R	Page No.: 81
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

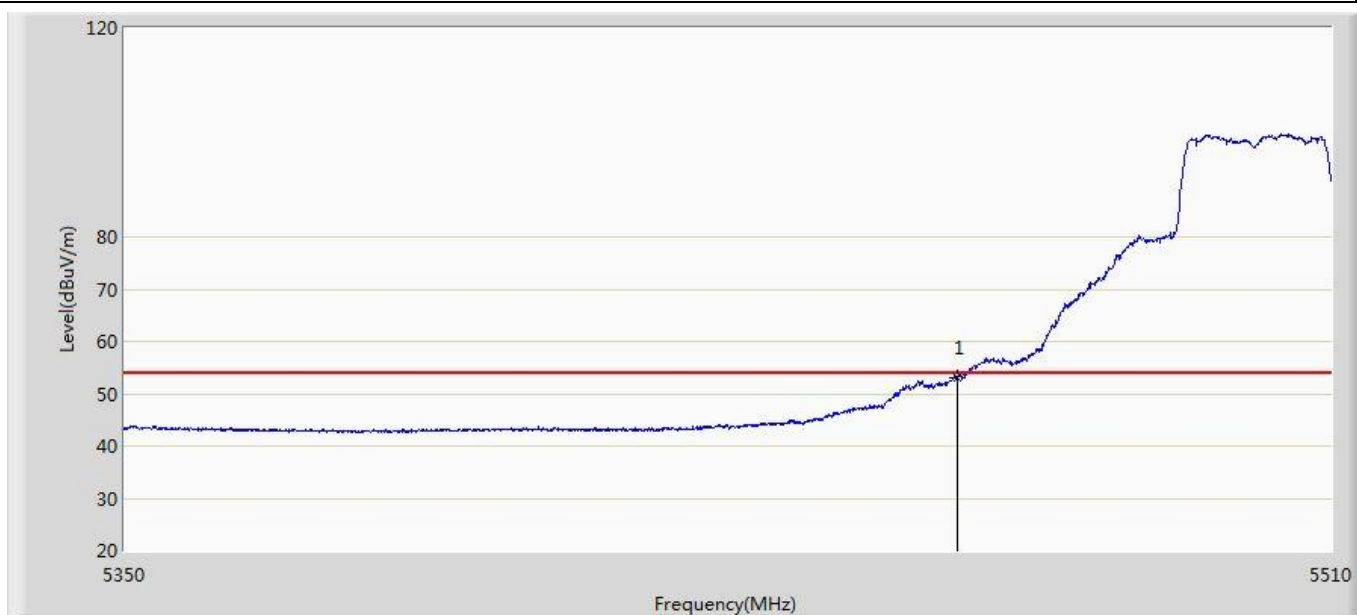


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	52.963	11.957	-1.037	54.000	41.006	AV

Profile: 2250805R	Page No.: 82
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

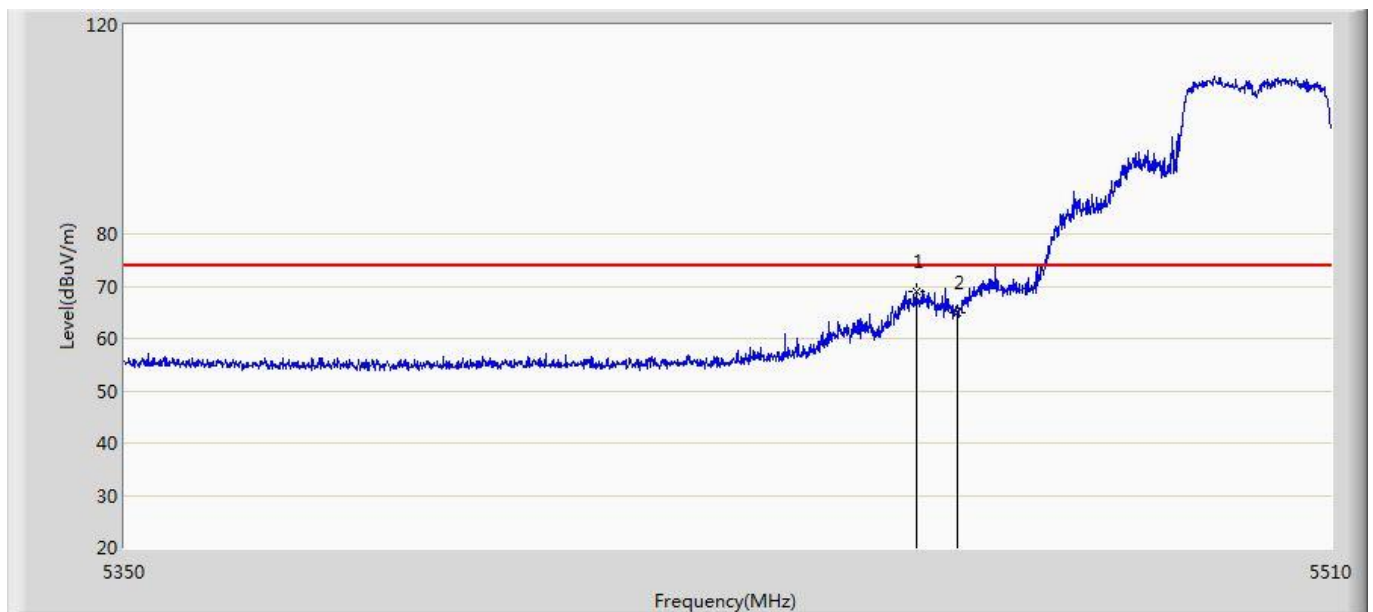


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5454.480	69.012	28.023	-4.988	74.000	40.989	PK
2		5460.000	64.909	23.903	-9.091	74.000	41.006	PK

Profile: 2250805R	Page No.: 83
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

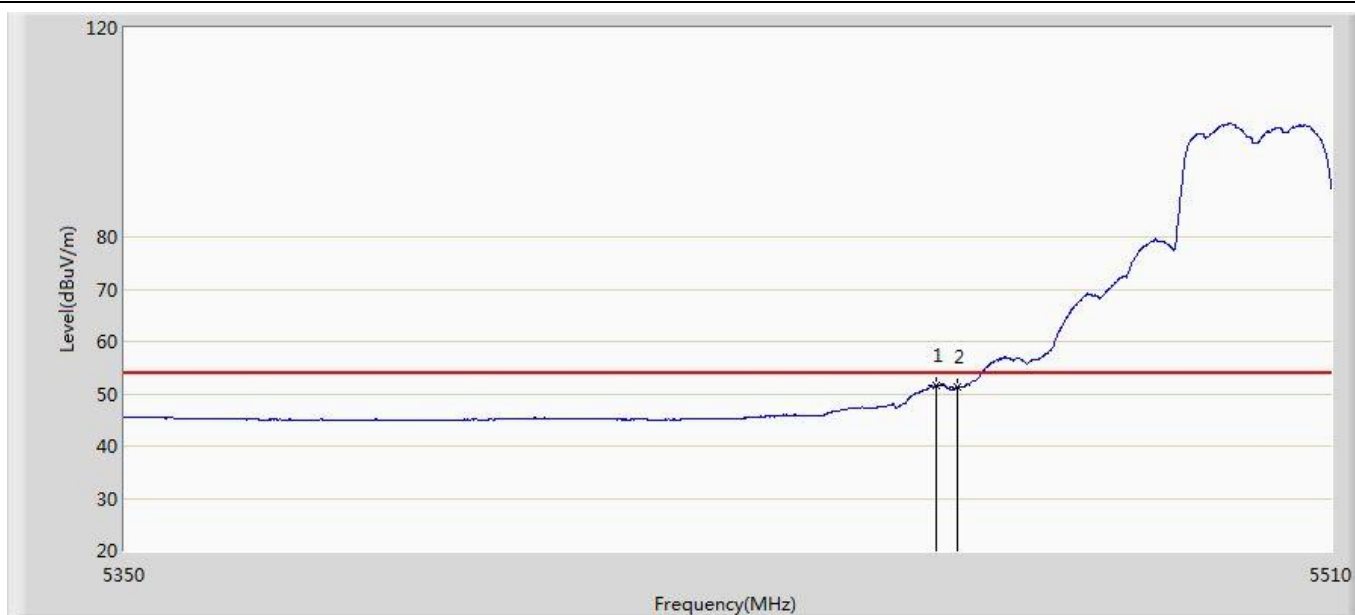


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.200	51.525	10.528	-2.475	54.000	40.997	AV
2		5460.000	51.363	10.357	-2.637	54.000	41.006	AV

Profile: 2250805R	Page No.: 84
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 01:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5500MHz by 11ax20	

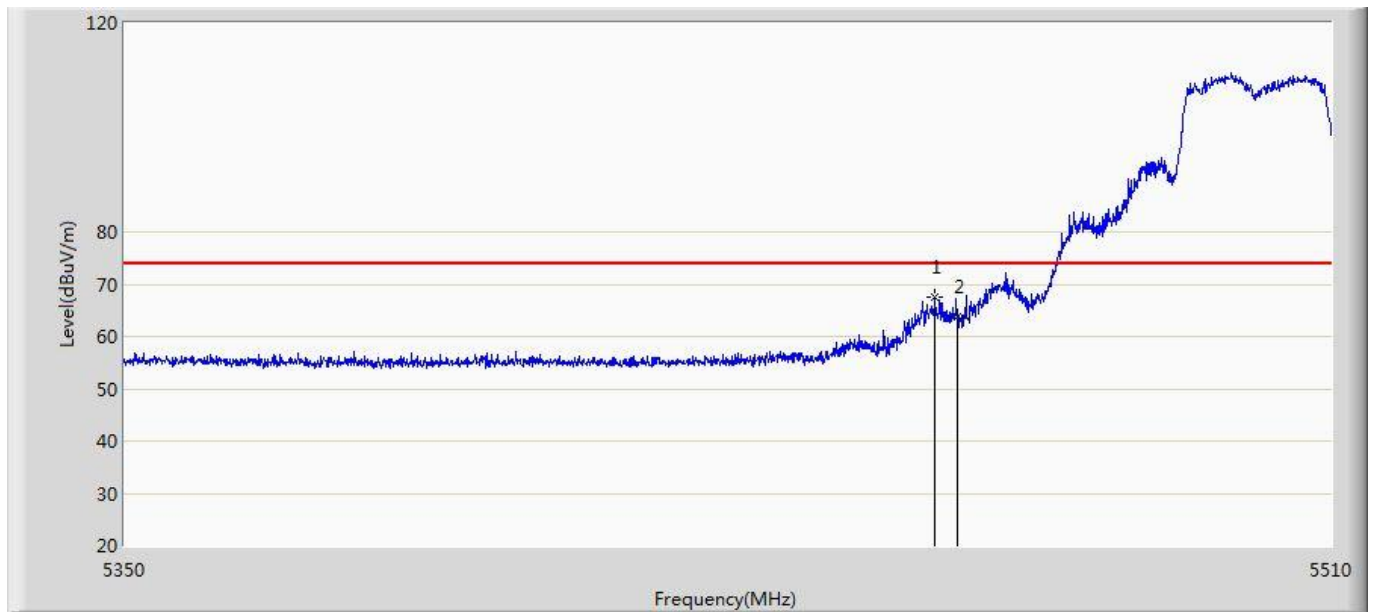


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.040	67.594	26.597	-6.406	74.000	40.997	PK
2		5460.000	63.906	22.900	-10.094	74.000	41.006	PK

Profile: 2250805R	Page No.: 29
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:15
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5745MHz by 11ax20	

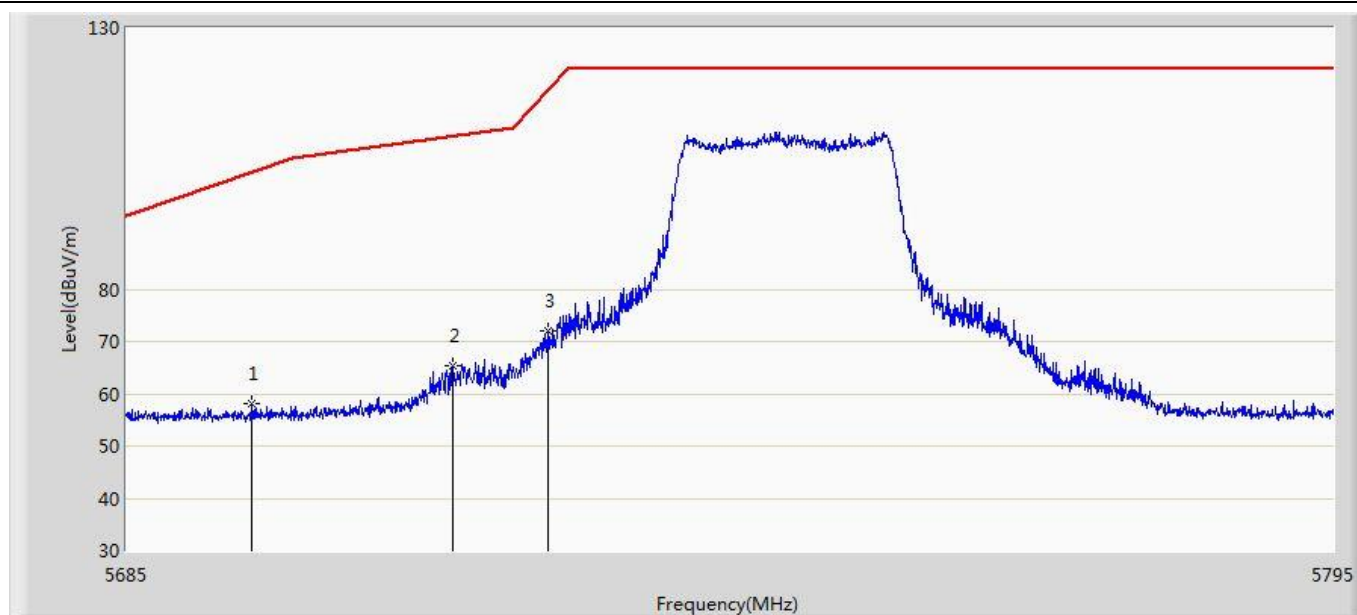


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.275	58.219	16.385	-44.235	102.455	41.834	PK
2	*	5714.590	65.264	22.979	-44.023	109.287	42.285	PK
3		5723.280	72.040	30.046	-46.239	118.280	41.994	PK

Profile: 2250805R	Page No.: 30
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:16
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5745MHz by 11ax20	

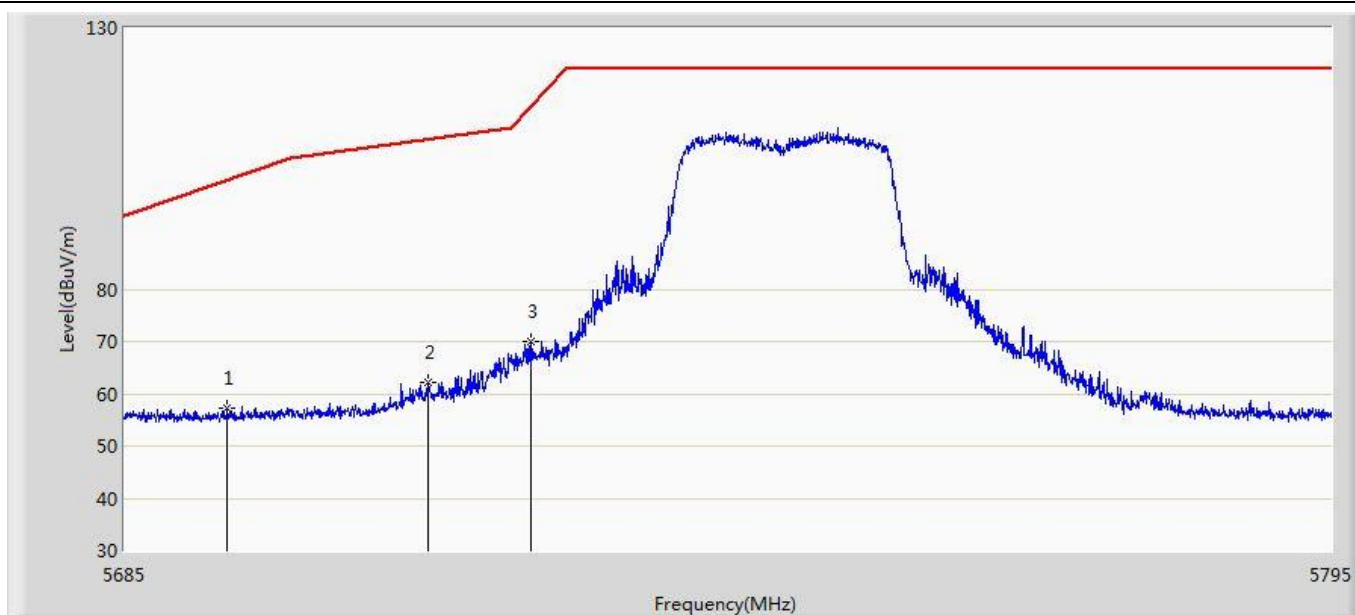


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.350	57.350	15.612	-43.686	101.035	41.737	PK
2		5712.555	62.250	19.897	-46.468	108.718	42.353	PK
3		5721.905	70.082	28.042	-45.063	115.145	42.040	PK

Profile: 2250805R	Page No.: 31
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:18
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5785MHz by 11ax20	

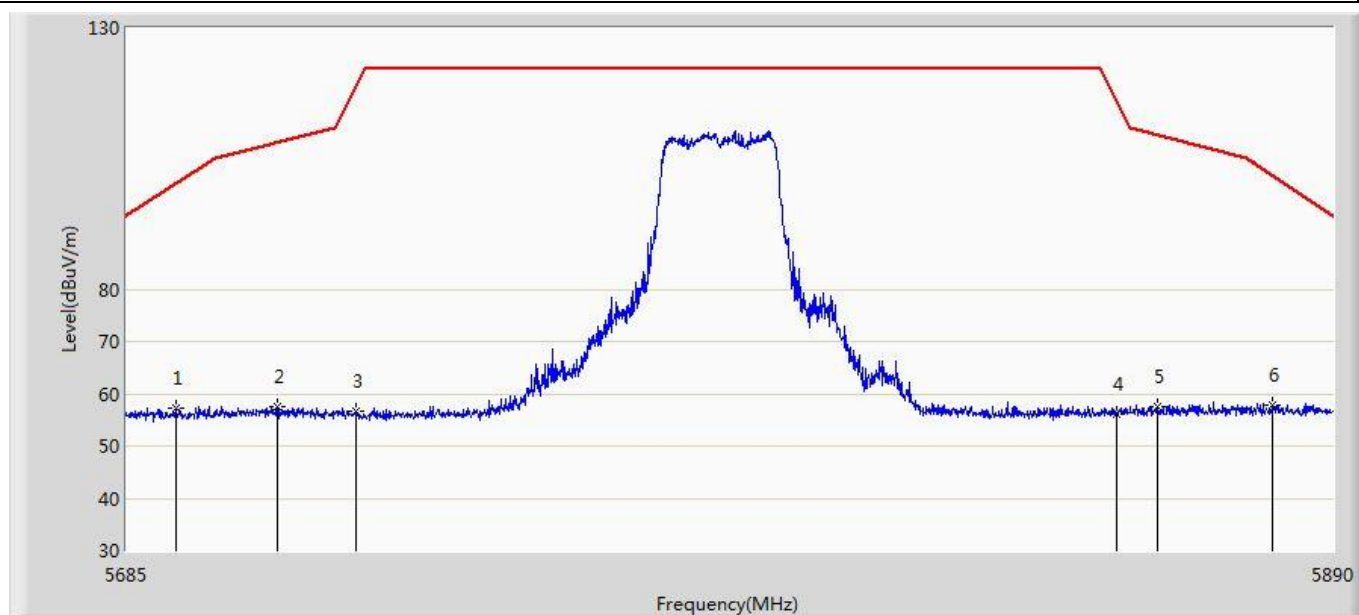


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.303	57.360	15.675	-42.903	100.263	41.685	PK
2		5710.215	57.476	15.045	-50.586	108.063	42.432	PK
3		5723.437	56.697	14.708	-61.941	118.637	41.989	PK
4		5852.792	55.971	13.950	-59.862	115.833	42.021	PK
5		5859.763	57.676	15.541	-51.789	109.465	42.135	PK
6		5879.647	57.887	15.625	-43.861	101.748	42.262	PK

Profile: 2250805R	Page No.: 32
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:19
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5785MHz by 11ax20	

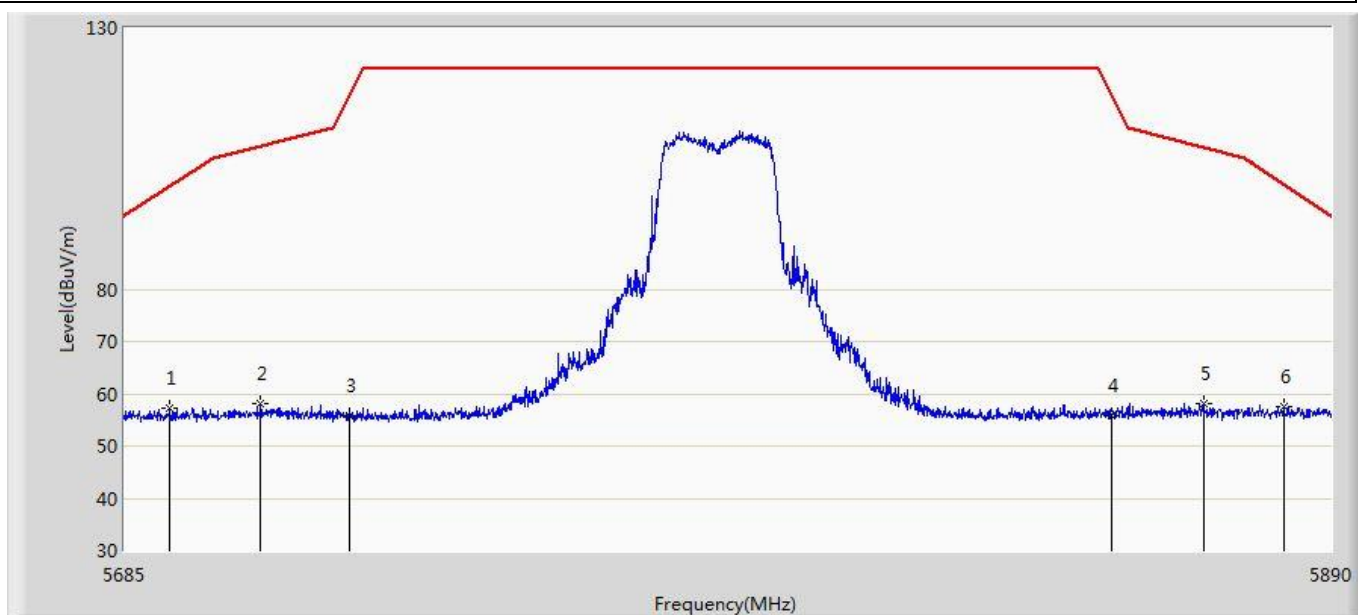


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.687	57.387	15.733	-42.421	99.809	41.654	PK
2		5707.857	58.104	15.689	-49.299	107.402	42.414	PK
3		5722.822	55.772	13.763	-61.463	117.235	42.010	PK
4		5852.178	55.859	13.848	-61.374	117.233	42.011	PK
5		5867.962	58.251	16.050	-48.917	107.168	42.201	PK
6		5881.902	57.591	15.311	-42.482	100.074	42.280	PK

Profile: 2250805R	Page No.: 33
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:20
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5825MHz by 11ax20	

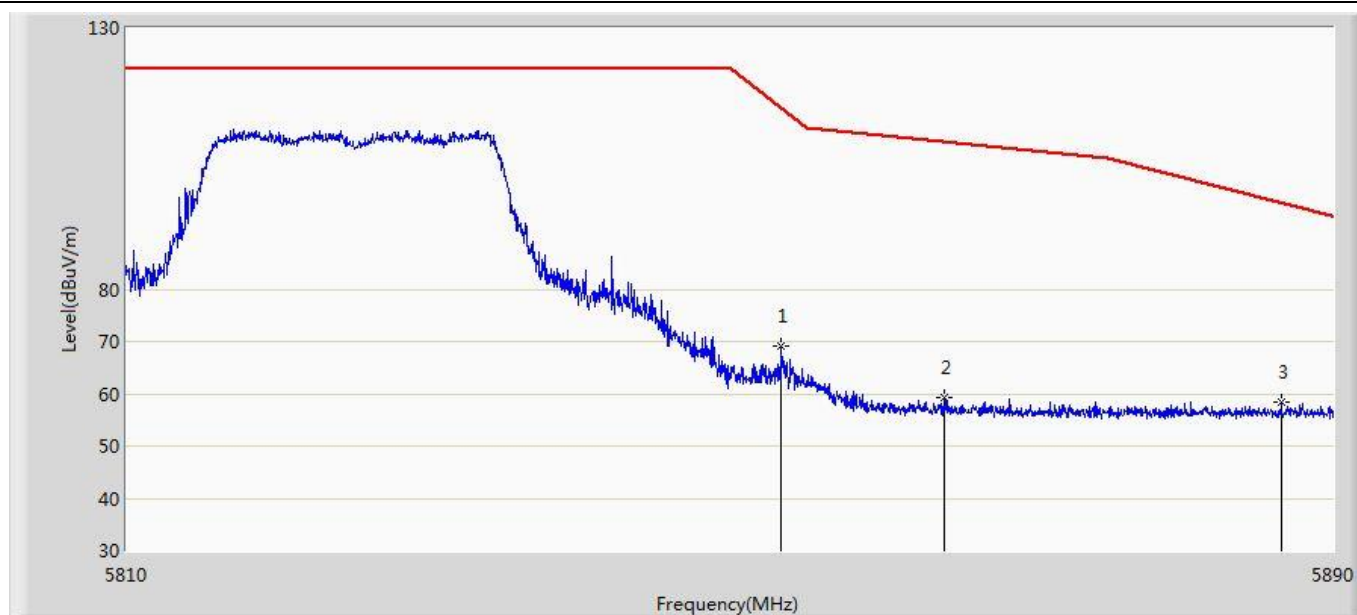


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5853.320	69.172	27.142	-45.458	114.629	42.030	PK
2		5864.160	59.226	17.044	-49.007	108.233	42.182	PK
3	*	5886.560	58.334	16.016	-38.284	96.618	42.318	PK

Profile: 2250805R	Page No.: 34
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:21
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 7:Transmit at 5825MHz by 11ax20	

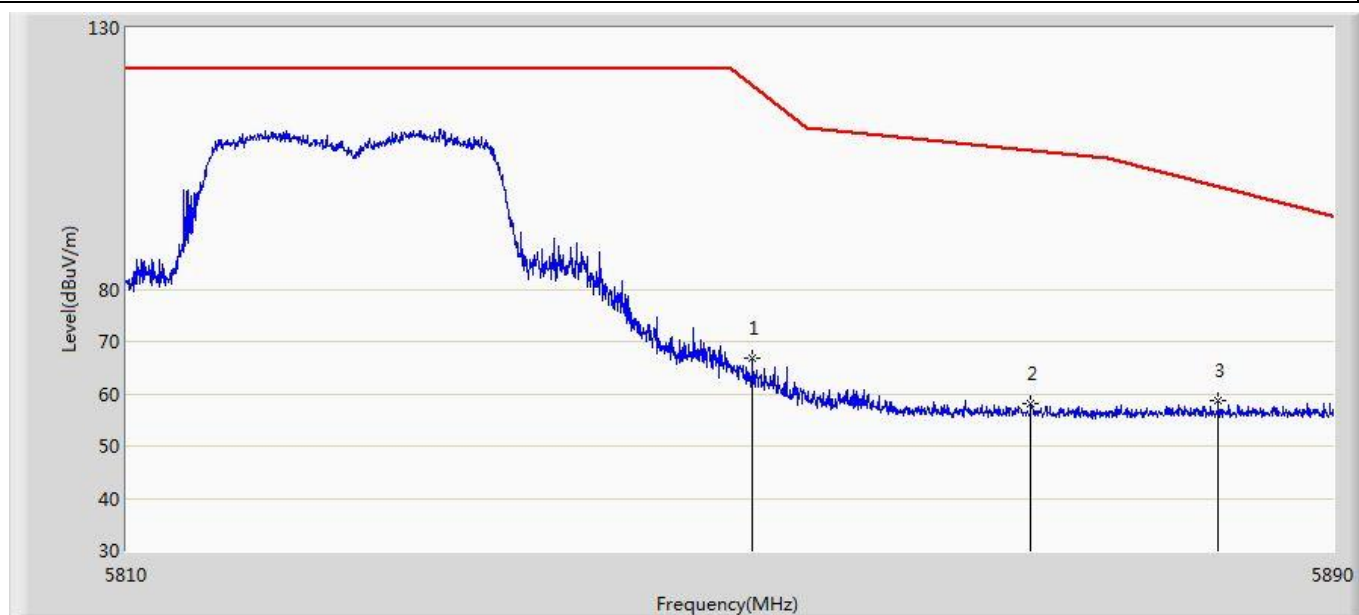


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5851.400	66.828	24.830	-52.179	119.007	41.998	PK
2		5869.880	58.197	15.986	-48.435	106.632	42.211	PK
3	*	5882.360	58.634	16.350	-41.100	99.734	42.285	PK

Profile: 2250805R	Page No.: 85
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

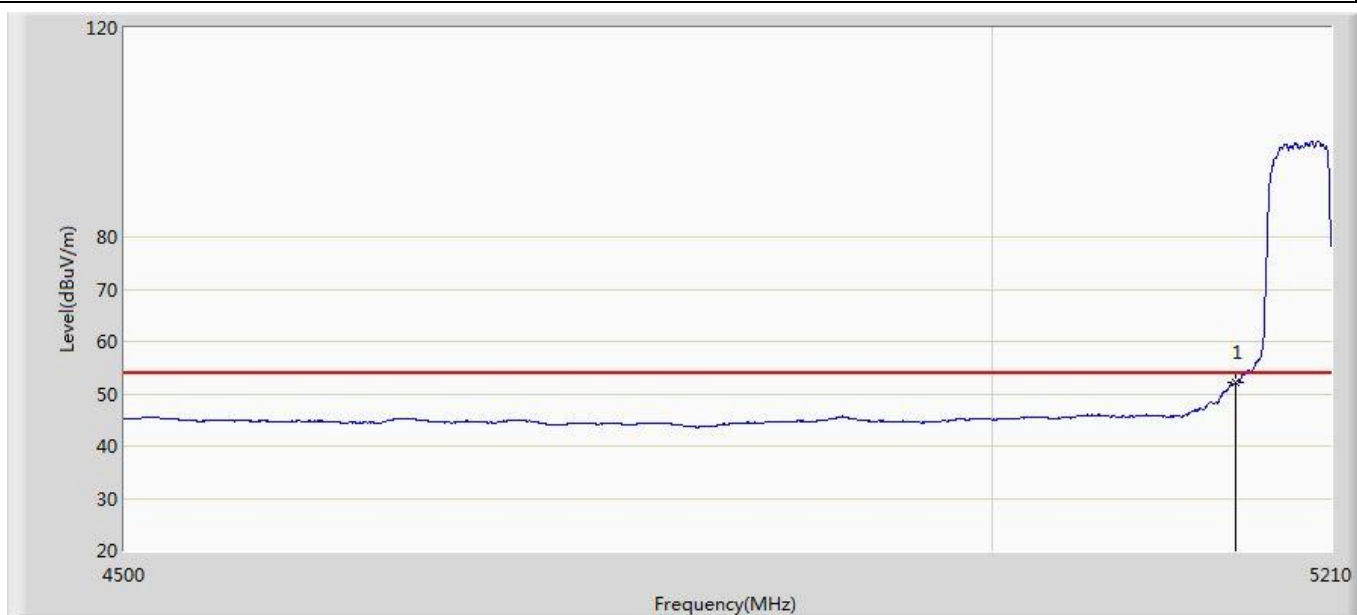


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	52.224	11.763	-1.776	54.000	40.461	AV

Profile: 2250805R	Page No.: 86
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

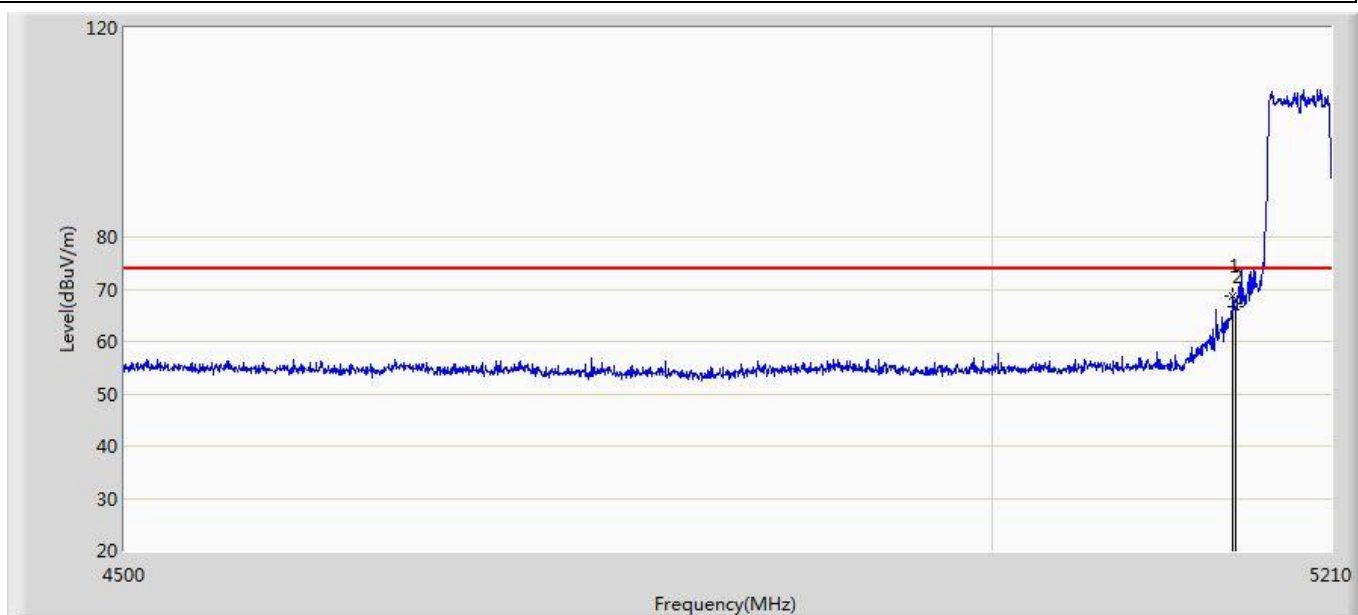


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5148.585	68.597	28.195	-5.403	74.000	40.402	PK
2		5150.000	66.567	26.106	-7.433	74.000	40.461	PK

Profile: 2250805R	Page No.: 87
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

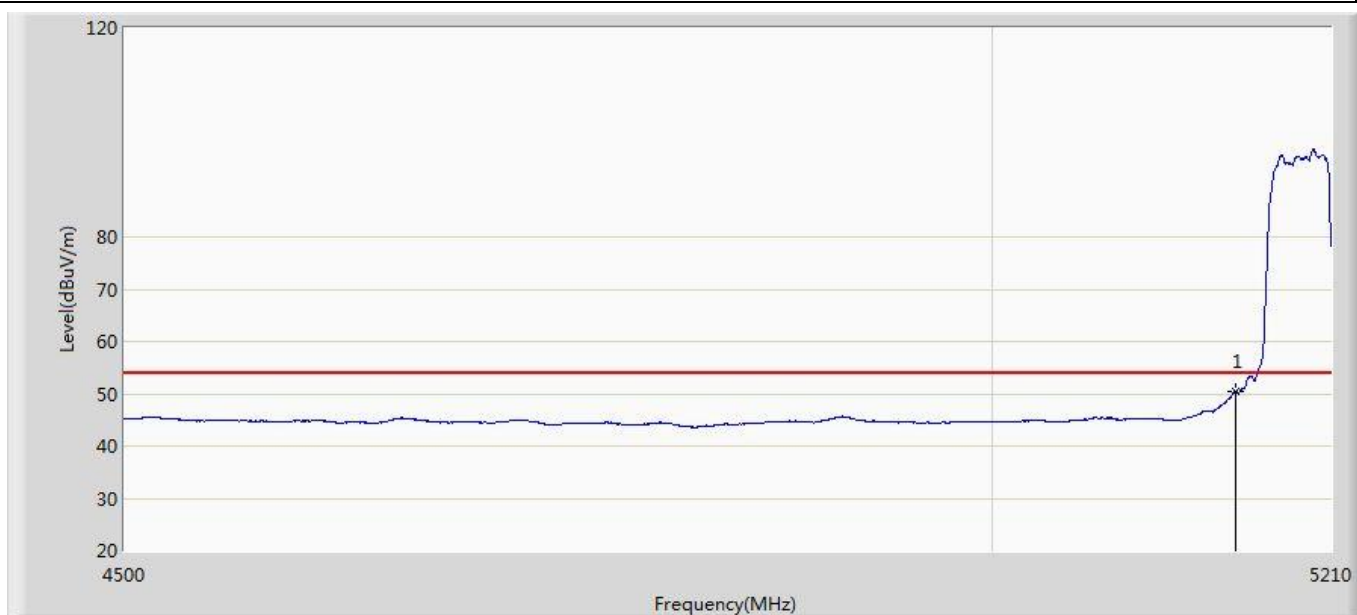


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	50.528	10.067	-3.472	54.000	40.461	AV

Profile: 2250805R	Page No.: 88
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5190MHz by 11ax40	

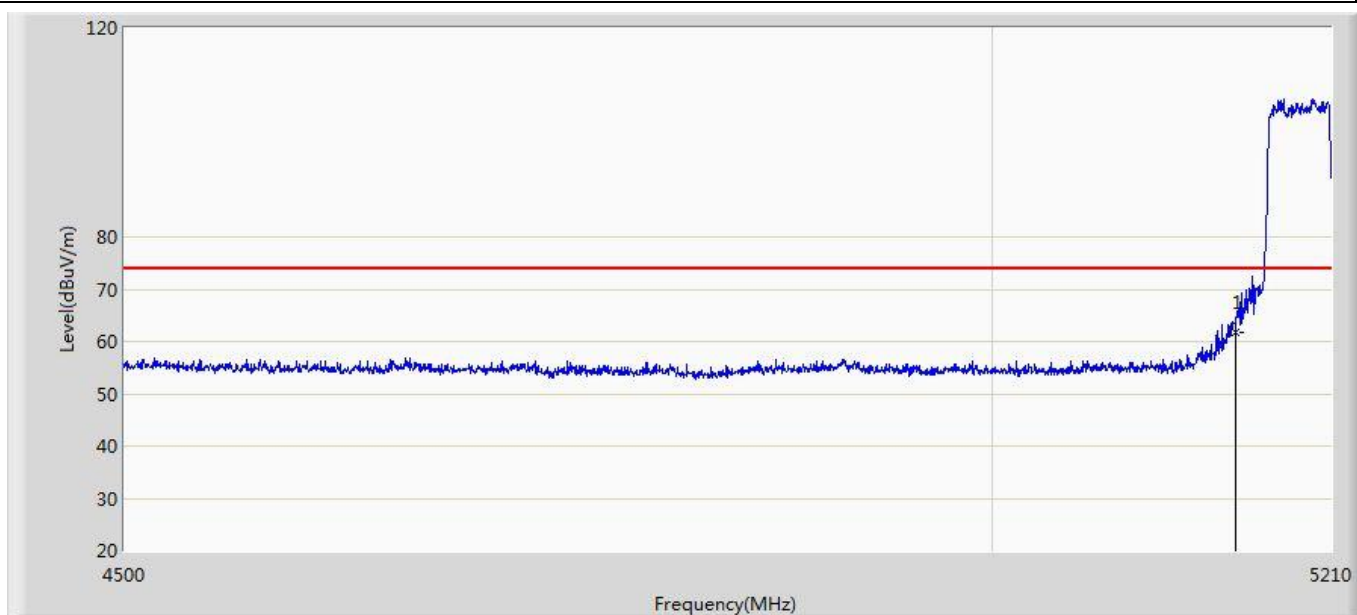


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	61.653	21.192	-12.347	74.000	40.461	PK

Profile: 2250805R	Page No.: 89
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

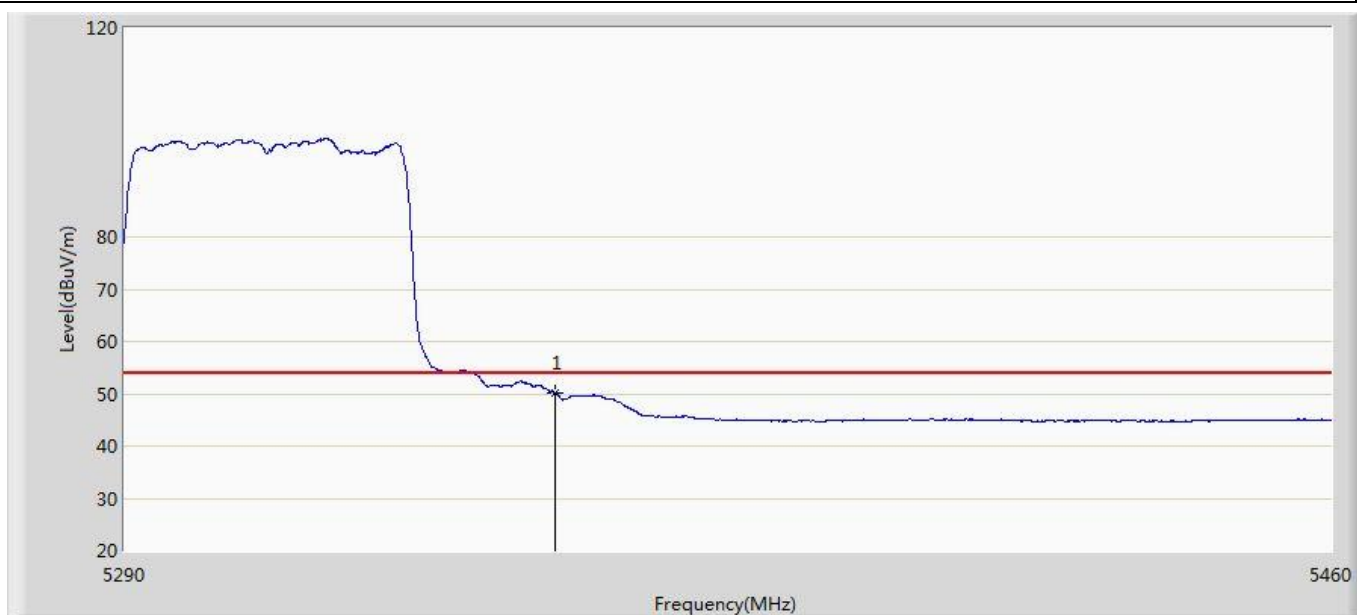


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	50.186	9.070	-3.814	54.000	41.116	AV

Profile: 2250805R	Page No.: 90
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

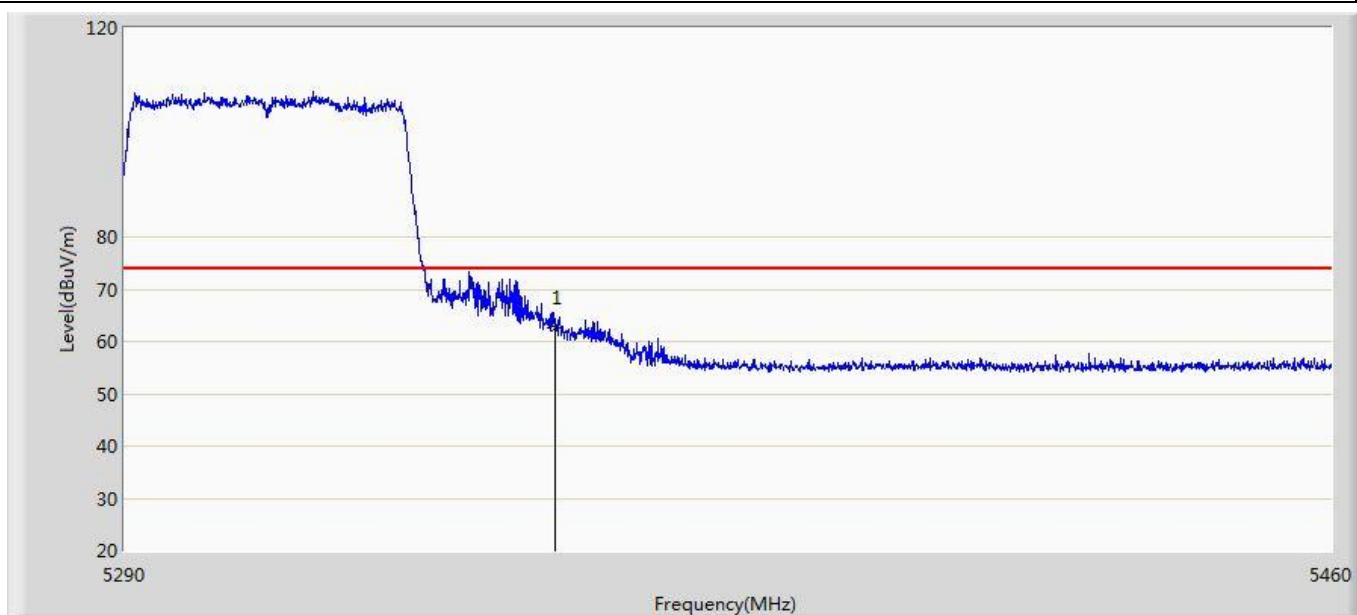


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	62.694	21.578	-11.306	74.000	41.116	PK

Profile: 2250805R	Page No.: 91
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

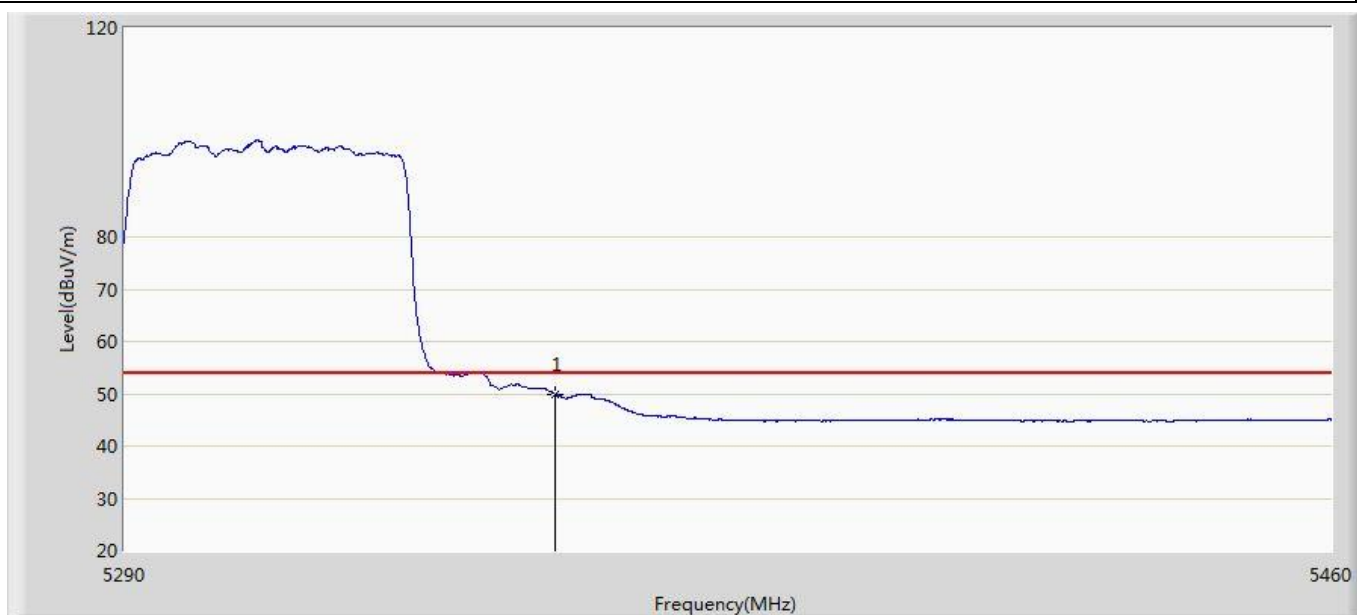


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.926	8.810	-4.074	54.000	41.116	AV

Profile: 2250805R	Page No.: 92
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5310MHz by 11ax40	

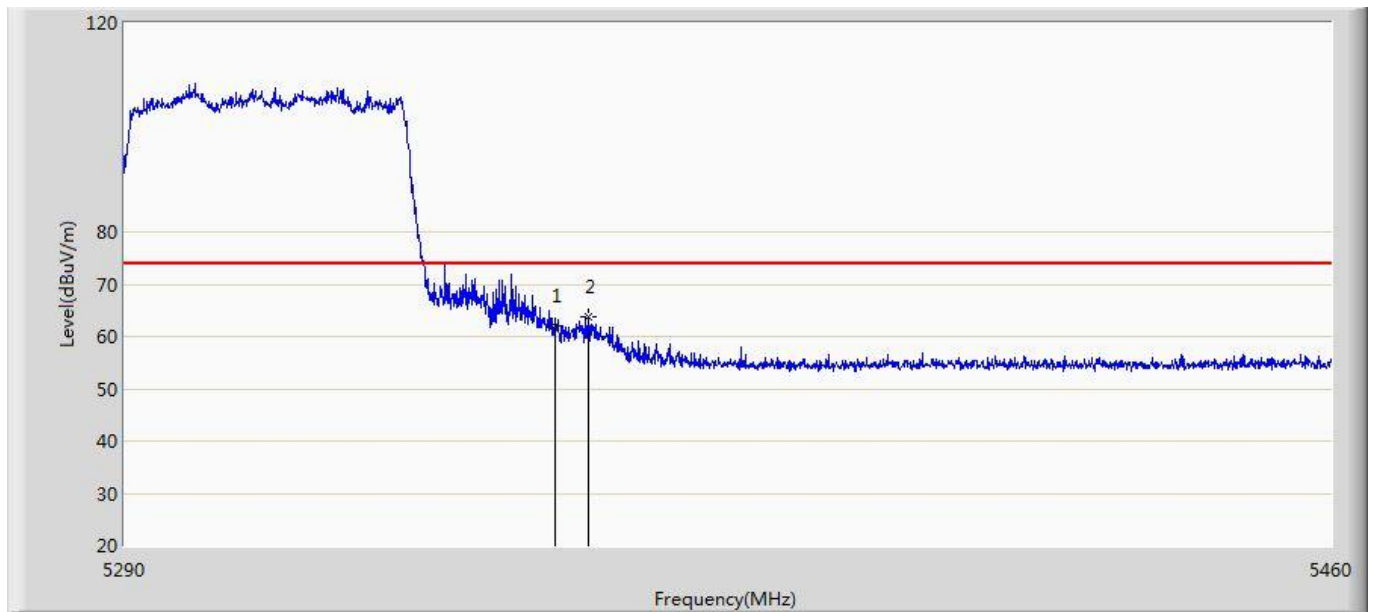


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	62.084	20.968	-11.916	74.000	41.116	PK
2	*	5354.855	63.822	22.726	-10.178	74.000	41.096	PK

Profile: 2250805R	Page No.: 93
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

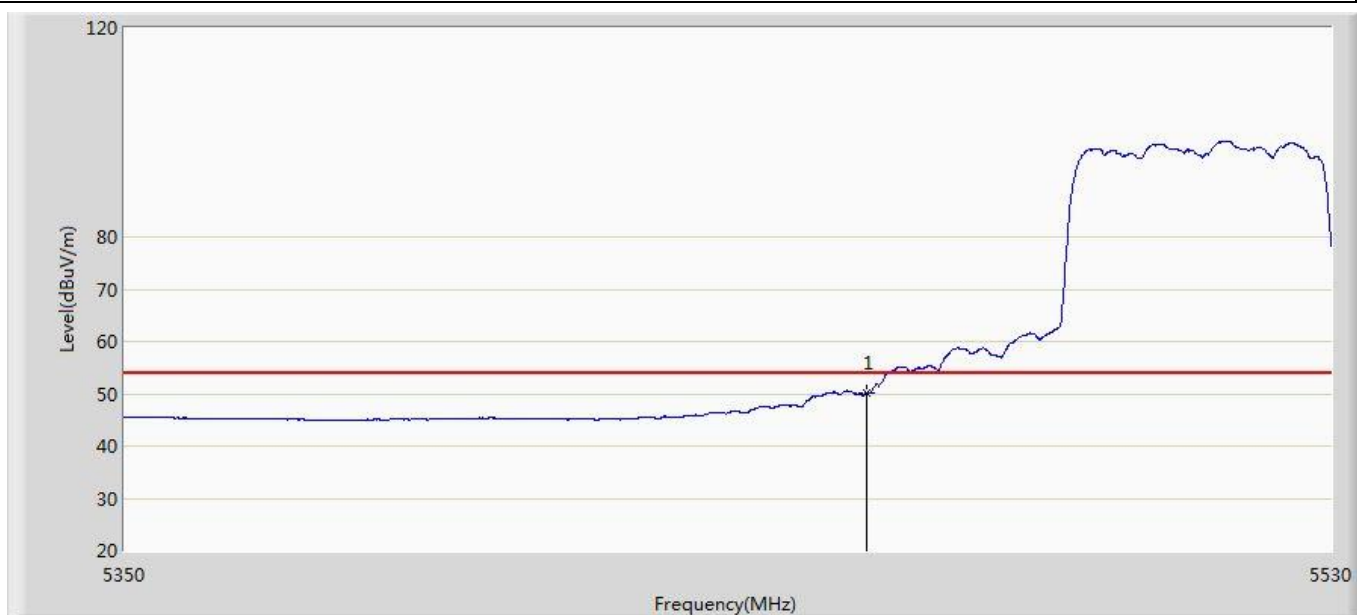


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	50.152	9.146	-3.848	54.000	41.006	AV

Profile: 2250805R	Page No.: 94
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

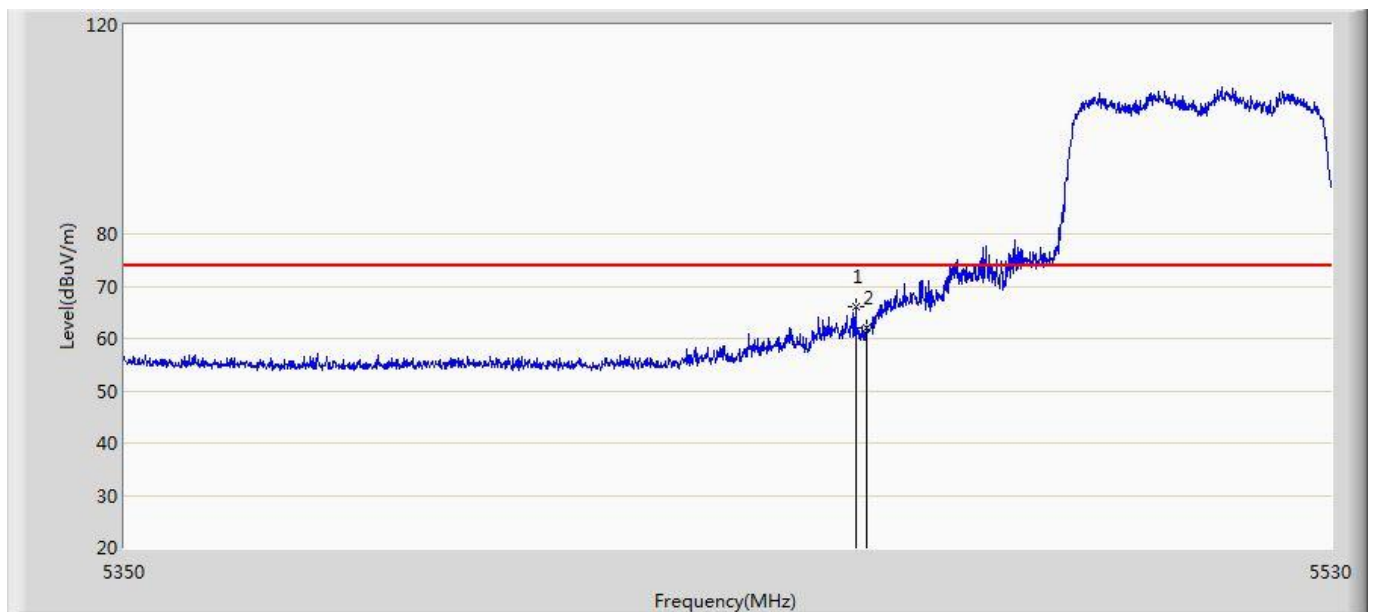


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.360	66.146	25.145	-7.854	74.000	41.001	PK
2		5460.000	62.171	21.165	-11.829	74.000	41.006	PK

Profile: 2250805R	Page No.: 95
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

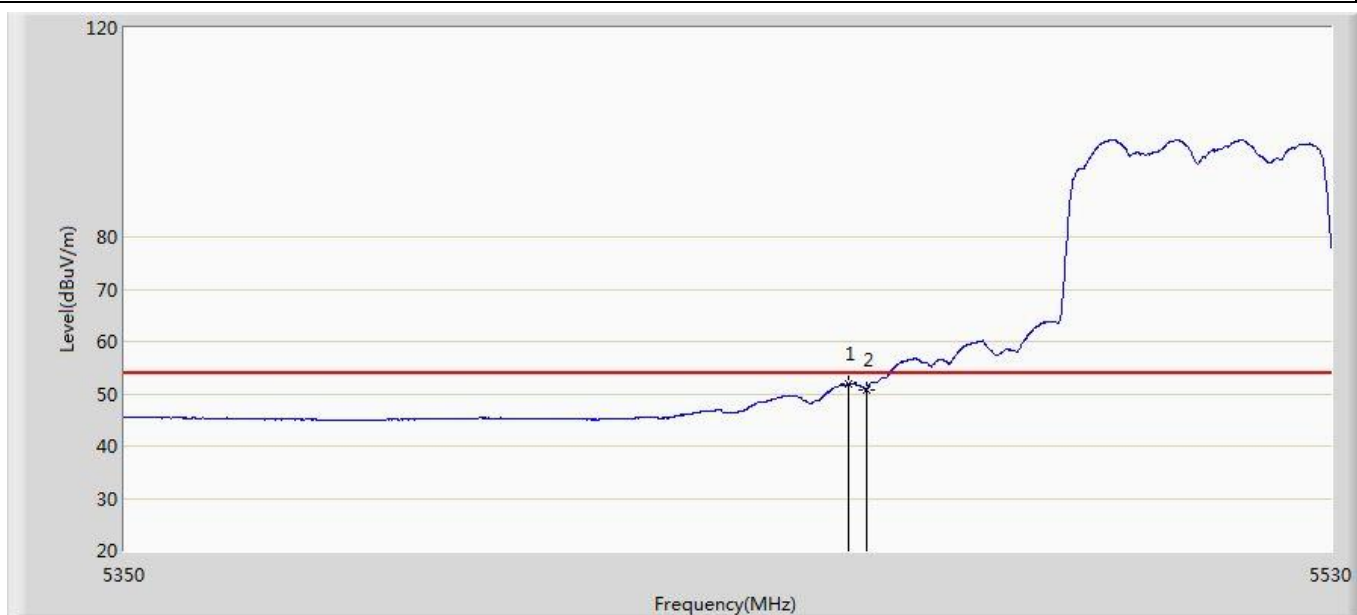

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.370	51.896	10.898	-2.104	54.000	40.998	AV
2		5460.000	50.855	9.849	-3.145	54.000	41.006	AV

Profile: 2250805R	Page No.: 96
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5510MHz by 11ax40	

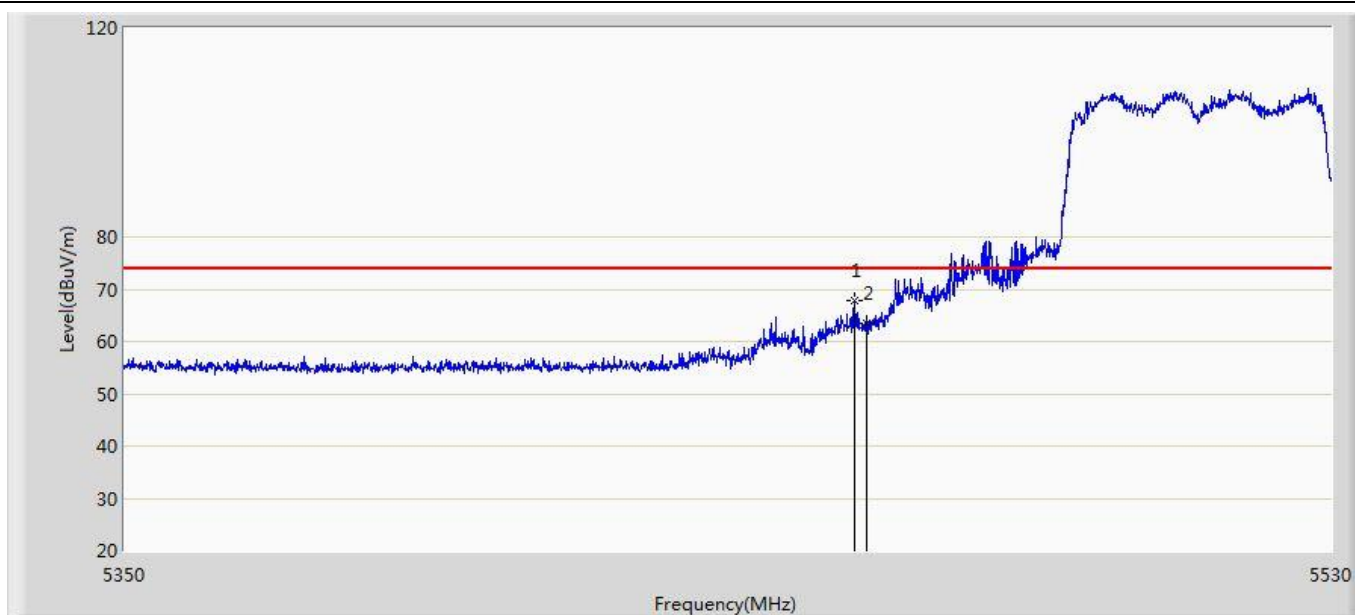


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.180	67.828	26.828	-6.172	74.000	41.001	PK
2		5460.000	63.510	22.504	-10.490	74.000	41.006	PK

Profile: 2250805R	Page No.: 35
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:22
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5755MHz by 11ax40	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.375	64.203	22.364	-38.325	102.528	41.839	PK
2	*	5715.680	73.703	31.455	-35.889	109.592	42.248	PK
3		5723.285	76.218	34.224	-42.073	118.291	41.994	PK

Profile: 2250805R	Page No.: 36
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:23
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5755MHz by 11ax40	

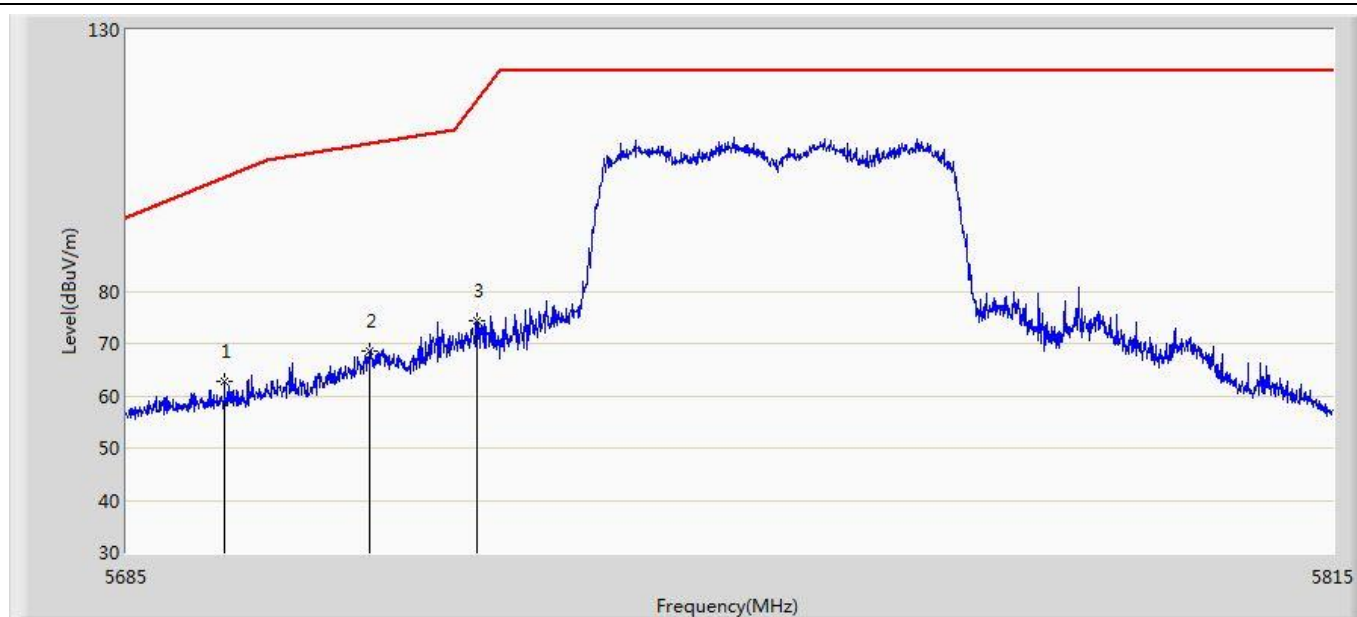

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5695.465	62.734	20.940	-39.124	101.858	41.794	PK
2		5710.935	68.514	26.107	-39.750	108.264	42.408	PK
3		5722.570	74.435	32.417	-42.226	116.661	42.017	PK

Profile: 2250805R	Page No.: 37
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:24
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5795MHz by 11ax40	

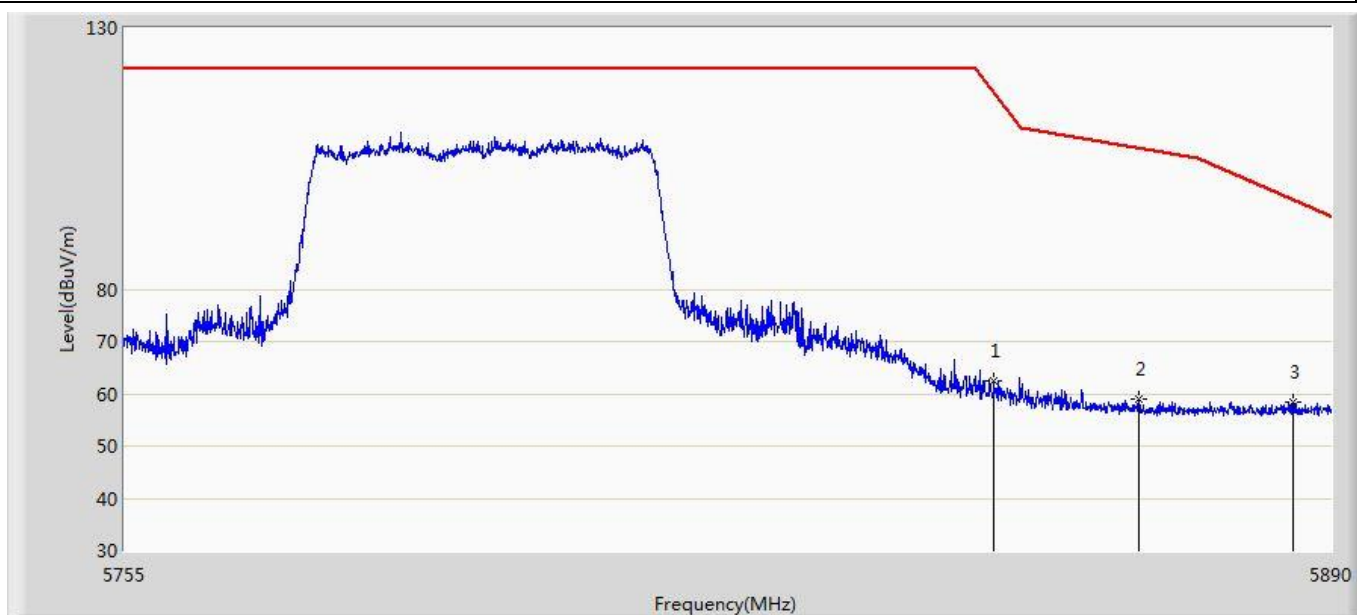

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5851.998	62.522	20.514	-55.121	117.643	42.008	PK
2		5868.265	58.903	16.700	-48.181	107.084	42.203	PK
3	*	5885.748	58.426	16.115	-38.794	97.220	42.311	PK

Profile: 2250805R	Page No.: 38
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:25
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 8:Transmit at 5795MHz by 11ax40	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.132	64.747	22.737	-52.591	117.338	42.010	PK
2		5859.220	61.722	19.596	-47.895	109.617	42.126	PK
3	*	5882.980	58.115	15.826	-41.159	99.274	42.289	PK

Profile: 2250805R	Page No.: 97
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.724	11.263	-2.276	54.000	40.461	AV

Profile: 2250805R	Page No.: 98
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	

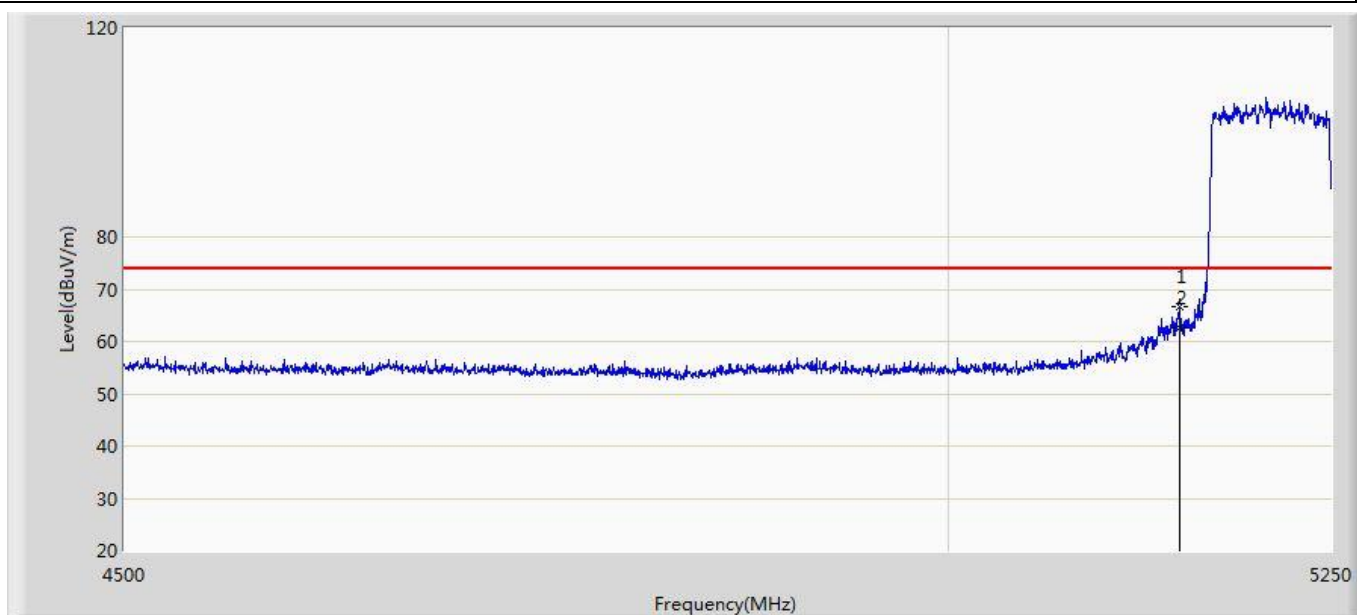


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5149.125	66.565	26.141	-7.435	74.000	40.424	PK
2		5150.000	62.506	22.045	-11.494	74.000	40.461	PK

Profile: 2250805R	Page No.: 99
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	

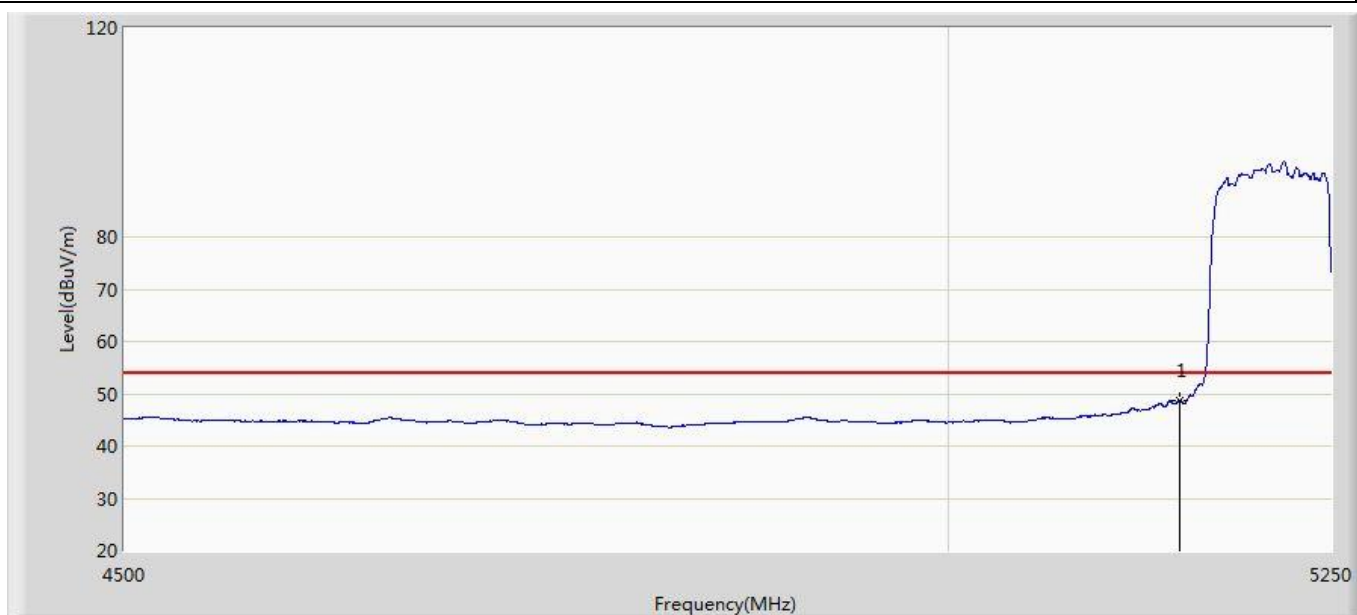

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.755	8.294	-5.245	54.000	40.461	AV

Profile: 2250805R	Page No.: 100
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5210MHz by 11ax80	

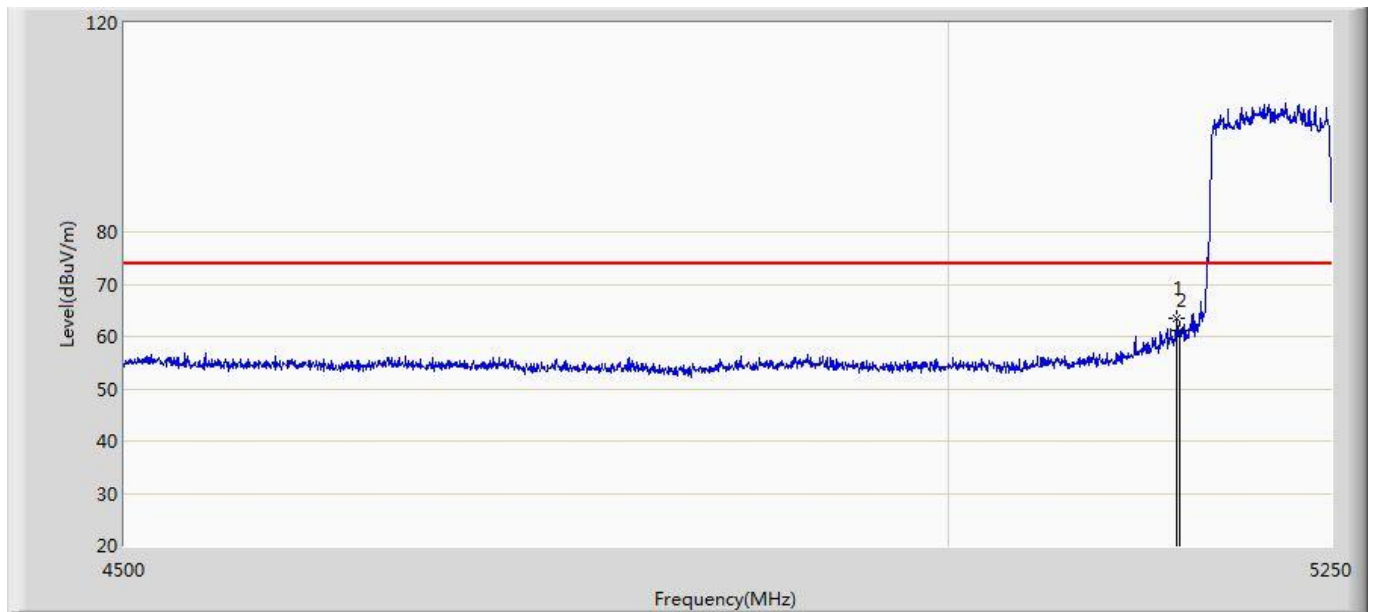


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5147.250	63.363	22.978	-10.637	74.000	40.385	PK
2		5150.000	61.238	20.777	-12.762	74.000	40.461	PK

Profile: 2250805R	Page No.: 101
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	50.357	9.241	-3.643	54.000	41.116	AV

Profile: 2250805R	Page No.: 102
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	

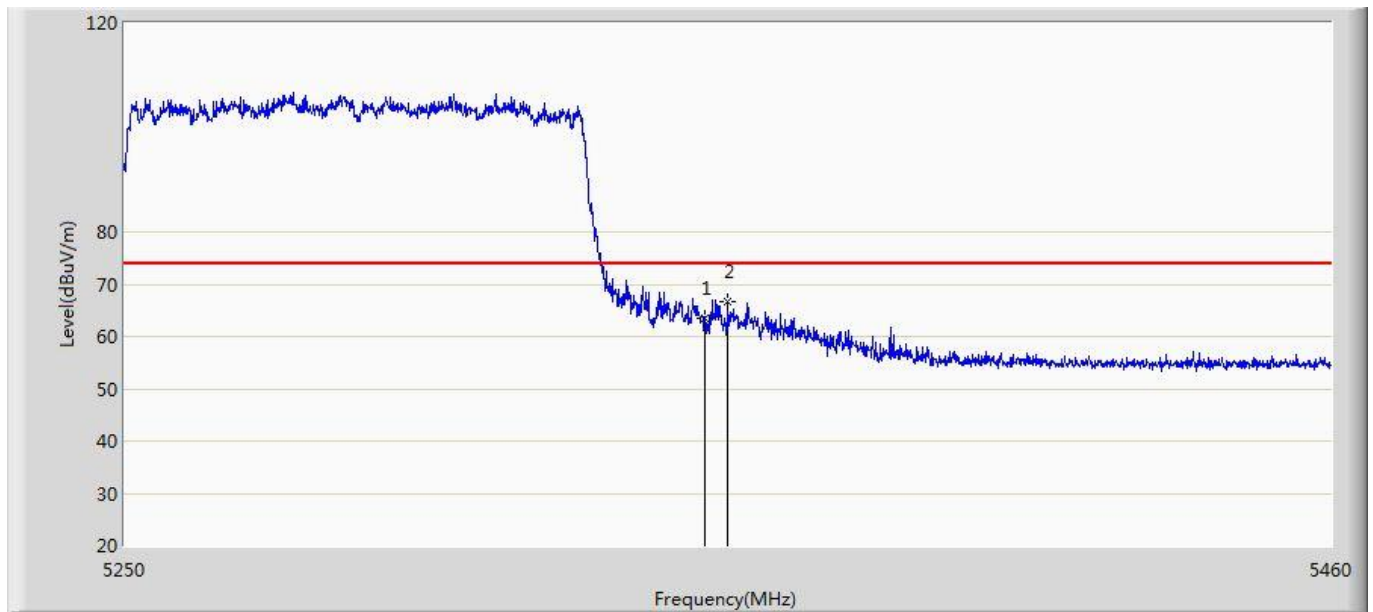


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	63.451	22.335	-10.549	74.000	41.116	PK
2	*	5354.055	66.630	25.516	-7.370	74.000	41.114	PK

Profile: 2250805R	Page No.: 103
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.695	8.579	-4.305	54.000	41.116	AV

Profile: 2250805R	Page No.: 104
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5290MHz by 11ax80	

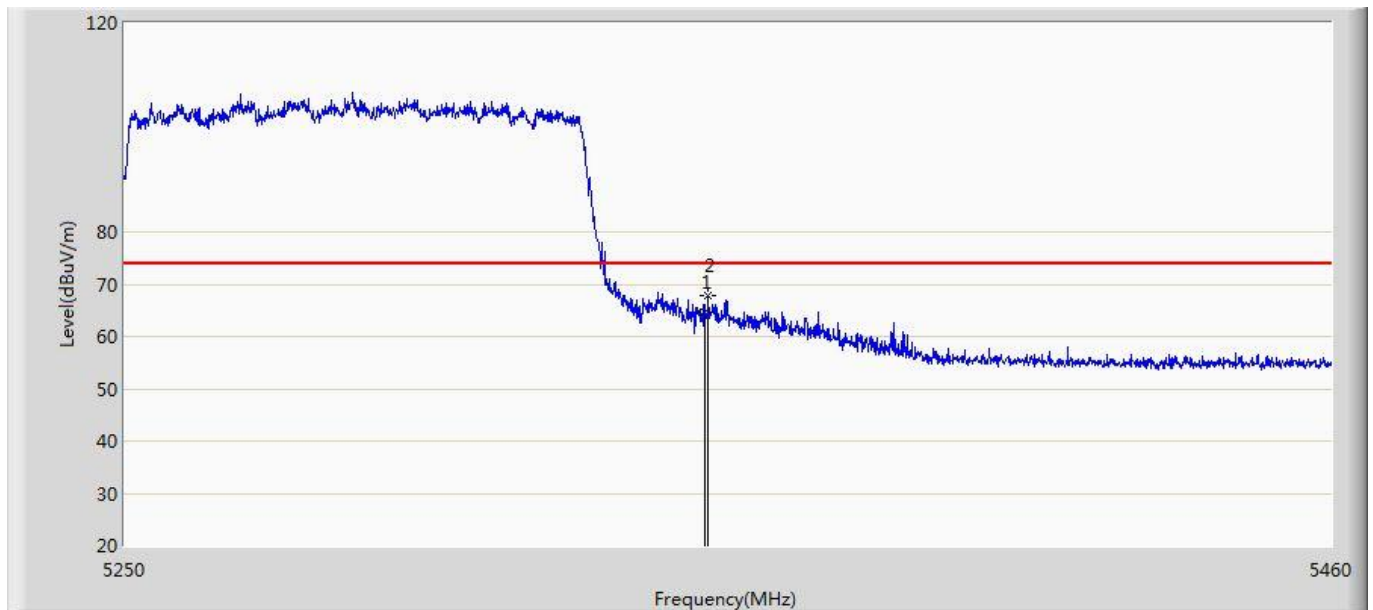

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	64.627	23.511	-9.373	74.000	41.116	PK
2	*	5350.590	67.694	26.565	-6.306	74.000	41.128	PK

Profile: 2250805R	Page No.: 105
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	

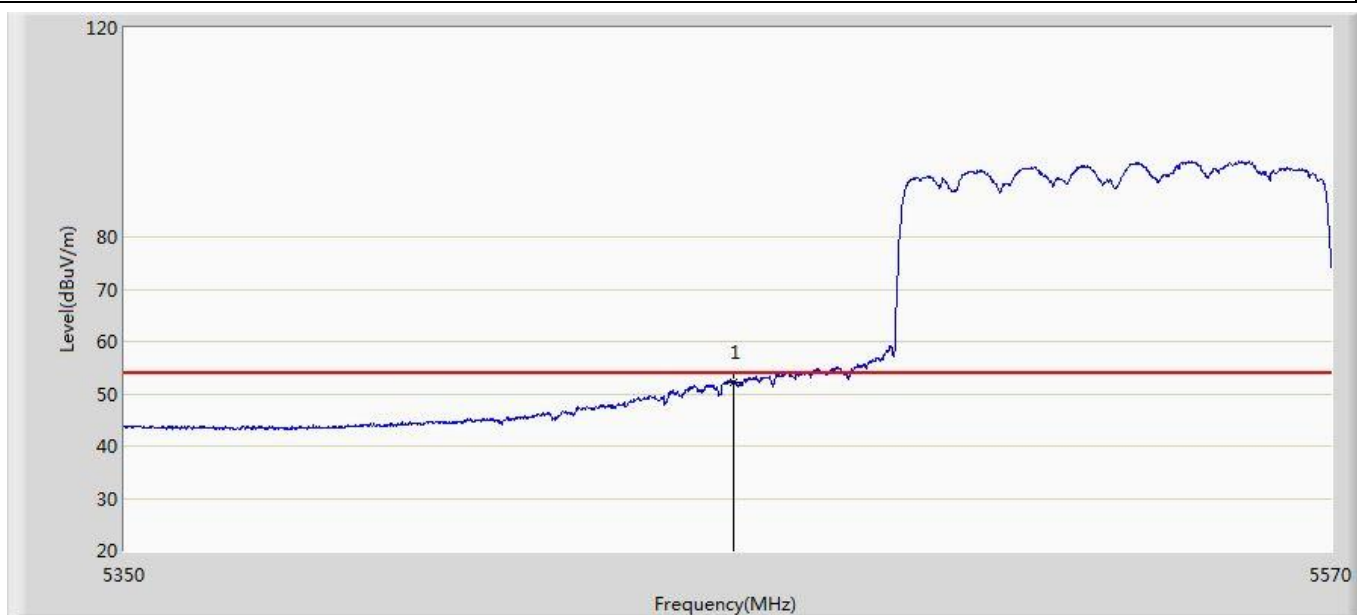

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	52.253	11.247	-1.747	54.000	41.006	AV

Profile: 2250805R	Page No.: 106
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.460	66.440	25.439	-7.560	74.000	41.001	PK
2		5460.000	62.343	21.337	-11.657	74.000	41.006	PK

Profile: 2250805R	Page No.: 107
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.690	51.882	10.883	-2.118	54.000	40.999	AV
2		5460.000	50.280	9.274	-3.720	54.000	41.006	AV

Profile: 2250805R	Page No.: 108
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 03:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5530MHz by 11ax80	

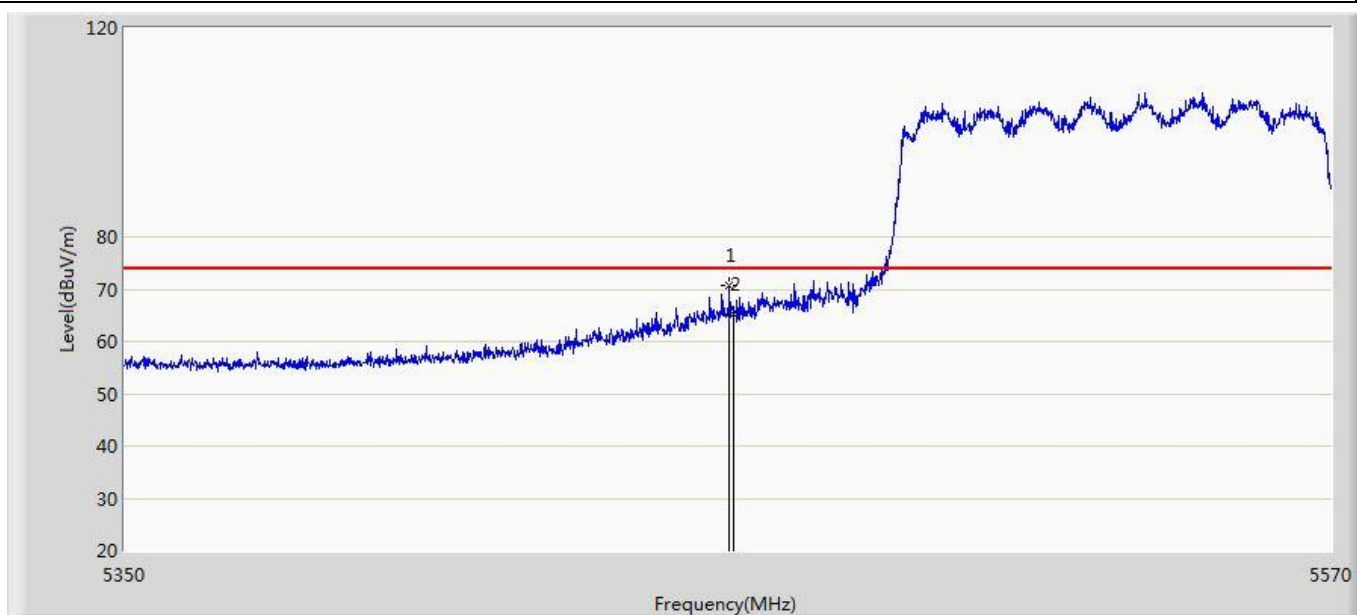

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5459.230	70.837	29.833	-3.163	74.000	41.004	PK
2		5460.000	65.301	24.295	-8.699	74.000	41.006	PK

Profile: 2250805R	Page No.: 39
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:26
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5775MHz by 11ax80	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5671.625	61.627	19.834	-22.615	84.243	41.793	PK
2		5709.125	72.224	29.756	-35.534	107.757	42.468	PK
3		5722.250	73.132	31.103	-42.800	115.931	42.029	PK
4		5851.000	73.895	31.903	-46.024	119.919	41.991	PK
5		5865.500	68.070	25.881	-39.788	107.858	42.189	PK
6		5880.500	63.936	21.667	-37.179	101.115	42.269	PK

Profile: 2250805R	Page No.: 40
Engineer: YuLiu	
Site: AC5	Time: 2022/06/14 - 04:28
Limit: FCC-15.407	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 9:Transmit at 5775MHz by 11ax80	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5681.750	63.664	21.955	-28.069	91.733	41.709	PK
2		5709.000	73.845	31.373	-33.877	107.722	42.472	PK
3		5723.125	71.064	29.065	-46.862	117.926	41.999	PK
4		5852.500	67.981	25.965	-48.518	116.499	42.017	PK
5		5859.000	69.914	27.792	-39.764	109.678	42.122	PK
6		5893.125	59.543	17.172	-32.208	91.751	42.371	PK


10. Frequency Stability

10.1. Test Equipment

Frequency Stability / TR-7					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
AC Power Supply	IDRC	CF-500TP	979422	N/A	N/A
DC Power Supply	IDRC	CD-035-020PR	977272	N/A	N/A
Programmable Temperature & Humidity Chamber	Gaoyu	TH-1P-B	WIT-05121302	2022.01.03	2023.01.02
Temperature/Humidity Meter	RTS	RTS-8S	RF07	2021.07.09	2022.07.08

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

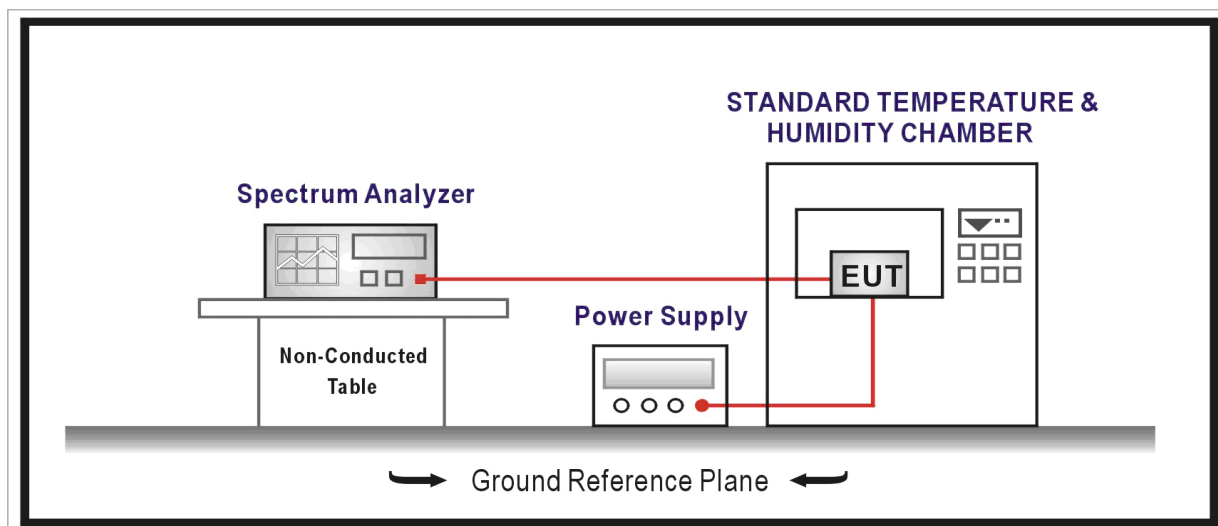






10.3. Limit

Frequency Stability Limit	
UNII Devices	
☒	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
IEEE Std. 802.11n-2009	
☒	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.

10.4. Test Procedure

Frequency Stability Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		6.8	Frequency stability tests
	☒	ANSI C63.10	6.8.1	Frequency stability with respect to ambient temperature
	☒	ANSI C63.10	6.8.2	Frequency stability when varying supply voltage

10.5. EUT test Axis definition

Item	Frequency Stability				
Device Category	☐	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☒	Client use			
Test mode	Mode 1-6				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☒	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					

10.6. Test Result

Product Name	:	VR All-In-One Headset
Test Mode	:	Carrier Wave

Frequency Stability under Temperature at 0min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	ppm	Limit
-30	5220	-83	-0.016	±20
-20	5220	-124	-0.024	±20
-10	5220	44	0.008	±20
0	5220	23	0.004	±20
10	5220	66	0.013	±20
20	5220	-55	-0.011	±20
30	5220	-92	-0.018	±20
40	5220	115	0.022	±20
50	5220	135	0.026	±20

Frequency Stability under Temperature at 2min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	ppm	Limit
-30	5220	86	0.017	±20
-20	5220	115	0.022	±20
-10	5220	63	0.012	±20
0	5220	47	0.009	±20
10	5220	-36	-0.007	±20
20	5220	-72	-0.014	±20
30	5220	56	0.011	±20
40	5220	102	0.020	±20
50	5220	125	0.024	±20

Frequency Stability under Temperature at 5min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	ppm	Limit
-30	5220	-72	-0.014	±20
-20	5220	-83	-0.016	±20
-10	5220	-44	-0.008	±20
0	5220	38	0.007	±20
10	5220	46	0.009	±20
20	5220	97	0.019	±20
30	5220	82	0.016	±20
40	5220	-73	-0.014	±20
50	5220	115	0.022	±20

Frequency Stability under Temperature at 10min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	ppm	Limit
-30	5220	88	0.017	±20
-20	5220	106	0.020	±20
-10	5220	77	0.015	±20
0	5220	46	0.009	±20
10	5220	55	0.011	±20
20	5220	-58	-0.011	±20
30	5220	-70	-0.013	±20
40	5220	93	0.018	±20
50	5220	82	0.016	±20

Frequency Stability under Voltage

AC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	ppm	Limit
102	5220	71	0.014	±20
120	5220	86	0.016	±20
138	5220	68	0.013	±20

Note: We have evaluated SISO and MIMO mode, shown in the report is the worst data.

11. Antenna Requirement

11.1. Limit

Antenna Requirement Limit	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

11.2. Antenna Connector Construction

Antenna Connector Construction	
☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____