



Test report No:
2250805R-RF-US-P06V01

FCC & ISSED TEST REPORT

Product Name	VR All-In-One Headset
Trademark	
Model and /or type reference	A8110
FCC ID	2A5NV-A8110
IC	28409-A8110
Applicant's name / address	Qingdao Chuangjian Weilai Technology Co., Ltd Room 401, 4th Floor, Building 3, Qingdao Research Institute, 393 Songling Road, Laoshan District, Qingdao City, Shandong Province, P.R.China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB 558074 D01v05r02 KDB 662911 D01 Multiple Transmitter Output v02r01 RSS-Gen Issue 5 /RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested By (name / position & signature)	Tim Cao/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2022-07-19
Report Version	V1.1
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees.....	4
General conditions.....	4
Environmental conditions.....	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments	6
Used Equipment	7
Uncertainty.....	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information.....	11
1.3 Test Data Rate	12
1.4 Channel List	12
2 Description of Test Setup	13
2.1 Operating mode(s) used for tests.....	13
2.2 Accessories Information.....	13
2.3 Support / Auxiliary equipment / unit / Test software for the EUT	13
2.4 Test Configuration / Block diagram used for tests	14
2.5 Testing process.....	15
3 Verdict summary section	16
3.1 Standards	16
3.2 Overview of results.....	17
3.3 Test Facility	18
4 Test Results.....	19
4.1 AC Power Line Conducted Emission	19
4.1.1 Limit.....	19
4.1.2 Test Setup.....	19
4.1.3 Test Procedure	19
4.1.4 Test Data.....	20
4.2 Emissions in restricted frequency bands	22
4.2.1 Limit.....	22
4.2.2 Test Setup.....	24
4.2.3 Test Procedure	25

4.2.4	Test Data.....	26
4.3	Emissions in non-restricted frequency band	138
4.3.1	Limit.....	138
4.3.2	Test Setup.....	138
4.3.3	Test Procedure	138
4.3.4	Test Data.....	139
4.4	Duty cycle.....	142
4.4.1	Limit.....	142
4.4.2	Test Setup.....	142
4.4.3	Test Procedure	142
4.4.4	Test Data.....	143
4.5	Radiated Emission Band Edge	145
4.5.1	Limit.....	145
4.5.2	Test Setup.....	145
4.5.3	Test Procedure	146
4.5.4	Test Data.....	147
4.6	DTS Bandwidth	291
4.6.1	Limit.....	291
4.6.2	Test Setup.....	291
4.6.3	Test Procedure	291
4.6.4	Test Data.....	292
4.7	Fundamental emission output power	293
4.7.1	Limit.....	293
4.7.2	Test Setup.....	293
4.7.3	Test Procedure	294
4.7.4	Test Data.....	296
4.8	Power Density	300
4.8.1	Limit:.....	300
4.8.2	Test Setup.....	300
4.8.3	Test Procedure	300
4.8.4	Test Data.....	302
4.9	Antenna Requirement	303
4.9.1	Limit:.....	303
4.9.2	Antenna Connector Construction:.....	303
5	Test setup photo and EUT Photo	304

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 27, 2022
Date (start test)	May. 30, 2022
Date (finish test)	Jun. 24, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. The 2.4G WLAN part of AirEngine6761-21T is exactly the same as AirEngine5761-11, so we only verified the power and AC Power Line Conducted Emission, and other data are quoted from AirEngine5761-11.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2250805R-RF-US-P06V01	V1.0	Initial issue of report.	2022-07-13
2250805R-RF-US-P06V01	V1.1	Page1&10 modified the Applicant&Manufacturer address, Page170-178 Updated test legend, Page10Added Type of modulation ,V1.0 report repeal.	2022-07-19

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Test Data Rate;
 - Chapter 1.4 Channel List;
8. There are two versions for EUT model A8110, one is 'Pico 4 Pro' another is 'Pico 4', both are identical except additional eye tracking & face tracking function for 'Pico 4 Pro'. 'Pico 4 Pro' and 'Pico 4' There are models with 2nd material supplier; we did all the tests on 'Pico 4 Pro', since 'Pico 4 Pro' and 'Pico 4' have the same 2nd supplier material it won't affect RF circuit and PCB Layout, So we only evaluated the worst channel spurious

emissions for the second material supplier model of "Pico 4 Pro", The second material supplier of "Pico 4" has no evaluation test, We also evaluate the worst channel spurious emissions for "Pico 4", Verify that spurious emissions are not degraded, so only test data for 'Pico 4 Pro' is shown in the report.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2021.10.30	2022.10.29
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
50ohm Termination	SHX	TF2	7081403	2021.09.04	2022.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
Coaxial Cable	Woken	N/A	N/A	2022.01.18	2023.01.17
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2021.08.15	2022.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2021.08.23	2022.08.22
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2022.03.30	2023.03.29
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Radiated Emission(1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
Amplifier	SKET	LNPA_0118G-45	SK2021041201	2022.04.15	2023.04.14
Preamplifier	EMCI	EMC184045SE	980263	2022.05.21	2023.05.20
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2021.08.23	2022.08.22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2022.05.19	2023.05.18
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.05.22	2023.05.21
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2022.03.21	2023.03.20
High-Pass Filter	Wainwright	WHKX3.0/18G-12SS	AC5&AC6	2022.06.07	2023.06.06
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	± 2.92 dB
Peak Power Output	± 1.13 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.60 dB 200MHz~1GHz: 4.10 dB Vertical: 30MHz~200MHz: 4.80 dB 200MHz~1GHz: 4.10 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~40GHz: 4.70 dB Vertical: 18GHz~40GHz: 4.60 dB
RF antenna conducted test	± 1.13 dB
Radiated Emission Band Edge	± 5.00 dB
DTS Bandwidth	± 279 Hz
Occupied Bandwidth	± 279 Hz
Power Density	± 1.13 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	VR All-In-One Headset
Model No.....	A8110
Hardware Version	PHOENIX MB
Software Version.....	Android Q
Firmware Version.....	BTFM.HST.2.0.0.c3-00452-QCACHROMZ-1
FCC ID	2A5NV-A8110
IC	28409-A8110
Manufacturer.....	Qingdao Chuangjian Weilai Technology Co., Ltd
Manufacturer address	Room 401, 4th Floor, Building 3, Qingdao Research Institute, 393 Songling Road, Laoshan District, Qingdao City, Shandong Province, P.R.China
Factory	Goertek Inc.
Address.....	No.8877 Yingqian Street,High-Tech Industrial Development District, Weifang, Shandong, 261031, P.R.China

Wireless specification	WIFI
Operating frequency range(s)	2400~2483.5MHz
Type of modulation	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n/ax: OFDM-BPSK, QPSK, 16QAM, 64QAM, 1024QAM, OFDMA
Number of channel.....	802.11b/g/n/ax(20MHz) : 11 802.11n/ax(40MHz) : 07
Data Rate	802.11ax: up to 573.5 Mbps
Device category	☐ Fixed point-to-point ☐ Emit multiple directional beams, simultaneously or sequentially ☒ Other cases

Note: AX only supports Full RU, not partial RU.

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☒	Adapter: Input:100-240V,50/60Hz,0.5A Output:5.0V,3A /9.0V,2.23A /12V,1.67A/3.3-5.9V,3A/3.3-11V,2.2A
	☒	HMD: 9V,2.23A or 5V,3A
	☒	Battery:3.85V
Mounting position.....	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Head-mounted equipment
	☐	Other: RF Module

1.2 Antenna Information

Antenna model / type number..... :	N/A		
Antenna serial number..... :	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☒	2TX + 2RX	
	☐	Others:.....	
Antenna technology	☒	SISO	
	☒	MIMO	☒ CDD
			☐ Beam-forming
Antenna Type..... :	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☒ FPC
			☐ PCB
			☐ Metal Monopole Antenna
			☐ Ceramic chip
			☐ Others.....
Antenna Gain	SISO:	Antenna1	2.65dBi
		Antenna2	2.82dBi
	CDD:	2.82dBi for Power; 5.83dBi for PSD	

1.3 Test Data Rate

Note: The test rate is the lowest rate of 802.11b/g/n(20MHz)/ax(20MHz)/ax(40MHz)

1.4 Channel List

IEEE 802.11b/g & IEEE 802.11n/ax (20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	2	2417 MHz	3	2422 MHz	4	2427 MHz
5	2432 MHz	6	2437 MHz	7	2442 MHz	8	2447 MHz
9	2452 MHz	10	2457 MHz	11	2462 MHz	-	-

IEEE 802.11n/ax(40MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422 MHz	4	2427 MHz	5	2432 MHz	6	2437 MHz
7	2442 MHz	8	2447 MHz	9	2452 MHz	-	-

Note: The General Description of the Item, antenna information, Test Data Rate and Channel List in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n(20MHz)
	Mode 4: Transmit by 802.11n(40MHz)
	Mode 5: Transmit by 802.11ax(20MHz)
	Mode 6: Transmit by 802.11ax(40MHz)

2.2 Accessories Information

Accessories Information	Brand/model name	Cable		
		Length used during test [m]	Attached during test	Shielded
USB Cable	N/A	10	☒	☒
USB Cable	N/A	0.5	☒	☒

2.3 Support / Auxiliary equipment / unit / Test software for the EUT


The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
QRCT	N/A	N/A	N/A


2.4 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:

Test setup Diagram- AC Line Conducted Emission Test

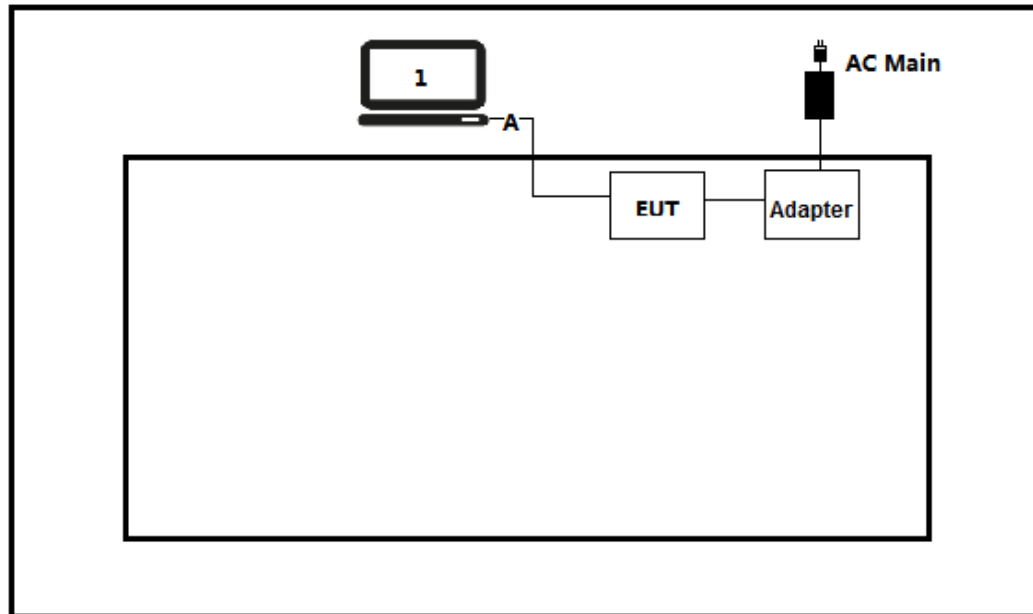

Test setup Diagram- Radiated Emission

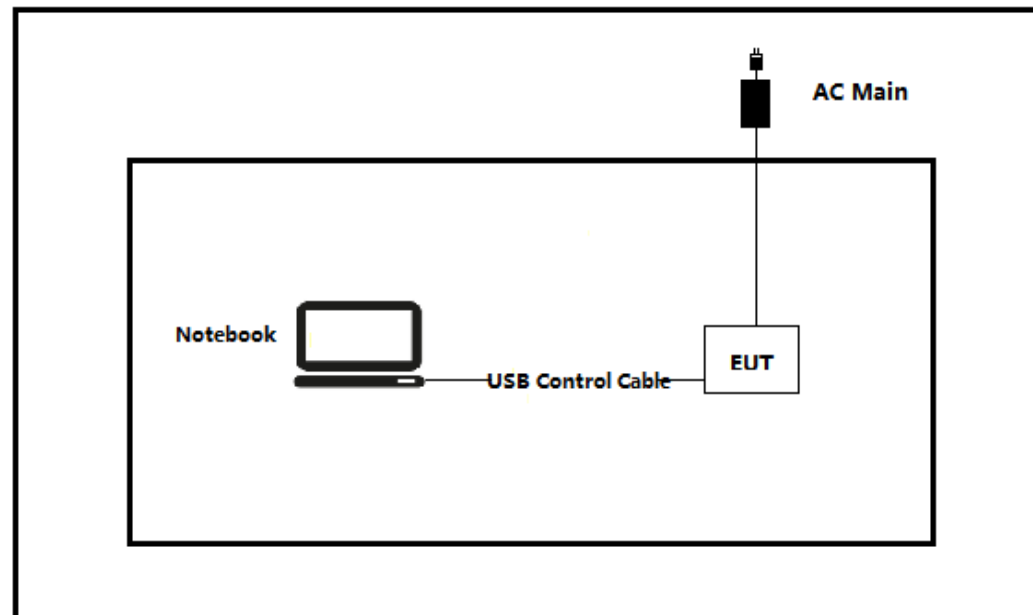

2.5 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Run the software “QRCT” on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---


3.3 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission	VERDICT: PASS
---	----------------------


4.1.1 Limit		
Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50
¹⁾ At the transition frequency, the lower limit applies. ²⁾ The limit decreases linearly with the logarithm of the frequency.		

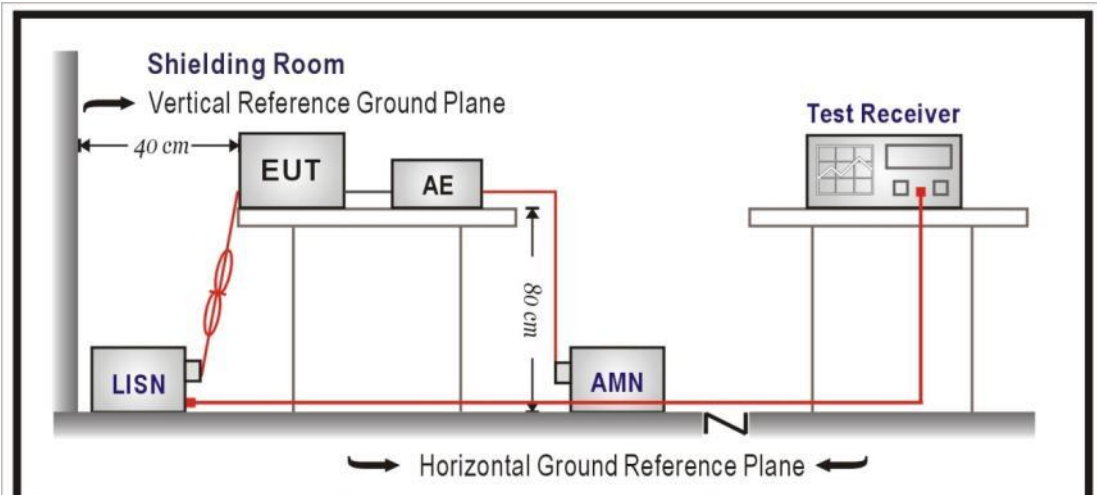4.1.2 Test Setup


4.1.3 Test Procedure			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 2250805R	Page No.: 65
Engineer: YuLiu	
Site: TR1	Time: 2022/06/20 - 22:40
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode1	

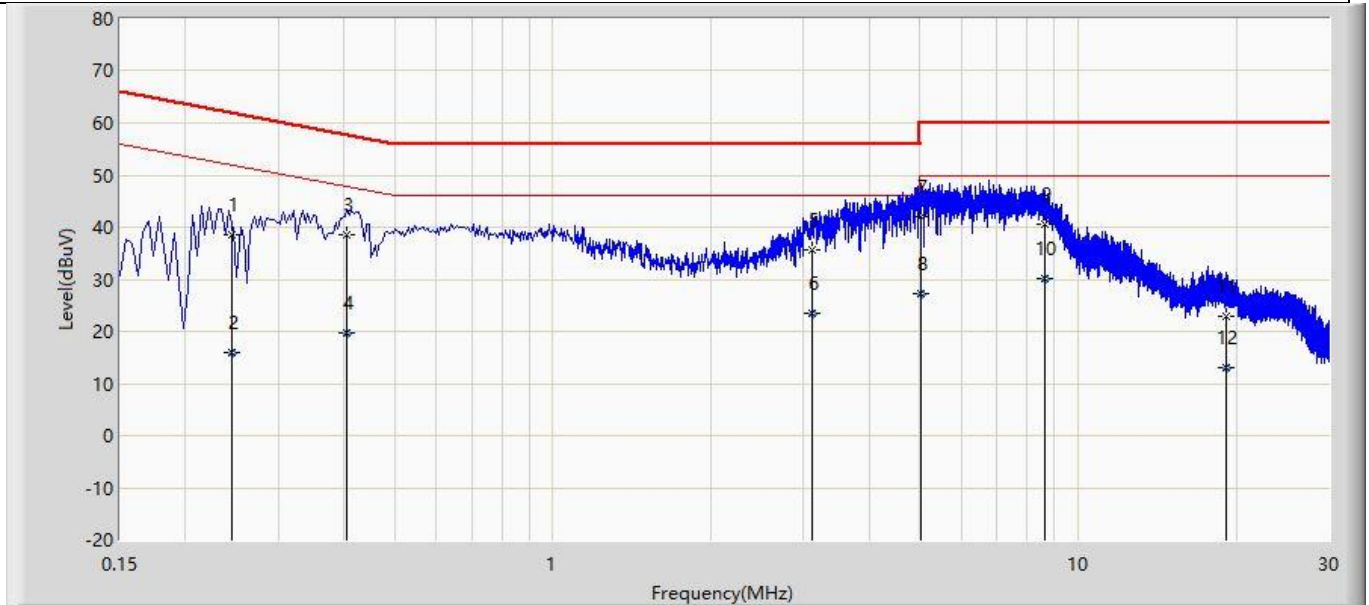

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.245	38.450	28.856	-23.487	61.937	9.594	QP
2		0.245	16.061	6.467	-35.876	51.937	9.594	AV
3		0.406	38.521	28.903	-19.209	57.730	9.617	QP
4		0.406	19.750	10.133	-27.979	47.730	9.617	AV
5		3.110	35.739	26.008	-20.261	56.000	9.731	QP
6		3.110	23.511	13.780	-22.489	46.000	9.731	AV
7	*	5.022	42.052	32.234	-17.948	60.000	9.818	QP
8		5.022	27.253	17.435	-22.747	50.000	9.818	AV
9		8.638	40.718	30.753	-19.282	60.000	9.964	QP
10		8.638	30.118	20.154	-19.882	50.000	9.964	AV
11		19.182	22.956	12.737	-37.044	60.000	10.219	QP
12		19.182	13.048	2.828	-36.952	50.000	10.219	AV

Profile: 2250805R	Page No.: 66
Engineer: YuLiu	
Site: TR1	Time: 2022/06/20 - 22:43
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Model1	

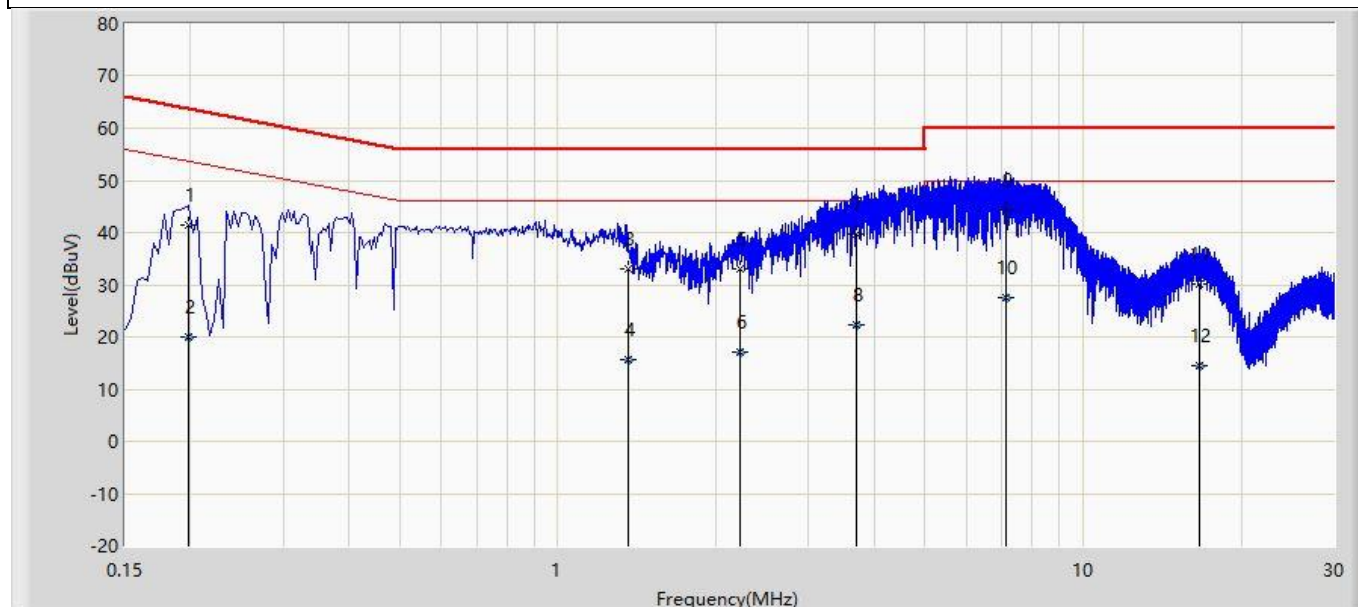

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.198	41.458	31.881	-22.236	63.694	9.577	QP
2		0.198	19.943	10.366	-33.751	53.694	9.577	AV
3		1.361	32.916	23.259	-23.084	56.000	9.657	QP
4		1.361	15.540	5.883	-30.460	46.000	9.657	AV
5		2.226	32.927	23.240	-23.073	56.000	9.688	QP
6		2.226	17.214	7.527	-28.786	46.000	9.688	AV
7		3.706	39.790	30.036	-16.210	56.000	9.754	QP
8		3.706	22.326	12.572	-23.674	46.000	9.754	AV
9	*	7.110	44.277	34.372	-15.723	60.000	9.905	QP
10		7.110	27.679	17.773	-22.321	50.000	9.905	AV
11		16.590	30.232	20.044	-29.768	60.000	10.188	QP
12		16.590	14.563	4.375	-35.437	50.000	10.188	AV


4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.205; 15.209	
Restricted Bands of operation for FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	Above 38.6
13.36 – 13.41	--	--	--
Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 ^(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 ^(Note 1)
1.705 - 30	30	29.5	30 ^(Note 1)
30 - 88	100	40	3 ^(Note 2)
88 - 216	150	43.5	3 ^(Note 2)
216 - 960	200	46	3 ^(Note 2)
Above 960	500	54	3 ^(Note 2)
Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).			
Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated			


that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

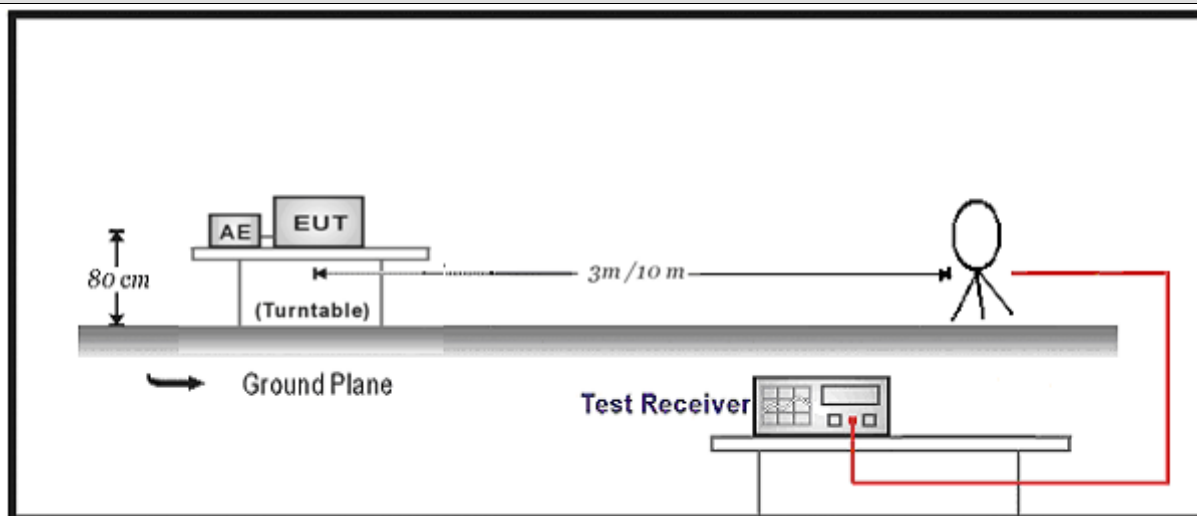

30MHz-1GHz Test Setup:

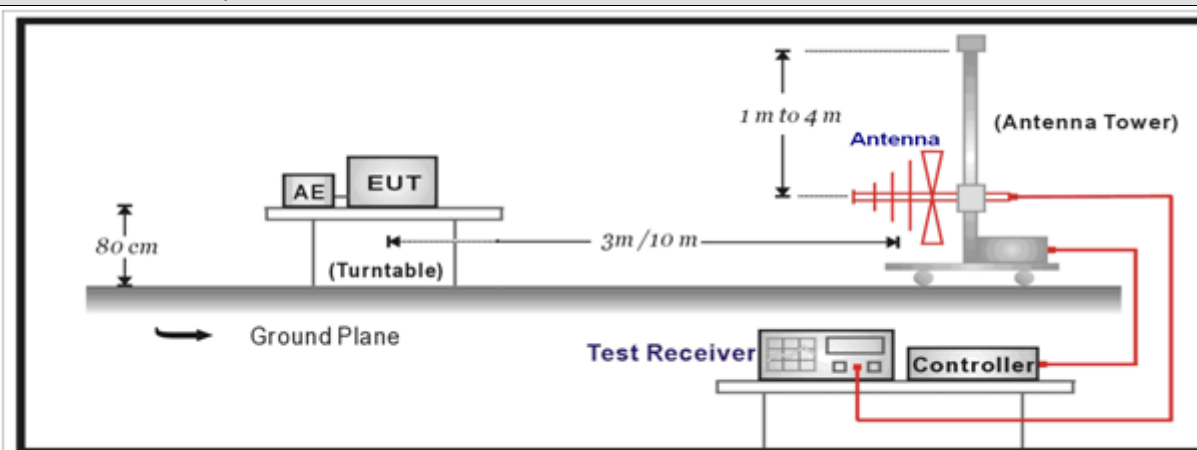

Above 1GHz Test Setup:

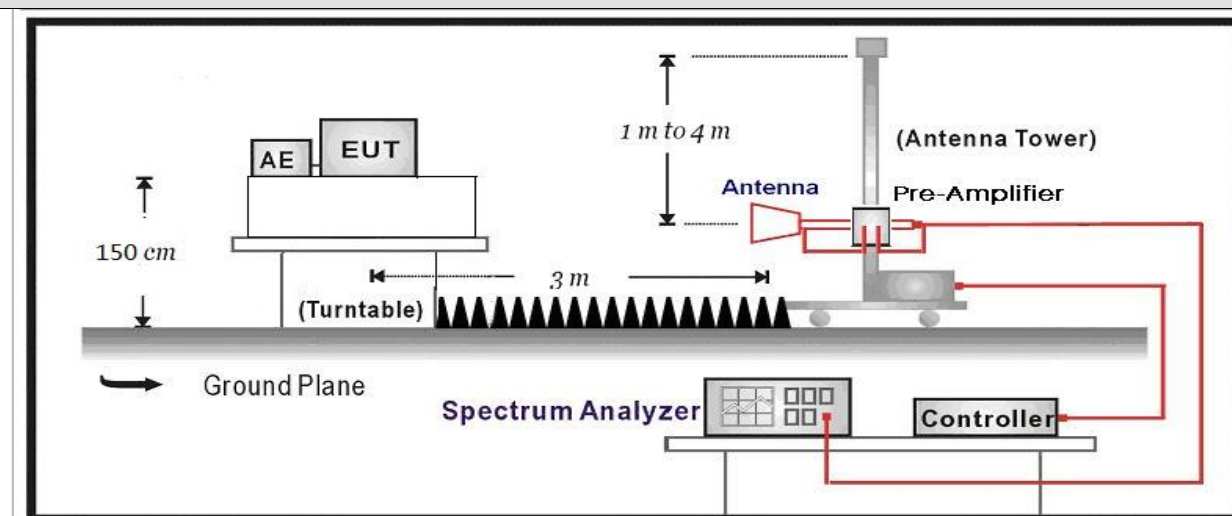


4.2.3 Test Procedure				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	6.3	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	☐	ANSI C63.10	11.12.2.4	Peak power measurement procedure
	☐	ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
	☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
	☐	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.2.4 Test Data


SISO Antenna1:

Profile: 2250805R	Page No.: 49
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

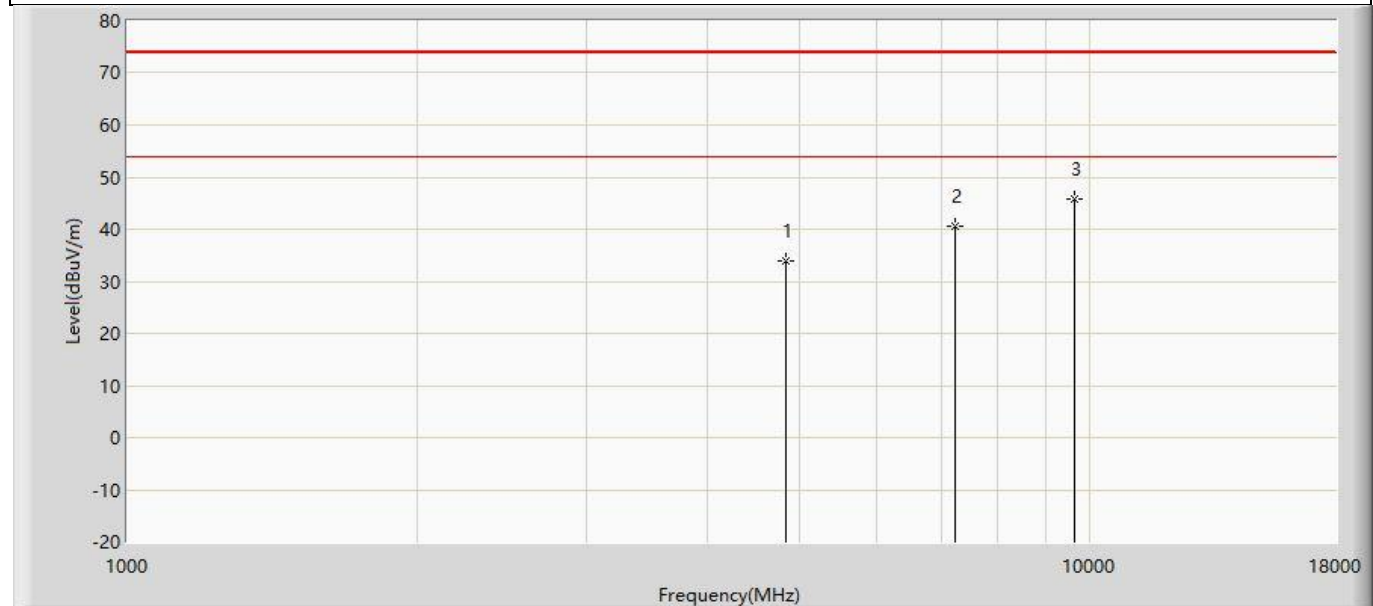


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.801	48.475	-40.199	74.000	-14.674	PK
2		7236.000	40.663	49.057	-33.337	74.000	-8.394	PK
3	*	9648.000	45.836	50.881	-28.164	74.000	-5.045	PK

Profile: 2250805R	Page No.: 50
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

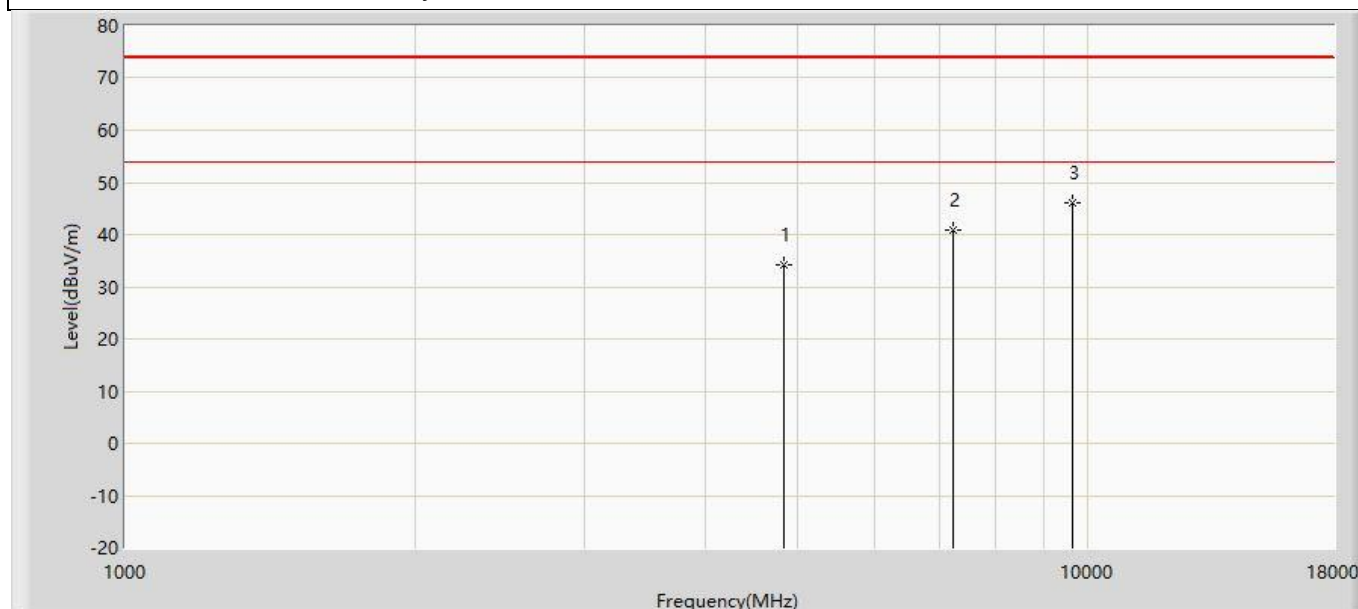


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.123	48.797	-39.877	74.000	-14.674	PK
2		7236.000	40.802	49.196	-33.198	74.000	-8.394	PK
3	*	9648.000	45.968	51.013	-28.032	74.000	-5.045	PK

Profile: 2250805R	Page No.: 51
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

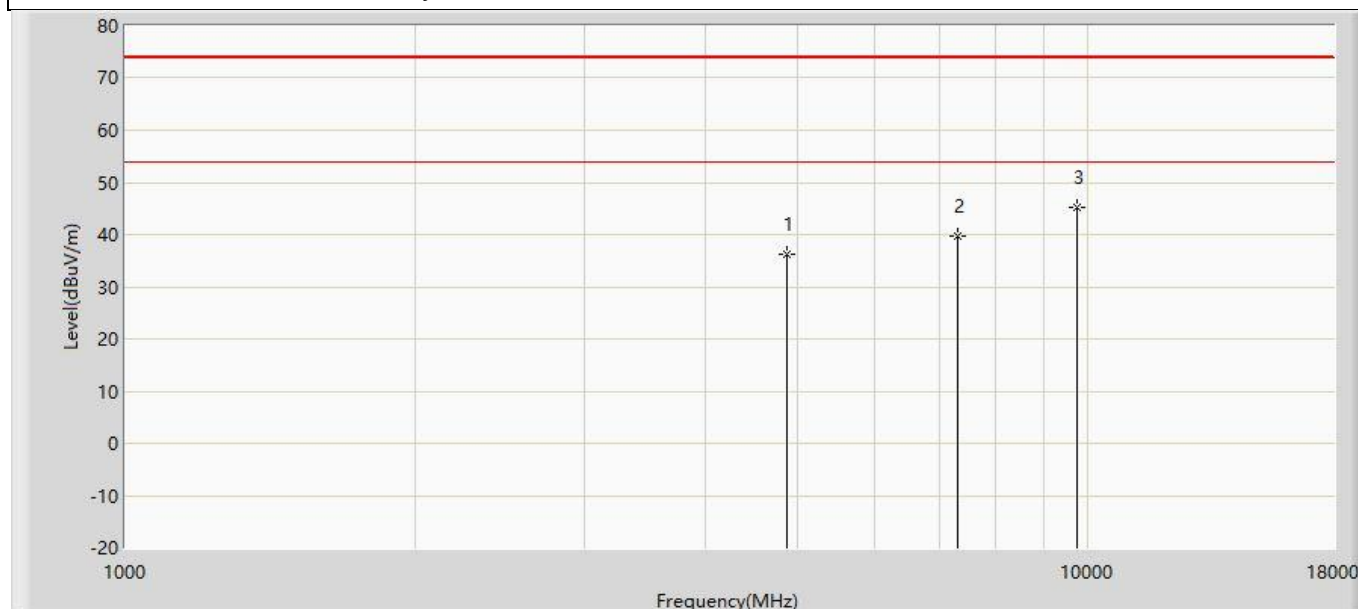


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.369	50.809	-37.631	74.000	-14.440	PK
2		7311.000	39.733	48.032	-34.267	74.000	-8.299	PK
3	*	9748.000	45.230	49.908	-28.770	74.000	-4.677	PK

Profile: 2250805R	Page No.: 52
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

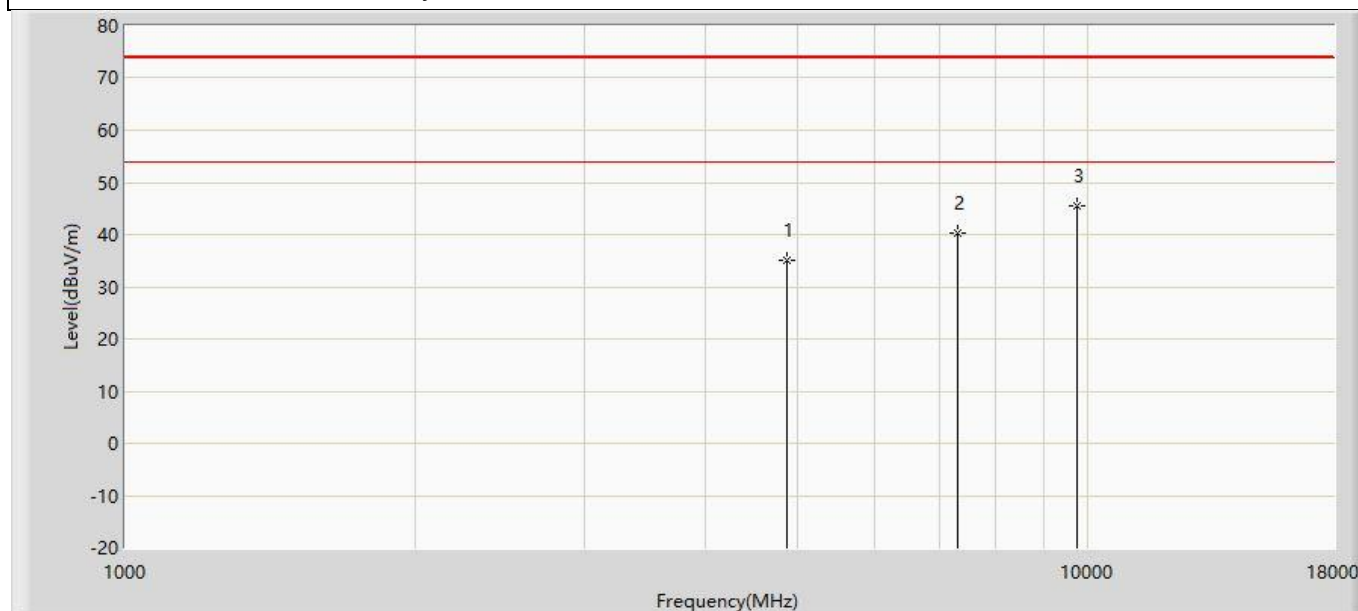


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.981	49.421	-39.019	74.000	-14.440	PK
2		7311.000	40.288	48.587	-33.712	74.000	-8.299	PK
3	*	9748.000	45.620	50.298	-28.380	74.000	-4.677	PK

Profile: 2250805R	Page No.: 53
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

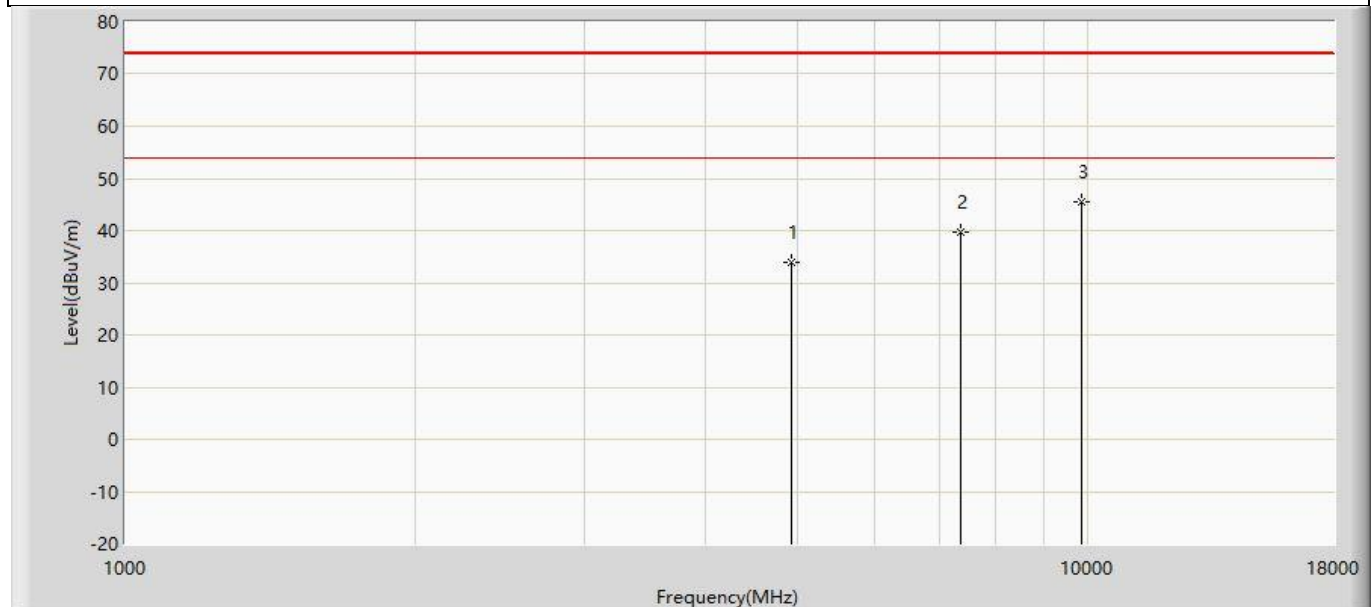


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	33.793	48.003	-40.207	74.000	-14.210	PK
2		7386.000	39.784	47.616	-34.216	74.000	-7.832	PK
3	*	9848.000	45.489	49.896	-28.511	74.000	-4.408	PK

Profile: 2250805R	Page No.: 54
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:54
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

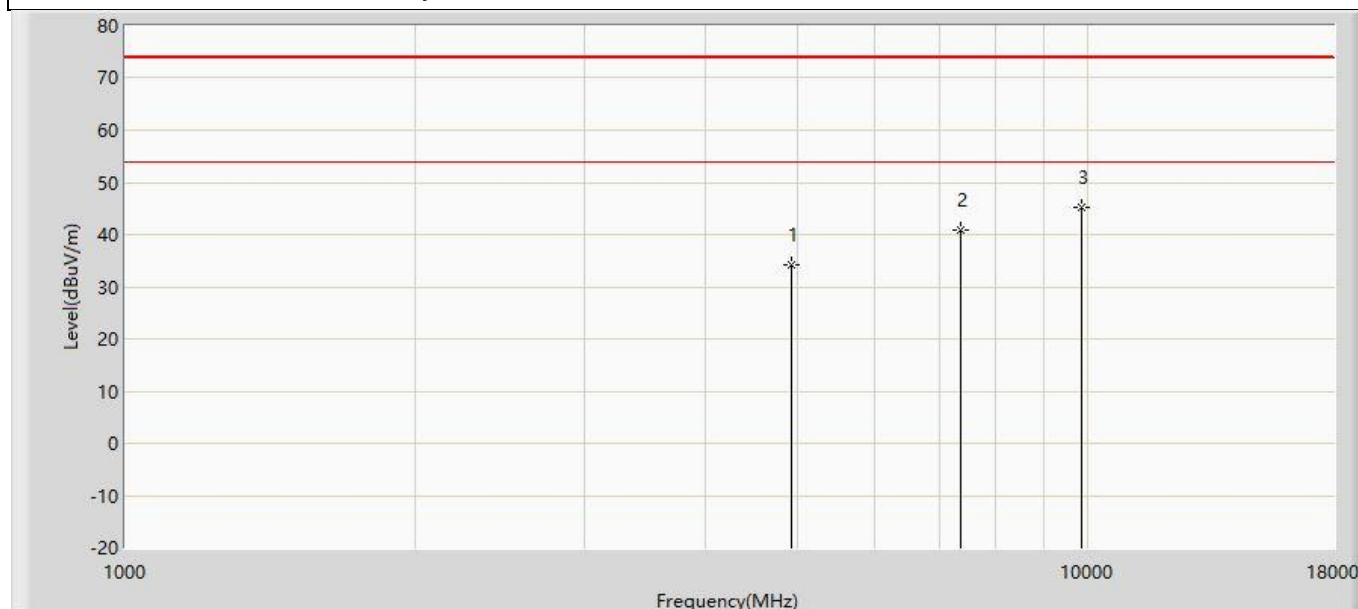


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.178	48.388	-39.822	74.000	-14.210	PK
2		7386.000	40.745	48.577	-33.255	74.000	-7.832	PK
3	*	9848.000	45.247	49.654	-28.753	74.000	-4.408	PK

Profile: 2250805R	Page No.: 55
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

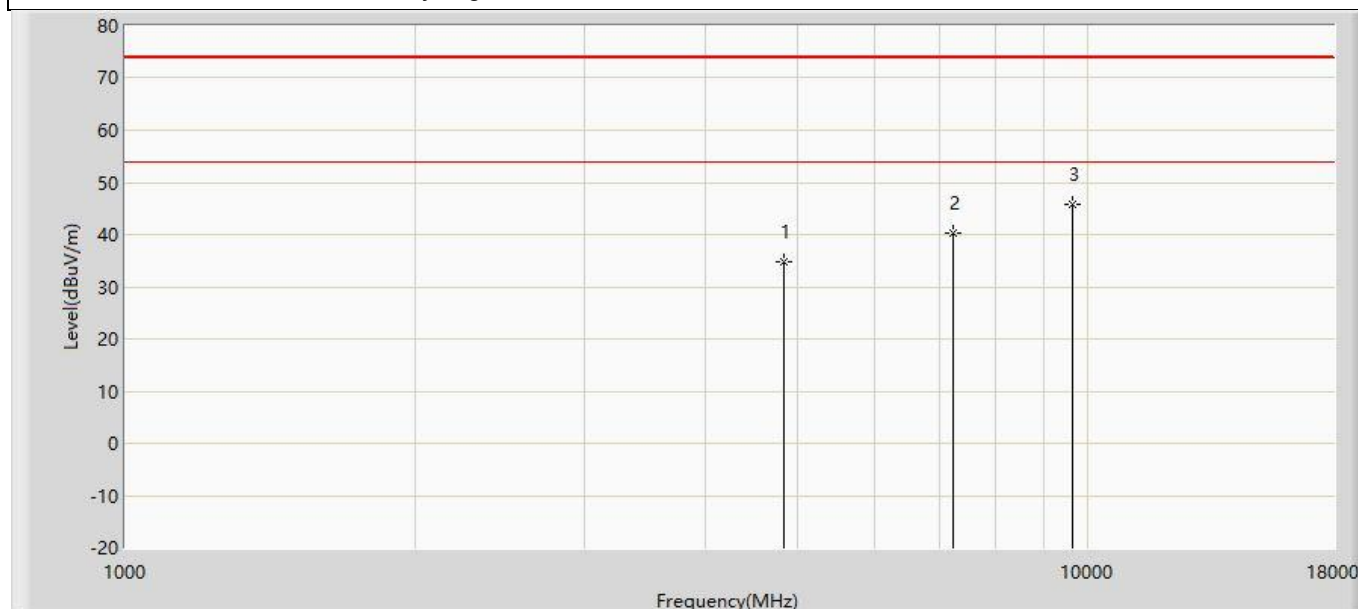


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.732	49.406	-39.268	74.000	-14.674	PK
2		7236.000	40.245	48.639	-33.755	74.000	-8.394	PK
3	*	9648.000	45.879	50.924	-28.121	74.000	-5.045	PK

Profile: 2250805R	Page No.: 56
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

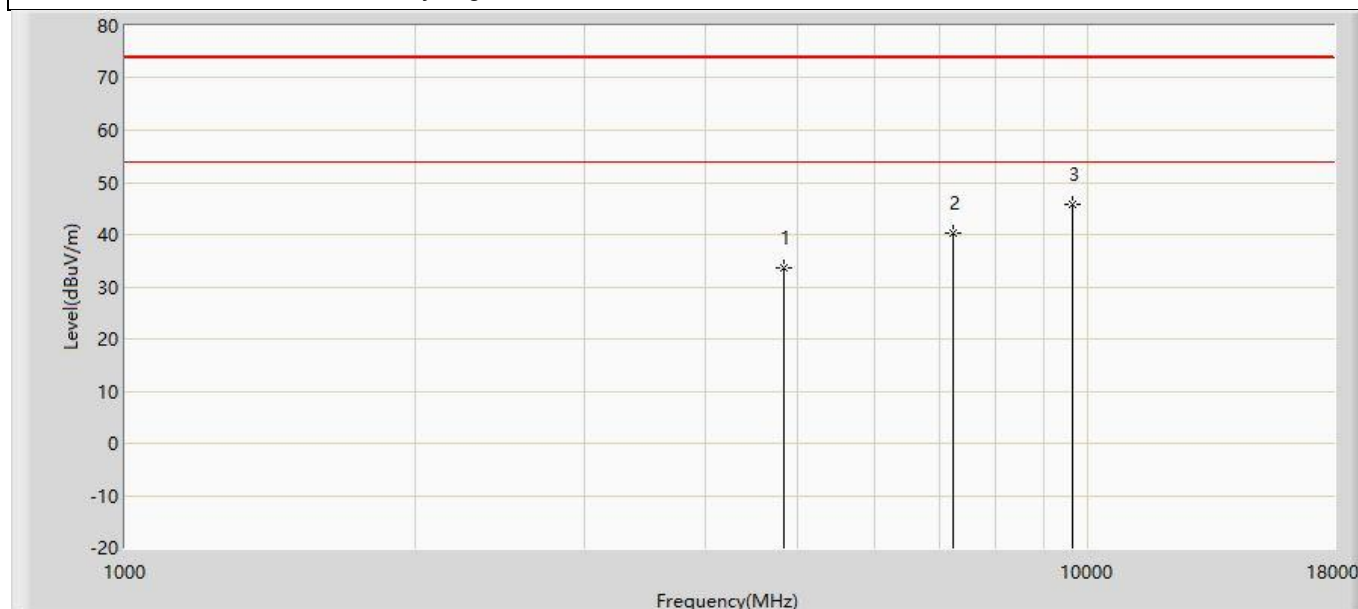


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.571	48.245	-40.429	74.000	-14.674	PK
2		7236.000	40.277	48.671	-33.723	74.000	-8.394	PK
3	*	9648.000	45.900	50.945	-28.100	74.000	-5.045	PK

Profile: 2250805R	Page No.: 57
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

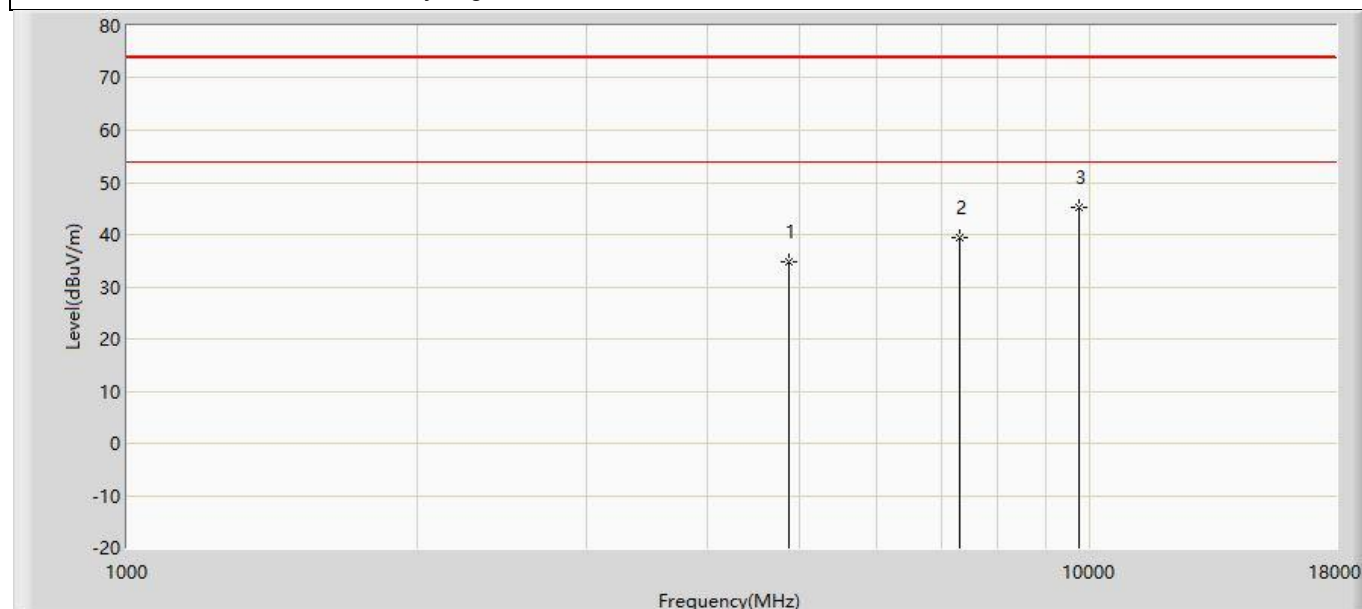


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.805	49.245	-39.195	74.000	-14.440	PK
2		7311.000	39.481	47.780	-34.519	74.000	-8.299	PK
3	*	9748.000	45.219	49.897	-28.781	74.000	-4.677	PK

Profile: 2250805R	Page No.: 58
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

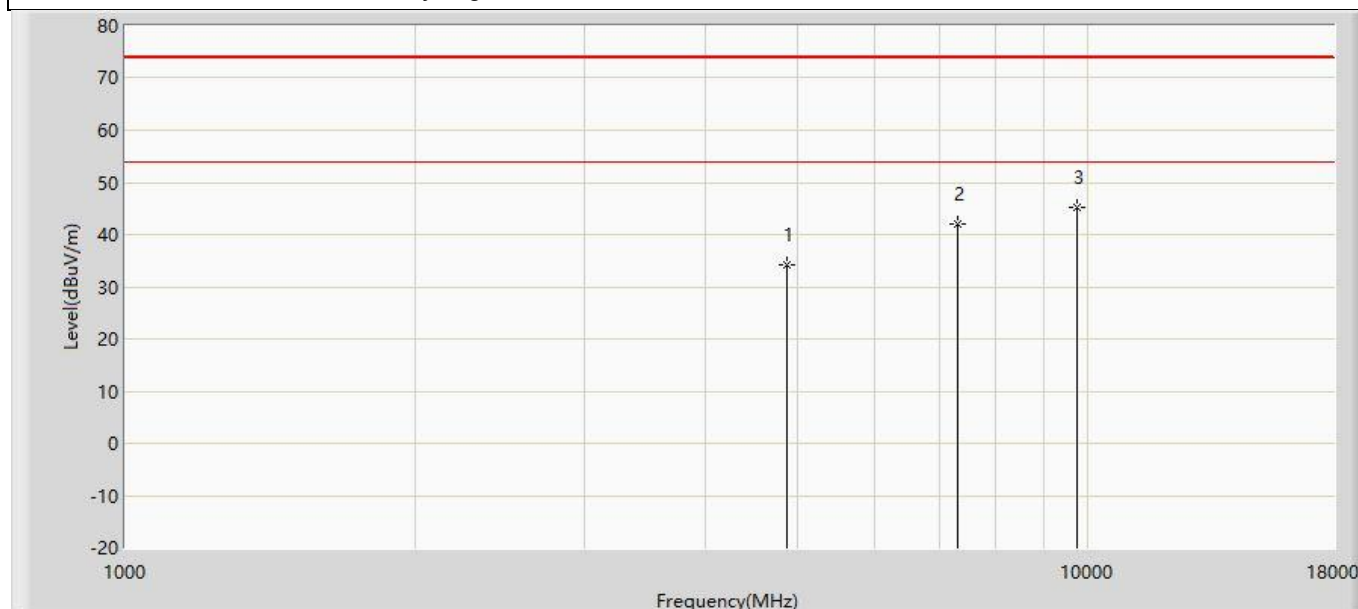


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.321	48.761	-39.679	74.000	-14.440	PK
2		7311.000	41.899	50.198	-32.101	74.000	-8.299	PK
3	*	9748.000	45.178	49.856	-28.822	74.000	-4.677	PK

Profile: 2250805R	Page No.: 59
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

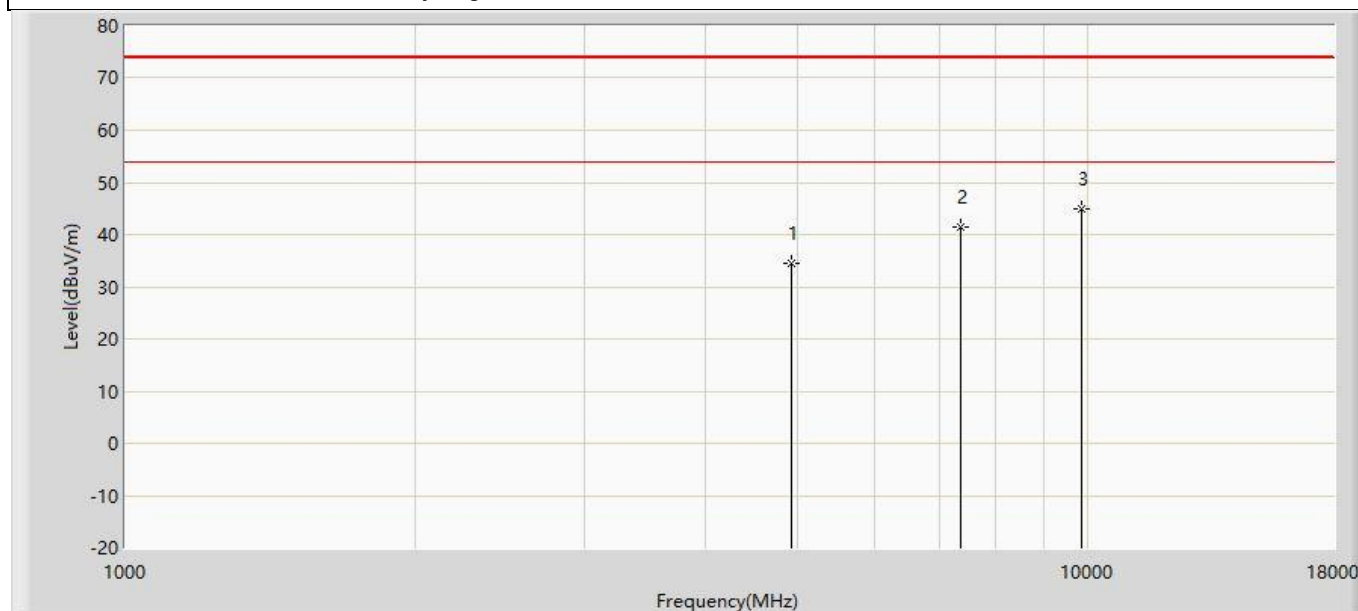


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.515	48.725	-39.485	74.000	-14.210	PK
2		7386.000	41.579	49.411	-32.421	74.000	-7.832	PK
3	*	9848.000	44.854	49.261	-29.146	74.000	-4.408	PK

Profile: 2250805R	Page No.: 60
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

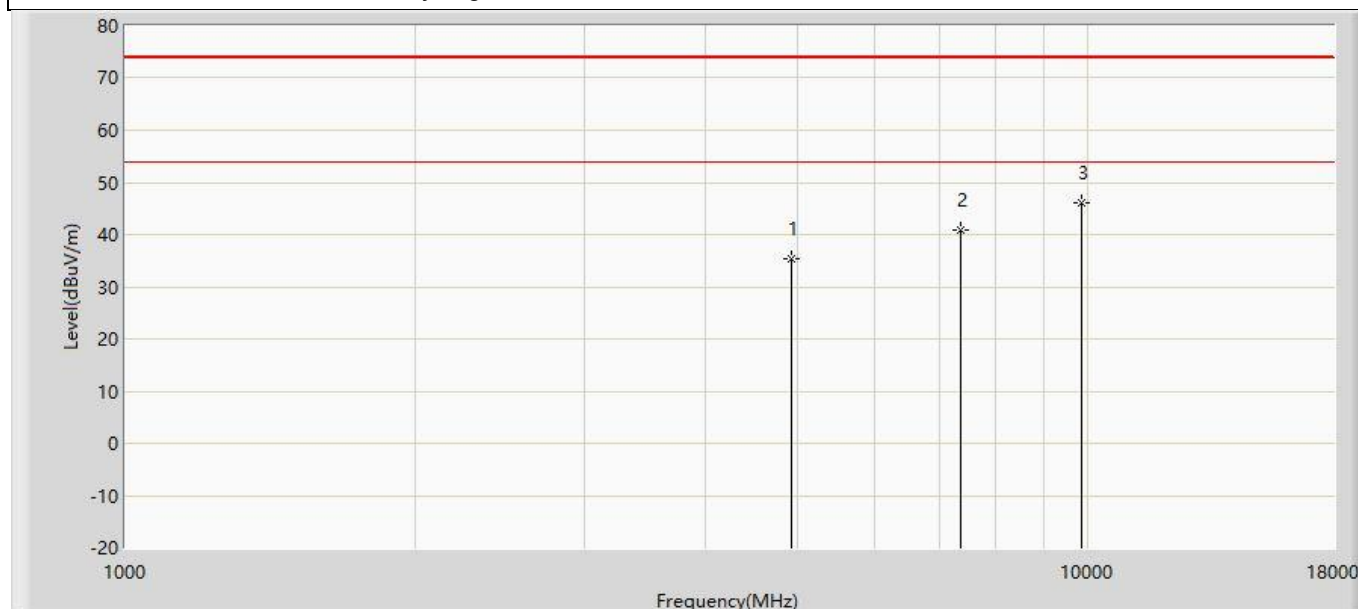


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.504	49.714	-38.496	74.000	-14.210	PK
2		7386.000	40.846	48.678	-33.154	74.000	-7.832	PK
3	*	9848.000	46.106	50.513	-27.894	74.000	-4.408	PK

Profile: 2250805R	Page No.: 61
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

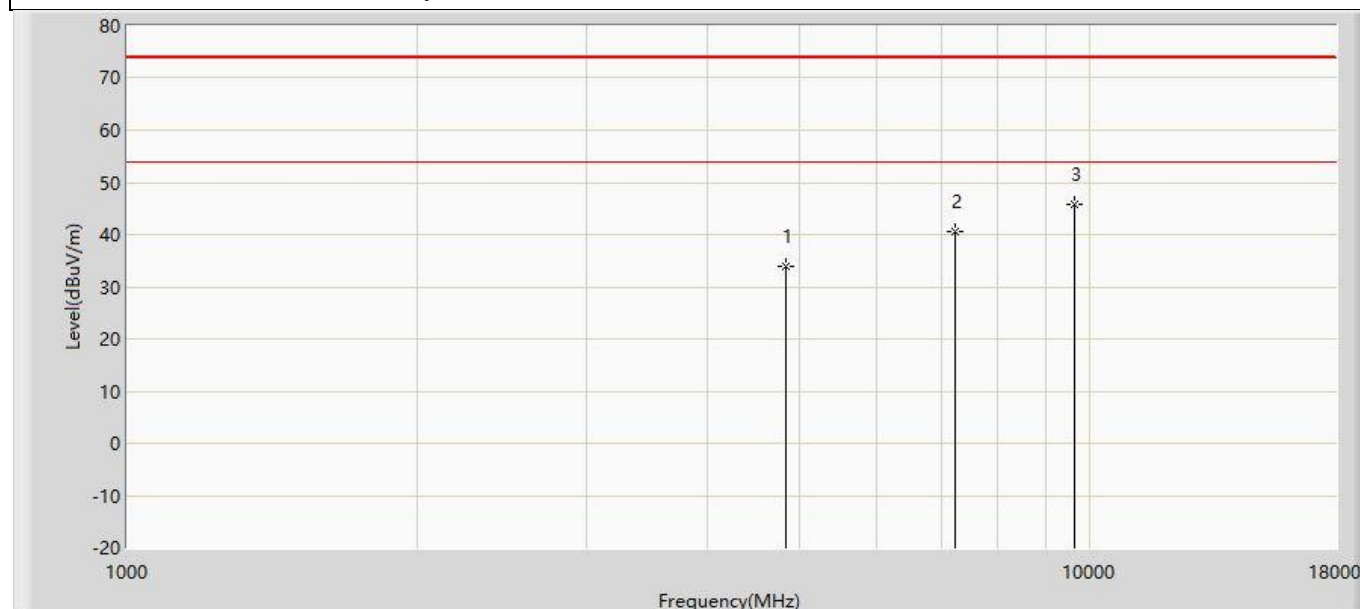


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.237	48.911	-39.763	74.000	-14.674	PK
2		7236.000	40.329	48.723	-33.671	74.000	-8.394	PK
3	*	9648.000	45.917	50.962	-28.083	74.000	-5.045	PK

Profile: 2250805R	Page No.: 62
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

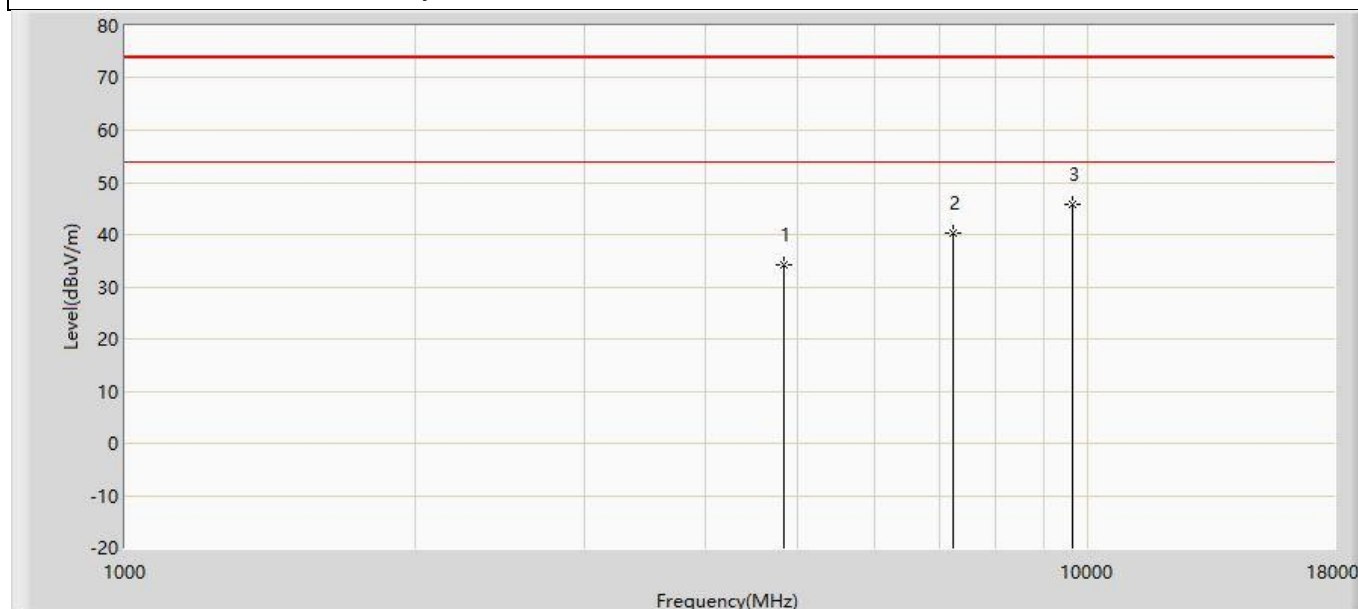


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.322	48.996	-39.678	74.000	-14.674	PK
2		7236.000	40.361	48.755	-33.639	74.000	-8.394	PK
3	*	9648.000	45.930	50.975	-28.070	74.000	-5.045	PK

Profile: 2250805R	Page No.: 63
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

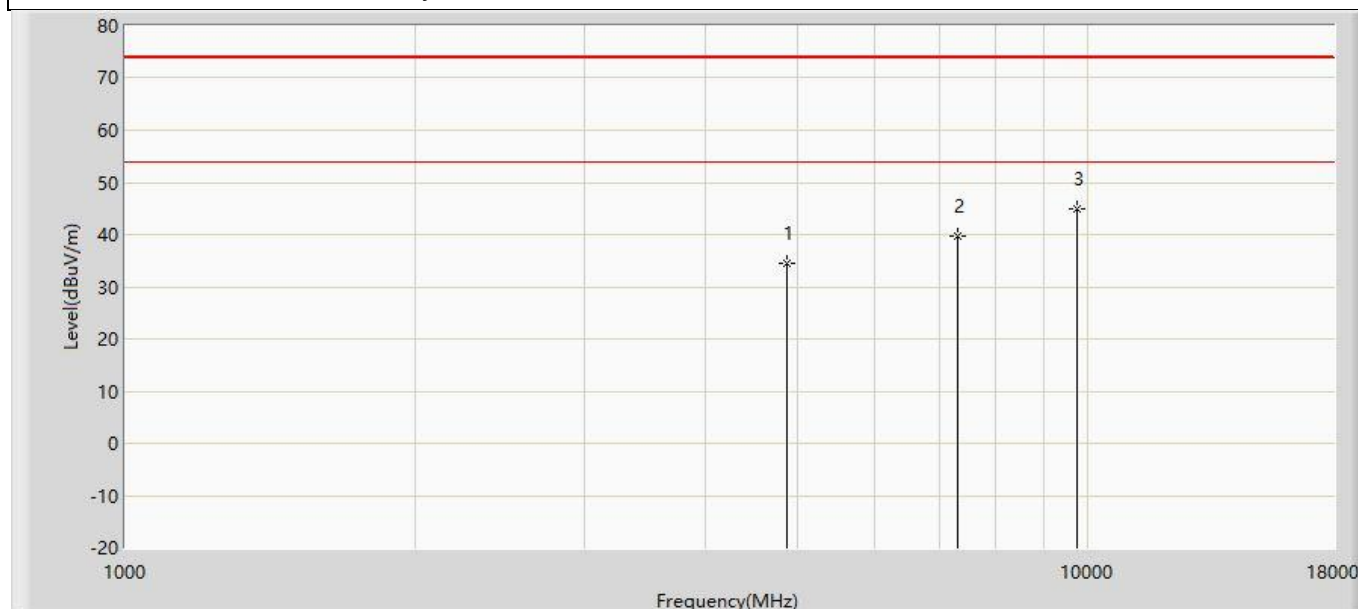


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.615	49.055	-39.385	74.000	-14.440	PK
2		7311.000	39.603	47.902	-34.397	74.000	-8.299	PK
3	*	9748.000	44.851	49.529	-29.149	74.000	-4.677	PK

Profile: 2250805R	Page No.: 64
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

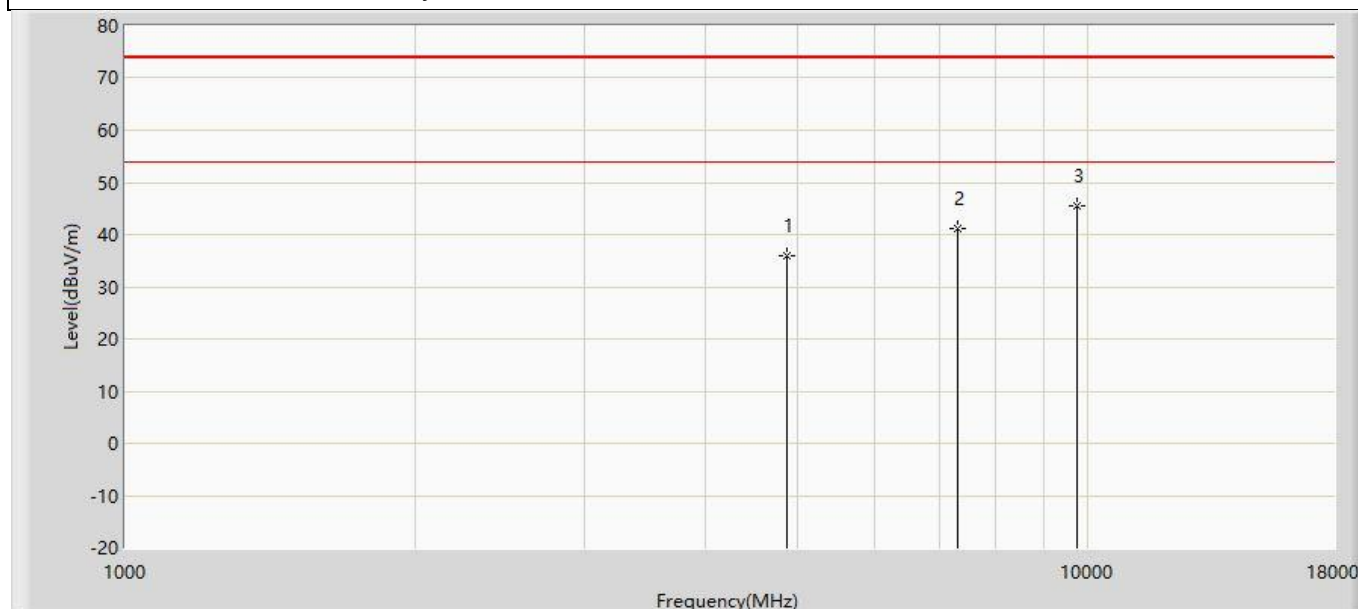


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.927	50.367	-38.073	74.000	-14.440	PK
2		7311.000	41.083	49.382	-32.917	74.000	-8.299	PK
3	*	9748.000	45.458	50.136	-28.542	74.000	-4.677	PK

Profile: 2250805R	Page No.: 65
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

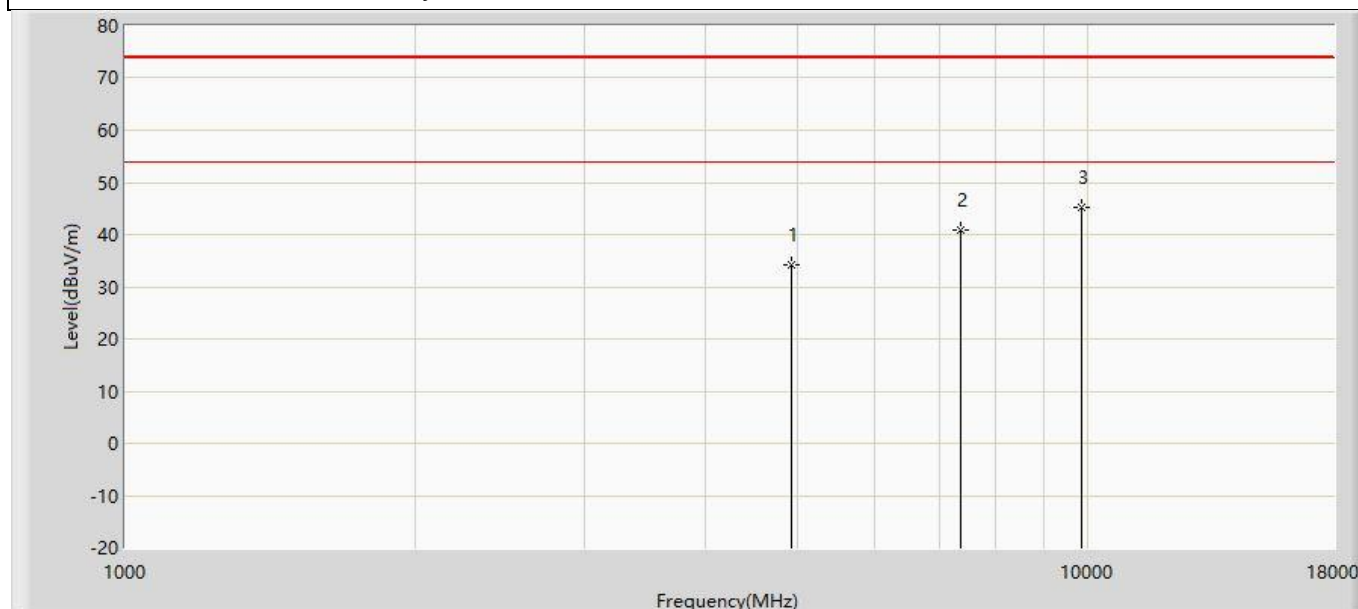


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.169	48.379	-39.831	74.000	-14.210	PK
2		7386.000	40.919	48.751	-33.081	74.000	-7.832	PK
3	*	9848.000	45.209	49.616	-28.791	74.000	-4.408	PK

Profile: 2250805R	Page No.: 66
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

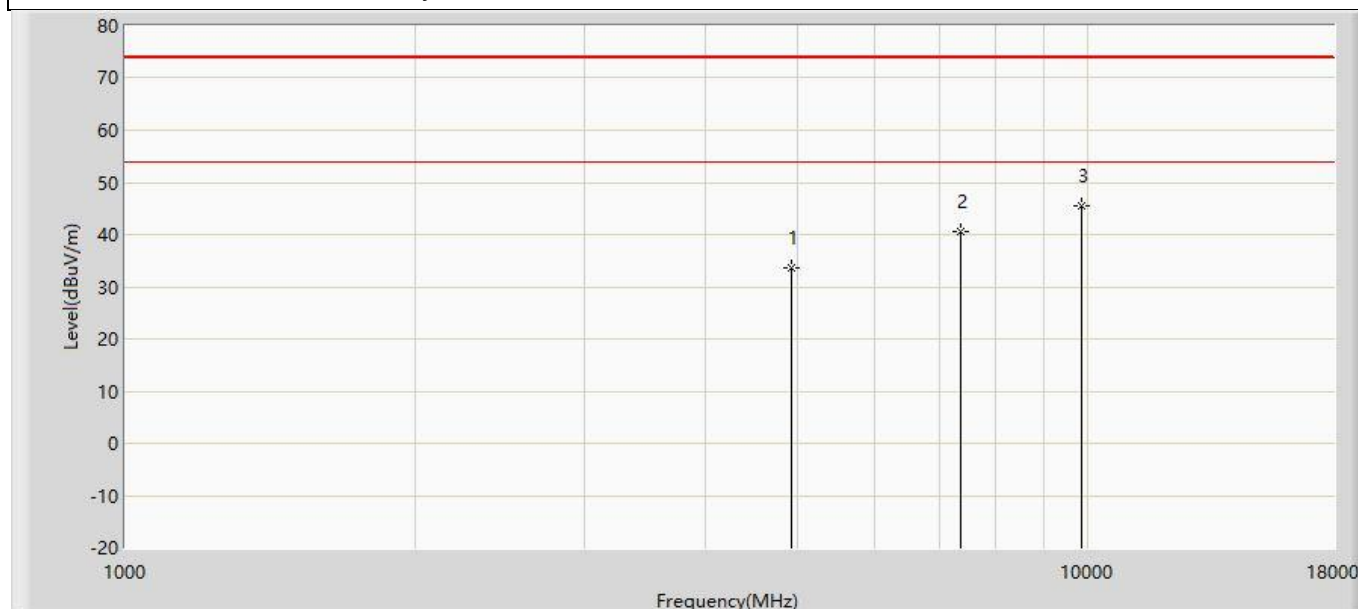


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	33.765	47.975	-40.235	74.000	-14.210	PK
2		7386.000	40.575	48.407	-33.425	74.000	-7.832	PK
3	*	9848.000	45.644	50.051	-28.356	74.000	-4.408	PK

Profile: 2250805R	Page No.: 67
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

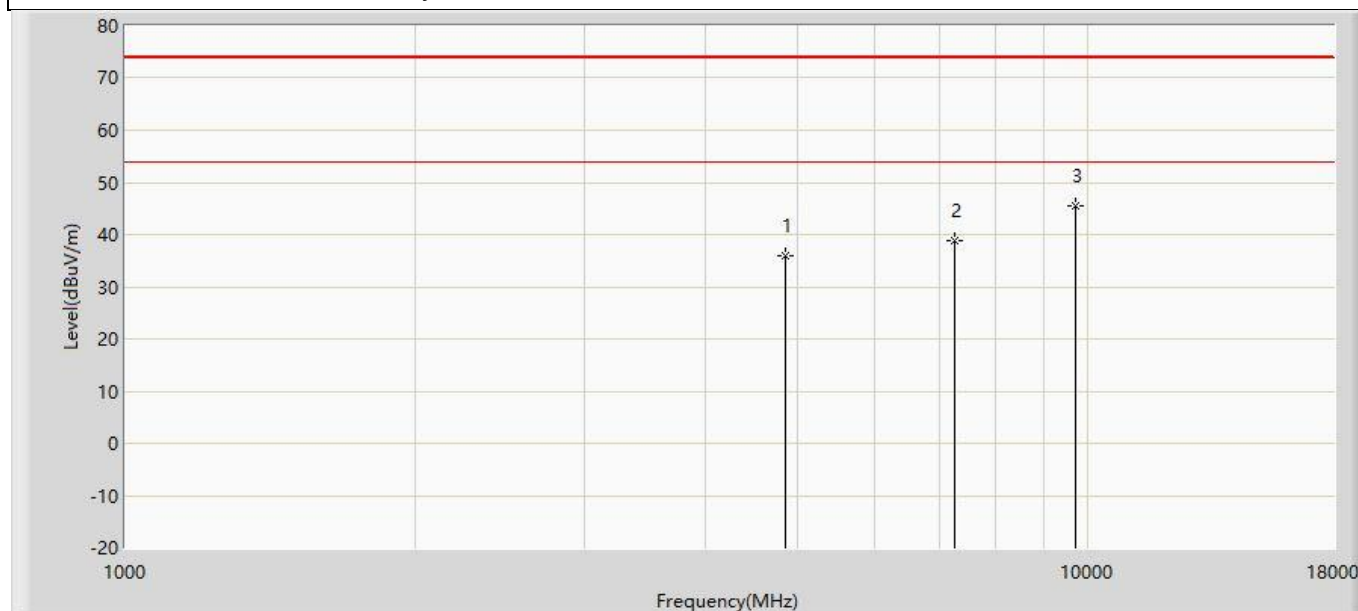


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.010	50.634	-37.990	74.000	-14.623	PK
2		7266.000	38.946	47.330	-35.054	74.000	-8.384	PK
3	*	9688.000	45.419	50.083	-28.581	74.000	-4.663	PK

Profile: 2250805R	Page No.: 68
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

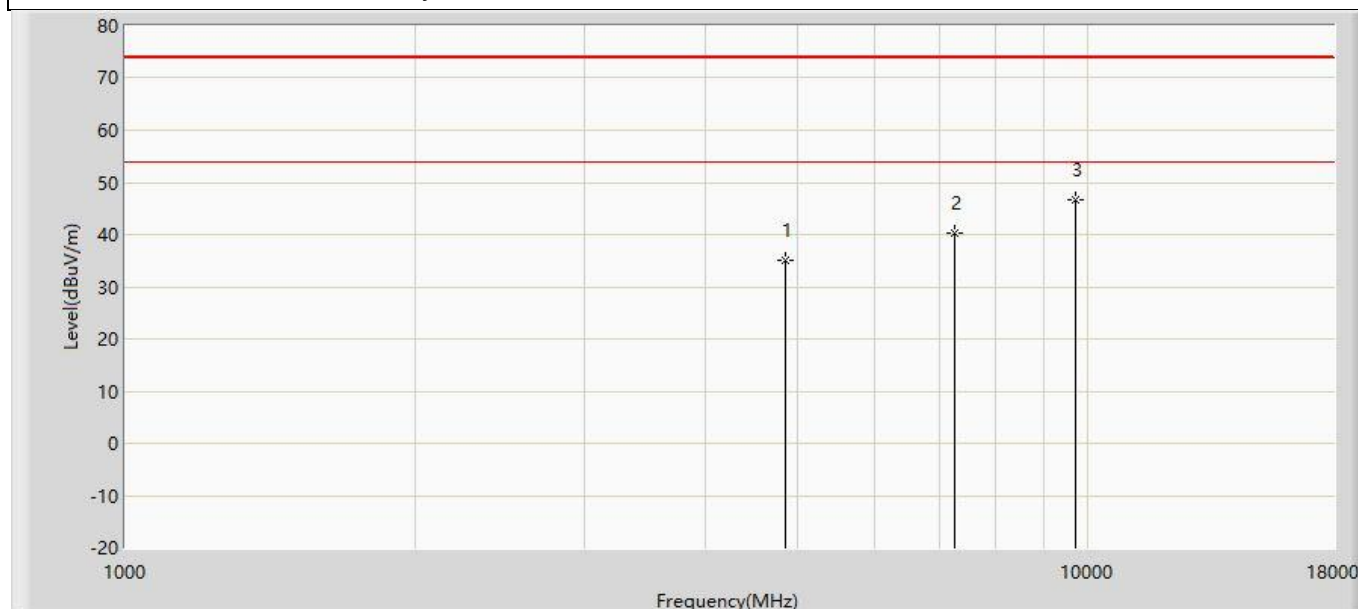


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.082	49.706	-38.918	74.000	-14.623	PK
2		7266.000	40.216	48.600	-33.784	74.000	-8.384	PK
3	*	9688.000	46.577	51.241	-27.423	74.000	-4.663	PK

Profile: 2250805R	Page No.: 69
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:55
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

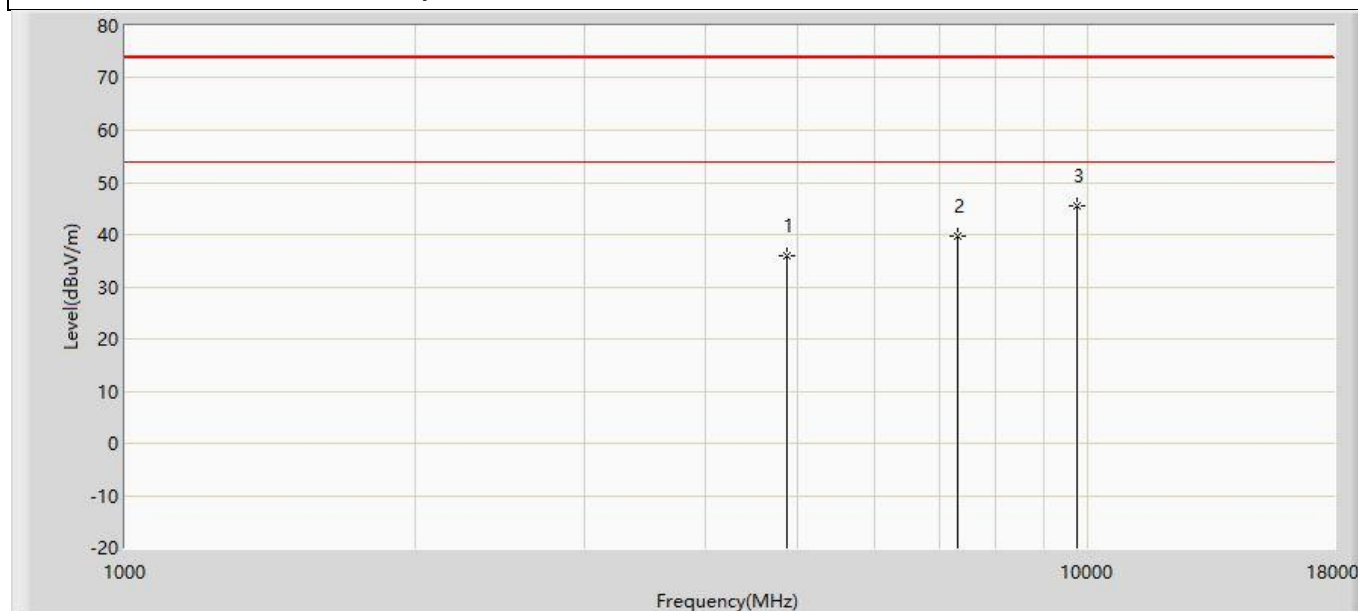


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.935	50.375	-38.065	74.000	-14.440	PK
2		7311.000	39.854	48.153	-34.146	74.000	-8.299	PK
3	*	9748.000	45.542	50.220	-28.458	74.000	-4.677	PK

Profile: 2250805R	Page No.: 70
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:56
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

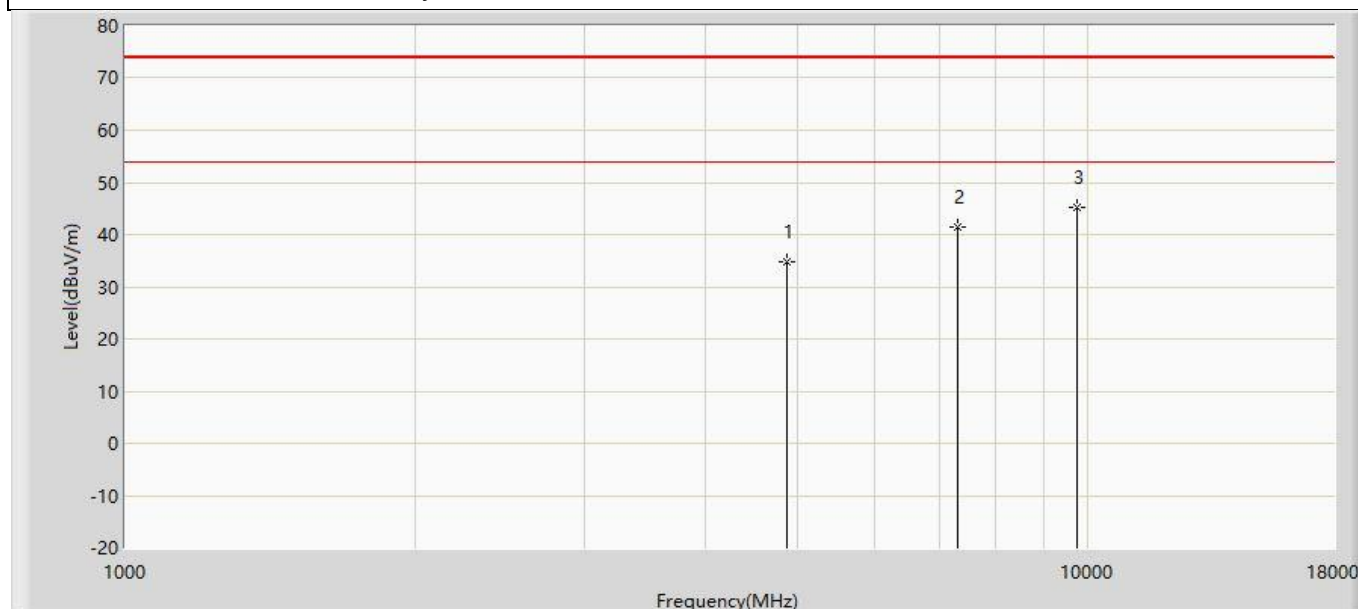


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.681	49.121	-39.319	74.000	-14.440	PK
2		7311.000	41.319	49.618	-32.681	74.000	-8.299	PK
3	*	9748.000	45.181	49.859	-28.819	74.000	-4.677	PK

Profile: 2250805R	Page No.: 71
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:56
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

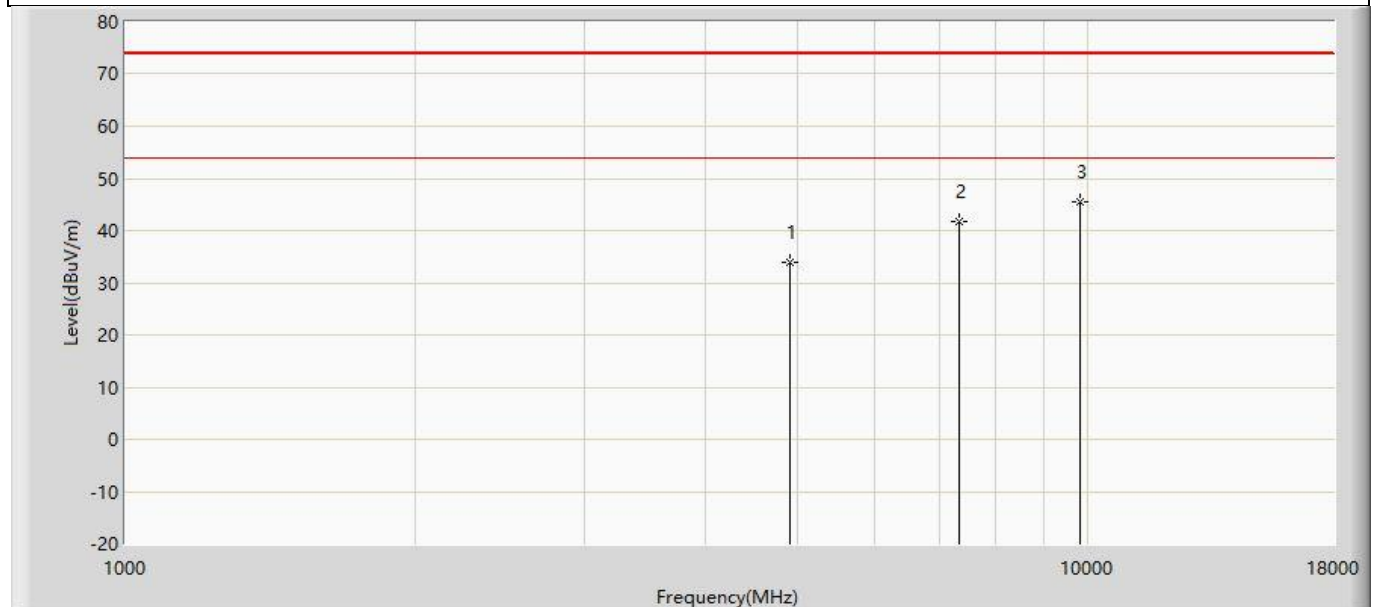


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	33.933	48.169	-40.067	74.000	-14.236	PK
2		7356.000	41.807	49.733	-32.193	74.000	-7.927	PK
3	*	9808.000	45.374	49.733	-28.626	74.000	-4.359	PK

Profile: 2250805R	Page No.: 72
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:56
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

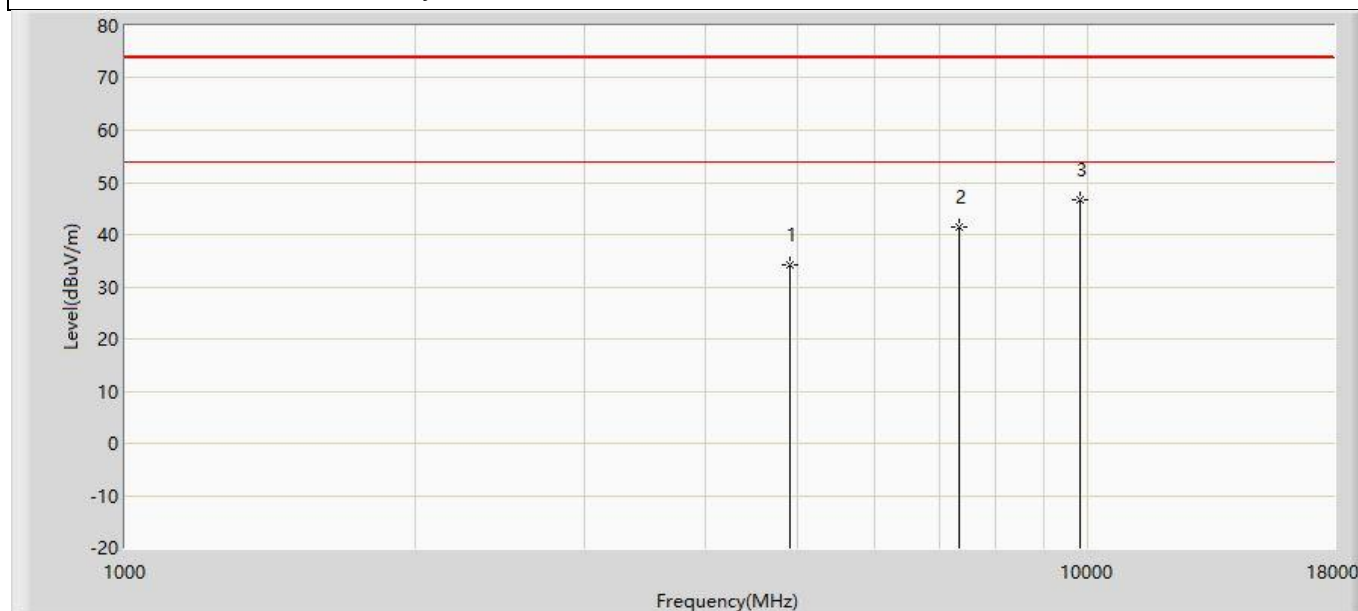


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	34.292	48.528	-39.708	74.000	-14.236	PK
2		7356.000	41.410	49.336	-32.590	74.000	-7.927	PK
3	*	9808.000	46.612	50.971	-27.388	74.000	-4.359	PK

Profile: 2250805R	Page No.: 85
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:56
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

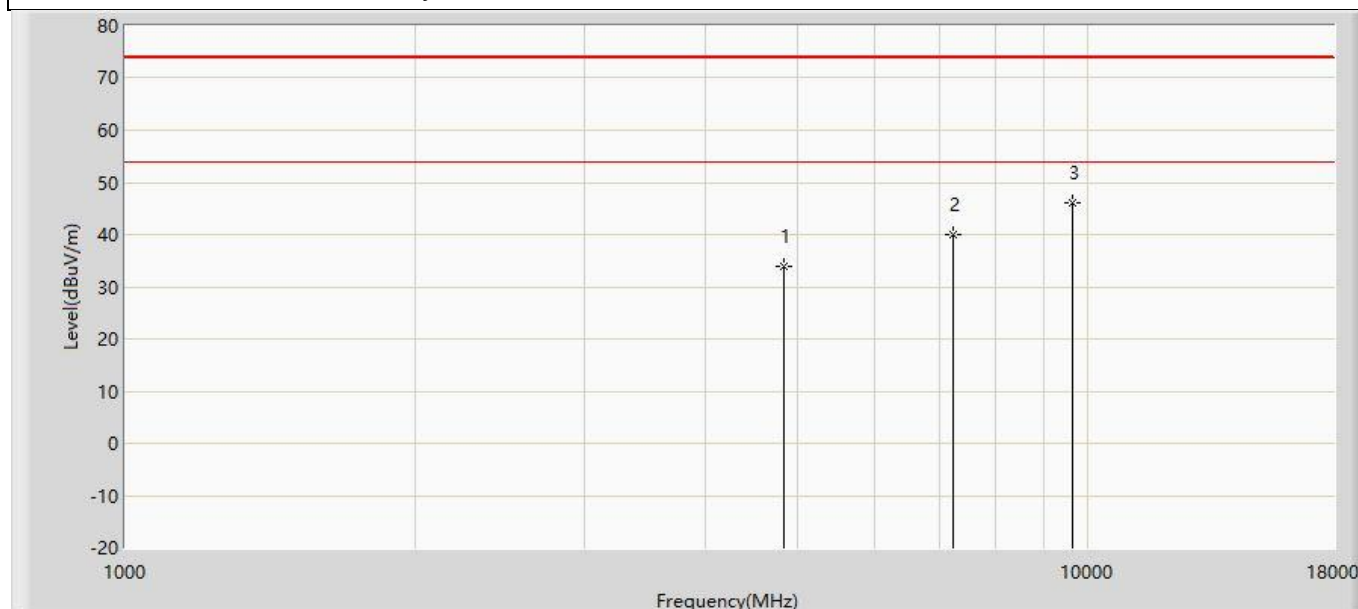


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.900	48.574	-40.100	74.000	-14.674	PK
2		7236.000	39.868	48.262	-34.132	74.000	-8.394	PK
3	*	9648.000	45.967	51.012	-28.033	74.000	-5.045	PK

Profile: 2250805R	Page No.: 86
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

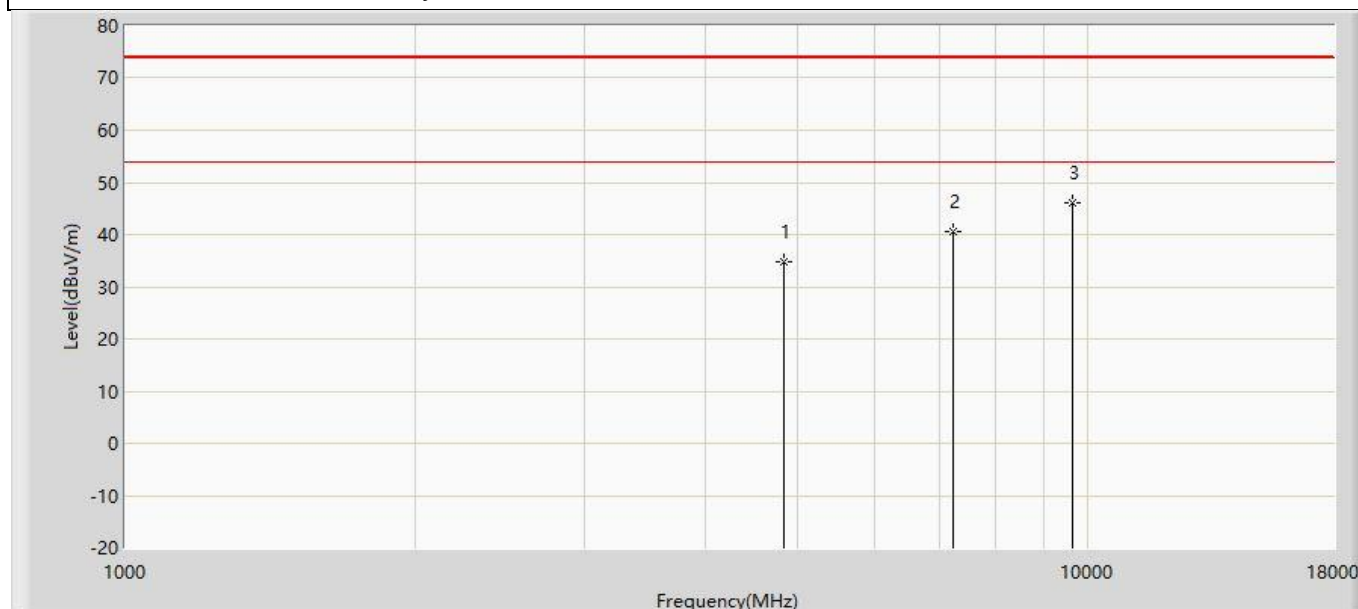


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.778	49.452	-39.222	74.000	-14.674	PK
2		7236.000	40.557	48.951	-33.443	74.000	-8.394	PK
3	*	9648.000	46.015	51.060	-27.985	74.000	-5.045	PK

Profile: 2250805R	Page No.: 87
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

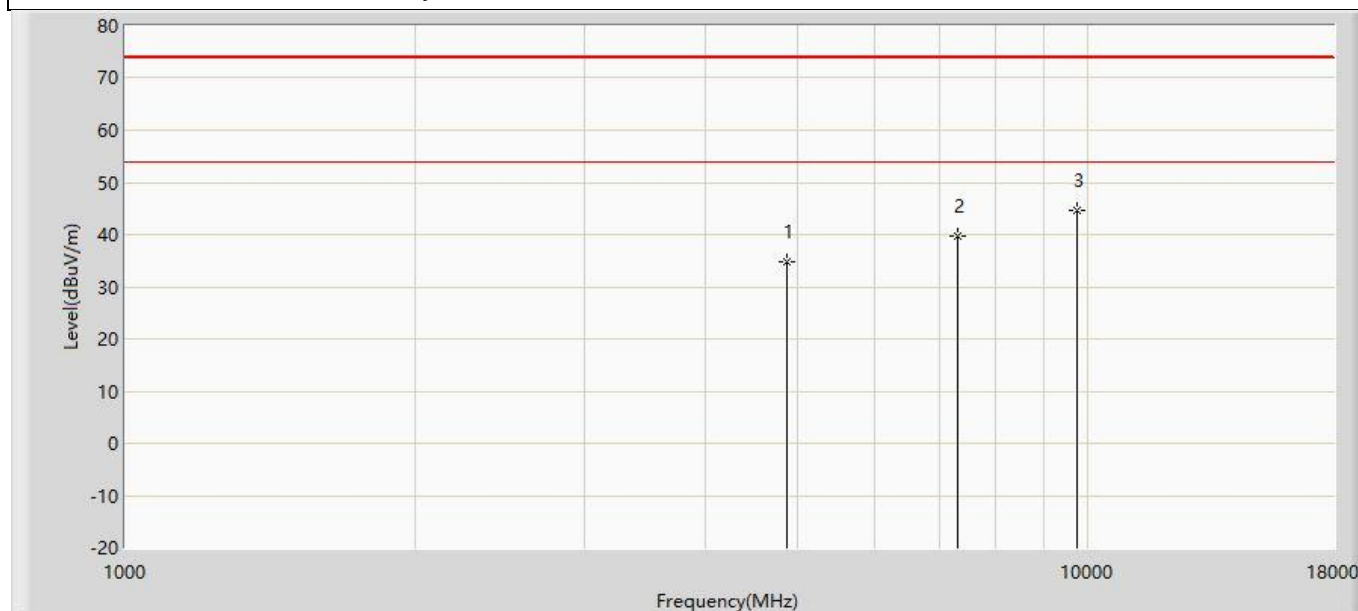


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.856	49.296	-39.144	74.000	-14.440	PK
2		7311.000	39.837	48.136	-34.163	74.000	-8.299	PK
3	*	9748.000	44.762	49.440	-29.238	74.000	-4.677	PK

Profile: 2250805R	Page No.: 88
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

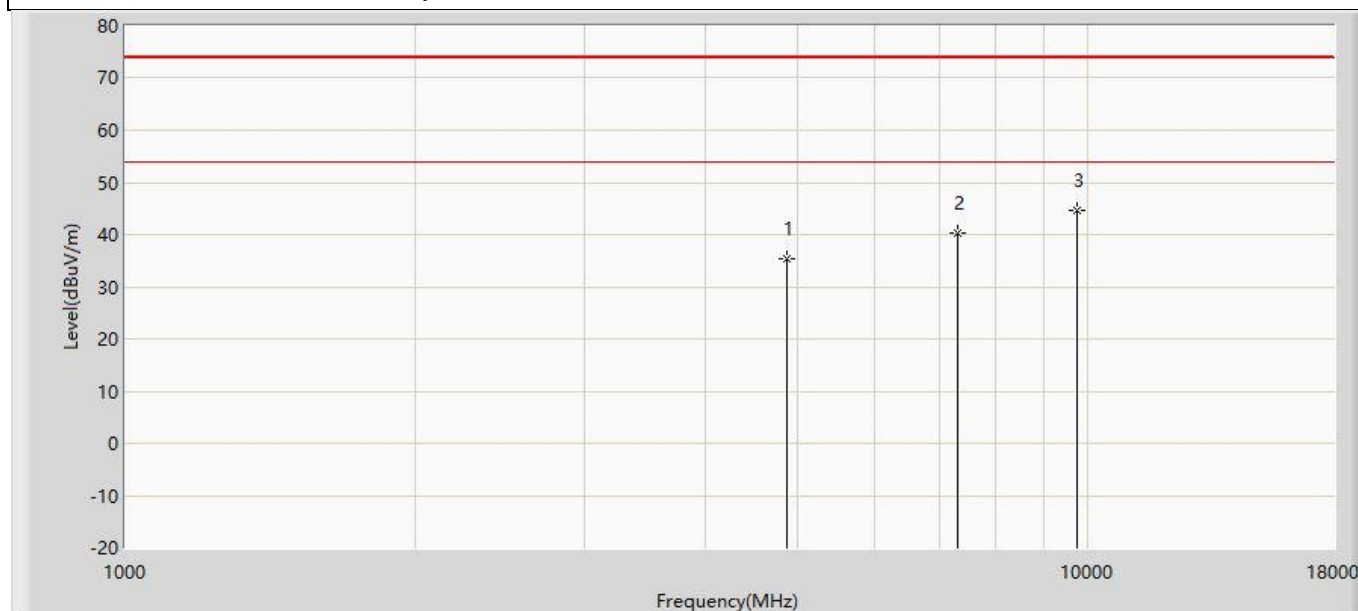


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.352	49.792	-38.648	74.000	-14.440	PK
2		7311.000	40.252	48.551	-33.748	74.000	-8.299	PK
3	*	9748.000	44.656	49.334	-29.344	74.000	-4.677	PK

Profile: 2250805R	Page No.: 89
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

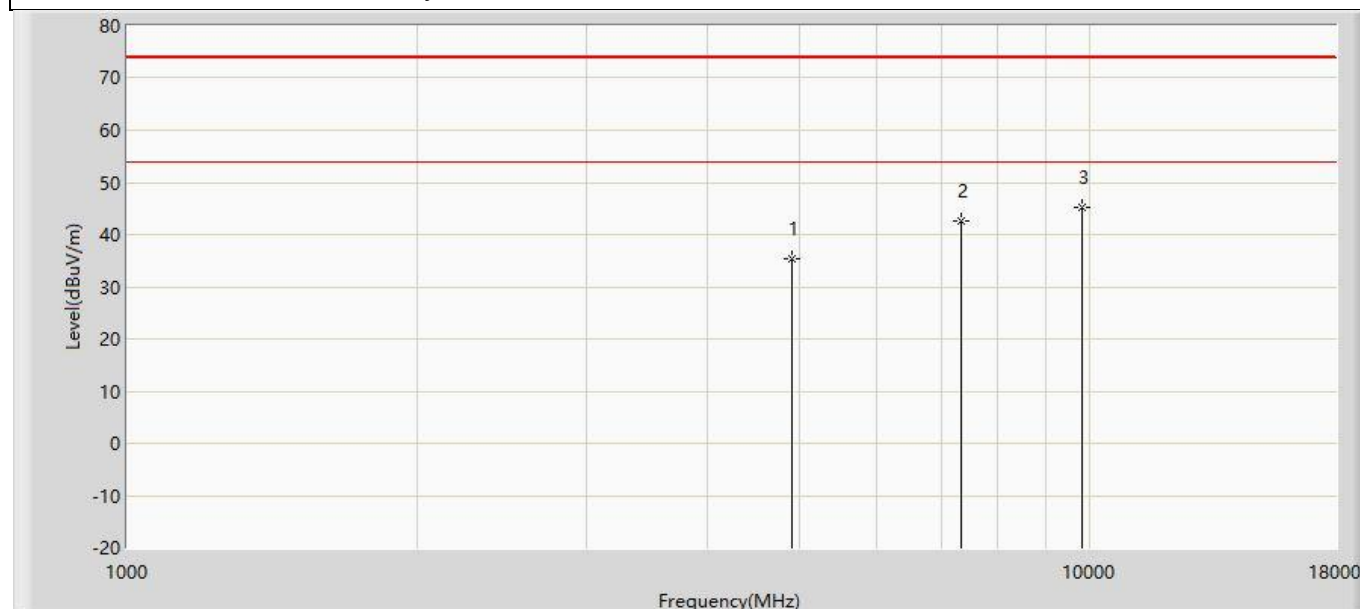


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	35.261	49.497	-38.739	74.000	-14.236	PK
2		7356.000	42.640	50.566	-31.360	74.000	-7.927	PK
3	*	9808.000	45.265	49.624	-28.735	74.000	-4.359	PK

Profile: 2250805R	Page No.: 90
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

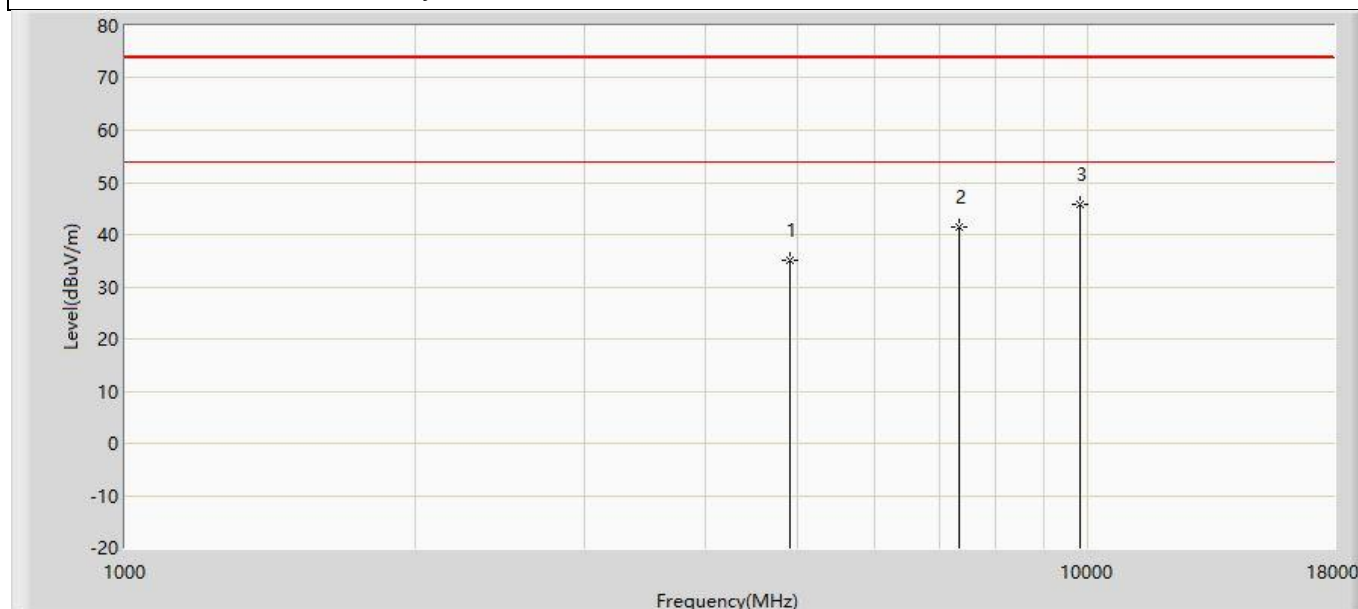


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	34.984	49.220	-39.016	74.000	-14.236	PK
2		7356.000	41.431	49.357	-32.569	74.000	-7.927	PK
3	*	9808.000	45.870	50.229	-28.130	74.000	-4.359	PK

Profile: 2250805R	Page No.: 91
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

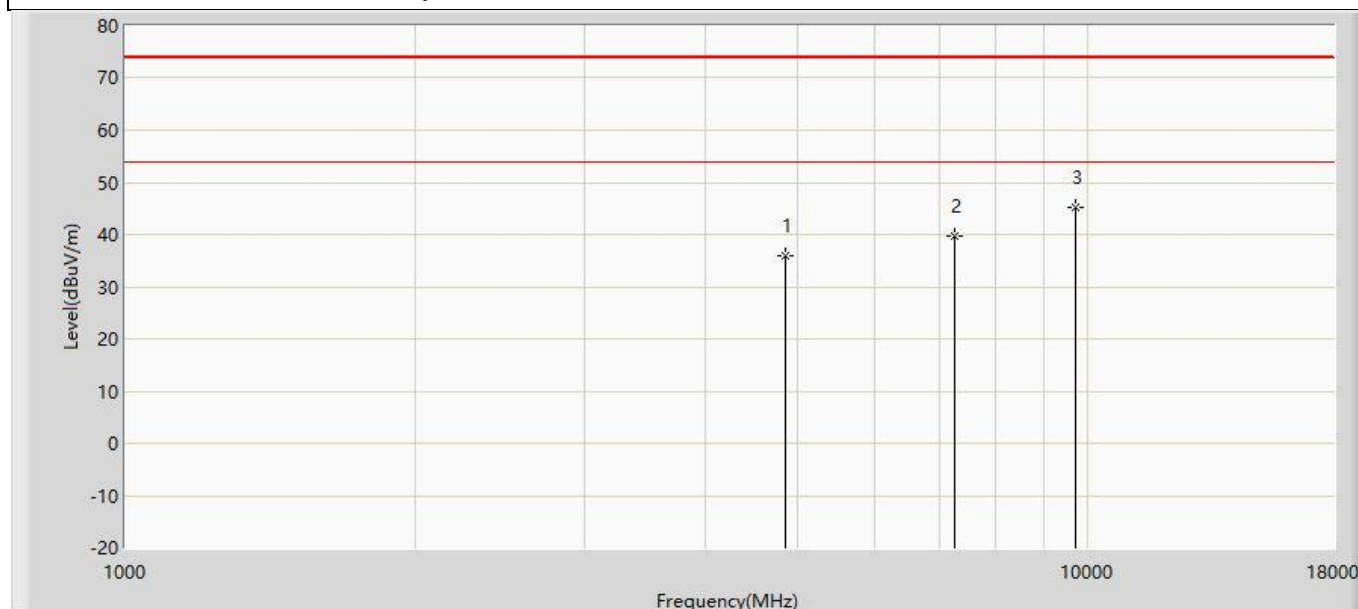


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.856	50.480	-38.144	74.000	-14.623	PK
2		7266.000	39.566	47.950	-34.434	74.000	-8.384	PK
3	*	9688.000	45.262	49.926	-28.738	74.000	-4.663	PK

Profile: 2250805R	Page No.: 92
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

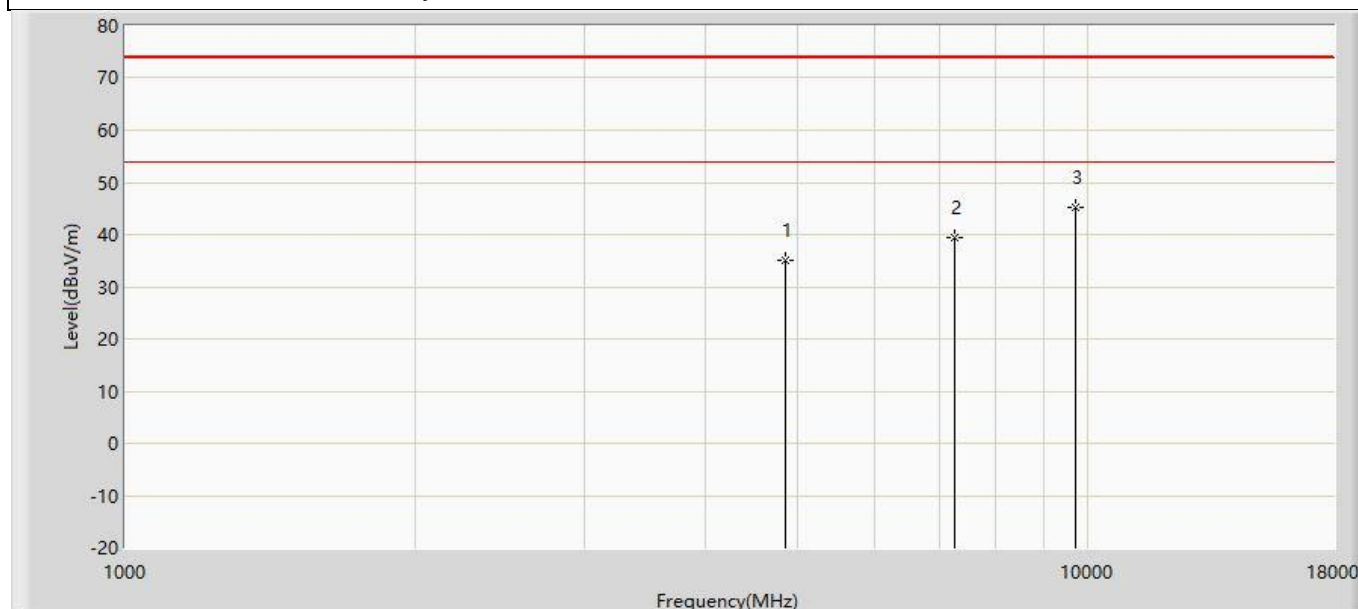


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.212	49.836	-38.788	74.000	-14.623	PK
2		7266.000	39.403	47.787	-34.597	74.000	-8.384	PK
3	*	9688.000	45.146	49.810	-28.854	74.000	-4.663	PK

Profile: 2250805R	Page No.: 93
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

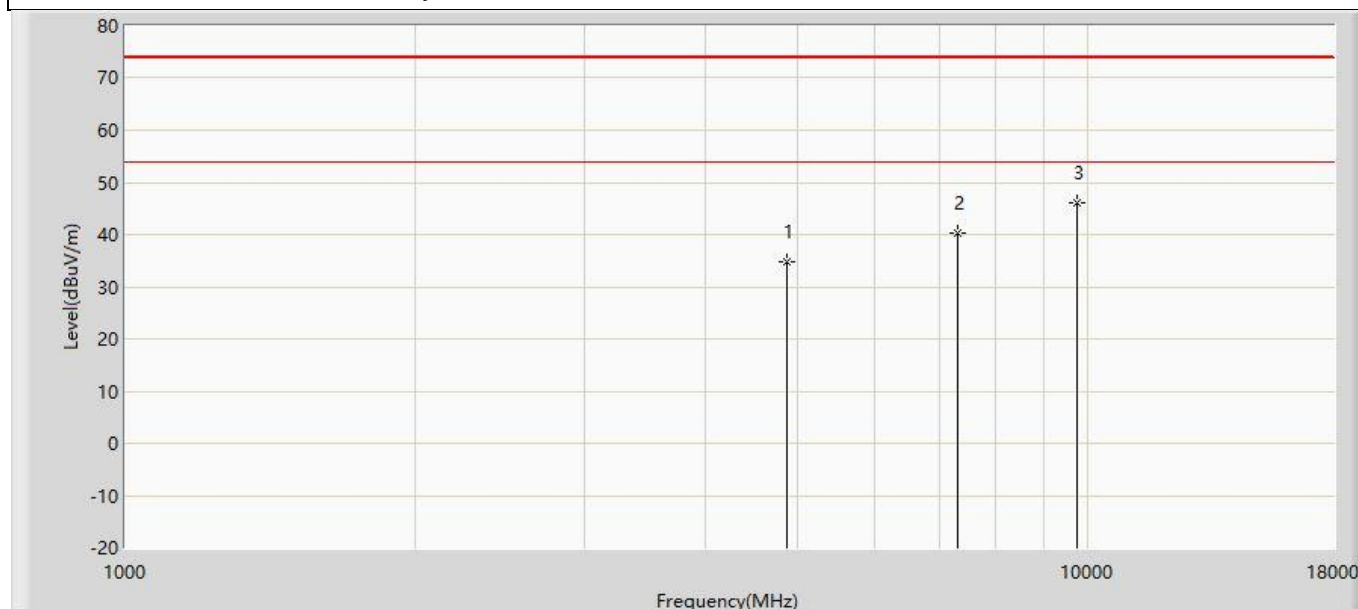


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.695	49.135	-39.305	74.000	-14.440	PK
2		7311.000	40.211	48.510	-33.789	74.000	-8.299	PK
3	*	9748.000	46.192	50.870	-27.808	74.000	-4.677	PK

Profile: 2250805R	Page No.: 94
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

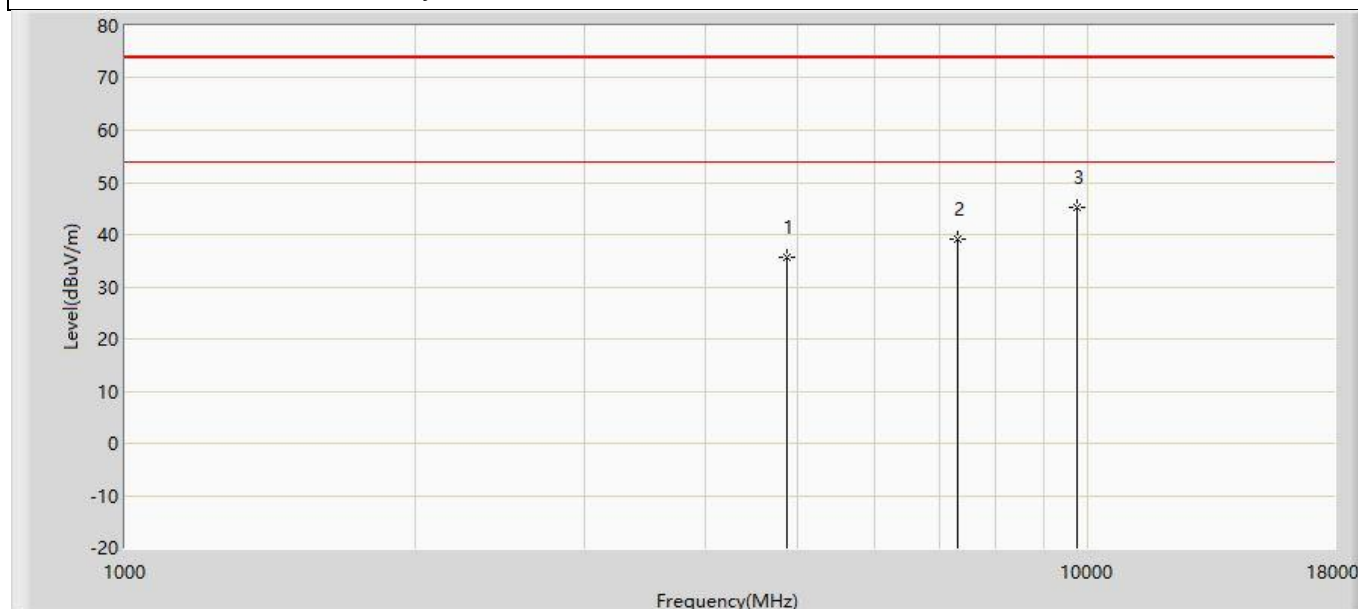


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.678	50.118	-38.322	74.000	-14.440	PK
2		7311.000	39.103	47.402	-34.897	74.000	-8.299	PK
3	*	9748.000	45.119	49.797	-28.881	74.000	-4.677	PK

Profile: 2250805R	Page No.: 95
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

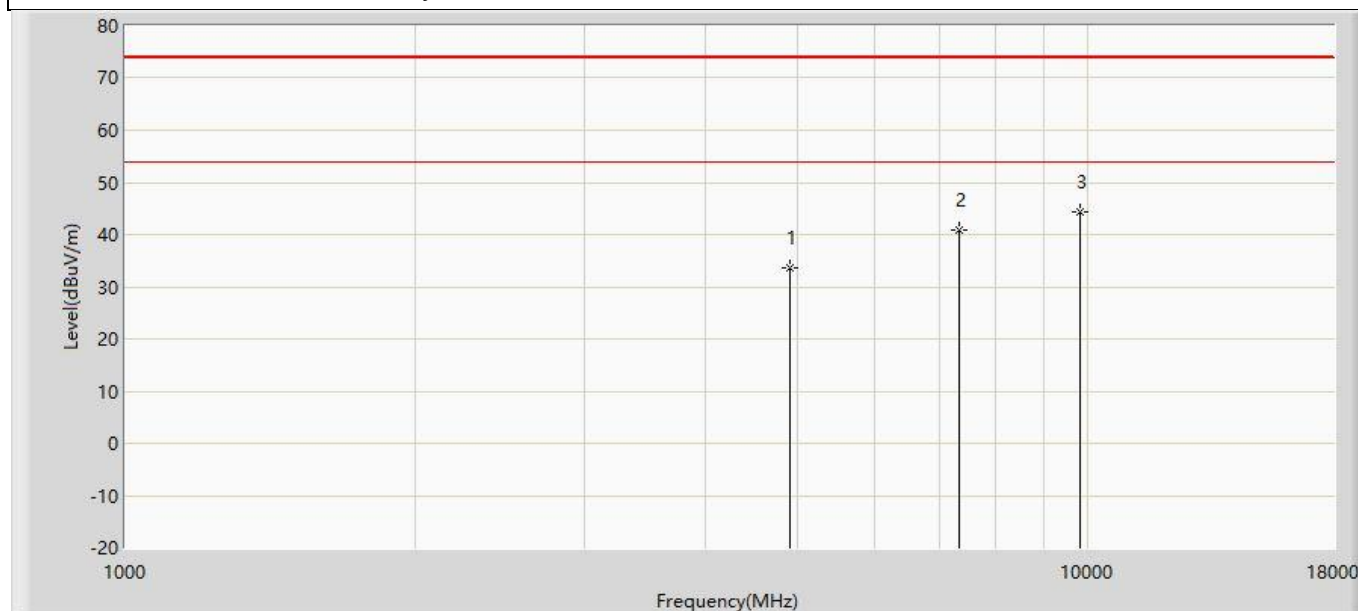

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	33.555	47.791	-40.445	74.000	-14.236	PK
2		7356.000	40.956	48.882	-33.044	74.000	-7.927	PK
3	*	9808.000	44.403	48.762	-29.597	74.000	-4.359	PK


Profile: 2250805R	Page No.: 96
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 02:57
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

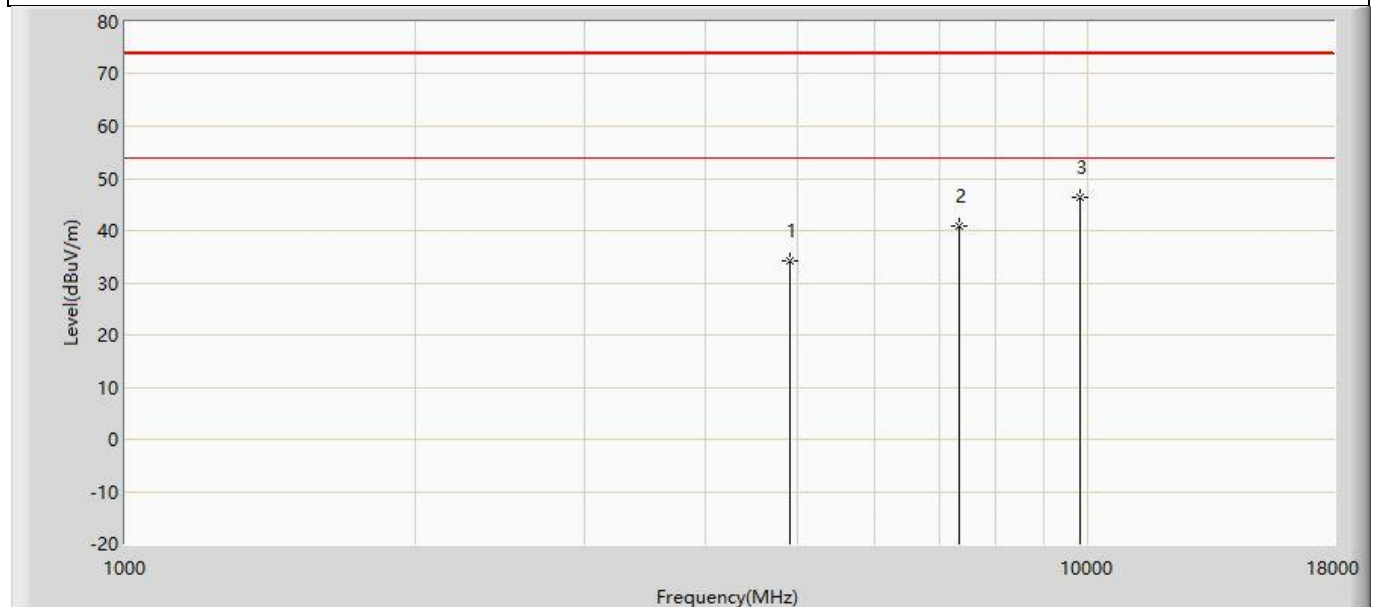

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	34.249	48.485	-39.751	74.000	-14.236	PK
2		7356.000	40.840	48.766	-33.160	74.000	-7.927	PK
3	*	9808.000	46.250	50.609	-27.750	74.000	-4.359	PK


SISO Antenna2:

Profile: 2250805R	Page No.: 49
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

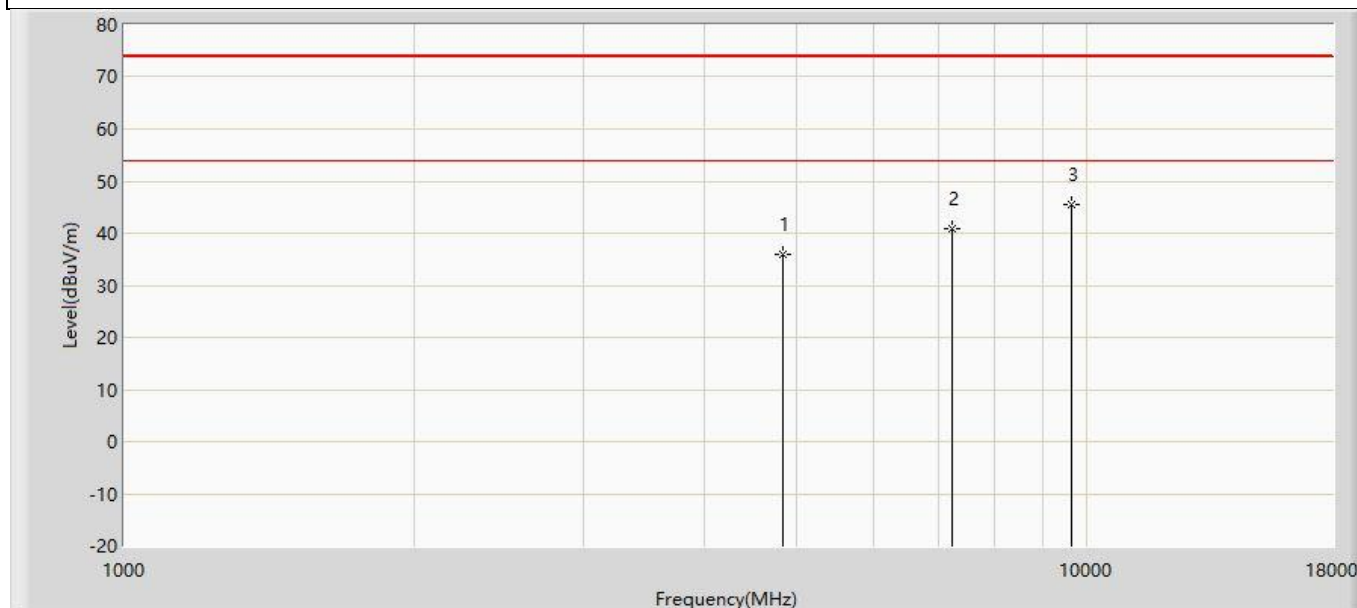


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	36.061	50.735	-37.939	74.000	-14.674	PK
2		7236.000	40.931	49.325	-33.069	74.000	-8.394	PK
3	*	9648.000	45.432	50.477	-28.568	74.000	-5.045	PK

Profile: 2250805R	Page No.: 50
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

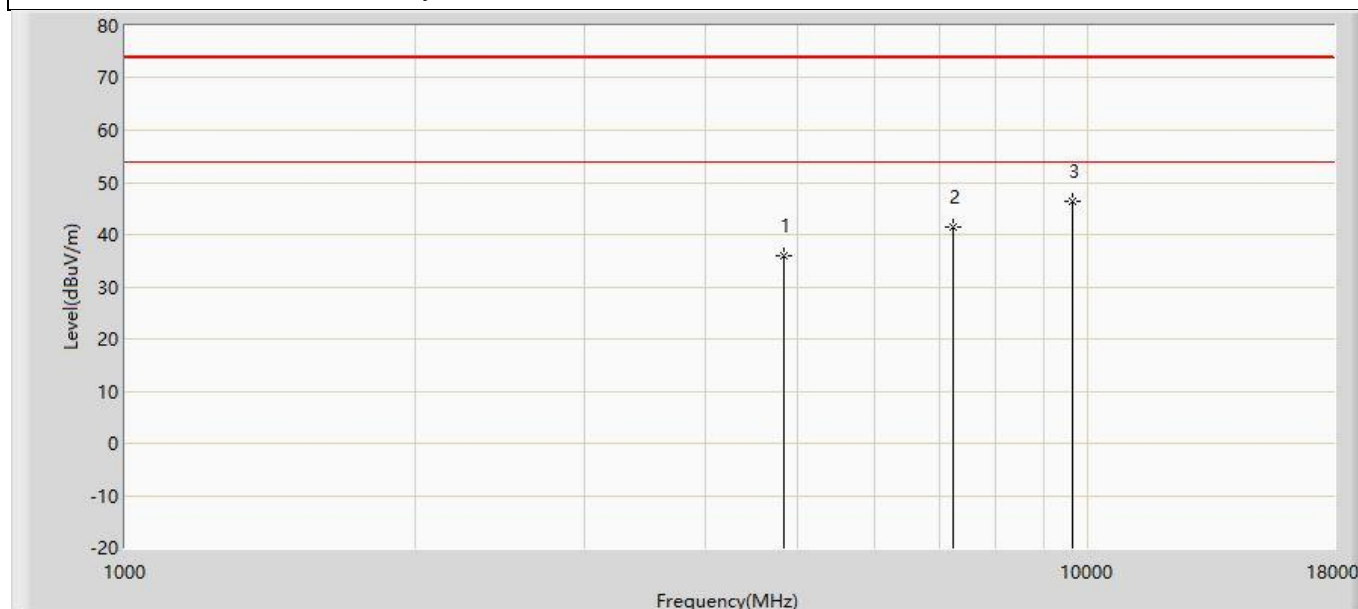


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.875	50.549	-38.125	74.000	-14.674	PK
2		7236.000	41.474	49.868	-32.526	74.000	-8.394	PK
3	*	9648.000	46.410	51.455	-27.590	74.000	-5.045	PK

Profile: 2250805R	Page No.: 51
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

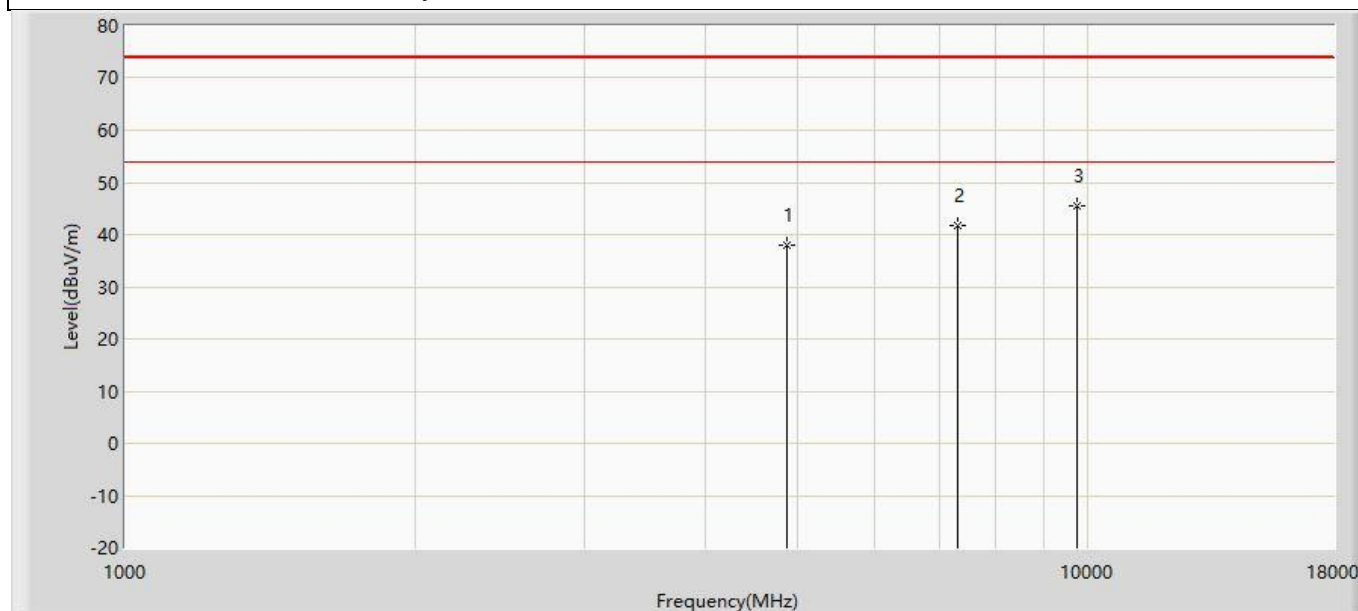


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.975	52.415	-36.025	74.000	-14.440	PK
2		7311.000	41.861	50.160	-32.139	74.000	-8.299	PK
3	*	9748.000	45.563	50.241	-28.437	74.000	-4.677	PK

Profile: 2250805R	Page No.: 52
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

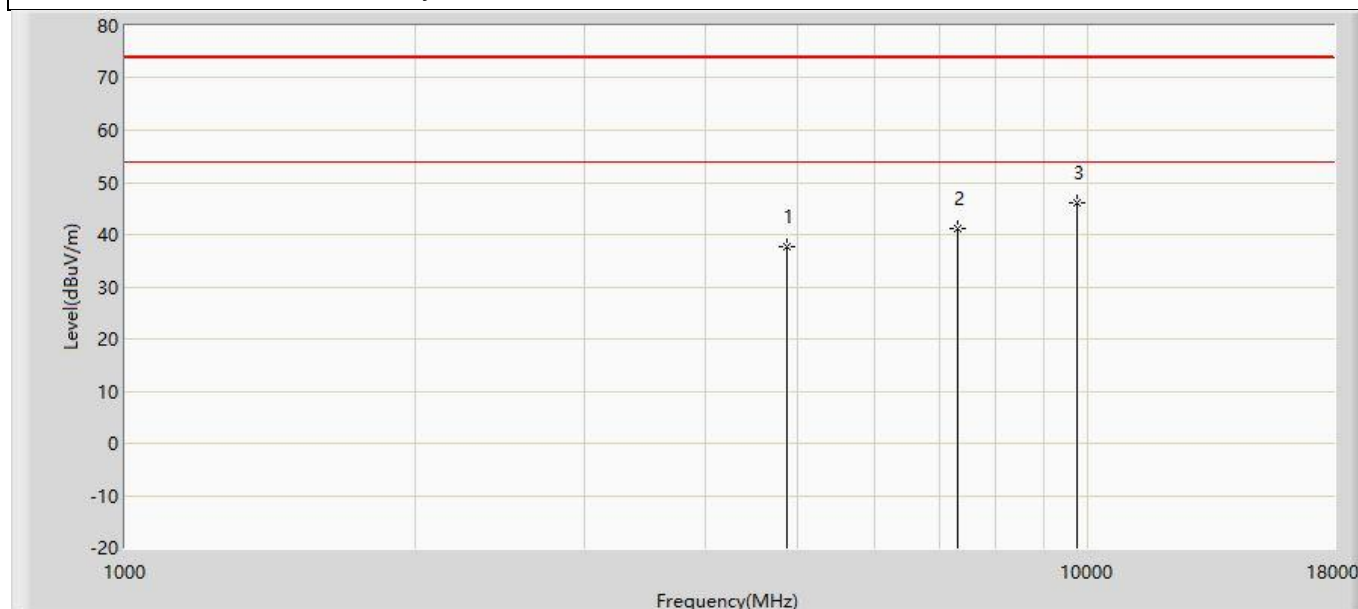


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.660	52.100	-36.340	74.000	-14.440	PK
2		7311.000	41.037	49.336	-32.963	74.000	-8.299	PK
3	*	9748.000	45.967	50.645	-28.033	74.000	-4.677	PK

Profile: 2250805R	Page No.: 53
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

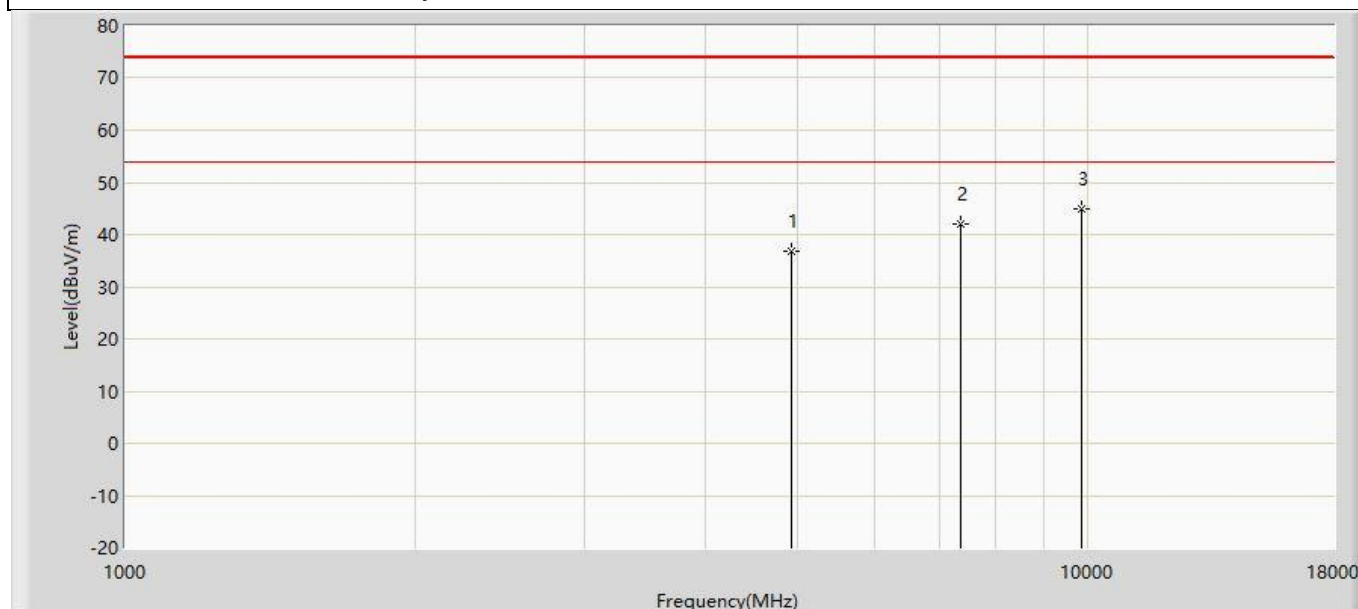


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.702	50.912	-37.298	74.000	-14.210	PK
2		7386.000	41.915	49.747	-32.085	74.000	-7.832	PK
3	*	9848.000	45.017	49.424	-28.983	74.000	-4.408	PK

Profile: 2250805R	Page No.: 54
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:26
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

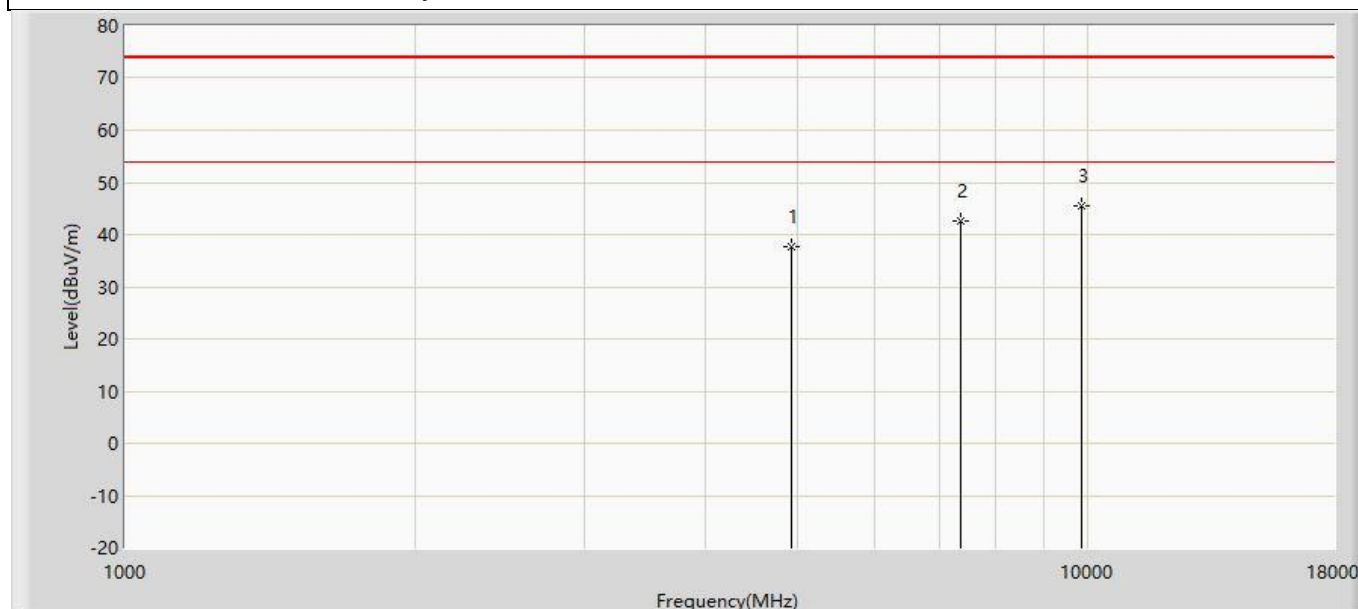


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.553	51.763	-36.447	74.000	-14.210	PK
2		7386.000	42.505	50.337	-31.495	74.000	-7.832	PK
3	*	9848.000	45.363	49.770	-28.637	74.000	-4.408	PK

Profile: 2250805R	Page No.: 55
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:27
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

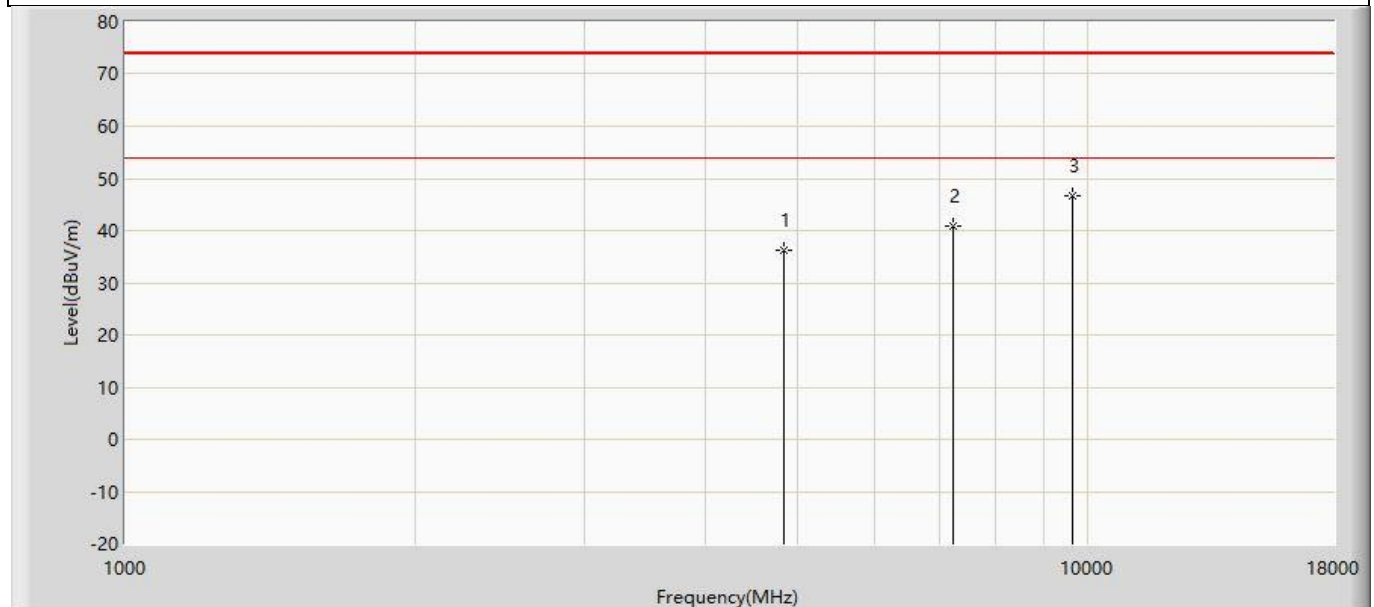


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	36.327	51.001	-37.673	74.000	-14.674	PK
2		7236.000	40.860	49.254	-33.140	74.000	-8.394	PK
3	*	9648.000	46.557	51.602	-27.443	74.000	-5.045	PK

Profile: 2250805R	Page No.: 56
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:27
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

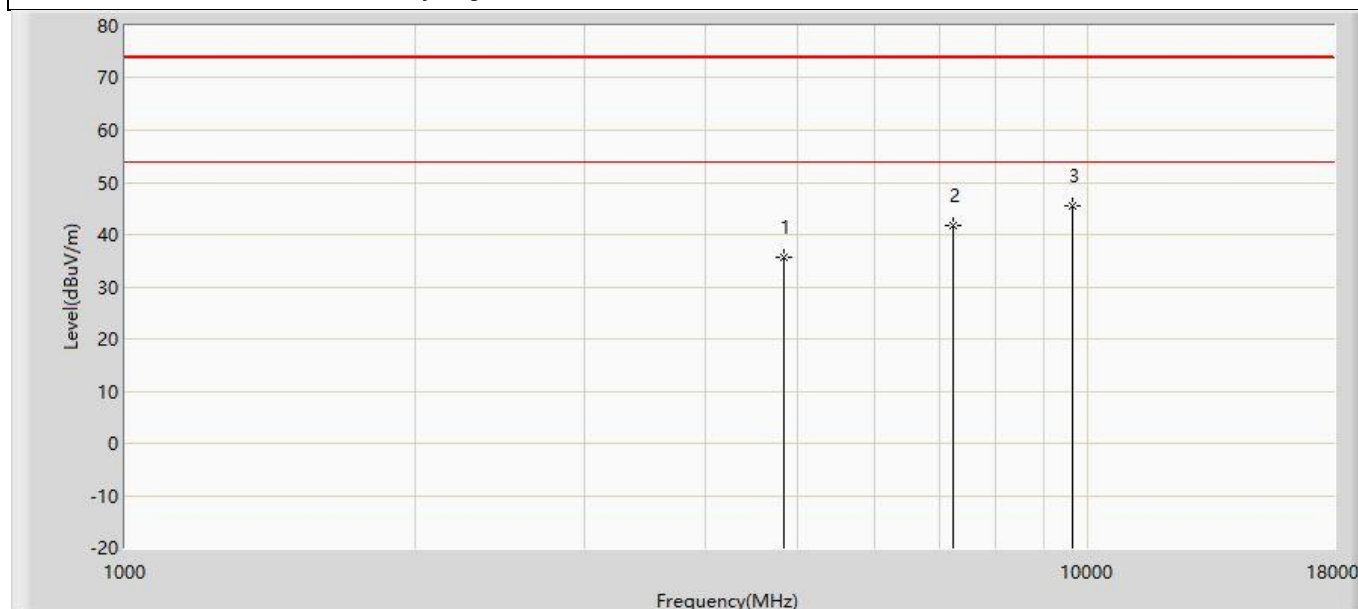


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.784	50.458	-38.216	74.000	-14.674	PK
2		7236.000	41.743	50.137	-32.257	74.000	-8.394	PK
3	*	9648.000	45.531	50.576	-28.469	74.000	-5.045	PK

Profile: 2250805R	Page No.: 57
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:27
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

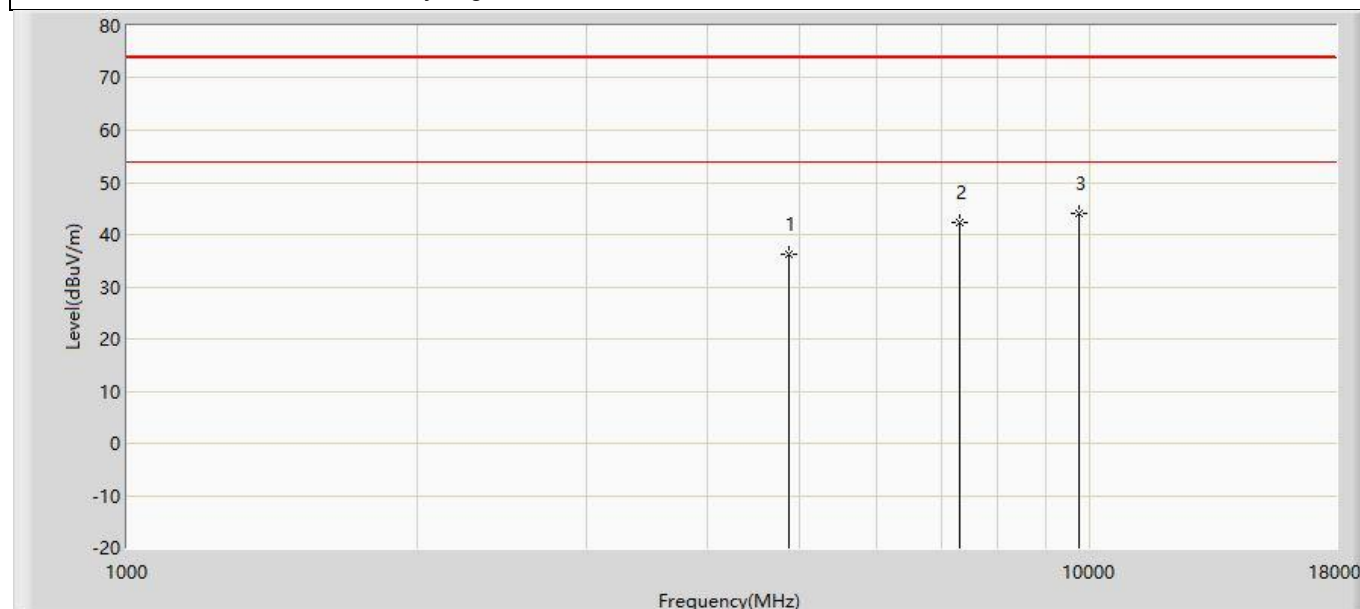


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.239	50.679	-37.761	74.000	-14.440	PK
2		7311.000	42.302	50.601	-31.698	74.000	-8.299	PK
3	*	9748.000	44.150	48.828	-29.850	74.000	-4.677	PK

Profile: 2250805R	Page No.: 58
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:27
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

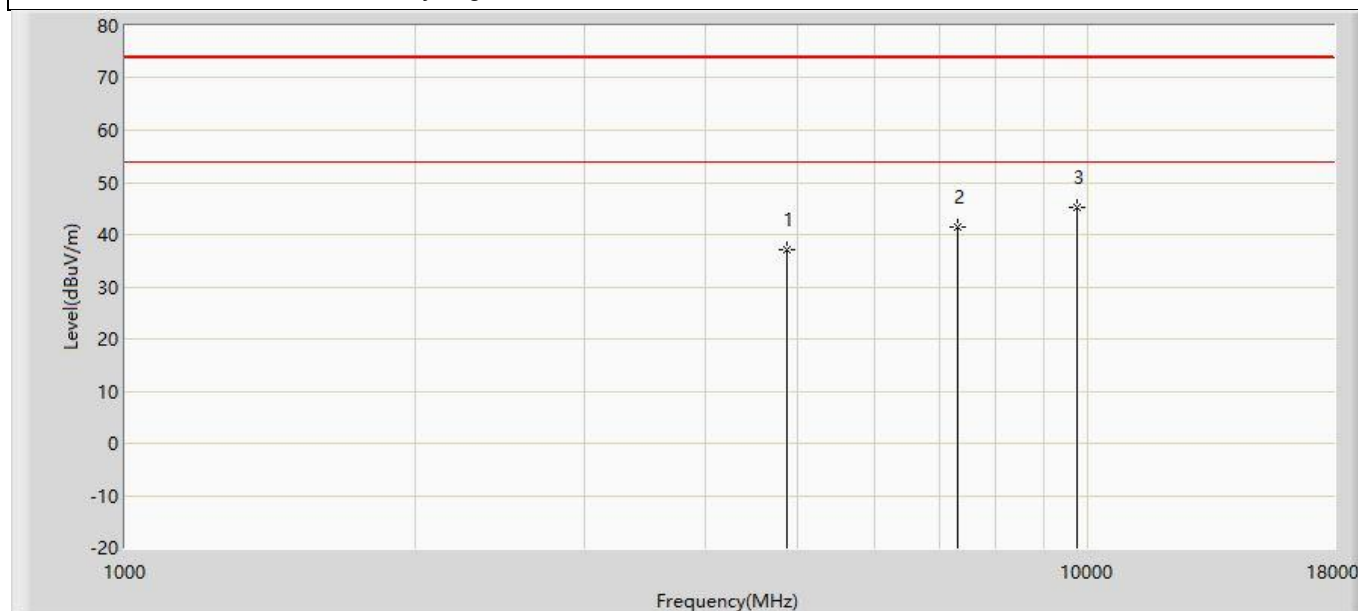


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.098	51.538	-36.902	74.000	-14.440	PK
2		7311.000	41.502	49.801	-32.498	74.000	-8.299	PK
3	*	9748.000	45.148	49.826	-28.852	74.000	-4.677	PK

Profile: 2250805R	Page No.: 59
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

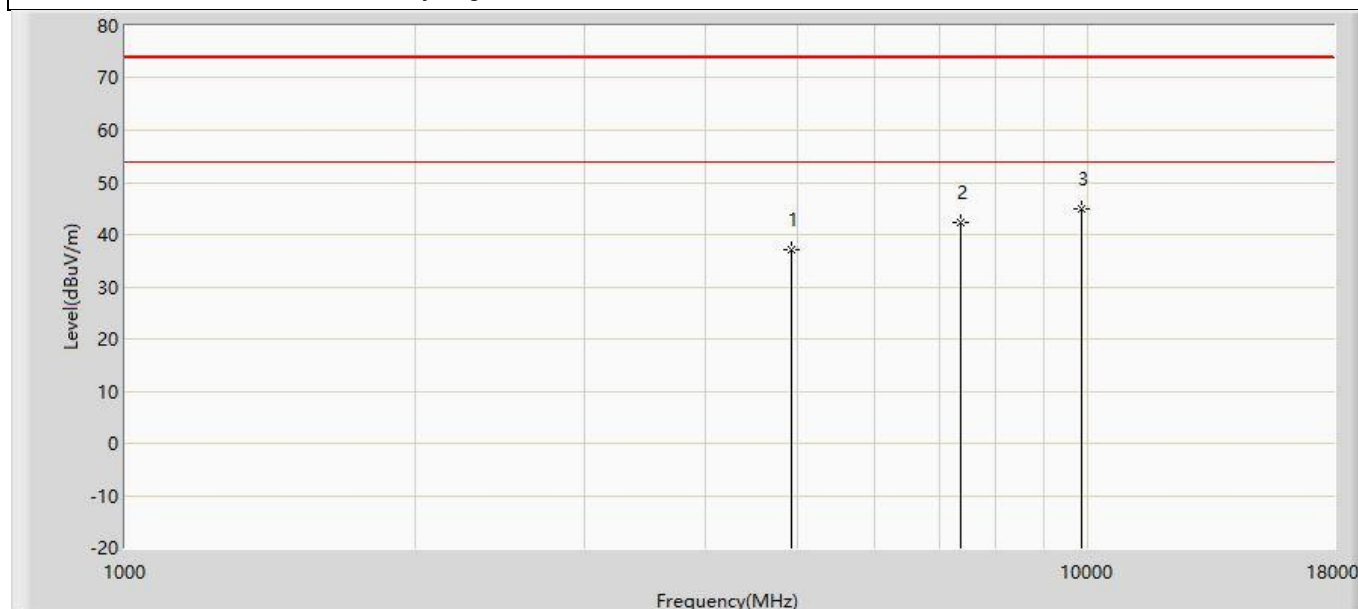


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.033	51.243	-36.967	74.000	-14.210	PK
2		7386.000	42.463	50.295	-31.537	74.000	-7.832	PK
3	*	9848.000	44.951	49.358	-29.049	74.000	-4.408	PK

Profile: 2250805R	Page No.: 60
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

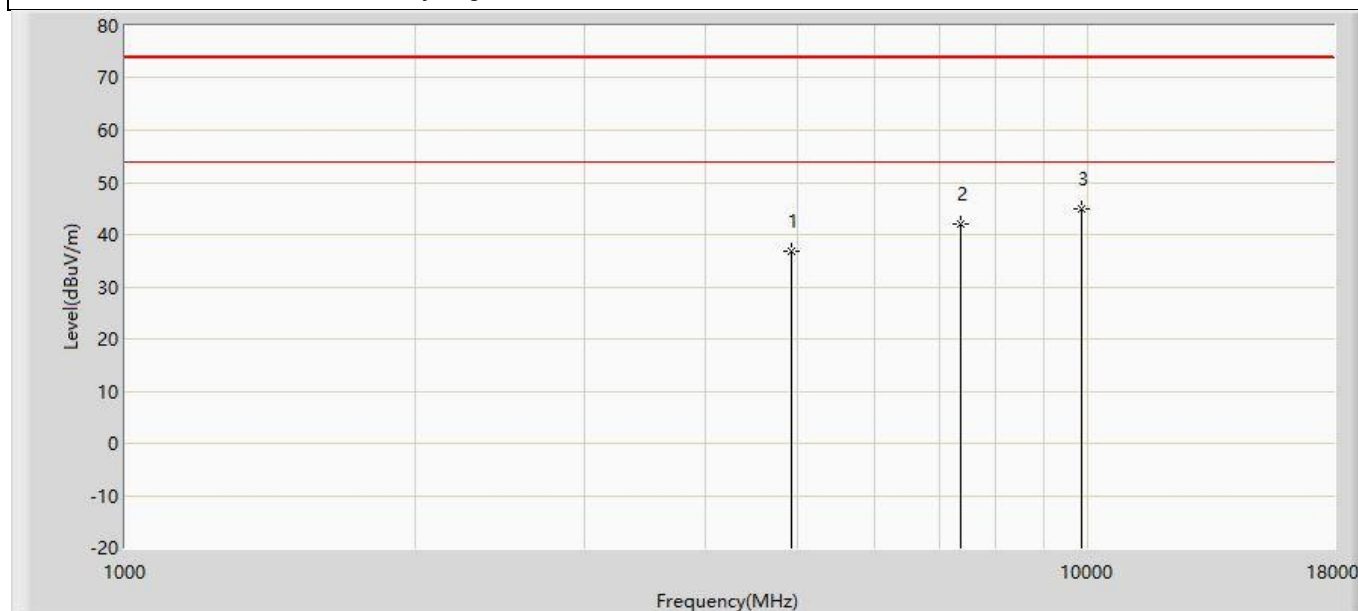


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.683	50.893	-37.317	74.000	-14.210	PK
2		7386.000	41.994	49.826	-32.006	74.000	-7.832	PK
3	*	9848.000	44.846	49.253	-29.154	74.000	-4.408	PK

Profile: 2250805R	Page No.: 61
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

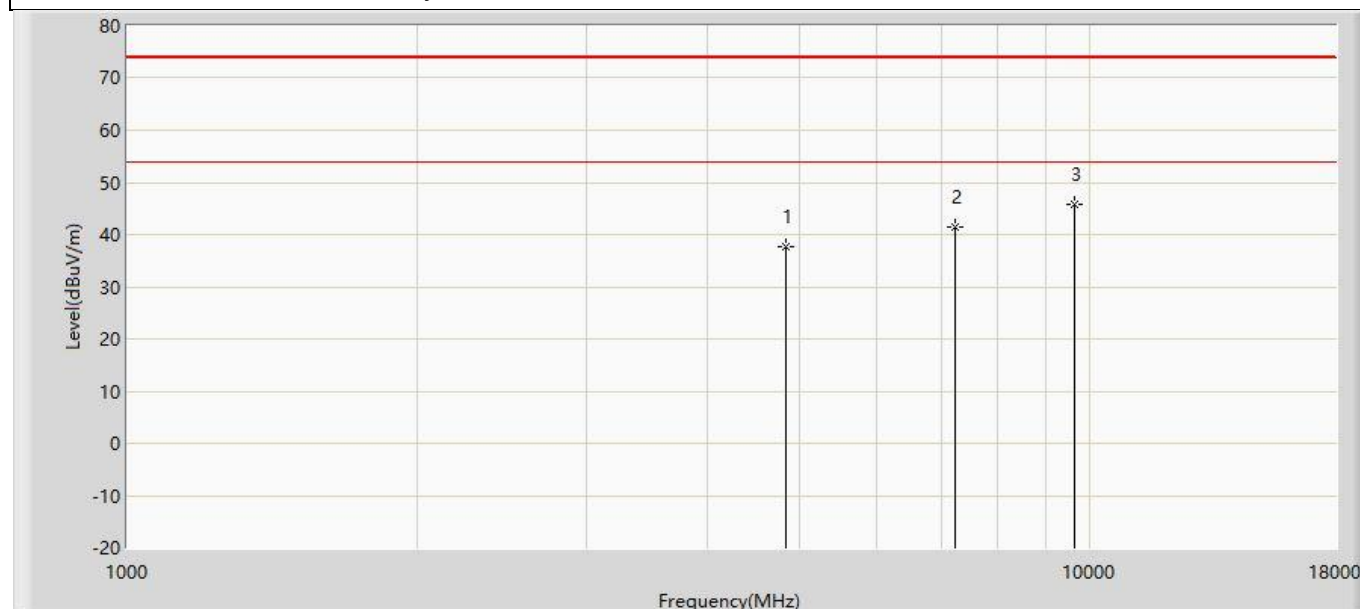


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	37.620	52.294	-36.380	74.000	-14.674	PK
2		7236.000	41.592	49.986	-32.408	74.000	-8.394	PK
3	*	9648.000	45.685	50.730	-28.315	74.000	-5.045	PK

Profile: 2250805R	Page No.: 62
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

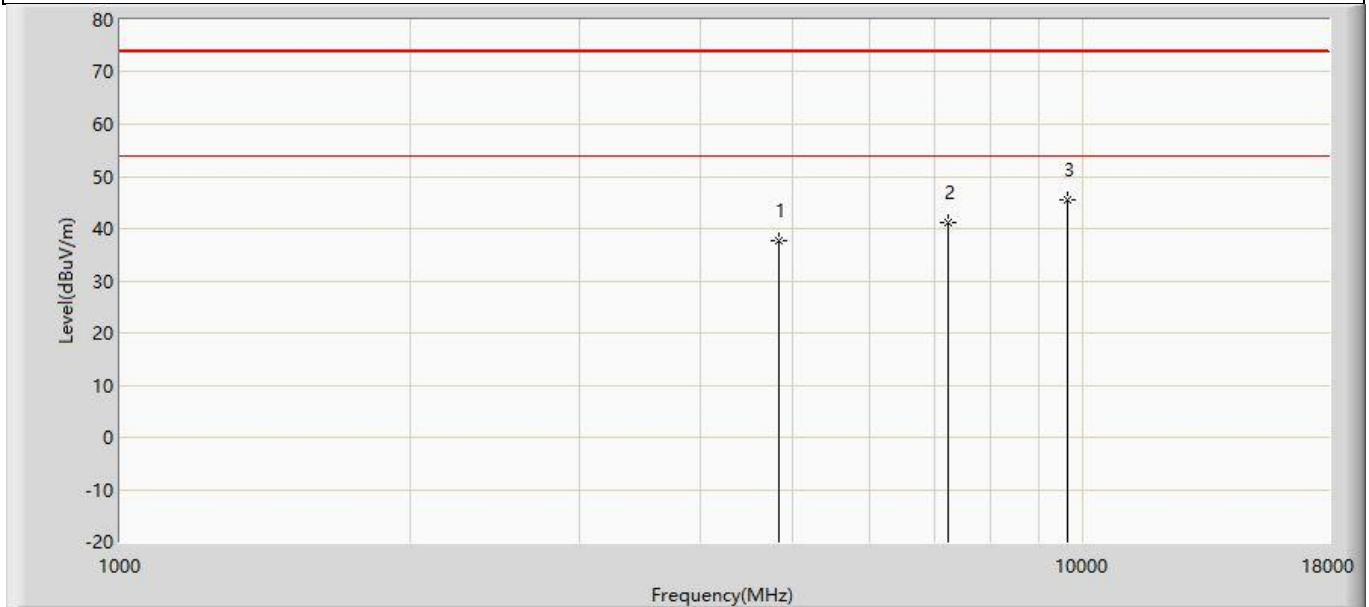


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	37.656	52.330	-36.344	74.000	-14.674	PK
2		7236.000	41.116	49.510	-32.884	74.000	-8.394	PK
3	*	9648.000	45.484	50.529	-28.516	74.000	-5.045	PK

Profile: 2250805R	Page No.: 63
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

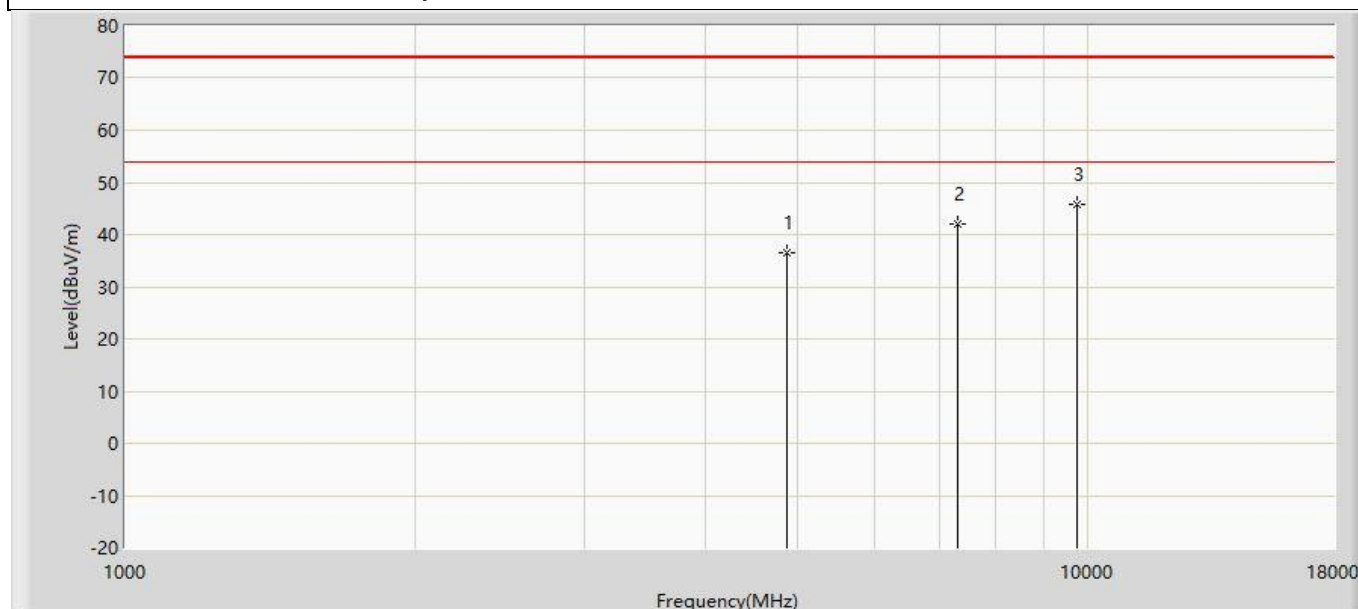


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.506	50.946	-37.494	74.000	-14.440	PK
2		7311.000	41.914	50.213	-32.086	74.000	-8.299	PK
3	*	9748.000	45.777	50.455	-28.223	74.000	-4.677	PK

Profile: 2250805R	Page No.: 64
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

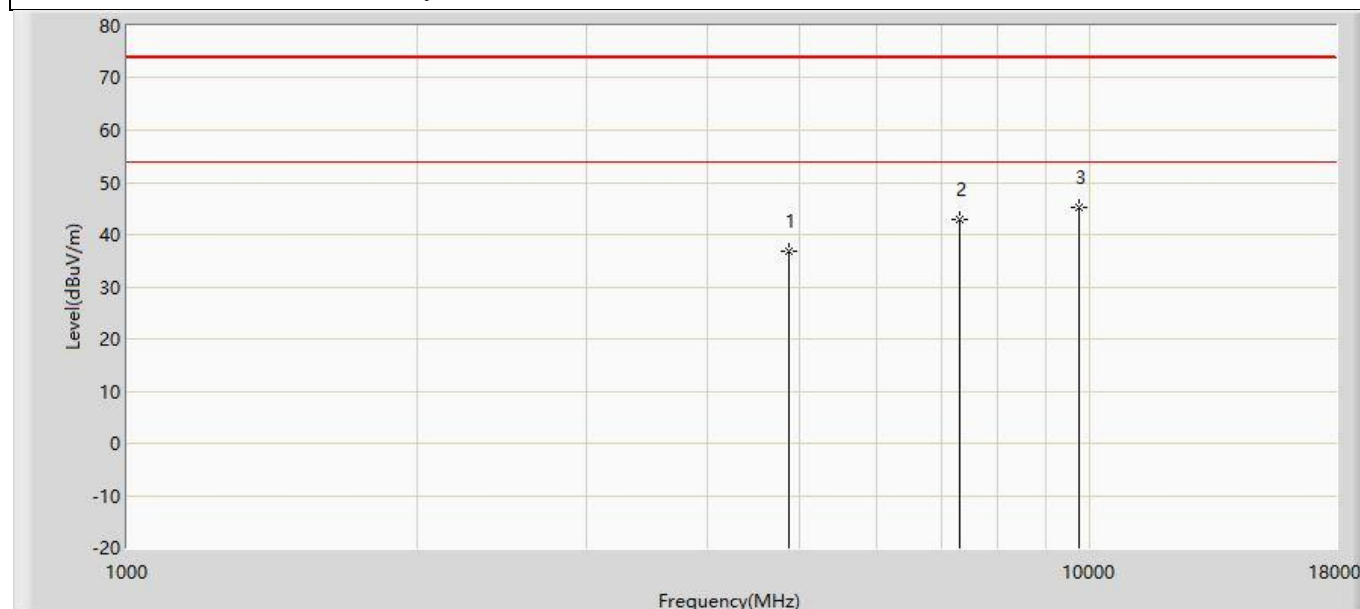


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.779	51.219	-37.221	74.000	-14.440	PK
2		7311.000	42.946	51.245	-31.054	74.000	-8.299	PK
3	*	9748.000	45.292	49.970	-28.708	74.000	-4.677	PK

Profile: 2250805R	Page No.: 65
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

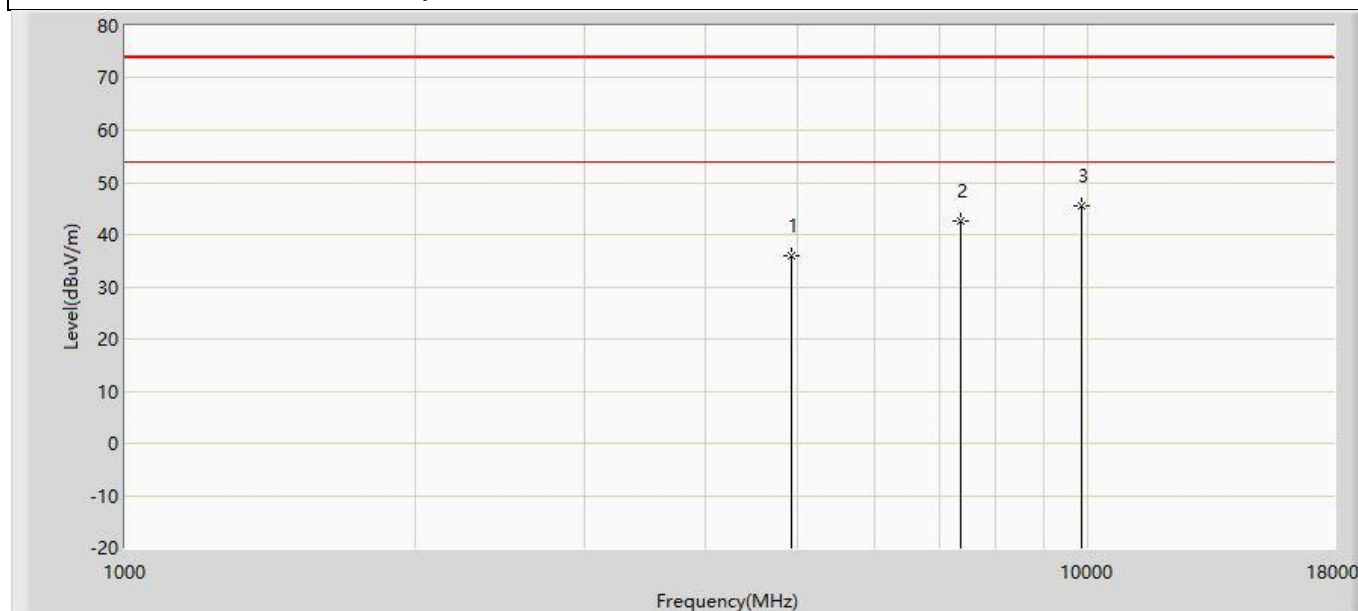


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.993	50.203	-38.007	74.000	-14.210	PK
2		7386.000	42.490	50.322	-31.510	74.000	-7.832	PK
3	*	9848.000	45.368	49.775	-28.632	74.000	-4.408	PK

Profile: 2250805R	Page No.: 66
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

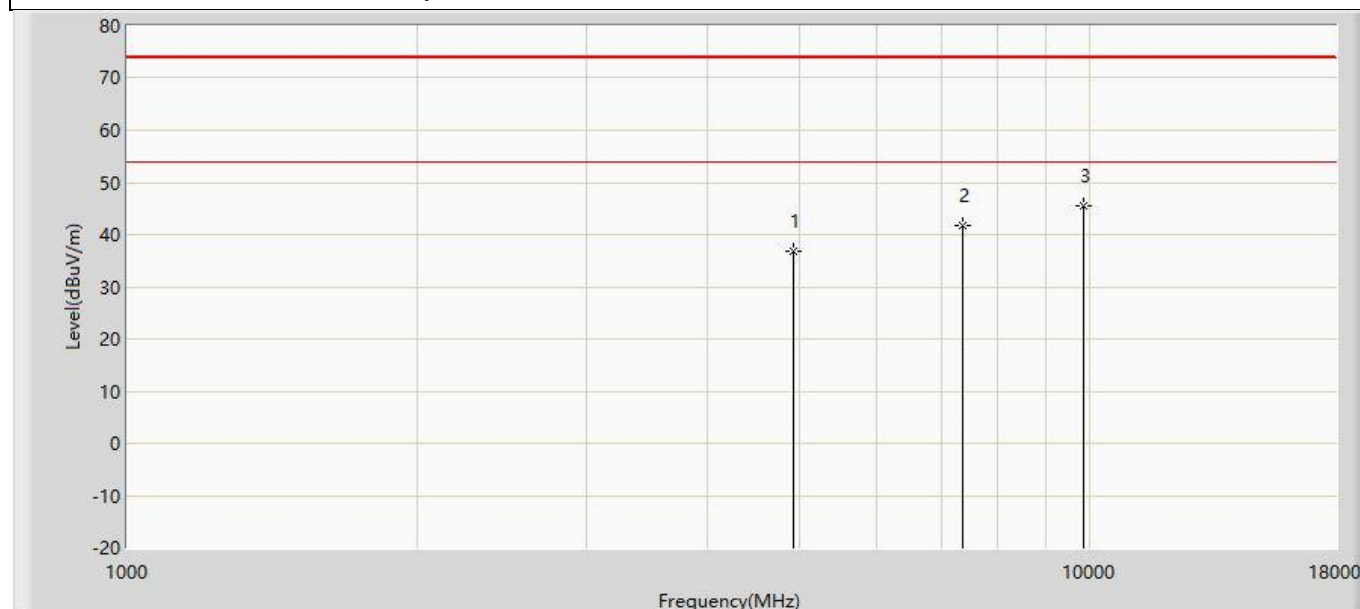


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.861	51.071	-37.139	74.000	-14.210	PK
2		7386.000	41.830	49.662	-32.170	74.000	-7.832	PK
3	*	9848.000	45.426	49.833	-28.574	74.000	-4.408	PK

Profile: 2250805R	Page No.: 67
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

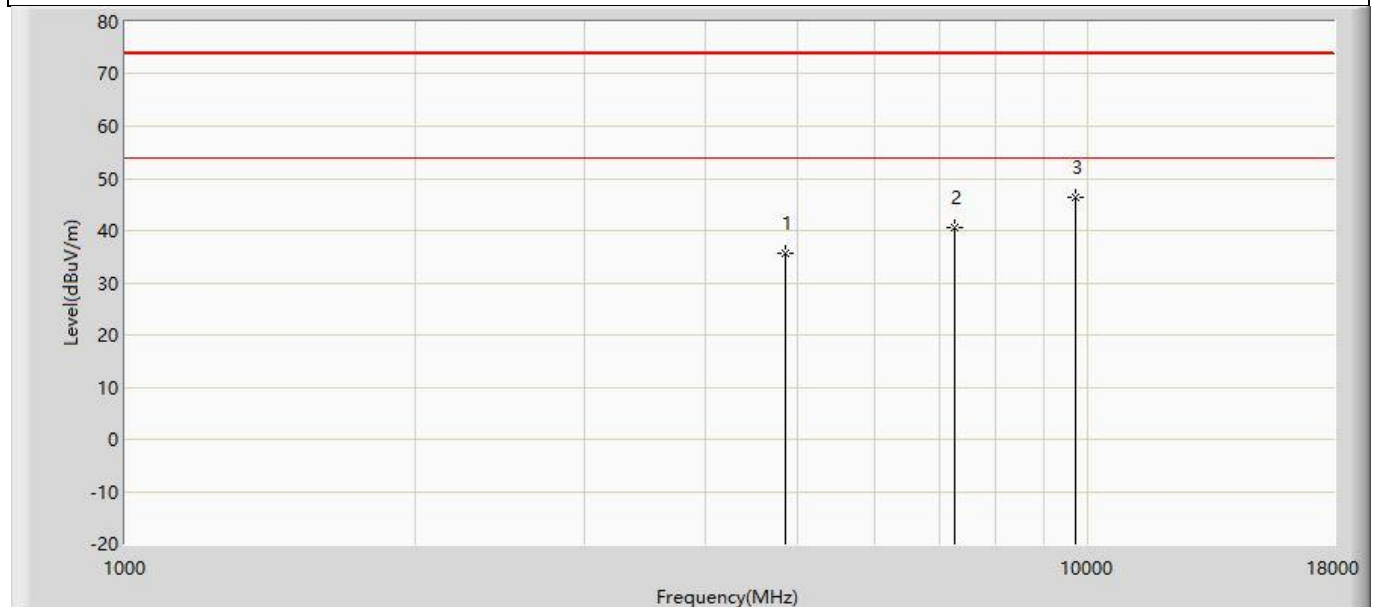


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.633	50.257	-38.367	74.000	-14.623	PK
2		7266.000	40.659	49.043	-33.341	74.000	-8.384	PK
3	*	9688.000	46.376	51.040	-27.624	74.000	-4.663	PK

Profile: 2250805R	Page No.: 68
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

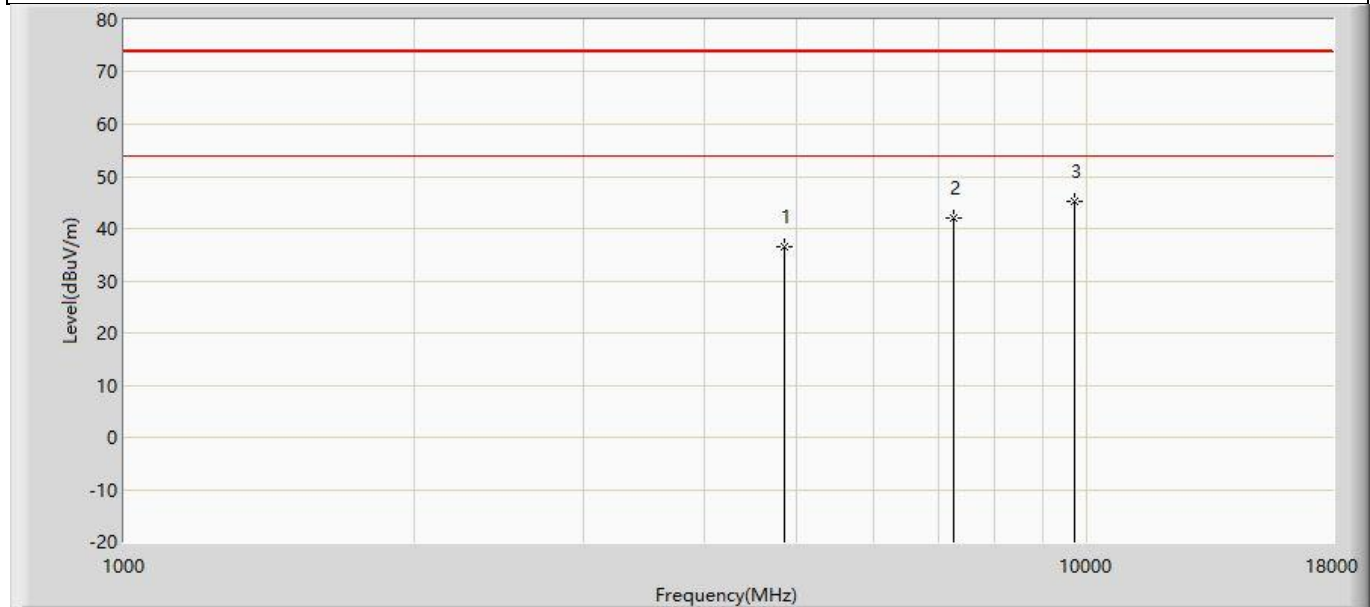


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.443	51.067	-37.557	74.000	-14.623	PK
2		7266.000	42.004	50.388	-31.996	74.000	-8.384	PK
3	*	9688.000	45.302	49.966	-28.698	74.000	-4.663	PK

Profile: 2250805R	Page No.: 69
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT:VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

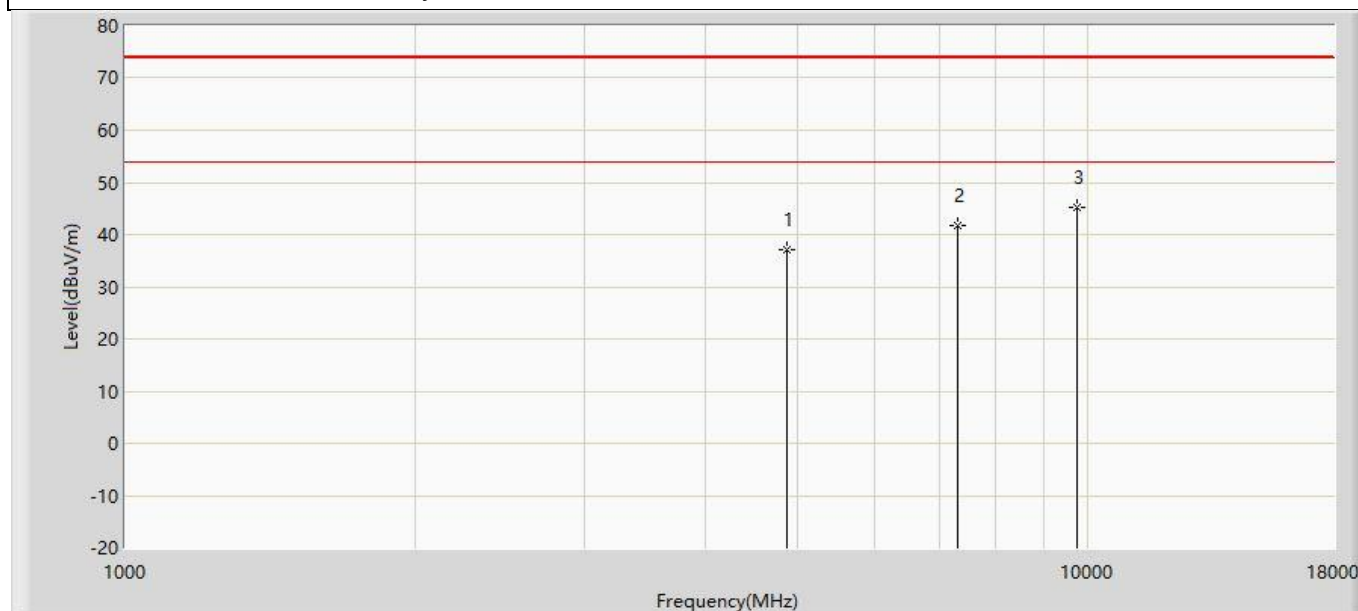


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.031	51.471	-36.969	74.000	-14.440	PK
2		7311.000	41.699	49.998	-32.301	74.000	-8.299	PK
3	*	9748.000	45.348	50.026	-28.652	74.000	-4.677	PK

Profile: 2250805R	Page No.: 70
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

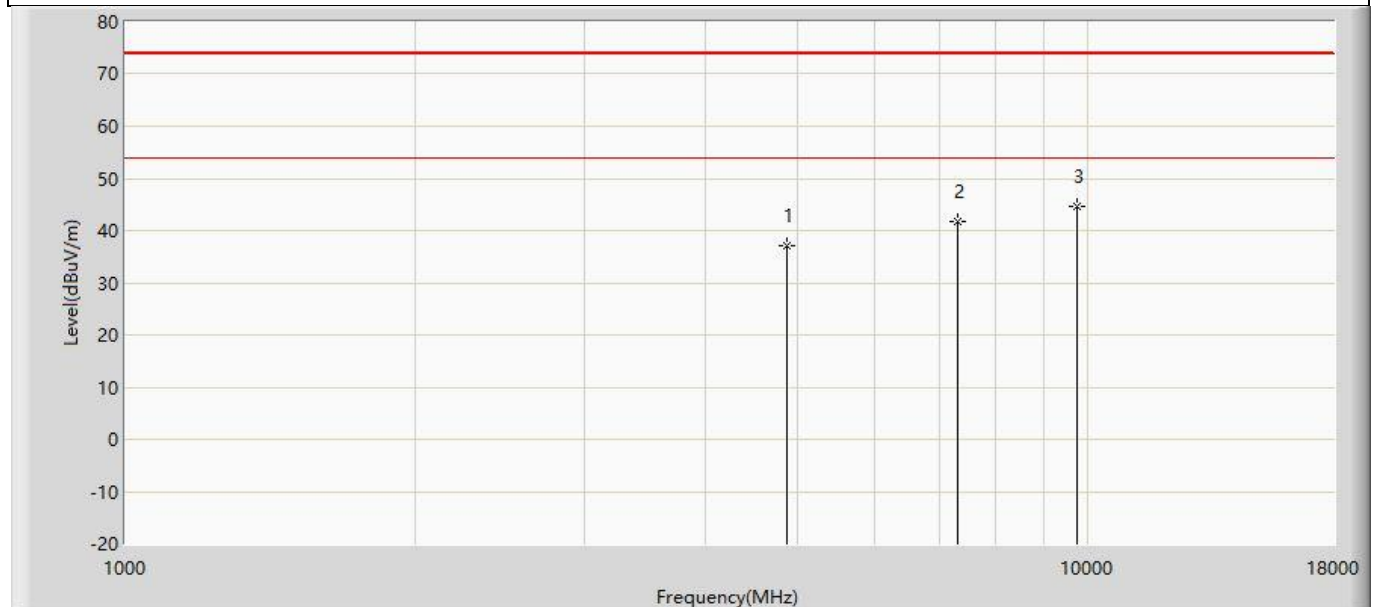


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.145	51.585	-36.855	74.000	-14.440	PK
2		7311.000	41.838	50.137	-32.162	74.000	-8.299	PK
3	*	9748.000	44.732	49.410	-29.268	74.000	-4.677	PK

Profile: 2250805R	Page No.: 71
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

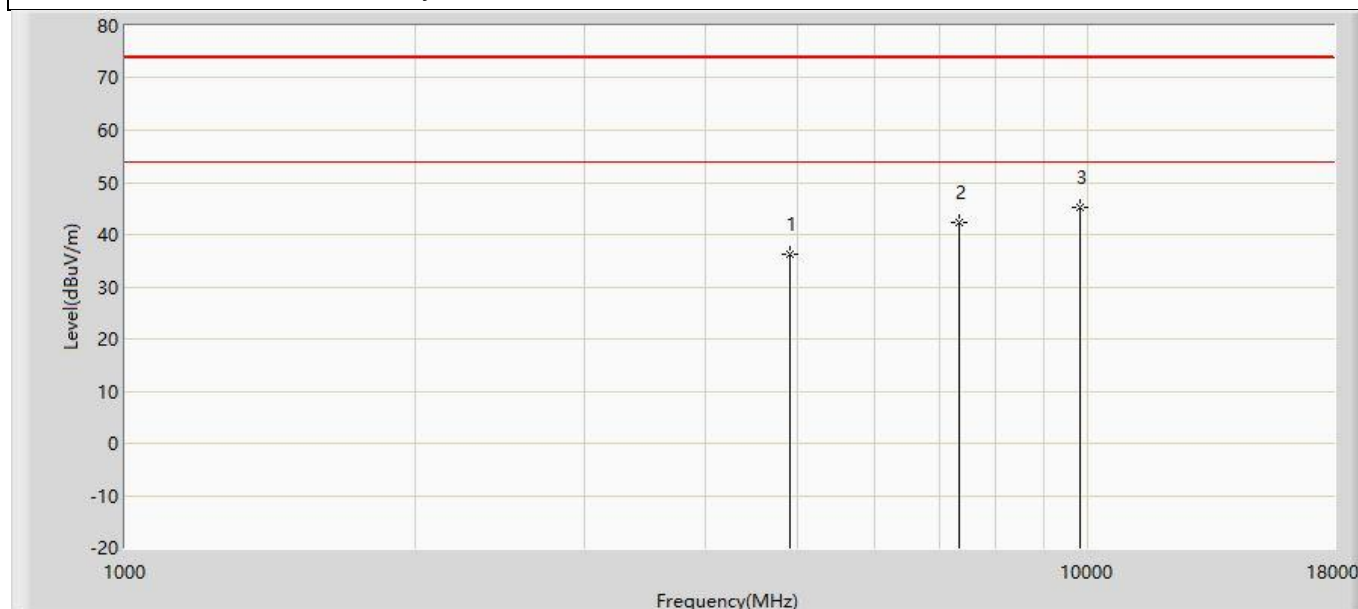


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.256	50.492	-37.744	74.000	-14.236	PK
2		7356.000	42.239	50.165	-31.761	74.000	-7.927	PK
3	*	9808.000	45.247	49.606	-28.753	74.000	-4.359	PK

Profile: 2250805R	Page No.: 72
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:28
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

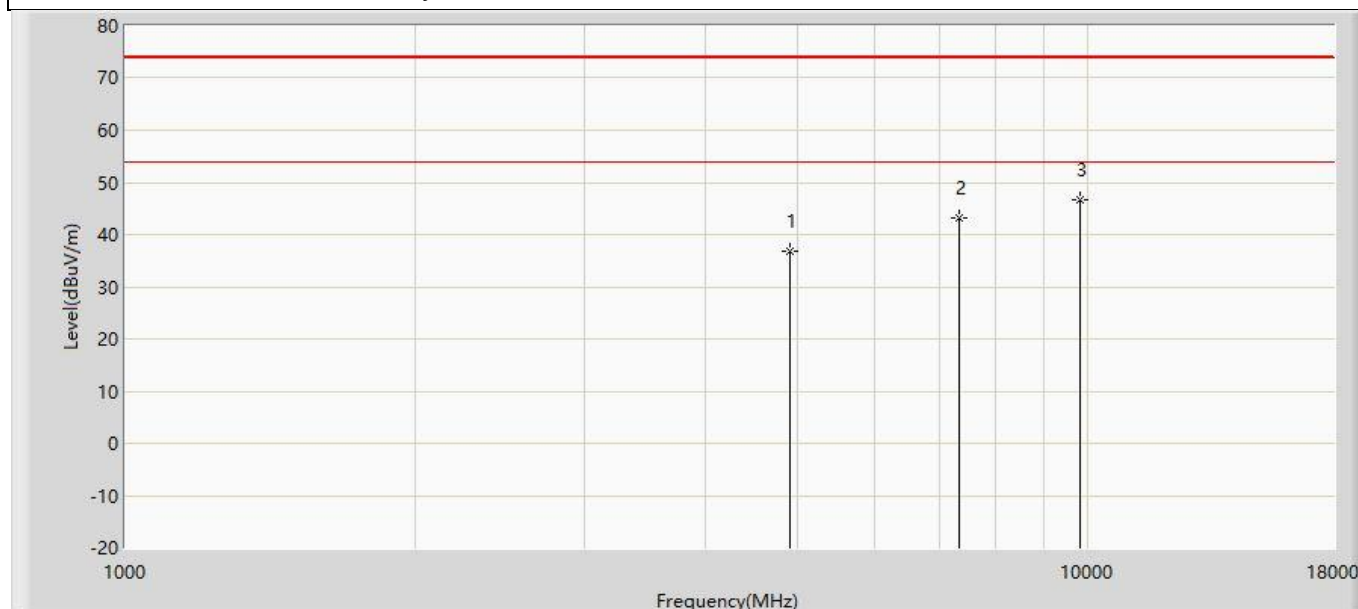


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.804	51.040	-37.196	74.000	-14.236	PK
2		7356.000	43.210	51.136	-30.790	74.000	-7.927	PK
3	*	9808.000	46.551	50.910	-27.449	74.000	-4.359	PK

Profile: 2250805R	Page No.: 85
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:29
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

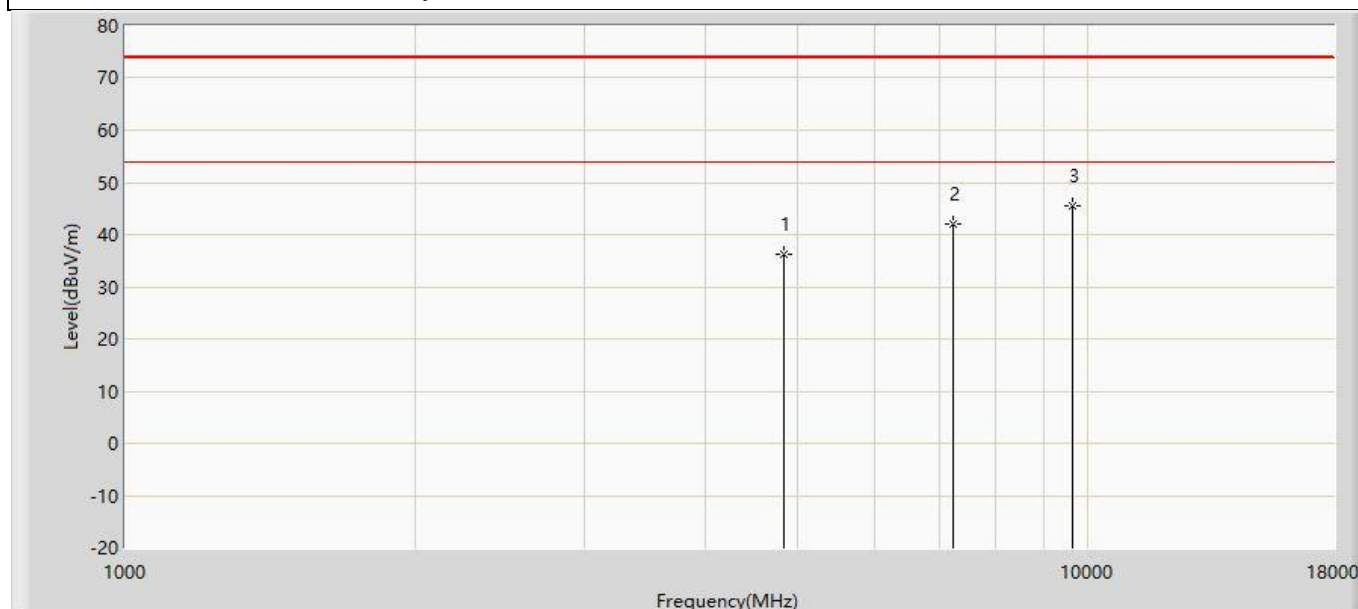


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	36.236	50.910	-37.764	74.000	-14.674	PK
2		7236.000	42.001	50.395	-31.999	74.000	-8.394	PK
3	*	9648.000	45.629	50.674	-28.371	74.000	-5.045	PK

Profile: 2250805R	Page No.: 86
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

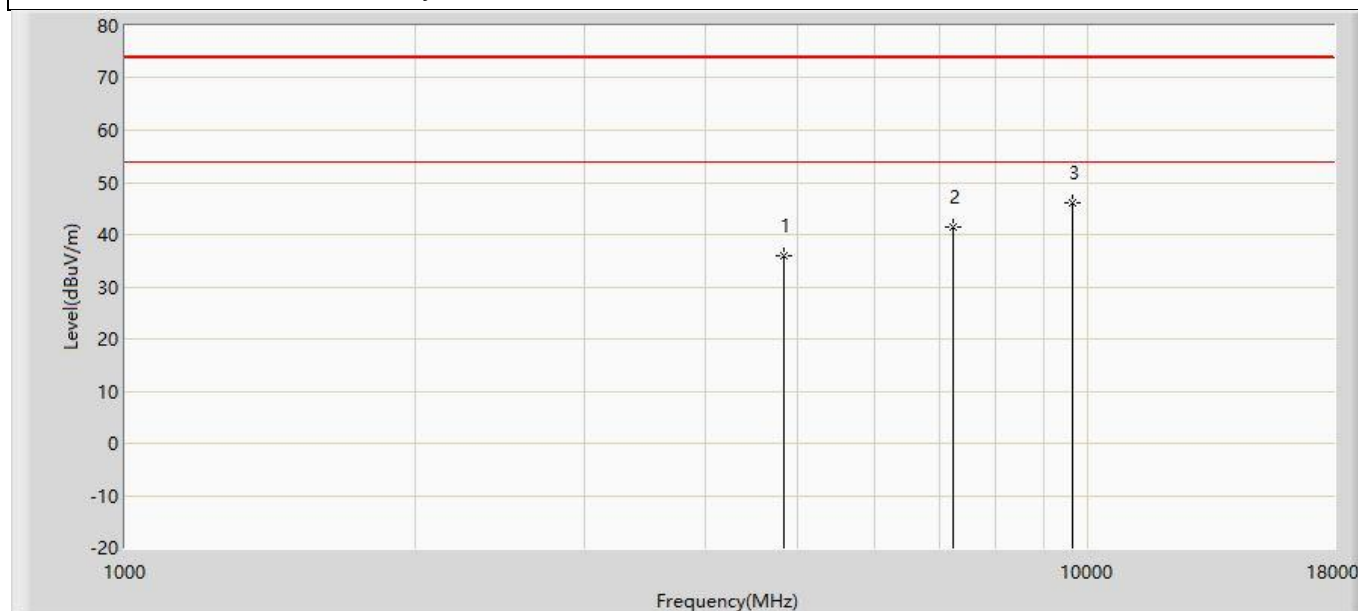


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.973	50.647	-38.027	74.000	-14.674	PK
2		7236.000	41.385	49.779	-32.615	74.000	-8.394	PK
3	*	9648.000	45.967	51.012	-28.033	74.000	-5.045	PK

Profile: 2250805R	Page No.: 87
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

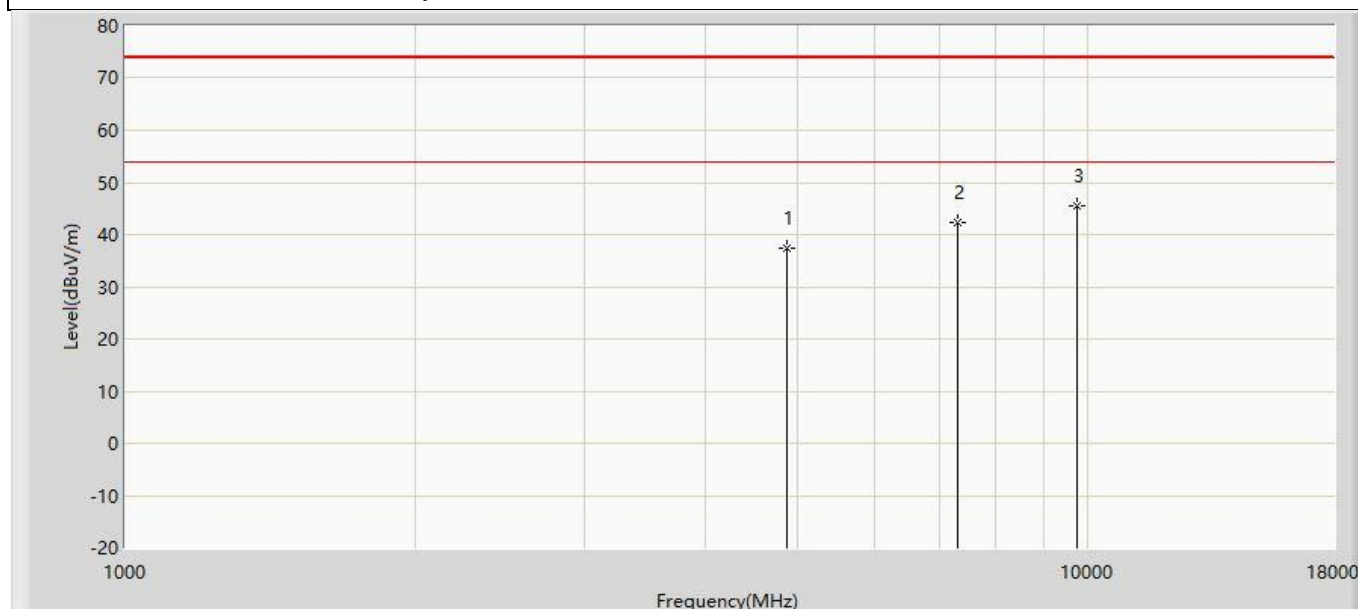


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.365	51.805	-36.635	74.000	-14.440	PK
2		7311.000	42.454	50.753	-31.546	74.000	-8.299	PK
3	*	9748.000	45.482	50.160	-28.518	74.000	-4.677	PK

Profile: 2250805R	Page No.: 88
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

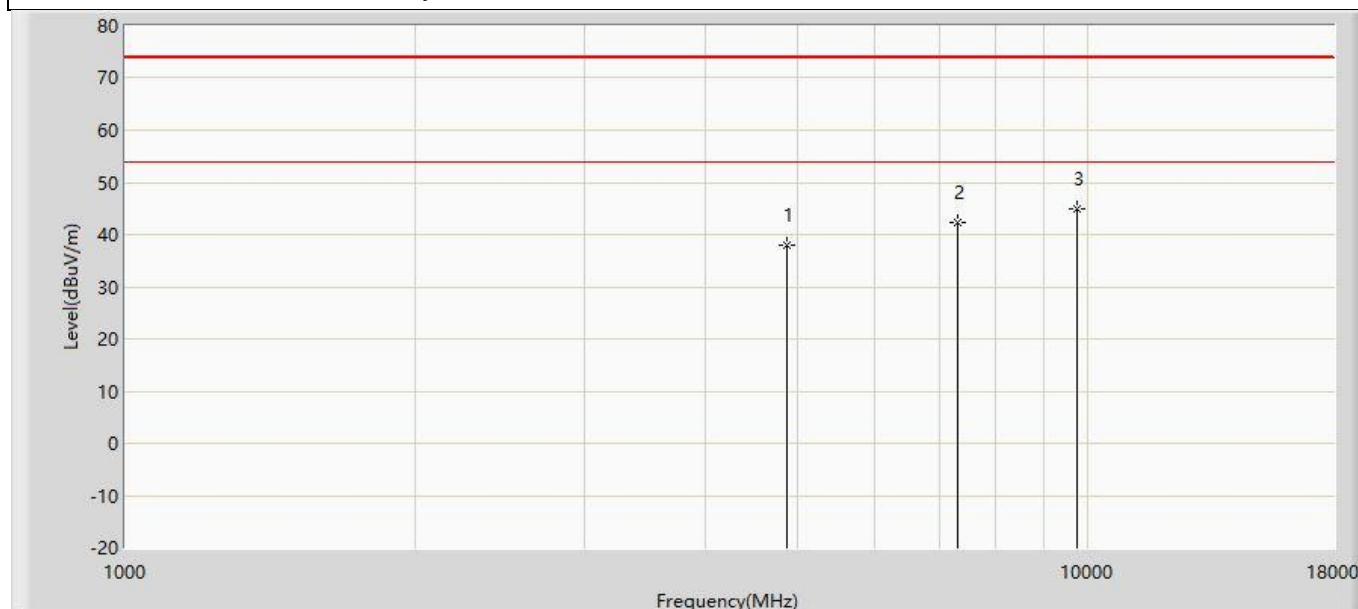


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.829	52.269	-36.171	74.000	-14.440	PK
2		7311.000	42.252	50.551	-31.748	74.000	-8.299	PK
3	*	9748.000	44.973	49.651	-29.027	74.000	-4.677	PK

Profile: 2250805R	Page No.: 89
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

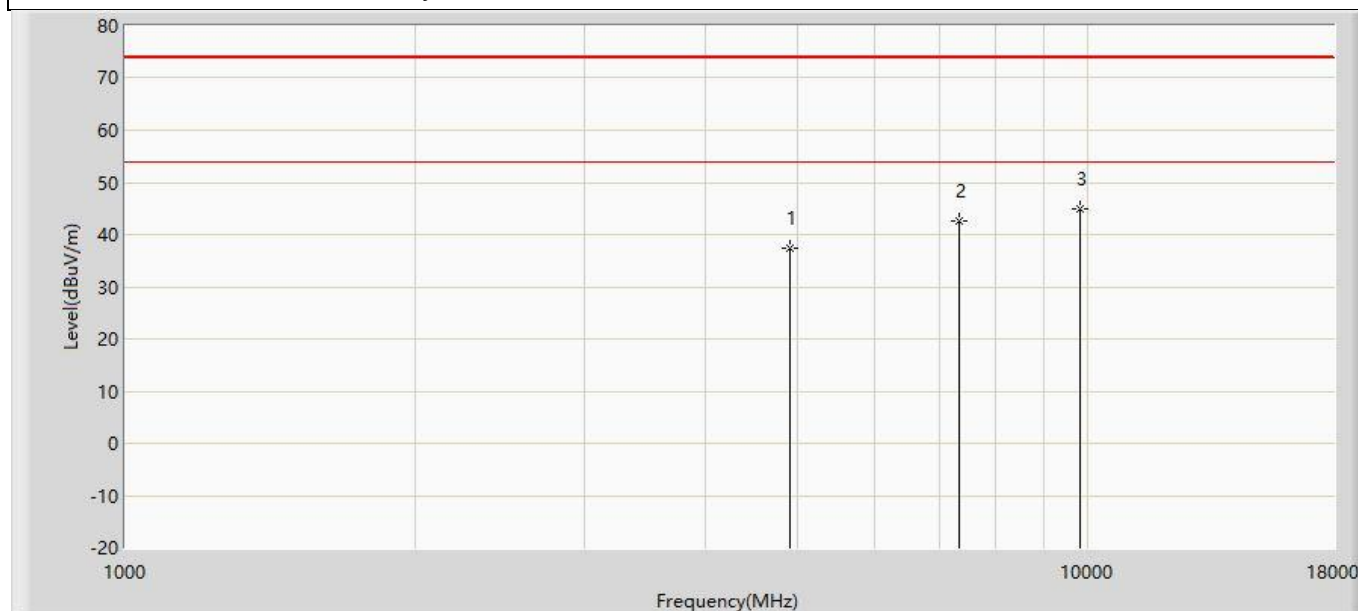


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	37.315	51.551	-36.685	74.000	-14.236	PK
2		7356.000	42.731	50.657	-31.269	74.000	-7.927	PK
3	*	9808.000	44.823	49.182	-29.177	74.000	-4.359	PK

Profile: 2250805R	Page No.: 90
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

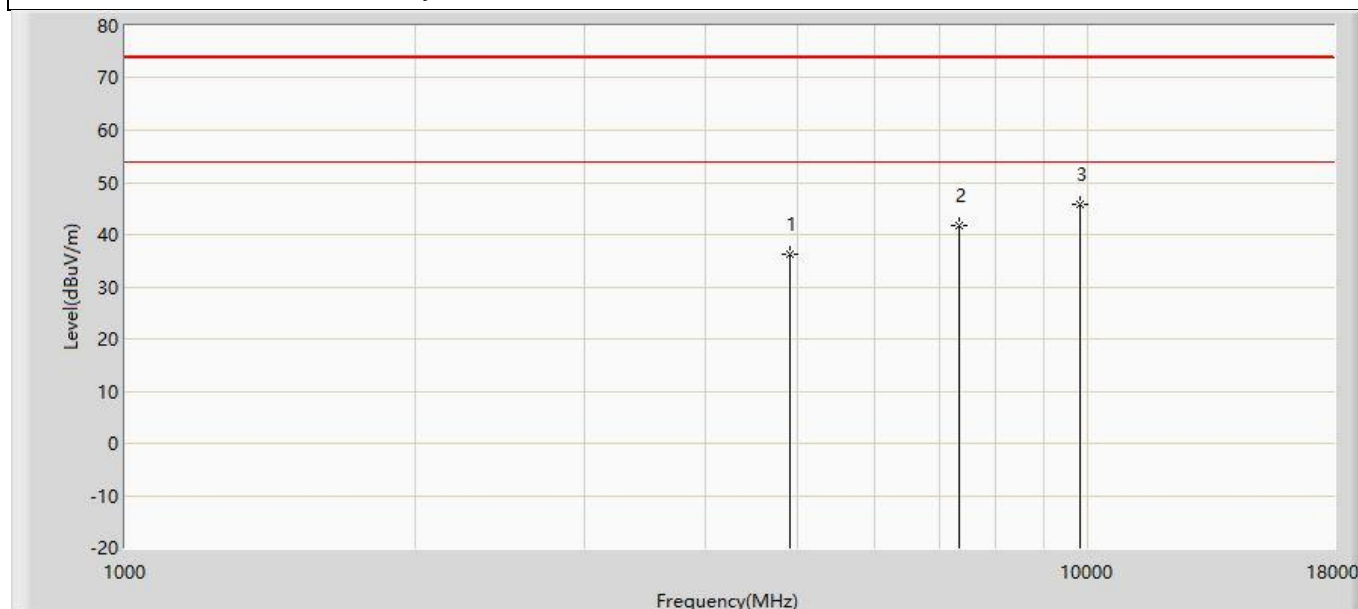


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.286	50.522	-37.714	74.000	-14.236	PK
2		7356.000	41.855	49.781	-32.145	74.000	-7.927	PK
3	*	9808.000	45.671	50.030	-28.329	74.000	-4.359	PK

Profile: 2250805R	Page No.: 91
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

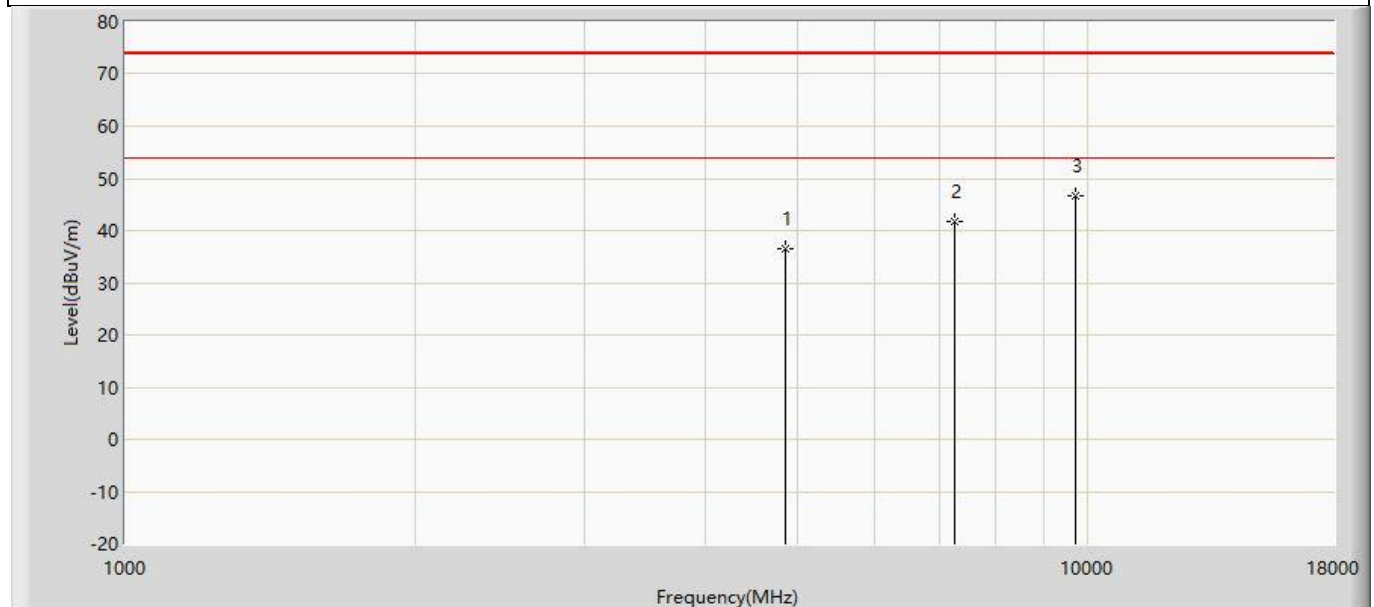


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.604	51.228	-37.396	74.000	-14.623	PK
2		7266.000	41.752	50.136	-32.248	74.000	-8.384	PK
3	*	9688.000	46.558	51.222	-27.442	74.000	-4.663	PK

Profile: 2250805R	Page No.: 92
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

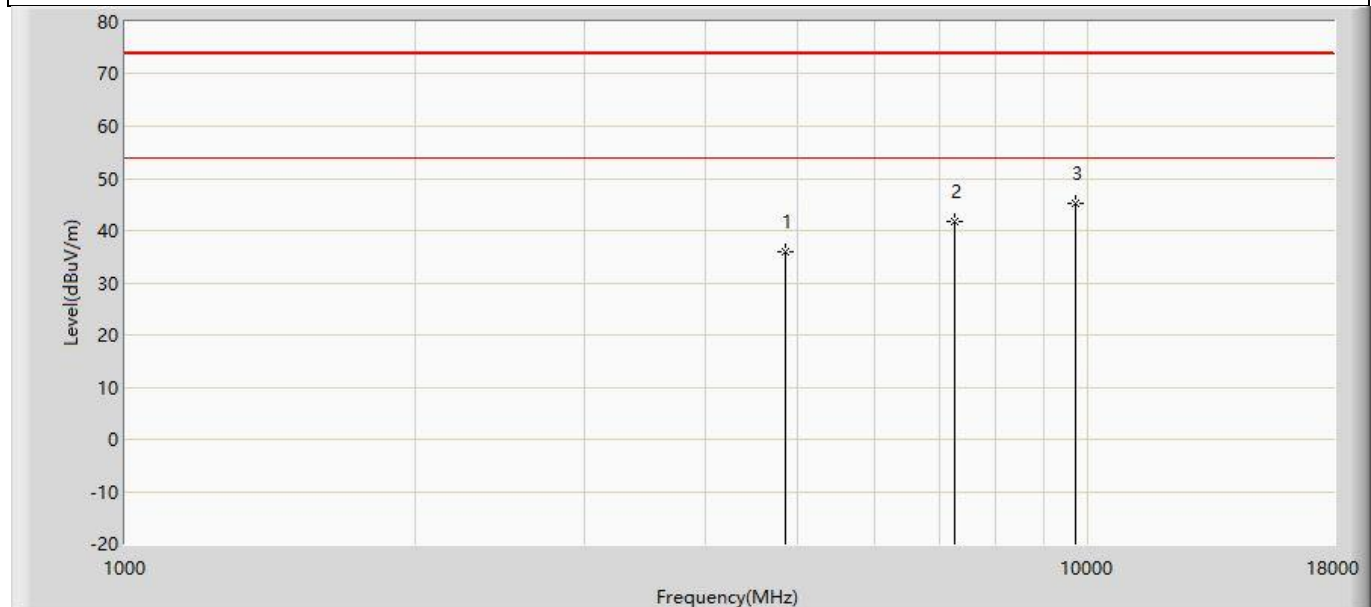


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.930	50.554	-38.070	74.000	-14.623	PK
2		7266.000	41.628	50.012	-32.372	74.000	-8.384	PK
3	*	9688.000	45.103	49.767	-28.897	74.000	-4.663	PK

Profile: 2250805R	Page No.: 93
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

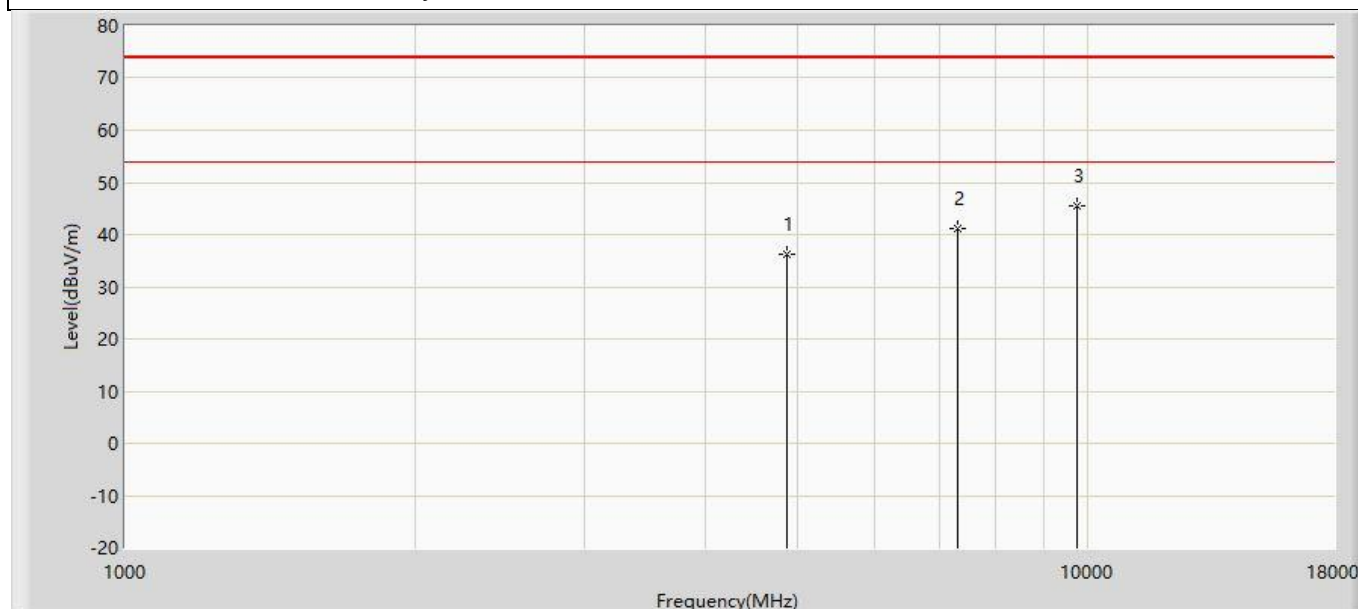


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.184	50.624	-37.816	74.000	-14.440	PK
2		7311.000	41.240	49.539	-32.760	74.000	-8.299	PK
3	*	9748.000	45.378	50.056	-28.622	74.000	-4.677	PK

Profile: 2250805R	Page No.: 94
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

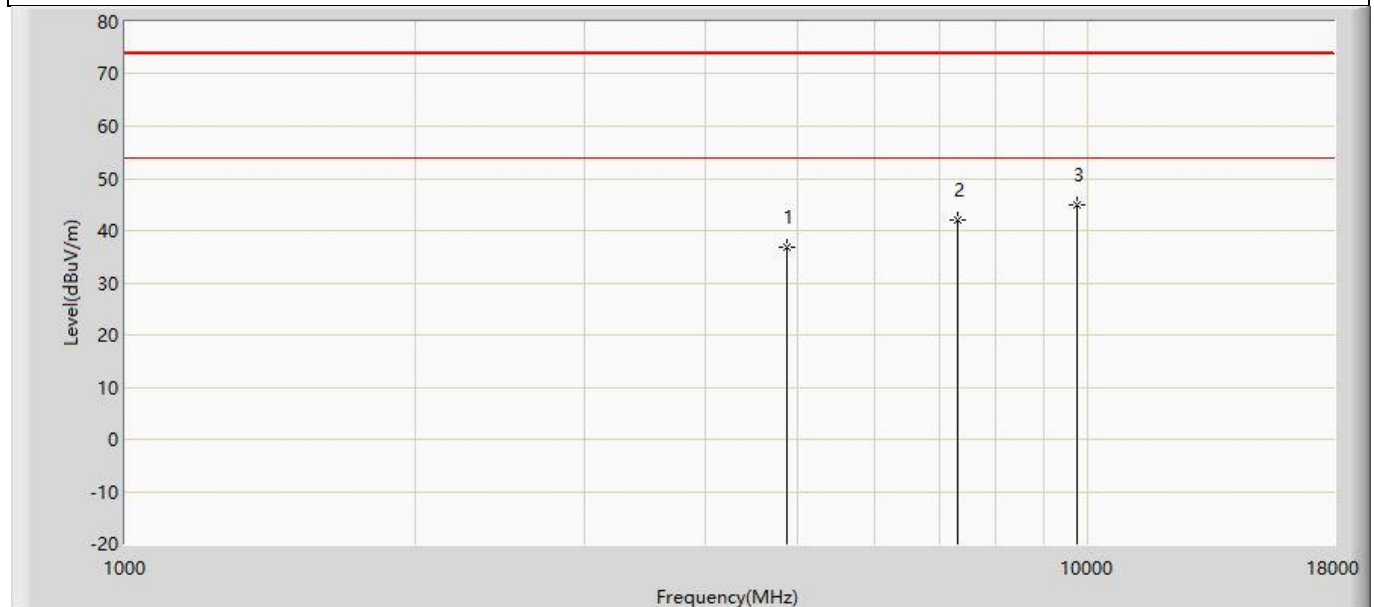


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.929	51.369	-37.071	74.000	-14.440	PK
2		7311.000	41.961	50.260	-32.039	74.000	-8.299	PK
3	*	9748.000	44.887	49.565	-29.113	74.000	-4.677	PK

Profile: 2250805R	Page No.: 95
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

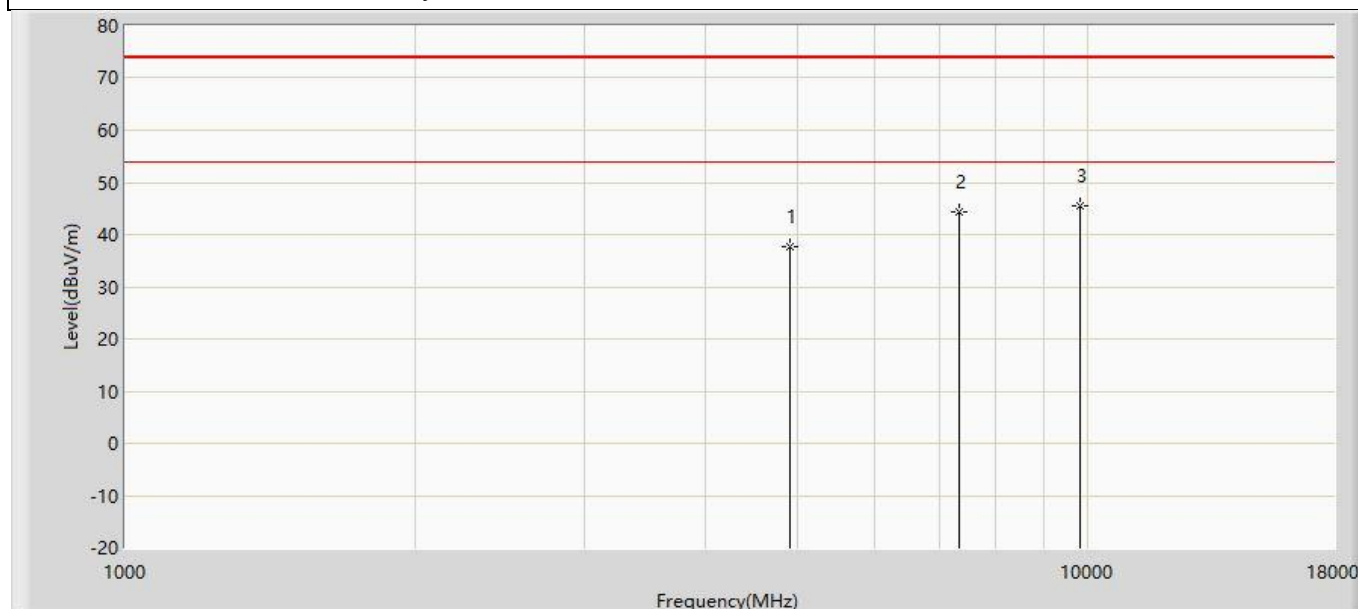

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	37.812	52.048	-36.188	74.000	-14.236	PK
2		7356.000	44.215	52.141	-29.785	74.000	-7.927	PK
3	*	9808.000	45.384	49.743	-28.616	74.000	-4.359	PK


Profile: 2250805R	Page No.: 96
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 03:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

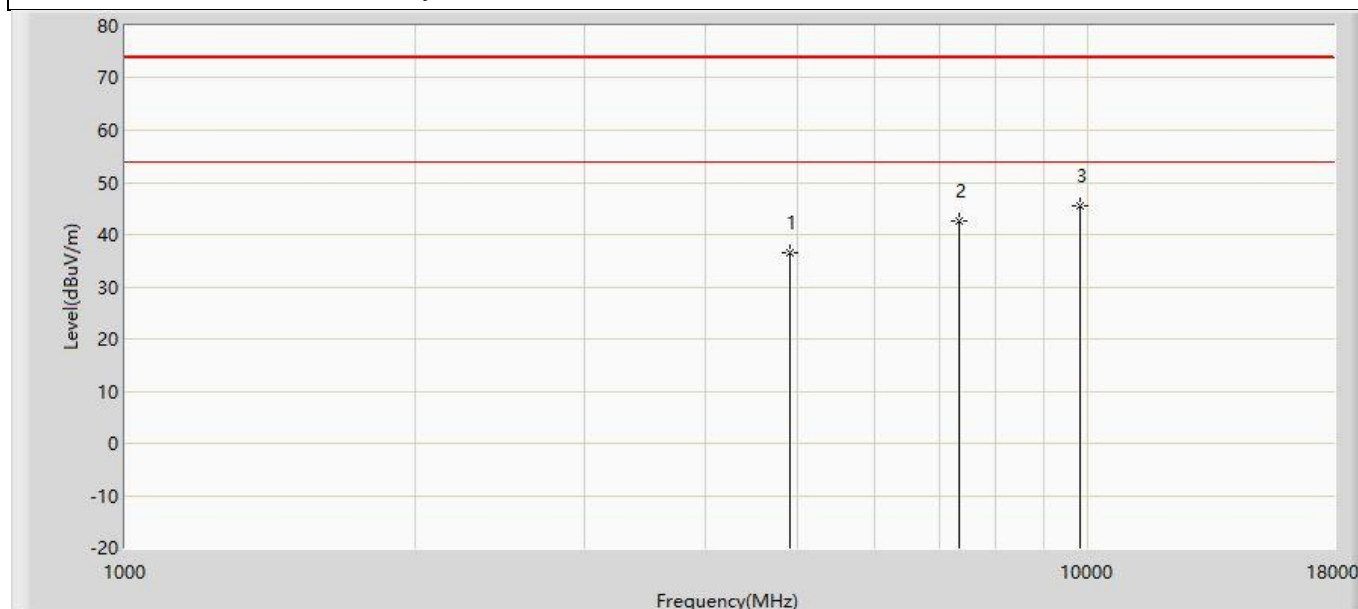

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.598	50.834	-37.402	74.000	-14.236	PK
2		7356.000	42.514	50.440	-31.486	74.000	-7.927	PK
3	*	9808.000	45.432	49.791	-28.568	74.000	-4.359	PK


CDD Antenna1+2:

Profile: 2250805R	Page No.: 49
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:16
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

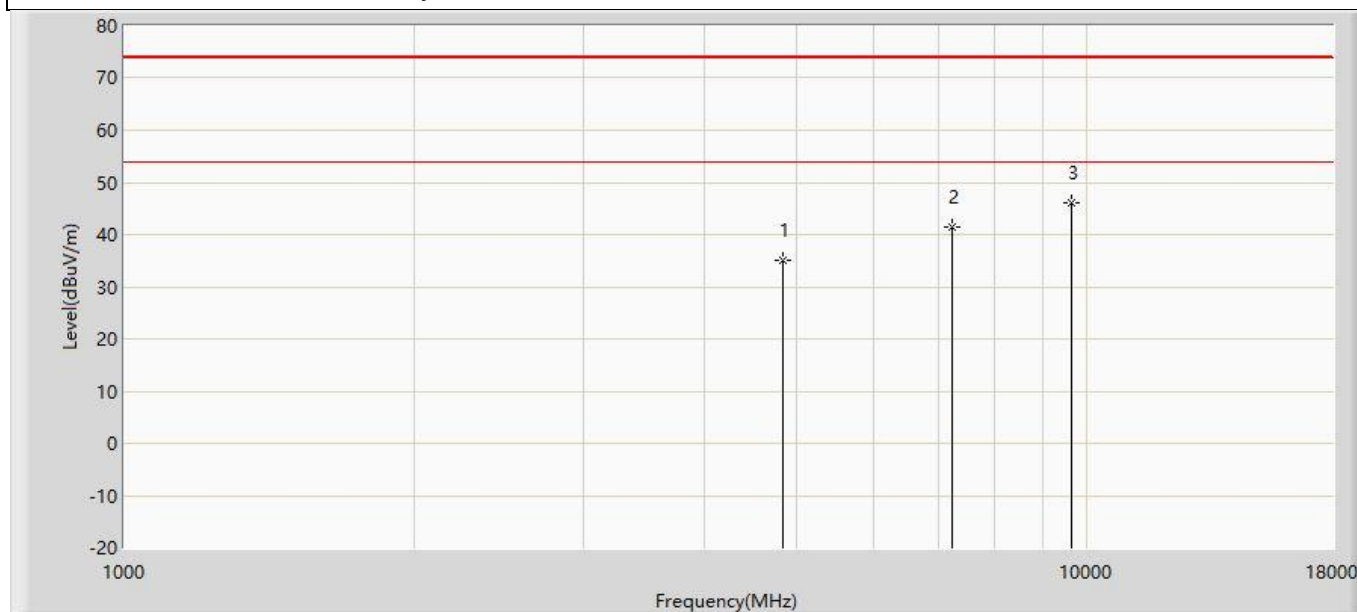


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.117	49.791	-38.883	74.000	-14.674	PK
2		7236.000	41.410	49.804	-32.590	74.000	-8.394	PK
3	*	9648.000	46.022	51.067	-27.978	74.000	-5.045	PK

Profile: 2250805R	Page No.: 50
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:16
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

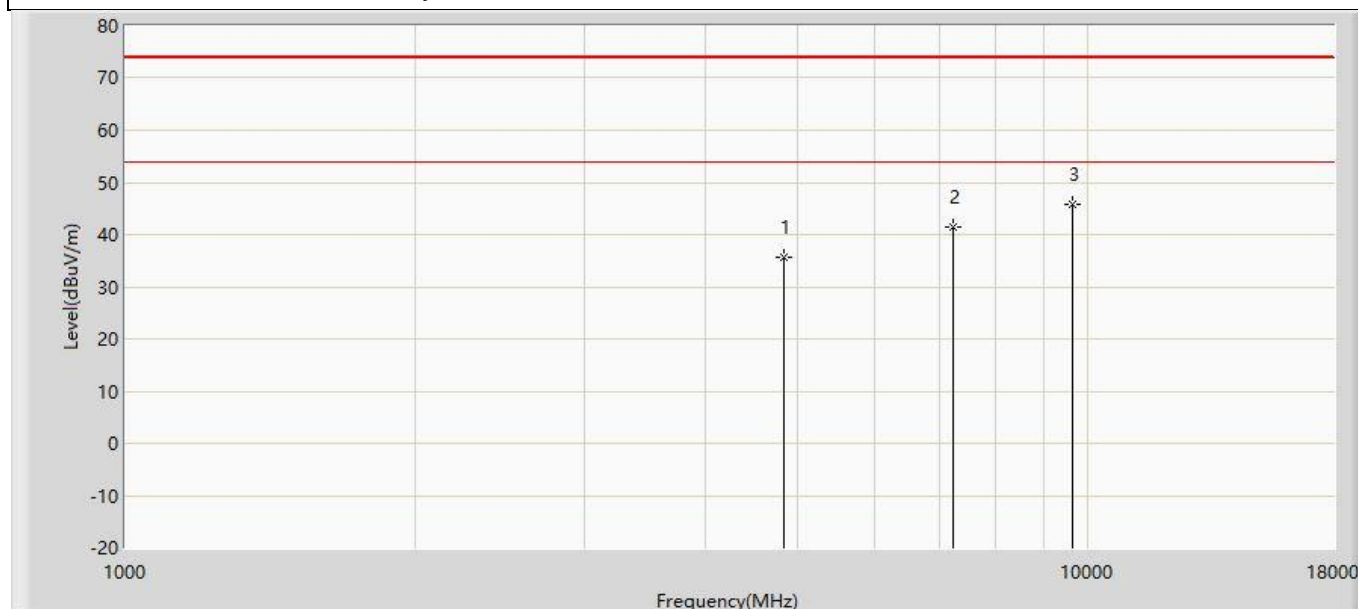


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.712	50.386	-38.288	74.000	-14.674	PK
2		7236.000	41.589	49.983	-32.411	74.000	-8.394	PK
3	*	9648.000	45.658	50.703	-28.342	74.000	-5.045	PK

Profile: 2250805R	Page No.: 51
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:16
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

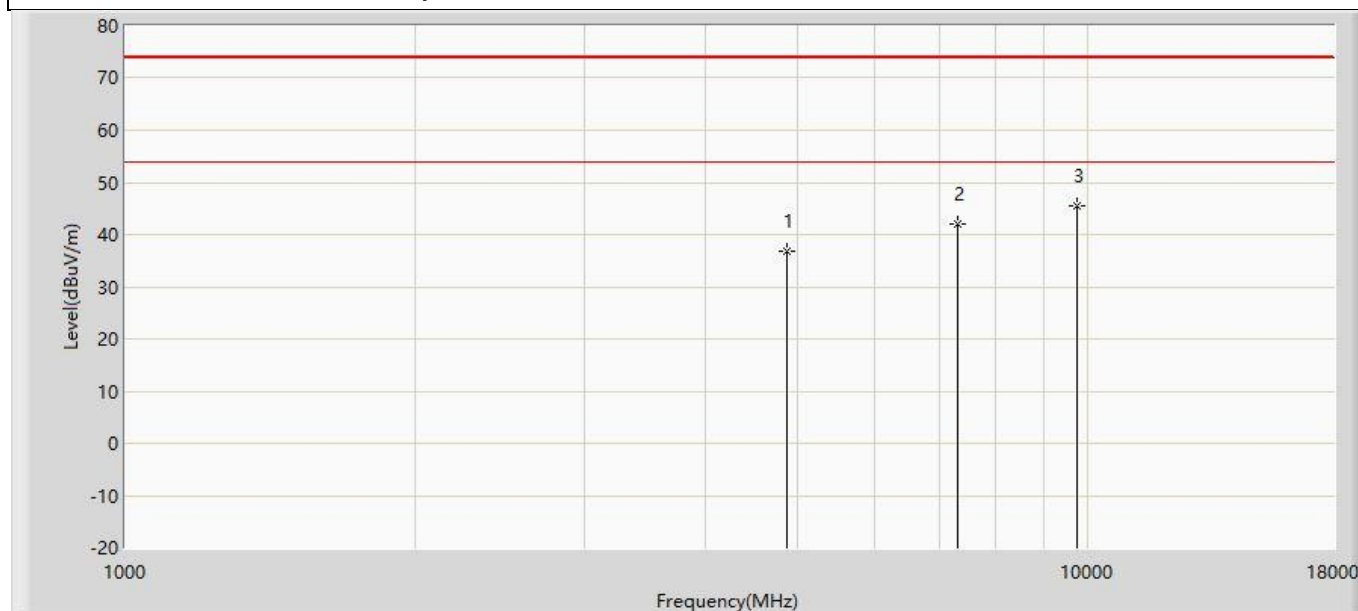


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.848	51.288	-37.152	74.000	-14.440	PK
2		7311.000	42.021	50.320	-31.979	74.000	-8.299	PK
3	*	9748.000	45.409	50.087	-28.591	74.000	-4.677	PK

Profile: 2250805R	Page No.: 52
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:16
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

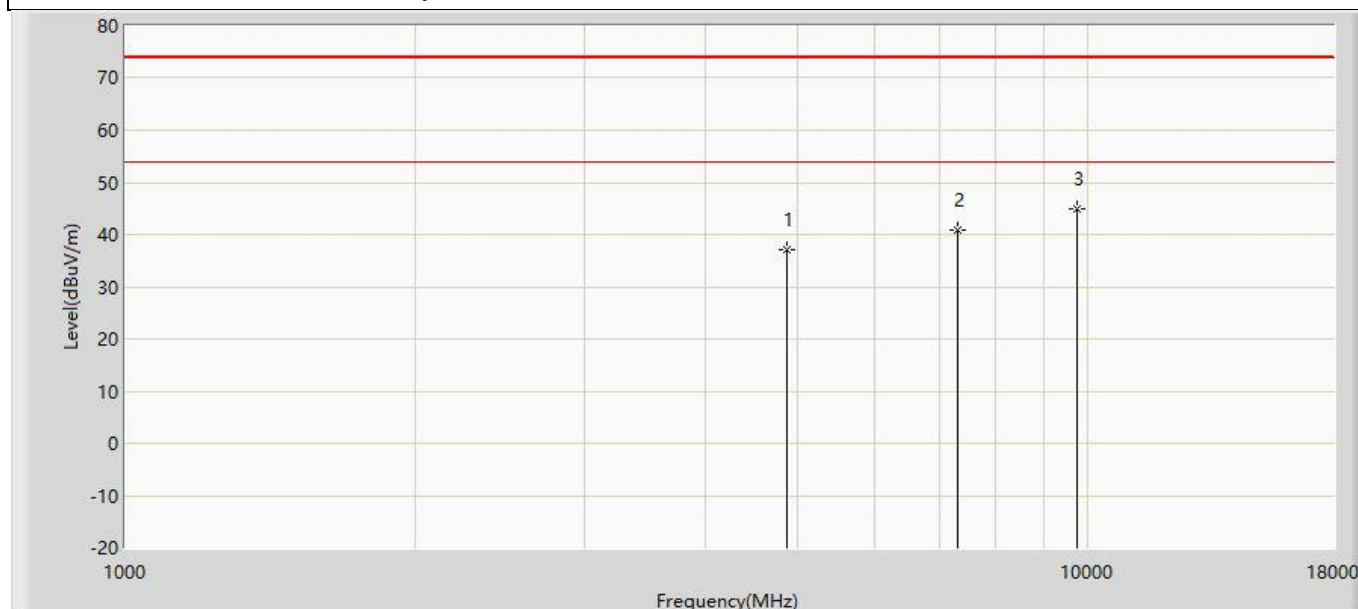


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.974	51.414	-37.026	74.000	-14.440	PK
2		7311.000	40.883	49.182	-33.117	74.000	-8.299	PK
3	*	9748.000	44.879	49.557	-29.121	74.000	-4.677	PK

Profile: 2250805R	Page No.: 53
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:16
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

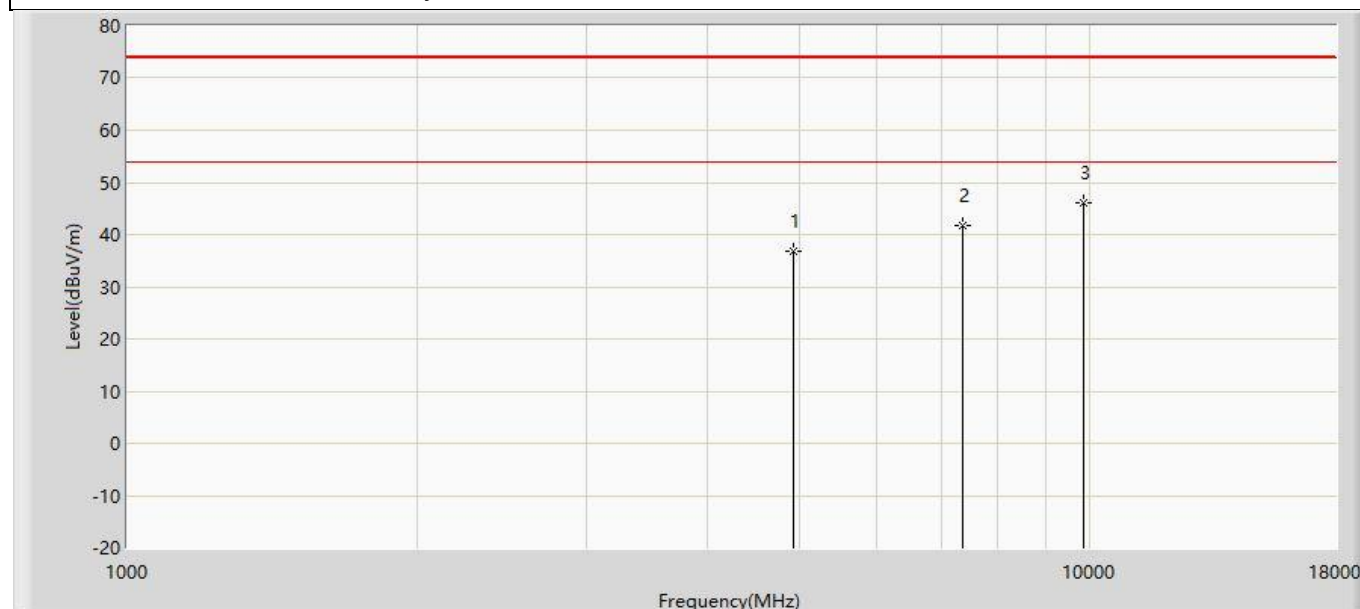


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.709	50.919	-37.291	74.000	-14.210	PK
2		7386.000	41.811	49.643	-32.189	74.000	-7.832	PK
3	*	9848.000	46.037	50.444	-27.963	74.000	-4.408	PK

Profile: 2250805R	Page No.: 54
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

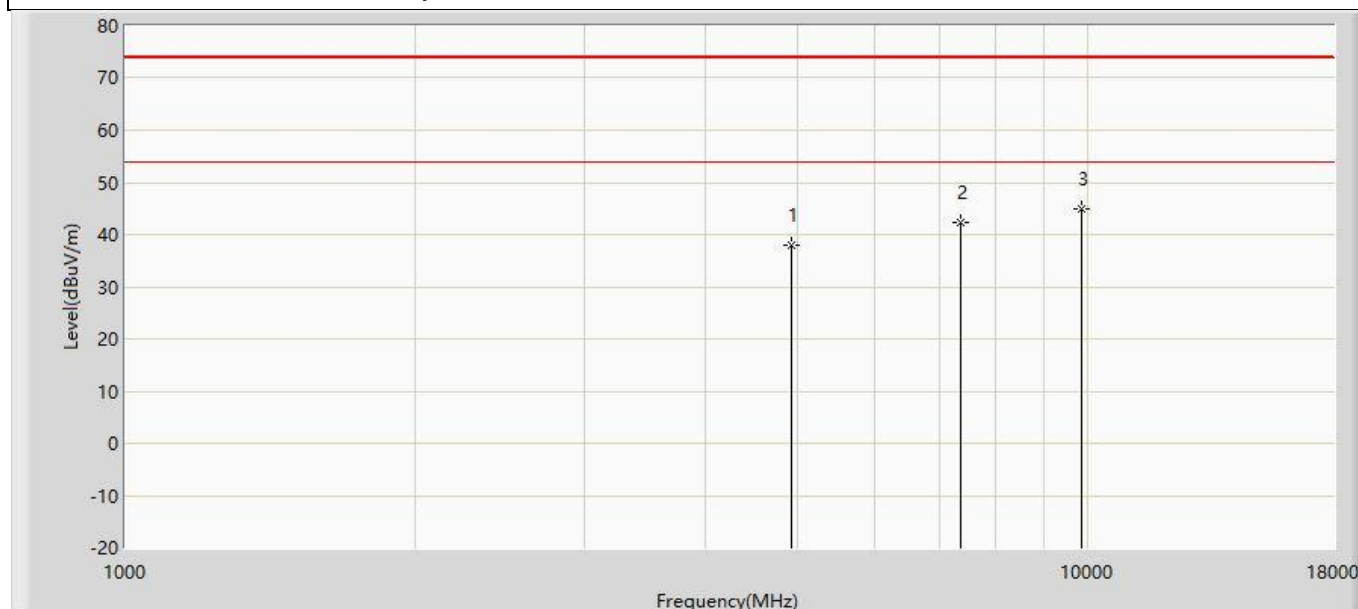


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	38.062	52.272	-35.938	74.000	-14.210	PK
2		7386.000	42.336	50.168	-31.664	74.000	-7.832	PK
3	*	9848.000	44.884	49.291	-29.116	74.000	-4.408	PK

Profile: 2250805R	Page No.: 55
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

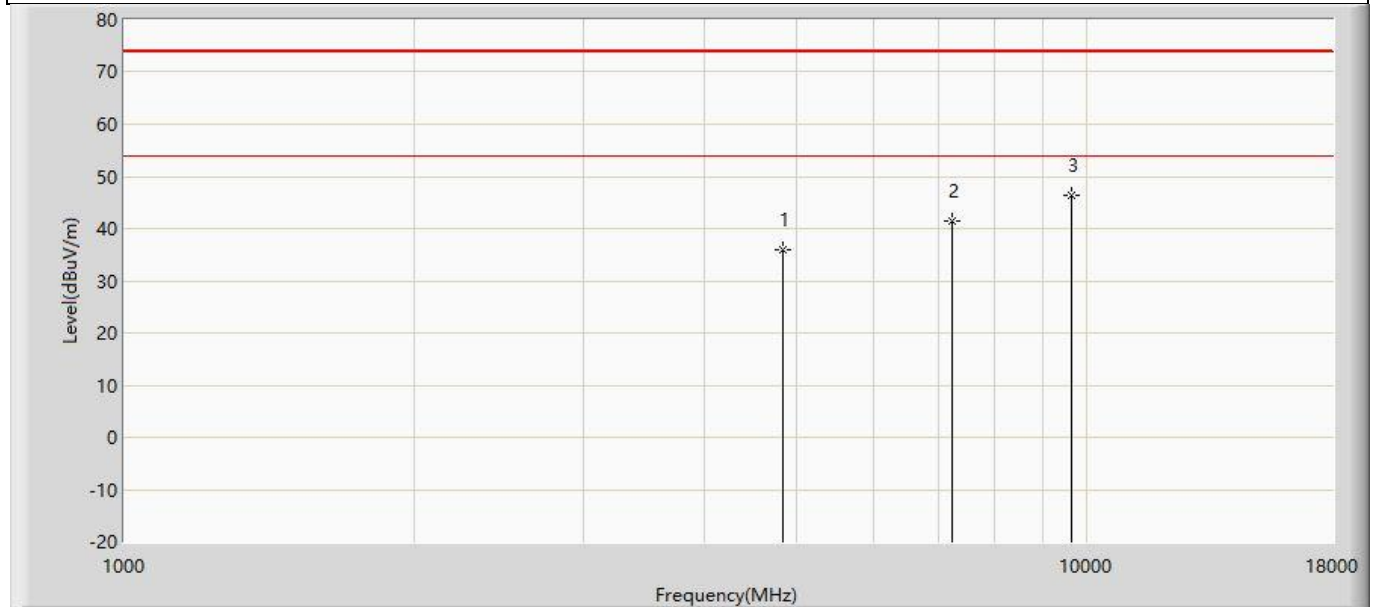


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	36.061	50.735	-37.939	74.000	-14.674	PK
2		7236.000	41.329	49.723	-32.671	74.000	-8.394	PK
3	*	9648.000	46.248	51.293	-27.752	74.000	-5.045	PK

Profile: 2250805R	Page No.: 56
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

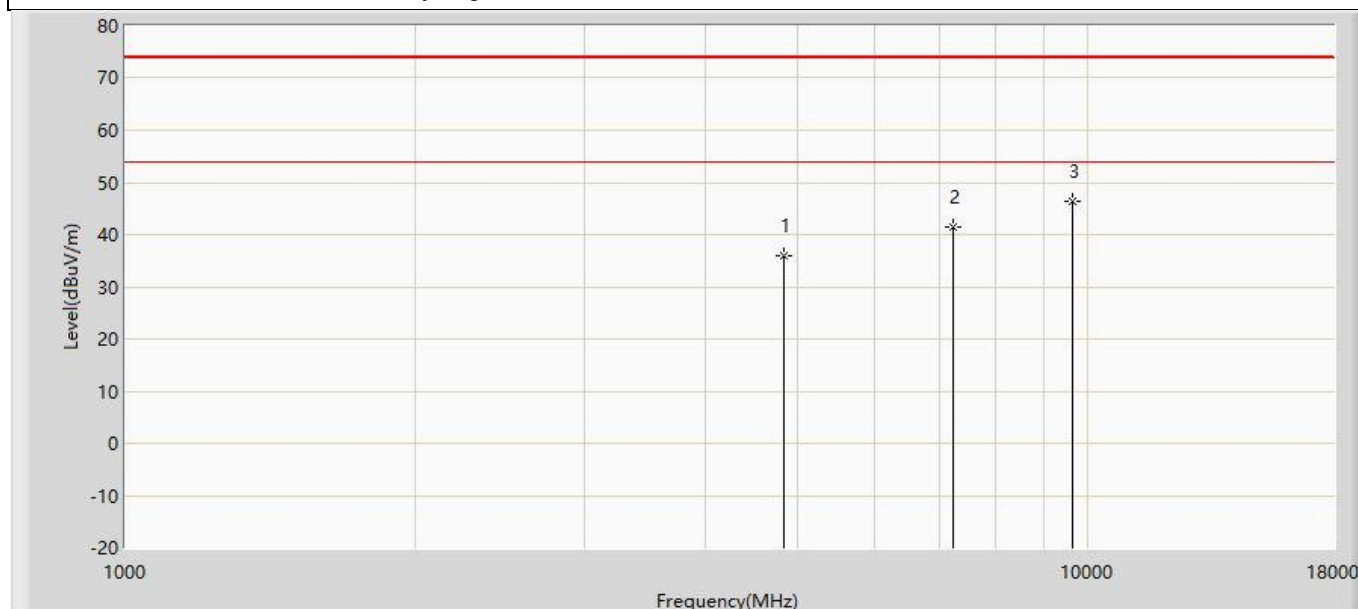


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.871	50.545	-38.129	74.000	-14.674	PK
2		7236.000	41.576	49.970	-32.424	74.000	-8.394	PK
3	*	9648.000	46.275	51.320	-27.725	74.000	-5.045	PK

Profile: 2250805R	Page No.: 57
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

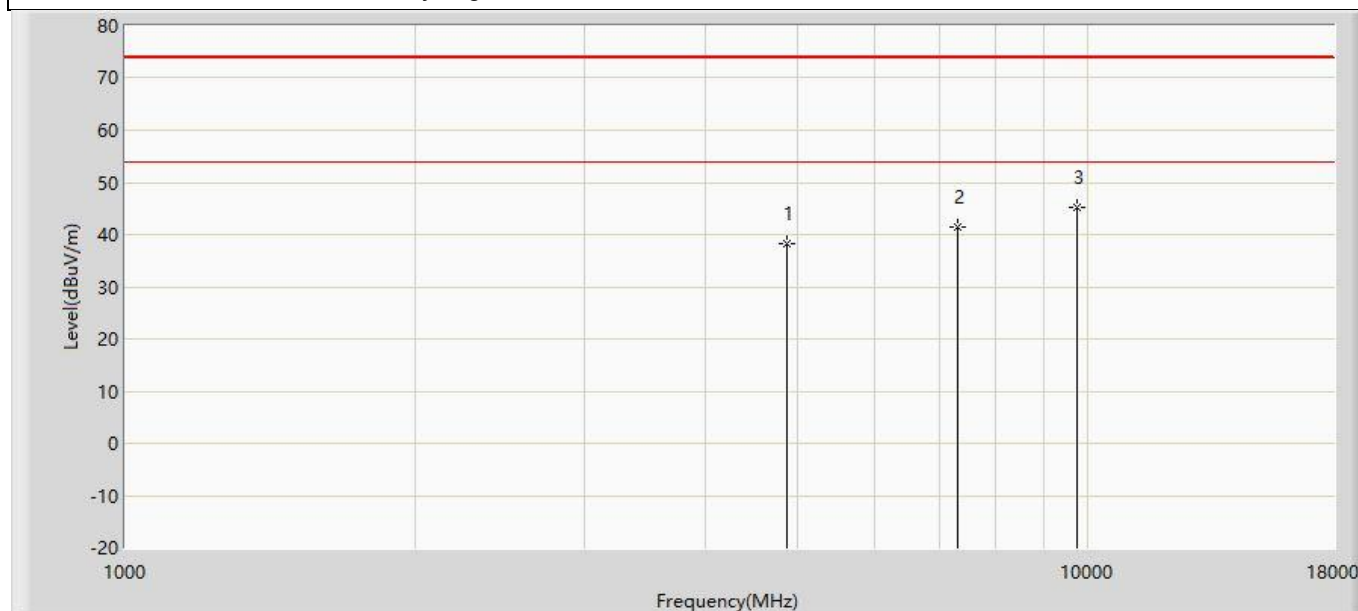


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	38.229	52.669	-35.771	74.000	-14.440	PK
2		7311.000	41.482	49.781	-32.518	74.000	-8.299	PK
3	*	9748.000	45.129	49.807	-28.871	74.000	-4.677	PK

Profile: 2250805R	Page No.: 58
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

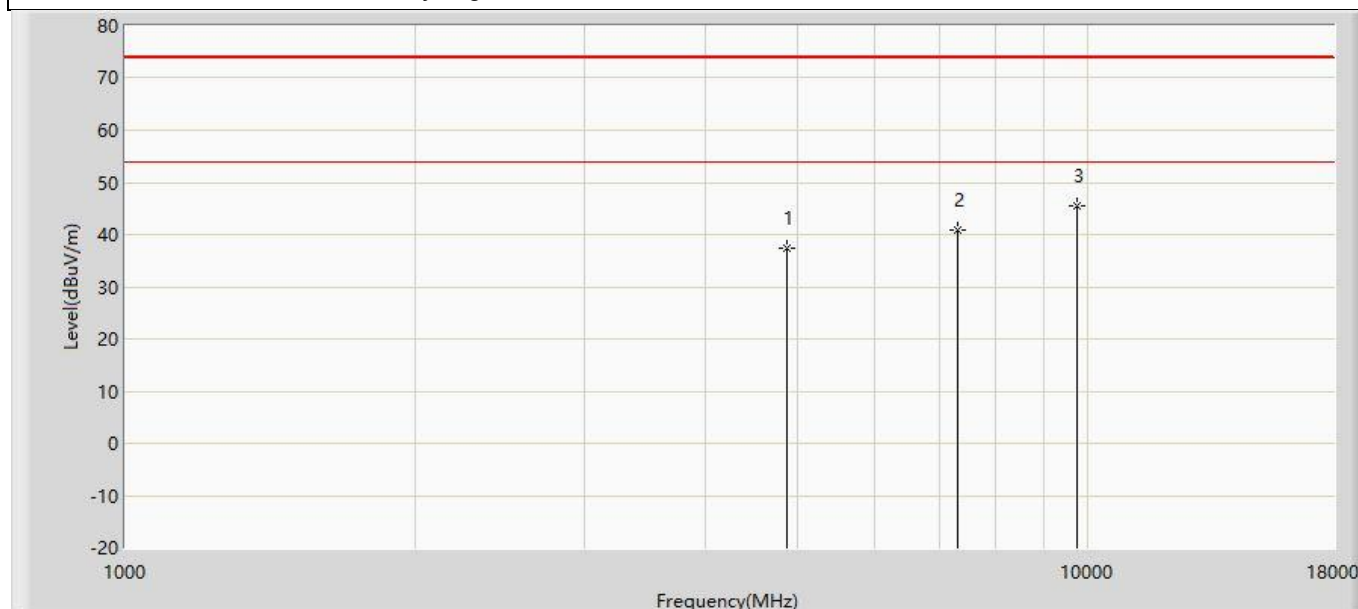


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.466	51.906	-36.534	74.000	-14.440	PK
2		7311.000	40.882	49.181	-33.118	74.000	-8.299	PK
3	*	9748.000	45.487	50.165	-28.513	74.000	-4.677	PK

Profile: 2250805R	Page No.: 59
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

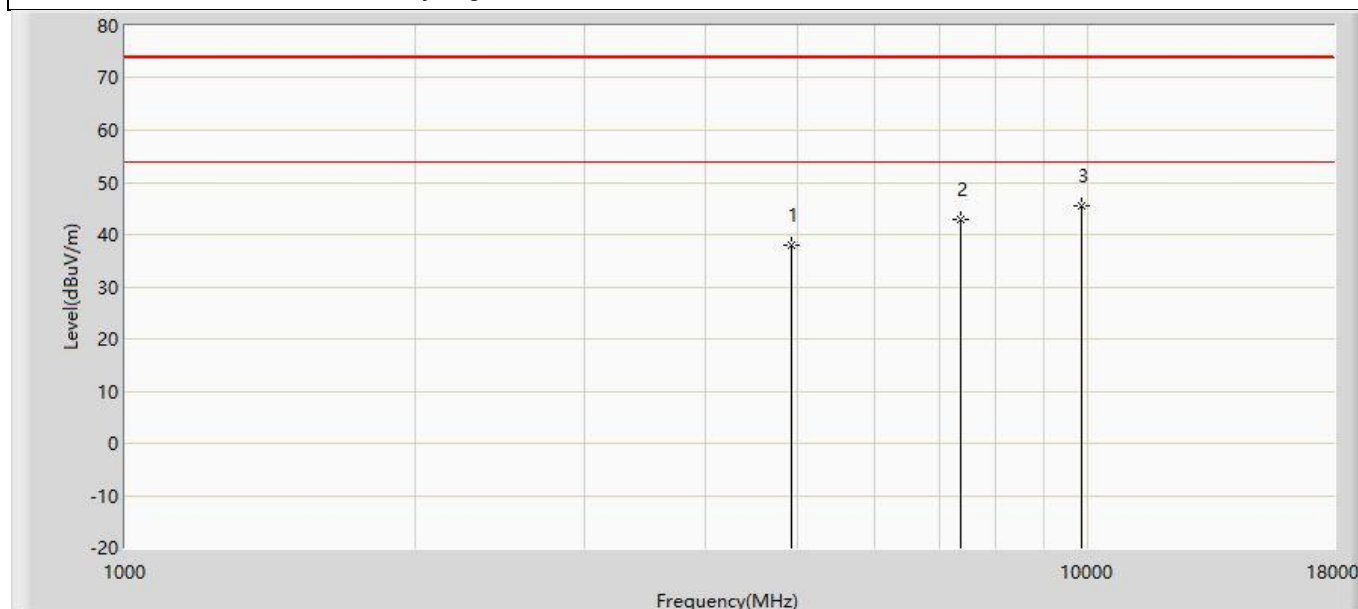


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.933	52.143	-36.067	74.000	-14.210	PK
2		7386.000	42.957	50.789	-31.043	74.000	-7.832	PK
3	*	9848.000	45.516	49.923	-28.484	74.000	-4.408	PK

Profile: 2250805R	Page No.: 60
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

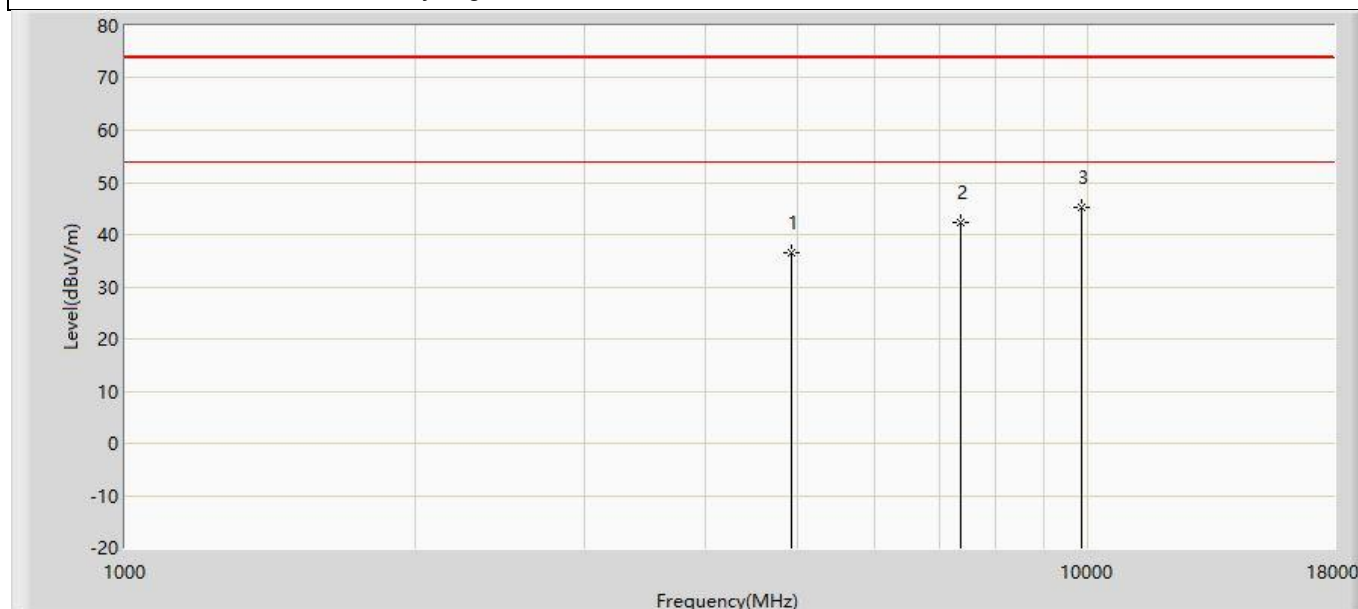


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.509	50.719	-37.491	74.000	-14.210	PK
2		7386.000	42.324	50.156	-31.676	74.000	-7.832	PK
3	*	9848.000	45.074	49.481	-28.926	74.000	-4.408	PK

Profile: 2250805R	Page No.: 61
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

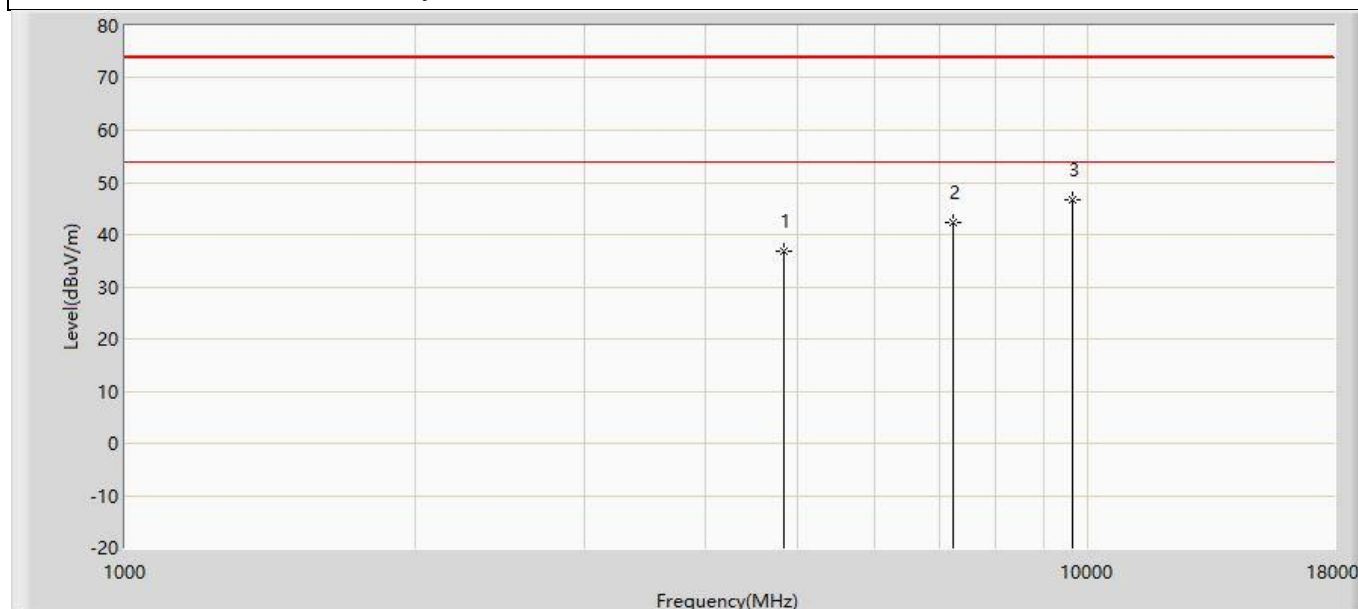


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	36.701	51.375	-37.299	74.000	-14.674	PK
2		7236.000	42.441	50.835	-31.559	74.000	-8.394	PK
3	*	9648.000	46.689	51.734	-27.311	74.000	-5.045	PK

Profile: 2250805R	Page No.: 62
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n20	

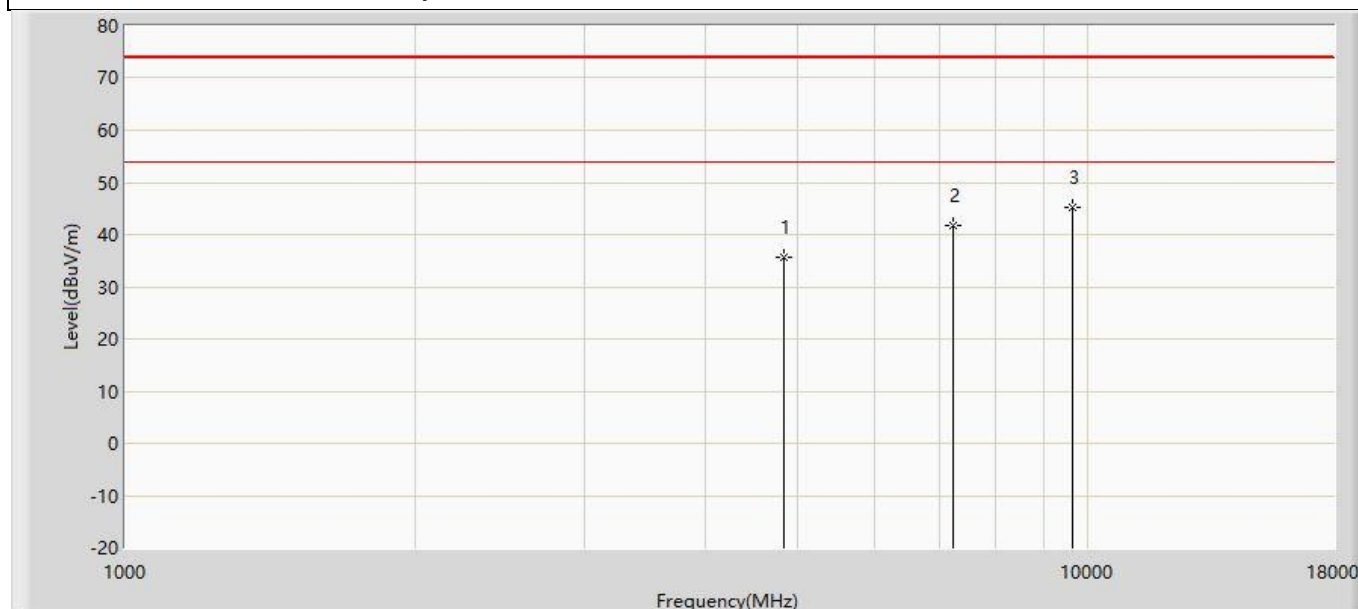


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	35.797	50.471	-38.203	74.000	-14.674	PK
2		7236.000	41.784	50.178	-32.216	74.000	-8.394	PK
3	*	9648.000	45.160	50.205	-28.840	74.000	-5.045	PK

Profile: 2250805R	Page No.: 63
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

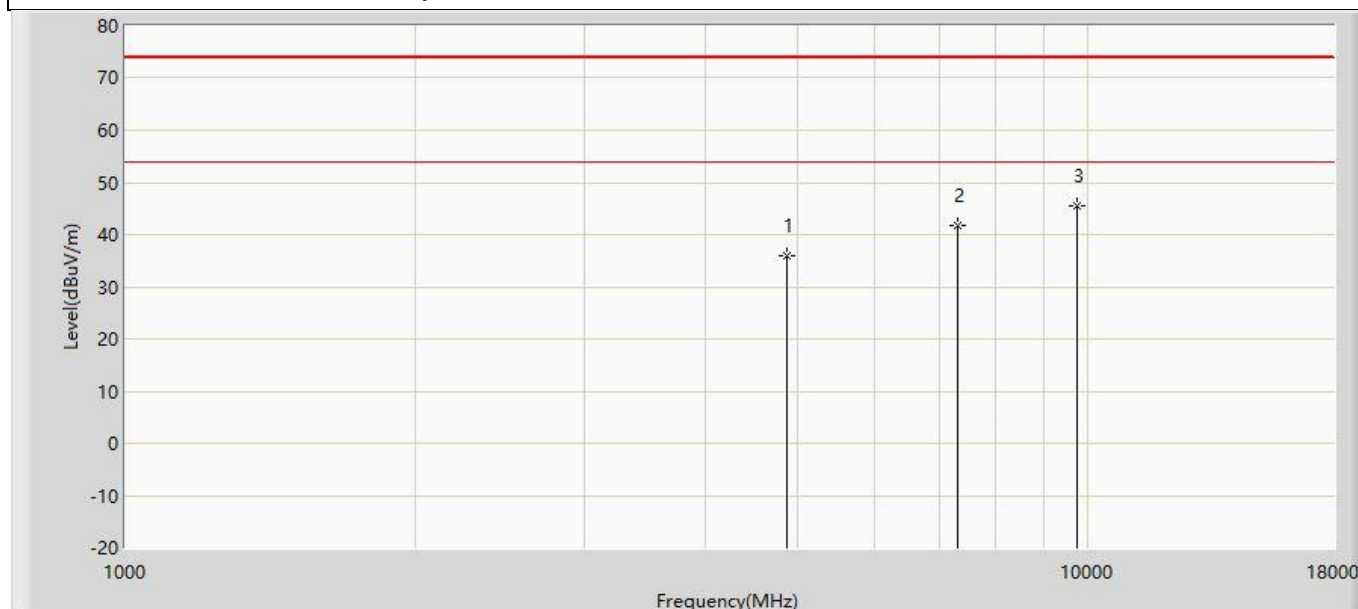


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.022	50.462	-37.978	74.000	-14.440	PK
2		7311.000	41.629	49.928	-32.371	74.000	-8.299	PK
3	*	9748.000	45.491	50.169	-28.509	74.000	-4.677	PK

Profile: 2250805R	Page No.: 64
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n20	

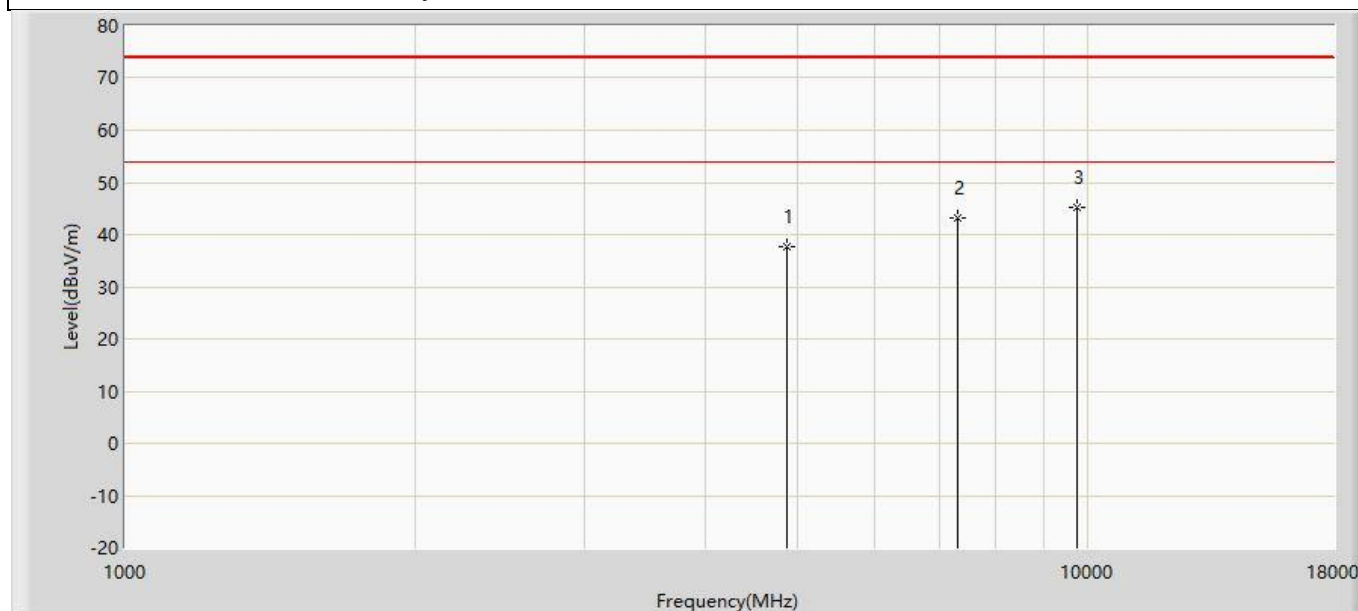


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.778	52.218	-36.222	74.000	-14.440	PK
2		7311.000	43.066	51.365	-30.934	74.000	-8.299	PK
3	*	9748.000	45.288	49.966	-28.712	74.000	-4.677	PK

Profile: 2250805R	Page No.: 65
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

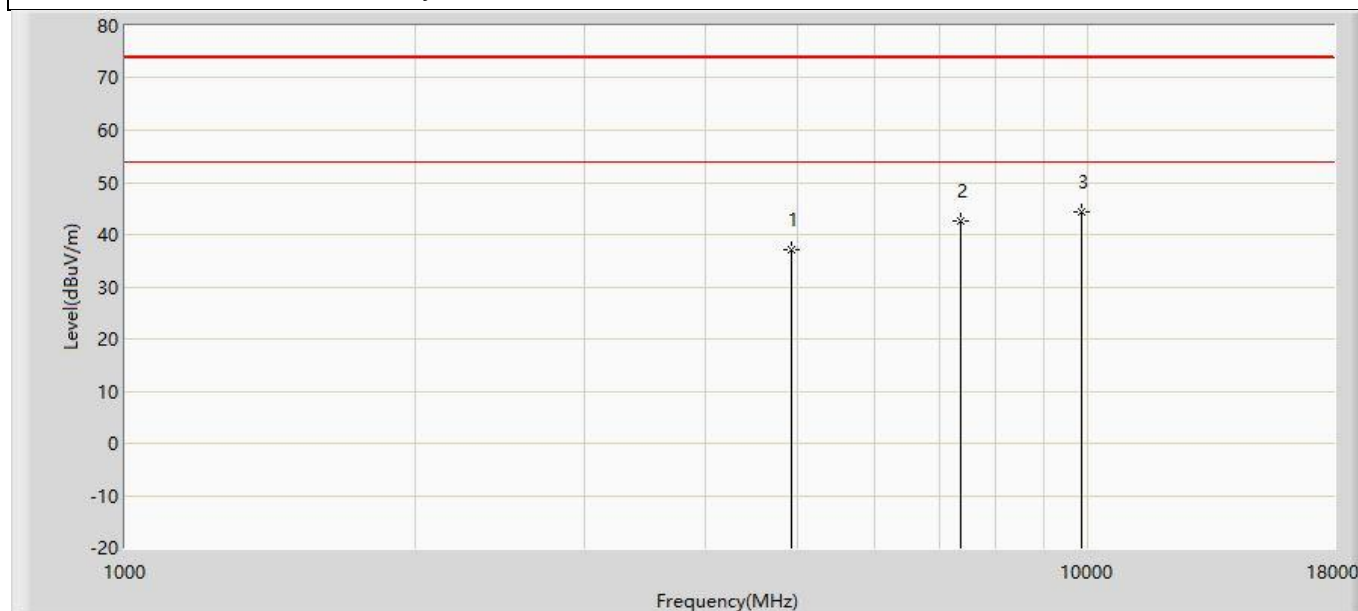


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.154	51.364	-36.846	74.000	-14.210	PK
2		7386.000	42.632	50.464	-31.368	74.000	-7.832	PK
3	*	9848.000	44.398	48.805	-29.602	74.000	-4.408	PK

Profile: 2250805R	Page No.: 66
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n20	

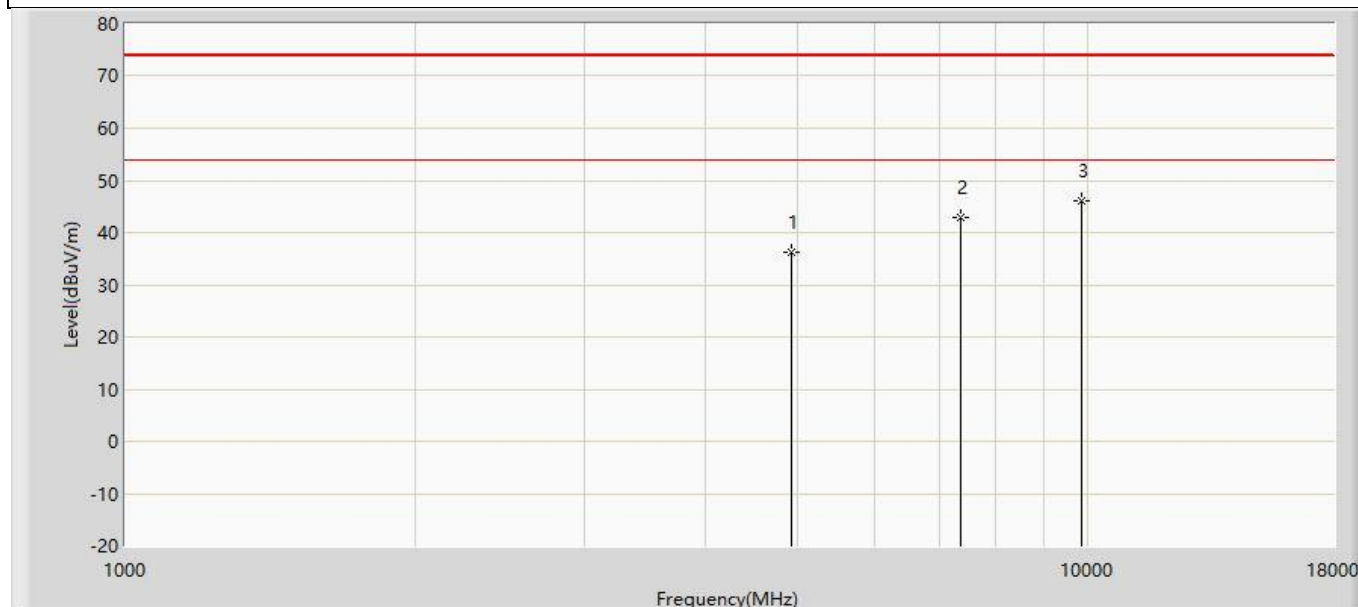


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.299	50.509	-37.701	74.000	-14.210	PK
2		7386.000	42.896	50.728	-31.104	74.000	-7.832	PK
3	*	9848.000	46.029	50.436	-27.971	74.000	-4.408	PK

Profile: 2250805R	Page No.: 67
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:17
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

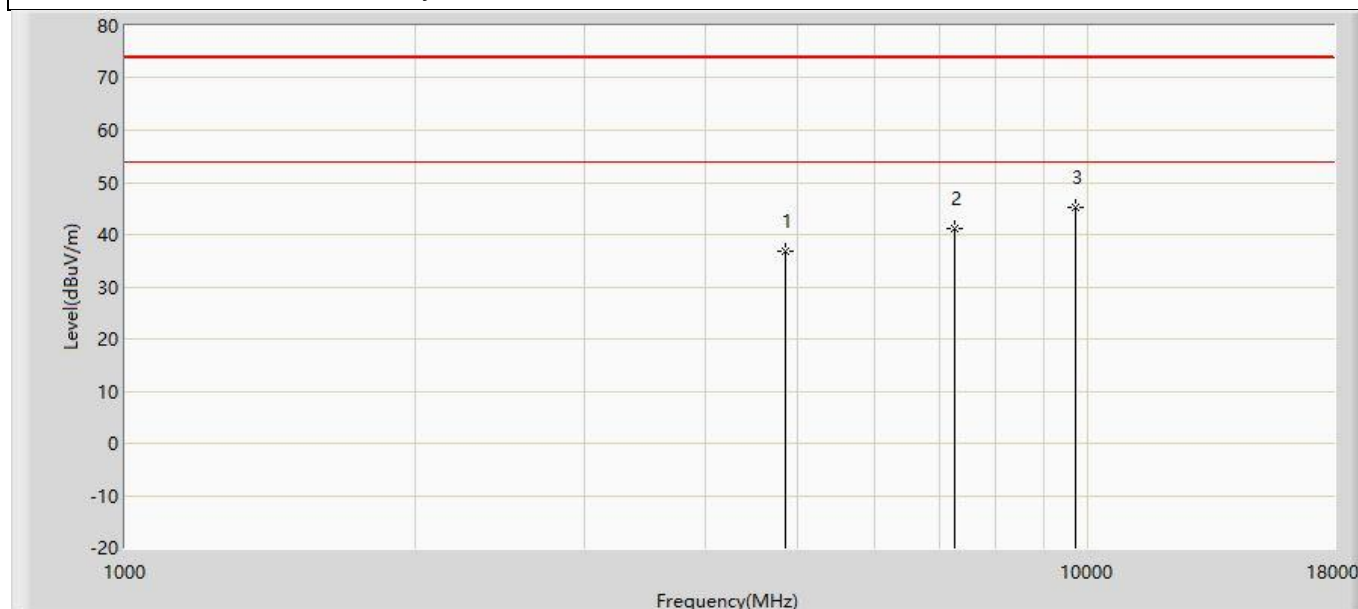


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.812	51.436	-37.188	74.000	-14.623	PK
2		7266.000	41.072	49.456	-32.928	74.000	-8.384	PK
3	*	9688.000	45.137	49.801	-28.863	74.000	-4.663	PK

Profile: 2250805R	Page No.: 68
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:18
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n40	

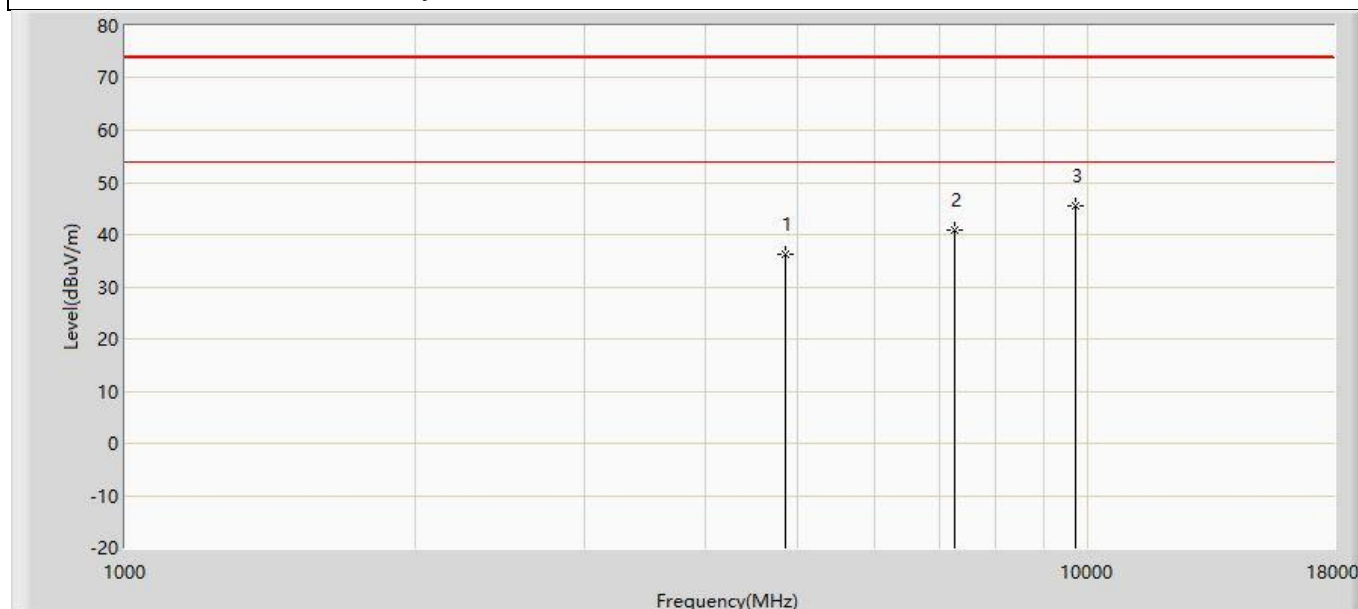


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.108	50.732	-37.892	74.000	-14.623	PK
2		7266.000	40.994	49.378	-33.006	74.000	-8.384	PK
3	*	9688.000	45.457	50.121	-28.543	74.000	-4.663	PK

Profile: 2250805R	Page No.: 69
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:18
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

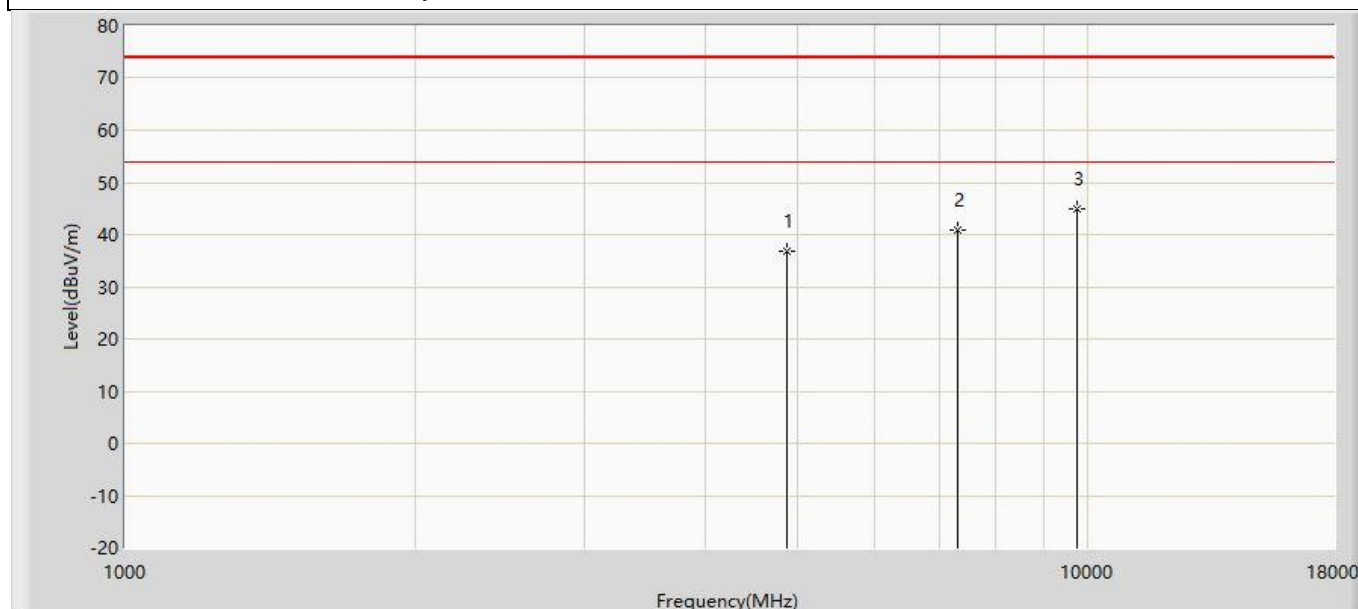


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.734	51.174	-37.266	74.000	-14.440	PK
2		7311.000	40.955	49.254	-33.045	74.000	-8.299	PK
3	*	9748.000	44.854	49.532	-29.146	74.000	-4.677	PK

Profile: 2250805R	Page No.: 70
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:18
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n40	

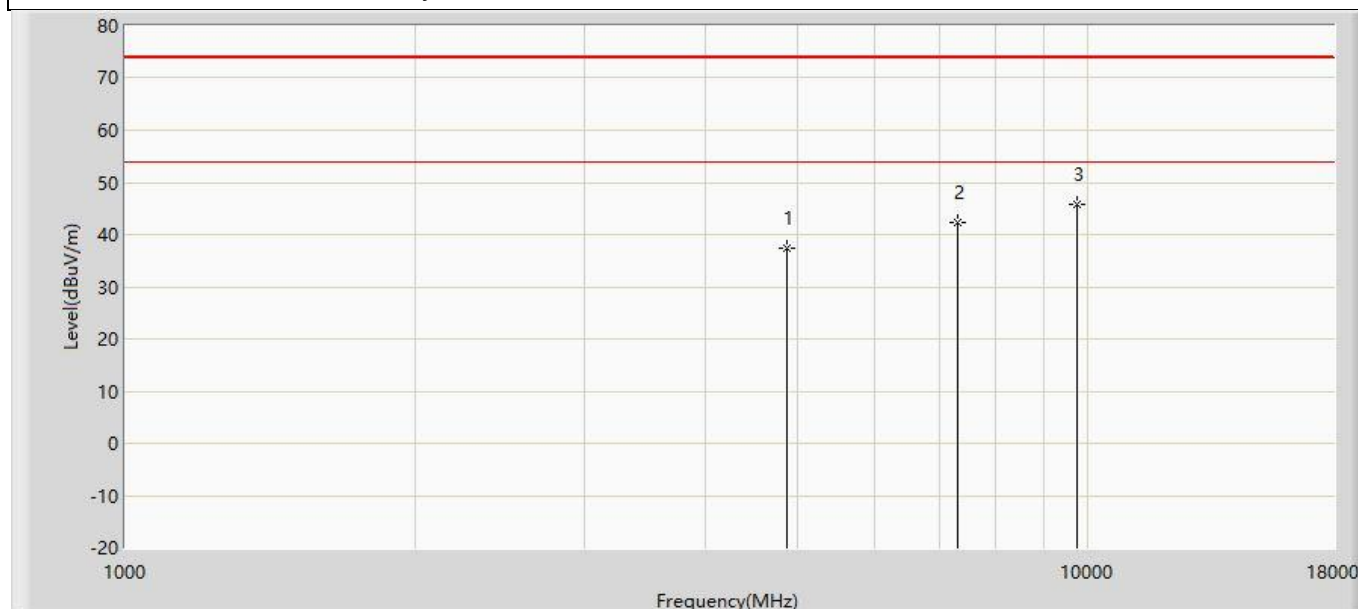


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.383	51.823	-36.617	74.000	-14.440	PK
2		7311.000	42.423	50.722	-31.577	74.000	-8.299	PK
3	*	9748.000	45.822	50.500	-28.178	74.000	-4.677	PK

Profile: 2250805R	Page No.: 71
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:18
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

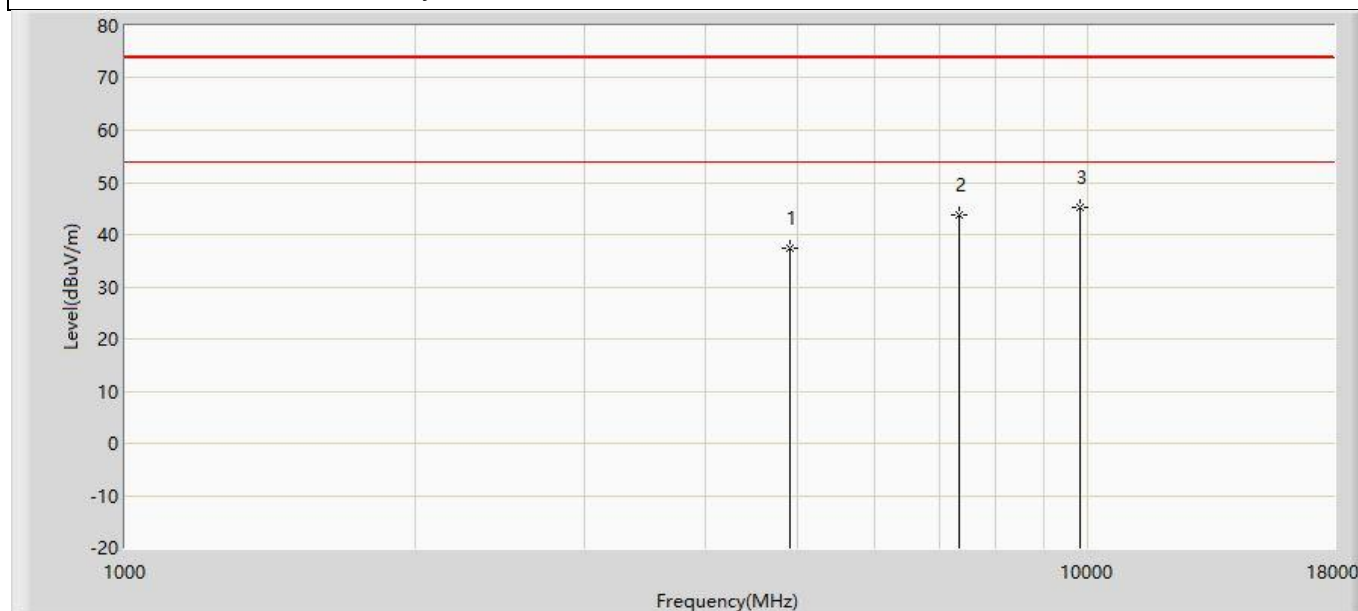


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	37.447	51.683	-36.553	74.000	-14.236	PK
2		7356.000	43.879	51.805	-30.121	74.000	-7.927	PK
3	*	9808.000	45.332	49.691	-28.668	74.000	-4.359	PK

Profile: 2250805R	Page No.: 72
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:18
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n40	

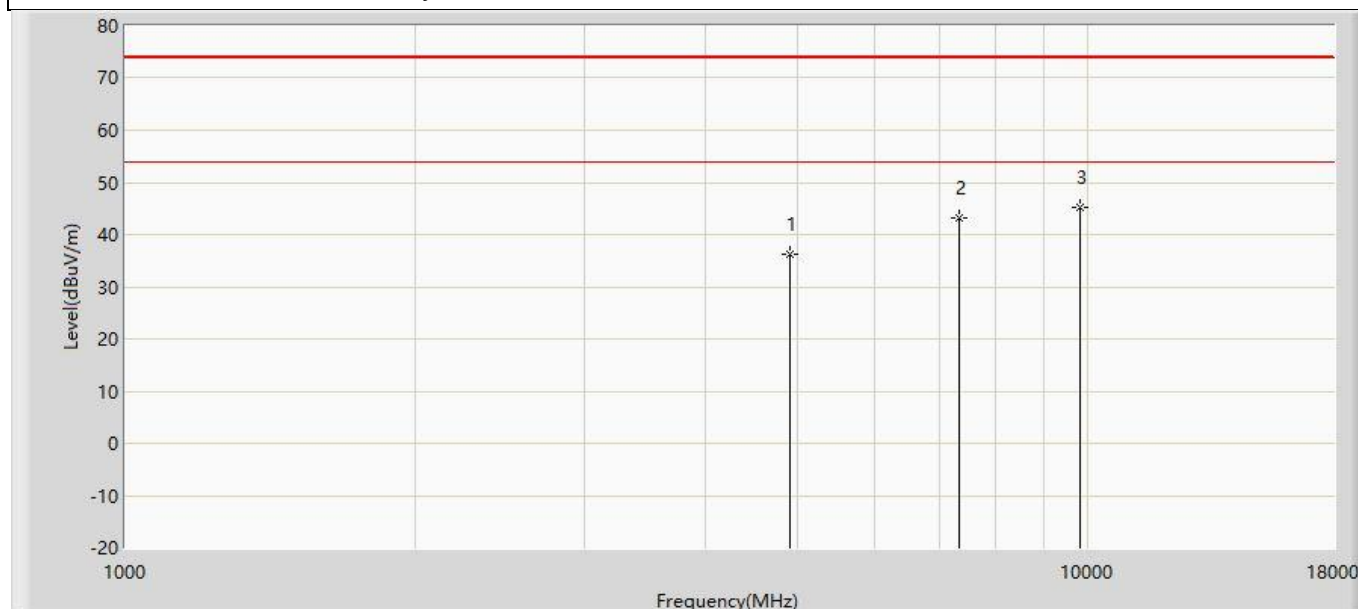


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.339	50.575	-37.661	74.000	-14.236	PK
2		7356.000	43.116	51.042	-30.884	74.000	-7.927	PK
3	*	9808.000	45.323	49.682	-28.677	74.000	-4.359	PK

Profile: 2250805R	Page No.: 85
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

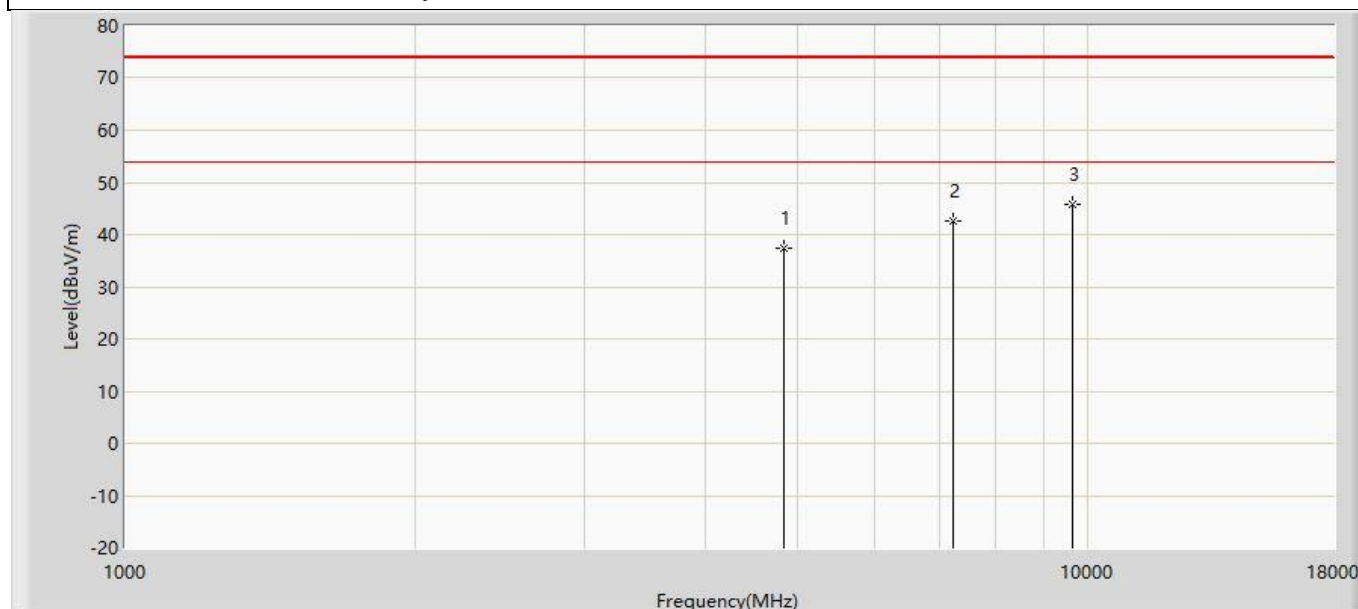


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	37.255	51.929	-36.745	74.000	-14.674	PK
2		7236.000	42.726	51.120	-31.274	74.000	-8.394	PK
3	*	9648.000	45.820	50.865	-28.180	74.000	-5.045	PK

Profile: 2250805R	Page No.: 86
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2412MHz by 11ax20	

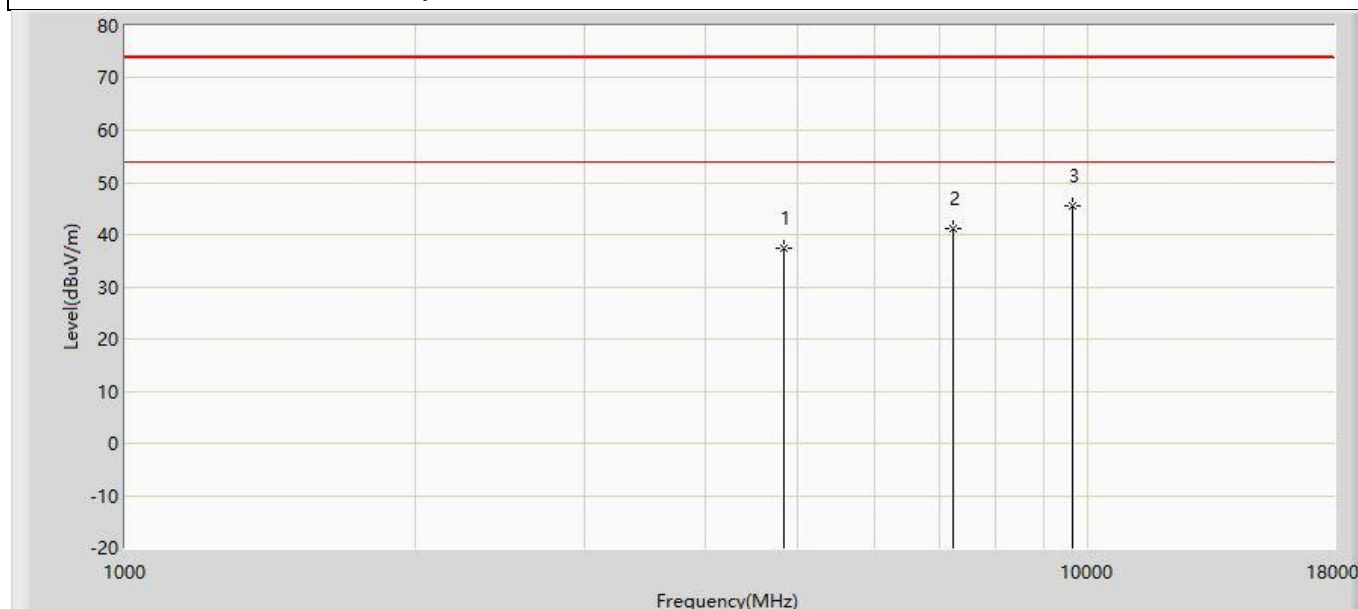


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	37.506	52.180	-36.494	74.000	-14.674	PK
2		7236.000	41.214	49.608	-32.786	74.000	-8.394	PK
3	*	9648.000	45.583	50.628	-28.417	74.000	-5.045	PK

Profile: 2250805R	Page No.: 87
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

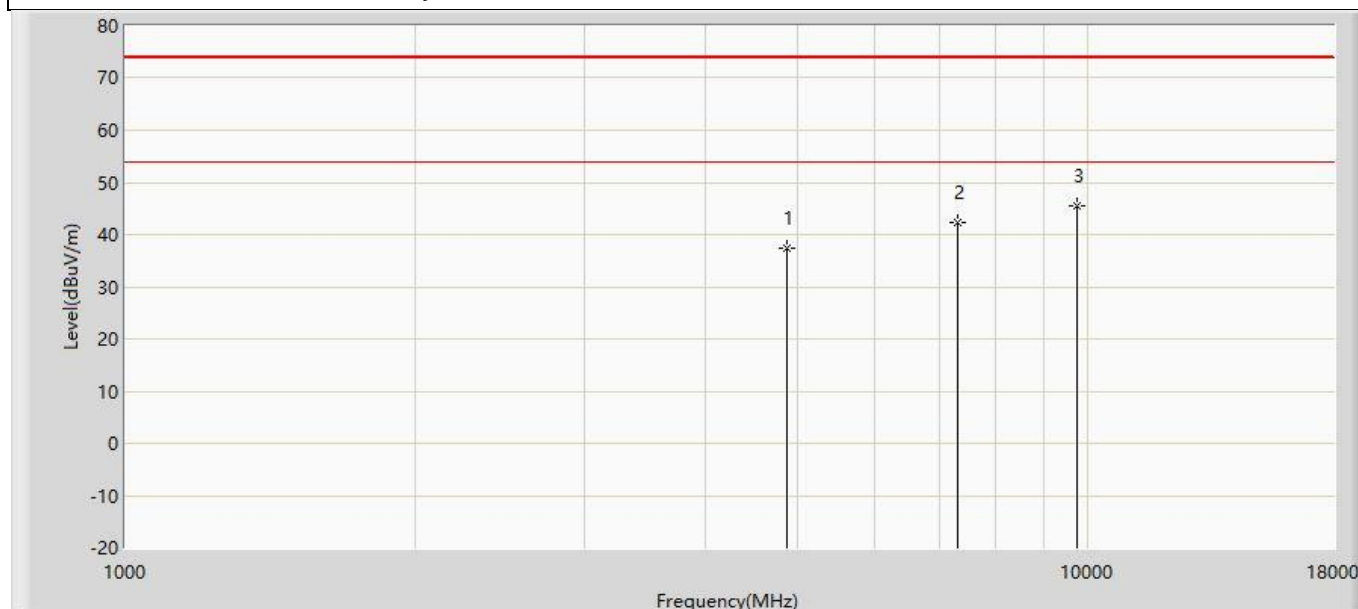


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.315	51.755	-36.685	74.000	-14.440	PK
2		7311.000	42.372	50.671	-31.628	74.000	-8.299	PK
3	*	9748.000	45.526	50.204	-28.474	74.000	-4.677	PK

Profile: 2250805R	Page No.: 88
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2437MHz by 11ax20	

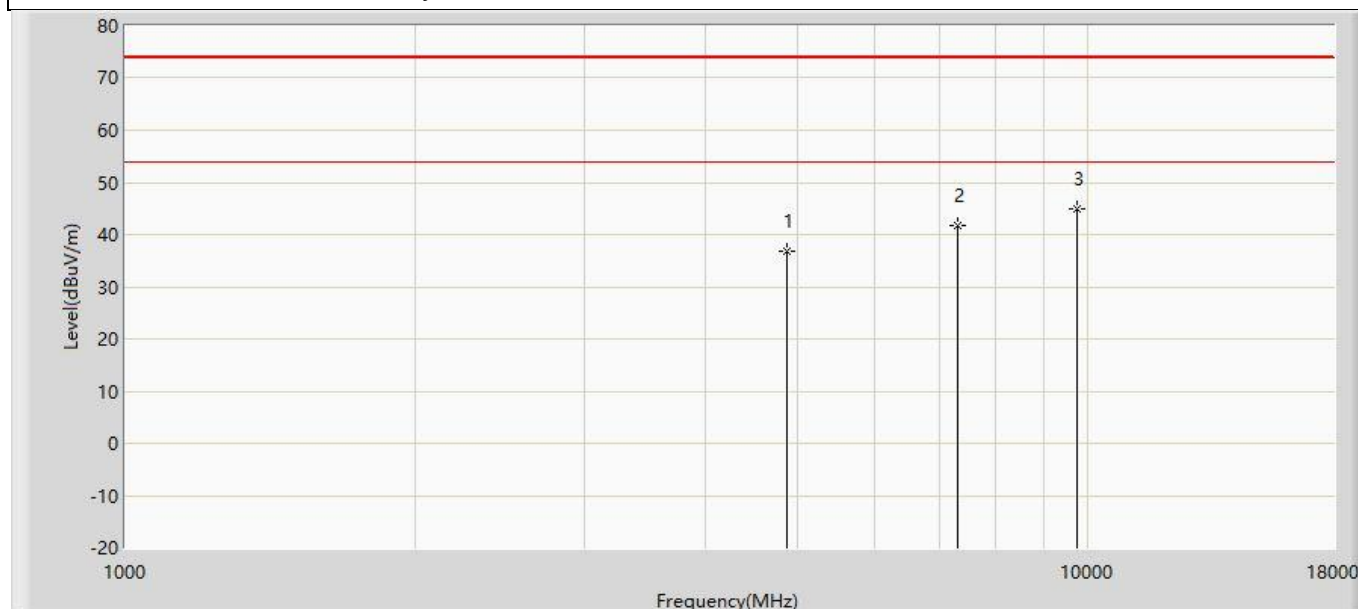


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.921	51.361	-37.079	74.000	-14.440	PK
2		7311.000	41.779	50.078	-32.221	74.000	-8.299	PK
3	*	9748.000	44.816	49.494	-29.184	74.000	-4.677	PK

Profile: 2250805R	Page No.: 89
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

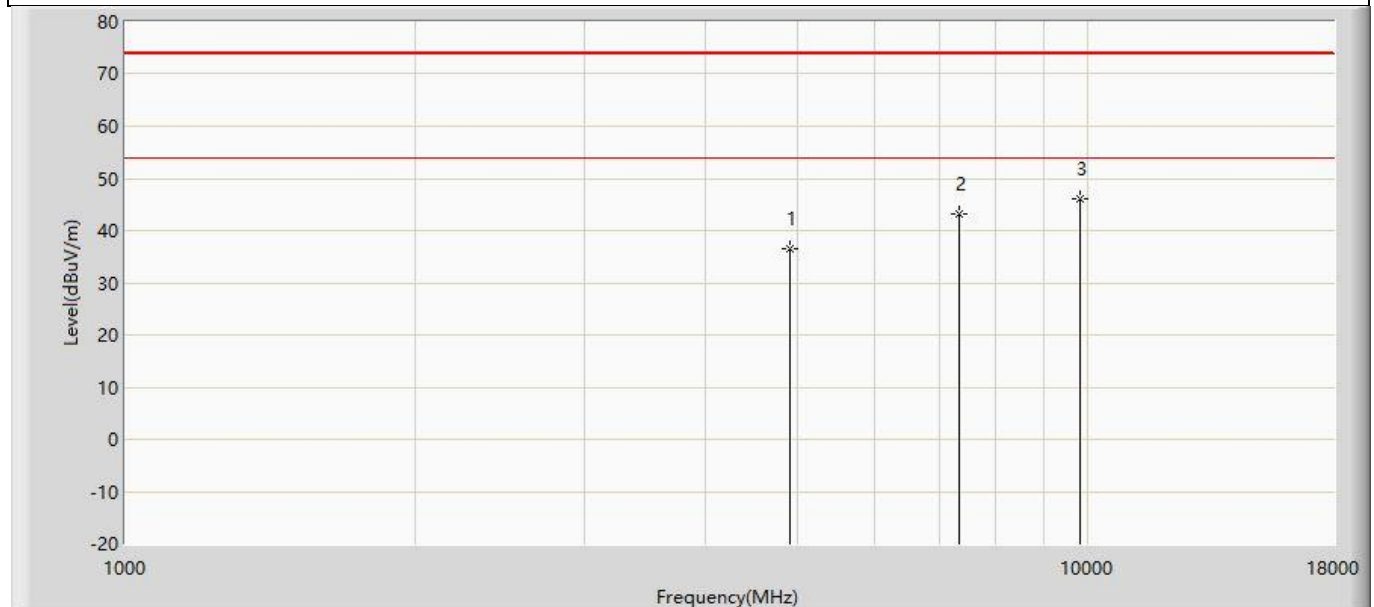


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.388	50.624	-37.612	74.000	-14.236	PK
2		7356.000	43.210	51.136	-30.790	74.000	-7.927	PK
3	*	9808.000	46.216	50.575	-27.784	74.000	-4.359	PK

Profile: 2250805R	Page No.: 90
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 2452MHz by 11ax20	

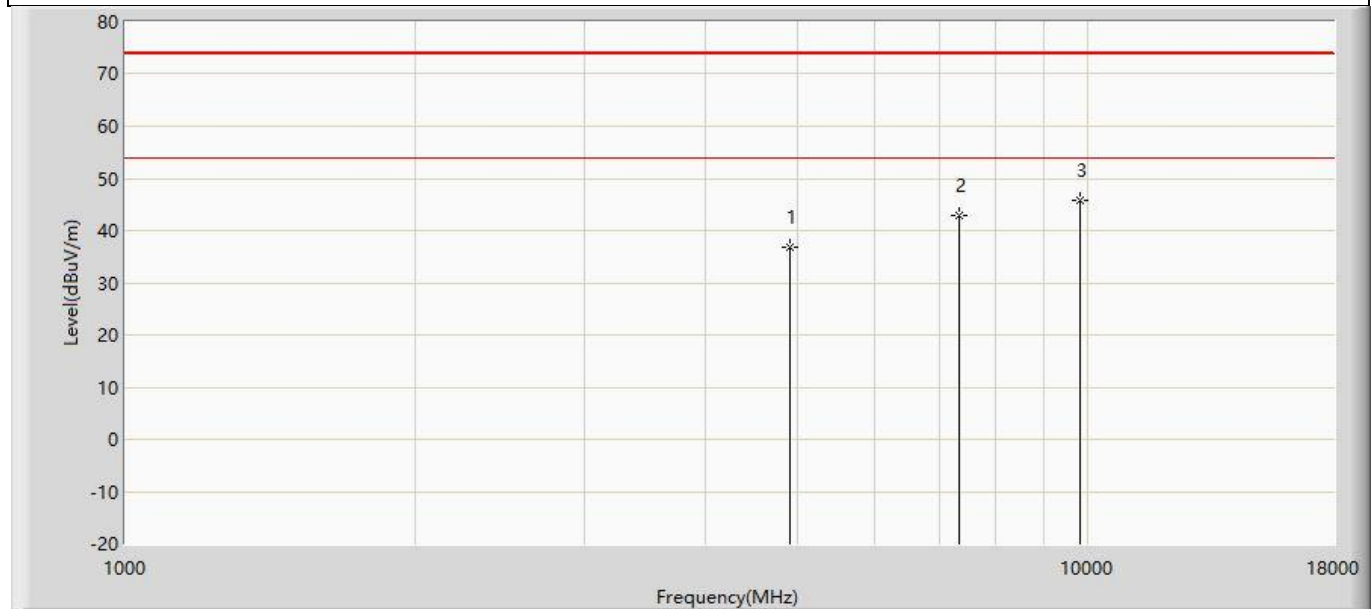


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	36.762	50.998	-37.238	74.000	-14.236	PK
2		7356.000	42.986	50.912	-31.014	74.000	-7.927	PK
3	*	9808.000	45.796	50.155	-28.204	74.000	-4.359	PK

Profile: 2250805R	Page No.: 91
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

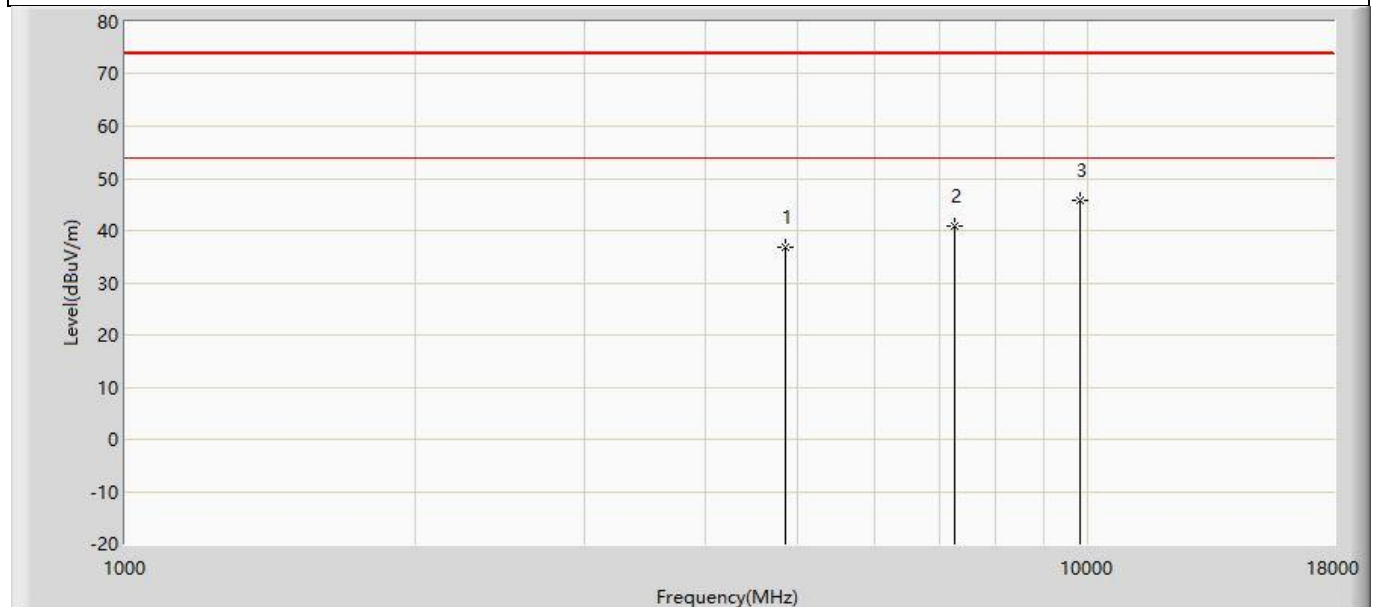


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	36.767	51.391	-37.233	74.000	-14.623	PK
2		7266.000	40.754	49.138	-33.246	74.000	-8.384	PK
3	*	9808.000	45.925	50.284	-28.075	74.000	-4.359	PK

Profile: 2250805R	Page No.: 92
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2422MHz by 11ax40	

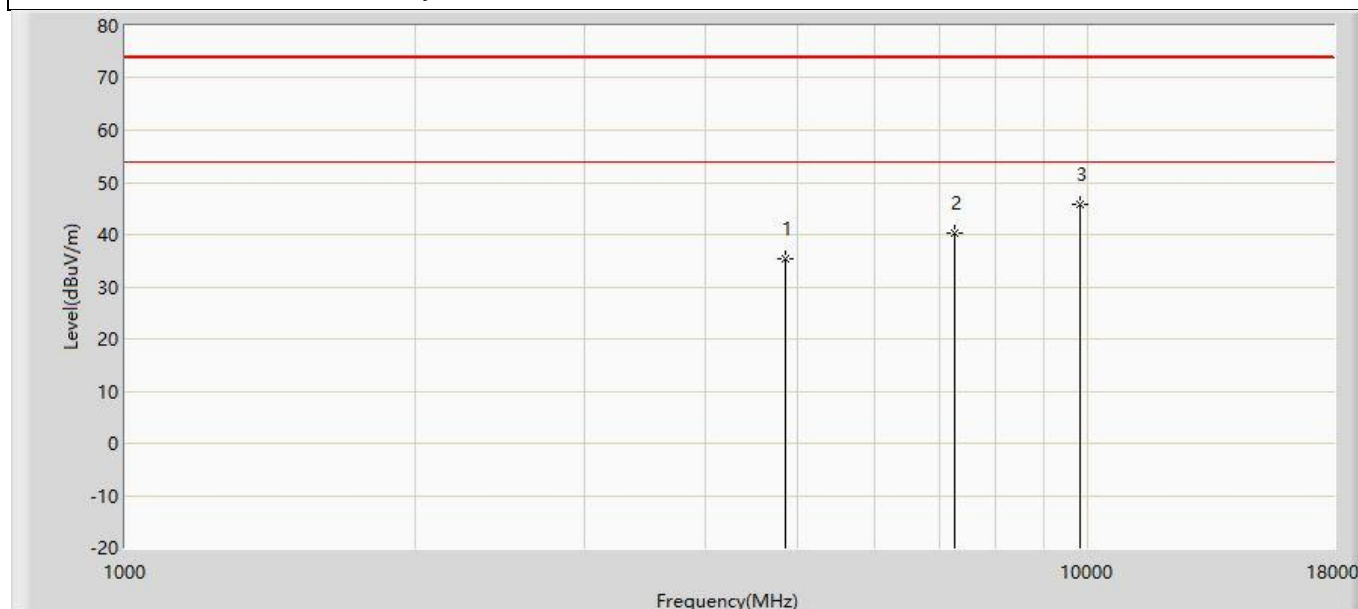


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.387	50.011	-38.613	74.000	-14.623	PK
2		7266.000	40.314	48.698	-33.686	74.000	-8.384	PK
3	*	9808.000	45.691	50.050	-28.309	74.000	-4.359	PK

Profile: 2250805R	Page No.: 93
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

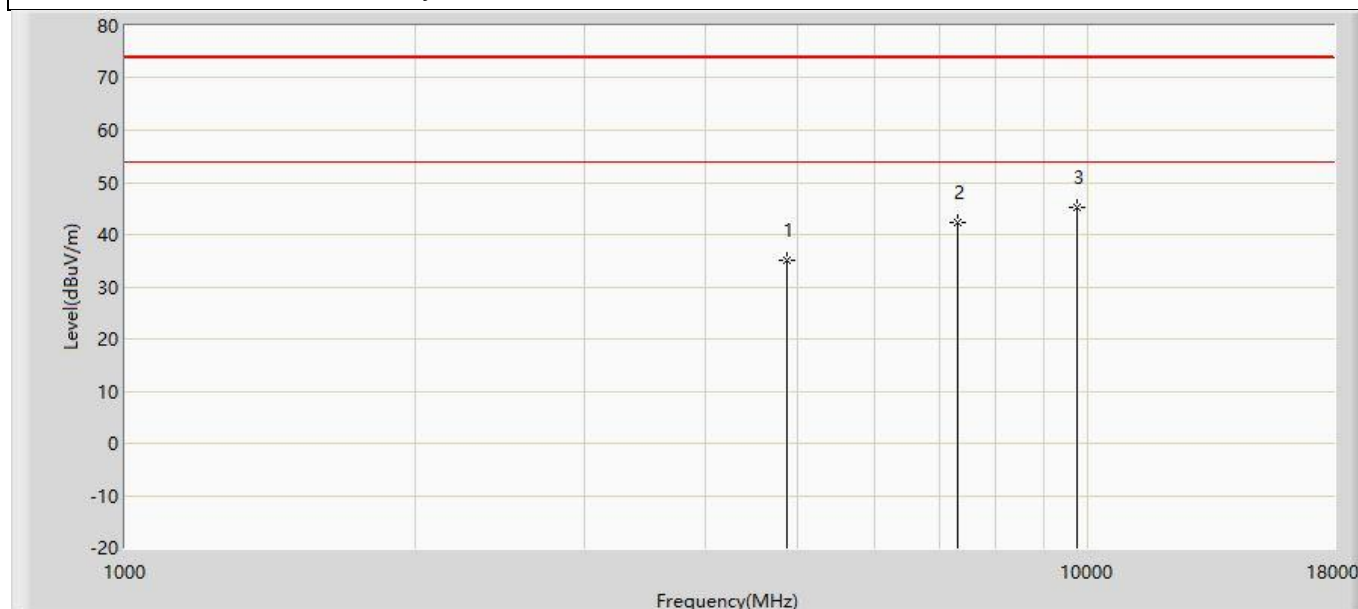


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.158	49.598	-38.842	74.000	-14.440	PK
2		7311.000	42.277	50.576	-31.723	74.000	-8.299	PK
3	*	9748.000	45.269	49.947	-28.731	74.000	-4.677	PK

Profile: 2250805R	Page No.: 94
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2437MHz by 11ax40	

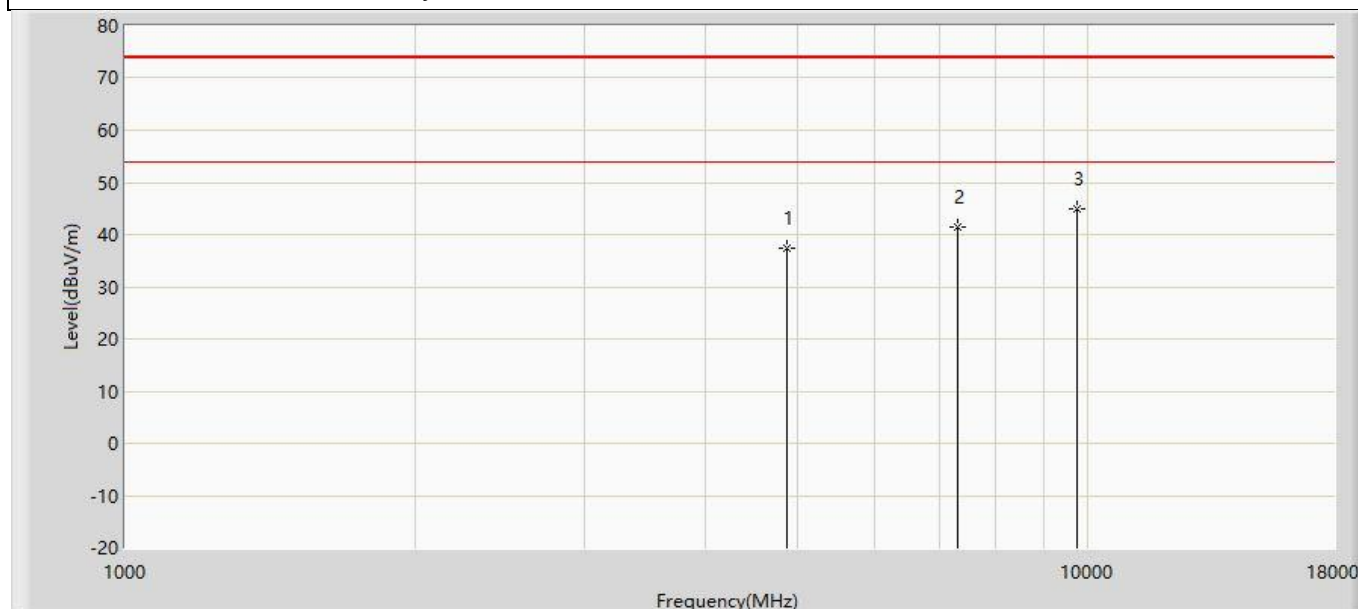


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.508	51.948	-36.492	74.000	-14.440	PK
2		7311.000	41.414	49.713	-32.586	74.000	-8.299	PK
3	*	9748.000	44.950	49.628	-29.050	74.000	-4.677	PK

Profile: 2250805R	Page No.: 95
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:19
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

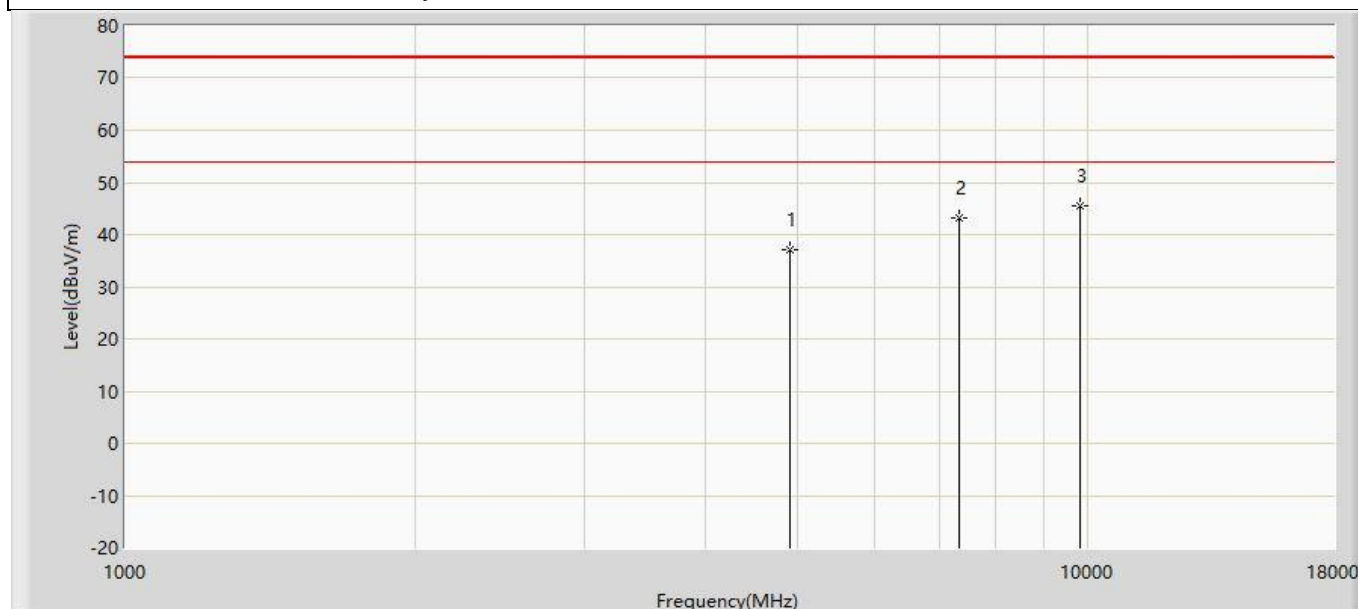

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	37.016	51.252	-36.984	74.000	-14.236	PK
2		7356.000	43.052	50.978	-30.948	74.000	-7.927	PK
3	*	9808.000	45.475	49.834	-28.525	74.000	-4.359	PK

Profile: 2250805R	Page No.: 96
Engineer: YuLiu	
Site: AC5	Time: 2022/06/22 - 04:20
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 6:Transmit at 2452MHz by 11ax40	

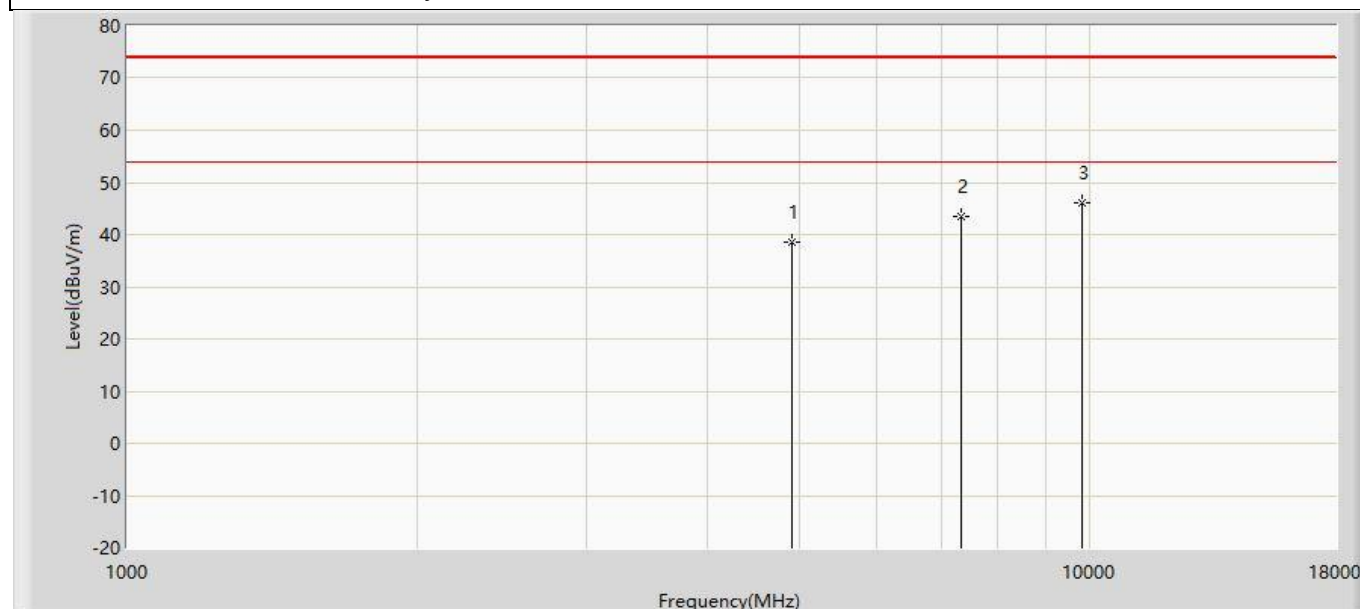


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	38.450	52.686	-35.550	74.000	-14.236	PK
2		7356.000	43.412	51.338	-30.588	74.000	-7.927	PK
3	*	9808.000	46.110	50.469	-27.890	74.000	-4.359	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
5. As the radiated emission was performed, so conducted emission was not tested.

The worst case of Radiated Emission below 1GHz:

Profile: 2250805R	Page No.: 37
Engineer: YuLiu	
Site: AC2	Time: 2022/06/20 - 20:40
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: 120V/60Hz
Note: Mode 1	

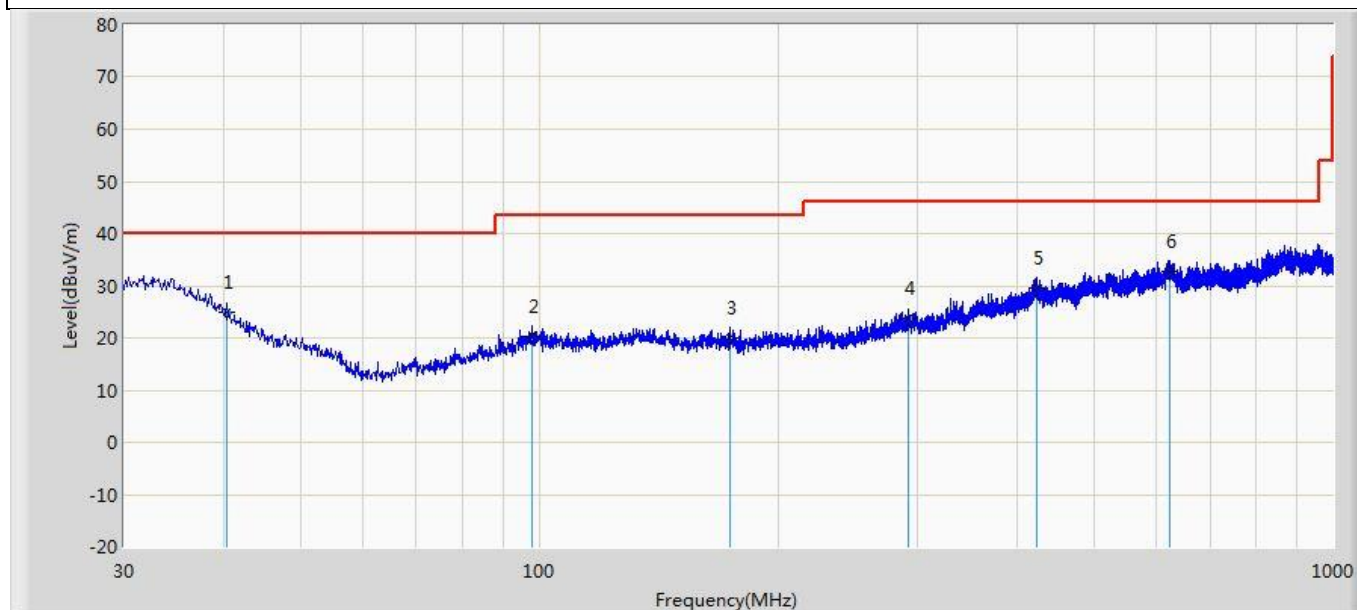


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		40.428	24.800	3.044	-15.200	40.000	21.756	QP
2		98.143	20.218	3.882	-23.282	43.500	16.337	QP
3		173.681	20.087	2.937	-23.413	43.500	17.150	QP
4		291.536	23.640	3.023	-22.360	46.000	20.617	QP
5		424.184	29.496	2.202	-16.504	46.000	27.294	QP
6	*	622.791	32.831	2.107	-13.169	46.000	30.724	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Profile: 2250805R	Page No.: 38
Engineer: YuLiu	
Site: AC2	Time: 2022/06/20 - 20:40
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: 120V/60Hz
Note: Mode 1	

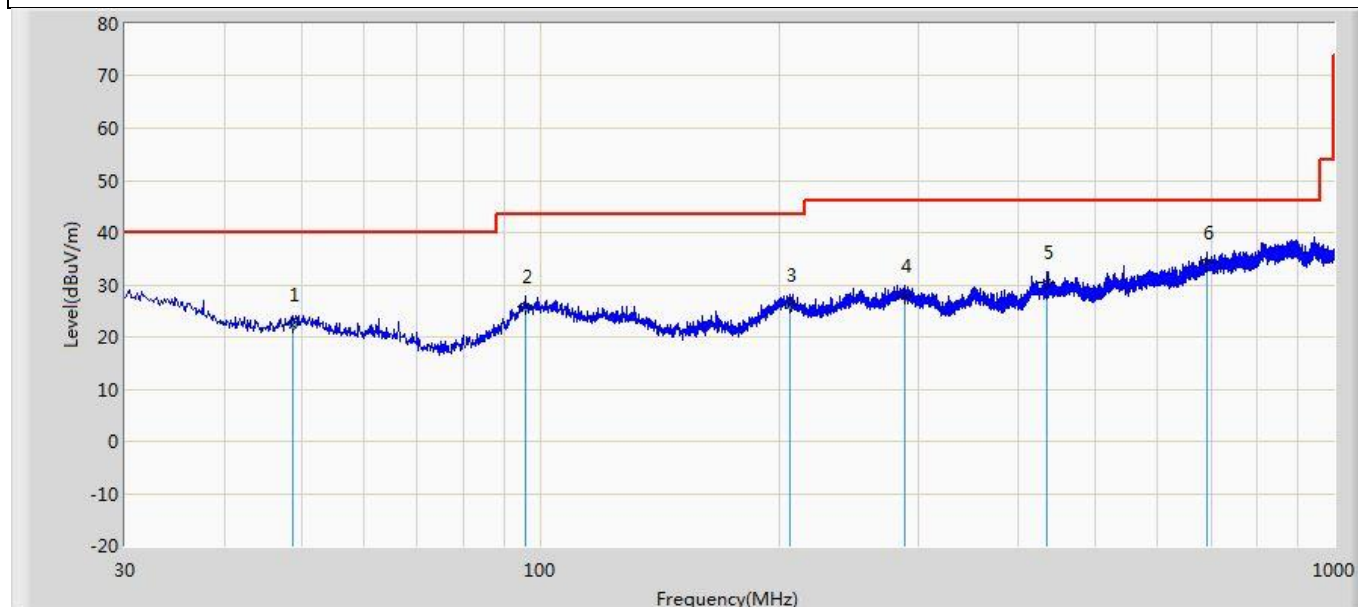


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		48.794	22.196	3.003	-17.804	40.000	19.193	QP
2		95.839	25.698	5.535	-17.802	43.500	20.163	QP
3		206.176	26.155	2.723	-17.345	43.500	23.432	QP
4		288.505	27.881	3.003	-18.119	46.000	24.878	QP
5		435.703	30.407	4.214	-15.593	46.000	26.193	QP
6	*	691.055	34.339	4.149	-11.661	46.000	30.189	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)


The worst case of Simultaneous Radiated Emission:

Profile: 2250805R	Page No.: 9
Engineer: YuLiu	
Site: AC5	Time: 2022/07/04 - 09:30
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at BLE 2440MHz+WIFI 2437MHZ	

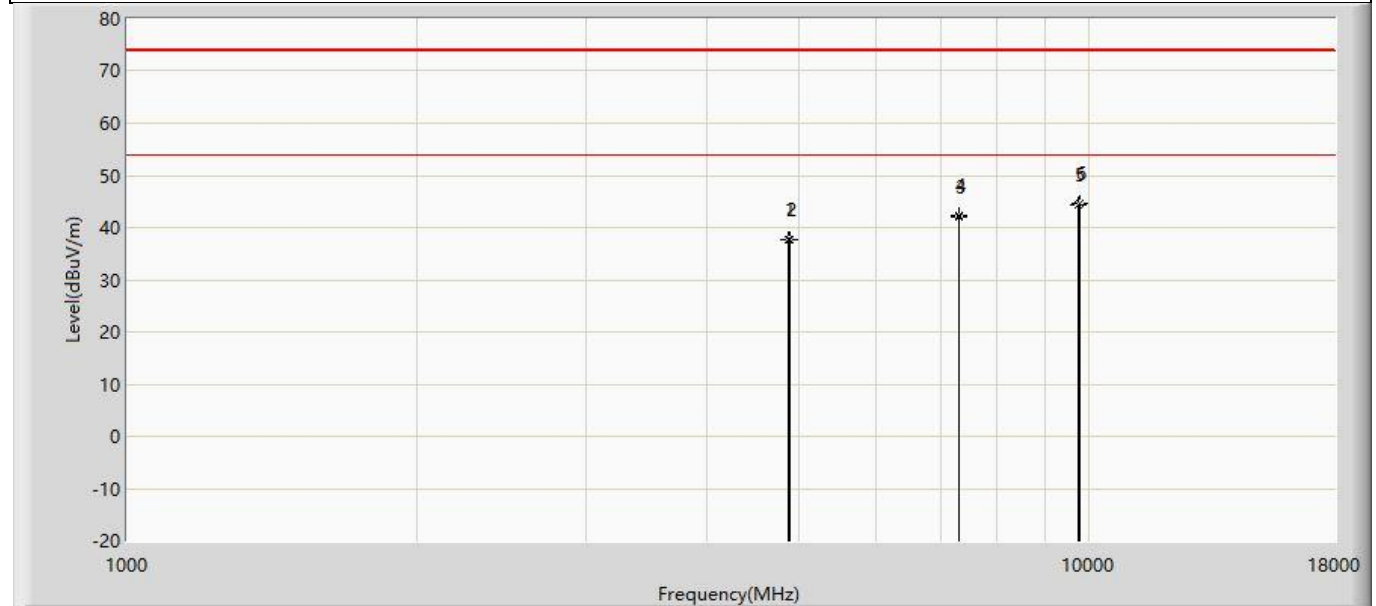

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.736	52.176	-36.264	74.000	-14.440	PK
2		4880.000	37.636	52.024	-36.364	74.000	-14.388	PK
3		7311.000	42.105	50.404	-31.895	74.000	-8.299	PK
4		7320.000	42.219	50.539	-31.781	74.000	-8.320	PK
5		9748.000	44.398	49.076	-29.602	74.000	-4.677	PK
6	*	9760.000	44.728	49.402	-29.272	74.000	-4.673	PK

Profile: 2250805R	Page No.: 10
Engineer: YuLiu	
Site: AC5	Time: 2022/07/04 - 09:31
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: VR ALL-IN-ONE HEADSET	Power: AC 120V/60Hz
Note: Mode 1:Transmit at BLE 2440MHz+WIFI 2437MHZ	

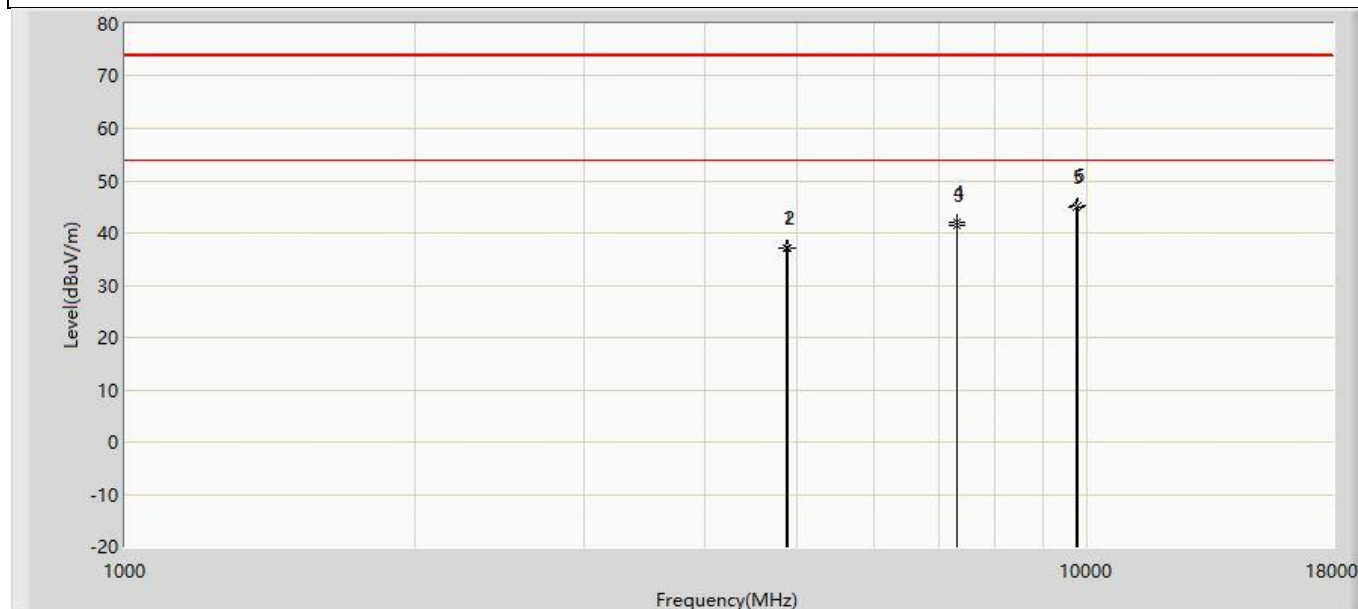


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.036	51.476	-36.964	74.000	-14.440	PK
2		4880.000	37.112	51.500	-36.888	74.000	-14.388	PK
3		7311.000	41.556	49.855	-32.444	74.000	-8.299	PK
4		7320.000	42.038	50.358	-31.962	74.000	-8.320	PK
5		9748.000	44.953	49.631	-29.047	74.000	-4.677	PK
6	*	9760.000	45.101	49.775	-28.899	74.000	-4.673	PK

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)	
RF Output power (Detection methods)	Limit(dB)	
RF Output power(Average detector)	30dBc(Note1)	
RF Output power(PK detector)	20dBc(Note2)	

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

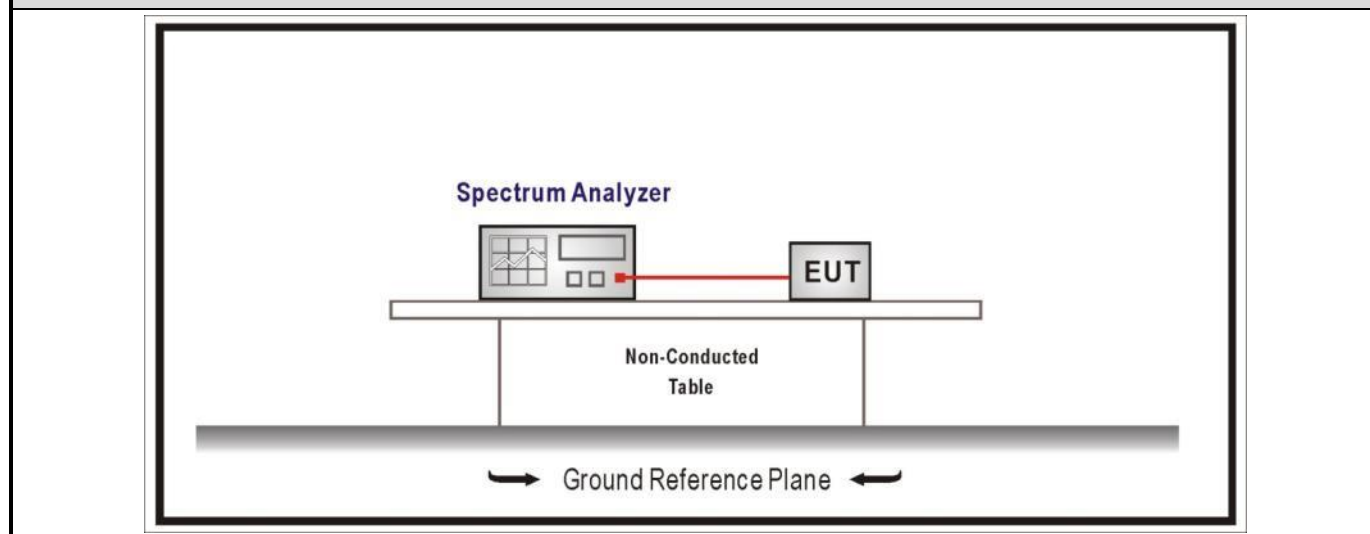4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒	ANSI C63.10	11.11.1	General
☒	ANSI C63.10	11.11.2	Reference level measurement
☒	ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	1	2412	12.640	2400	-32.622	45.262	≥30	Pass
	11	2462	13.053	2500	-47.565	60.618	≥30	Pass
2	1	2412	7.882	2400	-30.779	38.661	≥30	Pass
	11	2462	8.482	2500	-45.632	54.114	≥30	Pass
3	1	2412	7.984	2400	-31.790	39.774	≥30	Pass
	11	2462	8.497	2500	-47.348	55.845	≥30	Pass
4	3	2422	3.203	2400	-36.308	39.511	≥20	Pass
	9	2452	3.420	2500	-46.071	49.491	≥30	Pass
5	1	2412	7.439	2400	-30.067	37.506	≥30	Pass
	11	2462	7.224	2500	-48.244	55.468	≥30	Pass
6	3	2422	2.775	2400	-36.490	39.265	≥30	Pass
	9	2452	3.220	2500	-47.789	51.009	≥30	Pass

Note:1. We have evaluated SISO and MIMO mode, shown in the report is the worst data, worst data si Antenna1.

2. The worst case of emissions in non-restricted frequency bands as below:

Mode 5 CH01(2412MHz)

