







Test Mode :	802.11ax HE40	Test Channel :	06
-------------	---------------	----------------	----

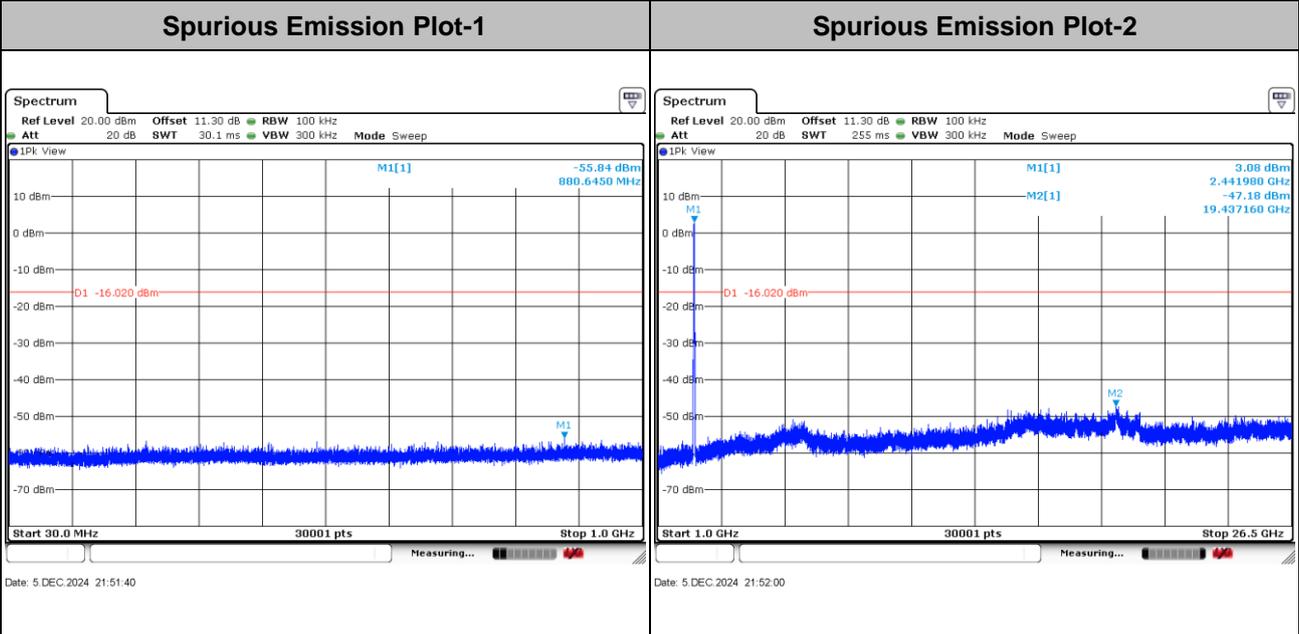

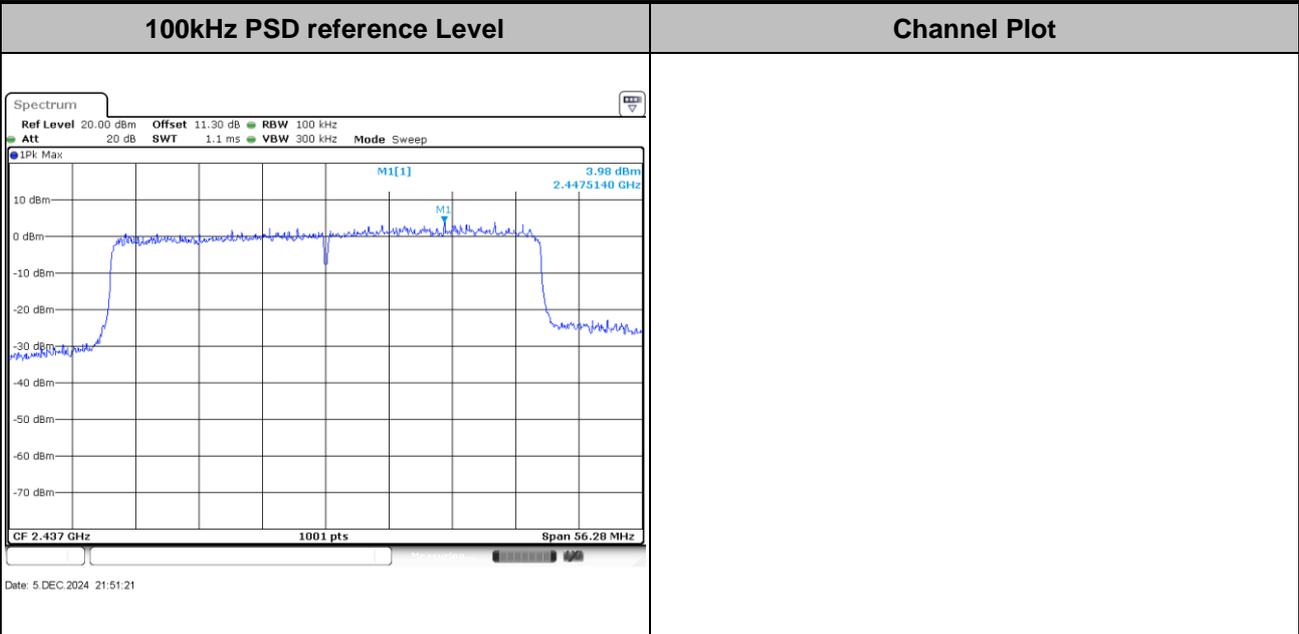

Test Mode : 802.11ax HE40 Test Channel : 09

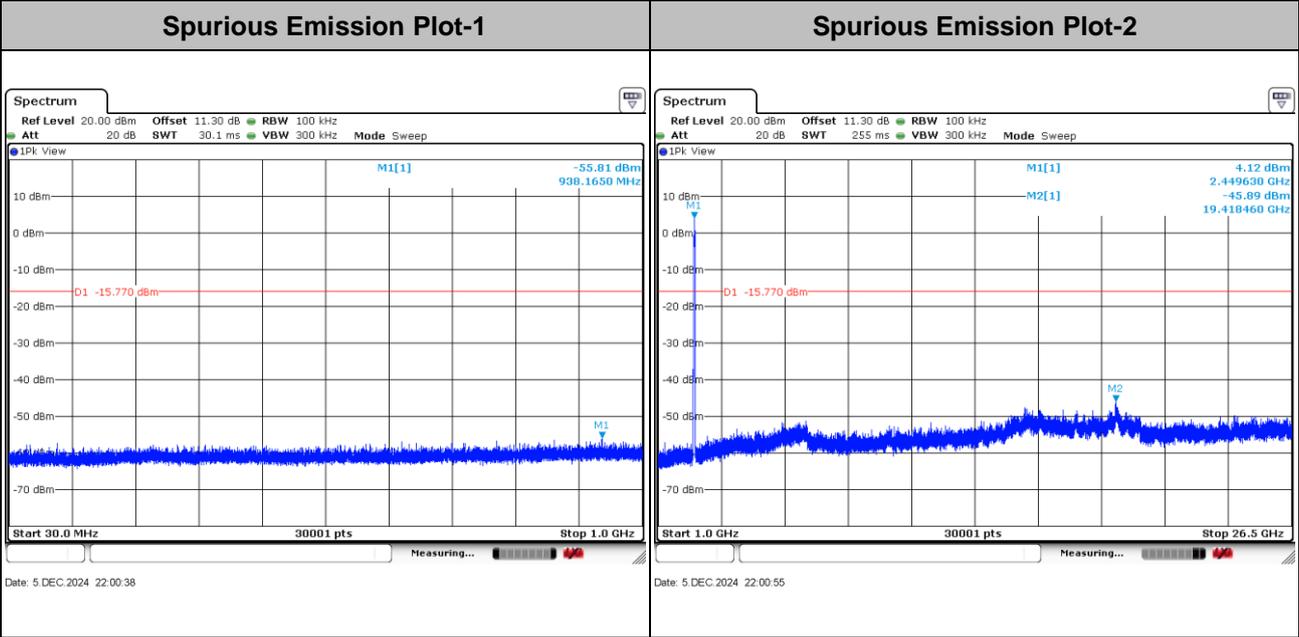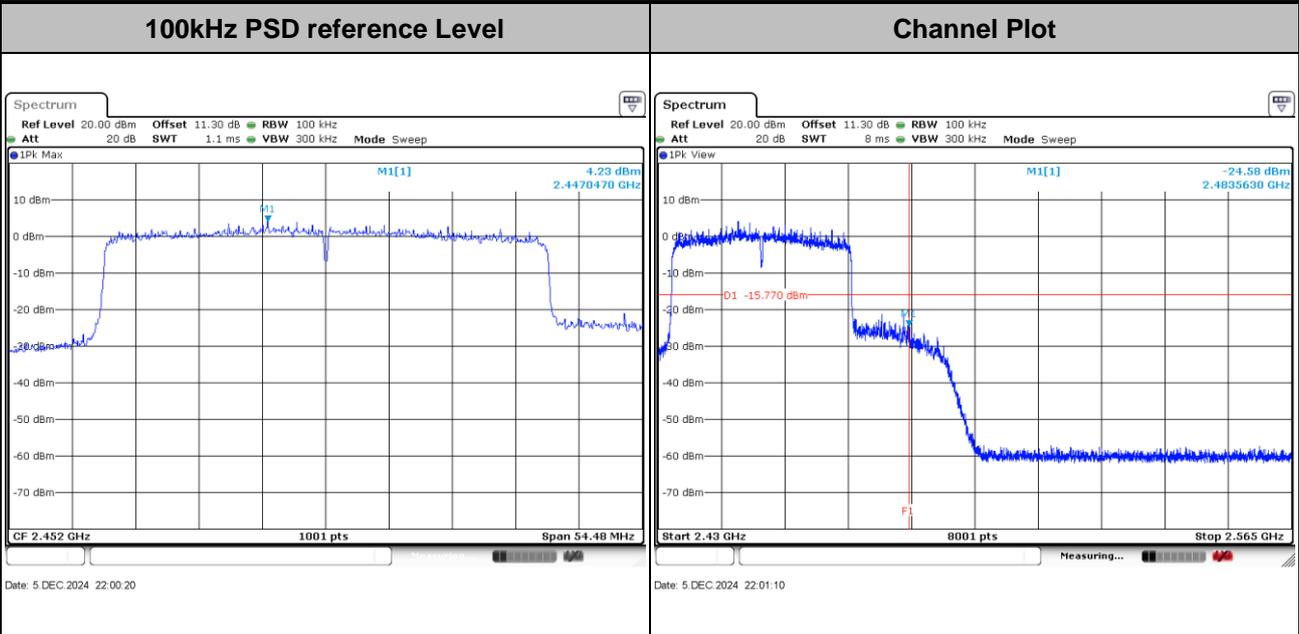



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

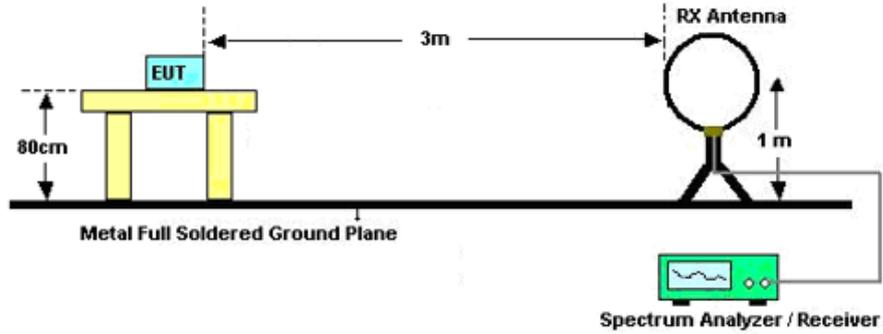

For radiated emissions from 30MHz to 1GHz

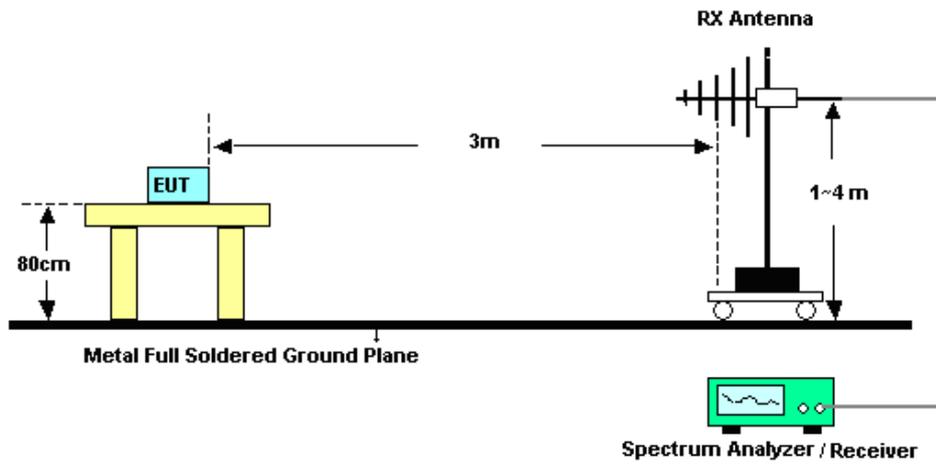

For radiated emissions above 1GHz

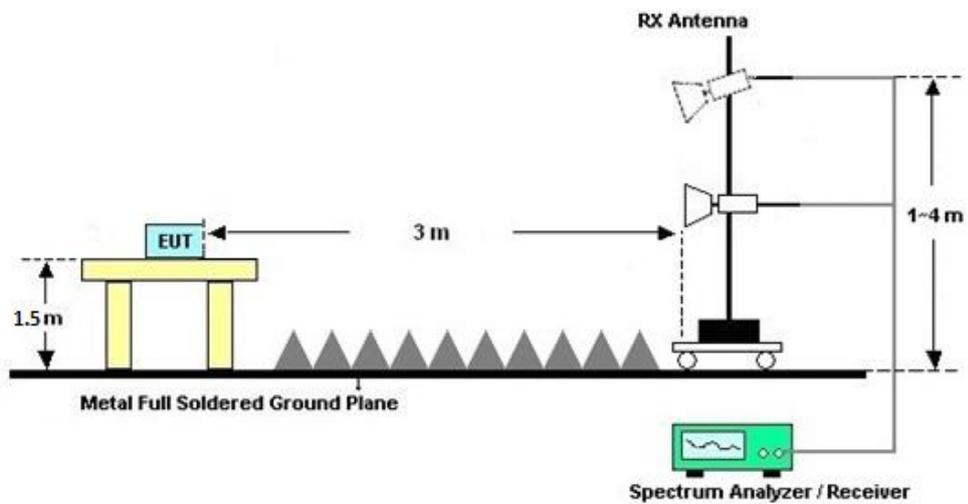



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

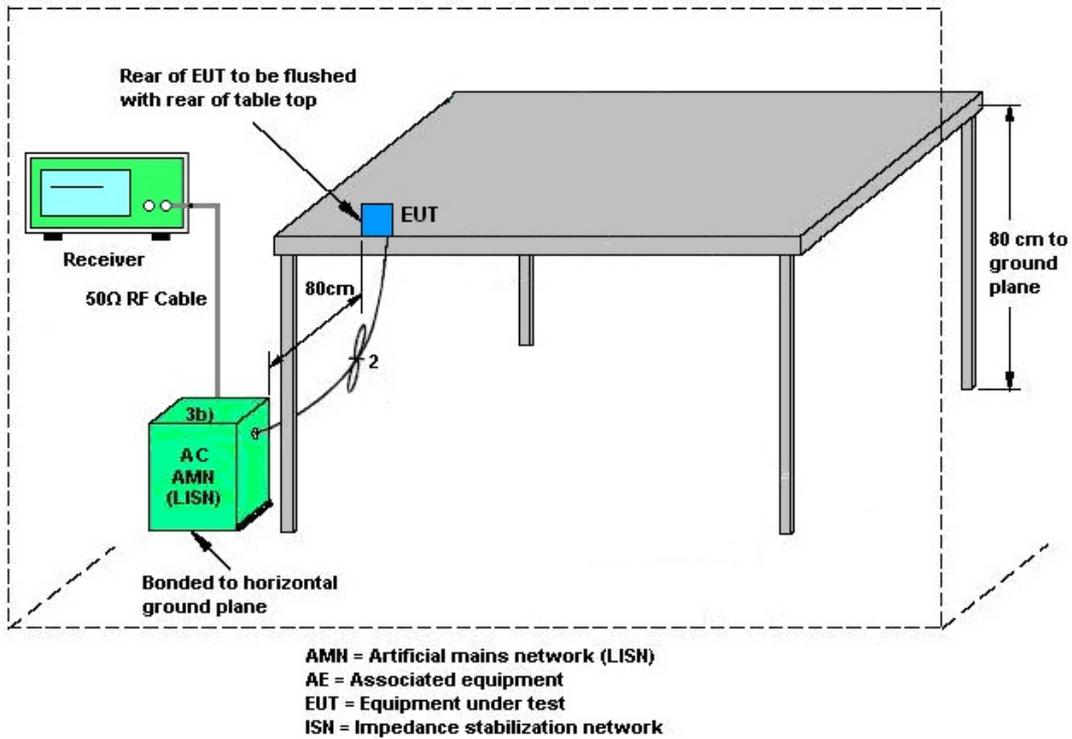

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 11g.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant. 0 (dBi)	Ant. 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	-3.00	-3.00	-3.00	0.01	0.00	0.00



<STBC Modes>

The EUT supports STBC mode for 11n/ax.

For completely uncorrelated transmissions, directional gain is calculated as,

Directional gain =  $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots)$ , as following table

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 0 (dBi)	Ant. 1 (dBi)				
2.4 GHz	-3.00	-3.00	-3.00	-3.00	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Dec. 05, 2024~ Dec. 07, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Dec. 05, 2024~ Dec. 07, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Dec. 27, 2023	Dec. 05, 2024~ Dec. 07, 2024	Dec. 26, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 27, 2023	Dec. 07, 2024~ Dec. 09, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	Dec. 07, 2024~ Dec. 09, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Dec. 07, 2024~ Dec. 09, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Dec. 07, 2024~ Dec. 09, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Dec. 07, 2024~ Dec. 09, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Dec. 07, 2024~ Dec. 09, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Dec. 07, 2024~ Dec. 09, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Dec. 07, 2024~ Dec. 09, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 14, 2024	Dec. 07, 2024~ Dec. 09, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Dec. 07, 2024~ Dec. 09, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	Oct. 14, 2024	Dec. 07, 2024~ Dec. 09, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 07, 2024~ Dec. 09, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 07, 2024~ Dec. 09, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Dec. 08, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Dec. 08, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec. 25, 2022	Dec. 08, 2024	Dec. 24, 2024	Conduction (CO02-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



## Appendix A. Conducted Test Results

## A1. Conducted Test Results

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2024/12/5~2024/12/7	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	18.20	-		30.00	-	-3.00	-	15.20	-	36.00	-	Pass
11b	1Mbps	1	6	2437	18.50	-		30.00	-	-3.00	-	15.50	-	36.00	-	Pass
11b	1Mbps	1	11	2462	19.30	-		30.00	-	-3.00	-	16.30	-	36.00	-	Pass
11g	6Mbps	2	1	2412	17.00	18.10	20.60	30.00		-3.00		17.60		36.00		Pass
11g	6Mbps	2	6	2437	18.20	18.30	21.26	30.00		-3.00		18.26		36.00		Pass
11g	6Mbps	2	11	2462	17.00	17.70	20.37	30.00		-3.00		17.37		36.00		Pass
HT20	MCS8	2	1	2412	14.90	16.20	18.61	30.00		-3.00		15.61		36.00		Pass
HT20	MCS8	2	6	2437	17.70	17.90	20.81	30.00		-3.00		17.81		36.00		Pass
HT20	MCS8	2	9	2452	15.90	16.50	19.22	30.00		-3.00		16.22		36.00		Pass
HT20	MCS8	2	10	2457	14.80	15.50	18.17	30.00		-3.00		15.17		36.00		Pass
HT20	MCS8	2	11	2462	12.70	13.40	16.07	30.00		-3.00		13.07		36.00		Pass
HT40	MCS8	2	3	2422	13.70	15.00	17.41	30.00		-3.00		14.41		36.00		Pass
HT40	MCS8	2	6	2437	16.70	17.50	20.13	30.00		-3.00		17.13		36.00		Pass
HT40	MCS8	2	7	2442	12.80	14.20	16.57	30.00		-3.00		13.57		36.00		Pass
HT40	MCS8	2	8	2447	10.10	12.00	14.16	30.00		-3.00		11.16		36.00		Pass
HT40	MCS8	2	9	2452	10.30	11.80	14.12	30.00		-3.00		11.12		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	21.18	-		30.00	-	-3.00	-	18.18	-	36.00	-	Pass
11b	1Mbps	1	6	2437	21.55	-		30.00	-	-3.00	-	18.55	-	36.00	-	Pass
11b	1Mbps	1	11	2462	22.48	-		30.00	-	-3.00	-	19.48	-	36.00	-	Pass
11g	6Mbps	2	1	2412	24.17	25.11	27.68	30.00		-3.00		24.68		36.00		Pass
11g	6Mbps	2	6	2437	25.84	25.42	28.65	30.00		-3.00		25.65		36.00		Pass
11g	6Mbps	2	11	2462	25.21	25.33	28.28	30.00		-3.00		25.28		36.00		Pass
HT20	MCS8	2	1	2412	23.82	24.80	27.35	30.00		-3.00		24.35		36.00		Pass
HT20	MCS8	2	6	2437	25.75	25.39	28.58	30.00		-3.00		25.58		36.00		Pass
HT20	MCS8	2	9	2452	24.76	24.70	27.74	30.00		-3.00		24.74		36.00		Pass
HT20	MCS8	2	10	2457	24.12	24.84	27.51	30.00		-3.00		24.51		36.00		Pass
HT20	MCS8	2	11	2462	22.83	23.73	26.31	30.00		-3.00		23.31		36.00		Pass
HT40	MCS8	2	3	2422	23.23	24.33	26.83	30.00		-3.00		23.83		36.00		Pass
HT40	MCS8	2	6	2437	24.62	25.08	27.87	30.00		-3.00		24.87		36.00		Pass
HT40	MCS8	2	7	2442	22.35	24.11	26.33	30.00		-3.00		23.33		36.00		Pass
HT40	MCS8	2	8	2447	19.70	22.40	24.27	30.00		-3.00		21.27		36.00		Pass
HT40	MCS8	2	9	2452	20.35	22.66	24.67	30.00		-3.00		21.67		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant1	Ant0	Ant1		
11b	1Mbps	1	1	2412	11.07	-	7.58	-	0.50	Pass
11b	1Mbps	1	6	2437	11.21	-	7.60	-	0.50	Pass
11b	1Mbps	1	11	2462	10.86	-	7.58	-	0.50	Pass

2.4GHz Band MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant1	Ant0	Ant1		
11g	6Mbps	2	1	2412	17.72	17.28	15.80	16.36	0.50	Pass
11g	6Mbps	2	6	2437	17.24	17.18	16.36	15.74	0.50	Pass
11g	6Mbps	2	11	2462	17.10	16.94	16.36	16.40	0.50	Pass
HT20	MCS8	2	1	2412	18.56	18.16	16.40	17.24	0.50	Pass
HT20	MCS8	2	6	2437	18.20	18.09	17.62	17.00	0.50	Pass
HT20	MCS8	2	11	2462	18.15	18.01	17.60	17.62	0.50	Pass
HT40	MCS8	2	3	2422	36.58	37.76	35.80	35.84	0.50	Pass
HT40	MCS8	2	6	2437	36.81	36.77	36.04	35.84	0.50	Pass
HT40	MCS8	2	9	2452	36.76	36.56	36.16	35.44	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	-3.58	-	-	-3.00	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-3.04	-		-3.00	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-1.98	-		-3.00	-	8.00	-	Pass

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
11g	6Mbps	2	1	2412	-6.14	-4.80	-1.79	0.01		8.00		Pass
11g	6Mbps	2	6	2437	-5.59	-5.63	-2.58	0.01		8.00		Pass
11g	6Mbps	2	11	2462	-4.99	-4.88	-1.87	0.01		8.00		Pass
HT20	MCS8	2	1	2412	-7.13	-5.88	-2.87	-3		8.00		Pass
HT20	MCS8	2	6	2437	-7.07	-7.09	-4.06	-3		8.00		Pass
HT20	MCS8	2	11	2462	-4.95	-5.89	-1.94	-3		8.00		Pass
HT40	MCS8	2	3	2422	-10.94	-10.40	-7.39	-3		8.00		Pass
HT40	MCS8	2	6	2437	-12.20	-10.68	-7.67	-3		8.00		Pass
HT40	MCS8	2	9	2452	-11.31	-10.51	-7.50	-3		8.00		Pass

Measured power density (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
HE20	MCS8	2	1	2412	Full	15.20	16.50	18.91	30.00		-3.00		15.91		36.00	Pass	
HE20	MCS8	2	1	2412	26/0	6.40	7.30	9.88	30.00		-3.00		6.88		36.00	Pass	
HE20	MCS8	2	1	2412	52/37	8.60	10.58	12.71	30.00		-3.00		9.71		36.00	Pass	
HE20	MCS8	2	1	2412	106/53	12.00	13.90	16.06	30.00		-3.00		13.06		36.00	Pass	
HE20	MCS8	2	6	2437	Full	18.30	18.40	21.36	30.00		-3.00		18.36		36.00	Pass	
HE20	MCS8	2	9	2452	Full	16.20	16.90	19.57	30.00		-3.00		16.57		36.00	Pass	
HE20	MCS8	2	10	2457	Full	15.30	16.10	18.73	30.00		-3.00		15.73		36.00	Pass	
HE20	MCS8	2	11	2462	Full	13.20	13.80	16.52	30.00		-3.00		13.52		36.00	Pass	
HE20	MCS8	2	11	2462	26/8	3.78	3.58	6.69	30.00		-3.00		3.69		36.00	Pass	
HE20	MCS8	2	11	2462	52/40	6.50	6.10	9.31	30.00		-3.00		6.31		36.00	Pass	
HE20	MCS8	2	11	2462	106/54	8.80	9.10	11.96	30.00		-3.00		8.96		36.00	Pass	
HE40	MCS8	2	3	2422	Full	14.30	15.20	17.78	30.00		-3.00		14.78		36.00	Pass	
HE40	MCS8	2	6	2437	Full	16.70	17.60	20.18	30.00		-3.00		17.18		36.00	Pass	
HE40	MCS8	2	7	2442	Full	13.00	14.50	16.82	30.00		-3.00		13.82		36.00	Pass	
HE40	MCS8	2	8	2447	Full	10.50	11.70	14.15	30.00		-3.00		11.15		36.00	Pass	
HE40	MCS8	2	9	2452	Full	10.50	12.10	14.38	30.00		-3.00		11.38		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
HE20	MCS8	2	1	2412	Full	23.91	24.88	27.43	30.00		-3.00		24.43		36.00	Pass	
HE20	MCS8	2	1	2412	26/0	16.02	16.86	19.47	30.00		-3.00		16.47		36.00	Pass	
HE20	MCS8	2	1	2412	52/37	18.90	20.22	22.62	30.00		-3.00		19.62		36.00	Pass	
HE20	MCS8	2	1	2412	106/53	22.70	24.11	26.47	30.00		-3.00		23.47		36.00	Pass	
HE20	MCS8	2	6	2437	Full	25.82	25.53	28.69	30.00		-3.00		25.69		36.00	Pass	
HE20	MCS8	2	9	2452	Full	24.88	24.78	27.84	30.00		-3.00		24.84		36.00	Pass	
HE20	MCS8	2	10	2457	Full	24.46	24.92	27.71	30.00		-3.00		24.71		36.00	Pass	
HE20	MCS8	2	11	2462	Full	23.32	23.87	26.61	30.00		-3.00		23.61		36.00	Pass	
HE20	MCS8	2	11	2462	26/8	14.35	14.10	17.24	30.00		-3.00		14.24		36.00	Pass	
HE20	MCS8	2	11	2462	52/40	16.68	16.47	19.59	30.00		-3.00		16.59		36.00	Pass	
HE20	MCS8	2	11	2462	106/54	18.40	19.28	21.87	30.00		-3.00		18.87		36.00	Pass	
HE40	MCS8	2	3	2422	Full	23.58	24.52	27.09	30.00		-3.00		24.09		36.00	Pass	
HE40	MCS8	2	6	2437	Full	25.03	25.40	28.23	30.00		-3.00		25.23		36.00	Pass	
HE40	MCS8	2	7	2442	Full	23.02	24.22	26.67	30.00		-3.00		23.67		36.00	Pass	
HE40	MCS8	2	8	2447	Full	20.15	22.44	24.45	30.00		-3.00		21.45		36.00	Pass	
HE40	MCS8	2	9	2452	Full	20.67	22.52	24.70	30.00		-3.00		21.70		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant1	Ant0	Ant1		
HE20	MCS8	2	1	2412	Full	19.29	19.19	18.98	19.08	0.50	Pass
HE20	MCS8	2	6	2437	Full	19.13	19.18	19.15	19.13	0.50	Pass
HE20	MCS8	2	11	2462	Full	19.10	19.14	19.13	19.10	0.50	Pass
HE40	MCS8	2	3	2422	Full	37.70	37.89	36.96	37.48	0.50	Pass
HE40	MCS8	2	6	2437	Full	37.88	37.89	37.84	37.52	0.50	Pass
HE40	MCS8	2	9	2452	Full	37.75	37.77	37.76	36.32	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
HE20	MCS8	2	1	2412	Full	-7.53	-7.44	-4.43	-3		8.00		Pass
HE20	MCS8	2	1	2412	26/0	-9.26	-7.80	-4.79	-3		8.00		Pass
HE20	MCS8	2	1	2412	52/37	-8.62	-7.76	-4.75	-3		8.00		Pass
HE20	MCS8	2	1	2412	106/53	-7.80	-7.48	-4.47	-3		8.00		Pass
HE20	MCS8	2	6	2437	Full	-7.02	-7.11	-4.01	-3		8.00		Pass
HE20	MCS8	2	11	2462	Full	-7.11	-6.54	-3.53	-3		8.00		Pass
HE20	MCS8	2	11	2462	26/8	-8.22	-7.38	-4.37	-3		8.00		Pass
HE20	MCS8	2	11	2462	52/40	-8.03	-7.52	-4.51	-3		8.00		Pass
HE20	MCS8	2	11	2462	106/54	-7.76	-7.03	-4.02	-3		8.00		Pass
HE40	MCS8	2	3	2422	Full	-10.87	-9.46	-6.45	-3		8.00		Pass
HE40	MCS8	2	6	2437	Full	-9.44	-10.05	-6.43	-3		8.00		Pass
HE40	MCS8	2	9	2452	Full	-8.68	-8.76	-5.67	-3		8.00		Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

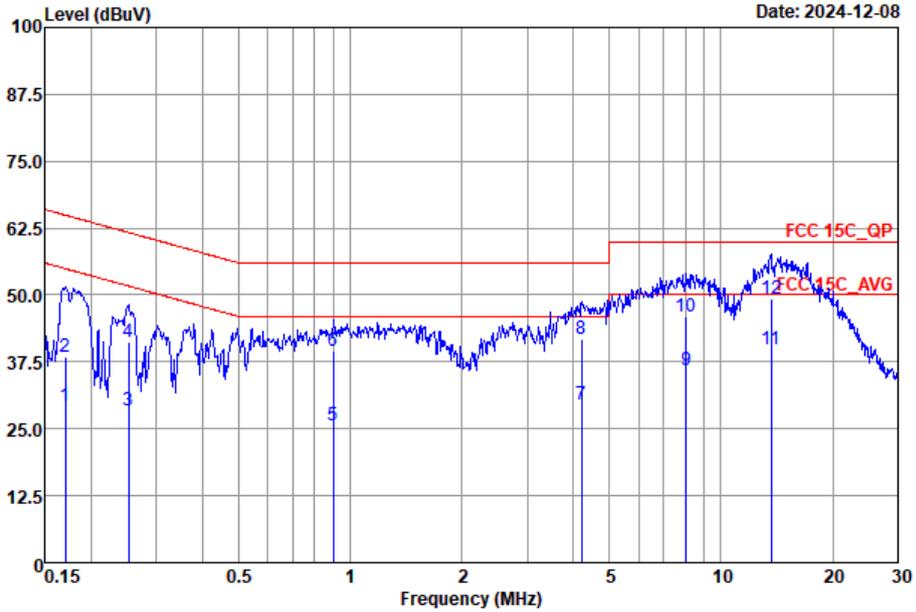


Site : CO02-SZ  
 Condition : FCC 15C\_QP LISN\_2024-L-1 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	29.29	-25.65	54.94	9.61	9.67	10.01	Average
2	0.17	38.49	-26.45	64.94	18.81	9.67	10.01	QP
3	0.25	28.34	-23.35	51.69	8.60	9.70	10.04	Average
4	0.25	41.14	-20.55	61.69	21.40	9.70	10.04	QP
5	0.90	25.56	-20.44	46.00	5.70	9.67	10.19	Average
6	0.90	39.66	-16.34	56.00	19.80	9.67	10.19	QP
7	4.20	29.60	-16.40	46.00	9.70	9.63	10.27	Average
8	4.20	41.80	-14.20	56.00	21.90	9.63	10.27	QP
9	8.06	36.04	-13.96	50.00	16.01	9.61	10.42	Average
10	8.06	46.04	-13.96	60.00	26.01	9.61	10.42	QP
11	13.62	39.81	-10.19	50.00	19.50	9.55	10.76	Average
12 *	13.62	49.31	-10.69	60.00	29.00	9.55	10.76	QP



Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

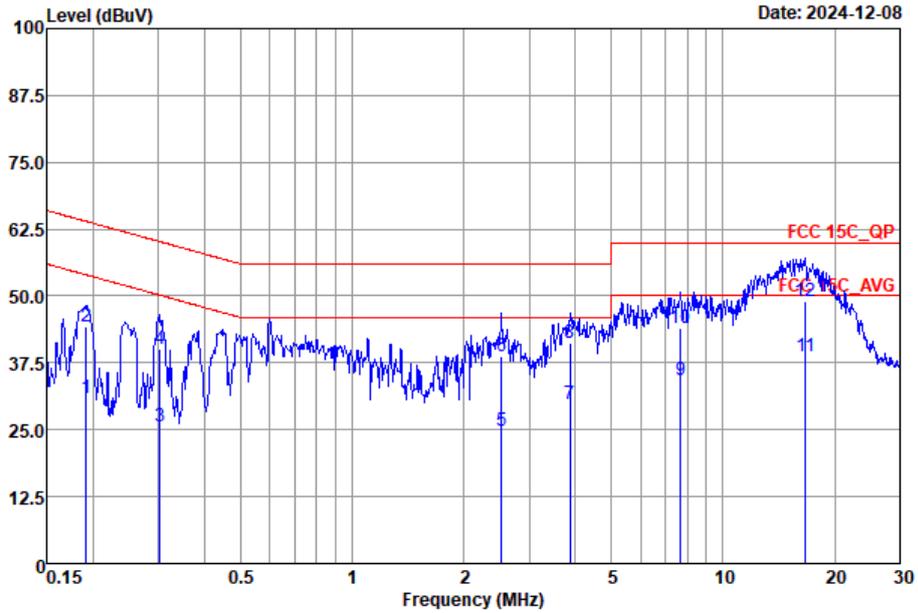

Site : CO02-SZ  
 Condition : FCC 15C\_QP LISN\_2024-N-1 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	30.82	-23.16	53.98	11.10	9.70	10.02	Average
2	0.19	44.42	-19.56	63.98	24.70	9.70	10.02	QP
3	0.30	25.72	-24.43	50.15	6.00	9.67	10.05	Average
4	0.30	40.12	-20.03	60.15	20.40	9.67	10.05	QP
5	2.53	24.90	-21.10	46.00	4.90	9.68	10.32	Average
6	2.53	38.60	-17.40	56.00	18.60	9.68	10.32	QP
7	3.86	29.85	-16.15	46.00	9.90	9.67	10.28	Average
8	3.86	41.25	-14.75	56.00	21.30	9.67	10.28	QP
9	7.69	34.13	-15.87	50.00	14.10	9.63	10.40	Average
10	7.69	44.03	-15.97	60.00	24.00	9.63	10.40	QP
11	16.66	38.70	-11.30	50.00	18.30	9.60	10.80	Average
12 *	16.66	48.90	-11.10	60.00	28.50	9.60	10.80	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20-24°C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 11	2400-2483.5	0	802.11b	01	2412	1Mbps	-	-
Mode 12	2400-2483.5	0	802.11b	06	2437	1Mbps	-	
Mode 13	2400-2483.5	0	802.11b	11	2462	1Mbps	-	
Mode 14	2400-2483.5	CDD 0+1	802.11g	01	2412	6Mbps	-	
Mode 15	2400-2483.5	CDD 0+1	802.11g	06	2437	6Mbps	-	
Mode 16	2400-2483.5	CDD 0+1	802.11g	11	2462	6Mbps	-	
Mode 17	2400-2483.5	STBC 0+1	802.11ax HE20	01	2412	MCS8	Full RU	
Mode 18	2400-2483.5	STBC 0+1	802.11ax HE20	06	2437	MCS8	Full RU	
Mode 19	2400-2483.5	STBC 0+1	802.11ax HE20	11	2462	MCS8	Full RU	
Mode 20	2400-2483.5	STBC 0+1	802.11ax HE40	03	2422	MCS8	Full RU	
Mode 21	2400-2483.5	STBC 0+1	802.11ax HE40	09	2452	MCS8	Full RU	
Mode 22	2400-2483.5	STBC 0+1	802.11ax HE20	01	2412	MCS8	Partial_RU 106/53	-
Mode 23	2400-2483.5	STBC 0+1	802.11ax HE20	11	2462	MCS8	Partial_RU 106/54	
Mode 24	2400-2483.5	STBC 0+1	802.11ax HE40	03	LF	MCS8	-	
Mode 25	2400-2483.5	STBC 0+1	802.11ax HE40	03	2422	MCS8	Full RU	
Mode 26	2400-2483.5	STBC 0+1	802.11ax HE40	6	2437	MCS8	Full RU	-
Mode 27	2400-2483.5	STBC 0+1	802.11ax HE20	10	2457	MCS8	Full RU	-
Mode 28	2400-2483.5	STBC 0+1	802.11ax HE20	9	2452	MCS8	Full RU	-
Mode 29	2400-2483.5	STBC 0+1	802.11ax HE40	08	2447	MCS8	Full RU	-
Mode 30	2400-2483.5	STBC 0+1	802.11ax HE40	07	2442	MCS8	Full RU	-

Note:

- For 802.11n/11ax mode, the RSE testing have assessed only 802.11ax HE20/40 by referring to the higher output power.
- Mode 25 is for sample 2, the other modes are for sample 1.







### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
11	802.11b	01	2389.95	39.32	54.00	-14.68	H	AVERAGE	Pass	Band Edge
11	802.11b	01	4824.00	41.47	74.00	-32.53	H	Peak	Pass	Harmonic
12	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	7311.00	43.56	74.00	-30.44	H	Peak	Pass	Harmonic
13	802.11b	11	2488.37	43.60	54.00	-10.40	H	AVERAGE	Pass	Band Edge
	802.11b	11	7386.00	44.25	74.00	-29.75	V	Peak	Pass	Harmonic
14	802.11g	01	2389.95	50.00	54.00	-4.00	H	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	41.40	74.00	-32.60	V	Peak	Pass	Harmonic
15	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	48.02	74.00	-25.98	V	Peak	Pass	Harmonic
16	802.11g	11	2483.55	50.39	54.00	-3.61	H	AVERAGE	Pass	Band Edge
	802.11g	11	7386.00	48.11	74.00	-25.89	H	Peak	Pass	Harmonic
17	802.11ax HE20	01	2389.04	49.58	54.00	-4.42	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	40.75	74.00	-33.25	V	Peak	Pass	Harmonic
18	802.11ax HE20	06	2484.75	43.26	54.00	-10.74	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	06	7311.00	47.11	74.00	-26.89	H	Peak	Pass	Harmonic
19	802.11ax HE20	11	2484.15	48.78	54.00	-5.22	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	7386.00	42.74	74.00	-31.26	V	Peak	Pass	Harmonic
20	802.11ax HE40	03	2388.85	50.48	54.00	-3.52	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	03	4844.00	40.96	74.00	-33.04	H	Peak	Pass	Harmonic
21	802.11ax HE40	09	2485.12	47.46	54.00	-6.54	H	AVERAGE	Pass	Band Edge
22	802.11ax HE20	01	2389.95	48.66	54.00	-5.34	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE20	11	2483.58	49.54	54.00	-4.46	V	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE40	03	30	28.2	40	-11.8	V	Peak	Pass	LF
25	802.11ax HE40	03	2389.97	50.23	54.00	-3.77	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	03	7266.00	44.66	74.00	-29.34	H	Peak	Pass	Harmonic
26	802.11ax HE40	6	2485.01	50.72	54.00	-3.28	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	6	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	10	2484.61	49.13	54.00	-4.87	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	10	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE20	9	2484.06	49.89	54.00	-4.11	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	9	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE40	08	2484.37	48.26	54.00	-5.74	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	08	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE40	07	2485.27	47.96	54.00	-6.04	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	07	-	-	-	-	-	-	-	Harmonic



	11																																																									
Mode	Band Edge																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																									
ANT	0																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>49.74</td> <td>74.00</td> <td>-24.26</td> <td>48.20</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>139</td> <td>142 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	2389.69	49.74	74.00	-24.26	48.20	30.44	4.80	33.70	139	142 PEAK	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.96</td> <td>-----</td> <td>-----</td> <td>100.35</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>139</td> <td>142 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	2412.00	101.96	-----	-----	100.35	30.45	4.82	33.66	139	142 PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																	
1	2389.69	49.74	74.00	-24.26	48.20	30.44	4.80	33.70	139	142 PEAK																																																
Limit	Read	Ant	Cable	APos	TPos	Remark																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																	
1	2412.00	101.96	-----	-----	100.35	30.45	4.82	33.66	139	142 PEAK																																																
Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>39.32</td> <td>54.00</td> <td>-14.68</td> <td>37.78</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>139</td> <td>142 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	2389.95	39.32	54.00	-14.68	37.78	30.44	4.80	33.70	139	142 AVERAGE	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.48</td> <td>-----</td> <td>-----</td> <td>97.87</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>139</td> <td>142 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	2412.00	99.48	-----	-----	97.87	30.45	4.82	33.66	139	142 AVERAGE
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																	
1	2389.95	39.32	54.00	-14.68	37.78	30.44	4.80	33.70	139	142 AVERAGE																																																
Limit	Read	Ant	Cable	APos	TPos	Remark																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																	
1	2412.00	99.48	-----	-----	97.87	30.45	4.82	33.66	139	142 AVERAGE																																																

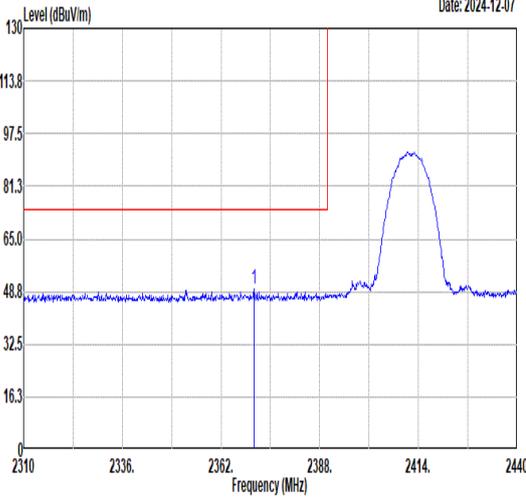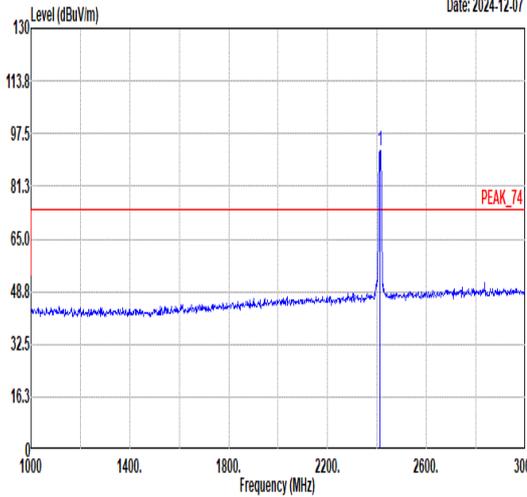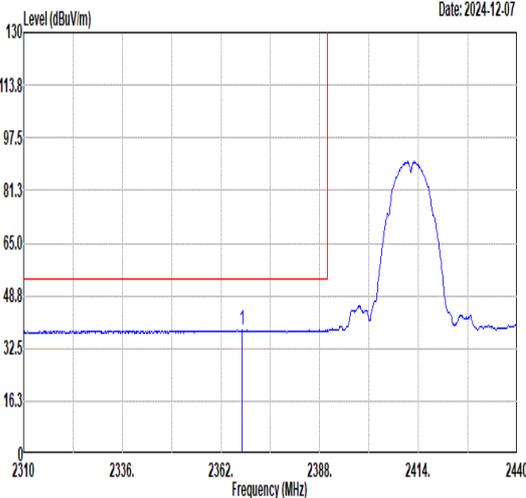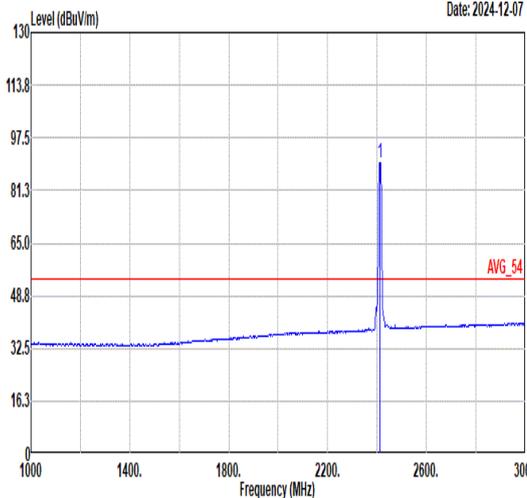

		11																																																																															
<b>Mode</b>	<b>Band Edge</b>																																																																																
	<b>2400-2483.5_802.11b_CH01_2412MHz</b>																																																																																
<b>ANT</b>	<b>0</b>																																																																																
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																															
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p>		 <p style="text-align: right;">Date: 2024-12-07</p>																																																																														
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2370.71</td> <td>49.40</td> <td>74.00</td> <td>-24.60</td> <td>47.94</td> <td>30.42</td> <td>4.78</td> <td>33.74</td> <td>104</td> <td>140 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2370.71	49.40	74.00	-24.60	47.94	30.42	4.78	33.74	104	140 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.41</td> <td>-----</td> <td>-----</td> <td>90.80</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>104</td> <td>140 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	92.41	-----	-----	90.80	30.45	4.82	33.66	104
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	2370.71	49.40	74.00	-24.60	47.94	30.42	4.78	33.74	104	140 PEAK																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	2412.00	92.41	-----	-----	90.80	30.45	4.82	33.66	104	140 PEAK																																																																							
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p>		 <p style="text-align: right;">Date: 2024-12-07</p>																																																																														
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2367.59</td> <td>38.13</td> <td>54.00</td> <td>-15.87</td> <td>36.68</td> <td>30.42</td> <td>4.77</td> <td>33.74</td> <td>104</td> <td>140 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2367.59	38.13	54.00	-15.87	36.68	30.42	4.77	33.74	104	140 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>89.96</td> <td>-----</td> <td>-----</td> <td>88.35</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>104</td> <td>140 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	89.96	-----	-----	88.35	30.45	4.82	33.66	104
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	2367.59	38.13	54.00	-15.87	36.68	30.42	4.77	33.74	104	140 AVERAGE																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	2412.00	89.96	-----	-----	88.35	30.45	4.82	33.66	104	140 AVERAGE																																																																							







Mode	11																																													
	Harmonic																																													
	2400-2483.5_802.11b_CH01_2412MHz																																													
ANT	0																																													
Pol.	Horizontal	Vertical																																												
Peak Avg	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>41.47</td> <td>74.00</td> <td>-32.53</td> <td>65.12</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	41.47	74.00	-32.53	65.12	33.83	7.75	65.23	--	--	Peak	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.35</td> <td>74.00</td> <td>-33.65</td> <td>64.00</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	40.35	74.00	-33.65	64.00	33.83	7.75	65.23	--	--	Peak
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1 4824.00	41.47	74.00	-32.53	65.12	33.83	7.75	65.23	--	--	Peak																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																				
1 4824.00	40.35	74.00	-33.65	64.00	33.83	7.75	65.23	--	--	Peak																																				



Mode	12																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																	
ANT	0																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.02</td> <td>74.00</td> <td>-31.98</td> <td>65.65</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.56</td> <td>74.00</td> <td>-30.44</td> <td>62.98</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	42.02	74.00	-31.98	65.65	33.85	7.77	65.25	-- -- Peak	2	7311.00	43.56	74.00	-30.44	62.98	36.30	8.93	64.65	-- -- Peak	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.31</td> <td>74.00</td> <td>-32.69</td> <td>64.94</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.23</td> <td>74.00</td> <td>-30.77</td> <td>62.65</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.31	74.00	-32.69	64.94	33.85	7.77	65.25	-- -- Peak	2	7311.00	43.23	74.00	-30.77	62.65	36.30	8.93	64.65	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4874.00	42.02	74.00	-31.98	65.65	33.85	7.77	65.25	-- -- Peak																																																																																									
2	7311.00	43.56	74.00	-30.44	62.98	36.30	8.93	64.65	-- -- Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4874.00	41.31	74.00	-32.69	64.94	33.85	7.77	65.25	-- -- Peak																																																																																									
2	7311.00	43.23	74.00	-30.77	62.65	36.30	8.93	64.65	-- -- Peak																																																																																									

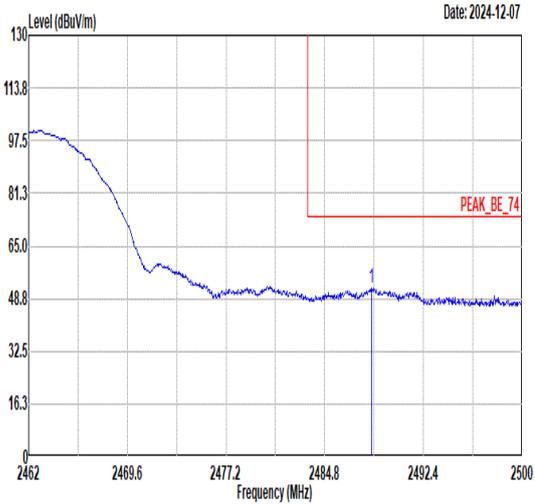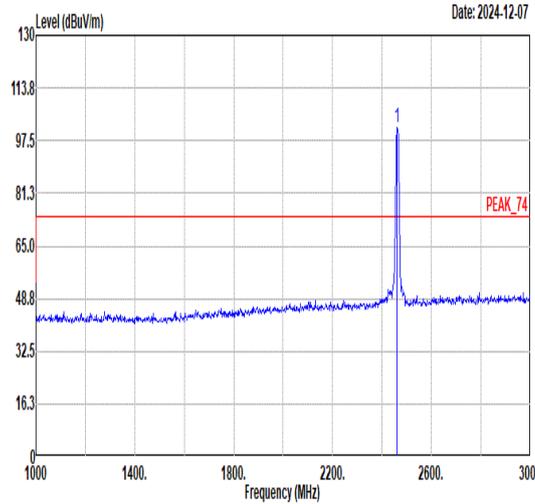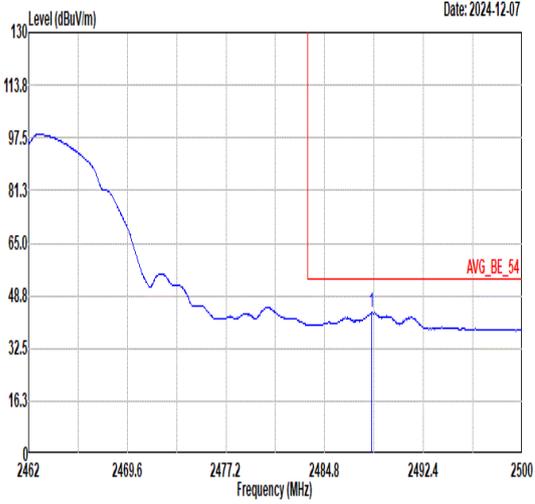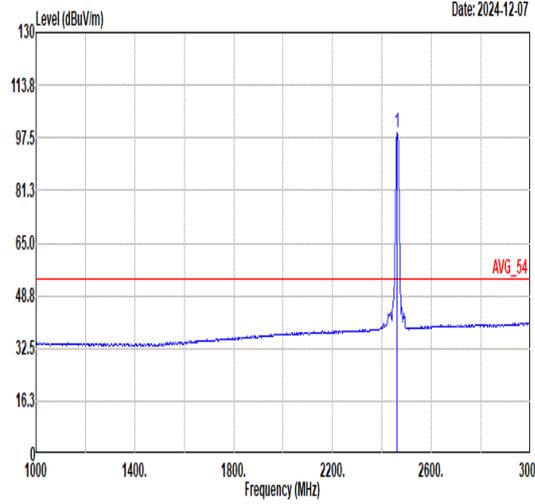

		13																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																									
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																																									
<b>ANT</b>	<b>0</b>																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.37</td> <td>52.04</td> <td>74.00</td> <td>-21.96</td> <td>50.13</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>136</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2488.37	52.04	74.00	-21.96	50.13	30.50	4.93	33.52	136	142	PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.73</td> <td>-----</td> <td>-----</td> <td>99.93</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>136</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	101.73	-----	-----	99.93	30.48	4.89	33.57	136	142	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2488.37	52.04	74.00	-21.96	50.13	30.50	4.93	33.52	136	142	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	101.73	-----	-----	99.93	30.48	4.89	33.57	136	142	PEAK																																																															
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.37</td> <td>43.60</td> <td>54.00</td> <td>-10.40</td> <td>41.69</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>136</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2488.37	43.60	54.00	-10.40	41.69	30.50	4.93	33.52	136	142	AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.22</td> <td>-----</td> <td>-----</td> <td>97.42</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>136</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	99.22	-----	-----	97.42	30.48	4.89	33.57	136	142	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2488.37	43.60	54.00	-10.40	41.69	30.50	4.93	33.52	136	142	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	99.22	-----	-----	97.42	30.48	4.89	33.57	136	142	AVERAGE																																																															



		13																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																									
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																																									
<b>ANT</b>	<b>0</b>																																																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.38</td> <td>49.38</td> <td>74.00</td> <td>-24.62</td> <td>47.49</td> <td>30.49</td> <td>4.93</td> <td>33.53</td> <td>100</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2487.38	49.38	74.00	-24.62	47.49	30.49	4.93	33.53	100	141	PEAK	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>90.08</td> <td>-----</td> <td>-----</td> <td>88.28</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>100</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	90.08	-----	-----	88.28	30.48	4.89	33.57	100	141	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2487.38	49.38	74.00	-24.62	47.49	30.49	4.93	33.53	100	141	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	90.08	-----	-----	88.28	30.48	4.89	33.57	100	141	PEAK																																																															
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.23</td> <td>39.25</td> <td>54.00</td> <td>-14.75</td> <td>37.36</td> <td>30.49</td> <td>4.93</td> <td>33.53</td> <td>100</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2487.23	39.25	54.00	-14.75	37.36	30.49	4.93	33.53	100	141	AVERAGE	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>87.74</td> <td>-----</td> <td>-----</td> <td>85.95</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>100</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	87.74	-----	-----	85.95	30.48	4.89	33.58	100	141	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2487.23	39.25	54.00	-14.75	37.36	30.49	4.93	33.53	100	141	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	87.74	-----	-----	85.95	30.48	4.89	33.58	100	141	AVERAGE																																																															







Mode	13																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																	
ANT	0																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>67.38</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>63.29</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	43.77	74.00	-30.23	67.38	33.87	7.79	65.27	--	--	Peak	2	7386.00	44.17	74.00	-29.83	63.29	36.30	9.17	64.59	--	--	Peak	<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.09</td> <td>74.00</td> <td>-31.91</td> <td>65.70</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.25</td> <td>74.00</td> <td>-29.75</td> <td>63.37</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	42.09	74.00	-31.91	65.70	33.87	7.79	65.27	--	--	Peak	2	7386.00	44.25	74.00	-29.75	63.37	36.30	9.17	64.59	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4924.00	43.77	74.00	-30.23	67.38	33.87	7.79	65.27	--	--	Peak																																																																																							
2	7386.00	44.17	74.00	-29.83	63.29	36.30	9.17	64.59	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4924.00	42.09	74.00	-31.91	65.70	33.87	7.79	65.27	--	--	Peak																																																																																							
2	7386.00	44.25	74.00	-29.75	63.37	36.30	9.17	64.59	--	--	Peak																																																																																							



		14																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11g_CH01_2412MHz																																																																															
ANT	CDD 0+1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>63.26</td> <td>74.00</td> <td>-10.74</td> <td>61.72</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>190</td> <td>172 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	63.26	74.00	-10.74	61.72	30.44	4.80	33.70	190	172 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.73</td> <td>-----</td> <td>-----</td> <td>98.13</td> <td>30.45</td> <td>4.82</td> <td>33.67</td> <td>190</td> <td>172 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	99.73	-----	-----	98.13	30.45	4.82	33.67	190	172 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.95	63.26	74.00	-10.74	61.72	30.44	4.80	33.70	190	172 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	99.73	-----	-----	98.13	30.45	4.82	33.67	190	172 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>50.00</td> <td>54.00</td> <td>-4.00</td> <td>48.46</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>190</td> <td>172 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	50.00	54.00	-4.00	48.46	30.44	4.80	33.70	190	172 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.34</td> <td>-----</td> <td>-----</td> <td>91.73</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>190</td> <td>172 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	93.34	-----	-----	91.73	30.45	4.82	33.66	190	172 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.95	50.00	54.00	-4.00	48.46	30.44	4.80	33.70	190	172 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	93.34	-----	-----	91.73	30.45	4.82	33.66	190	172 AVERAGE																																																																						

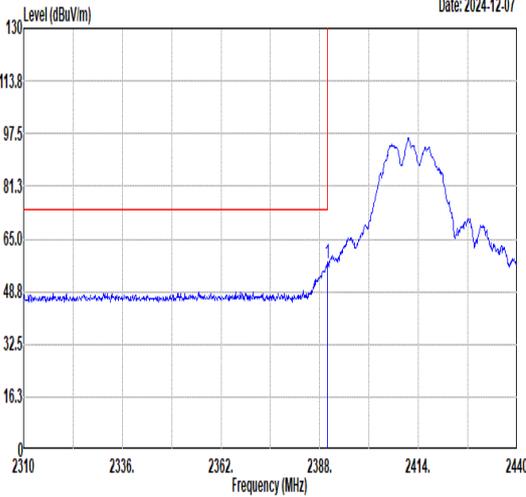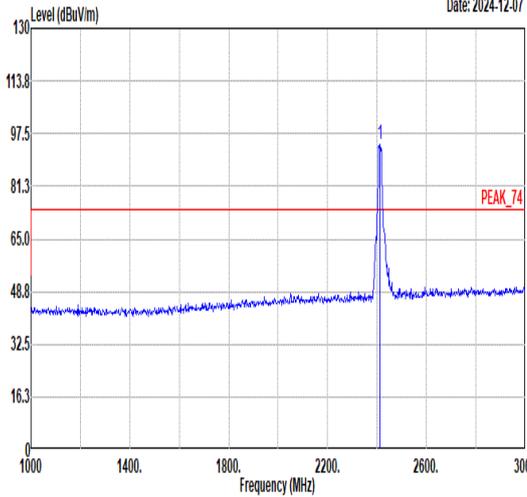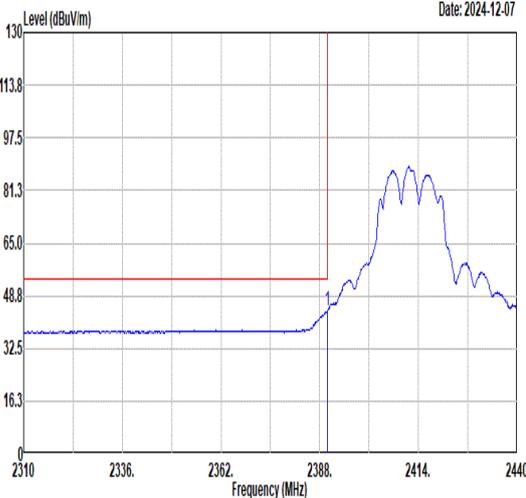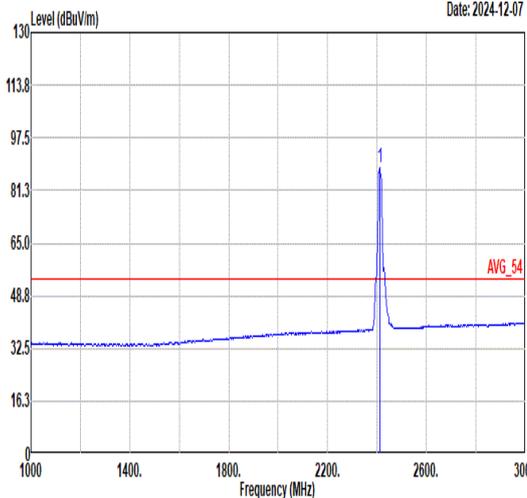

		<b>14</b>																																																																		
<b>Mode</b>	<b>Band Edge</b>																																																																			
	<b>2400-2483.5_802.11g_CH01_2412MHz</b>																																																																			
<b>ANT</b>	<b>CDD 0+1</b>																																																																			
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																		
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>57.29</td> <td>74.00</td> <td>-16.71</td> <td>55.75</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>103</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2389.95	57.29	74.00	-16.71	55.75	30.44	4.80	33.70	103	131	PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.99</td> <td>-----</td> <td>-----</td> <td>92.38</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>103</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2412.00	93.99	-----	-----	92.38	30.45	4.82	33.66	103	131	PEAK
	Limit	Read	Ant	Cable	APos	TPos																																																														
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2389.95	57.29	74.00	-16.71	55.75	30.44	4.80	33.70	103	131	PEAK																																																									
Limit	Read	Ant	Cable	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2412.00	93.99	-----	-----	92.38	30.45	4.82	33.66	103	131	PEAK																																																									
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>44.16</td> <td>54.00</td> <td>-9.84</td> <td>42.62</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>103</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2389.95	44.16	54.00	-9.84	42.62	30.44	4.80	33.70	103	131	AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>88.32</td> <td>-----</td> <td>-----</td> <td>86.71</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>103</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2412.00	88.32	-----	-----	86.71	30.45	4.82	33.66	103	131	AVERAGE
	Limit	Read	Ant	Cable	APos	TPos																																																														
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2389.95	44.16	54.00	-9.84	42.62	30.44	4.80	33.70	103	131	AVERAGE																																																									
Limit	Read	Ant	Cable	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2412.00	88.32	-----	-----	86.71	30.45	4.82	33.66	103	131	AVERAGE																																																									







Mode	14																																													
	Harmonic																																													
	2400-2483.5_802.11g_CH01_2412MHz																																													
ANT	CDD 0+1																																													
Pol.	Horizontal	Vertical																																												
Peak Avg	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.89</td> <td>74.00</td> <td>-33.11</td> <td>64.54</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	40.89	74.00	-33.11	64.54	33.83	7.75	65.23	--	--	Peak	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>41.40</td> <td>74.00</td> <td>-32.60</td> <td>65.05</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	41.40	74.00	-32.60	65.05	33.83	7.75	65.23	--	--	Peak
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1 4824.00	40.89	74.00	-33.11	64.54	33.83	7.75	65.23	--	--	Peak																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																				
1 4824.00	41.40	74.00	-32.60	65.05	33.83	7.75	65.23	--	--	Peak																																				







Mode	15																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																							
ANT	CDD 0+1																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.44</td> <td>74.00</td> <td>-32.56</td> <td>65.07</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>47.18</td> <td>74.00</td> <td>-26.82</td> <td>66.60</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	4874.00	41.44	74.00	-32.56	65.07	33.85	7.77	65.25	--	--	Peak	2	7311.00	47.18	74.00	-26.82	66.60	36.30	8.93	64.65	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.18</td> <td>74.00</td> <td>-31.82</td> <td>65.81</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>48.02</td> <td>74.00</td> <td>-25.98</td> <td>67.44</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	4874.00	42.18	74.00	-31.82	65.81	33.85	7.77	65.25	--	--	Peak	2	7311.00	48.02	74.00	-25.98	67.44	36.30	8.93	64.65	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																																
1	4874.00	41.44	74.00	-32.56	65.07	33.85	7.77	65.25	--	--	Peak																																																																																													
2	7311.00	47.18	74.00	-26.82	66.60	36.30	8.93	64.65	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																																
1	4874.00	42.18	74.00	-31.82	65.81	33.85	7.77	65.25	--	--	Peak																																																																																													
2	7311.00	48.02	74.00	-25.98	67.44	36.30	8.93	64.65	--	--	Peak																																																																																													

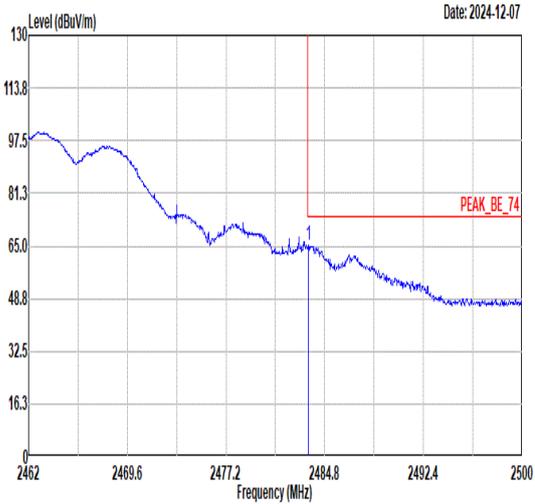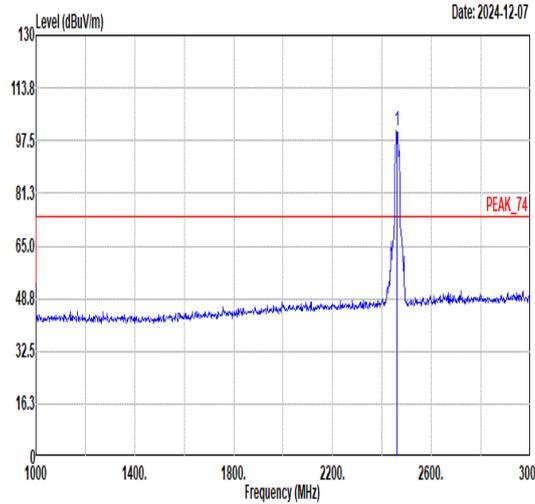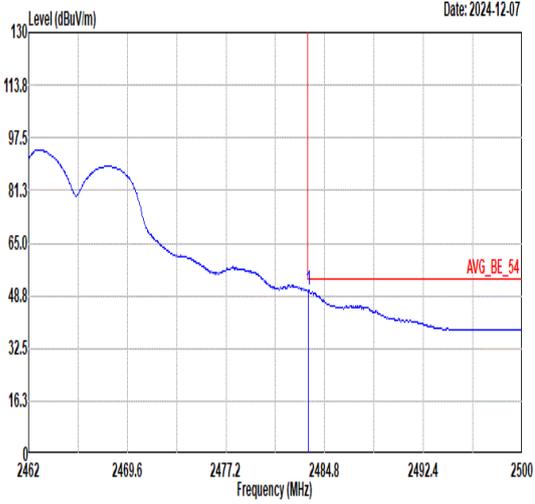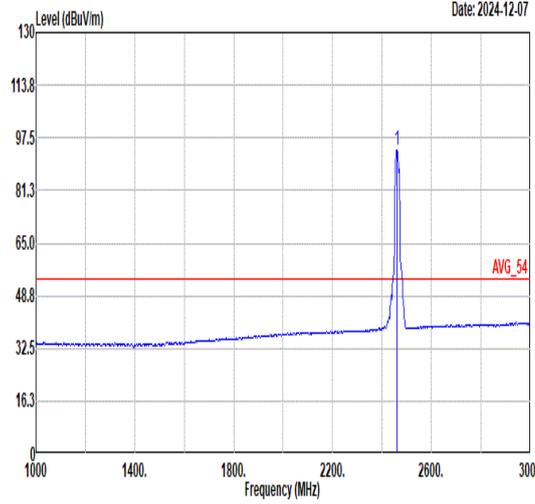

<b>16</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11g_CH11_2462MHz</b>																																				
<b>ANT</b>	<b>CDD 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>65.30</td> <td>74.00</td> <td>-8.70</td> <td>63.42</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>107</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.55	65.30	74.00	-8.70	63.42	30.49	4.92	33.53	107	345	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.55	65.30	74.00	-8.70	63.42	30.49	4.92	33.53	107	345	PEAK																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>100.66</td> <td>-----</td> <td>-----</td> <td>98.88</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>107</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	100.66	-----	-----	98.88	30.48	4.88	33.58	107	345	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	100.66	-----	-----	98.88	30.48	4.88	33.58	107	345	PEAK																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>50.39</td> <td>54.00</td> <td>-3.61</td> <td>48.51</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>107</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.55	50.39	54.00	-3.61	48.51	30.49	4.92	33.53	107	345	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.55	50.39	54.00	-3.61	48.51	30.49	4.92	33.53	107	345	AVERAGE																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>93.82</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>107</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	93.82	-----	-----	92.04	30.48	4.88	33.58	107	345	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	93.82	-----	-----	92.04	30.48	4.88	33.58	107	345	AVERAGE																										

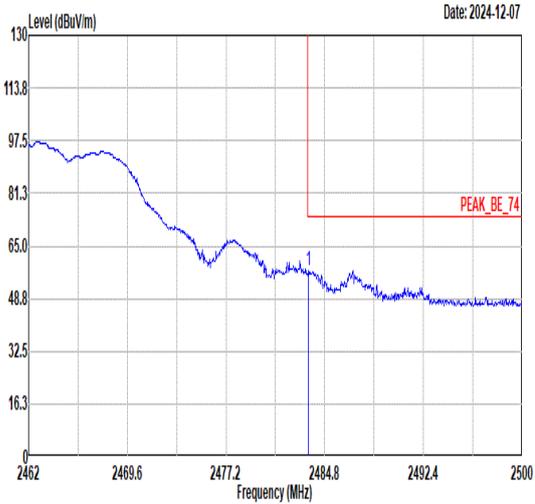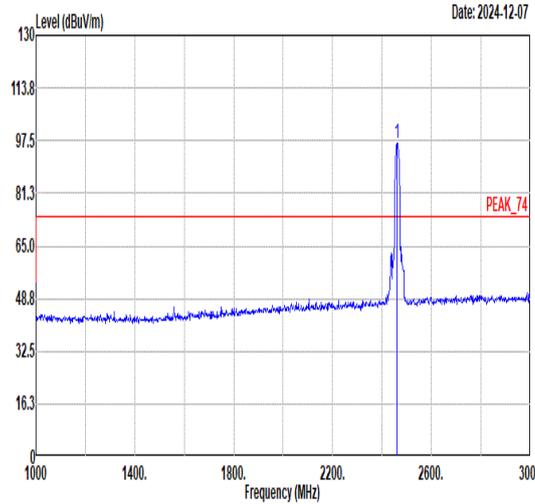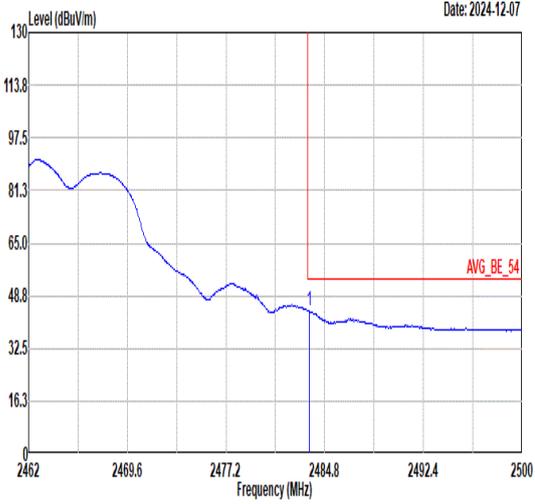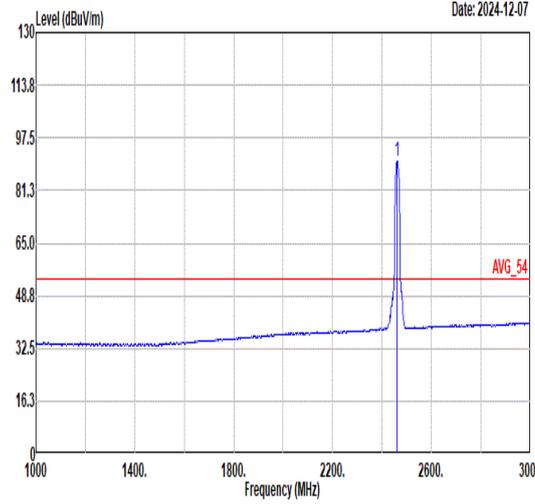

<b>16</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11g_CH11_2462MHz</b>																																				
<b>ANT</b>	<b>CDD 0+1</b>																																				
<b>Pol.</b>	<b>Vertical</b>																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>55.55</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>119</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.55	57.43	74.00	-16.57	55.55	30.49	4.92	33.53	119	127	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.55	57.43	74.00	-16.57	55.55	30.49	4.92	33.53	119	127	PEAK																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.74</td> <td>-----</td> <td>-----</td> <td>94.94</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>119</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	96.74	-----	-----	94.94	30.48	4.89	33.57	119	127	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	96.74	-----	-----	94.94	30.48	4.89	33.57	119	127	PEAK																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>44.22</td> <td>54.00</td> <td>-9.78</td> <td>42.34</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>119</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.58	44.22	54.00	-9.78	42.34	30.49	4.92	33.53	119	127	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.58	44.22	54.00	-9.78	42.34	30.49	4.92	33.53	119	127	AVERAGE																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>90.36</td> <td>-----</td> <td>-----</td> <td>88.56</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>119</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	90.36	-----	-----	88.56	30.48	4.89	33.57	119	127	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	90.36	-----	-----	88.56	30.48	4.89	33.57	119	127	AVERAGE																										







Mode	16																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
ANT	CDD 0+1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.34</td> <td>74.00</td> <td>-32.66</td> <td>64.95</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>48.11</td> <td>74.00</td> <td>-25.89</td> <td>67.23</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.34	74.00	-32.66	64.95	33.87	7.79	65.27	--	Peak	2	7386.00	48.11	74.00	-25.89	67.23	36.30	9.17	64.59	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.11</td> <td>74.00</td> <td>-32.89</td> <td>64.72</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.36</td> <td>74.00</td> <td>-29.64</td> <td>63.48</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.11	74.00	-32.89	64.72	33.87	7.79	65.27	--	Peak	2	7386.00	44.36	74.00	-29.64	63.48	36.30	9.17	64.59	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4924.00	41.34	74.00	-32.66	64.95	33.87	7.79	65.27	--	Peak																																																																																						
2	7386.00	48.11	74.00	-25.89	67.23	36.30	9.17	64.59	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4924.00	41.11	74.00	-32.89	64.72	33.87	7.79	65.27	--	Peak																																																																																						
2	7386.00	44.36	74.00	-29.64	63.48	36.30	9.17	64.59	--	Peak																																																																																						



		17																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																															
ANT	STBC 0+1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>59.50</td> <td>74.00</td> <td>-14.50</td> <td>57.99</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>123</td> <td>69 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.91	59.50	74.00	-14.50	57.99	30.43	4.79	33.71	123	69 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.25</td> <td>-----</td> <td>-----</td> <td>100.63</td> <td>30.45</td> <td>4.83</td> <td>33.66</td> <td>123</td> <td>69 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	102.25	-----	-----	100.63	30.45	4.83	33.66	123	69 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2388.91	59.50	74.00	-14.50	57.99	30.43	4.79	33.71	123	69 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	102.25	-----	-----	100.63	30.45	4.83	33.66	123	69 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.04</td> <td>49.58</td> <td>54.00</td> <td>-4.42</td> <td>48.07</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>123</td> <td>69 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.04	49.58	54.00	-4.42	48.07	30.43	4.79	33.71	123	69 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.75</td> <td>-----</td> <td>-----</td> <td>92.14</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>123</td> <td>69 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	93.75	-----	-----	92.14	30.45	4.82	33.66	123	69 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.04	49.58	54.00	-4.42	48.07	30.43	4.79	33.71	123	69 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	93.75	-----	-----	92.14	30.45	4.82	33.66	123	69 AVERAGE																																																																						

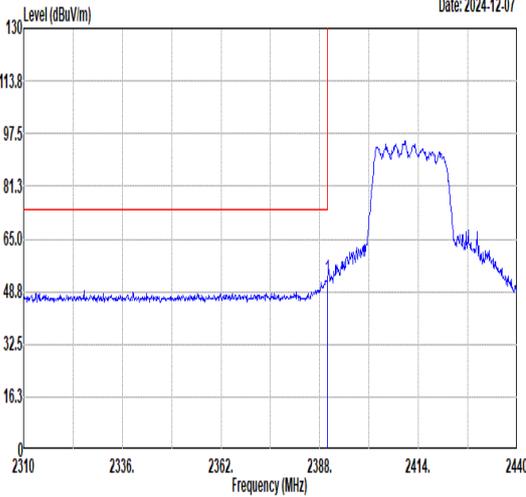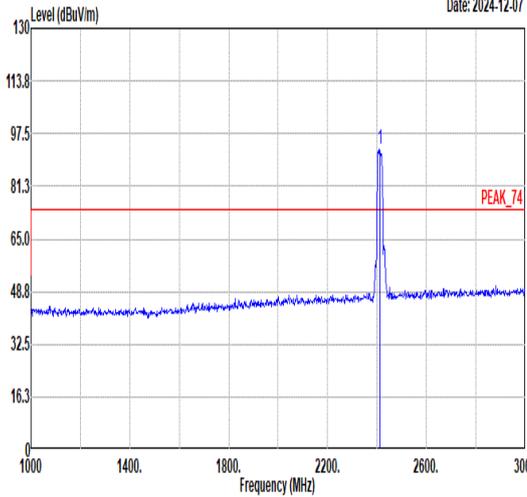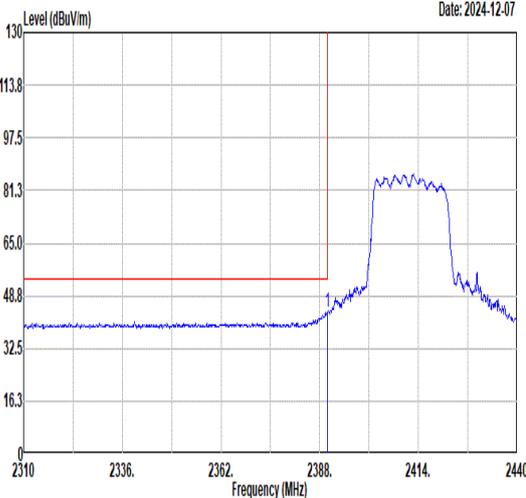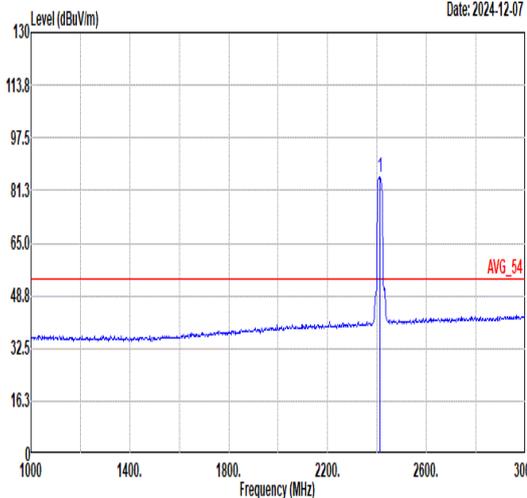

<b>17</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Vertical</b>																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.56</td> <td>74.00</td> <td>-21.44</td> <td>51.02</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>113</td> <td>123</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.95	52.56	74.00	-21.44	51.02	30.44	4.80	33.70	113	123	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2389.95	52.56	74.00	-21.44	51.02	30.44	4.80	33.70	113	123	PEAK																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.60</td> <td>-----</td> <td>-----</td> <td>91.00</td> <td>30.45</td> <td>4.82</td> <td>33.67</td> <td>113</td> <td>123</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	92.60	-----	-----	91.00	30.45	4.82	33.67	113	123	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	92.60	-----	-----	91.00	30.45	4.82	33.67	113	123	PEAK																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>42.09</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>113</td> <td>123</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.95	43.63	54.00	-10.37	42.09	30.44	4.80	33.70	113	123	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2389.95	43.63	54.00	-10.37	42.09	30.44	4.80	33.70	113	123	AVERAGE																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>85.46</td> <td>-----</td> <td>-----</td> <td>83.86</td> <td>30.45</td> <td>4.82</td> <td>33.67</td> <td>113</td> <td>123</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	85.46	-----	-----	83.86	30.45	4.82	33.67	113	123	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	85.46	-----	-----	83.86	30.45	4.82	33.67	113	123	AVERAGE																										



Mode	17																																																																						
	Harmonic																																																																						
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																						
ANT	STBC 0+1																																																																						
Pol.	Horizontal	Vertical																																																																					
Peak Avg	<p>Date: 2024-12-08</p>	<p>Date: 2024-12-08</p>																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.70</td> <td>74.00</td> <td>-33.30</td> <td>64.35</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4824.00	40.70	74.00	-33.30	64.35	33.83	7.75	65.23	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.75</td> <td>74.00</td> <td>-33.25</td> <td>64.40</td> <td>33.83</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4824.00	40.75	74.00	-33.25	64.40	33.83	7.75	65.23	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1 4824.00	40.70	74.00	-33.30	64.35	33.83	7.75	65.23	--	Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1 4824.00	40.75	74.00	-33.25	64.40	33.83	7.75	65.23	--	Peak																																																														



		<b>18</b>																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																													
	<b>2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz</b>																																																													
<b>ANT</b>	<b>STBC 0+1</b>																																																													
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.98</td> <td>51.56</td> <td>74.00</td> <td>-22.44</td> <td>50.05</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	2387.98	51.56	74.00	-22.44	50.05	30.43	4.79	33.71	200	156	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.43</td> <td>-----</td> <td>-----</td> <td>101.71</td> <td>30.47</td> <td>4.86</td> <td>33.61</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	2437.00	103.43	-----	-----	101.71	30.47	4.86	33.61	200	156	PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																				
1	2387.98	51.56	74.00	-22.44	50.05	30.43	4.79	33.71	200	156	PEAK																																																			
Limit	Read	Ant	Cable	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																				
1	2437.00	103.43	-----	-----	101.71	30.47	4.86	33.61	200	156	PEAK																																																			
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.63</td> <td>42.95</td> <td>54.00</td> <td>-11.05</td> <td>41.41</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	2389.63	42.95	54.00	-11.05	41.41	30.44	4.80	33.70	200	156	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>96.84</td> <td>-----</td> <td>-----</td> <td>95.12</td> <td>30.47</td> <td>4.86</td> <td>33.61</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	1	2437.00	96.84	-----	-----	95.12	30.47	4.86	33.61	200	156	AVERAGE
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																				
1	2389.63	42.95	54.00	-11.05	41.41	30.44	4.80	33.70	200	156	AVERAGE																																																			
Limit	Read	Ant	Cable	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																				
1	2437.00	96.84	-----	-----	95.12	30.47	4.86	33.61	200	156	AVERAGE																																																			



Mode	18																																					
	Band Edge - R																																					
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																					
ANT	STBC 0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.25</td> <td>53.03</td> <td>74.00</td> <td>-20.97</td> <td>51.15</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.25	53.03	74.00	-20.97	51.15	30.49	4.92	33.53	200	156	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	2484.25	53.03	74.00	-20.97	51.15	30.49	4.92	33.53	200	156	PEAK																											
Avg	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.75</td> <td>43.26</td> <td>54.00</td> <td>-10.74</td> <td>41.38</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.75	43.26	54.00	-10.74	41.38	30.49	4.92	33.53	200	156	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	2484.75	43.26	54.00	-10.74	41.38	30.49	4.92	33.53	200	156	AVERAGE																											



		18																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.66</td> <td>48.84</td> <td>74.00</td> <td>-25.16</td> <td>47.42</td> <td>30.42</td> <td>4.76</td> <td>33.76</td> <td>132</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2359.66	48.84	74.00	-25.16	47.42	30.42	4.76	33.76	132	360	PEAK	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>94.37</td> <td>30.46</td> <td>4.85</td> <td>33.62</td> <td>132</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	96.06	-----	-----	94.37	30.46	4.85	33.62	132	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2359.66	48.84	74.00	-25.16	47.42	30.42	4.76	33.76	132	360	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	96.06	-----	-----	94.37	30.46	4.85	33.62	132	360	PEAK																																																															
Avg	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2332.99</td> <td>40.94</td> <td>54.00</td> <td>-13.06</td> <td>39.61</td> <td>30.40</td> <td>4.74</td> <td>33.81</td> <td>132</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2332.99	40.94	54.00	-13.06	39.61	30.40	4.74	33.81	132	360	AVERAGE	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>88.81</td> <td>-----</td> <td>-----</td> <td>87.11</td> <td>30.46</td> <td>4.86</td> <td>33.62</td> <td>132</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	88.81	-----	-----	87.11	30.46	4.86	33.62	132	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2332.99	40.94	54.00	-13.06	39.61	30.40	4.74	33.81	132	360	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	88.81	-----	-----	87.11	30.46	4.86	33.62	132	360	AVERAGE																																																															







Mode	18																															
	Band Edge - R																															
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																															
ANT	STBC 0+1																															
Pol.	Vertical	Fundamental																														
Peak	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.01</td> <td>49.10</td> <td>74.00</td> <td>-24.90</td> <td>47.22</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>132</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2486.01	49.10	74.00	-24.90	47.22	30.49	4.92	33.53	132	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	2486.01	49.10	74.00	-24.90	47.22	30.49	4.92	33.53	132	360	PEAK																					
Avg	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.02</td> <td>41.44</td> <td>54.00</td> <td>-12.56</td> <td>39.56</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>132</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2487.02	41.44	54.00	-12.56	39.56	30.49	4.92	33.53	132	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	2487.02	41.44	54.00	-12.56	39.56	30.49	4.92	33.53	132	360	AVERAGE																					







Mode	18																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																															
ANT	STBC 0+1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>40.67</td> <td>74.00</td> <td>-33.33</td> <td>64.30</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>47.11</td> <td>74.00</td> <td>-26.89</td> <td>66.53</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	40.67	74.00	-33.33	64.30	33.85	7.77	65.25	--	Peak	2	7311.00	47.11	74.00	-26.89	66.53	36.30	8.93	64.65	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.19</td> <td>74.00</td> <td>-32.81</td> <td>64.82</td> <td>33.85</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.81</td> <td>74.00</td> <td>-30.19</td> <td>63.23</td> <td>36.30</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	41.19	74.00	-32.81	64.82	33.85	7.77	65.25	--	Peak	2	7311.00	43.81	74.00	-30.19	63.23	36.30	8.93	64.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4874.00	40.67	74.00	-33.33	64.30	33.85	7.77	65.25	--	Peak																																																																																						
2	7311.00	47.11	74.00	-26.89	66.53	36.30	8.93	64.65	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4874.00	41.19	74.00	-32.81	64.82	33.85	7.77	65.25	--	Peak																																																																																						
2	7311.00	43.81	74.00	-30.19	63.23	36.30	8.93	64.65	--	Peak																																																																																						

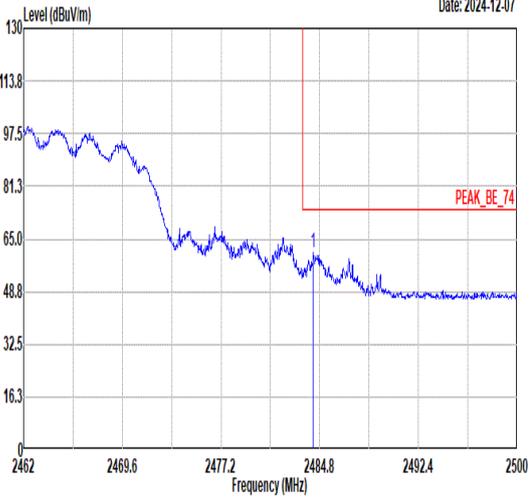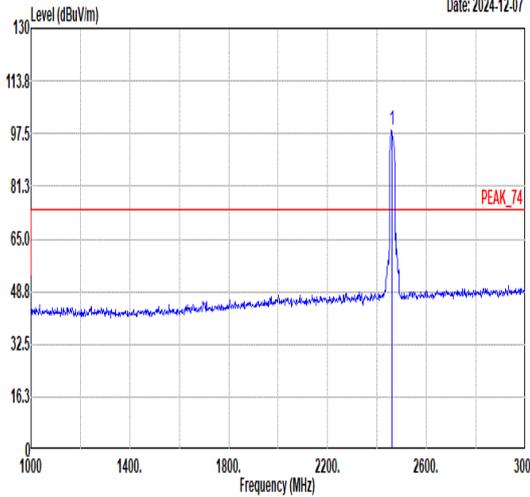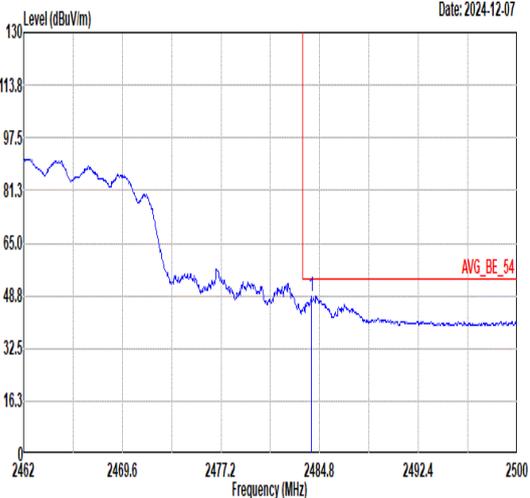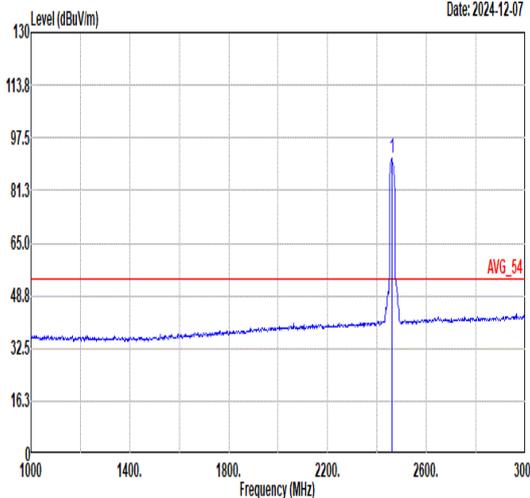

<b>19</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.31</td> <td>60.86</td> <td>74.00</td> <td>-13.14</td> <td>58.98</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>108</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.31	60.86	74.00	-13.14	58.98	30.49	4.92	33.53	108	344	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2484.31	60.86	74.00	-13.14	58.98	30.49	4.92	33.53	108	344	PEAK																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.56</td> <td>-----</td> <td>-----</td> <td>96.78</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>108</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	98.56	-----	-----	96.78	30.48	4.88	33.58	108	344	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	98.56	-----	-----	96.78	30.48	4.88	33.58	108	344	PEAK																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.15</td> <td>48.78</td> <td>54.00</td> <td>-5.22</td> <td>46.90</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>108</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.15	48.78	54.00	-5.22	46.90	30.49	4.92	33.53	108	344	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2484.15	48.78	54.00	-5.22	46.90	30.49	4.92	33.53	108	344	AVERAGE																										
 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>91.14</td> <td>-----</td> <td>-----</td> <td>89.35</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>108</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	91.14	-----	-----	89.35	30.48	4.89	33.58	108	344	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	91.14	-----	-----	89.35	30.48	4.89	33.58	108	344	AVERAGE																										

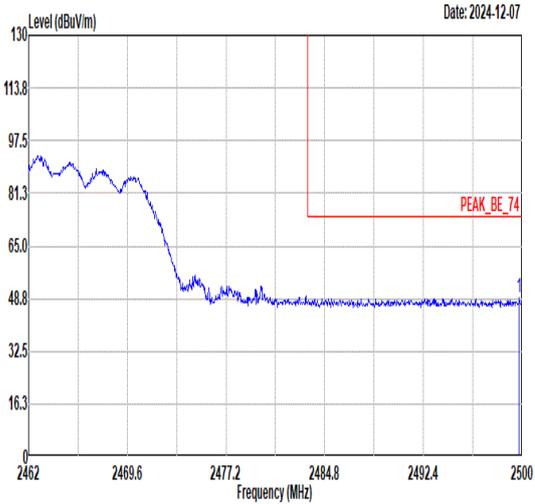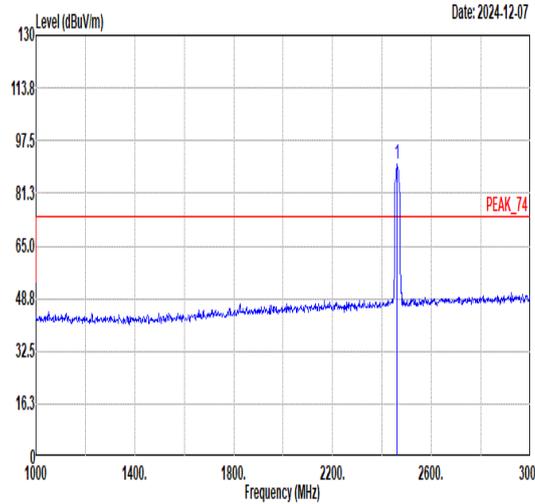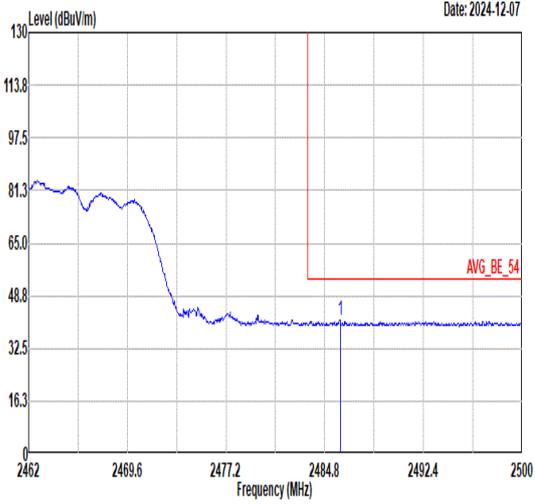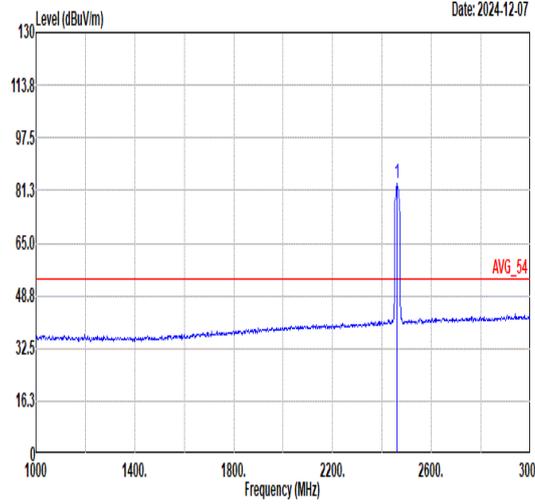

		19																																																																										
Mode	Band Edge																																																																											
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																											
ANT	STBC 0+1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2499.77</td> <td>48.98</td> <td>74.00</td> <td>-25.02</td> <td>47.03</td> <td>30.51</td> <td>4.94</td> <td>33.50</td> <td>112</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2499.77	48.98	74.00	-25.02	47.03	30.51	4.94	33.50	112	144	PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>90.19</td> <td>-----</td> <td>-----</td> <td>88.39</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>112</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	90.19	-----	-----	88.39	30.48	4.89	33.57	112	144	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2499.77	48.98	74.00	-25.02	47.03	30.51	4.94	33.50	112	144	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2462.00	90.19	-----	-----	88.39	30.48	4.89	33.57	112	144	PEAK																																																																	
Avg	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.98</td> <td>41.09</td> <td>54.00</td> <td>-12.91</td> <td>39.21</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>112</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2485.98	41.09	54.00	-12.91	39.21	30.49	4.92	33.53	112	144	AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>83.60</td> <td>-----</td> <td>-----</td> <td>81.81</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>112</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	83.60	-----	-----	81.81	30.48	4.89	33.58	112	144	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2485.98	41.09	54.00	-12.91	39.21	30.49	4.92	33.53	112	144	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2462.00	83.60	-----	-----	81.81	30.48	4.89	33.58	112	144	AVERAGE																																																																	



Mode	19																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																					
ANT	STBC 0+1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.32</td> <td>74.00</td> <td>-33.68</td> <td>63.93</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.59</td> <td>74.00</td> <td>-31.41</td> <td>61.71</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	4924.00	40.32	74.00	-33.68	63.93	33.87	7.79	65.27	--	--	Peak	2	7386.00	42.59	74.00	-31.41	61.71	36.30	9.17	64.59	--	--	Peak	<p>Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.87</td> <td>74.00</td> <td>-33.13</td> <td>64.48</td> <td>33.87</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.74</td> <td>74.00</td> <td>-31.26</td> <td>61.86</td> <td>36.30</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	4924.00	40.87	74.00	-33.13	64.48	33.87	7.79	65.27	--	--	Peak	2	7386.00	42.74	74.00	-31.26	61.86	36.30	9.17	64.59	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	4924.00	40.32	74.00	-33.68	63.93	33.87	7.79	65.27	--	--	Peak																																																																											
2	7386.00	42.59	74.00	-31.41	61.71	36.30	9.17	64.59	--	--	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	4924.00	40.87	74.00	-33.13	64.48	33.87	7.79	65.27	--	--	Peak																																																																											
2	7386.00	42.74	74.00	-31.26	61.86	36.30	9.17	64.59	--	--	Peak																																																																											



Mode	20																																																																									
	Band Edge - L																																																																									
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.96</td> <td>58.93</td> <td>74.00</td> <td>-15.07</td> <td>57.42</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>184</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.96	58.93	74.00	-15.07	57.42	30.43	4.79	33.71	184	175	PEAK	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>98.37</td> <td>-----</td> <td>-----</td> <td>96.67</td> <td>30.46</td> <td>4.86</td> <td>33.62</td> <td>184</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	98.37	-----	-----	96.67	30.46	4.86	33.62	184	175	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2388.96	58.93	74.00	-15.07	57.42	30.43	4.79	33.71	184	175	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2422.00	98.37	-----	-----	96.67	30.46	4.86	33.62	184	175	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.85</td> <td>50.48</td> <td>54.00</td> <td>-3.52</td> <td>48.97</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>184</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.85	50.48	54.00	-3.52	48.97	30.43	4.79	33.71	184	175	AVERAGE	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>89.54</td> <td>-----</td> <td>-----</td> <td>87.93</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>184</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	89.54	-----	-----	87.93	30.45	4.82	33.66	184	175	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2388.85	50.48	54.00	-3.52	48.97	30.43	4.79	33.71	184	175	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2422.00	89.54	-----	-----	87.93	30.45	4.82	33.66	184	175	AVERAGE																																																															



Mode	20																																						
	Band Edge - R																																						
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																						
ANT	STBC 0+1																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.94</td> <td>49.69</td> <td>74.00</td> <td>-24.31</td> <td>47.78</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>184</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2489.94	49.69	74.00	-24.31	47.78	30.50	4.93	33.52	184	175	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	2489.94	49.69	74.00	-24.31	47.78	30.50	4.93	33.52	184	175	PEAK																												
Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.93</td> <td>41.67</td> <td>54.00</td> <td>-12.33</td> <td>39.79</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>184</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.93	41.67	54.00	-12.33	39.79	30.49	4.92	33.53	184	175	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	2483.93	41.67	54.00	-12.33	39.79	30.49	4.92	33.53	184	175	AVERAGE																												



		<b>20</b>																																																																								
<b>Mode</b>	<b>Band Edge - L</b>																																																																									
	<b>2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz</b>																																																																									
<b>ANT</b>	<b>STBC 0+1</b>																																																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>54.30</td> <td>74.00</td> <td>-19.70</td> <td>52.78</td> <td>30.44</td> <td>4.79</td> <td>33.71</td> <td>184</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.30	54.30	74.00	-19.70	52.78	30.44	4.79	33.71	184	175	PEAK	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>90.90</td> <td>-----</td> <td>-----</td> <td>89.27</td> <td>30.45</td> <td>4.83</td> <td>33.65</td> <td>184</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	90.90	-----	-----	89.27	30.45	4.83	33.65	184	175	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2389.30	54.30	74.00	-19.70	52.78	30.44	4.79	33.71	184	175	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2422.00	90.90	-----	-----	89.27	30.45	4.83	33.65	184	175	PEAK																																																															
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.86</td> <td>45.80</td> <td>54.00</td> <td>-8.20</td> <td>44.26</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>184</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.86	45.80	54.00	-8.20	44.26	30.44	4.80	33.70	184	175	AVERAGE	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>83.60</td> <td>-----</td> <td>-----</td> <td>81.88</td> <td>30.47</td> <td>4.86</td> <td>33.61</td> <td>184</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	83.60	-----	-----	81.88	30.47	4.86	33.61	184	175	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2389.86	45.80	54.00	-8.20	44.26	30.44	4.80	33.70	184	175	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2422.00	83.60	-----	-----	81.88	30.47	4.86	33.61	184	175	AVERAGE																																																															



Mode	20																															
	Band Edge - R																															
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																															
ANT	STBC 0+1																															
Pol.	Vertical	Fundamental																														
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2494.93</td> <td>49.47</td> <td>74.00</td> <td>-24.53</td> <td>47.54</td> <td>30.50</td> <td>4.94</td> <td>33.51</td> <td>184</td> <td>175 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2494.93	49.47	74.00	-24.53	47.54	30.50	4.94	33.51	184	175 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2494.93	49.47	74.00	-24.53	47.54	30.50	4.94	33.51	184	175 PEAK																							
Blank																																
Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2488.92</td> <td>41.11</td> <td>54.00</td> <td>-12.89</td> <td>39.20</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>184</td> <td>175 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2488.92	41.11	54.00	-12.89	39.20	30.50	4.93	33.52	184	175 AVERAGE
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2488.92	41.11	54.00	-12.89	39.20	30.50	4.93	33.52	184	175 AVERAGE																							
Blank																																



Mode	20																																																																								
	Harmonic																																																																								
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																								
ANT	STBC 0+1																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2024-12-08</p>	<p>Date: 2024-12-08</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.00</td> <td>40.96</td> <td>74.00</td> <td>-33.04</td> <td>64.60</td> <td>33.84</td> <td>7.76</td> <td>65.24</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4844.00	40.96	74.00	-33.04	64.60	33.84	7.76	65.24	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.00</td> <td>40.60</td> <td>74.00</td> <td>-33.40</td> <td>64.24</td> <td>33.84</td> <td>7.76</td> <td>65.24</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4844.00	40.60	74.00	-33.40	64.24	33.84	7.76	65.24	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4844.00	40.96	74.00	-33.04	64.60	33.84	7.76	65.24	--	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4844.00	40.60	74.00	-33.40	64.24	33.84	7.76	65.24	--	Peak																																																															



<b>21</b>																																					
<b>Mode</b>	<b>Band Edge - L</b>																																				
	<b>2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2366.52</td> <td>49.60</td> <td>74.00</td> <td>-24.40</td> <td>48.16</td> <td>30.42</td> <td>4.77</td> <td>33.75</td> <td>300</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2366.52	49.60	74.00	-24.40	48.16	30.42	4.77	33.75	300	240	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2366.52	49.60	74.00	-24.40	48.16	30.42	4.77	33.75	300	240	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>91.79</td> <td>-----</td> <td>-----</td> <td>90.00</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>300</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	91.79	-----	-----	90.00	30.48	4.89	33.58	300	240	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	91.79	-----	-----	90.00	30.48	4.89	33.58	300	240	PEAK																										
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2370.92</td> <td>40.58</td> <td>54.00</td> <td>-13.42</td> <td>39.12</td> <td>30.42</td> <td>4.78</td> <td>33.74</td> <td>300</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2370.92	40.58	54.00	-13.42	39.12	30.42	4.78	33.74	300	240	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2370.92	40.58	54.00	-13.42	39.12	30.42	4.78	33.74	300	240	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>84.59</td> <td>-----</td> <td>-----</td> <td>82.81</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>300</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	84.59	-----	-----	82.81	30.48	4.88	33.58	300	240	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	84.59	-----	-----	82.81	30.48	4.88	33.58	300	240	AVERAGE																										



	21																																															
Mode	Band Edge - R																																															
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																															
ANT	STBC 0+1																																															
Pol.	Horizontal	Fundamental																																														
Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.10</td> <td>58.78</td> <td>74.00</td> <td>-15.22</td> <td>56.88</td> <td>30.50</td> <td>4.93</td> <td>33.53</td> <td>300</td> <td>240</td> <td></td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2488.10	58.78	74.00	-15.22	56.88	30.50	4.93	33.53	300	240		PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2488.10	58.78	74.00	-15.22	56.88	30.50	4.93	33.53	300	240		PEAK																																				
Blank																																																
Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.12</td> <td>47.46</td> <td>54.00</td> <td>-6.54</td> <td>45.58</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>300</td> <td>240</td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2485.12	47.46	54.00	-6.54	45.58	30.49	4.92	33.53	300	240		AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2485.12	47.46	54.00	-6.54	45.58	30.49	4.92	33.53	300	240		AVERAGE																																				
Blank																																																



<b>21</b>																																					
<b>Mode</b>	<b>Band Edge - L</b>																																				
	<b>2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Vertical</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2348.91</td> <td>48.47</td> <td>74.00</td> <td>-25.53</td> <td>47.09</td> <td>30.41</td> <td>4.75</td> <td>33.78</td> <td>143</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2348.91	48.47	74.00	-25.53	47.09	30.41	4.75	33.78	143	169	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2348.91	48.47	74.00	-25.53	47.09	30.41	4.75	33.78	143	169	PEAK																										
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>90.15</td> <td>-----</td> <td>-----</td> <td>88.39</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>143</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2452.00	90.15	-----	-----	88.39	30.47	4.88	33.59	143	169	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2452.00	90.15	-----	-----	88.39	30.47	4.88	33.59	143	169	PEAK																										
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.68</td> <td>40.45</td> <td>54.00</td> <td>-13.55</td> <td>38.94</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>143</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2386.68	40.45	54.00	-13.55	38.94	30.43	4.79	33.71	143	169	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2386.68	40.45	54.00	-13.55	38.94	30.43	4.79	33.71	143	169	AVERAGE																										
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>80.96</td> <td>-----</td> <td>-----</td> <td>79.20</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>143</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2452.00	80.96	-----	-----	79.20	30.47	4.88	33.59	143	169	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2452.00	80.96	-----	-----	79.20	30.47	4.88	33.59	143	169	AVERAGE																										







	21																																												
Mode	Band Edge - R																																												
	2400-2483.5_802.11ax HE40_CH09_Full RU_2452MHz																																												
ANT	STBC 0+1																																												
Pol.	Vertical	Fundamental																																											
Peak	<p style="text-align: right;">Date: 2024-12-07</p>																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.65</td> <td>55.70</td> <td>74.00</td> <td>-18.30</td> <td>53.79</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>143</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2491.65	55.70	74.00	-18.30	53.79	30.50	4.93	33.52	143	169
Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2491.65	55.70	74.00	-18.30	53.79	30.50	4.93	33.52	143	169	PEAK																																		
Avg	<p style="text-align: right;">Date: 2024-12-07</p>																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.45</td> <td>44.67</td> <td>54.00</td> <td>-9.33</td> <td>42.79</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>143</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2484.45	44.67	54.00	-9.33	42.79	30.49	4.92	33.53	143	169
Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2484.45	44.67	54.00	-9.33	42.79	30.49	4.92	33.53	143	169	AVERAGE																																		







		22																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11ax HE20_CH01_Partial_RU 106/53_2412MHz																																																																															
ANT	STBC 0+1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>59.03</td> <td>74.00</td> <td>-14.97</td> <td>57.49</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>241</td> <td>207 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	59.03	74.00	-14.97	57.49	30.44	4.80	33.70	241	207 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.64</td> <td>-----</td> <td>-----</td> <td>104.04</td> <td>30.45</td> <td>4.82</td> <td>33.67</td> <td>241</td> <td>207 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	105.64	-----	-----	104.04	30.45	4.82	33.67	241	207 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.95	59.03	74.00	-14.97	57.49	30.44	4.80	33.70	241	207 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	105.64	-----	-----	104.04	30.45	4.82	33.67	241	207 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>48.66</td> <td>54.00</td> <td>-5.34</td> <td>47.12</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>241</td> <td>207 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	48.66	54.00	-5.34	47.12	30.44	4.80	33.70	241	207 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>97.93</td> <td>-----</td> <td>-----</td> <td>96.33</td> <td>30.45</td> <td>4.82</td> <td>33.67</td> <td>241</td> <td>207 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	97.93	-----	-----	96.33	30.45	4.82	33.67	241	207 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.95	48.66	54.00	-5.34	47.12	30.44	4.80	33.70	241	207 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	97.93	-----	-----	96.33	30.45	4.82	33.67	241	207 AVERAGE																																																																						

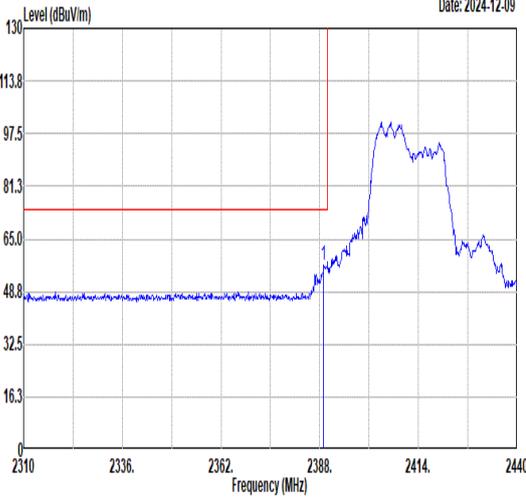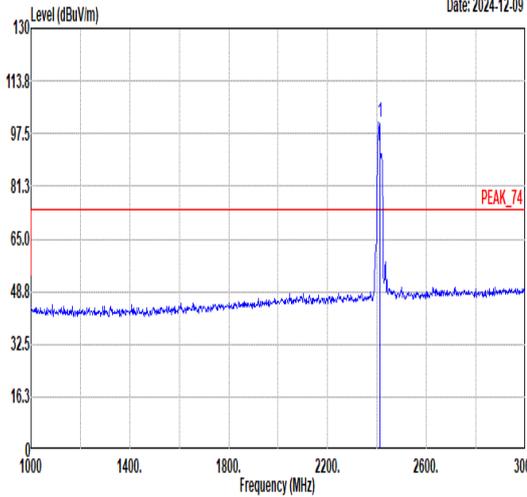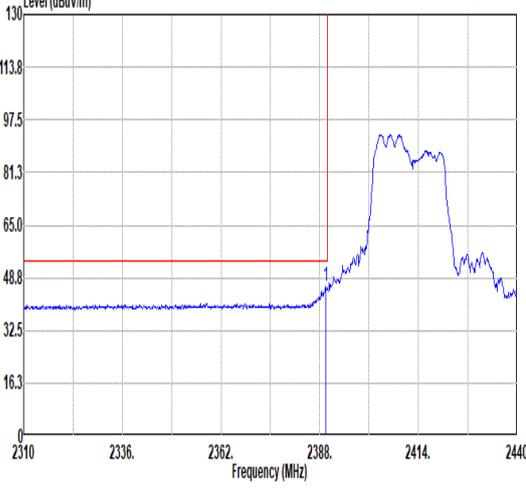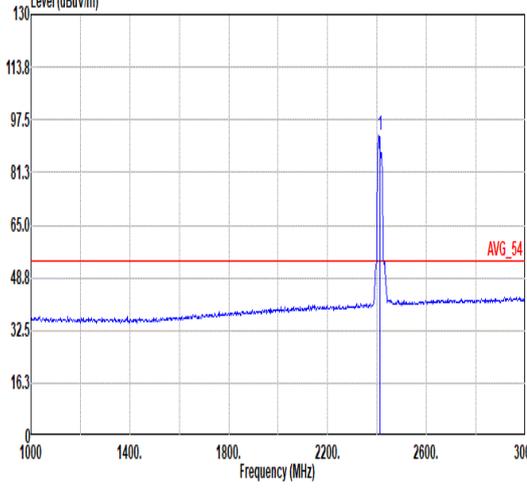

		22																																																																		
Mode	Band Edge																																																																			
	2400-2483.5_802.11ax HE20_CH01_Partial_RU 106/53_2412MHz																																																																			
ANT	STBC 0+1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.04</td> <td>56.80</td> <td>74.00</td> <td>-17.20</td> <td>55.29</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>145</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2389.04	56.80	74.00	-17.20	55.29	30.43	4.79	33.71	145	144	PEAK	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.01</td> <td>-----</td> <td>-----</td> <td>99.42</td> <td>30.45</td> <td>4.81</td> <td>33.67</td> <td>145</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2412.00	101.01	-----	-----	99.42	30.45	4.81	33.67	145	144	PEAK
	Limit	Read	Ant	Cable	APos	TPos																																																														
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2389.04	56.80	74.00	-17.20	55.29	30.43	4.79	33.71	145	144	PEAK																																																									
Limit	Read	Ant	Cable	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2412.00	101.01	-----	-----	99.42	30.45	4.81	33.67	145	144	PEAK																																																									
Avg	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>46.29</td> <td>54.00</td> <td>-7.71</td> <td>44.75</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>145</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2389.56	46.29	54.00	-7.71	44.75	30.44	4.80	33.70	145	144	AVERAGE	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.78</td> <td>-----</td> <td>-----</td> <td>91.19</td> <td>30.45</td> <td>4.81</td> <td>33.67</td> <td>145</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2412.00	92.78	-----	-----	91.19	30.45	4.81	33.67	145	144	AVERAGE
Limit	Read	Ant	Cable	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2389.56	46.29	54.00	-7.71	44.75	30.44	4.80	33.70	145	144	AVERAGE																																																									
Limit	Read	Ant	Cable	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	2412.00	92.78	-----	-----	91.19	30.45	4.81	33.67	145	144	AVERAGE																																																									

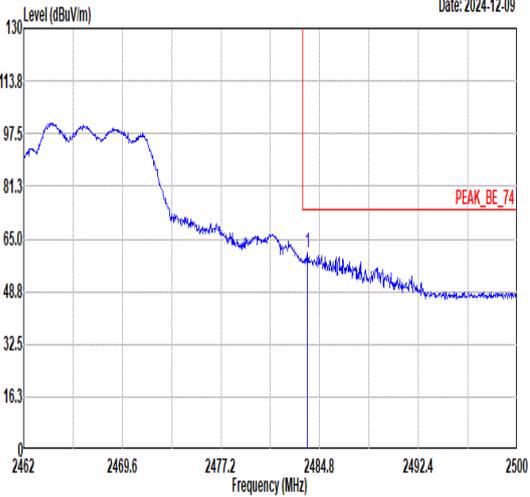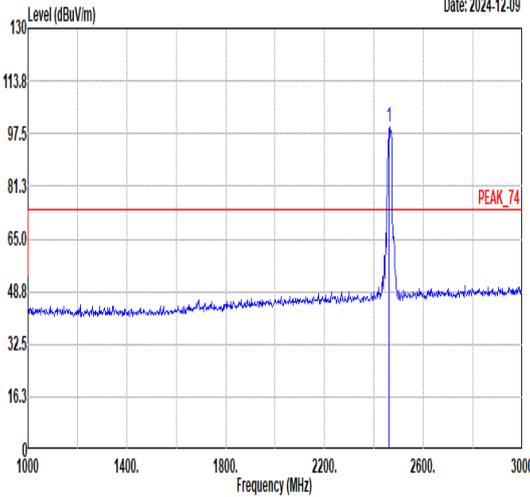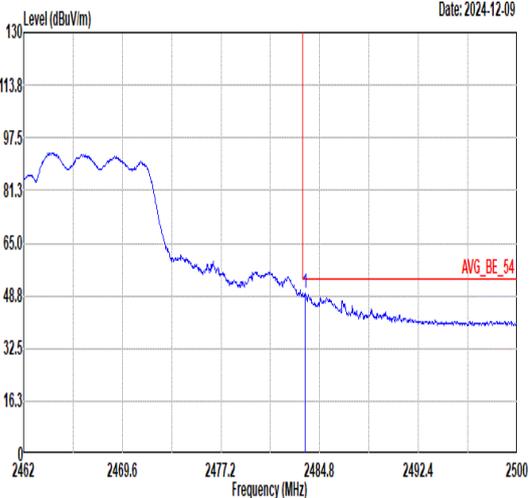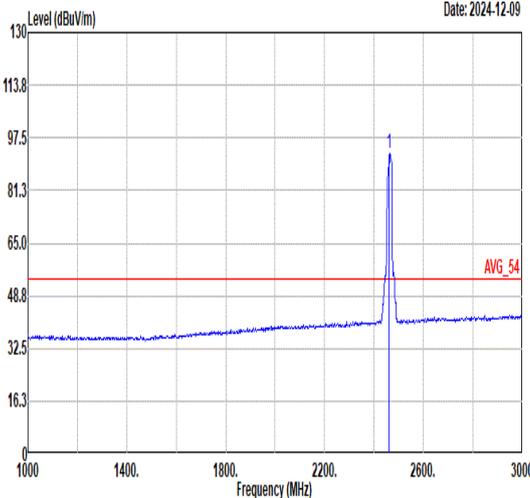

<b>23</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11ax HE20_CH11_Partial_RU 106/54_2462MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.85</td> <td>60.63</td> <td>74.00</td> <td>-13.37</td> <td>58.75</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>148</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.85	60.63	74.00	-13.37	58.75	30.49	4.92	33.53	148	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.85	60.63	74.00	-13.37	58.75	30.49	4.92	33.53	148	360	PEAK																										
 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.38</td> <td>-----</td> <td>-----</td> <td>97.58</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>148</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	99.38	-----	-----	97.58	30.48	4.89	33.57	148	360	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	99.38	-----	-----	97.58	30.48	4.89	33.57	148	360	PEAK																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.70</td> <td>49.41</td> <td>54.00</td> <td>-4.59</td> <td>47.53</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>148</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.70	49.41	54.00	-4.59	47.53	30.49	4.92	33.53	148	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.70	49.41	54.00	-4.59	47.53	30.49	4.92	33.53	148	360	AVERAGE																										
 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>92.50</td> <td>-----</td> <td>-----</td> <td>90.70</td> <td>30.48</td> <td>4.89</td> <td>33.57</td> <td>148</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	92.50	-----	-----	90.70	30.48	4.89	33.57	148	360	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	92.50	-----	-----	90.70	30.48	4.89	33.57	148	360	AVERAGE																										



<b>23</b>																																					
<b>Mode</b>	<b>Band Edge</b>																																				
	<b>2400-2483.5_802.11ax HE20_CH11_Partial_RU 106/54_2462MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Vertical</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>58.36</td> <td>74.00</td> <td>-15.64</td> <td>56.48</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>185</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.62	58.36	74.00	-15.64	56.48	30.49	4.92	33.53	185	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.62	58.36	74.00	-15.64	56.48	30.49	4.92	33.53	185	0	PEAK																										
<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.00</td> <td>-----</td> <td>-----</td> <td>94.19</td> <td>30.48</td> <td>4.90</td> <td>33.57</td> <td>185</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	96.00	-----	-----	94.19	30.48	4.90	33.57	185	0	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	96.00	-----	-----	94.19	30.48	4.90	33.57	185	0	PEAK																										
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>49.54</td> <td>54.00</td> <td>-4.46</td> <td>47.66</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>185</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.58	49.54	54.00	-4.46	47.66	30.49	4.92	33.53	185	0	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.58	49.54	54.00	-4.46	47.66	30.49	4.92	33.53	185	0	AVERAGE																										
<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>87.66</td> <td>-----</td> <td>-----</td> <td>85.85</td> <td>30.48</td> <td>4.90</td> <td>33.57</td> <td>185</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	87.66	-----	-----	85.85	30.48	4.90	33.57	185	0	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	87.66	-----	-----	85.85	30.48	4.90	33.57	185	0	AVERAGE																										





Mode	24																																																																																																																																																																																	
	LF																																																																																																																																																																																	
	2400-2483.5_802.11ax HE40_CH03_LFMHz																																																																																																																																																																																	
ANT	STBC 0+1																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>52.31</td> <td>19.64</td> <td>40.00</td> <td>-20.36</td> <td>34.33</td> <td>19.53</td> <td>0.74</td> <td>34.96</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>150.28</td> <td>22.32</td> <td>43.50</td> <td>-21.18</td> <td>36.76</td> <td>18.98</td> <td>1.28</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>240.49</td> <td>27.29</td> <td>46.00</td> <td>-18.71</td> <td>43.11</td> <td>17.27</td> <td>1.61</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>487.84</td> <td>25.23</td> <td>46.00</td> <td>-20.77</td> <td>34.19</td> <td>23.21</td> <td>2.33</td> <td>34.50</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>616.85</td> <td>28.46</td> <td>46.00</td> <td>-17.54</td> <td>34.25</td> <td>26.14</td> <td>2.64</td> <td>34.57</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>804.06</td> <td>32.28</td> <td>46.00</td> <td>-13.72</td> <td>35.62</td> <td>27.92</td> <td>3.04</td> <td>34.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	52.31	19.64	40.00	-20.36	34.33	19.53	0.74	34.96	-- -- Peak	2	150.28	22.32	43.50	-21.18	36.76	18.98	1.28	34.70	-- -- Peak	3	240.49	27.29	46.00	-18.71	43.11	17.27	1.61	34.70	-- -- Peak	4	487.84	25.23	46.00	-20.77	34.19	23.21	2.33	34.50	-- -- Peak	5	616.85	28.46	46.00	-17.54	34.25	26.14	2.64	34.57	-- -- Peak	6	804.06	32.28	46.00	-13.72	35.62	27.92	3.04	34.30	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>28.20</td> <td>40.00</td> <td>-11.80</td> <td>44.84</td> <td>17.56</td> <td>0.54</td> <td>34.74</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>150.28</td> <td>24.58</td> <td>43.50</td> <td>-18.92</td> <td>39.02</td> <td>18.98</td> <td>1.28</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>241.46</td> <td>23.39</td> <td>46.00</td> <td>-22.61</td> <td>39.18</td> <td>17.30</td> <td>1.61</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>496.57</td> <td>25.08</td> <td>46.00</td> <td>-20.92</td> <td>33.92</td> <td>23.31</td> <td>2.35</td> <td>34.50</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>706.09</td> <td>29.34</td> <td>46.00</td> <td>-16.66</td> <td>33.75</td> <td>27.16</td> <td>2.83</td> <td>34.40</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>773.02</td> <td>31.91</td> <td>46.00</td> <td>-14.09</td> <td>35.56</td> <td>27.71</td> <td>2.99</td> <td>34.35</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	28.20	40.00	-11.80	44.84	17.56	0.54	34.74	-- -- Peak	2	150.28	24.58	43.50	-18.92	39.02	18.98	1.28	34.70	-- -- Peak	3	241.46	23.39	46.00	-22.61	39.18	17.30	1.61	34.70	-- -- Peak	4	496.57	25.08	46.00	-20.92	33.92	23.31	2.35	34.50	-- -- Peak	5	706.09	29.34	46.00	-16.66	33.75	27.16	2.83	34.40	-- -- Peak	6	773.02	31.91	46.00	-14.09	35.56	27.71	2.99	34.35	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	52.31	19.64	40.00	-20.36	34.33	19.53	0.74	34.96	-- -- Peak																																																																																																																																																																									
2	150.28	22.32	43.50	-21.18	36.76	18.98	1.28	34.70	-- -- Peak																																																																																																																																																																									
3	240.49	27.29	46.00	-18.71	43.11	17.27	1.61	34.70	-- -- Peak																																																																																																																																																																									
4	487.84	25.23	46.00	-20.77	34.19	23.21	2.33	34.50	-- -- Peak																																																																																																																																																																									
5	616.85	28.46	46.00	-17.54	34.25	26.14	2.64	34.57	-- -- Peak																																																																																																																																																																									
6	804.06	32.28	46.00	-13.72	35.62	27.92	3.04	34.30	-- -- Peak																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	30.00	28.20	40.00	-11.80	44.84	17.56	0.54	34.74	-- -- Peak																																																																																																																																																																									
2	150.28	24.58	43.50	-18.92	39.02	18.98	1.28	34.70	-- -- Peak																																																																																																																																																																									
3	241.46	23.39	46.00	-22.61	39.18	17.30	1.61	34.70	-- -- Peak																																																																																																																																																																									
4	496.57	25.08	46.00	-20.92	33.92	23.31	2.35	34.50	-- -- Peak																																																																																																																																																																									
5	706.09	29.34	46.00	-16.66	33.75	27.16	2.83	34.40	-- -- Peak																																																																																																																																																																									
6	773.02	31.91	46.00	-14.09	35.56	27.71	2.99	34.35	-- -- Peak																																																																																																																																																																									







<b>25</b>																																					
<b>Mode</b>	<b>Band Edge - L</b>																																				
	<b>2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.62</td> <td>58.21</td> <td>74.00</td> <td>-15.79</td> <td>56.70</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>127</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.62	58.21	74.00	-15.79	56.70	30.43	4.79	33.71	127	133	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2388.62	58.21	74.00	-15.79	56.70	30.43	4.79	33.71	127	133	PEAK																										
<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>98.84</td> <td>-----</td> <td>-----</td> <td>97.23</td> <td>30.45</td> <td>4.82</td> <td>33.66</td> <td>127</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	98.84	-----	-----	97.23	30.45	4.82	33.66	127	133	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2422.00	98.84	-----	-----	97.23	30.45	4.82	33.66	127	133	PEAK																										
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>50.23</td> <td>54.00</td> <td>-3.77</td> <td>48.69</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>127</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.97	50.23	54.00	-3.77	48.69	30.44	4.80	33.70	127	133	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.97	50.23	54.00	-3.77	48.69	30.44	4.80	33.70	127	133	AVERAGE																										
<p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>91.47</td> <td>-----</td> <td>-----</td> <td>89.78</td> <td>30.46</td> <td>4.85</td> <td>33.62</td> <td>127</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	91.47	-----	-----	89.78	30.46	4.85	33.62	127	133	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2422.00	91.47	-----	-----	89.78	30.46	4.85	33.62	127	133	AVERAGE																										

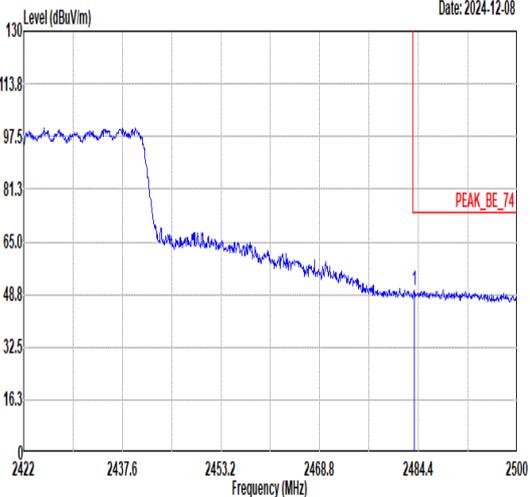
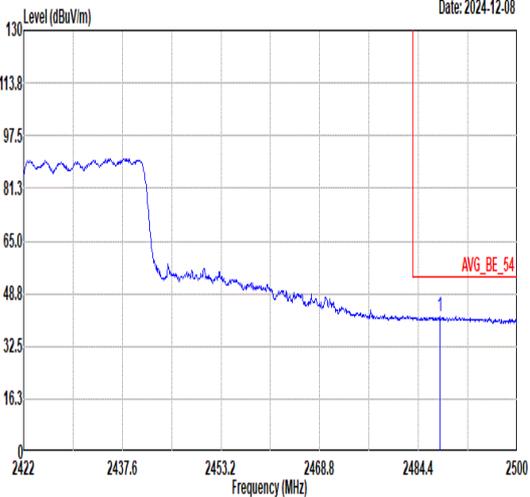


Mode	25																																		
	Band Edge - R																																		
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																		
ANT	STBC 0+1																																		
Pol.	Horizontal	Fundamental																																	
Peak	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1" data-bbox="268 1176 734 1294"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.70</td> <td>49.92</td> <td>74.00</td> <td>-24.08</td> <td>48.04</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>127 133 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2483.70	49.92	74.00	-24.08	48.04	30.49	4.92	33.53	127 133 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2483.70	49.92	74.00	-24.08	48.04	30.49	4.92	33.53	127 133 PEAK																											
Avg	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1" data-bbox="268 1856 734 1975"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2487.75</td> <td>41.61</td> <td>54.00</td> <td>-12.39</td> <td>39.72</td> <td>30.49</td> <td>4.93</td> <td>33.53</td> <td>127 133 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2487.75	41.61	54.00	-12.39	39.72	30.49	4.93	33.53	127 133 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2487.75	41.61	54.00	-12.39	39.72	30.49	4.93	33.53	127 133 AVERAGE																											

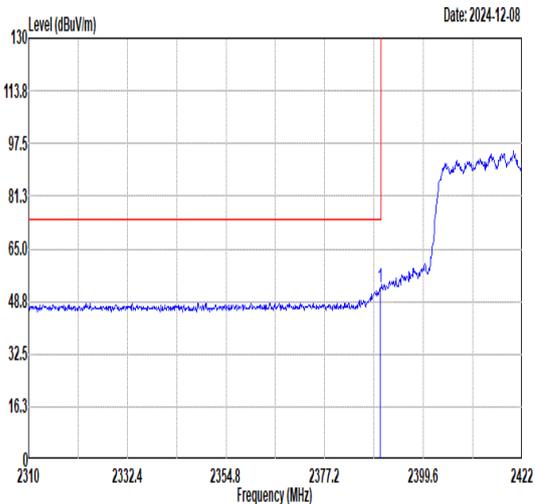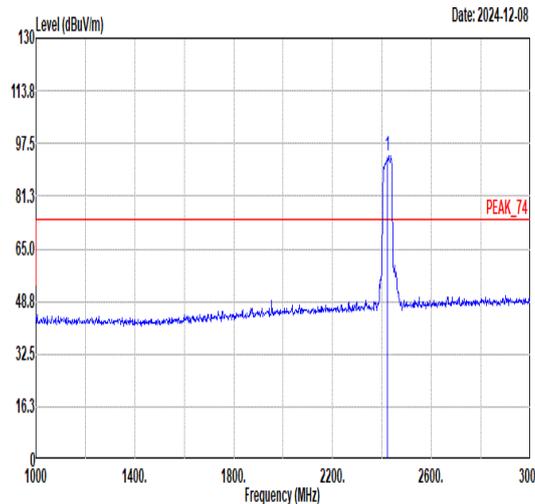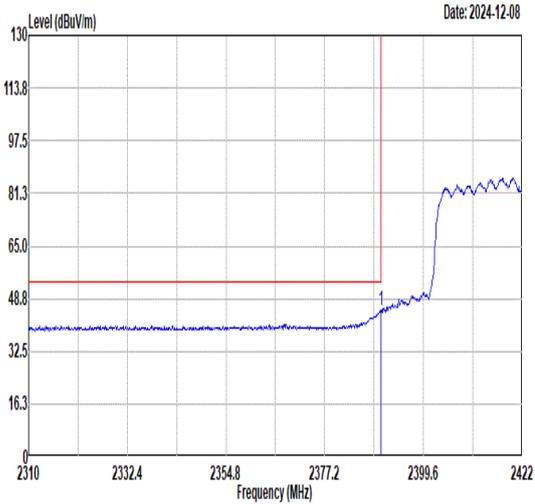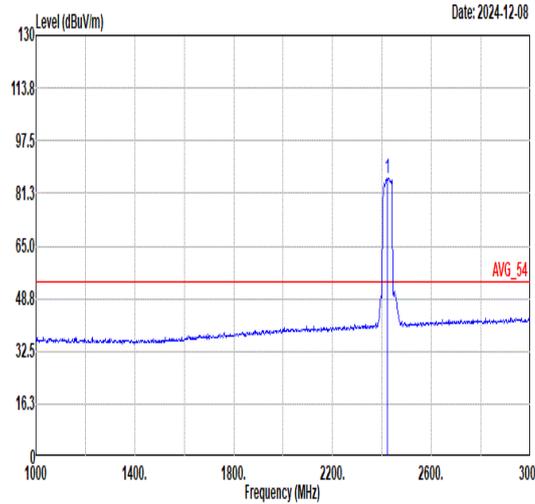

		25																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.74</td> <td>52.93</td> <td>74.00</td> <td>-21.07</td> <td>51.39</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>120</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.74	52.93	74.00	-21.07	51.39	30.44	4.80	33.70	120	130	PEAK	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>93.83</td> <td>-----</td> <td>-----</td> <td>92.16</td> <td>30.46</td> <td>4.84</td> <td>33.63</td> <td>120</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	93.83	-----	-----	92.16	30.46	4.84	33.63	120	130	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.74	52.93	74.00	-21.07	51.39	30.44	4.80	33.70	120	130	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2422.00	93.83	-----	-----	92.16	30.46	4.84	33.63	120	130	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>45.03</td> <td>54.00</td> <td>-8.97</td> <td>43.49</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>120</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.97	45.03	54.00	-8.97	43.49	30.44	4.80	33.70	120	130	AVERAGE	 <p style="text-align: right;">Date: 2024-12-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>86.04</td> <td>-----</td> <td>-----</td> <td>84.37</td> <td>30.46</td> <td>4.84</td> <td>33.63</td> <td>120</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	86.04	-----	-----	84.37	30.46	4.84	33.63	120	130	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.97	45.03	54.00	-8.97	43.49	30.44	4.80	33.70	120	130	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2422.00	86.04	-----	-----	84.37	30.46	4.84	33.63	120	130	AVERAGE																																																															

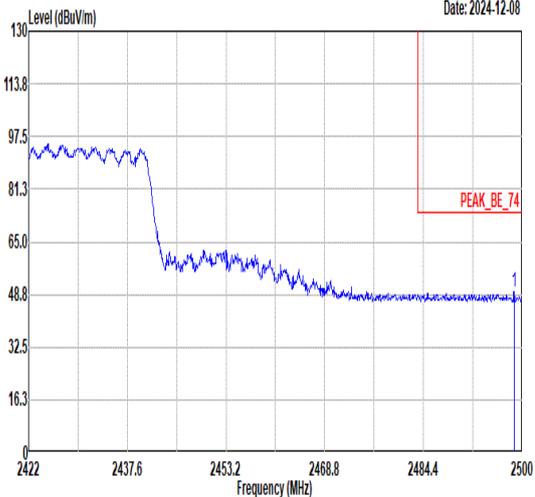
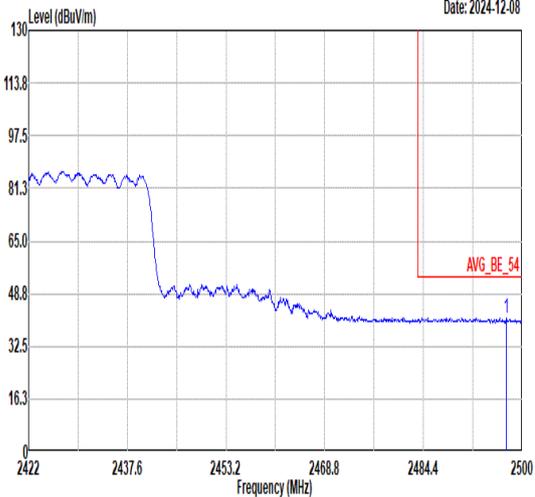


<b>Mode</b>	<b>25</b>																																									
	<b>Band Edge - R</b>																																									
	<b>2400-2483.5_802.11ax HE40_CH03_Full RU_2422MHz</b>																																									
<b>ANT</b>	<b>STBC 0+1</b>																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																								
<b>Peak</b>	 <table border="1" data-bbox="263 1176 734 1294"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.75</td> <td>49.69</td> <td>74.00</td> <td>-24.31</td> <td>47.76</td> <td>30.50</td> <td>4.94</td> <td>33.51</td> <td>120</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2498.75	49.69	74.00	-24.31	47.76	30.50	4.94	33.51	120	130	PEAK	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	2498.75	49.69	74.00	-24.31	47.76	30.50	4.94	33.51	120	130	PEAK																															
<b>Avg</b>	 <table border="1" data-bbox="263 1856 734 1975"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2497.50</td> <td>41.28</td> <td>54.00</td> <td>-12.72</td> <td>39.35</td> <td>30.50</td> <td>4.94</td> <td>33.51</td> <td>120</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2497.50	41.28	54.00	-12.72	39.35	30.50	4.94	33.51	120	130	AVERAGE	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	2497.50	41.28	54.00	-12.72	39.35	30.50	4.94	33.51	120	130	AVERAGE																															





		<b>26</b>																																																																										
<b>Mode</b>	<b>Band Edge - L</b>																																																																											
	<b>2400-2483.5_802.11ax HE40_CH6_Full RU_2437MHz</b>																																																																											
<b>ANT</b>	<b>STBC 0+1</b>																																																																											
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																										
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>59.22</td> <td>74.00</td> <td>-14.78</td> <td>57.68</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>223</td> <td>203</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.76	59.22	74.00	-14.78	57.68	30.44	4.80	33.70	223	203	PEAK	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>100.97</td> <td>-----</td> <td>-----</td> <td>99.25</td> <td>30.47</td> <td>4.86</td> <td>33.61</td> <td>223</td> <td>203</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	100.97	-----	-----	99.25	30.47	4.86	33.61	223	203	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2389.76	59.22	74.00	-14.78	57.68	30.44	4.80	33.70	223	203	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2437.00	100.97	-----	-----	99.25	30.47	4.86	33.61	223	203	PEAK																																																																	
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>50.04</td> <td>54.00</td> <td>-3.96</td> <td>48.50</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>223</td> <td>203</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.76	50.04	54.00	-3.96	48.50	30.44	4.80	33.70	223	203	AVERAGE	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>93.69</td> <td>-----</td> <td>-----</td> <td>91.94</td> <td>30.47</td> <td>4.87</td> <td>33.59</td> <td>223</td> <td>203</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	93.69	-----	-----	91.94	30.47	4.87	33.59	223	203	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2389.76	50.04	54.00	-3.96	48.50	30.44	4.80	33.70	223	203	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2437.00	93.69	-----	-----	91.94	30.47	4.87	33.59	223	203	AVERAGE																																																																	

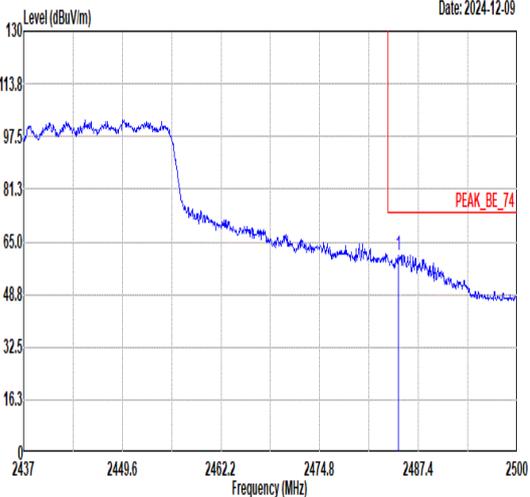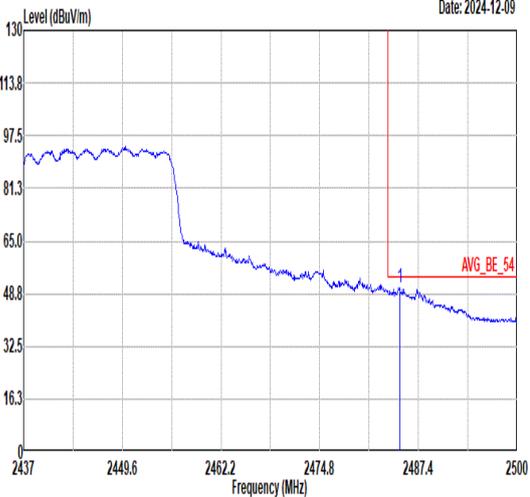

<b>Mode</b>	<b>26</b>																																		
	<b>Band Edge - R</b>																																		
	<b>2400-2483.5_802.11ax HE40_CH6_Full RU_2437MHz</b>																																		
<b>ANT</b>	<b>STBC 0+1</b>																																		
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																	
<b>Peak</b>	 <table border="1" data-bbox="268 1176 734 1294"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.82</td> <td>61.06</td> <td>74.00</td> <td>-12.94</td> <td>59.18</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>223 203 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2484.82	61.06	74.00	-12.94	59.18	30.49	4.92	33.53	223 203 PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2484.82	61.06	74.00	-12.94	59.18	30.49	4.92	33.53	223 203 PEAK																											
<b>Avg</b>	 <table border="1" data-bbox="268 1856 734 1975"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.01</td> <td>50.72</td> <td>54.00</td> <td>-3.28</td> <td>48.84</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>223 203 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2485.01	50.72	54.00	-3.28	48.84	30.49	4.92	33.53	223 203 AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2485.01	50.72	54.00	-3.28	48.84	30.49	4.92	33.53	223 203 AVERAGE																											



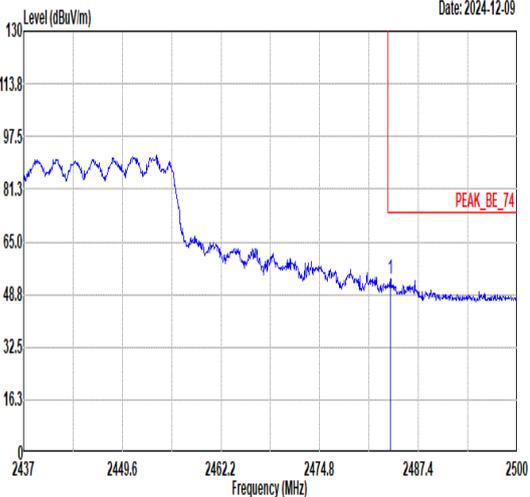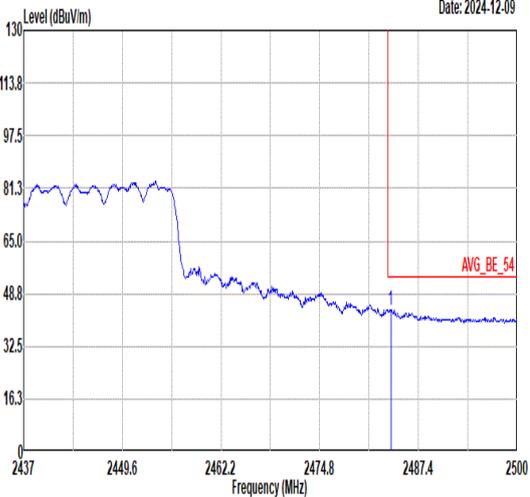

Mode	26																																		
	Band Edge - R																																		
	2400-2483.5_802.11ax HE40_CH6_Full RU_2437MHz																																		
ANT	STBC 0+1																																		
Pol.	Vertical	Fundamental																																	
Peak	 <table border="1" data-bbox="268 1176 734 1294"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.81</td> <td>53.32</td> <td>74.00</td> <td>-20.68</td> <td>51.44</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>284 167 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2483.81	53.32	74.00	-20.68	51.44	30.49	4.92	33.53	284 167 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2483.81	53.32	74.00	-20.68	51.44	30.49	4.92	33.53	284 167 PEAK																											
Avg	 <table border="1" data-bbox="268 1856 734 1975"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.87</td> <td>43.83</td> <td>54.00</td> <td>-10.17</td> <td>41.95</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>284 167 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2483.87	43.83	54.00	-10.17	41.95	30.49	4.92	33.53	284 167 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2483.87	43.83	54.00	-10.17	41.95	30.49	4.92	33.53	284 167 AVERAGE																											



		27																																																																										
Mode	Band Edge																																																																											
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																											
ANT	STBC 0+1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.53</td> <td>62.17</td> <td>74.00</td> <td>-11.83</td> <td>60.29</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>196</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.53	62.17	74.00	-11.83	60.29	30.49	4.92	33.53	200	196	PEAK	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>100.36</td> <td>-----</td> <td>-----</td> <td>98.58</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>200</td> <td>196</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	100.36	-----	-----	98.58	30.48	4.88	33.58	200	196	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.53	62.17	74.00	-11.83	60.29	30.49	4.92	33.53	200	196	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2457.00	100.36	-----	-----	98.58	30.48	4.88	33.58	200	196	PEAK																																																																	
Avg	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.61</td> <td>49.13</td> <td>54.00</td> <td>-4.87</td> <td>47.25</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>196</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.61	49.13	54.00	-4.87	47.25	30.49	4.92	33.53	200	196	AVERAGE	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>93.05</td> <td>-----</td> <td>-----</td> <td>91.27</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>200</td> <td>196</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	93.05	-----	-----	91.27	30.48	4.88	33.58	200	196	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2484.61	49.13	54.00	-4.87	47.25	30.49	4.92	33.53	200	196	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2457.00	93.05	-----	-----	91.27	30.48	4.88	33.58	200	196	AVERAGE																																																																	







		27																																																																								
Mode		Band Edge																																																																								
		2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																								
ANT		STBC 0+1																																																																								
Pol.		Vertical	Fundamental																																																																							
<b>Peak</b>	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.05</td> <td>50.70</td> <td>74.00</td> <td>-23.30</td> <td>48.82</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>108</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.05	50.70	74.00	-23.30	48.82	30.49	4.92	33.53	108	0	PEAK	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>91.46</td> <td>-----</td> <td>-----</td> <td>89.68</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>108</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2457.00	91.46	-----	-----	89.68	30.48	4.88	33.58	108	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.05	50.70	74.00	-23.30	48.82	30.49	4.92	33.53	108	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2457.00	91.46	-----	-----	89.68	30.48	4.88	33.58	108	0	PEAK																																																															
<b>Avg</b>	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.66</td> <td>41.85</td> <td>54.00</td> <td>-12.15</td> <td>39.97</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>108</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.66	41.85	54.00	-12.15	39.97	30.49	4.92	33.53	108	0	AVERAGE	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>84.97</td> <td>-----</td> <td>-----</td> <td>83.19</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>108</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2457.00	84.97	-----	-----	83.19	30.48	4.88	33.58	108	0	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2483.66	41.85	54.00	-12.15	39.97	30.49	4.92	33.53	108	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2457.00	84.97	-----	-----	83.19	30.48	4.88	33.58	108	0	AVERAGE																																																															



		28																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11ax HE20_CH9_Full RU_2452MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.02</td> <td>61.81</td> <td>74.00</td> <td>-12.19</td> <td>59.93</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.02	61.81	74.00	-12.19	59.93	30.49	4.92	33.53	100	145	PEAK	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>101.06</td> <td>-----</td> <td>-----</td> <td>99.32</td> <td>30.47</td> <td>4.87</td> <td>33.60</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	101.06	-----	-----	99.32	30.47	4.87	33.60	100	145	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.02	61.81	74.00	-12.19	59.93	30.49	4.92	33.53	100	145	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2452.00	101.06	-----	-----	99.32	30.47	4.87	33.60	100	145	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>49.89</td> <td>54.00</td> <td>-4.11</td> <td>48.01</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.06	49.89	54.00	-4.11	48.01	30.49	4.92	33.53	100	145	AVERAGE	<p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>94.20</td> <td>-----</td> <td>-----</td> <td>92.44</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	94.20	-----	-----	92.44	30.47	4.88	33.59	100	145	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.06	49.89	54.00	-4.11	48.01	30.49	4.92	33.53	100	145	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2452.00	94.20	-----	-----	92.44	30.47	4.88	33.59	100	145	AVERAGE																																																															

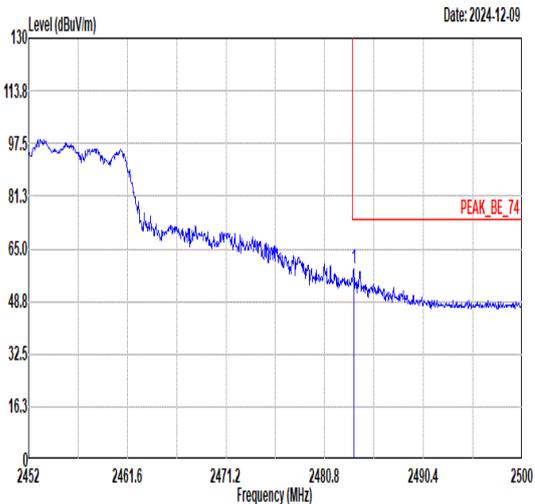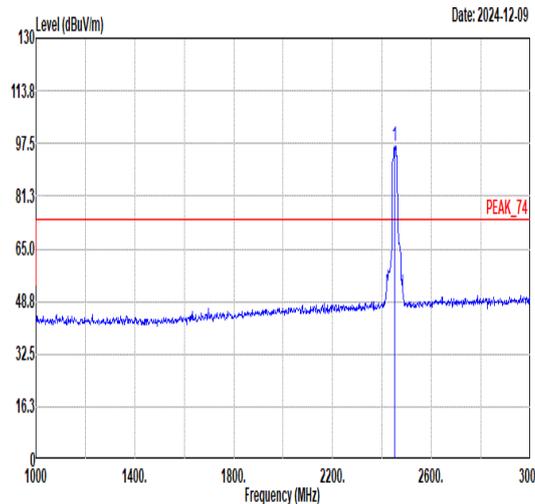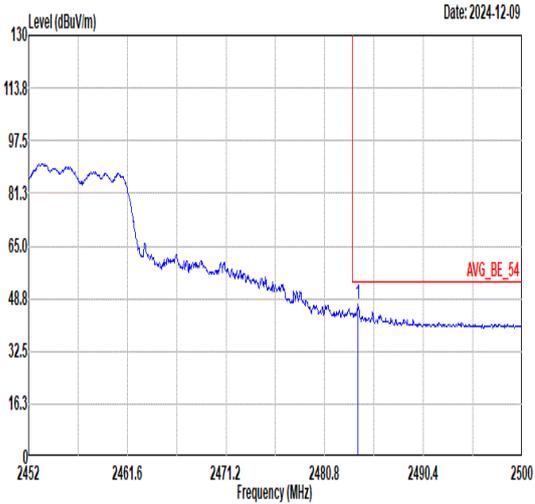
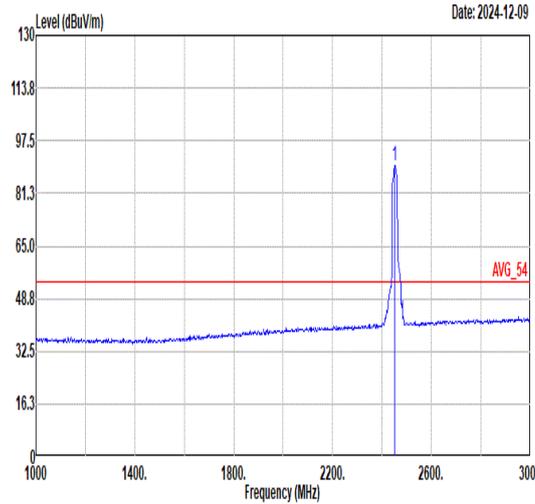


		<b>28</b>																																																																										
<b>Mode</b>	<b>Band Edge</b>																																																																											
	<b>2400-2483.5_802.11ax HE20_CH9_Full RU_2452MHz</b>																																																																											
<b>ANT</b>	<b>STBC 0+1</b>																																																																											
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																										
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.63</td> <td>58.85</td> <td>74.00</td> <td>-15.15</td> <td>56.97</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.63	58.85	74.00	-15.15	56.97	30.49	4.92	33.53	200	134	PEAK	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>96.76</td> <td>-----</td> <td>-----</td> <td>95.00</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>200</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	96.76	-----	-----	95.00	30.47	4.88	33.59	200	134	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.63	58.85	74.00	-15.15	56.97	30.49	4.92	33.53	200	134	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2452.00	96.76	-----	-----	95.00	30.47	4.88	33.59	200	134	PEAK																																																																	
<b>Avg</b>	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>47.07</td> <td>54.00</td> <td>-6.93</td> <td>45.19</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>200</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.06	47.07	54.00	-6.93	45.19	30.49	4.92	33.53	200	134	AVERAGE	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>90.00</td> <td>-----</td> <td>-----</td> <td>88.25</td> <td>30.47</td> <td>4.87</td> <td>33.59</td> <td>200</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	90.00	-----	-----	88.25	30.47	4.87	33.59	200	134	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2484.06	47.07	54.00	-6.93	45.19	30.49	4.92	33.53	200	134	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2452.00	90.00	-----	-----	88.25	30.47	4.87	33.59	200	134	AVERAGE																																																																	





<b>29</b>																																					
<b>Mode</b>	<b>Band Edge - L</b>																																				
	<b>2400-2483.5_802.11ax HE40_CH08_Full RU_2447MHz</b>																																				
<b>ANT</b>	<b>STBC 0+1</b>																																				
<b>Pol.</b>	<b>Horizontal</b>																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2361.40</td> <td>48.52</td> <td>74.00</td> <td>-25.48</td> <td>47.09</td> <td>30.42</td> <td>4.77</td> <td>33.76</td> <td>100</td> <td>139</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2361.40	48.52	74.00	-25.48	47.09	30.42	4.77	33.76	100	139	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2361.40	48.52	74.00	-25.48	47.09	30.42	4.77	33.76	100	139	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2447.00</td> <td>95.10</td> <td>-----</td> <td>-----</td> <td>93.34</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>100</td> <td>139</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2447.00	95.10	-----	-----	93.34	30.47	4.88	33.59	100	139	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2447.00	95.10	-----	-----	93.34	30.47	4.88	33.59	100	139	PEAK																										
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2355.58</td> <td>40.88</td> <td>54.00</td> <td>-13.12</td> <td>39.48</td> <td>30.41</td> <td>4.76</td> <td>33.77</td> <td>100</td> <td>139</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2355.58	40.88	54.00	-13.12	39.48	30.41	4.76	33.77	100	139	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2355.58	40.88	54.00	-13.12	39.48	30.41	4.76	33.77	100	139	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2447.00</td> <td>86.30</td> <td>-----</td> <td>-----</td> <td>84.52</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>100</td> <td>139</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2447.00	86.30	-----	-----	84.52	30.48	4.88	33.58	100	139	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2447.00	86.30	-----	-----	84.52	30.48	4.88	33.58	100	139	AVERAGE																										

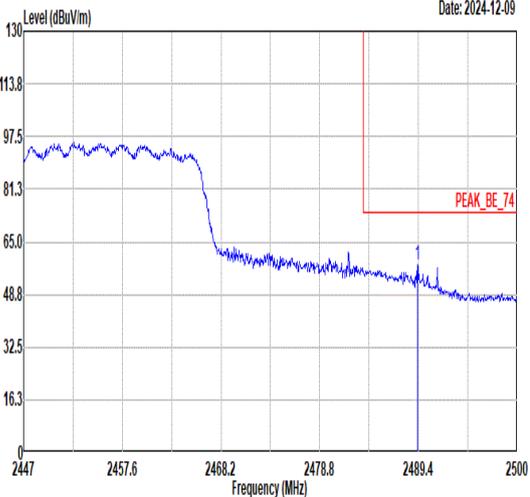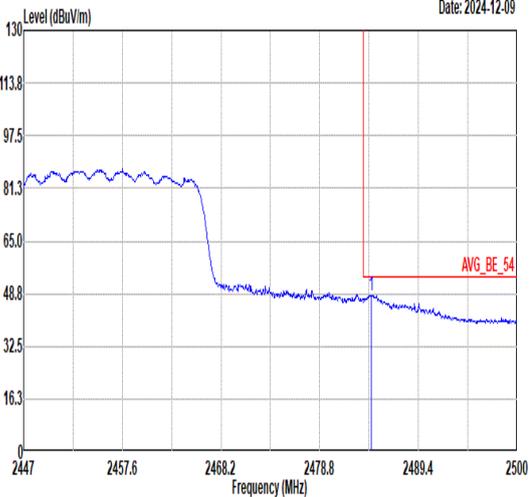

Mode	29																																		
	Band Edge - R																																		
	2400-2483.5_802.11ax HE40_CH08_Full RU_2447MHz																																		
ANT	STBC 0+1																																		
Pol.	Horizontal	Fundamental																																	
Peak	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1" data-bbox="268 1176 734 1294"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2489.29</td> <td>57.98</td> <td>74.00</td> <td>-16.02</td> <td>56.07</td> <td>30.50</td> <td>4.93</td> <td>33.52</td> <td>100 139 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2489.29	57.98	74.00	-16.02	56.07	30.50	4.93	33.52	100 139 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2489.29	57.98	74.00	-16.02	56.07	30.50	4.93	33.52	100 139 PEAK																											
Avg	 <p style="text-align: right;">Date: 2024-12-09</p> <table border="1" data-bbox="268 1856 734 1975"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.37</td> <td>48.26</td> <td>54.00</td> <td>-5.74</td> <td>46.38</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>100 139 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2484.37	48.26	54.00	-5.74	46.38	30.49	4.92	33.53	100 139 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 2484.37	48.26	54.00	-5.74	46.38	30.49	4.92	33.53	100 139 AVERAGE																											



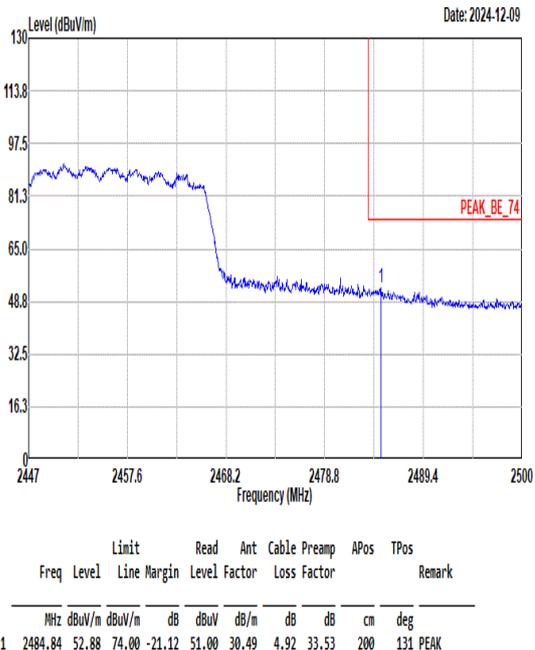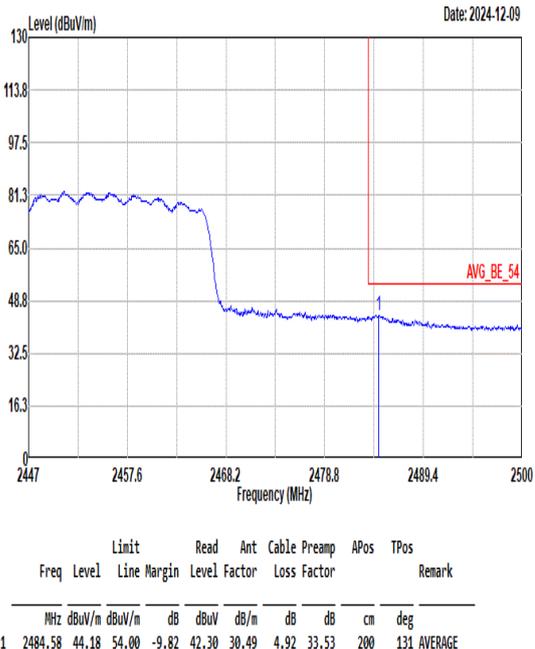

<b>Mode</b>	<b>29</b>																																	
	<b>Band Edge - R</b>																																	
	<b>2400-2483.5_802.11ax HE40_CH08_Full RU_2447MHz</b>																																	
<b>ANT</b>	<b>STBC 0+1</b>																																	
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																
<b>Peak</b>	 <table border="1" data-bbox="263 1176 734 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>1 2484.84 52.88 74.00 -21.12</td> <td>51.00 30.49</td> <td>4.92 33.53</td> <td>200</td> <td>131</td> <td colspan="3">PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor						MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm	deg				1 2484.84 52.88 74.00 -21.12	51.00 30.49	4.92 33.53	200	131	PEAK			<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq Level Line Margin	Level Factor	Loss Factor																																
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm	deg																														
1 2484.84 52.88 74.00 -21.12	51.00 30.49	4.92 33.53	200	131	PEAK																													
<b>Avg</b>	 <table border="1" data-bbox="263 1856 734 1968"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>1 2484.58 44.18 54.00 -9.82</td> <td>42.30 30.49</td> <td>4.92 33.53</td> <td>200</td> <td>131</td> <td colspan="3">AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor						MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm	deg				1 2484.58 44.18 54.00 -9.82	42.30 30.49	4.92 33.53	200	131	AVERAGE			<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq Level Line Margin	Level Factor	Loss Factor																																
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm	deg																														
1 2484.58 44.18 54.00 -9.82	42.30 30.49	4.92 33.53	200	131	AVERAGE																													







<b>30</b>																																																																							
<b>Mode</b>																																																																							
<b>Band Edge - L</b>																																																																							
<b>2400-2483.5_802.11ax HE40_CH07_Full RU_2442MHz</b>																																																																							
<b>ANT</b>																																																																							
<b>STBC 0+1</b>																																																																							
<b>Pol.</b>																																																																							
<b>Horizontal</b>	<b>Fundamental</b>																																																																						
<b>Peak</b>	<b>Fundamental</b>																																																																						
<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2367.28</td> <td>48.78</td> <td>74.00</td> <td>-25.22</td> <td>47.34</td> <td>30.42</td> <td>4.77</td> <td>33.75</td> <td>275</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2367.28	48.78	74.00	-25.22	47.34	30.42	4.77	33.75	275	247	PEAK	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2442.00</td> <td>95.53</td> <td>-----</td> <td>-----</td> <td>93.75</td> <td>30.48</td> <td>4.88</td> <td>33.58</td> <td>275</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2442.00	95.53	-----	-----	93.75	30.48	4.88	33.58	275	247	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																
1 2367.28	48.78	74.00	-25.22	47.34	30.42	4.77	33.75	275	247	PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																
1 2442.00	95.53	-----	-----	93.75	30.48	4.88	33.58	275	247	PEAK																																																													
<b>Avg</b>	<b>Fundamental</b>																																																																						
<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2389.50</td> <td>41.54</td> <td>54.00</td> <td>-12.46</td> <td>40.00</td> <td>30.44</td> <td>4.80</td> <td>33.70</td> <td>275</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2389.50	41.54	54.00	-12.46	40.00	30.44	4.80	33.70	275	247	AVERAGE	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2442.00</td> <td>89.47</td> <td>-----</td> <td>-----</td> <td>87.68</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>275</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2442.00	89.47	-----	-----	87.68	30.48	4.89	33.58	275	247	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																
1 2389.50	41.54	54.00	-12.46	40.00	30.44	4.80	33.70	275	247	AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																
1 2442.00	89.47	-----	-----	87.68	30.48	4.89	33.58	275	247	AVERAGE																																																													



Mode	30																																					
	Band Edge - R																																					
	2400-2483.5_802.11ax HE40_CH07_Full RU_2442MHz																																					
ANT	STBC 0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.67</td> <td>59.00</td> <td>74.00</td> <td>-15.00</td> <td>57.12</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>275</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2485.67	59.00	74.00	-15.00	57.12	30.49	4.92	33.53	275	247	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	2485.67	59.00	74.00	-15.00	57.12	30.49	4.92	33.53	275	247	PEAK																											
Avg	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.27</td> <td>47.96</td> <td>54.00</td> <td>-6.04</td> <td>46.08</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>275</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2485.27	47.96	54.00	-6.04	46.08	30.49	4.92	33.53	275	247	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	2485.27	47.96	54.00	-6.04	46.08	30.49	4.92	33.53	275	247	AVERAGE																											

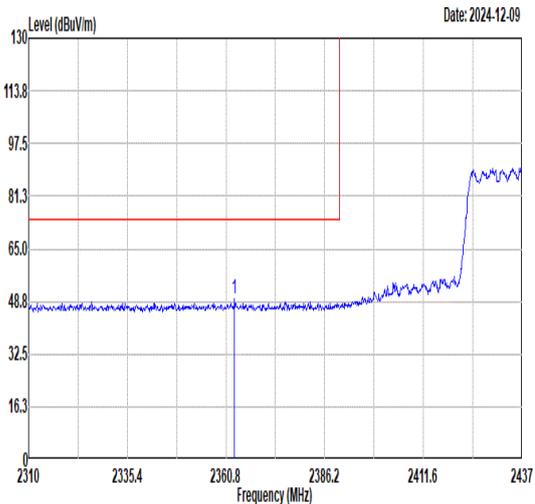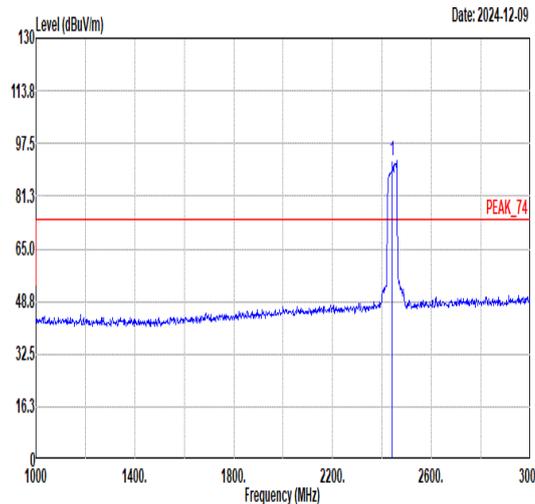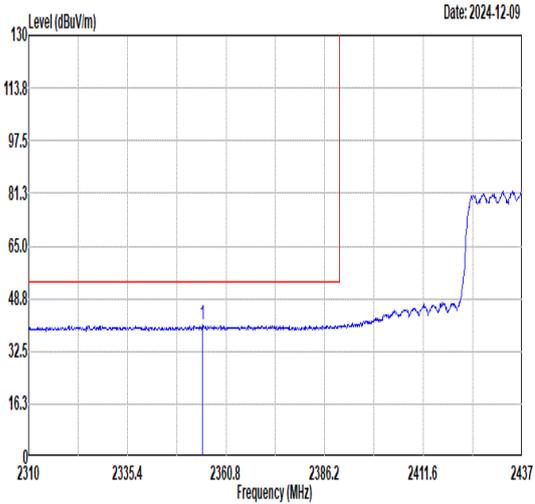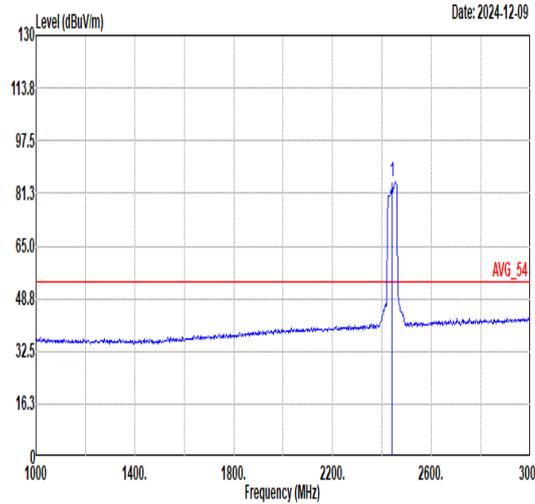

<b>30</b>																																						
<b>Band Edge - L</b>																																						
<b>2400-2483.5_802.11ax HE40_CH07_Full RU_2442MHz</b>																																						
<b>ANT STBC 0+1</b>																																						
<b>Pol.</b>	<b>Vertical</b>																																					
<b>Peak</b>	 <p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2362.96</td> <td>49.48</td> <td>74.00</td> <td>-24.52</td> <td>48.04</td> <td>30.42</td> <td>4.77</td> <td>33.75</td> <td>133</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2362.96	49.48	74.00	-24.52	48.04	30.42	4.77	33.75	133	159	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2362.96	49.48	74.00	-24.52	48.04	30.42	4.77	33.75	133	159	PEAK																											
 <p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2442.00</td> <td>92.04</td> <td>-----</td> <td>-----</td> <td>90.25</td> <td>30.48</td> <td>4.89</td> <td>33.58</td> <td>133</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2442.00	92.04	-----	-----	90.25	30.48	4.89	33.58	133	159	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2442.00	92.04	-----	-----	90.25	30.48	4.89	33.58	133	159	PEAK																											
<b>Avg</b>	 <p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2354.70</td> <td>40.91</td> <td>54.00</td> <td>-13.09</td> <td>39.51</td> <td>30.41</td> <td>4.76</td> <td>33.77</td> <td>133</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2354.70	40.91	54.00	-13.09	39.51	30.41	4.76	33.77	133	159	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2354.70	40.91	54.00	-13.09	39.51	30.41	4.76	33.77	133	159	AVERAGE																											
 <p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2442.00</td> <td>84.64</td> <td>-----</td> <td>-----</td> <td>82.88</td> <td>30.47</td> <td>4.88</td> <td>33.59</td> <td>133</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2442.00	84.64	-----	-----	82.88	30.47	4.88	33.59	133	159	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2442.00	84.64	-----	-----	82.88	30.47	4.88	33.59	133	159	AVERAGE																											




Mode	30																														
	Band Edge - R																														
	2400-2483.5_802.11ax HE40_CH07_Full RU_2442MHz																														
ANT	STBC 0+1																														
Pol.	Vertical	Fundamental																													
Peak	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.15</td> <td>55.20</td> <td>74.00</td> <td>-18.80</td> <td>53.32</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>133</td> <td>159 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2485.15	55.20	74.00	-18.80	53.32	30.49	4.92	33.53	133	159 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	2485.15	55.20	74.00	-18.80	53.32	30.49	4.92	33.53	133	159 PEAK																					
Avg	<p>Date: 2024-12-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.46</td> <td>45.60</td> <td>54.00</td> <td>-8.40</td> <td>43.72</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>133</td> <td>159 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2484.46	45.60	54.00	-8.40	43.72	30.49	4.92	33.53	133	159 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	2484.46	45.60	54.00	-8.40	43.72	30.49	4.92	33.53	133	159 AVERAGE																					

## Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11b	98.35	-	-	10Hz
0+1	802.11g	90.51	1.430	0.699	1kHz
0+1	802.11ax HE20	87.95	0.146	6.849	10kHz
0+1	802.11ax HE40	82.54	0.104	9.615	10kHz

### 802.11b

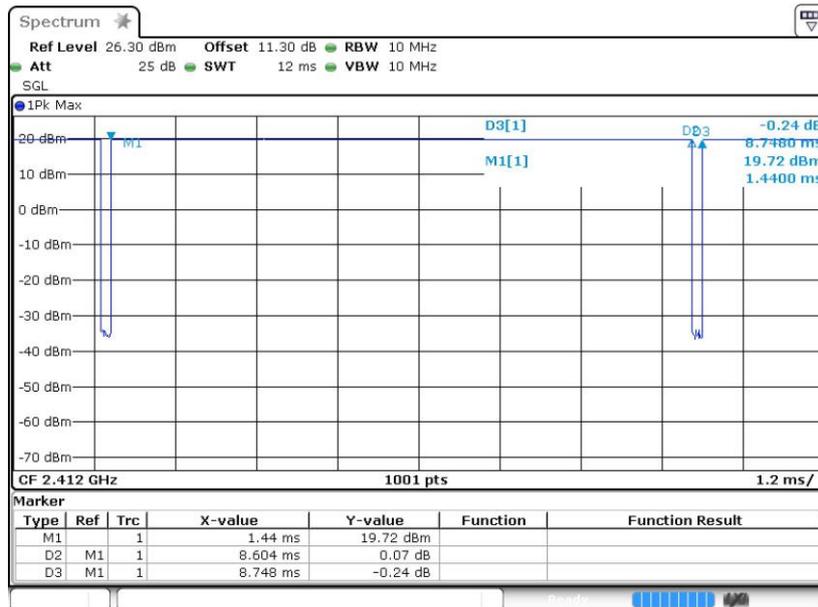




802.11g

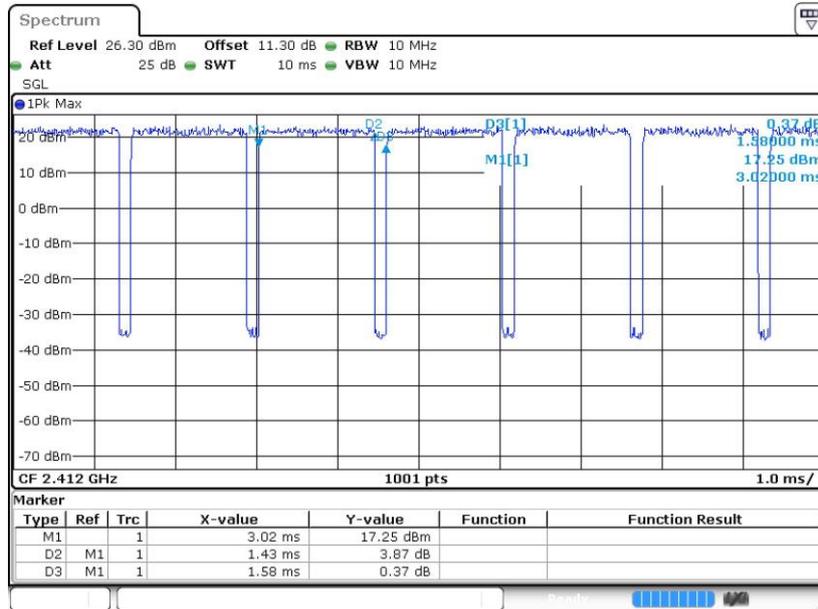

802.11ax HE20

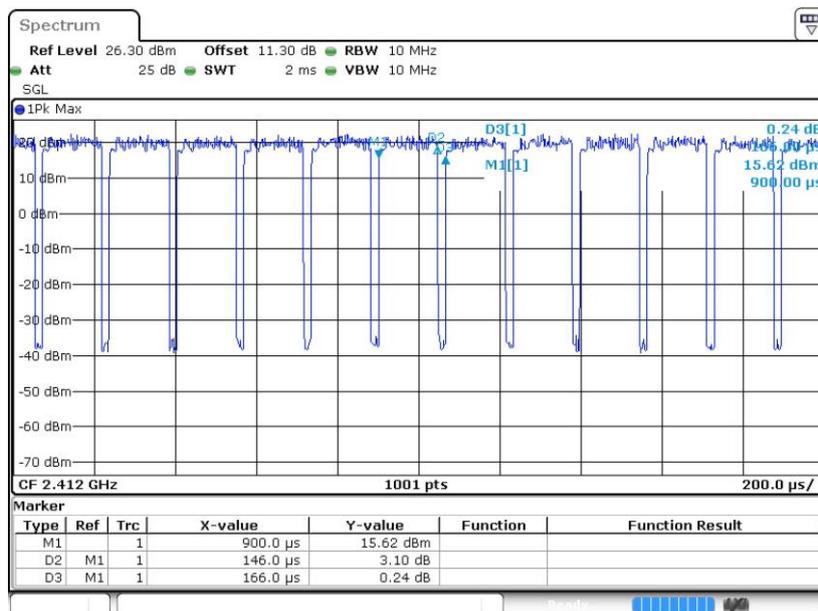



802.11ax HE40

