



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB352FU
FCC ID : O57TB352FU
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Dec. 06, 2024 ~ Dec. 11, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 8

 1.6 Testing Location 8

 1.7 Test Software..... 9

 1.8 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode..... 11

 2.3 Connection Diagram of Test System..... 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example..... 13

3 TEST RESULT..... 14

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 19

 3.3 Power Spectral Density Measurement 21

 3.4 Unwanted Emissions Measurement 26

 3.5 AC Conducted Emission Measurement..... 31

 3.6 Antenna Requirements 33

4 LIST OF MEASURING EQUIPMENT 35

5 MEASUREMENT UNCERTAINTY 36

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
0	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.06 dB at 5149.73 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 10.17 dB at 14.91 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB352FU
FCC ID	O57TB352FU
SN Code	Conducted: HA234E3D for sample 1 HA233PMY for sample 2 Conduction/ Radiation: HA2343EV for sample 1 HA233PMY for sample 2
HW Version	TB352FU
SW Version	TB352FU_RF01_241110
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT, the differences could be referred to the TB352FU_Operational Description of Product Equality Declaration which is exhibit separately. After evaluation, we chose sample 1 to full test, sample 2 is verified the worst case of sample 1 for CE/RSE.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p>MIMO <Ant. 0 + 1></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 18.88 dBm / 0.0773 W 802.11n HT20 : 19.41 dBm / 0.0873 W 802.11n HT40 : 19.94 dBm / 0.0986 W 802.11ac VHT20: 19.38 dBm / 0.0867 W 802.11ac VHT40: 19.92 dBm / 0.0982 W 802.11ac VHT80: 17.79 dBm / 0.0601 W 802.11ax HE20: 19.49 dBm / 0.0889 W 802.11ax HE40: 20.18 dBm / 0.1042 W 802.11ax HE80: 17.86 dBm / 0.0611 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 19.88 dBm / 0.0973 W 802.11n HT20 : 20.01 dBm / 0.1002 W 802.11n HT40 : 20.39 dBm / 0.1094 W 802.11ac VHT20: 19.98 dBm / 0.0995 W 802.11ac VHT40: 20.38 dBm / 0.1091 W 802.11ac VHT80: 18.28 dBm / 0.0673 W 802.11ax HE20: 20.17 dBm / 0.1040 W 802.11ax HE40: 20.42 dBm / 0.1102 W 802.11ax HE80: 18.36 dBm / 0.0685 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 20.20 dBm / 0.1047 W 802.11n HT20 : 20.30 dBm / 0.1072 W 802.11n HT40 : 20.46 dBm / 0.1112 W 802.11ac VHT20: 20.29 dBm / 0.1069 W 802.11ac VHT40: 20.37 dBm / 0.1089 W 802.11ac VHT80: 18.54 dBm / 0.0714 W 802.11ax HE20: 20.48 dBm / 0.1117 W 802.11ax HE40: 20.57 dBm / 0.1140 W 802.11ax HE80: 18.59 dBm / 0.0723 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 19.83 dBm / 0.0962 W 802.11n HT20 : 19.82 dBm / 0.0959 W 802.11n HT40 : 20.22 dBm / 0.1052 W 802.11ac VHT20: 19.80 dBm / 0.0955 W 802.11ac VHT40: 20.20 dBm / 0.1047 W 802.11ac VHT80: 19.74 dBm / 0.0942 W 802.11ax HE20: 20.03 dBm / 0.1007 W 802.11ax HE40: 20.46 dBm / 0.1112 W 802.11ax HE80: 19.94 dBm / 0.0986 W</p>



<p>99% Occupied Bandwidth</p>	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.20 MHz 802.11n HT20 : 18.24 MHz 802.11n HT40 : 36.60 MHz 802.11ac VHT80 : 76.29 MHz 802.11ax HE20: 19.11 MHz 802.11ax HE40: 37.67 MHz 802.11ax HE80: 77.20 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 17.23 MHz 802.11n HT20 : 18.25 MHz 802.11n HT40 : 36.61 MHz 802.11ac VHT80 : 76.22 MHz 802.11ax HE20: 19.10 MHz 802.11ax HE40: 37.67 MHz 802.11ax HE80: 77.16 MHz</p> <p><5500 MHz ~ 5700 MHz> 802.11a : 17.33 MHz 802.11n HT20 : 18.28 MHz 802.11n HT40 : 36.78 MHz 802.11ac VHT80 : 76.23 MHz 802.11ax HE20: 19.23 MHz 802.11ax HE40: 37.79 MHz 802.11ax HE80: 77.15 MHz</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 17.42 MHz 802.11n HT20 : 18.49 MHz 802.11n HT40 : 36.90 MHz 802.11ac VHT80 : 76.31 MHz 802.11ax HE20: 19.17 MHz 802.11ax HE40: 37.78 MHz 802.11ax HE80: 77.30 MHz</p>
<p>Antenna Type / Gain</p>	<p><5180 MHz ~ 5240 MHz> <Ant. 0> : FPC Antenna with gain -2.00 dBi <Ant. 1> : FPC Antenna with gain -1.50 dBi</p> <p><5260 MHz ~ 5320 MHz> <Ant. 0> : FPC Antenna with gain -2.00 dBi <Ant. 1> : FPC Antenna with gain -1.50 dBi</p> <p><5500 MHz ~ 5700 MHz> <Ant. 0> : FPC Antenna with gain -2.00 dBi <Ant. 1> : FPC Antenna with gain -1.50 dBi</p> <p><5745 MHz ~ 5825 MHz> <Ant. 0> : FPC Antenna with gain -2.00 dBi <Ant. 1> : FPC Antenna with gain -1.50 dBi</p>
<p>Type of Modulation</p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>

Note:

1. The device supports WLAN CDD mode for 11a and STBC mode for 11n/ac/ax.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to



- the higher normal output power.
- 3. For 802.11n/11ac mode, the whole testing have assessed only 802.11n HT20/40 by referring to the higher output power for conducted test items.
- 4. WLAN operation in 5600 MHz ~ 5650 MHz is notched.
- 5. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/RSE, the full RU power > partial RU, therefore the full RU perform full test and Partial RU verified power/PSD/RSE.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ; 03CH01-SZ	CN1256	421272



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#" are 80MHz bandwidth.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS8
802.11ax HE40	MCS8
802.11ax HE80	MCS8

AC Conducted Emission	Mode 1 : Bluetooth Link+ WLAN (5G) Link+ USB Cable 1(Charging from Adapter 1)+ Battery1 for Sample 1 Mode 2 : Bluetooth Link+ WLAN (5G) Link+ USB Cable 1(Charging from Adapter 1)+ Battery1 for Sample 2
Remark:	
1. The worst case of conducted emission is mode 1; only the test data of it was reported. 2. For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1.	


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

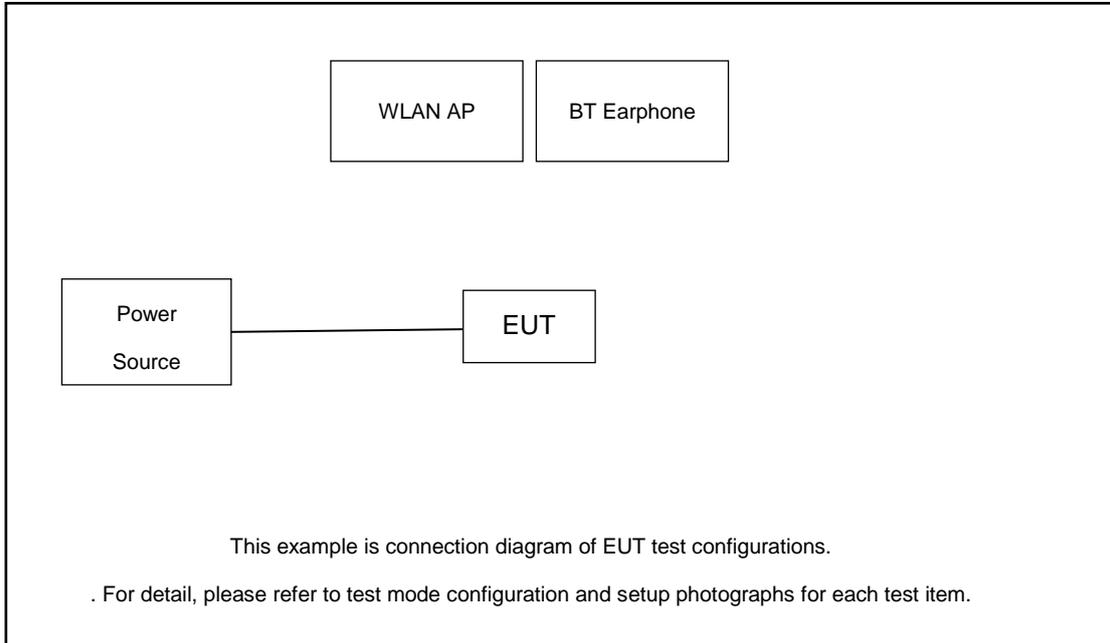

Radiated Emission:

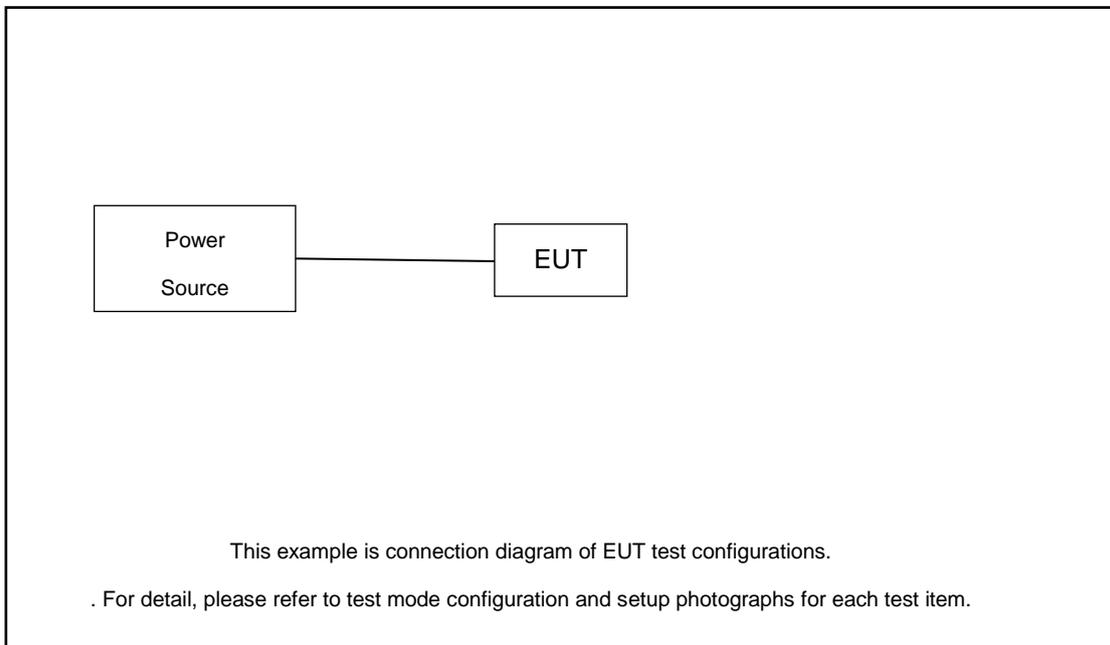



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 2.8 + 10 = 12.8 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.



3.1.4 Test Setup


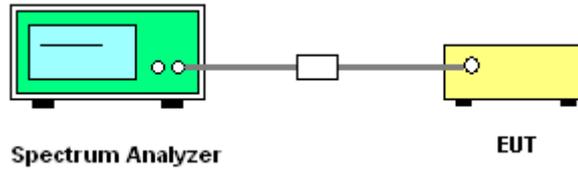




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

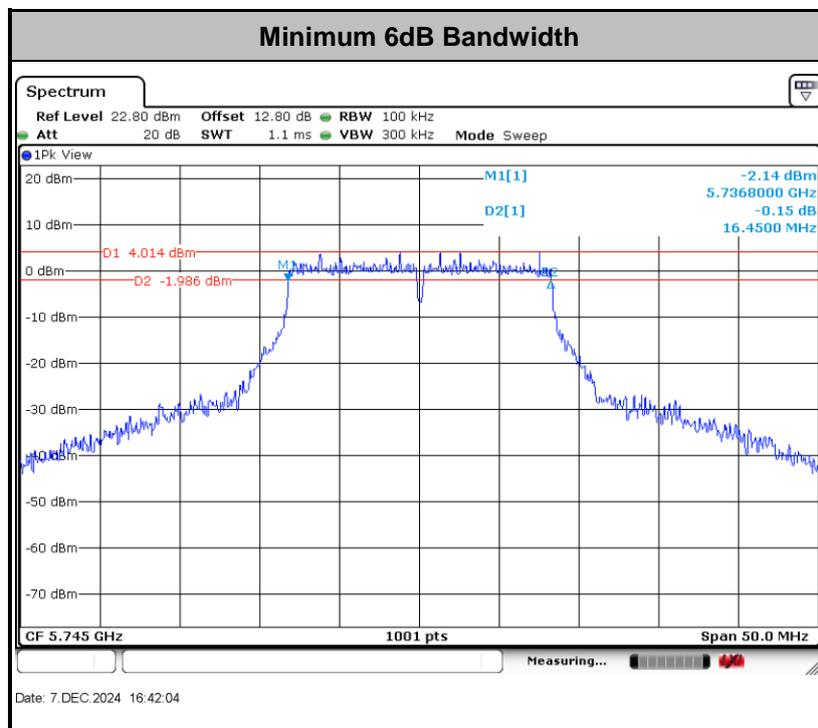

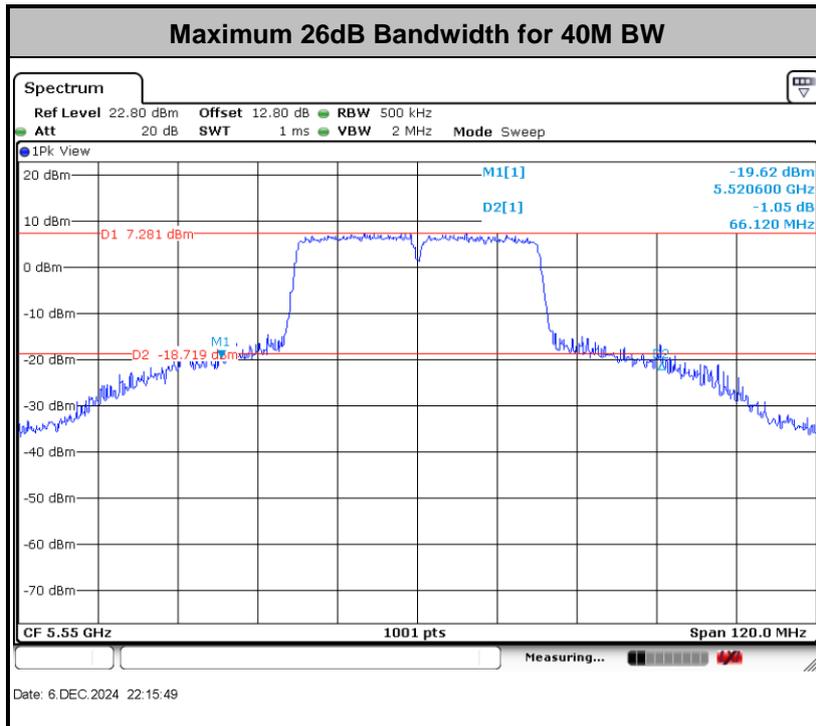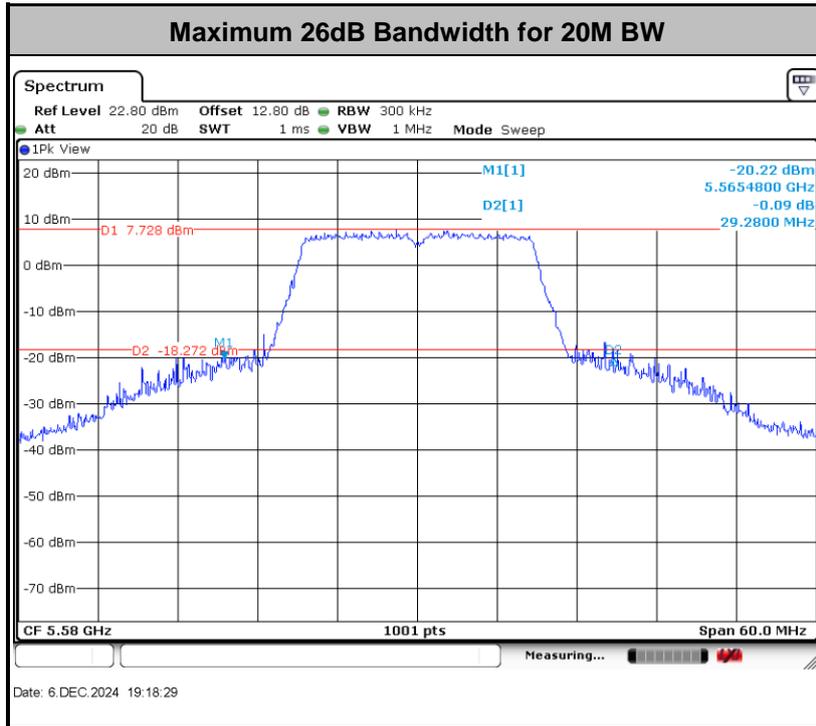

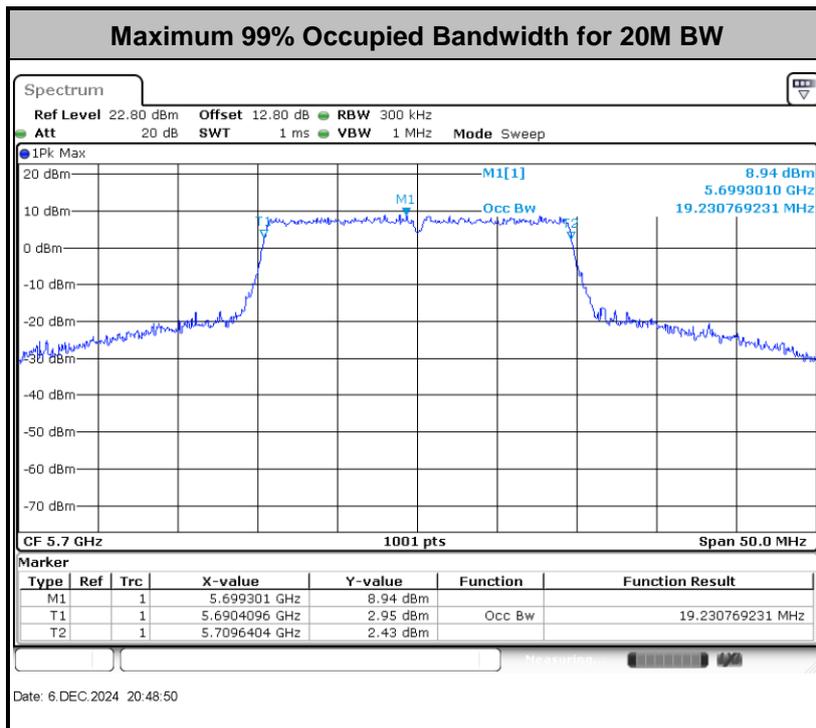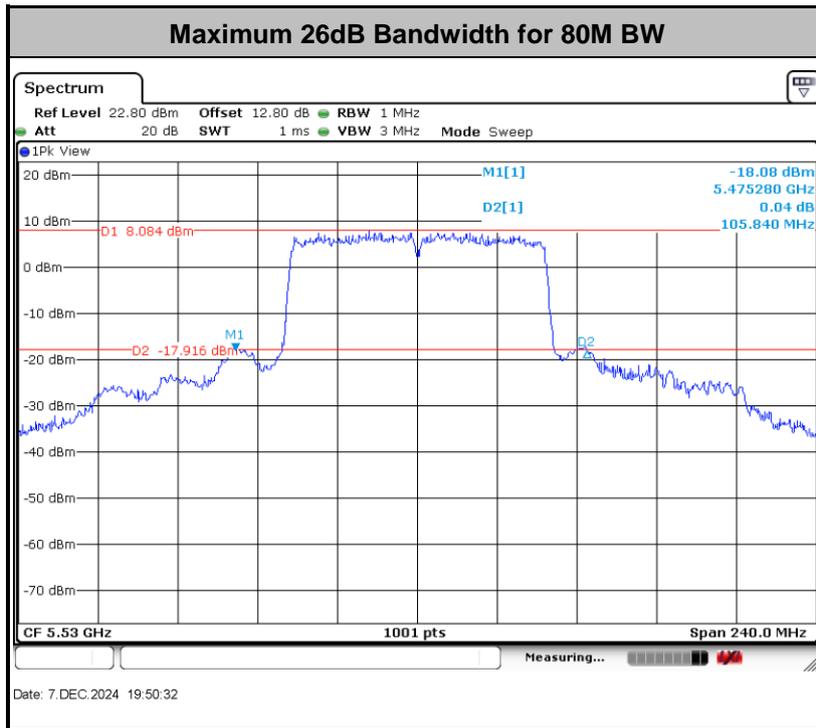

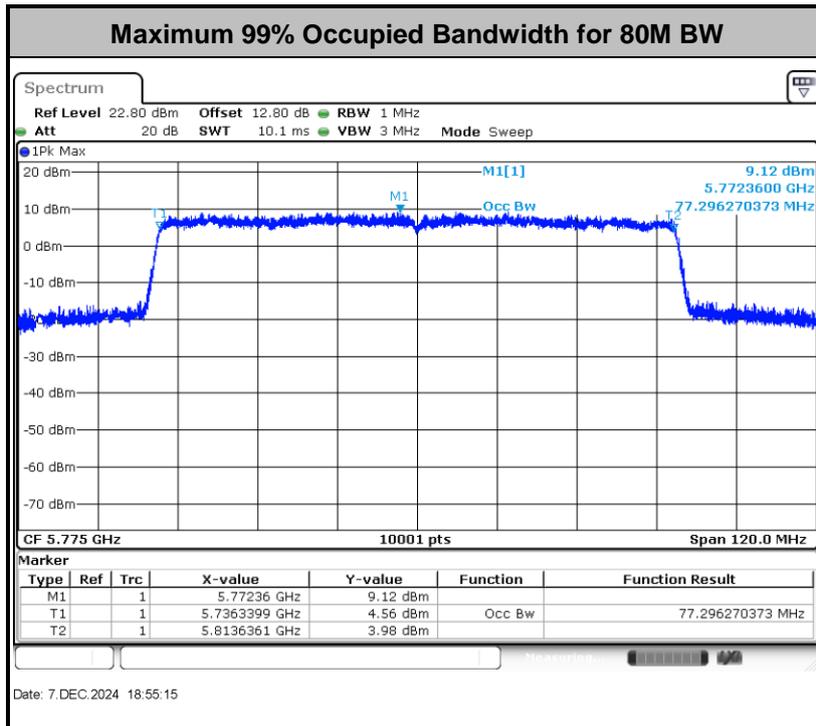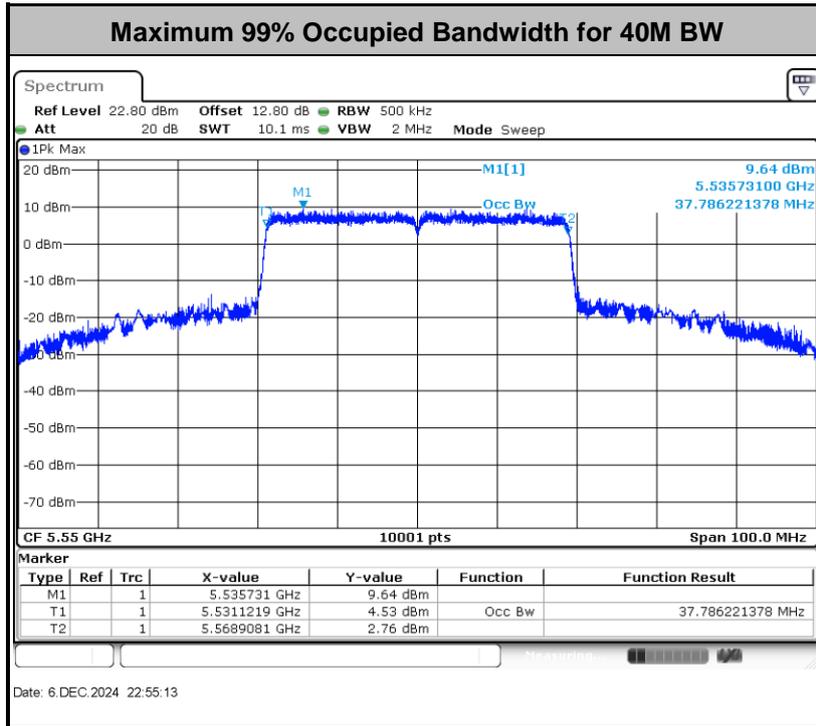

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

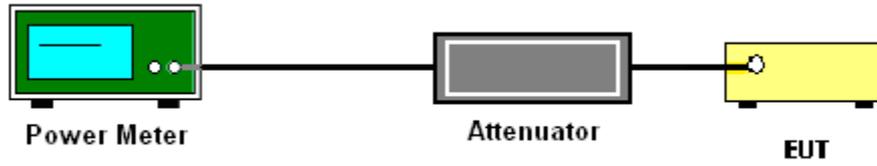

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs for UNII-1/2A/2C.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (c): Measure and add $10 \log(N_{ANT})$ dB, where N_{ANT} is the number of outputs for UNII-3. The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

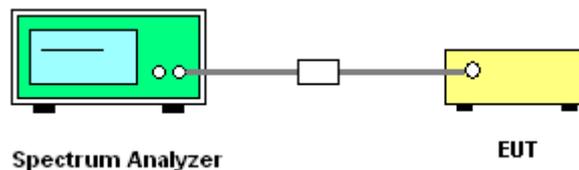




3.3.5 Test Result of Power Spectral Density



Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

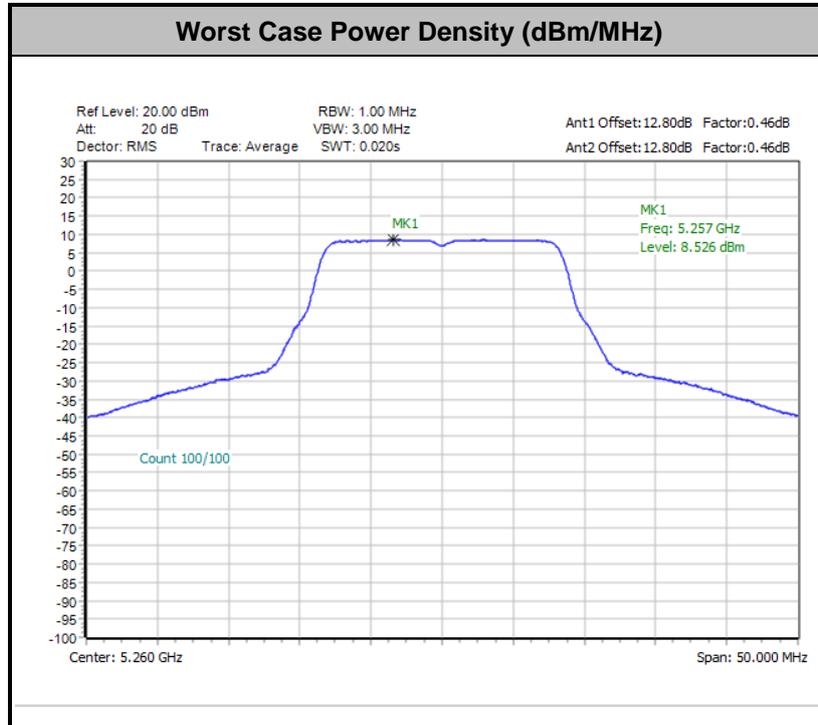



For devices operating in the band UNII-3

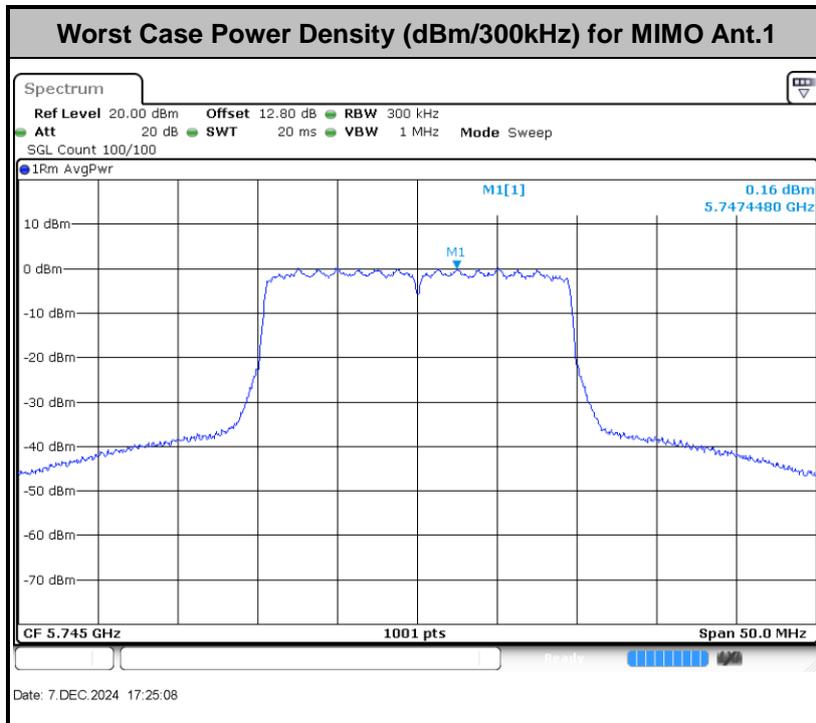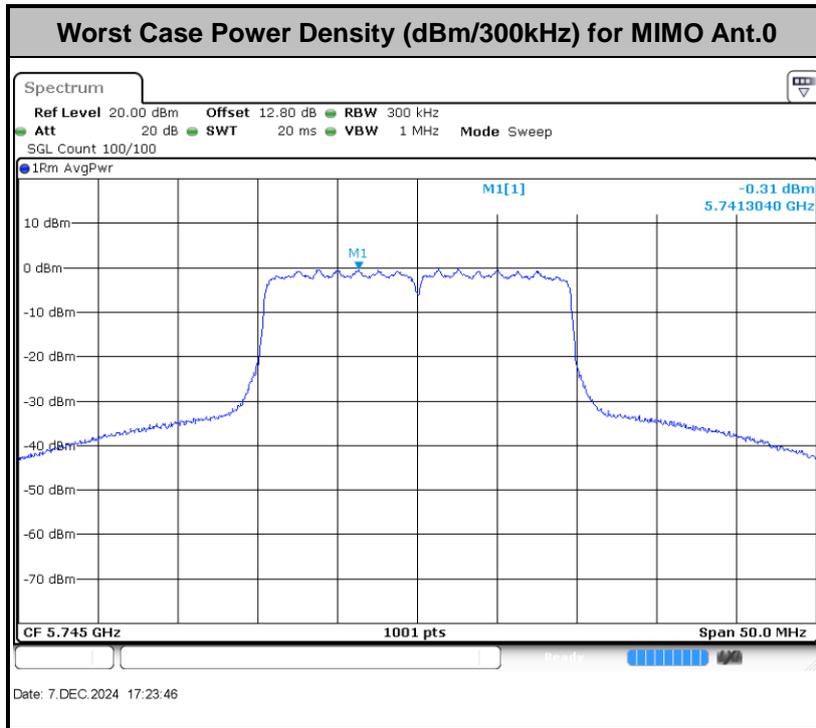

Note: Average Power Density (dB) = Measured value+ Duty Factor+10 log(500kHz/300kHz)



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
 - (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 3 MHz
 - Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging(RMS)
 - The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

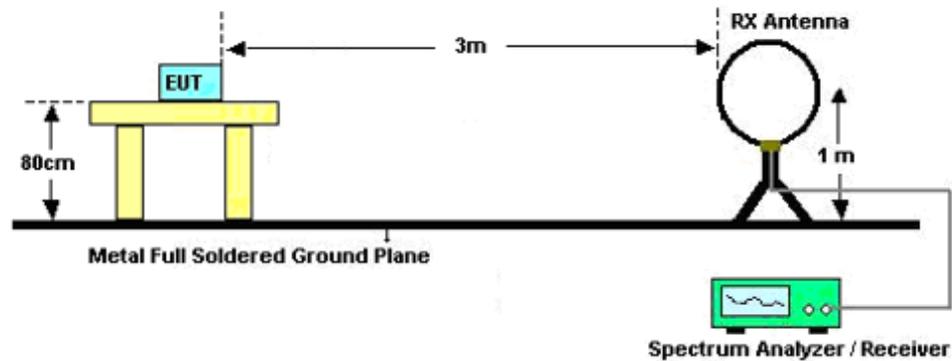

For radiated emissions from 30MHz to 1GHz

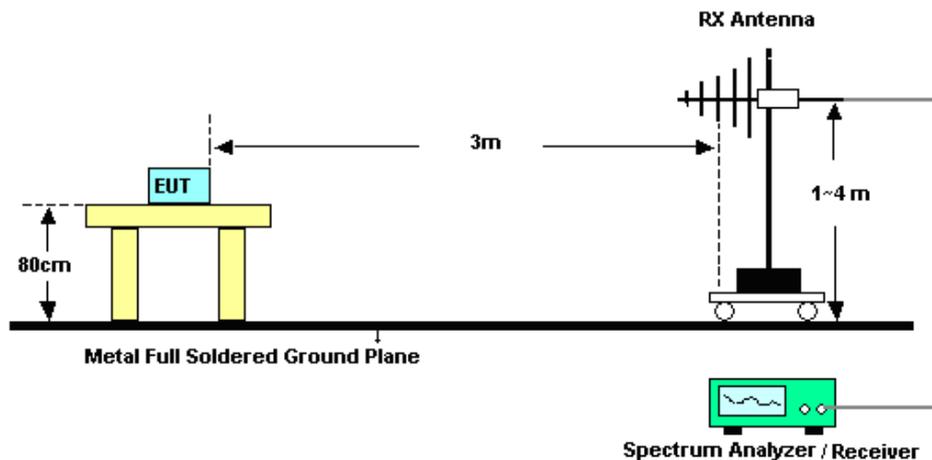

For radiated emissions above 1GHz

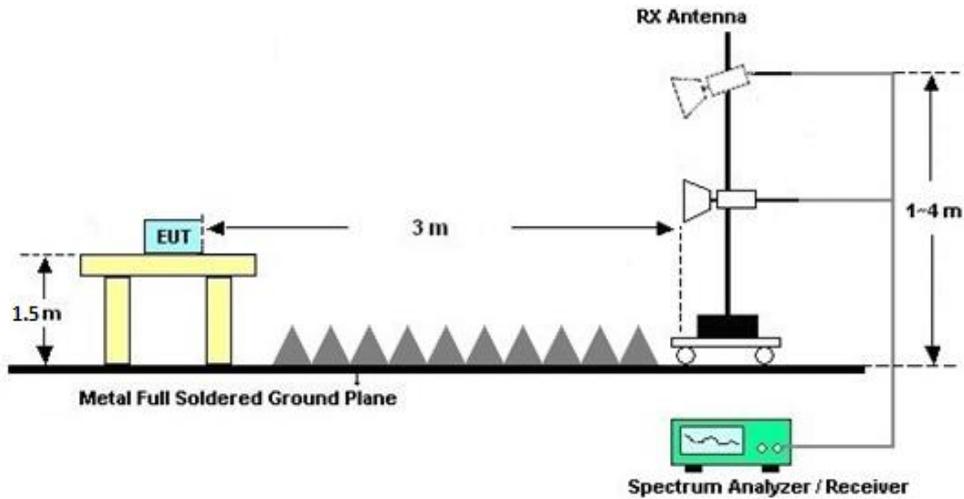

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

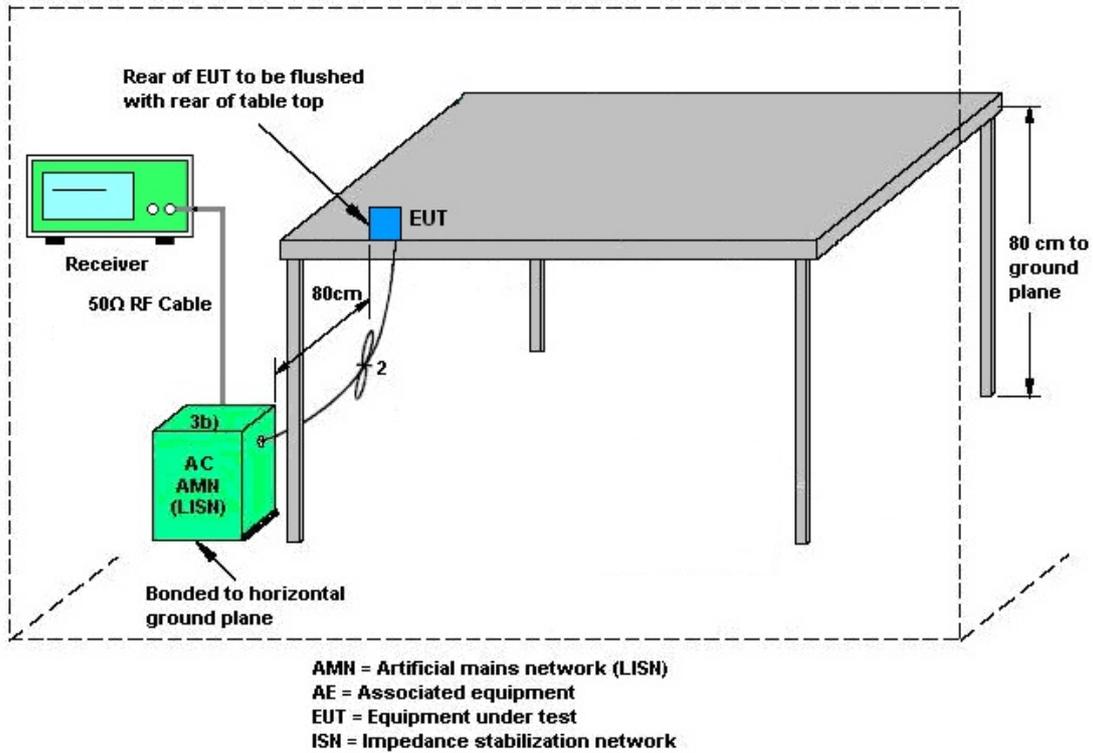

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD/STBC transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 11a.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

	Ant. 0 (dBi)	Ant. 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
UNII-1	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-2A	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-2C	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-3	-2.00	-1.50	-1.50	1.26	0.00	0.00



<STBC Modes>

The EUT supports STBC mode for 11n/ac/ax.

For completely uncorrelated transmissions, directional gain is calculated as,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots)$, as following table

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 0 (dBi)	Ant. 1 (dBi)				
UNII-1	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-2A	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-2C	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-3	-2.00	-1.50	-1.50	-1.50	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Dec. 06, 2024~ Dec. 07, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Dec. 06, 2024~ Dec. 07, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz-40GHz	Dec. 27, 2023	Dec. 06, 2024~ Dec. 07, 2024	Dec. 26, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 27, 2023	Dec. 06, 2024~ Dec. 11, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	Dec. 06, 2024~ Dec. 10, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Dec. 06, 2024~ Dec. 11, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Dec. 06, 2024~ Dec. 11, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Dec. 06, 2024~ Dec. 11, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 09, 2024	Dec. 06, 2024~ Dec. 11, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Dec. 06, 2024~ Dec. 11, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Dec. 06, 2024~ Dec. 11, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 14, 2024	Dec. 06, 2024~ Dec. 11, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Dec. 06, 2024~ Dec. 11, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	Oct. 14, 2024	Dec. 06, 2024~ Dec. 11, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 06, 2024~ Dec. 11, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 06, 2024~ Dec. 11, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Dec. 08, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Dec. 08, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec. 25, 2022	Dec. 08, 2024	Dec. 24, 2024	Conduction (CO02-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2024/12/6~2024/12/7	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	5180	17.18	16.97	21.90	22.08	
11a	6Mbps	2	44	5220	17.18	16.95	21.78	21.96	
11a	6Mbps	2	48	5240	17.20	16.94	21.90	21.84	
HT20	MCS8	2	36	5180	18.24	18.00	22.14	21.90	
HT20	MCS8	2	44	5220	18.19	18.01	23.46	21.78	
HT20	MCS8	2	48	5240	18.22	18.03	21.96	21.78	
HT40	MCS8	2	38	5190	36.60	36.35	46.56	40.20	
HT40	MCS8	2	46	5230	36.57	36.34	40.92	40.08	
VHT80	MCS8	2	42	5210	76.07	76.29	82.32	82.56	
HE20	MCS8	2	36	5180	19.08	19.09	22.02	21.90	
HE20	MCS8	2	44	5220	19.11	19.09	22.20	21.84	
HE20	MCS8	2	48	5240	19.11	19.09	22.26	22.08	
HE40	MCS8	2	38	5190	37.67	37.64	40.44	40.44	
HE40	MCS8	2	46	5230	37.65	37.63	40.56	40.20	
HE80	MCS8	2	42	5210	77.15	77.20	81.84	83.04	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1															
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	Full	5180	0.46	0.46	15.81	15.92	18.88	24.00		-1.50		Pass
11a	6Mbps	2	44	Full	5220	0.46	0.46	15.67	15.79	18.74	24.00		-1.50		Pass
11a	6Mbps	2	48	Full	5240	0.46	0.46	15.61	15.68	18.66	24.00		-1.50		Pass
HT20	MCS8	2	36	Full	5180	0.59	0.59	16.36	16.44	19.41	24.00		-1.50		Pass
HT20	MCS8	2	44	Full	5220	0.59	0.59	16.21	16.38	19.30	24.00		-1.50		Pass
HT20	MCS8	2	48	Full	5240	0.59	0.59	16.18	16.33	19.26	24.00		-1.50		Pass
HT40	MCS8	2	38	Full	5190	0.58	0.58	14.10	13.87	16.99	24.00		-1.50		Pass
HT40	MCS8	2	46	Full	5230	0.58	0.58	17.07	16.78	19.94	24.00		-1.50		Pass
VHT20	MCS8	2	36	Full	5180	0.51	7.93	16.31	16.43	19.38	24.00		-1.50		Pass
VHT20	MCS8	2	44	Full	5220	0.51	7.93	16.17	16.31	19.25	24.00		-1.50		Pass
VHT20	MCS8	2	48	Full	5240	0.51	7.93	16.10	16.26	19.19	24.00		-1.50		Pass
VHT40	MCS8	2	38	Full	5190	0.80	6.35	14.05	13.80	16.94	24.00		-1.50		Pass
VHT40	MCS8	2	46	Full	5230	0.80	6.35	17.05	16.76	19.92	24.00		-1.50		Pass
VHT80	MCS8	2	42	Full	5210	1.13	5.03	14.90	14.65	17.79	24.00		-1.50		Pass
HE20	MCS8	2	36	Full	5180	0.56	0.50	16.42	16.54	19.49	24.00		-1.50		Pass
				26/0		0.56	0.50	6.62	7.49	10.09	24.00		-1.50		Pass
				52/37		0.56	0.50	9.30	10.22	12.79	24.00		-1.50		Pass
				106/53		0.56	0.50	12.59	13.22	15.92	24.00		-1.50		Pass
				44		Full	5220	0.56	0.50	16.31	16.53	19.43	24.00		-1.50
48	Full	5240	0.56	0.50	16.25	16.50	19.39	24.00		-1.50		Pass			
HE40	MCS8	2	38	Full	5190	0.75	0.76	14.28	14.18	17.24	24.00		-1.50		Pass
			46	Full	5230	0.76	0.76	17.25	17.09	20.18	24.00		-1.50		Pass
HE80	MCS8	2	42	Full	5210	0.95	0.95	14.98	14.71	17.86	24.00		-1.50		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1													
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1		SUM	Ant 0	Ant 1	Ant 0	
11a	6Mbps	2	36	Full	5180	0.46	0.46	7.22	11.00		1.26		Pass
11a	6Mbps	2	44	Full	5220	0.46	0.46	7.23	11.00		1.26		Pass
11a	6Mbps	2	48	Full	5240	0.46	0.46	7.16	11.00		1.26		Pass
HT20	MCS8	2	36	Full	5180	0.59	0.59	7.43	11.00		-1.50		Pass
HT20	MCS8	2	44	Full	5220	0.59	0.59	7.65	11.00		-1.50		Pass
HT20	MCS8	2	48	Full	5240	0.59	0.59	7.66	11.00		-1.50		Pass
HT40	MCS8	2	38	Full	5190	0.58	0.58	5.36	11.00		-1.50		Pass
HT40	MCS8	2	46	Full	5230	0.58	0.58	5.21	11.00		-1.50		Pass
VHT80	MCS8	2	42	Full	5210	1.13	5.03	2.83	11.00		-1.50		Pass
HE20	MCS8	2	36	Full	5180	0.56	0.50	7.57	11.00		-1.50		Pass
HE20	MCS8	2	44	Full	5220	0.56	0.50	7.58	11.00		-1.50		Pass
HE20	MCS8	2	48	Full	5240	0.56	0.50	7.62	11.00		-1.50		Pass
HE40	MCS8	2	38	Full	5190	0.75	0.76	5.54	11.00		-1.50		Pass
HE40	MCS8	2	46	Full	5230	0.75	0.76	5.56	11.00		-1.50		Pass
HE80	MCS8	2	42	Full	5210	0.95	0.95	1.50	11.00		-1.50		Pass

TEST RESULTS DATA
26dB and 99% OBW

FCC U-NII-2A											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	52	5260	17.23	16.94	21.78	21.96	23.98		
11a	6Mbps	2	60	5300	17.22	16.93	21.84	21.84	23.98		
11a	6Mbps	2	64	5320	17.20	16.93	21.84	21.78	23.98		
HT20	MCS8	2	52	5260	18.25	18.01	21.90	21.96	23.98		
HT20	MCS8	2	60	5300	18.23	18.01	22.08	21.90	23.98		
HT20	MCS8	2	64	5320	18.21	18.00	22.14	21.78	23.98		
HT40	MCS8	2	54	5270	36.61	36.37	46.44	39.96	23.98		
HT40	MCS8	2	62	5310	36.57	36.36	51.12	40.08	23.98		
VHT80	MCS8	2	58	5290	76.02	76.22	81.84	82.08	23.98		
HE20	MCS8	2	52	5260	19.10	19.09	22.14	21.96	23.98		
HE20	MCS8	2	60	5300	19.10	19.10	22.38	22.08	23.98		
HE20	MCS8	2	64	5320	19.09	19.08	22.14	21.90	23.98		
HE40	MCS8	2	54	5270	37.67	37.64	43.56	40.32	23.98		
HE40	MCS8	2	62	5310	37.67	37.62	40.80	40.20	23.98		
HE80	MCS8	2	58	5290	77.16	77.13	82.08	82.32	23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A																
Mod.	Data Rate	Nrx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	52	Full	5260	0.46	0.46	16.76	16.96	19.88	23.98	-1.50	26.99	Pass		
11a	6Mbps	2	60	Full	5300	0.46	0.46	16.68	16.82	19.76	23.98	-1.50	26.99	Pass		
11a	6Mbps	2	64	Full	5320	0.46	0.46	16.57	16.74	19.67	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	52	Full	5260	0.59	0.59	16.89	17.11	20.01	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	60	Full	5300	0.59	0.59	16.79	16.96	19.88	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	64	Full	5320	0.59	0.59	16.64	16.89	19.77	23.98	-1.50	26.99	Pass		
HT40	MCS8	2	54	Full	5270	0.58	0.58	17.38	17.38	20.39	23.98	-1.50	26.99	Pass		
HT40	MCS8	2	62	Full	5310	0.58	0.58	13.66	14.10	16.89	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	52	Full	5260	0.51	7.93	16.85	17.09	19.98	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	60	Full	5300	0.51	7.93	16.67	16.95	19.82	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	64	Full	5320	0.51	7.93	16.63	16.87	19.76	23.98	-1.50	26.99	Pass		
VHT40	MCS8	2	54	Full	5270	0.80	6.35	17.37	17.37	20.38	23.98	-1.50	26.99	Pass		
VHT40	MCS8	2	62	Full	5310	0.80	6.35	13.60	14.05	16.84	23.98	-1.50	26.99	Pass		
VHT80	MCS8	2	58	Full	5290	1.13	5.03	15.16	15.38	18.28	23.98	-1.50	26.99	Pass		
HE20	MCS8	2	52	Full	5260	0.56	0.50	17.06	17.27	20.17	23.98	-1.50	26.99	Pass		
			60	Full	5300	0.56	0.50	16.92	17.15	20.04	23.98	-1.50	26.99	Pass		
			64	Full	5320	0.56	0.50	16.84	17.11	19.99	23.98	-1.50	26.99	Pass		
				26/8		0.56	0.50	6.69	7.80	10.29	23.98	-1.50	26.99	Pass		
				52/40		0.56	0.50	10.07	10.36	13.23	23.98	-1.50	26.99	Pass		
				106/54		0.56	0.50	12.94	13.28	16.12	23.98	-1.50	26.99	Pass		
HE40	MCS8	2	54	Full	5270	0.75	0.76	17.39	17.42	20.42	23.98	-1.50	26.99	Pass		
HE40	MCS8	2	62	Full	5310	0.75	0.76	13.75	14.16	16.97	23.98	-1.50	26.99	Pass		
HE80	MCS8	2	58	Full	5290	0.95	0.95	15.25	15.46	18.36	23.98	-1.50	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-2A															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	52	Full	5260	0.46	0.46			8.53	11.00		1.26	Pass	
11a	6Mbps	2	60	Full	5300	0.46	0.46			8.30	11.00		1.26	Pass	
11a	6Mbps	2	64	Full	5320	0.46	0.46			8.07	11.00		1.26	Pass	
HT20	MCS8	2	52	Full	5260	0.59	0.59			8.17	11.00		-1.50	Pass	
HT20	MCS8	2	60	Full	5300	0.59	0.59			7.90	11.00		-1.50	Pass	
HT20	MCS8	2	64	Full	5320	0.59	0.59			7.69	11.00		-1.50	Pass	
HT40	MCS8	2	54	Full	5270	0.58	0.58			5.90	11.00		-1.50	Pass	
HT40	MCS8	2	62	Full	5310	0.58	0.58			5.42	11.00		-1.50	Pass	
VHT80	MCS8	2	58	Full	5290	1.13	5.03			2.99	11.00		-1.50	Pass	
HE20	MCS8	2	52	Full	5260	0.10	0.03			8.44	11.00		-1.50	Pass	
HE20	MCS8	2	60	Full	5300	0.10	0.03			8.17	11.00		-1.50	Pass	
HE20	MCS8	2	64	Full	5320	0.10	0.03			7.88	11.00		-1.50	Pass	
HE40	MCS8	2	54	Full	5270	0.12	0.10			6.15	11.00		-1.50	Pass	
HE40	MCS8	2	62	Full	5310	0.12	0.10			5.78	11.00		-1.50	Pass	
HE80	MCS8	2	58	Full	5290	0.20	0.18			1.68	11.00		-1.50	Pass	

TEST RESULTS DATA
26dB and 99% OBW

FCC U-NII-2C											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	100	5500	17.33	16.96	24.66	22.20	23.98		
11a	6Mbps	2	116	5580	17.21	16.94	24.66	22.02	23.98		
11a	6Mbps	2	140	5700	17.22	16.94	24.18	21.96	23.98		
HT20	MCS8	2	100	5500	18.28	18.04	28.50	21.96	23.98		
HT20	MCS8	2	116	5580	18.28	18.02	29.28	22.02	23.98		
HT20	MCS8	2	140	5700	18.26	18.02	25.68	21.90	23.98		
HT40	MCS8	2	102	5510	36.78	36.36	59.16	40.56	23.98		
HT40	MCS8	2	110	5550	36.76	36.39	66.12	40.20	23.98		
HT40	MCS8	2	134	5670	36.74	36.40	53.40	41.40	23.98		
VHT80	MCS8	2	106	5530	76.06	76.23	105.84	82.08	23.98		
HE20	MCS8	2	100	5500	19.16	19.11	23.46	21.66	23.98		
HE20	MCS8	2	116	5580	19.13	19.10	23.16	22.14	23.98		
HE20	MCS8	2	140	5700	19.23	19.08	25.38	21.84	23.98		
HE40	MCS8	2	102	5510	37.75	37.63	55.92	40.56	23.98		
HE40	MCS8	2	110	5550	37.79	37.61	57.48	40.68	23.98		
HE40	MCS8	2	134	5670	37.73	37.61	50.76	40.68	23.98		
HE80	MCS8	2	106	5530	77.15	77.08	82.08	82.08	23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C																
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	100	Full	5500	0.46	0.46	16.92	17.44	20.20	23.98	-1.50	26.99	Pass		
11a	6Mbps	2	116	Full	5580	0.46	0.46	17.00	16.97	20.00	23.98	-1.50	26.99	Pass		
11a	6Mbps	2	140	Full	5700	0.46	0.46	16.18	16.27	19.24	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	100	Full	5500	0.59	0.59	17.13	17.45	20.30	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	116	Full	5580	0.59	0.59	17.12	17.15	20.14	23.98	-1.50	26.99	Pass		
HT20	MCS8	2	140	Full	5700	0.59	0.59	15.20	15.62	18.42	23.98	-1.50	26.99	Pass		
HT40	MCS8	2	102	Full	5510	0.58	0.58	16.30	16.70	19.51	23.98	-1.50	26.99	Pass		
HT40	MCS8	2	110	Full	5550	0.58	0.58	17.46	17.44	20.46	23.98	-1.50	26.99	Pass		
HT40	MCS8	2	134	Full	5670	0.58	0.58	16.98	16.60	19.80	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	100	Full	5500	0.51	7.93	17.11	17.44	20.29	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	116	Full	5580	0.51	7.93	17.09	17.13	20.12	23.98	-1.50	26.99	Pass		
VHT20	MCS8	2	140	Full	5700	0.51	7.93	15.16	15.59	18.39	23.98	-1.50	26.99	Pass		
VHT40	MCS8	2	102	Full	5510	0.80	6.35	16.22	16.61	19.43	23.98	-1.50	26.99	Pass		
VHT40	MCS8	2	110	Full	5550	0.80	6.35	17.42	17.29	20.37	23.98	-1.50	26.99	Pass		
VHT40	MCS8	2	134	Full	5670	0.80	6.35	16.97	16.53	19.77	23.98	-1.50	26.99	Pass		
VHT80	MCS8	2	106	Full	5530	1.13	5.03	15.25	15.79	18.54	23.98	-1.50	26.99	Pass		
HE20	MCS8	2	100	Full	5500	0.56	0.50	17.25	17.68	20.48	23.98	-1.50	26.99	Pass		
				26/0		0.56	0.50	7.21	8.17	10.73	23.98	-1.50	26.99	Pass		
				52/37		0.56	0.50	10.37	10.76	13.58	23.98	-1.50	26.99	Pass		
				106/53		0.56	0.50	13.15	13.66	16.42	23.98	-1.50	26.99	Pass		
			116	Full	5580	0.56	0.50	17.29	17.25	20.28	23.98	-1.50	26.99	Pass		
				Full		0.56	0.50	15.26	15.72	18.50	23.98	-1.50	26.99	Pass		
				26/8		0.56	0.50	5.02	5.78	8.43	23.98	-1.50	26.99	Pass		
				52/40		0.56	0.50	8.55	8.80	11.69	23.98	-1.50	26.99	Pass		
				106/54		0.56	0.50	11.27	11.77	14.54	23.98	-1.50	26.99	Pass		
				Full		0.75	0.76	16.35	16.88	19.64	23.98	-1.50	26.99	Pass		
HE40	MCS8	2	102	Full	5510	0.75	0.76	16.35	16.88	19.64	23.98	-1.50	26.99	Pass		
HE40	MCS8	2	110	Full	5550	0.75	0.76	17.55	17.57	20.57	23.98	-1.50	26.99	Pass		
HE40	MCS8	2	134	Full	5670	0.75	0.76	17.13	17.01	20.08	23.98	-1.50	26.99	Pass		
HE80	MCS8	2	106	Full	5530	0.95	0.95	15.30	15.85	18.59	23.98	-1.50	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-2C															
Mod.	Data Rate	NTX	CH.		Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	100	Full	5500	0.46	0.46			8.33	11.00	1.26		Pass	
11a	6Mbps	2	116	Full	5580	0.46	0.46			8.13	11.00	1.26		Pass	
11a	6Mbps	2	140	Full	5700	0.46	0.46			7.91	11.00	1.26		Pass	
HT20	MCS8	2	100	Full	5500	0.59	0.59			8.10	11.00	-1.50		Pass	
HT20	MCS8	2	116	Full	5580	0.59	0.59			7.90	11.00	-1.50		Pass	
HT20	MCS8	2	140	Full	5700	0.59	0.59			7.58	11.00	-1.50		Pass	
HT40	MCS8	2	102	Full	5510	0.58	0.58			5.67	11.00	-1.50		Pass	
HT40	MCS8	2	110	Full	5550	0.58	0.58			5.53	11.00	-1.50		Pass	
HT40	MCS8	2	134	Full	5670	0.58	0.58			4.88	11.00	-1.50		Pass	
VHT80	MCS8	2	106	Full	5530	1.13	5.03			3.09	11.00	-1.50		Pass	
HE20	MCS8	2	100	Full	5500	0.10	0.03			8.21	11.00	-1.50		Pass	
HE20	MCS8	2	116	Full	5580	0.10	0.03			8.00	11.00	-1.50		Pass	
HE20	MCS8	2	140	Full	5700	0.10	0.03			7.54	11.00	-1.50		Pass	
HE40	MCS8	2	102	Full	5510	0.12	0.10			5.85	11.00	-1.50		Pass	
HE40	MCS8	2	110	Full	5550	0.12	0.10			5.68	11.00	-1.50		Pass	
HE40	MCS8	2	134	Full	5670	0.12	0.10			5.26	11.00	-1.50		Pass	
HE80	MCS8	2	106	Full	5530	0.20	0.18			1.77	11.00	-1.50		Pass	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	5745	17.42	16.95	22.20	21.84	16.45	16.50	0.5		Pass
11a	6Mbps	2	157	5785	17.36	16.94	27.60	21.90	16.45	16.45	0.5		Pass
11a	6Mbps	2	165	5825	17.33	16.93	21.96	21.72	16.45	16.50	0.5		Pass
HT20	MCS8	2	149	5745	18.42	18.07	28.68	22.44	17.70	17.70	0.5		Pass
HT20	MCS8	2	157	5785	18.49	18.04	28.86	21.90	17.70	17.70	0.5		Pass
HT20	MCS8	2	165	5825	18.40	18.03	25.74	21.84	17.65	17.65	0.5		Pass
HT40	MCS8	2	151	5755	36.90	36.39	49.80	44.28	36.45	36.45	0.5		Pass
HT40	MCS8	2	159	5795	36.75	36.31	49.08	39.96	36.45	36.45	0.5		Pass
VHT80	MCS8	2	155	5775	76.12	76.31	105.12	97.68	76.80	76.48	0.5		Pass
HE20	MCS8	2	149	5745	19.16	19.15	22.92	21.90	19.15	19.15	0.5		Pass
HE20	MCS8	2	157	5785	19.15	19.13	23.40	22.08	19.20	19.10	0.5		Pass
HE20	MCS8	2	165	5825	19.17	19.14	25.08	21.90	19.20	19.15	0.5		Pass
HE40	MCS8	2	151	5755	37.78	37.63	56.40	40.68	37.89	38.16	0.5		Pass
HE40	MCS8	2	159	5795	37.74	37.58	56.28	40.44	37.98	37.71	0.5		Pass
HE80	MCS8	2	155	5775	77.30	77.19	95.52	82.08	78.24	77.92	0.5		Pass

TEST RESULTS DATA
Average Power Table

U-NII-3															
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	Full	5745	0.46	0.46	16.47	17.14	19.83	30.00		-1.50		Pass
11a	6Mbps	2	157	Full	5785	0.46	0.46	16.68	16.83	19.77	30.00		-1.50		Pass
11a	6Mbps	2	165	Full	5825	0.46	0.46	16.35	16.68	19.53	30.00		-1.50		Pass
HT20	MCS8	2	149	Full	5745	0.59	0.59	16.53	17.09	19.82	30.00		-1.50		Pass
HT20	MCS8	2	157	Full	5785	0.59	0.59	16.56	16.87	19.72	30.00		-1.50		Pass
HT20	MCS8	2	165	Full	5825	0.59	0.59	16.42	16.65	19.54	30.00		-1.50		Pass
HT40	MCS8	2	151	Full	5755	0.58	0.58	17.06	17.36	20.22	30.00		-1.50		Pass
HT40	MCS8	2	159	Full	5795	0.58	0.58	16.73	17.42	20.10	30.00		-1.50		Pass
VHT20	MCS8	2	149	Full	5745	0.51	7.93	16.51	17.05	19.80	30.00		-1.50		Pass
VHT20	MCS8	2	157	Full	5785	0.51	7.93	16.53	16.82	19.69	30.00		-1.50		Pass
VHT20	MCS8	2	165	Full	5825	0.51	7.93	16.39	16.63	19.52	30.00		-1.50		Pass
VHT40	MCS8	2	151	Full	5755	0.80	6.35	17.02	17.35	20.20	30.00		-1.50		Pass
VHT40	MCS8	2	159	Full	5795	0.80	6.35	16.70	17.40	20.08	30.00		-1.50		Pass
VHT80	MCS8	2	155	Full	5775	1.13	5.03	16.58	16.87	19.74	30.00		-1.50		Pass
HE20	MCS8	2	149	Full	5745	0.56	0.50	16.69	17.33	20.03	30.00		-1.50		Pass
HE20	MCS8	2	149	26/0	5745	0.56	0.50	7.72	7.67	10.70	30.00		-1.50		Pass
HE20	MCS8	2	149	52/37	5745	0.56	0.50	10.81	11.14	13.99	30.00		-1.50		Pass
HE20	MCS8	2	149	106/53	5745	0.56	0.50	13.41	14.02	16.73	30.00		-1.50		Pass
HE20	MCS8	2	157	Full	5785	0.56	0.50	16.84	17.00	19.93	30.00		-1.50		Pass
HE20	MCS8	2	165	Full	5825	0.56	0.50	16.69	16.86	19.78	30.00		-1.50		Pass
HE20	MCS8	2	165	26/8	5825	0.56	0.50	7.63	7.18	10.42	30.00		-1.50		Pass
HE20	MCS8	2	165	52/40	5825	0.56	0.50	10.51	10.39	13.46	30.00		-1.50		Pass
HE20	MCS8	2	165	106/54	5825	0.56	0.50	13.44	13.47	16.46	30.00		-1.50		Pass
HE40	MCS8	2	151	Full	5755	0.75	0.76	17.25	17.64	20.46	30.00		-1.50		Pass
HE40	MCS8	2	159	Full	5795	0.75	0.76	17.04	17.53	20.30	30.00		-1.50		Pass
HE80	MCS8	2	155	Full	5775	0.95	0.95	16.84	17.03	19.94	30.00		-1.50		Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-3																	
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Worst+3.01	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	Full	5745	0.46	0.46	2.22	2.12	2.50	5.51	30.00	1.26	Pass			
11a	6Mbps	2	157	Full	5785	0.46	0.46	2.22	2.13	2.51	5.52	30.00	1.26	Pass			
11a	6Mbps	2	165	Full	5825	0.46	0.46	2.22	1.60	1.91	4.92	30.00	1.26	Pass			
HT20	MCS8	2	149	Full	5745	0.59	0.59	2.22	1.80	2.31	5.32	30.00	-1.50	Pass			
HT20	MCS8	2	157	Full	5785	0.59	0.59	2.22	1.61	1.70	4.71	30.00	-1.50	Pass			
HT20	MCS8	2	165	Full	5825	0.59	0.59	2.22	1.28	1.60	4.61	30.00	-1.50	Pass			
HT40	MCS8	2	151	Full	5755	0.58	0.58	2.22	-0.52	-0.29	2.72	30.00	-1.50	Pass			
HT40	MCS8	2	159	Full	5795	0.58	0.58	2.22	-0.83	-0.20	2.81	30.00	-1.50	Pass			
VHT80	MCS8	2	155	Full	5775	1.13	5.03	2.22	-2.51	-0.98	2.03	30.00	-1.50	Pass			
HE20	MCS8	2	149	Full	5745	0.56	0.50	2.22	2.47	2.88	5.89	30.00	-1.50	Pass			
HE20	MCS8	2	149	26/0	5745	0.56	0.50	2.22	2.37	2.22	5.38	30.00	-1.50	Pass			
HE20	MCS8	2	149	52/37	5745	0.56	0.50	2.22	2.36	2.66	5.67	30.00	-1.50	Pass			
HE20	MCS8	2	149	106/53	5745	0.56	0.50	2.22	1.98	2.69	5.70	30.00	-1.50	Pass			
HE20	MCS8	2	157	Full	5785	0.56	0.50	2.22	2.48	2.66	5.67	30.00	-1.50	Pass			
HE20	MCS8	2	165	Full	5825	0.56	0.50	2.22	2.25	2.37	5.38	30.00	-1.50	Pass			
HE20	MCS8	2	165	26/8	5825	0.56	0.50	2.22	2.00	1.55	5.01	30.00	-1.50	Pass			
HE20	MCS8	2	165	52/40	5825	0.56	0.50	2.22	2.05	1.72	5.06	30.00	-1.50	Pass			
HE20	MCS8	2	165	106/54	5825	0.56	0.50	2.22	1.85	1.88	4.89	30.00	-1.50	Pass			
HE40	MCS8	2	151	Full	5755	0.75	0.76	2.22	0.47	0.97	3.98	30.00	-1.50	Pass			
HE40	MCS8	2	159	Full	5795	0.75	0.76	2.22	0.28	0.81	3.82	30.00	-1.50	Pass			
HE80	MCS8	2	155	Full	5775	0.95	0.00	2.22	-2.24	-3.23	0.77	30.00	-1.50	Pass			



Appendix B. AC Conducted Emission Test Results

Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

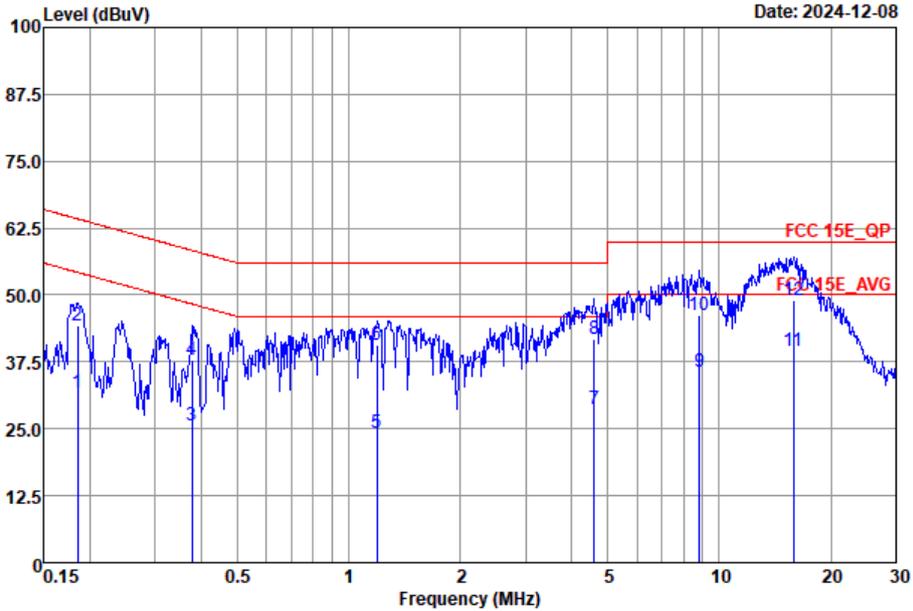


Site : CO02-SZ
 Condition : FCC 15E_QP LISN_2024-L-1 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	31.89	-22.35	54.24	12.19	9.68	10.02	Average
2	0.19	44.29	-19.95	64.24	24.59	9.68	10.02	QP
3	0.38	25.63	-22.71	48.34	5.90	9.66	10.07	Average
4	0.38	37.83	-20.51	58.34	18.10	9.66	10.07	QP
5	1.19	24.19	-21.81	46.00	4.30	9.66	10.23	Average
6	1.19	40.69	-15.31	56.00	20.80	9.66	10.23	QP
7	4.60	28.77	-17.23	46.00	8.90	9.61	10.26	Average
8	4.60	41.87	-14.13	56.00	22.00	9.61	10.26	QP
9	8.82	35.57	-14.43	50.00	15.51	9.60	10.46	Average
10	8.82	46.37	-13.63	60.00	26.31	9.60	10.46	QP
11	15.89	39.58	-10.42	50.00	19.20	9.55	10.83	Average
12 *	15.89	49.08	-10.92	60.00	28.70	9.55	10.83	QP



Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

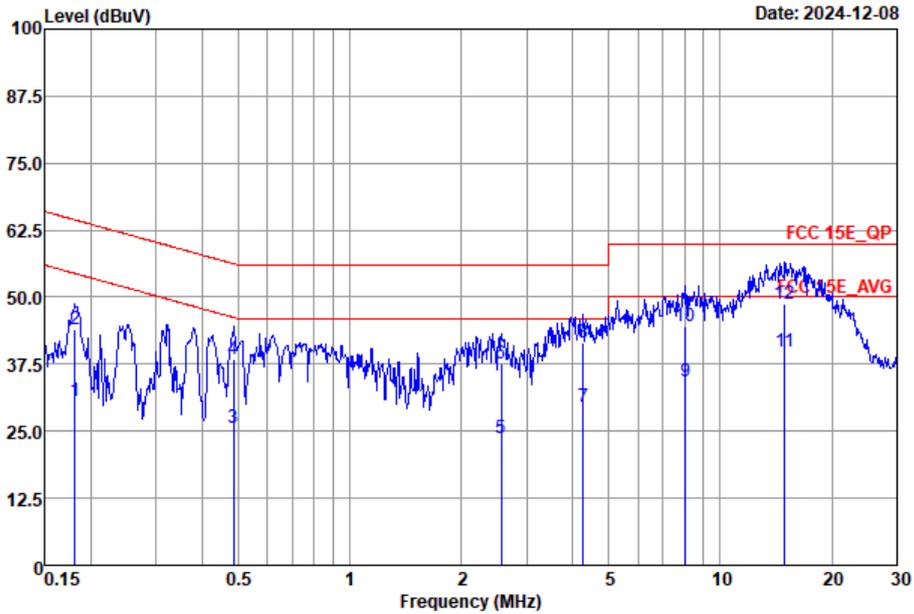

Site : CO02-SZ
 Condition : FCC 15E_QP LISN_2024-N-1 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	30.62	-23.80	54.42	10.90	9.71	10.01	Average
2	0.18	44.02	-20.40	64.42	24.30	9.71	10.01	QP
3	0.49	25.60	-20.63	46.23	5.80	9.69	10.11	Average
4	0.49	38.40	-17.83	56.23	18.60	9.69	10.11	QP
5	2.57	23.70	-22.30	46.00	3.71	9.68	10.31	Average
6	2.57	37.60	-18.40	56.00	17.61	9.68	10.31	QP
7	4.27	29.63	-16.37	46.00	9.70	9.66	10.27	Average
8	4.27	41.43	-14.57	56.00	21.50	9.66	10.27	QP
9	8.06	34.25	-15.75	50.00	14.20	9.63	10.42	Average
10	8.06	44.55	-15.45	60.00	24.50	9.63	10.42	QP
11	14.91	39.83	-10.17	50.00	19.40	9.59	10.84	Average
12 *	14.91	48.63	-11.37	60.00	28.20	9.59	10.84	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Shunping You	Relative Humidity :	50%
		Temperature :	20-24°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 0+1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 0+1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 0+1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE20	36	5180	MCS8	Full RU	-
Mode 11	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE20	44	5220	MCS8	Full RU	-
Mode 12	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE20	48	5240	MCS8	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE20	52	5260	MCS8	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE20	60	5300	MCS8	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE20	64	5320	MCS8	Full RU	-
Mode 16	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE20	100	5500	MCS8	Full RU	-
Mode 17	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE20	116	5580	MCS8	Full RU	-
Mode 18	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE20	140	5700	MCS8	Full RU	-
Mode 19	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE40	38	5190	MCS8	Full RU	-
Mode 20	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE40	46	5230	MCS8	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE40	54	5270	MCS8	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE40	62	5310	MCS8	Full RU	-
Mode 23	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE40	102	5510	MCS8	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE40	134	5670	MCS8	Full RU	-
Mode 25	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE80	42	5210	MCS8	Full RU	-
Mode 26	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE80	58	5290	MCS8	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE80	106	5530	MCS8	Full RU	-
Mode 28	U-NII-3	5.725-5.85	CDD 0+1	802.11a	149	5745	6Mbps	-	-
Mode 29	U-NII-3	5.725-5.85	CDD 0+1	802.11a	157	5785	6Mbps	-	-
Mode 30	U-NII-3	5.725-5.85	CDD 0+1	802.11a	165	5825	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE20	149	5745	MCS8	Full RU	-
Mode 32	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE20	157	5785	MCS8	Full RU	-
Mode 33	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE20	165	5825	MCS8	Full RU	-
Mode 34	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE40	151	5755	MCS8	Full RU	-
Mode 35	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE40	159	5795	MCS8	Full RU	-
Mode 36	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE80	155	5775	MCS8	Full RU	-



Mode 37	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE20	36	5180	MCS8	Partial_RU 26/0	-
Mode 38	U-NII-2A	5.25-5.35	STBC 0+1	802.11ax HE20	64	5320	MCS8	Partial_RU 26/8	-
Mode 39	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE20	100	5500	MCS8	Partial_RU 52/37	-
Mode 40	U-NII-2C	5.47-5.725	STBC 0+1	802.11ax HE20	140	5700	MCS8	Partial_RU 52/40	-
Mode 41	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE20	149	5745	MCS8	Partial_RU 106/53	-
Mode 42	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE20	165	5825	MCS8	Partial_RU 52/40	-
Mode 43	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE80	42	LF	MCS8	-	-
Mode 44	U-NII-3	5.725-5.85	STBC 0+1	802.11ax HE80	155	LF	MCS8	-	-
Mode 45	CO-TX	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	125Kbps	-	-
		5.15-5.25	STBC 0+1	802.11ax HE80	42	5210	MCS8	-	-
Mode 46	U-NII-1	5.15-5.25	STBC 0+1	802.11ax HE80	42	5210	MCS8	Full RU	-

Note:

- For 802.11n/11ac/11ax mode, the RSE testing have assessed only 802.11ax HE20/40/80 by referring to the higher output power.
- Mode 46 is for sample 2, the other modes are for sample 1.

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	-	-	-	-	-	-	-	Band Edge
1	802.11a	36	10360.00	45.67	68.30	-22.63	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	46.54	68.30	-21.76	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	46.74	68.30	-21.56	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	47.01	68.30	-21.29	H	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	46.48	74.00	-27.52	H	Peak	Pass	Harmonic
6	802.11a	64	-	-	-	-	-	-	-	Band Edge
6	802.11a	64	10640.00	46.64	74.00	-27.36	V	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
7	802.11a	100	16500.00	44.58	68.30	-23.72	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	45.40	68.30	-22.90	H	Peak	Pass	Harmonic
9	802.11a	140	5725.16	61.58	68.30	-6.72	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	45.34	68.30	-22.96	H	Peak	Pass	Harmonic
10	802.11ax HE20	36	5149.94	49.28	54.00	-4.72	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	45.87	68.30	-22.43	V	Peak	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	45.99	68.30	-22.31	V	Peak	Pass	Harmonic
12	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge



12	802.11ax HE20	48	10480.00	46.81	68.30	-21.49	H	Peak	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	47.06	68.30	-21.24	H	Peak	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	10600.00	46.33	74.00	-27.67	H	Peak	Pass	Harmonic
15	802.11ax HE20	64	5350.66	49.92	54.00	-4.08	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	46.51	74.00	-27.49	V	Peak	Pass	Harmonic
16	802.11ax HE20	100	5467.30	62.23	68.30	-6.07	H	PEAK	Pass	Band Edge
16	802.11ax HE20	100	16500.00	45.70	68.30	-22.60	V	Peak	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	16740.00	46.32	68.30	-21.98	V	Peak	Pass	Harmonic
18	802.11ax HE20	140	5725.48	62.59	68.30	-5.71	H	PEAK	Pass	Band Edge
18	802.11ax HE20	140	17100.00	48.65	68.30	-19.65	H	Peak	Pass	Harmonic
19	802.11ax HE40	38	5147.63	50.76	54.00	-3.24	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE40	46	5356.27	46.41	54.00	-7.59	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE40	54	5350.75	46.16	54.00	-7.84	H	AVERAGE	Pass	Band Edge
21	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE40	62	5354.10	48.73	54.00	-5.27	H	AVERAGE	Pass	Band Edge
22	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE40	102	5454.00	50.82	54.00	-3.18	H	AVERAGE	Pass	Band Edge
23	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE40	134	5728.43	59.10	68.30	-9.20	H	PEAK	Pass	Band Edge
24	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE80	42	5149.73	50.94	54.00	-3.06	H	AVERAGE	Pass	Band Edge
25	802.11ax HE80	42	10420.00	46.79	68.30	-21.51	V	Peak	Pass	Harmonic
26	802.11ax HE80	58	5350.18	50.58	54.00	-3.42	H	AVERAGE	Pass	Band Edge
26	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE80	106	5457.10	49.75	54.00	-4.25	H	AVERAGE	Pass	Band Edge
27	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
28	802.11a	149	-	-	-	-	-	-	-	Band Edge
28	802.11a	149	17235.00	46.16	68.30	-22.14	H	Peak	Pass	Harmonic
29	802.11a	157	-	-	-	-	-	-	-	Band Edge
29	802.11a	157	17355.00	47.62	68.30	-20.68	H	Peak	Pass	Harmonic
30	802.11a	165	-	-	-	-	-	-	-	Band Edge
30	802.11a	165	17475.00	46.49	68.30	-21.81	H	Peak	Pass	Harmonic
31	802.11ax HE20	149	5647.85	52.19	68.30	-16.11	H	PEAK	Pass	Band Edge
31	802.11ax HE20	149	17235.00	45.30	68.30	-23.00	H	Peak	Pass	Harmonic
32	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE20	157	17355.00	45.29	68.30	-23.01	V	Peak	Pass	Harmonic
33	802.11ax HE20	165	5925.63	50.74	68.30	-17.56	H	PEAK	Pass	Band Edge
33	802.11ax HE20	165	17475.00	46.13	68.30	-22.17	H	Peak	Pass	Harmonic
34	802.11ax HE40	151	5602.33	54.49	68.30	-13.81	H	PEAK	Pass	Band Edge
34	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
35	802.11ax HE40	159	5650.51	50.92	68.67	-17.75	H	PEAK	Pass	Band Edge
35	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic



36	802.11ax HE80	155	5634.83	56.26	68.30	-12.04	H	PEAK	Pass	Band Edge
36	802.11ax HE80	155	17325.00	46.51	68.30	-21.79	H	Peak	Pass	Harmonic
37	802.11ax HE20	36	5142.02	42.63	54.00	-11.37	H	AVERAGE	Pass	Band Edge
37	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
38	802.11ax HE20	64	5350.52	41.43	54.00	-12.57	H	AVERAGE	Pass	Band Edge
38	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE20	100	5455.45	42.35	54.00	-11.65	H	AVERAGE	Pass	Band Edge
39	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE20	140	5725.03	50.33	68.30	-17.97	V	PEAK	Pass	Band Edge
40	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
41	802.11ax HE20	149	5609.14	51.99	68.30	-16.31	H	PEAK	Pass	Band Edge
41	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE20	165	5944.38	50.68	68.30	-17.62	V	PEAK	Pass	Band Edge
42	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE80	42	30	29.41	40	-10.59	V	PEAK	Pass	LF
44	802.11ax HE80	155	30.97	30.43	40	-9.57	V	PEAK	Pass	LF
45	CO-TX	-	5137.28	49.41	54.00	-4.59	H	Average	Pass	Band Edge
45		-	10420.00	47.21	74.00	-26.79	V	Peak	Pass	Harmonic
46	802.11ax HE80	42	5147.84	49.97	54.00	-4.03	H	AVERAGE	Pass	Band Edge
46	802.11ax HE80	42	10420.00	46.79	68.30	-21.51	V	Peak	Pass	Harmonic



Mode	1																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	CDD 0+1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.67</td> <td>68.30</td> <td>-22.63</td> <td>62.37</td> <td>37.16</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>44.62</td> <td>74.00</td> <td>-29.38</td> <td>55.86</td> <td>39.42</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.67	68.30	-22.63	62.37	37.16	10.73	64.59	--	--	Peak	2	15540.00	44.62	74.00	-29.38	55.86	39.42	12.72	63.38	--	--	Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.99</td> <td>68.30</td> <td>-23.31</td> <td>61.69</td> <td>37.16</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.15</td> <td>74.00</td> <td>-27.85</td> <td>57.39</td> <td>39.42</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	44.99	68.30	-23.31	61.69	37.16	10.73	64.59	--	--	Peak	2	15540.00	46.15	74.00	-27.85	57.39	39.42	12.72	63.38	--	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	45.67	68.30	-22.63	62.37	37.16	10.73	64.59	--	--	Peak																																																																																							
2	15540.00	44.62	74.00	-29.38	55.86	39.42	12.72	63.38	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	44.99	68.30	-23.31	61.69	37.16	10.73	64.59	--	--	Peak																																																																																							
2	15540.00	46.15	74.00	-27.85	57.39	39.42	12.72	63.38	--	--	Peak																																																																																							



Mode	2																																																																																																						
	Harmonic																																																																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																						
ANT	CDD 0+1																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.51</td> <td>68.30</td> <td>-22.79</td> <td>62.13</td> <td>37.35</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.27</td> <td>74.00</td> <td>-28.73</td> <td>56.71</td> <td>39.46</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.51	68.30	-22.79	62.13	37.35	10.79	64.76	--	-- Peak	2	15660.00	45.27	74.00	-28.73	56.71	39.46	12.72	63.62	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.54</td> <td>68.30</td> <td>-21.76</td> <td>63.16</td> <td>37.35</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.61</td> <td>74.00</td> <td>-28.39</td> <td>57.05</td> <td>39.46</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.54	68.30	-21.76	63.16	37.35	10.79	64.76	--	-- Peak	2	15660.00	45.61	74.00	-28.39	57.05	39.46	12.72	63.62	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	45.51	68.30	-22.79	62.13	37.35	10.79	64.76	--	-- Peak																																																																																													
2	15660.00	45.27	74.00	-28.73	56.71	39.46	12.72	63.62	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	46.54	68.30	-21.76	63.16	37.35	10.79	64.76	--	-- Peak																																																																																													
2	15660.00	45.61	74.00	-28.39	57.05	39.46	12.72	63.62	--	-- Peak																																																																																													



Mode	3																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	CDD 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.47</td> <td>68.30</td> <td>-21.83</td> <td>63.05</td> <td>37.45</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 15720.00</td> <td>45.04</td> <td>74.00</td> <td>-28.96</td> <td>56.58</td> <td>39.49</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	46.47	68.30	-21.83	63.05	37.45	10.82	64.85	--	-- Peak	2 15720.00	45.04	74.00	-28.96	56.58	39.49	12.71	63.74	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.74</td> <td>68.30</td> <td>-21.56</td> <td>63.32</td> <td>37.45</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 15720.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>57.79</td> <td>39.49</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	46.74	68.30	-21.56	63.32	37.45	10.82	64.85	--	-- Peak	2 15720.00	46.25	74.00	-27.75	57.79	39.49	12.71	63.74	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10480.00	46.47	68.30	-21.83	63.05	37.45	10.82	64.85	--	-- Peak																																																																																								
2 15720.00	45.04	74.00	-28.96	56.58	39.49	12.71	63.74	--	-- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10480.00	46.74	68.30	-21.56	63.32	37.45	10.82	64.85	--	-- Peak																																																																																								
2 15720.00	46.25	74.00	-27.75	57.79	39.49	12.71	63.74	--	-- Peak																																																																																								



Mode	4																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																
ANT	CDD 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>47.01</td> <td>68.30</td> <td>-21.29</td> <td>63.47</td> <td>37.53</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>45.93</td> <td>74.00</td> <td>-28.07</td> <td>57.58</td> <td>39.51</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	47.01	68.30	-21.29	63.47	37.53	10.85	64.84	--	-- Peak	2 15780.00	45.93	74.00	-28.07	57.58	39.51	12.71	63.87	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>46.85</td> <td>68.30</td> <td>-21.45</td> <td>63.31</td> <td>37.53</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>45.28</td> <td>74.00</td> <td>-28.72</td> <td>56.93</td> <td>39.51</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	46.85	68.30	-21.45	63.31	37.53	10.85	64.84	--	-- Peak	2 15780.00	45.28	74.00	-28.72	56.93	39.51	12.71	63.87	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10520.00	47.01	68.30	-21.29	63.47	37.53	10.85	64.84	--	-- Peak																																																																																								
2 15780.00	45.93	74.00	-28.07	57.58	39.51	12.71	63.87	--	-- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10520.00	46.85	68.30	-21.45	63.31	37.53	10.85	64.84	--	-- Peak																																																																																								
2 15780.00	45.28	74.00	-28.72	56.93	39.51	12.71	63.87	--	-- Peak																																																																																								



Mode	5																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																				
ANT	CDD 0+1																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.48</td> <td>74.00</td> <td>-27.52</td> <td>62.44</td> <td>37.70</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>44.44</td> <td>74.00</td> <td>-29.56</td> <td>56.28</td> <td>39.56</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	46.48	74.00	-27.52	62.44	37.70	10.91	64.57	--	Peak	2	15900.00	44.44	74.00	-29.56	56.28	39.56	12.71	64.11	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>62.31</td> <td>37.70</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>43.89</td> <td>74.00</td> <td>-30.11</td> <td>55.73</td> <td>39.56</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	46.35	74.00	-27.65	62.31	37.70	10.91	64.57	--	Peak	2	15900.00	43.89	74.00	-30.11	55.73	39.56	12.71	64.11	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10600.00	46.48	74.00	-27.52	62.44	37.70	10.91	64.57	--	Peak																																																																																											
2	15900.00	44.44	74.00	-29.56	56.28	39.56	12.71	64.11	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10600.00	46.35	74.00	-27.65	62.31	37.70	10.91	64.57	--	Peak																																																																																											
2	15900.00	43.89	74.00	-30.11	55.73	39.56	12.71	64.11	--	Peak																																																																																											



Mode	6																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																
ANT	CDD 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.90</td> <td>74.00</td> <td>-28.10</td> <td>61.61</td> <td>37.78</td> <td>10.94</td> <td>64.43</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>44.41</td> <td>74.00</td> <td>-29.59</td> <td>56.35</td> <td>39.59</td> <td>12.70</td> <td>64.23</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	45.90	74.00	-28.10	61.61	37.78	10.94	64.43	-- -- Peak	2	15960.00	44.41	74.00	-29.59	56.35	39.59	12.70	64.23	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.64</td> <td>74.00</td> <td>-27.36</td> <td>62.35</td> <td>37.78</td> <td>10.94</td> <td>64.43</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>44.51</td> <td>74.00</td> <td>-29.49</td> <td>56.45</td> <td>39.59</td> <td>12.70</td> <td>64.23</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.64	74.00	-27.36	62.35	37.78	10.94	64.43	-- -- Peak	2	15960.00	44.51	74.00	-29.49	56.45	39.59	12.70	64.23
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10640.00	45.90	74.00	-28.10	61.61	37.78	10.94	64.43	-- -- Peak																																																																																								
2	15960.00	44.41	74.00	-29.59	56.35	39.59	12.70	64.23	-- -- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10640.00	46.64	74.00	-27.36	62.35	37.78	10.94	64.43	-- -- Peak																																																																																								
2	15960.00	44.51	74.00	-29.49	56.45	39.59	12.70	64.23	-- -- Peak																																																																																								






Mode	7																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.21</td> <td>74.00</td> <td>-26.79</td> <td>60.71</td> <td>38.49</td> <td>11.21</td> <td>63.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>44.58</td> <td>68.30</td> <td>-23.72</td> <td>56.37</td> <td>40.39</td> <td>12.91</td> <td>65.09</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	11000.00	47.21	74.00	-26.79	60.71	38.49	11.21	63.20	-- -- Peak	2	16500.00	44.58	68.30	-23.72	56.37	40.39	12.91	65.09	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.67</td> <td>74.00</td> <td>-26.33</td> <td>61.17</td> <td>38.49</td> <td>11.21</td> <td>63.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>44.05</td> <td>68.30</td> <td>-24.25</td> <td>55.84</td> <td>40.39</td> <td>12.91</td> <td>65.09</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	11000.00	47.67	74.00	-26.33	61.17	38.49	11.21	63.20	-- -- Peak	2	16500.00	44.05	68.30	-24.25	55.84	40.39	12.91	65.09
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.21	74.00	-26.79	60.71	38.49	11.21	63.20	-- -- Peak																																																																																						
2	16500.00	44.58	68.30	-23.72	56.37	40.39	12.91	65.09	-- -- Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.67	74.00	-26.33	61.17	38.49	11.21	63.20	-- -- Peak																																																																																						
2	16500.00	44.05	68.30	-24.25	55.84	40.39	12.91	65.09	-- -- Peak																																																																																						






Mode	8																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																	
ANT	CDD 0+1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>45.76</td> <td>74.00</td> <td>-28.24</td> <td>59.52</td> <td>38.05</td> <td>11.29</td> <td>63.10</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.40</td> <td>68.30</td> <td>-22.90</td> <td>56.90</td> <td>40.59</td> <td>13.01</td> <td>65.10</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	45.76	74.00	-28.24	59.52	38.05	11.29	63.10	-- -- Peak	2	16740.00	45.40	68.30	-22.90	56.90	40.59	13.01	65.10	-- -- Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>46.45</td> <td>74.00</td> <td>-27.55</td> <td>60.21</td> <td>38.05</td> <td>11.29</td> <td>63.10</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>44.53</td> <td>68.30</td> <td>-23.77</td> <td>56.03</td> <td>40.59</td> <td>13.01</td> <td>65.10</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	46.45	74.00	-27.55	60.21	38.05	11.29	63.10	-- -- Peak	2	16740.00	44.53	68.30	-23.77	56.03	40.59	13.01	65.10	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11160.00	45.76	74.00	-28.24	59.52	38.05	11.29	63.10	-- -- Peak																																																																																									
2	16740.00	45.40	68.30	-22.90	56.90	40.59	13.01	65.10	-- -- Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11160.00	46.45	74.00	-27.55	60.21	38.05	11.29	63.10	-- -- Peak																																																																																									
2	16740.00	44.53	68.30	-23.77	56.03	40.59	13.01	65.10	-- -- Peak																																																																																									

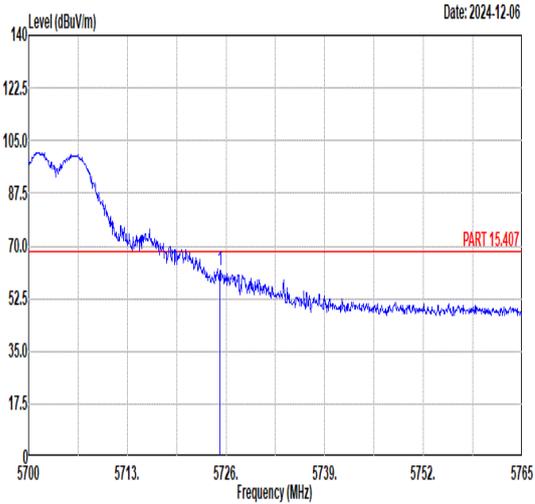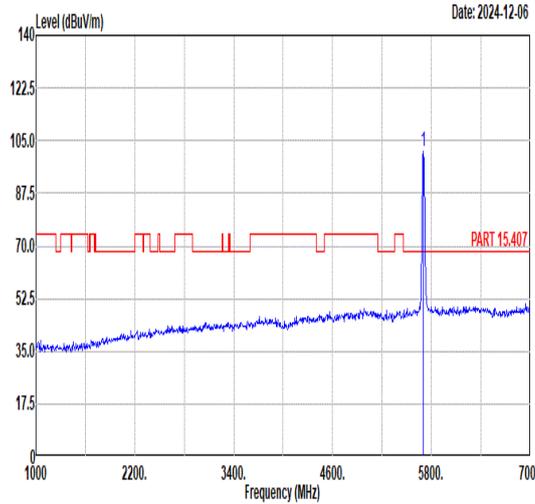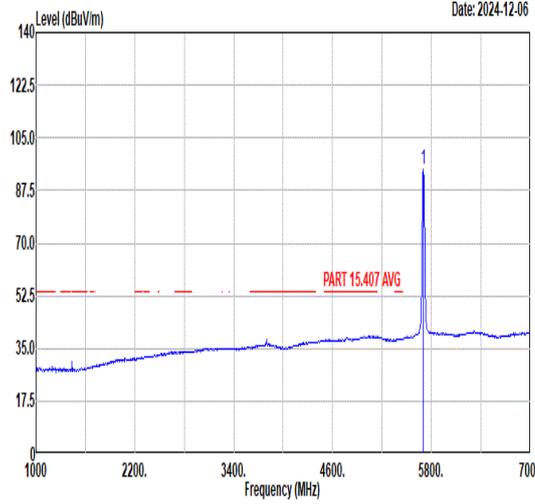

	9																																																																									
Mode	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	CDD 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>61.58</td> <td>68.30</td> <td>-6.72</td> <td>51.09</td> <td>34.60</td> <td>8.67</td> <td>32.78</td> <td>100</td> <td>339</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.16	61.58	68.30	-6.72	51.09	34.60	8.67	32.78	100	339	PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.29</td> <td>-----</td> <td>-----</td> <td>90.93</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>100</td> <td>339</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	101.29	-----	-----	90.93	34.55	8.57	32.76	100	339	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5725.16	61.58	68.30	-6.72	51.09	34.60	8.67	32.78	100	339	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	101.29	-----	-----	90.93	34.55	8.57	32.76	100	339	PEAK																																																															
Avg	Blank	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>94.46</td> <td>-----</td> <td>-----</td> <td>84.10</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>100</td> <td>339</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	94.46	-----	-----	84.10	34.55	8.57	32.76	100	339	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	94.46	-----	-----	84.10	34.55	8.57	32.76	100	339	AVERAGE																																																															

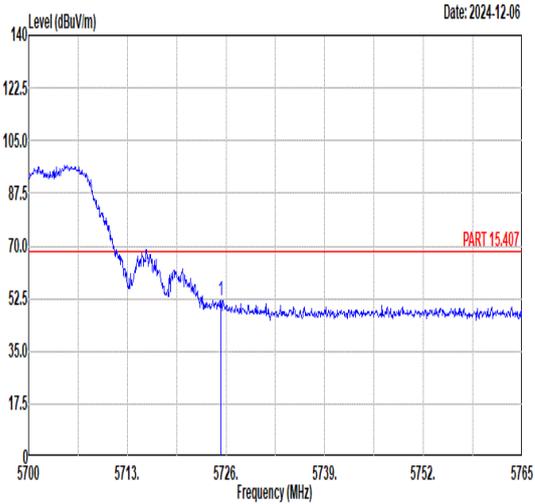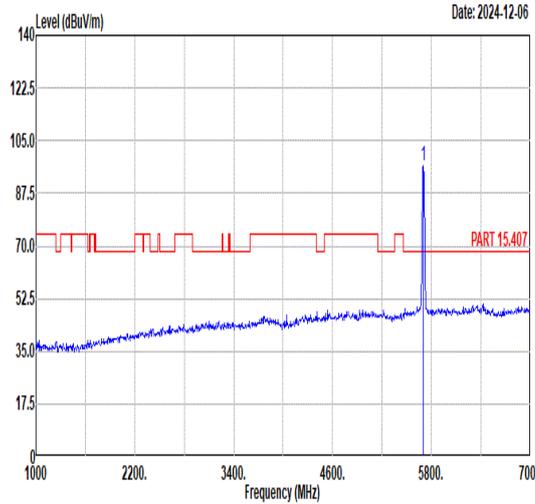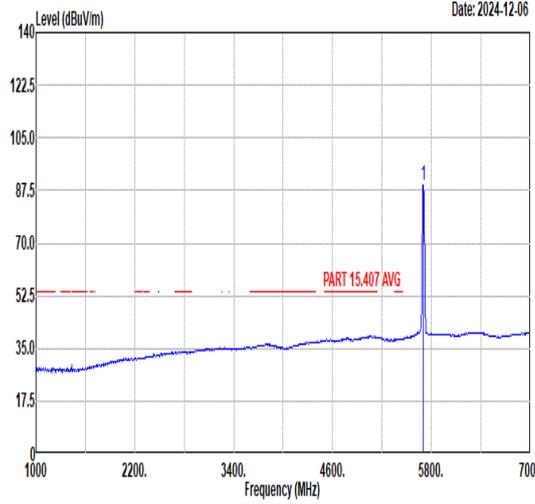

	9																																																																									
Mode	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	CDD 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.29</td> <td>51.84</td> <td>68.30</td> <td>-16.46</td> <td>41.34</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>126</td> <td>191</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.29	51.84	68.30	-16.46	41.34	34.60	8.68	32.78	126	191	PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.80</td> <td>-----</td> <td>-----</td> <td>86.44</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>126</td> <td>191</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	96.80	-----	-----	86.44	34.55	8.57	32.76	126	191	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5725.29	51.84	68.30	-16.46	41.34	34.60	8.68	32.78	126	191	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	96.80	-----	-----	86.44	34.55	8.57	32.76	126	191	PEAK																																																															
Avg	Blank	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>89.10</td> <td>-----</td> <td>-----</td> <td>78.74</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>126</td> <td>191</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	89.10	-----	-----	78.74	34.55	8.57	32.76	126	191	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	89.10	-----	-----	78.74	34.55	8.57	32.76	126	191	AVERAGE																																																															







Mode	9																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.43</td> <td>74.00</td> <td>-27.57</td> <td>60.59</td> <td>37.39</td> <td>11.41</td> <td>62.96</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>45.34</td> <td>68.30</td> <td>-22.96</td> <td>56.38</td> <td>41.00</td> <td>13.14</td> <td>65.18</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	46.43	74.00	-27.57	60.59	37.39	11.41	62.96	-- -- Peak	2	17100.00	45.34	68.30	-22.96	56.38	41.00	13.14	65.18	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.56</td> <td>74.00</td> <td>-28.44</td> <td>59.72</td> <td>37.39</td> <td>11.41</td> <td>62.96</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>44.90</td> <td>68.30</td> <td>-23.40</td> <td>55.94</td> <td>41.00</td> <td>13.14</td> <td>65.18</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	45.56	74.00	-28.44	59.72	37.39	11.41	62.96	-- -- Peak	2	17100.00	44.90	68.30	-23.40	55.94	41.00	13.14	65.18
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11400.00	46.43	74.00	-27.57	60.59	37.39	11.41	62.96	-- -- Peak																																																																																						
2	17100.00	45.34	68.30	-22.96	56.38	41.00	13.14	65.18	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11400.00	45.56	74.00	-28.44	59.72	37.39	11.41	62.96	-- -- Peak																																																																																						
2	17100.00	44.90	68.30	-23.40	55.94	41.00	13.14	65.18	-- -- Peak																																																																																						



		10																																																																								
Mode	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.50</td> <td>56.11</td> <td>74.00</td> <td>-17.89</td> <td>46.94</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.50	56.11	74.00	-17.89	46.94	33.99	7.92	32.74	300	10	PEAK	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.46</td> <td>-----</td> <td>-----</td> <td>95.26</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>300</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	104.46	-----	-----	95.26	34.00	7.93	32.73	300	10	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.50	56.11	74.00	-17.89	46.94	33.99	7.92	32.74	300	10	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	104.46	-----	-----	95.26	34.00	7.93	32.73	300	10	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>49.28</td> <td>54.00</td> <td>-4.72</td> <td>40.11</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>300</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.94	49.28	54.00	-4.72	40.11	33.99	7.92	32.74	300	10	AVERAGE	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>96.01</td> <td>-----</td> <td>-----</td> <td>86.79</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>300</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	96.01	-----	-----	86.79	34.01	7.94	32.73	300	10	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.94	49.28	54.00	-4.72	40.11	33.99	7.92	32.74	300	10	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	96.01	-----	-----	86.79	34.01	7.94	32.73	300	10	AVERAGE																																																															

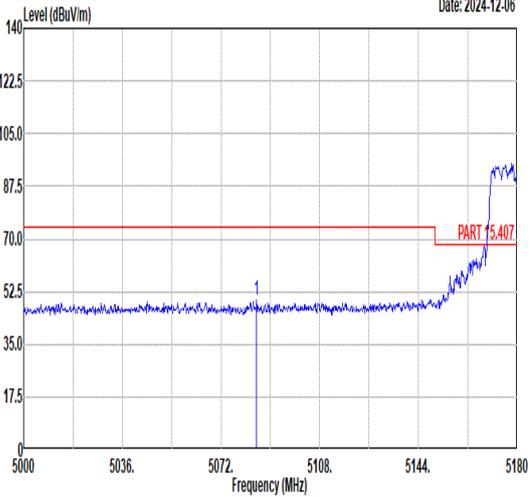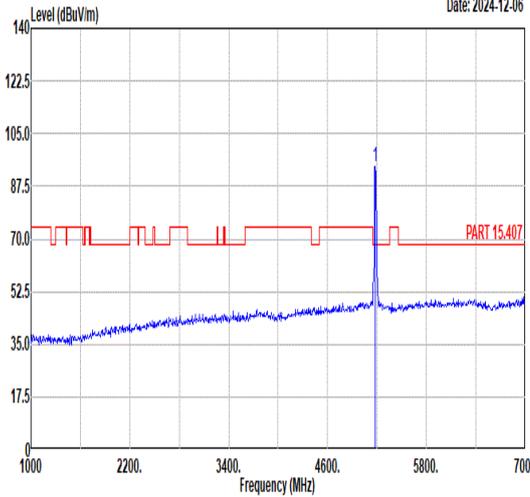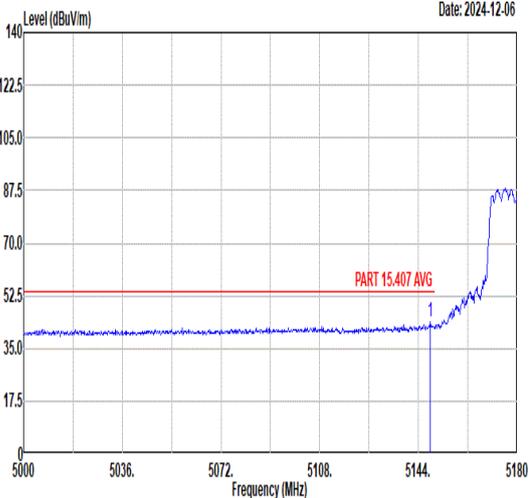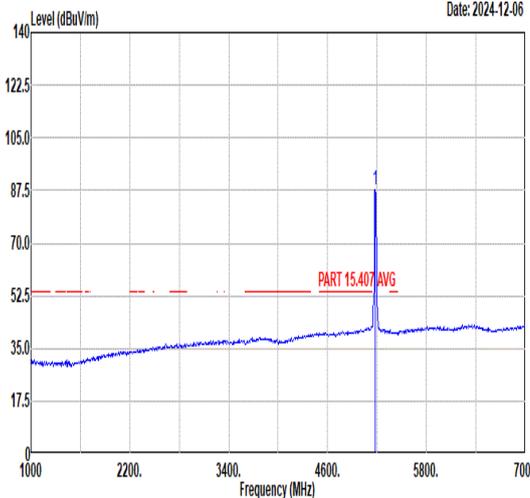

		10																																																																														
Mode	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																															
ANT	STBC 0+1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5084.96</td> <td>49.84</td> <td>74.00</td> <td>-24.16</td> <td>40.77</td> <td>33.95</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5084.96	49.84	74.00	-24.16	40.77	33.95	7.88	32.76	100	176	PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.94</td> <td>-----</td> <td>-----</td> <td>84.72</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	93.94	-----	-----	84.72	34.01	7.94	32.73	100	176	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5084.96	49.84	74.00	-24.16	40.77	33.95	7.88	32.76	100	176	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5180.00	93.94	-----	-----	84.72	34.01	7.94	32.73	100	176	PEAK																																																																					
Avg	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.32</td> <td>43.97</td> <td>54.00</td> <td>-10.03</td> <td>34.80</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.32	43.97	54.00	-10.03	34.80	33.99	7.92	32.74	100	176	AVERAGE	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>87.76</td> <td>-----</td> <td>-----</td> <td>78.56</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>100</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	87.76	-----	-----	78.56	34.00	7.93	32.73	100	176	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5148.32	43.97	54.00	-10.03	34.80	33.99	7.92	32.74	100	176	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5180.00	87.76	-----	-----	78.56	34.00	7.93	32.73	100	176	AVERAGE																																																																					



Mode	10																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																	
ANT	STBC 0+1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.19</td> <td>68.30</td> <td>-23.11</td> <td>61.89</td> <td>37.16</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>56.46</td> <td>39.42</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.19	68.30	-23.11	61.89	37.16	10.73	64.59	--	--	Peak	2	15540.00	45.22	74.00	-28.78	56.46	39.42	12.72	63.38	--	--	Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.87</td> <td>68.30</td> <td>-22.43</td> <td>62.57</td> <td>37.16</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>56.43</td> <td>39.42</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.87	68.30	-22.43	62.57	37.16	10.73	64.59	--	--	Peak	2	15540.00	45.19	74.00	-28.81	56.43	39.42	12.72	63.38	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	45.19	68.30	-23.11	61.89	37.16	10.73	64.59	--	--	Peak																																																																																							
2	15540.00	45.22	74.00	-28.78	56.46	39.42	12.72	63.38	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	45.87	68.30	-22.43	62.57	37.16	10.73	64.59	--	--	Peak																																																																																							
2	15540.00	45.19	74.00	-28.81	56.43	39.42	12.72	63.38	--	--	Peak																																																																																							



Mode	11																																																																																																						
	Harmonic																																																																																																						
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																						
ANT	STBC 0+1																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.86</td> <td>68.30</td> <td>-22.44</td> <td>62.48</td> <td>37.35</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.70</td> <td>74.00</td> <td>-28.30</td> <td>57.14</td> <td>39.46</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.86	68.30	-22.44	62.48	37.35	10.79	64.76	--	-- Peak	2	15660.00	45.70	74.00	-28.30	57.14	39.46	12.72	63.62	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.99</td> <td>68.30</td> <td>-22.31</td> <td>62.61</td> <td>37.35</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>44.65</td> <td>74.00</td> <td>-29.35</td> <td>56.09</td> <td>39.46</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.99	68.30	-22.31	62.61	37.35	10.79	64.76	--	-- Peak	2	15660.00	44.65	74.00	-29.35	56.09	39.46	12.72	63.62	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	45.86	68.30	-22.44	62.48	37.35	10.79	64.76	--	-- Peak																																																																																													
2	15660.00	45.70	74.00	-28.30	57.14	39.46	12.72	63.62	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	45.99	68.30	-22.31	62.61	37.35	10.79	64.76	--	-- Peak																																																																																													
2	15660.00	44.65	74.00	-29.35	56.09	39.46	12.72	63.62	--	-- Peak																																																																																													



Mode	12																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																														
ANT	STBC 0+1																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p style="text-align: right;">Date: 2024-12-08</p>	<p style="text-align: right;">Date: 2024-12-08</p>																																																																																													
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Apos</th> <th rowspan="2">Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.81</td> <td>68.30</td> <td>-21.49</td> <td>63.39</td> <td>37.45</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>57.64</td> <td>39.49</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.81	68.30	-21.49	63.39	37.45	10.82	64.85	--	--	Peak	2	15720.00	46.10	74.00	-27.90	57.64	39.49	12.71	63.74	--	--	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Apos</th> <th rowspan="2">Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.81</td> <td>68.30</td> <td>-22.49</td> <td>62.39</td> <td>37.45</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>45.20</td> <td>74.00</td> <td>-28.80</td> <td>56.74</td> <td>39.49</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	45.81	68.30	-22.49	62.39	37.45	10.82	64.85	--	--	Peak	2	15720.00	45.20	74.00	-28.80	56.74	39.49	12.71	63.74	--	--
Limit	Read		Ant	Cable							Preamp	Apos	Tpos	Remark																																																																																	
	Freq	Level			Line Margin																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	10480.00	46.81	68.30	-21.49	63.39	37.45	10.82	64.85	--	--	Peak																																																																																				
2	15720.00	46.10	74.00	-27.90	57.64	39.49	12.71	63.74	--	--	Peak																																																																																				
Limit	Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																							
	Freq	Level							Line Margin																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	10480.00	45.81	68.30	-22.49	62.39	37.45	10.82	64.85	--	--	Peak																																																																																				
2	15720.00	45.20	74.00	-28.80	56.74	39.49	12.71	63.74	--	--	Peak																																																																																				







Mode	13																																																																								
	Harmonic																																																																								
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																								
ANT	STBC 0+1																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>47.06</td> <td>68.30</td> <td>-21.24</td> <td>63.52</td> <td>37.53</td> <td>10.85</td> <td>64.84</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>46.14</td> <td>74.00</td> <td>-27.86</td> <td>57.79</td> <td>39.51</td> <td>12.71</td> <td>63.87</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1 10520.00	47.06	68.30	-21.24	63.52	37.53	10.85	64.84	-- -- Peak	2 15780.00	46.14	74.00	-27.86	57.79	39.51	12.71	63.87	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>46.03</td> <td>68.30</td> <td>-22.27</td> <td>62.49</td> <td>37.53</td> <td>10.85</td> <td>64.84</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>45.27</td> <td>74.00</td> <td>-28.73</td> <td>56.92</td> <td>39.51</td> <td>12.71</td> <td>63.87</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1 10520.00	46.03	68.30	-22.27	62.49	37.53	10.85	64.84	-- -- Peak	2 15780.00	45.27	74.00	-28.73	56.92	39.51	12.71	63.87
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																	
1 10520.00	47.06	68.30	-21.24	63.52	37.53	10.85	64.84	-- -- Peak																																																																	
2 15780.00	46.14	74.00	-27.86	57.79	39.51	12.71	63.87	-- -- Peak																																																																	
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																	
1 10520.00	46.03	68.30	-22.27	62.49	37.53	10.85	64.84	-- -- Peak																																																																	
2 15780.00	45.27	74.00	-28.73	56.92	39.51	12.71	63.87	-- -- Peak																																																																	



Mode	14																																														
	Harmonic																																														
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz																																														
ANT	STBC 0+1																																														
Pol.	Horizontal	Vertical																																													
Peak Avg																																															
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Apos</th> <th rowspan="2">Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>62.29</td> <td>37.70</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>44.49</td> <td>74.00</td> <td>-29.51</td> <td>56.33</td> <td>39.56</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read		Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.33	74.00	-27.67	62.29	37.70	10.91	64.57	--	--	Peak	2	15900.00	44.49	74.00	-29.51	56.33	39.56	12.71	64.11	--	--
Limit	Read			Ant	Cable							Preamp	Apos	Tpos	Remark																																
	Freq	Level	Line Margin																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																						
1	10600.00	46.33	74.00	-27.67	62.29	37.70	10.91	64.57	--	--	Peak																																				
2	15900.00	44.49	74.00	-29.51	56.33	39.56	12.71	64.11	--	--	Peak																																				

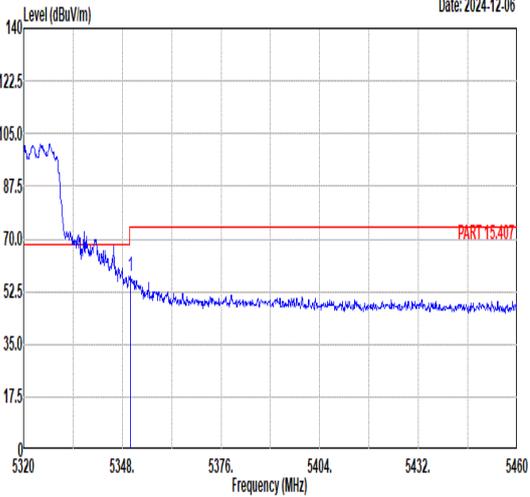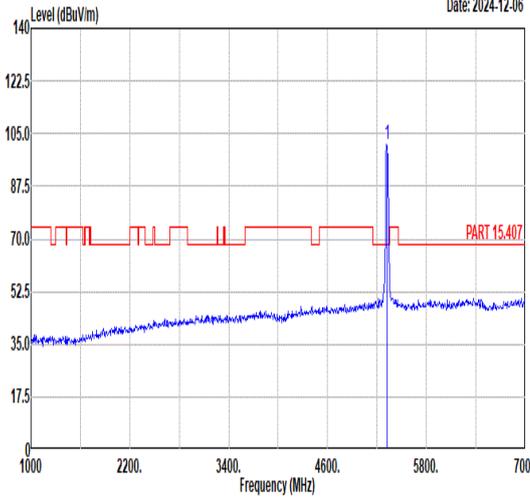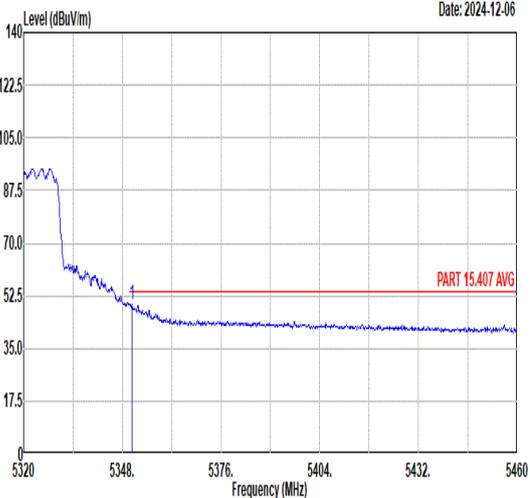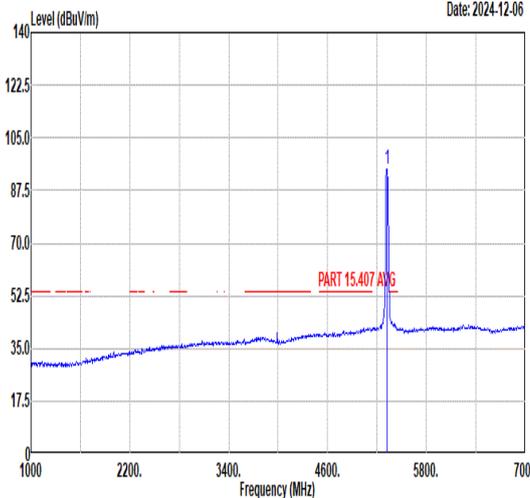

		15																																																																								
Mode	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>57.80</td> <td>74.00</td> <td>-16.20</td> <td>48.02</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.38	57.80	74.00	-16.20	48.02	34.11	8.33	32.66	100	22	PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.64</td> <td>-----</td> <td>-----</td> <td>91.99</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	101.64	-----	-----	91.99	34.09	8.23	32.67	100	22	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.38	57.80	74.00	-16.20	48.02	34.11	8.33	32.66	100	22	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	101.64	-----	-----	91.99	34.09	8.23	32.67	100	22	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.66</td> <td>49.92</td> <td>54.00</td> <td>-4.08</td> <td>40.14</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.66	49.92	54.00	-4.08	40.14	34.11	8.33	32.66	100	22	AVERAGE	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>94.75</td> <td>-----</td> <td>-----</td> <td>85.10</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>100</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	94.75	-----	-----	85.10	34.09	8.23	32.67	100	22	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.66	49.92	54.00	-4.08	40.14	34.11	8.33	32.66	100	22	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	94.75	-----	-----	85.10	34.09	8.23	32.67	100	22	AVERAGE																																																															







		15																																																																				
Mode	Band Edge																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																					
ANT	STBC 0+1																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5352.90</td> <td>51.57</td> <td>74.00</td> <td>-22.43</td> <td>41.78</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> <td>150</td> <td>174 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5352.90	51.57	74.00	-22.43	41.78	34.11	8.34	32.66	150	174 PEAK	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>98.52</td> <td>-----</td> <td>-----</td> <td>88.84</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>150</td> <td>174 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	98.52	-----	-----	88.84	34.09	8.26	32.67	150	174 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5352.90	51.57	74.00	-22.43	41.78	34.11	8.34	32.66	150	174 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	98.52	-----	-----	88.84	34.09	8.26	32.67	150	174 PEAK																																																													
Avg	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.38</td> <td>44.80</td> <td>54.00</td> <td>-9.20</td> <td>35.02</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>150</td> <td>174 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.38	44.80	54.00	-9.20	35.02	34.11	8.33	32.66	150	174 AVERAGE	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>91.55</td> <td>-----</td> <td>-----</td> <td>81.88</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>150</td> <td>174 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	91.55	-----	-----	81.88	34.09	8.25	32.67	150	174 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5350.38	44.80	54.00	-9.20	35.02	34.11	8.33	32.66	150	174 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	91.55	-----	-----	81.88	34.09	8.25	32.67	150	174 AVERAGE																																																													







Mode	15																																																																																				
	Harmonic																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																				
ANT	STBC 0+1																																																																																				
Pol.	Horizontal	Vertical																																																																																			
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.62</td> <td>74.00</td> <td>-28.38</td> <td>61.33</td> <td>37.78</td> <td>10.94 64.43</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>44.62</td> <td>74.00</td> <td>-29.38</td> <td>56.56</td> <td>39.59</td> <td>12.70 64.23</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10640.00	45.62	74.00	-28.38	61.33	37.78	10.94 64.43	-- -- Peak	2	15960.00	44.62	74.00	-29.38	56.56	39.59	12.70 64.23	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.51</td> <td>74.00</td> <td>-27.49</td> <td>62.22</td> <td>37.78</td> <td>10.94 64.43</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>45.05</td> <td>74.00</td> <td>-28.95</td> <td>56.99</td> <td>39.59</td> <td>12.70 64.23</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10640.00	46.51	74.00	-27.49	62.22	37.78	10.94 64.43	-- -- Peak	2	15960.00	45.05	74.00	-28.95	56.99	39.59	12.70 64.23
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																														
1	10640.00	45.62	74.00	-28.38	61.33	37.78	10.94 64.43	-- -- Peak																																																																													
2	15960.00	44.62	74.00	-29.38	56.56	39.59	12.70 64.23	-- -- Peak																																																																													
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																														
1	10640.00	46.51	74.00	-27.49	62.22	37.78	10.94 64.43	-- -- Peak																																																																													
2	15960.00	45.05	74.00	-28.95	56.99	39.59	12.70 64.23	-- -- Peak																																																																													

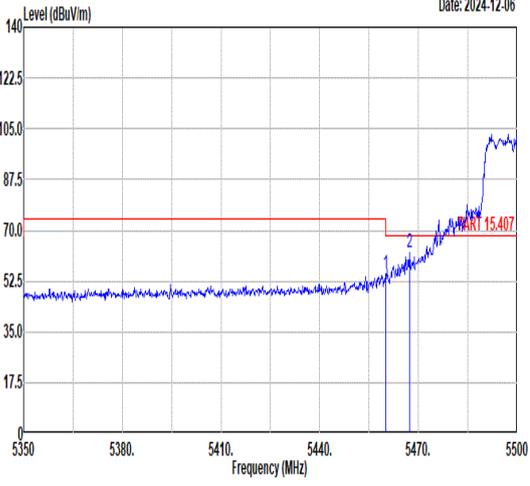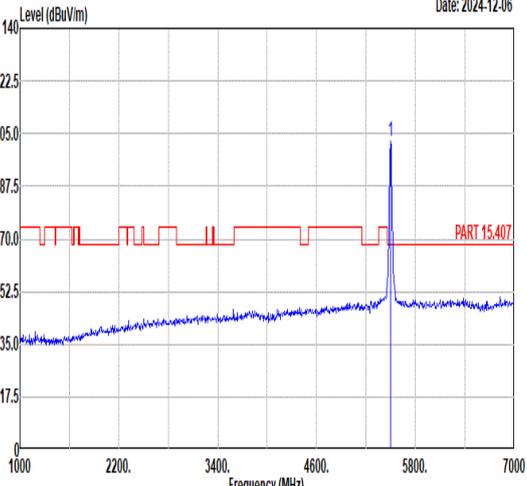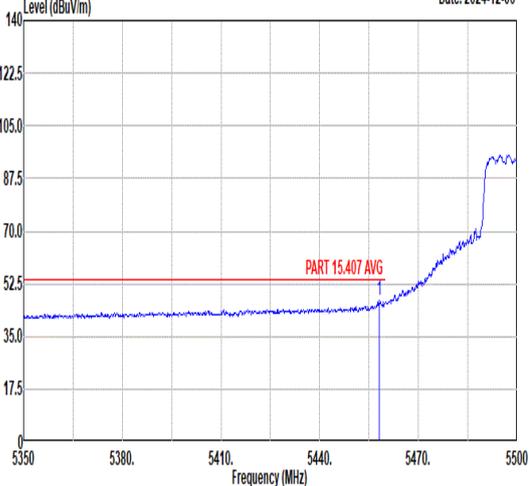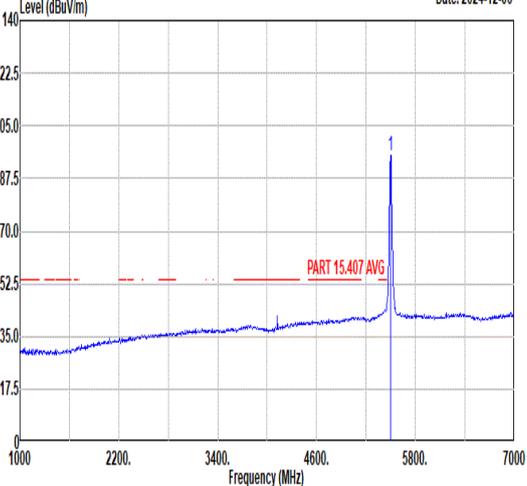

		16																																																																																								
Mode	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																									
ANT	STBC 0+1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>54.77</td> <td>74.00</td> <td>-19.23</td> <td>44.80</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>194</td> <td>22 PEAK</td> </tr> <tr> <td>2</td> <td>5467.30</td> <td>62.23</td> <td>-6.07</td> <td>52.26</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>194</td> <td>22 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.95	54.77	74.00	-19.23	44.80	34.17	8.41	32.61	194	22 PEAK	2	5467.30	62.23	-6.07	52.26	34.18	8.40	32.61	194	22 PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.38</td> <td>-----</td> <td>-----</td> <td>92.43</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>194</td> <td>22 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.38	-----	-----	92.43	34.20	8.36	32.61	194	22 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5459.95	54.77	74.00	-19.23	44.80	34.17	8.41	32.61	194	22 PEAK																																																																																
2	5467.30	62.23	-6.07	52.26	34.18	8.40	32.61	194	22 PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5500.00	102.38	-----	-----	92.43	34.20	8.36	32.61	194	22 PEAK																																																																																
Avg	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.15</td> <td>46.88</td> <td>54.00</td> <td>-7.12</td> <td>36.91</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>194</td> <td>22 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.15	46.88	54.00	-7.12	36.91	34.17	8.41	32.61	194	22 AVERAGE	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.06</td> <td>-----</td> <td>-----</td> <td>85.12</td> <td>34.20</td> <td>8.35</td> <td>32.61</td> <td>194</td> <td>22 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	95.06	-----	-----	85.12	34.20	8.35	32.61	194	22 AVERAGE										
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5458.15	46.88	54.00	-7.12	36.91	34.17	8.41	32.61	194	22 AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5500.00	95.06	-----	-----	85.12	34.20	8.35	32.61	194	22 AVERAGE																																																																																

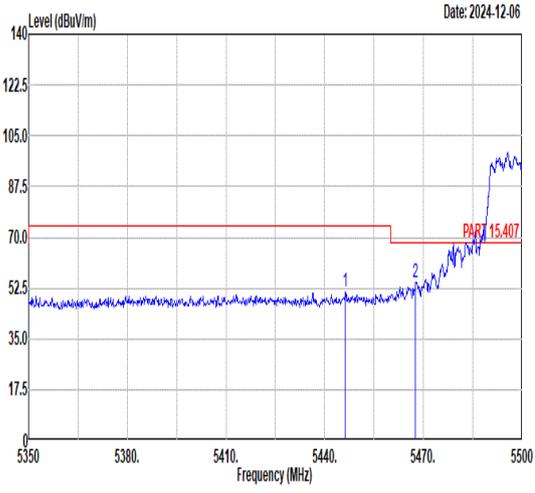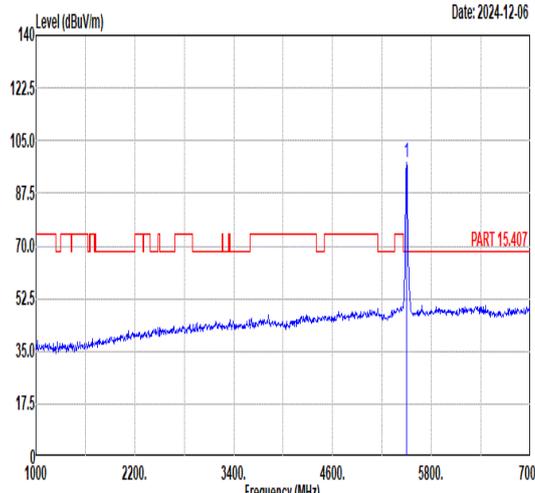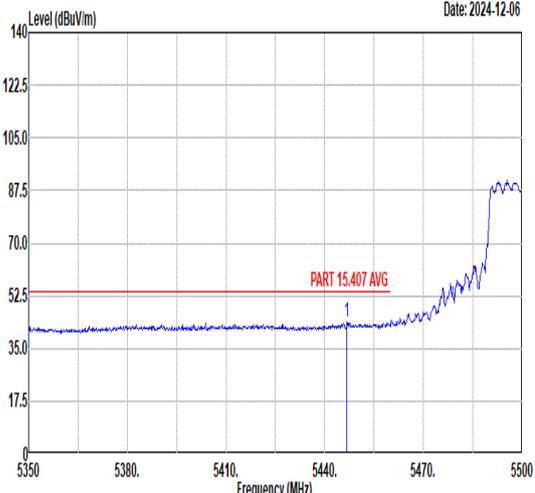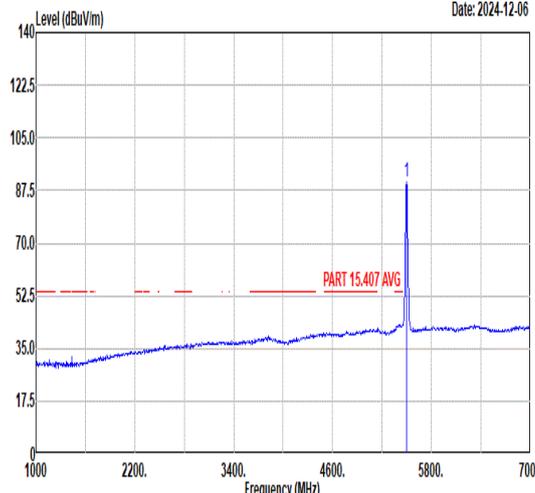

		16																																																																																									
Mode	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																										
ANT	STBC 0+1																																																																																										
Pol.	Vertical	Fundamental																																																																																									
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.30</td> <td>51.09</td> <td>74.00</td> <td>-22.91</td> <td>41.11</td> <td>34.17</td> <td>8.43</td> <td>32.62</td> <td>148</td> <td>170 PEAK</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>54.65</td> <td>68.30</td> <td>-13.65</td> <td>44.68</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>148</td> <td>170 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.30	51.09	74.00	-22.91	41.11	34.17	8.43	32.62	148	170 PEAK	2	5467.60	54.65	68.30	-13.65	44.68	34.18	8.40	32.61	148	170 PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.80</td> <td>-----</td> <td>-----</td> <td>87.85</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>148</td> <td>170 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	97.80	-----	-----	87.85	34.19	8.36	32.60	148	170 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5446.30	51.09	74.00	-22.91	41.11	34.17	8.43	32.62	148	170 PEAK																																																																																	
2	5467.60	54.65	68.30	-13.65	44.68	34.18	8.40	32.61	148	170 PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5500.00	97.80	-----	-----	87.85	34.19	8.36	32.60	148	170 PEAK																																																																																	
Avg	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.75</td> <td>43.66</td> <td>54.00</td> <td>-10.34</td> <td>33.68</td> <td>34.17</td> <td>8.43</td> <td>32.62</td> <td>148</td> <td>170 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.75	43.66	54.00	-10.34	33.68	34.17	8.43	32.62	148	170 AVERAGE	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>90.39</td> <td>-----</td> <td>-----</td> <td>80.44</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>148</td> <td>170 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	90.39	-----	-----	80.44	34.19	8.36	32.60	148	170 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5446.75	43.66	54.00	-10.34	33.68	34.17	8.43	32.62	148	170 AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5500.00	90.39	-----	-----	80.44	34.19	8.36	32.60	148	170 AVERAGE																																																																																	



Mode	16																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																															
ANT	STBC 0+1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.26</td> <td>74.00</td> <td>-26.74</td> <td>60.76</td> <td>38.49</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.50</td> <td>68.30</td> <td>-22.80</td> <td>57.29</td> <td>40.39</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	47.26	74.00	-26.74	60.76	38.49	11.21	63.20	--	--	Peak	2	16500.00	45.50	68.30	-22.80	57.29	40.39	12.91	65.09	--	--	Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>49.28</td> <td>74.00</td> <td>-24.72</td> <td>62.78</td> <td>38.49</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.70</td> <td>68.30</td> <td>-22.60</td> <td>57.49</td> <td>40.39</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	49.28	74.00	-24.72	62.78	38.49	11.21	63.20	--	--	Peak	2	16500.00	45.70	68.30	-22.60	57.49	40.39	12.91	65.09	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11000.00	47.26	74.00	-26.74	60.76	38.49	11.21	63.20	--	--	Peak																																																																																					
2	16500.00	45.50	68.30	-22.80	57.29	40.39	12.91	65.09	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11000.00	49.28	74.00	-24.72	62.78	38.49	11.21	63.20	--	--	Peak																																																																																					
2	16500.00	45.70	68.30	-22.60	57.49	40.39	12.91	65.09	--	--	Peak																																																																																					



17																																							
Mode	Harmonic																																						
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																						
ANT	STBC 0+1																																						
Pol.	Horizontal																																						
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.85</td> <td>74.00</td> <td>-26.15</td> <td>61.61</td> <td>38.05</td> <td>11.29</td> <td>63.10</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.66</td> <td>68.30</td> <td>-22.64</td> <td>57.16</td> <td>40.59</td> <td>13.01</td> <td>65.10</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	11160.00	47.85	74.00	-26.15	61.61	38.05	11.29	63.10	-- -- Peak	2	16740.00	45.66	68.30	-22.64	57.16	40.59	13.01	65.10	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																															
1	11160.00	47.85	74.00	-26.15	61.61	38.05	11.29	63.10	-- -- Peak																														
2	16740.00	45.66	68.30	-22.64	57.16	40.59	13.01	65.10	-- -- Peak																														
	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>61.67</td> <td>38.05</td> <td>11.29</td> <td>63.10</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.32</td> <td>68.30</td> <td>-21.98</td> <td>57.82</td> <td>40.59</td> <td>13.01</td> <td>65.10</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	11160.00	47.91	74.00	-26.09	61.67	38.05	11.29	63.10	-- -- Peak	2	16740.00	46.32	68.30	-21.98	57.82	40.59	13.01	65.10	-- -- Peak
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																															
1	11160.00	47.91	74.00	-26.09	61.67	38.05	11.29	63.10	-- -- Peak																														
2	16740.00	46.32	68.30	-21.98	57.82	40.59	13.01	65.10	-- -- Peak																														



	18																																																																					
Mode	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																					
ANT	STBC 0+1																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>62.59</td> <td>68.30</td> <td>-5.71</td> <td>52.09</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>100</td> <td>326 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5725.48	62.59	68.30	-5.71	52.09	34.60	8.68	32.78	100	326 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.75</td> <td>-----</td> <td>-----</td> <td>89.39</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>100</td> <td>326 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	99.75	-----	-----	89.39	34.55	8.57	32.76	100	326 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5725.48	62.59	68.30	-5.71	52.09	34.60	8.68	32.78	100	326 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5700.00	99.75	-----	-----	89.39	34.55	8.57	32.76	100	326 PEAK																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.00</td> <td>-----</td> <td>-----</td> <td>83.60</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>100</td> <td>326 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	94.00	-----	-----	83.60	34.56	8.60	32.76	100	326 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5700.00	94.00	-----	-----	83.60	34.56	8.60	32.76	100	326 AVERAGE																																																													



18																																				
Band Edge																																				
U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																				
ANT STBC 0+1																																				
Pol.	Vertical																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.78</td> <td>54.92</td> <td>68.30</td> <td>-13.38</td> <td>44.42</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>152</td> <td>155 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5726.78	54.92	68.30	-13.38	44.42	34.60	8.68	32.78	152	155 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																												
1 5726.78	54.92	68.30	-13.38	44.42	34.60	8.68	32.78	152	155 PEAK																											
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.76</td> <td>-----</td> <td>-----</td> <td>86.40</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>152</td> <td>155 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	96.76	-----	-----	86.40	34.55	8.57	32.76	152	155 PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																												
1 5700.00	96.76	-----	-----	86.40	34.55	8.57	32.76	152	155 PEAK																											
Avg	Blank																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>89.89</td> <td>-----</td> <td>-----</td> <td>79.55</td> <td>34.54</td> <td>8.55</td> <td>32.75</td> <td>152</td> <td>155 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	89.89	-----	-----	79.55	34.54	8.55	32.75	152	155 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																												
1 5700.00	89.89	-----	-----	79.55	34.54	8.55	32.75	152	155 AVERAGE																											



Mode	18																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																																
ANT	STBC 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.94</td> <td>74.00</td> <td>-28.06</td> <td>60.10</td> <td>37.39</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.65</td> <td>68.30</td> <td>-19.65</td> <td>59.69</td> <td>41.00</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	45.94	74.00	-28.06	60.10	37.39	11.41	62.96	--	--	Peak	2	17100.00	48.65	68.30	-19.65	59.69	41.00	13.14	65.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>59.42</td> <td>37.39</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.39</td> <td>68.30</td> <td>-20.91</td> <td>58.43</td> <td>41.00</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	45.26	74.00	-28.74	59.42	37.39	11.41	62.96	--	--	Peak	2	17100.00	47.39	68.30	-20.91	58.43	41.00	13.14	65.18	--	--
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	45.94	74.00	-28.06	60.10	37.39	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	48.65	68.30	-19.65	59.69	41.00	13.14	65.18	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	45.26	74.00	-28.74	59.42	37.39	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	47.39	68.30	-20.91	58.43	41.00	13.14	65.18	--	--	Peak																																																																																						







19																																					
Mode	Band Edge - L																																				
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																				
ANT	STBC 0+1																																				
Pol.	Horizontal																																				
Peak	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.35</td> <td>59.88</td> <td>74.00</td> <td>-14.12</td> <td>50.71</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>219</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5145.35	59.88	74.00	-14.12	50.71	33.99	7.92	32.74	219	347	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5145.35	59.88	74.00	-14.12	50.71	33.99	7.92	32.74	219	347	PEAK																										
<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>88.68</td> <td>34.01</td> <td>7.94</td> <td>32.72</td> <td>219</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	97.91	-----	-----	88.68	34.01	7.94	32.72	219	347	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5190.00	97.91	-----	-----	88.68	34.01	7.94	32.72	219	347	PEAK																										
Avg	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.63</td> <td>50.76</td> <td>54.00</td> <td>-3.24</td> <td>41.59</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>219</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5147.63	50.76	54.00	-3.24	41.59	33.99	7.92	32.74	219	347	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5147.63	50.76	54.00	-3.24	41.59	33.99	7.92	32.74	219	347	AVERAGE																										
<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>91.31</td> <td>-----</td> <td>-----</td> <td>82.06</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>219</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	91.31	-----	-----	82.06	34.02	7.95	32.72	219	347	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5190.00	91.31	-----	-----	82.06	34.02	7.95	32.72	219	347	AVERAGE																										



Mode	19																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																										
ANT	STBC 0+1																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.93</td> <td>50.68</td> <td>74.00</td> <td>-23.32</td> <td>40.73</td> <td>34.14</td> <td>8.45</td> <td>32.64</td> <td>219</td> <td>347 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5394.93	50.68	74.00	-23.32	40.73	34.14	8.45	32.64	219	347 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5394.93	50.68	74.00	-23.32	40.73	34.14	8.45	32.64	219	347 PEAK																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.67</td> <td>42.19</td> <td>54.00</td> <td>-11.81</td> <td>32.38</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>219</td> <td>347 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5357.67	42.19	54.00	-11.81	32.38	34.11	8.35	32.65	219	347 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5357.67	42.19	54.00	-11.81	32.38	34.11	8.35	32.65	219	347 AVERAGE																																	

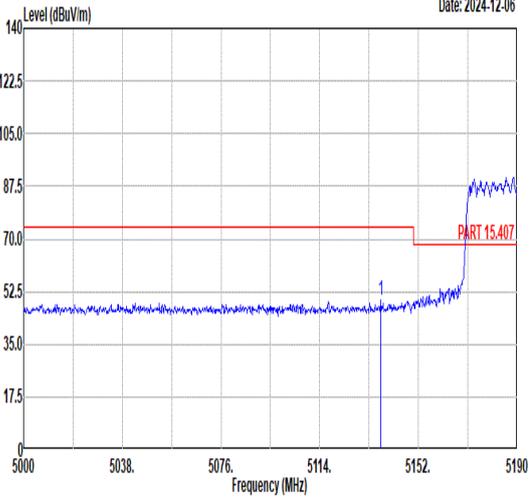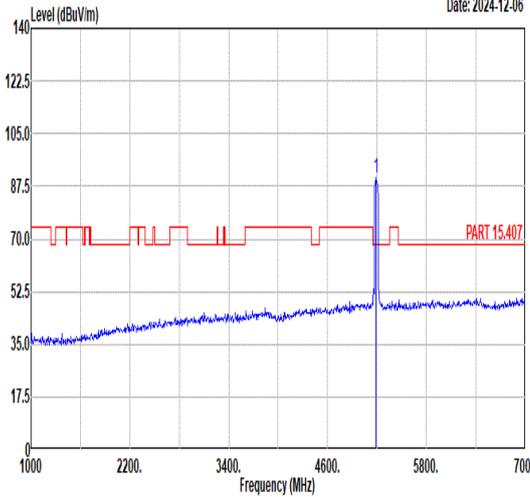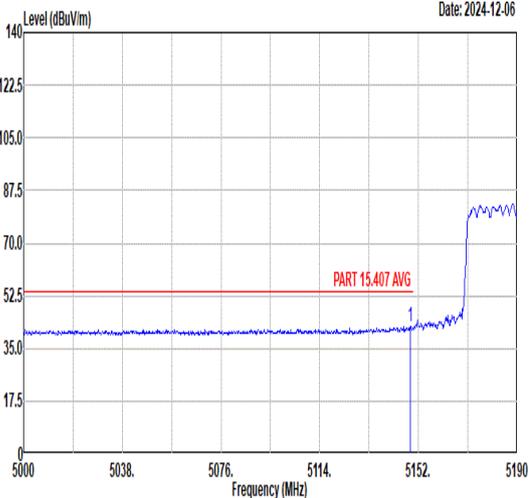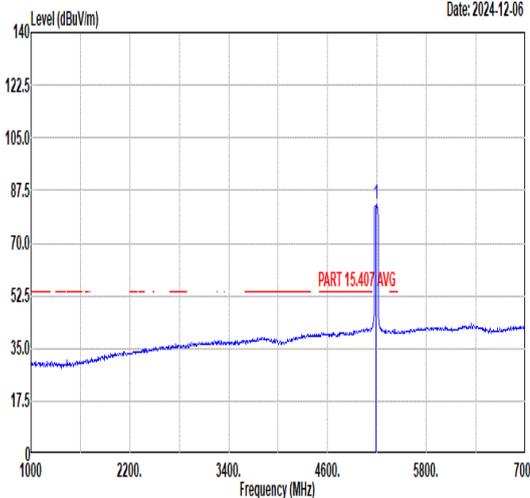

		19																																																																										
Mode	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																											
ANT	STBC 0+1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.56</td> <td>49.61</td> <td>74.00</td> <td>-24.39</td> <td>40.46</td> <td>33.98</td> <td>7.91</td> <td>32.74</td> <td>112</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5137.56	49.61	74.00	-24.39	40.46	33.98	7.91	32.74	112	175	PEAK	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>90.17</td> <td>-----</td> <td>-----</td> <td>80.94</td> <td>34.01</td> <td>7.94</td> <td>32.72</td> <td>112</td> <td>175</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	90.17	-----	-----	80.94	34.01	7.94	32.72	112	175	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5137.56	49.61	74.00	-24.39	40.46	33.98	7.91	32.74	112	175	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5190.00	90.17	-----	-----	80.94	34.01	7.94	32.72	112	175	PEAK																																																																	
Avg	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>33.19</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>112</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.96	42.36	54.00	-11.64	33.19	33.99	7.92	32.74	112	175	AVERAGE	 <p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>82.73</td> <td>-----</td> <td>-----</td> <td>73.48</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>112</td> <td>175</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	82.73	-----	-----	73.48	34.02	7.95	32.72	112	175	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5148.96	42.36	54.00	-11.64	33.19	33.99	7.92	32.74	112	175	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5190.00	82.73	-----	-----	73.48	34.02	7.95	32.72	112	175	AVERAGE																																																																	



Mode	19																																			
	Band Edge - R																																			
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																			
ANT	STBC 0+1																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5438.13</td> <td>48.96</td> <td>74.00</td> <td>-25.04</td> <td>38.98</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>112</td> <td>175 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5438.13	48.96	74.00	-25.04	38.98	34.16	8.44	32.62	112	175 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5438.13	48.96	74.00	-25.04	38.98	34.16	8.44	32.62	112	175 PEAK																											
Avg	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5388.72</td> <td>41.35</td> <td>54.00</td> <td>-12.65</td> <td>31.43</td> <td>34.13</td> <td>8.43</td> <td>32.64</td> <td>112</td> <td>175 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5388.72	41.35	54.00	-12.65	31.43	34.13	8.43	32.64	112	175 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5388.72	41.35	54.00	-12.65	31.43	34.13	8.43	32.64	112	175 AVERAGE																											



		20																																																																								
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5083.95</td> <td>50.67</td> <td>74.00</td> <td>-23.33</td> <td>41.62</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> <td>226</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5083.95	50.67	74.00	-23.33	41.62	33.95	7.87	32.77	226	115	PEAK	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>101.57</td> <td>-----</td> <td>-----</td> <td>92.16</td> <td>34.05</td> <td>8.06</td> <td>32.70</td> <td>226</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	101.57	-----	-----	92.16	34.05	8.06	32.70	226	115	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5083.95	50.67	74.00	-23.33	41.62	33.95	7.87	32.77	226	115	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	101.57	-----	-----	92.16	34.05	8.06	32.70	226	115	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.14</td> <td>43.03</td> <td>54.00</td> <td>-10.97</td> <td>34.03</td> <td>33.93</td> <td>7.85</td> <td>32.78</td> <td>226</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5050.14	43.03	54.00	-10.97	34.03	33.93	7.85	32.78	226	115	AVERAGE	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>93.21</td> <td>-----</td> <td>-----</td> <td>83.82</td> <td>34.05</td> <td>8.04</td> <td>32.70</td> <td>226</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	93.21	-----	-----	83.82	34.05	8.04	32.70	226	115	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5050.14	43.03	54.00	-10.97	34.03	33.93	7.85	32.78	226	115	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	93.21	-----	-----	83.82	34.05	8.04	32.70	226	115	AVERAGE																																																															



Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																					
ANT	STBC 0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.19</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>43.61</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>226</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5357.19	53.42	74.00	-20.58	43.61	34.11	8.35	32.65	226	115	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5357.19	53.42	74.00	-20.58	43.61	34.11	8.35	32.65	226	115	PEAK																											
Avg	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.27</td> <td>46.41</td> <td>54.00</td> <td>-7.59</td> <td>36.61</td> <td>34.11</td> <td>8.34</td> <td>32.65</td> <td>226</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5356.27	46.41	54.00	-7.59	36.61	34.11	8.34	32.65	226	115	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5356.27	46.41	54.00	-7.59	36.61	34.11	8.34	32.65	226	115	AVERAGE																											



	20																																																																									
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5086.96</td> <td>49.20</td> <td>74.00</td> <td>-24.80</td> <td>40.15</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> <td>119</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5086.96	49.20	74.00	-24.80	40.15	33.95	7.87	32.77	119	171	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>93.13</td> <td>-----</td> <td>-----</td> <td>83.74</td> <td>34.05</td> <td>8.04</td> <td>32.70</td> <td>119</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	93.13	-----	-----	83.74	34.05	8.04	32.70	119	171	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5086.96	49.20	74.00	-24.80	40.15	33.95	7.87	32.77	119	171	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	93.13	-----	-----	83.74	34.05	8.04	32.70	119	171	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5086.25</td> <td>41.53</td> <td>54.00</td> <td>-12.47</td> <td>32.46</td> <td>33.95</td> <td>7.88</td> <td>32.76</td> <td>119</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5086.25	41.53	54.00	-12.47	32.46	33.95	7.88	32.76	119	171	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>86.01</td> <td>-----</td> <td>-----</td> <td>76.70</td> <td>34.03</td> <td>7.99</td> <td>32.71</td> <td>119</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	86.01	-----	-----	76.70	34.03	7.99	32.71	119	171	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5086.25	41.53	54.00	-12.47	32.46	33.95	7.88	32.76	119	171	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	86.01	-----	-----	76.70	34.03	7.99	32.71	119	171	AVERAGE																																																															



Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																					
ANT	STBC 0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5434.24</td> <td>49.48</td> <td>74.00</td> <td>-24.52</td> <td>39.50</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>119</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5434.24	49.48	74.00	-24.52	39.50	34.16	8.44	32.62	119	171	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5434.24	49.48	74.00	-24.52	39.50	34.16	8.44	32.62	119	171	PEAK																											
Avg	<p>Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5428.72</td> <td>42.51</td> <td>54.00</td> <td>-11.49</td> <td>32.53</td> <td>34.16</td> <td>8.45</td> <td>32.63</td> <td>119</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5428.72	42.51	54.00	-11.49	32.53	34.16	8.45	32.63	119	171	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5428.72	42.51	54.00	-11.49	32.53	34.16	8.45	32.63	119	171	AVERAGE																											



21																																									
Mode	Band Edge - L																																								
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																								
ANT	STBC 0+1																																								
Pol.	Horizontal																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5074.52</td> <td>51.21</td> <td>74.00</td> <td>-22.79</td> <td>42.16</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>253</td> <td>25 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5074.52	51.21	74.00	-22.79	42.16	33.95	7.87	32.77							253	25 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																		
1 5074.52	51.21	74.00	-22.79	42.16	33.95	7.87	32.77																																		
						253	25 PEAK																																		
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>99.42</td> <td>-----</td> <td>-----</td> <td>89.95</td> <td>34.06</td> <td>8.10</td> <td>32.69</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>253</td> <td>25 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5270.00	99.42	-----	-----	89.95	34.06	8.10	32.69							253	25 PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																		
1 5270.00	99.42	-----	-----	89.95	34.06	8.10	32.69																																		
						253	25 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5089.64</td> <td>43.81</td> <td>54.00</td> <td>-10.19</td> <td>34.73</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>253</td> <td>25 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5089.64	43.81	54.00	-10.19	34.73	33.96	7.88	32.76							253	25 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																		
1 5089.64	43.81	54.00	-10.19	34.73	33.96	7.88	32.76																																		
						253	25 AVERAGE																																		
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>94.20</td> <td>-----</td> <td>-----</td> <td>84.73</td> <td>34.06</td> <td>8.10</td> <td>32.69</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>253</td> <td>25 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5270.00	94.20	-----	-----	84.73	34.06	8.10	32.69							253	25 AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																		
1 5270.00	94.20	-----	-----	84.73	34.06	8.10	32.69																																		
						253	25 AVERAGE																																		



	21																																						
Mode	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																						
ANT	STBC 0+1																																						
Pol.	Horizontal	Fundamental																																					
Peak																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5354.55</td> <td>52.47</td> <td>74.00</td> <td>-21.53</td> <td>42.68</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> <td>253</td> <td>25 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5354.55	52.47	74.00	-21.53	42.68	34.11	8.34	32.66	253
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5354.55	52.47	74.00	-21.53	42.68	34.11	8.34	32.66	253	25 PEAK																														
Avg																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.75</td> <td>46.16</td> <td>54.00</td> <td>-7.84</td> <td>36.38</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>253</td> <td>25 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.75	46.16	54.00	-7.84	36.38	34.11	8.33	32.66	253
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5350.75	46.16	54.00	-7.84	36.38	34.11	8.33	32.66	253	25 AVERAGE																														



		21																																																																								
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5058.05</td> <td>49.08</td> <td>74.00</td> <td>-24.92</td> <td>40.06</td> <td>33.94</td> <td>7.86</td> <td>32.78</td> <td>400</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5058.05	49.08	74.00	-24.92	40.06	33.94	7.86	32.78	400	168	PEAK	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>90.82</td> <td>-----</td> <td>-----</td> <td>81.30</td> <td>34.07</td> <td>8.14</td> <td>32.69</td> <td>400</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	90.82	-----	-----	81.30	34.07	8.14	32.69	400	168	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5058.05	49.08	74.00	-24.92	40.06	33.94	7.86	32.78	400	168	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	90.82	-----	-----	81.30	34.07	8.14	32.69	400	168	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5006.75</td> <td>41.87</td> <td>54.00</td> <td>-12.13</td> <td>32.93</td> <td>33.91</td> <td>7.83</td> <td>32.80</td> <td>400</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5006.75	41.87	54.00	-12.13	32.93	33.91	7.83	32.80	400	168	AVERAGE	<p style="text-align: right;">Date: 2024-12-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>83.93</td> <td>-----</td> <td>-----</td> <td>74.46</td> <td>34.06</td> <td>8.10</td> <td>32.69</td> <td>400</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	83.93	-----	-----	74.46	34.06	8.10	32.69	400	168	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5006.75	41.87	54.00	-12.13	32.93	33.91	7.83	32.80	400	168	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	83.93	-----	-----	74.46	34.06	8.10	32.69	400	168	AVERAGE																																																															



	21																																				
Mode	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																				
ANT	STBC 0+1																																				
Pol.	Vertical	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5371.65</td> <td>48.69</td> <td>74.00</td> <td>-25.31</td> <td>38.83</td> <td>34.12</td> <td>8.39</td> <td>32.65</td> <td>400</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5371.65	48.69	74.00	-25.31	38.83	34.12	8.39	32.65	400	168
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5371.65	48.69	74.00	-25.31	38.83	34.12	8.39	32.65	400	168	PEAK																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5396.54</td> <td>41.71</td> <td>54.00</td> <td>-12.29</td> <td>31.76</td> <td>34.14</td> <td>8.45</td> <td>32.64</td> <td>400</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5396.54	41.71	54.00	-12.29	31.76	34.14	8.45	32.64	400	168
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5396.54	41.71	54.00	-12.29	31.76	34.14	8.45	32.64	400	168	AVERAGE																										



22																																					
Mode	Band Edge - L																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																				
ANT	STBC 0+1																																				
Pol.	Horizontal																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.13</td> <td>51.18</td> <td>74.00</td> <td>-22.82</td> <td>42.09</td> <td>33.96</td> <td>7.89</td> <td>32.76</td> <td>203</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5100.13	51.18	74.00	-22.82	42.09	33.96	7.89	32.76	203	10	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5100.13	51.18	74.00	-22.82	42.09	33.96	7.89	32.76	203	10	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>98.21</td> <td>-----</td> <td>-----</td> <td>88.56</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>203</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	98.21	-----	-----	88.56	34.09	8.23	32.67	203	10	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5310.00	98.21	-----	-----	88.56	34.09	8.23	32.67	203	10	PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5106.02</td> <td>43.18</td> <td>54.00</td> <td>-10.82</td> <td>34.08</td> <td>33.97</td> <td>7.89</td> <td>32.76</td> <td>203</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5106.02	43.18	54.00	-10.82	34.08	33.97	7.89	32.76	203	10	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5106.02	43.18	54.00	-10.82	34.08	33.97	7.89	32.76	203	10	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>91.24</td> <td>-----</td> <td>-----</td> <td>81.59</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>203</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	91.24	-----	-----	81.59	34.09	8.23	32.67	203	10	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5310.00	91.24	-----	-----	81.59	34.09	8.23	32.67	203	10	AVERAGE																										



	22	
Mode	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	STBC 0+1	
Pol.	Horizontal	Fundamental
Peak	<p style="text-align: right;">Date: 2024-12-07</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2024-12-07</p>	
	Blank	



		22																																																																								
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5053.94</td> <td>48.89</td> <td>74.00</td> <td>-25.11</td> <td>39.89</td> <td>33.93</td> <td>7.85</td> <td>32.78</td> <td>387</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5053.94	48.89	74.00	-25.11	39.89	33.93	7.85	32.78	387	164	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>91.42</td> <td>-----</td> <td>-----</td> <td>81.79</td> <td>34.08</td> <td>8.22</td> <td>32.67</td> <td>387</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	91.42	-----	-----	81.79	34.08	8.22	32.67	387	164	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5053.94	48.89	74.00	-25.11	39.89	33.93	7.85	32.78	387	164	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	91.42	-----	-----	81.79	34.08	8.22	32.67	387	164	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5090.83</td> <td>41.70</td> <td>54.00</td> <td>-12.30</td> <td>32.62</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> <td>387</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5090.83	41.70	54.00	-12.30	32.62	33.96	7.88	32.76	387	164	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>82.43</td> <td>-----</td> <td>-----</td> <td>72.80</td> <td>34.08</td> <td>8.22</td> <td>32.67</td> <td>387</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	82.43	-----	-----	72.80	34.08	8.22	32.67	387	164	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5090.83	41.70	54.00	-12.30	32.62	33.96	7.88	32.76	387	164	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	82.43	-----	-----	72.80	34.08	8.22	32.67	387	164	AVERAGE																																																															



	22																																			
Mode	Band Edge - R																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																			
ANT	STBC 0+1																																			
Pol.	Vertical	Fundamental																																		
Peak																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5452.80</td> <td>48.78</td> <td>74.00</td> <td>-25.22</td> <td>38.81</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>387</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5452.80	48.78	74.00	-25.22	38.81	34.17	8.42	32.62	387	164
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5452.80	48.78	74.00	-25.22	38.81	34.17	8.42	32.62	387	164	PEAK																										
Avg																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5352.30</td> <td>41.55</td> <td>54.00</td> <td>-12.45</td> <td>31.77</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>387</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5352.30	41.55	54.00	-12.45	31.77	34.11	8.33	32.66	387	164
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5352.30	41.55	54.00	-12.45	31.77	34.11	8.33	32.66	387	164	AVERAGE																										



23																																													
Mode	Band Edge - L																																												
U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																													
ANT	STBC 0+1																																												
Pol.	Horizontal																																												
Peak	Fundamental																																												
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Freq</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>58.13</td> <td>74.00</td> <td>-15.87</td> <td>48.16</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>200</td> <td>10 PEAK</td> </tr> <tr> <td>2</td> <td>5464.40</td> <td>64.67</td> <td>68.30</td> <td>-3.63</td> <td>54.70</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>200</td> <td>10 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.44	58.13	74.00	-15.87	48.16	34.17	8.41	32.61	200	10 PEAK	2	5464.40	64.67	68.30	-3.63	54.70	34.18	8.40	32.61	200	10 PEAK
Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5459.44	58.13	74.00	-15.87	48.16	34.17	8.41	32.61	200	10 PEAK																																			
2	5464.40	64.67	68.30	-3.63	54.70	34.18	8.40	32.61	200	10 PEAK																																			
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Freq</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>98.49</td> <td>-----</td> <td>-----</td> <td>88.54</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>200</td> <td>10 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	98.49	-----	-----	88.54	34.20	8.36	32.61	200	10 PEAK											
Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5510.00	98.49	-----	-----	88.54	34.20	8.36	32.61	200	10 PEAK																																			
Avg	Fundamental																																												
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Freq</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.00</td> <td>50.82</td> <td>54.00</td> <td>-3.18</td> <td>40.85</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>200</td> <td>10 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5454.00	50.82	54.00	-3.18	40.85	34.17	8.42	32.62	200	10 AVERAGE											
Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5454.00	50.82	54.00	-3.18	40.85	34.17	8.42	32.62	200	10 AVERAGE																																			
<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Freq</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>91.75</td> <td>-----</td> <td>-----</td> <td>81.82</td> <td>34.22</td> <td>8.33</td> <td>32.62</td> <td>200</td> <td>10 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	91.75	-----	-----	81.82	34.22	8.33	32.62	200	10 AVERAGE											
Limit Freq	Limit Level	Read Freq	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5510.00	91.75	-----	-----	81.82	34.22	8.33	32.62	200	10 AVERAGE																																			



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	STBC 0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5741.54</td> <td>50.31</td> <td>68.30</td> <td>-17.99</td> <td>39.73</td> <td>34.63</td> <td>8.74</td> <td>32.79</td> <td>200</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5741.54	50.31	68.30	-17.99	39.73	34.63	8.74	32.79	200	10	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5741.54	50.31	68.30	-17.99	39.73	34.63	8.74	32.79	200	10	PEAK																																







Mode	23																																																																																				
	Band Edge - L																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																				
ANT	STBC 0+1																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.68</td> <td>50.85</td> <td>74.00</td> <td>-23.15</td> <td>40.88</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>200</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>58.54</td> <td>68.30</td> <td>-9.76</td> <td>48.57</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>200</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.68	50.85	74.00	-23.15	40.88	34.17	8.41	32.61	200	0 PEAK	2	5469.52	58.54	68.30	-9.76	48.57	34.18	8.40	32.61	200	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.00</td> <td>-----</td> <td>-----</td> <td>82.06</td> <td>34.25</td> <td>8.32</td> <td>32.63</td> <td>200</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	92.00	-----	-----	82.06	34.25	8.32	32.63	200	0 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5457.68	50.85	74.00	-23.15	40.88	34.17	8.41	32.61	200	0 PEAK																																																																											
2	5469.52	58.54	68.30	-9.76	48.57	34.18	8.40	32.61	200	0 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5510.00	92.00	-----	-----	82.06	34.25	8.32	32.63	200	0 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>45.91</td> <td>54.00</td> <td>-8.09</td> <td>35.94</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>200</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.44	45.91	54.00	-8.09	35.94	34.17	8.41	32.61	200	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>85.35</td> <td>-----</td> <td>-----</td> <td>75.42</td> <td>34.21</td> <td>8.34</td> <td>32.62</td> <td>200</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	85.35	-----	-----	75.42	34.21	8.34	32.62	200	0 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5459.44	45.91	54.00	-8.09	35.94	34.17	8.41	32.61	200	0 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5510.00	85.35	-----	-----	75.42	34.21	8.34	32.62	200	0 AVERAGE																																																																											



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	STBC 0+1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5734.15</td> <td>49.80</td> <td>68.30</td> <td>-18.50</td> <td>39.26</td> <td>34.62</td> <td>8.71</td> <td>32.79</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5734.15	49.80	68.30	-18.50	39.26	34.62	8.71	32.79							200	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5734.15	49.80	68.30	-18.50	39.26	34.62	8.71	32.79																																			
						200	0 PEAK																																			

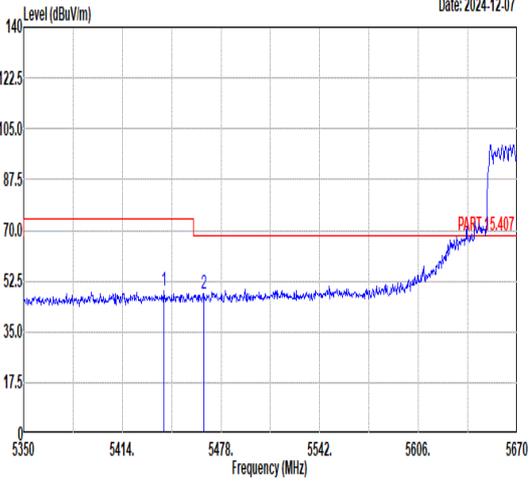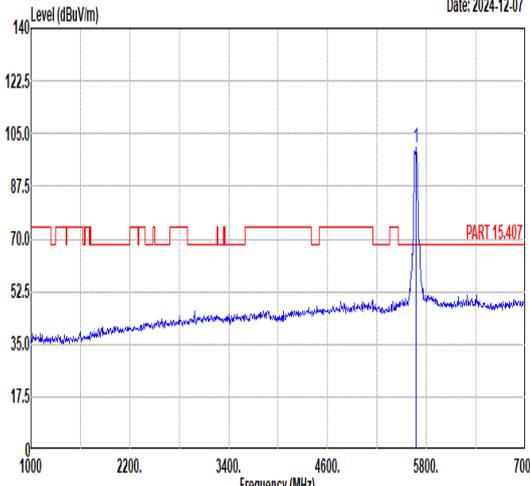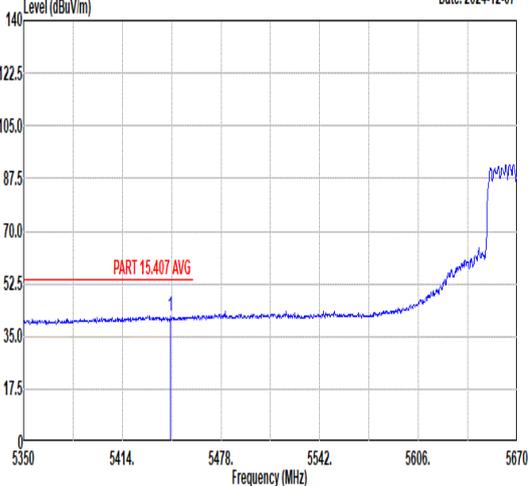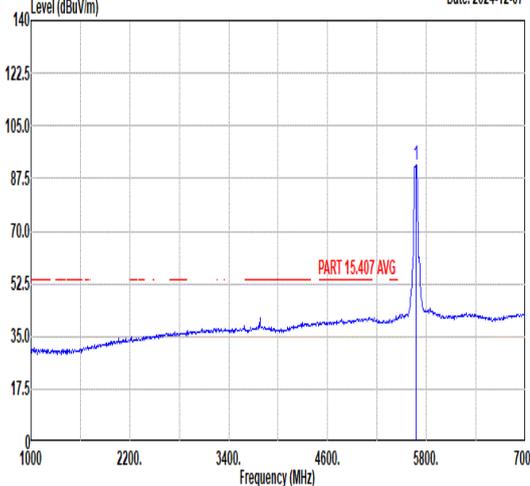

		24																																																																						
Mode	Band Edge - L																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																							
ANT	STBC 0+1																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5441.20</td> <td>49.11</td> <td>74.00</td> <td>-24.89</td> <td>39.14</td> <td>34.16</td> <td>8.43</td> <td>32.62</td> <td>100</td> <td>347 PEAK</td> </tr> <tr> <td>2 5466.80</td> <td>47.92</td> <td>68.30</td> <td>-20.38</td> <td>37.95</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>347 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5441.20	49.11	74.00	-24.89	39.14	34.16	8.43	32.62	100	347 PEAK	2 5466.80	47.92	68.30	-20.38	37.95	34.18	8.40	32.61	100	347 PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5670.00</td> <td>100.50</td> <td>90.24</td> <td>10.26</td> <td>34.51</td> <td>8.49</td> <td>32.74</td> <td>100</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5670.00	100.50	90.24	10.26	34.51	8.49	32.74	100	347	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5441.20	49.11	74.00	-24.89	39.14	34.16	8.43	32.62	100	347 PEAK																																																															
2 5466.80	47.92	68.30	-20.38	37.95	34.18	8.40	32.61	100	347 PEAK																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5670.00	100.50	90.24	10.26	34.51	8.49	32.74	100	347	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5445.36</td> <td>41.87</td> <td>54.00</td> <td>-12.13</td> <td>31.90</td> <td>34.16</td> <td>8.43</td> <td>32.62</td> <td>100</td> <td>347 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5445.36	41.87	54.00	-12.13	31.90	34.16	8.43	32.62	100	347 AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5670.00</td> <td>92.15</td> <td>81.93</td> <td>10.22</td> <td>34.50</td> <td>8.46</td> <td>32.74</td> <td>100</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5670.00	92.15	81.93	10.22	34.50	8.46	32.74	100	347	AVERAGE										
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5445.36	41.87	54.00	-12.13	31.90	34.16	8.43	32.62	100	347 AVERAGE																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5670.00	92.15	81.93	10.22	34.50	8.46	32.74	100	347	AVERAGE																																																															



Mode	24																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																									
ANT	STBC 0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.43</td> <td>59.10</td> <td>68.30</td> <td>-9.20</td> <td>48.58</td> <td>34.61</td> <td>8.69</td> <td>32.78</td> <td>100</td> <td>347 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5728.43	59.10	68.30	-9.20	48.58	34.61	8.69	32.78	100	347 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5728.43	59.10	68.30	-9.20	48.58	34.61	8.69	32.78	100	347 PEAK																																



		24																																																																									
Mode	Band Edge - L																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																										
ANT	STBC 0+1																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.16</td> <td>48.73</td> <td>74.00</td> <td>-25.27</td> <td>38.79</td> <td>34.13</td> <td>8.45</td> <td>32.64</td> <td>281</td> <td>360 PEAK</td> </tr> <tr> <td>2</td> <td>5462.96</td> <td>48.18</td> <td>68.30</td> <td>-20.12</td> <td>38.20</td> <td>34.18</td> <td>8.41</td> <td>32.61</td> <td>281</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5394.16	48.73	74.00	-25.27	38.79	34.13	8.45	32.64	281	360 PEAK	2	5462.96	48.18	68.30	-20.12	38.20	34.18	8.41	32.61	281	360 PEAK	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.12</td> <td>-----</td> <td>-----</td> <td>85.92</td> <td>34.49</td> <td>8.44</td> <td>32.73</td> <td>281</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5670.00	96.12	-----	-----	85.92	34.49	8.44	32.73	281	360 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	5394.16	48.73	74.00	-25.27	38.79	34.13	8.45	32.64	281	360 PEAK																																																																	
2	5462.96	48.18	68.30	-20.12	38.20	34.18	8.41	32.61	281	360 PEAK																																																																	
Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	5670.00	96.12	-----	-----	85.92	34.49	8.44	32.73	281	360 PEAK																																																																	
Avg	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.12</td> <td>40.86</td> <td>54.00</td> <td>-13.14</td> <td>30.89</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>281</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5459.12	40.86	54.00	-13.14	30.89	34.17	8.41	32.61	281	360 AVERAGE	<p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>88.19</td> <td>-----</td> <td>-----</td> <td>77.90</td> <td>34.52</td> <td>8.51</td> <td>32.74</td> <td>281</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5670.00	88.19	-----	-----	77.90	34.52	8.51	32.74	281	360 AVERAGE											
Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	5459.12	40.86	54.00	-13.14	30.89	34.17	8.41	32.61	281	360 AVERAGE																																																																	
Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	5670.00	88.19	-----	-----	77.90	34.52	8.51	32.74	281	360 AVERAGE																																																																	



Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																					
ANT	STBC 0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.24</td> <td>57.74</td> <td>68.30</td> <td>-10.56</td> <td>47.24</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>281</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5726.24	57.74	68.30	-10.56	47.24	34.60	8.68	32.78	281	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5726.24	57.74	68.30	-10.56	47.24	34.60	8.68	32.78	281	360	PEAK																											







	25																																																																											
Mode	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																											
ANT	STBC 0+1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.34</td> <td>64.15</td> <td>74.00</td> <td>-9.85</td> <td>55.00</td> <td>33.98</td> <td>7.91</td> <td>32.74</td> <td>194</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5137.34	64.15	74.00	-9.85	55.00	33.98	7.91	32.74	194	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>95.83</td> <td>-----</td> <td>-----</td> <td>86.58</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>194</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	95.83	-----	-----	86.58	34.02	7.95	32.72	194	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5137.34	64.15	74.00	-9.85	55.00	33.98	7.91	32.74	194	360	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5210.00	95.83	-----	-----	86.58	34.02	7.95	32.72	194	360	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>50.94</td> <td>54.00</td> <td>-3.06</td> <td>41.77</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>194</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.73	50.94	54.00	-3.06	41.77	33.99	7.92	32.74	194	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.00</td> <td>-----</td> <td>-----</td> <td>78.75</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>194</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	88.00	-----	-----	78.75	34.02	7.95	32.72	194	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.73	50.94	54.00	-3.06	41.77	33.99	7.92	32.74	194	360	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5210.00	88.00	-----	-----	78.75	34.02	7.95	32.72	194	360	AVERAGE																																																																	



Mode	25																															
	Band Edge - R																															
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																															
ANT	STBC 0+1																															
Pol.	Horizontal	Fundamental																														
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5402.00</td> <td>50.45</td> <td>74.00</td> <td>-23.55</td> <td>40.48</td> <td>34.14</td> <td>8.47</td> <td>32.64</td> <td>194</td> <td>360 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5402.00	50.45	74.00	-23.55	40.48	34.14	8.47	32.64	194	360 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																								
1 5402.00	50.45	74.00	-23.55	40.48	34.14	8.47	32.64	194	360 PEAK																							
Blank																																
Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5407.25</td> <td>41.98</td> <td>54.00</td> <td>-12.02</td> <td>31.99</td> <td>34.14</td> <td>8.48</td> <td>32.63</td> <td>194</td> <td>360 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5407.25	41.98	54.00	-12.02	31.99	34.14	8.48	32.63	194	360 AVERAGE
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																								
1 5407.25	41.98	54.00	-12.02	31.99	34.14	8.48	32.63	194	360 AVERAGE																							
Blank																																

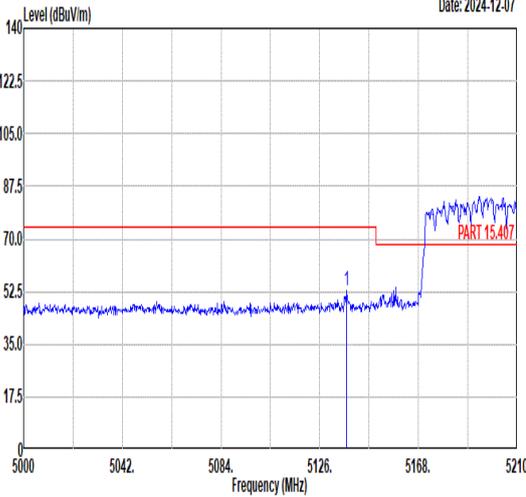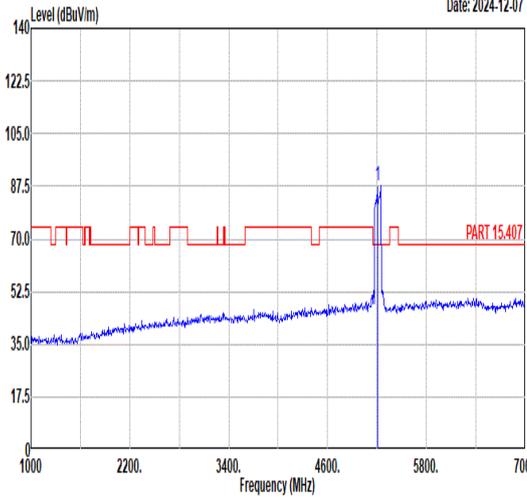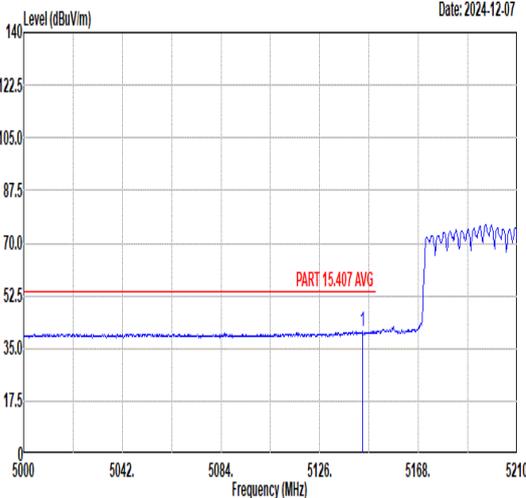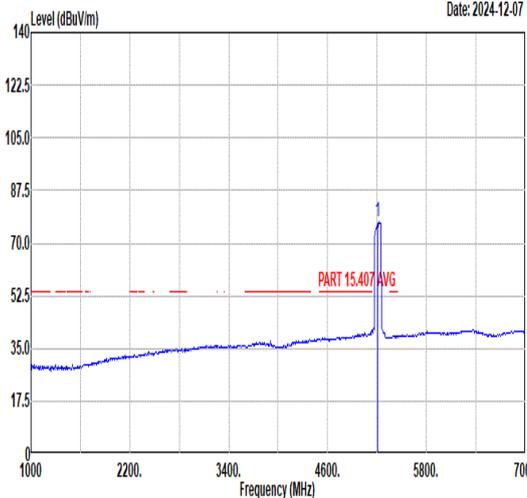

		25																																																																								
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.34</td> <td>52.77</td> <td>74.00</td> <td>-21.23</td> <td>43.62</td> <td>33.99</td> <td>7.91</td> <td>32.74</td> <td>244</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5137.34	52.77	74.00	-21.23	43.62	33.99	7.91	32.74	244	354	PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>87.79</td> <td>-----</td> <td>-----</td> <td>78.40</td> <td>34.05</td> <td>8.04</td> <td>32.70</td> <td>244</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	87.79	-----	-----	78.40	34.05	8.04	32.70	244	354	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5137.34	52.77	74.00	-21.23	43.62	33.99	7.91	32.74	244	354	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5210.00	87.79	-----	-----	78.40	34.05	8.04	32.70	244	354	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.06</td> <td>40.59</td> <td>54.00</td> <td>-13.41</td> <td>31.43</td> <td>33.99</td> <td>7.91</td> <td>32.74</td> <td>244</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5144.06	40.59	54.00	-13.41	31.43	33.99	7.91	32.74	244	354	AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>76.96</td> <td>-----</td> <td>-----</td> <td>67.65</td> <td>34.03</td> <td>7.99</td> <td>32.71</td> <td>244</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	76.96	-----	-----	67.65	34.03	7.99	32.71	244	354	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5144.06	40.59	54.00	-13.41	31.43	33.99	7.91	32.74	244	354	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5210.00	76.96	-----	-----	67.65	34.03	7.99	32.71	244	354	AVERAGE																																																															







	25	
Mode	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	STBC 0+1	
Pol.	Vertical	Fundamental
Peak	<p style="text-align: right;">Date: 2024-12-07</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2024-12-07</p>	
	Blank	



Mode	25																																																																																																				
	Harmonic																																																																																																				
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																				
ANT	STBC 0+1																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p style="text-align: right;">Date: 2024-12-07</p>	<p style="text-align: right;">Date: 2024-12-07</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>45.68</td> <td>68.30</td> <td>-22.62</td> <td>62.33</td> <td>37.30</td> <td>10.77</td> <td>64.72</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>46.14</td> <td>74.00</td> <td>-27.86</td> <td>57.53</td> <td>39.45</td> <td>12.72</td> <td>63.56</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	45.68	68.30	-22.62	62.33	37.30	10.77	64.72	--	Peak	2	15630.00	46.14	74.00	-27.86	57.53	39.45	12.72	63.56	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>46.79</td> <td>68.30</td> <td>-21.51</td> <td>63.44</td> <td>37.30</td> <td>10.77</td> <td>64.72</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>45.87</td> <td>74.00</td> <td>-28.13</td> <td>57.26</td> <td>39.45</td> <td>12.72</td> <td>63.56</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	46.79	68.30	-21.51	63.44	37.30	10.77	64.72	--	Peak	2	15630.00	45.87	74.00	-28.13	57.26	39.45	12.72	63.56	--
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10420.00	45.68	68.30	-22.62	62.33	37.30	10.77	64.72	--	Peak																																																																																											
2	15630.00	46.14	74.00	-27.86	57.53	39.45	12.72	63.56	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10420.00	46.79	68.30	-21.51	63.44	37.30	10.77	64.72	--	Peak																																																																																											
2	15630.00	45.87	74.00	-28.13	57.26	39.45	12.72	63.56	--	Peak																																																																																											

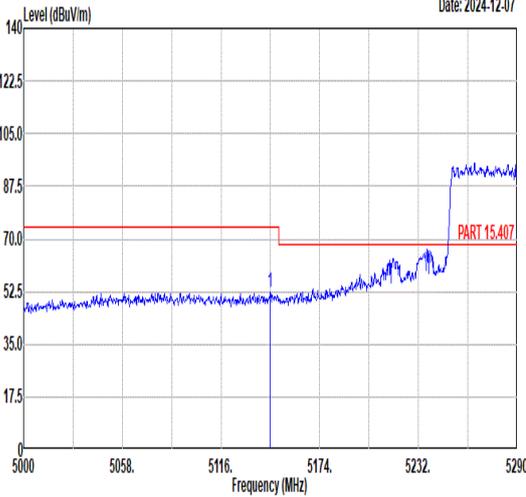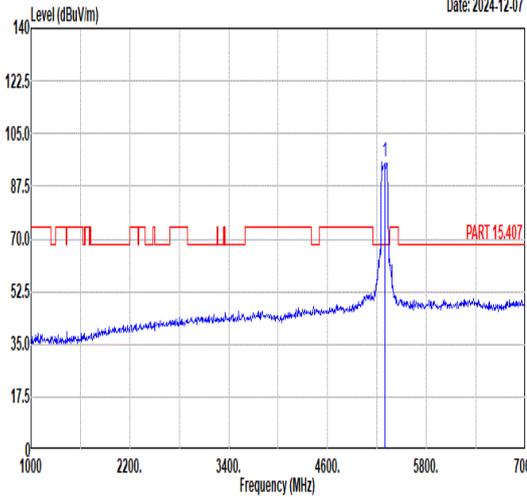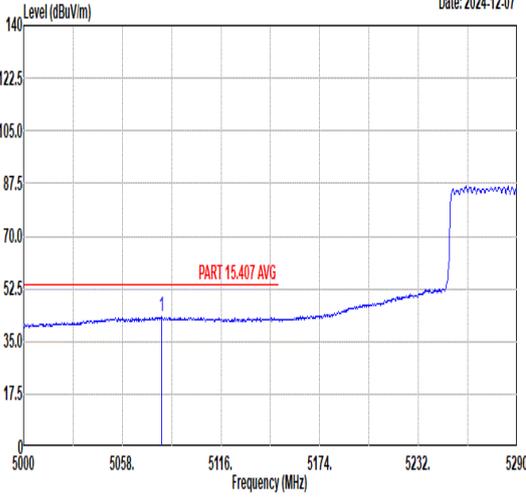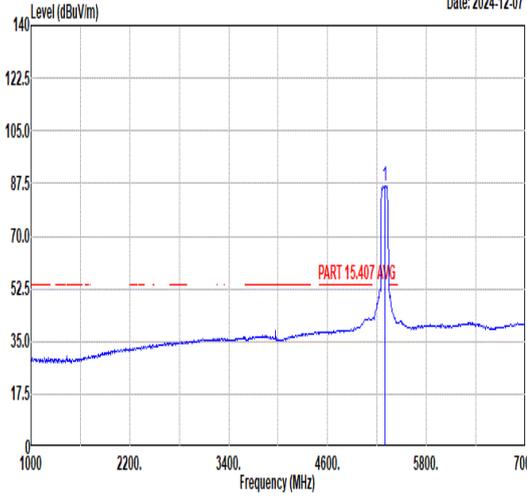

		26																																																																								
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																									
ANT	STBC 0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.00</td> <td>52.52</td> <td>74.00</td> <td>-21.48</td> <td>43.35</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>256</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5145.00	52.52	74.00	-21.48	43.35	33.99	7.92	32.74	256	0	PEAK	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>95.77</td> <td>-----</td> <td>-----</td> <td>86.31</td> <td>34.06</td> <td>8.09</td> <td>32.69</td> <td>256</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	95.77	-----	-----	86.31	34.06	8.09	32.69	256	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5145.00	52.52	74.00	-21.48	43.35	33.99	7.92	32.74	256	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	95.77	-----	-----	86.31	34.06	8.09	32.69	256	0	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5081.20</td> <td>43.10</td> <td>54.00</td> <td>-10.90</td> <td>34.05</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> <td>256</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5081.20	43.10	54.00	-10.90	34.05	33.95	7.87	32.77	256	0	AVERAGE	 <p style="text-align: right;">Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>86.82</td> <td>-----</td> <td>-----</td> <td>77.24</td> <td>34.08</td> <td>8.18</td> <td>32.68</td> <td>256</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	86.82	-----	-----	77.24	34.08	8.18	32.68	256	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5081.20	43.10	54.00	-10.90	34.05	33.95	7.87	32.77	256	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	86.82	-----	-----	77.24	34.08	8.18	32.68	256	0	AVERAGE																																																															



Mode	26																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	STBC 0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.02</td> <td>63.84</td> <td>74.00</td> <td>-10.16</td> <td>54.03</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>256</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5359.02	63.84	74.00	-10.16	54.03	34.11	8.35	32.65	256	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5359.02	63.84	74.00	-10.16	54.03	34.11	8.35	32.65	256	0 PEAK																																
Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.18</td> <td>50.58</td> <td>54.00</td> <td>-3.42</td> <td>40.80</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>256</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.18	50.58	54.00	-3.42	40.80	34.11	8.33	32.66	256	0 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.18	50.58	54.00	-3.42	40.80	34.11	8.33	32.66	256	0 AVERAGE																																



26																																			
Mode	Band Edge - L																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																		
ANT	STBC 0+1																																		
Pol.	Vertical																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5107.59</td> <td>50.06</td> <td>74.00</td> <td>-23.94</td> <td>40.96</td> <td>33.97</td> <td>7.89</td> <td>32.76</td> <td>100</td> <td>159 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5107.59	50.06	74.00	-23.94	40.96	33.97	7.89	32.76	100	159 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5107.59	50.06	74.00	-23.94	40.96	33.97	7.89	32.76	100	159 PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>91.91</td> <td>-----</td> <td>-----</td> <td>82.26</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>100</td> <td>159 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5290.00	91.91	-----	-----	82.26	34.09	8.23	32.67	100	159 PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5290.00	91.91	-----	-----	82.26	34.09	8.23	32.67	100	159 PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5051.91</td> <td>40.57</td> <td>54.00</td> <td>-13.43</td> <td>31.57</td> <td>33.93</td> <td>7.85</td> <td>32.78</td> <td>100</td> <td>159 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5051.91	40.57	54.00	-13.43	31.57	33.93	7.85	32.78	100	159 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5051.91	40.57	54.00	-13.43	31.57	33.93	7.85	32.78	100	159 AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>81.28</td> <td>-----</td> <td>-----</td> <td>71.61</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>100</td> <td>159 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5290.00	81.28	-----	-----	71.61	34.09	8.25	32.67	100	159 AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5290.00	81.28	-----	-----	71.61	34.09	8.25	32.67	100	159 AVERAGE																										



Mode	26																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																					
ANT	STBC 0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.81</td> <td>57.46</td> <td>74.00</td> <td>-16.54</td> <td>47.65</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>100</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5356.81	57.46	74.00	-16.54	47.65	34.11	8.35	32.65	100	159	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5356.81	57.46	74.00	-16.54	47.65	34.11	8.35	32.65	100	159	PEAK																											
Blank																																						
Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.32</td> <td>44.14</td> <td>54.00</td> <td>-9.86</td> <td>34.33</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>100</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5357.32	44.14	54.00	-9.86	34.33	34.11	8.35	32.65	100	159	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5357.32	44.14	54.00	-9.86	34.33	34.11	8.35	32.65	100	159	AVERAGE																											
Blank																																						



27																																																				
Mode	Band Edge - L																																																			
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																			
ANT	STBC 0+1																																																			
Pol.	Horizontal																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.84</td> <td>63.64</td> <td>74.00</td> <td>-10.36</td> <td>53.67</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>25 PEAK</td> </tr> <tr> <td>2</td> <td>5467.90</td> <td>61.40</td> <td>68.30</td> <td>-6.90</td> <td>51.43</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>25 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5455.84	63.64	74.00	-10.36	53.67	34.17	8.41	32.61	100	25 PEAK	2	5467.90	61.40	68.30	-6.90	51.43	34.18	8.40	32.61	100	25 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5455.84	63.64	74.00	-10.36	53.67	34.17	8.41	32.61	100	25 PEAK																																										
2	5467.90	61.40	68.30	-6.90	51.43	34.18	8.40	32.61	100	25 PEAK																																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>96.75</td> <td>-----</td> <td>-----</td> <td>86.82</td> <td>34.28</td> <td>8.29</td> <td>32.64</td> <td>100</td> <td>25 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	96.75	-----	-----	86.82	34.28	8.29	32.64	100	25 PEAK												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5530.00	96.75	-----	-----	86.82	34.28	8.29	32.64	100	25 PEAK																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.10</td> <td>49.75</td> <td>54.00</td> <td>-4.25</td> <td>39.78</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>25 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5457.10	49.75	54.00	-4.25	39.78	34.17	8.41	32.61	100	25 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5457.10	49.75	54.00	-4.25	39.78	34.17	8.41	32.61	100	25 AVERAGE																																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>87.59</td> <td>-----</td> <td>-----</td> <td>77.66</td> <td>34.22</td> <td>8.33</td> <td>32.62</td> <td>100</td> <td>25 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	87.59	-----	-----	77.66	34.22	8.33	32.62	100	25 AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5530.00	87.59	-----	-----	77.66	34.22	8.33	32.62	100	25 AVERAGE																																										



Mode	27																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																									
ANT	STBC 0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.28</td> <td>51.74</td> <td>68.30</td> <td>-16.56</td> <td>41.22</td> <td>34.61</td> <td>8.69</td> <td>32.78</td> <td>100</td> <td>25 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5729.28	51.74	68.30	-16.56	41.22	34.61	8.69	32.78	100	25 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5729.28	51.74	68.30	-16.56	41.22	34.61	8.69	32.78	100	25 PEAK																																



27																																																			
Mode	Band Edge - L																																																		
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																		
ANT	STBC 0+1																																																		
Pol.	Vertical																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.66</td> <td>60.54</td> <td>74.00</td> <td>-13.46</td> <td>50.56</td> <td>34.17</td> <td>8.42</td> <td>32.61</td> <td>100</td> <td>158 PEAK</td> </tr> <tr> <td>2</td> <td>5469.88</td> <td>58.47</td> <td>68.30</td> <td>-9.83</td> <td>48.50</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>158 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.66	60.54	74.00	-13.46	50.56	34.17	8.42	32.61	100	158 PEAK	2	5469.88	58.47	68.30	-9.83	48.50	34.18	8.40	32.61	100	158 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5455.66	60.54	74.00	-13.46	50.56	34.17	8.42	32.61	100	158 PEAK																																									
2	5469.88	58.47	68.30	-9.83	48.50	34.18	8.40	32.61	100	158 PEAK																																									
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>93.24</td> <td>-----</td> <td>-----</td> <td>83.31</td> <td>34.27</td> <td>8.30</td> <td>32.64</td> <td>100</td> <td>158 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	93.24	-----	-----	83.31	34.27	8.30	32.64	100	158 PEAK											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5530.00	93.24	-----	-----	83.31	34.27	8.30	32.64	100	158 PEAK																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.84</td> <td>47.23</td> <td>54.00</td> <td>-6.77</td> <td>37.26</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>158 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.84	47.23	54.00	-6.77	37.26	34.17	8.41	32.61	100	158 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5455.84	47.23	54.00	-6.77	37.26	34.17	8.41	32.61	100	158 AVERAGE																																									
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>84.83</td> <td>-----</td> <td>-----</td> <td>74.90</td> <td>34.22</td> <td>8.33</td> <td>32.62</td> <td>100</td> <td>158 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	84.83	-----	-----	74.90	34.22	8.33	32.62	100	158 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5530.00	84.83	-----	-----	74.90	34.22	8.33	32.62	100	158 AVERAGE																																									



Mode	27																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																					
ANT	STBC 0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5736.80</td> <td>50.84</td> <td>68.30</td> <td>-17.46</td> <td>40.29</td> <td>34.62</td> <td>8.72</td> <td>32.79</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5736.80	50.84	68.30	-17.46	40.29	34.62	8.72	32.79	100	158	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5736.80	50.84	68.30	-17.46	40.29	34.62	8.72	32.79	100	158	PEAK																											



Mode	28																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																															
ANT	CDD 0+1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.81</td> <td>74.00</td> <td>-29.19</td> <td>59.13</td> <td>37.14</td> <td>11.45</td> <td>62.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>46.16</td> <td>68.30</td> <td>-22.14</td> <td>57.01</td> <td>41.27</td> <td>13.17</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	44.81	74.00	-29.19	59.13	37.14	11.45	62.91	--	--	Peak	2	17235.00	46.16	68.30	-22.14	57.01	41.27	13.17	65.29	--	--	Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.48</td> <td>74.00</td> <td>-28.52</td> <td>59.80</td> <td>37.14</td> <td>11.45</td> <td>62.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>44.28</td> <td>68.30</td> <td>-24.02</td> <td>55.13</td> <td>41.27</td> <td>13.17</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	45.48	74.00	-28.52	59.80	37.14	11.45	62.91	--	--	Peak	2	17235.00	44.28	68.30	-24.02	55.13	41.27	13.17	65.29	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11490.00	44.81	74.00	-29.19	59.13	37.14	11.45	62.91	--	--	Peak																																																																																					
2	17235.00	46.16	68.30	-22.14	57.01	41.27	13.17	65.29	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11490.00	45.48	74.00	-28.52	59.80	37.14	11.45	62.91	--	--	Peak																																																																																					
2	17235.00	44.28	68.30	-24.02	55.13	41.27	13.17	65.29	--	--	Peak																																																																																					



Mode	29																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																	
ANT	CDD 0+1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>45.08</td> <td>74.00</td> <td>-28.92</td> <td>59.25</td> <td>37.28</td> <td>11.49</td> <td>62.94</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>47.62</td> <td>68.30</td> <td>-20.68</td> <td>58.30</td> <td>41.50</td> <td>13.20</td> <td>65.38</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	45.08	74.00	-28.92	59.25	37.28	11.49	62.94	-- -- Peak	2	17355.00	47.62	68.30	-20.68	58.30	41.50	13.20	65.38	-- -- Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.80</td> <td>74.00</td> <td>-29.20</td> <td>58.97</td> <td>37.28</td> <td>11.49</td> <td>62.94</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>46.13</td> <td>68.30</td> <td>-22.17</td> <td>56.81</td> <td>41.50</td> <td>13.20</td> <td>65.38</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	44.80	74.00	-29.20	58.97	37.28	11.49	62.94	-- -- Peak	2	17355.00	46.13	68.30	-22.17	56.81	41.50	13.20	65.38	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11570.00	45.08	74.00	-28.92	59.25	37.28	11.49	62.94	-- -- Peak																																																																																									
2	17355.00	47.62	68.30	-20.68	58.30	41.50	13.20	65.38	-- -- Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11570.00	44.80	74.00	-29.20	58.97	37.28	11.49	62.94	-- -- Peak																																																																																									
2	17355.00	46.13	68.30	-22.17	56.81	41.50	13.20	65.38	-- -- Peak																																																																																									



Mode	30																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																
ANT	CDD 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.19</td> <td>74.00</td> <td>-27.81</td> <td>60.14</td> <td>37.51</td> <td>11.53</td> <td>62.99</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>46.49</td> <td>68.30</td> <td>-21.81</td> <td>56.99</td> <td>41.74</td> <td>13.23</td> <td>65.47</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11650.00	46.19	74.00	-27.81	60.14	37.51	11.53	62.99	--	--	Peak	2	17475.00	46.49	68.30	-21.81	56.99	41.74	13.23	65.47	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>45.96</td> <td>74.00</td> <td>-28.04</td> <td>59.91</td> <td>37.51</td> <td>11.53</td> <td>62.99</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>46.09</td> <td>68.30</td> <td>-22.21</td> <td>56.59</td> <td>41.74</td> <td>13.23</td> <td>65.47</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11650.00	45.96	74.00	-28.04	59.91	37.51	11.53	62.99	--	--	Peak	2	17475.00	46.09	68.30	-22.21	56.59	41.74	13.23	65.47	--	--
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11650.00	46.19	74.00	-27.81	60.14	37.51	11.53	62.99	--	--	Peak																																																																																						
2	17475.00	46.49	68.30	-21.81	56.99	41.74	13.23	65.47	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11650.00	45.96	74.00	-28.04	59.91	37.51	11.53	62.99	--	--	Peak																																																																																						
2	17475.00	46.09	68.30	-22.21	56.59	41.74	13.23	65.47	--	--	Peak																																																																																						



31																																																																																																													
Mode	Band Edge																																																																																																												
U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																													
ANT	STBC 0+1																																																																																																												
Pol.	Horizontal																																																																																																												
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.85</td> <td>52.19</td> <td>68.30</td> <td>-16.11</td> <td>42.06</td> <td>34.46</td> <td>8.39</td> <td>32.72</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>50.63</td> <td>68.53</td> <td>-17.90</td> <td>40.48</td> <td>34.47</td> <td>8.40</td> <td>32.72</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.77</td> <td>65.26</td> <td>110.74</td> <td>-45.48</td> <td>54.80</td> <td>34.59</td> <td>8.65</td> <td>32.78</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.35</td> <td>62.84</td> <td>111.60</td> <td>-48.76</td> <td>52.37</td> <td>34.59</td> <td>8.66</td> <td>32.78</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.44</td> <td>-----</td> <td>-----</td> <td>93.85</td> <td>34.64</td> <td>8.75</td> <td>32.80</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5647.85	52.19	68.30	-16.11	42.06	34.46	8.39	32.72	100	184	PEAK	2	5650.32	50.63	68.53	-17.90	40.48	34.47	8.40	32.72	100	184	PEAK	3	5719.77	65.26	110.74	-45.48	54.80	34.59	8.65	32.78	100	184	PEAK	4	5720.35	62.84	111.60	-48.76	52.37	34.59	8.66	32.78	100	184	PEAK	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5745.00	104.44	-----	-----	93.85	34.64	8.75	32.80	100	184	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																						
1	5647.85	52.19	68.30	-16.11	42.06	34.46	8.39	32.72	100	184	PEAK																																																																																																		
2	5650.32	50.63	68.53	-17.90	40.48	34.47	8.40	32.72	100	184	PEAK																																																																																																		
3	5719.77	65.26	110.74	-45.48	54.80	34.59	8.65	32.78	100	184	PEAK																																																																																																		
4	5720.35	62.84	111.60	-48.76	52.37	34.59	8.66	32.78	100	184	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																						
1	5745.00	104.44	-----	-----	93.85	34.64	8.75	32.80	100	184	PEAK																																																																																																		
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: center;">Blank</p> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.74</td> <td>-----</td> <td>-----</td> <td>86.15</td> <td>34.64</td> <td>8.75</td> <td>32.80</td> <td>100</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5745.00	96.74	-----	-----	86.15	34.64	8.75	32.80	100	184	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																						
1	5745.00	96.74	-----	-----	86.15	34.64	8.75	32.80	100	184	AVERAGE																																																																																																		



31																																																																									
Mode	Band Edge																																																																								
U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																									
ANT	STBC 0+1																																																																								
Pol.	Vertical																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5609.43</td> <td>50.40</td> <td>68.30</td> <td>-17.90</td> <td>40.45</td> <td>34.39</td> <td>8.25</td> <td>32.69</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.33</td> <td>49.96</td> <td>69.29</td> <td>-19.33</td> <td>39.81</td> <td>34.47</td> <td>8.40</td> <td>32.72</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.63</td> <td>58.09</td> <td>110.70</td> <td>-52.61</td> <td>47.63</td> <td>34.59</td> <td>8.65</td> <td>32.78</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.80</td> <td>66.38</td> <td>114.90</td> <td>-48.52</td> <td>55.90</td> <td>34.60</td> <td>8.66</td> <td>32.78</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5609.43	50.40	68.30	-17.90	40.45	34.39	8.25	32.69	100	158	PEAK	2	5651.33	49.96	69.29	-19.33	39.81	34.47	8.40	32.72	100	158	PEAK	3	5719.63	58.09	110.70	-52.61	47.63	34.59	8.65	32.78	100	158	PEAK	4	5721.80	66.38	114.90	-48.52	55.90	34.60	8.66	32.78	100	158	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5609.43	50.40	68.30	-17.90	40.45	34.39	8.25	32.69	100	158	PEAK																																																														
2	5651.33	49.96	69.29	-19.33	39.81	34.47	8.40	32.72	100	158	PEAK																																																														
3	5719.63	58.09	110.70	-52.61	47.63	34.59	8.65	32.78	100	158	PEAK																																																														
4	5721.80	66.38	114.90	-48.52	55.90	34.60	8.66	32.78	100	158	PEAK																																																														
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.96</td> <td>-----</td> <td>-----</td> <td>90.39</td> <td>34.63</td> <td>8.73</td> <td>32.79</td> <td>100</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	100.96	-----	-----	90.39	34.63	8.73	32.79	100	158	PEAK																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5745.00	100.96	-----	-----	90.39	34.63	8.73	32.79	100	158	PEAK																																																														
Avg	Blank																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>93.04</td> <td>-----</td> <td>-----</td> <td>82.47</td> <td>34.63</td> <td>8.73</td> <td>32.79</td> <td>100</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	93.04	-----	-----	82.47	34.63	8.73	32.79	100	158	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5745.00	93.04	-----	-----	82.47	34.63	8.73	32.79	100	158	AVERAGE																																																														



Mode	31																																																																																																							
	Harmonic																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																							
ANT	STBC 0+1																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>60.21</td> <td>37.14</td> <td>11.45</td> <td>62.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>45.30</td> <td>68.30</td> <td>-23.00</td> <td>56.15</td> <td>41.27</td> <td>13.17</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	45.89	74.00	-28.11	60.21	37.14	11.45	62.91	--	--	Peak	2	17235.00	45.30	68.30	-23.00	56.15	41.27	13.17	65.29	--	--	Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>58.74</td> <td>37.14</td> <td>11.45</td> <td>62.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>45.29</td> <td>68.30</td> <td>-23.01</td> <td>56.14</td> <td>41.27</td> <td>13.17</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	44.42	74.00	-29.58	58.74	37.14	11.45	62.91	--	--	Peak	2	17235.00	45.29	68.30	-23.01	56.14	41.27	13.17	65.29	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																
1	11490.00	45.89	74.00	-28.11	60.21	37.14	11.45	62.91	--	--	Peak																																																																																													
2	17235.00	45.30	68.30	-23.00	56.15	41.27	13.17	65.29	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																
1	11490.00	44.42	74.00	-29.58	58.74	37.14	11.45	62.91	--	--	Peak																																																																																													
2	17235.00	45.29	68.30	-23.01	56.14	41.27	13.17	65.29	--	--	Peak																																																																																													



Mode	32																																																																													
	Harmonic																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																													
ANT	STBC 0+1																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>46.05</td> <td>74.00</td> <td>-27.95</td> <td>60.22</td> <td>37.28</td> <td>11.49</td> <td>62.94</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>45.09</td> <td>68.30</td> <td>-23.21</td> <td>55.77</td> <td>41.50</td> <td>13.20</td> <td>65.38</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	11570.00	46.05	74.00	-27.95	60.22	37.28	11.49	62.94	-- -- Peak	2	17355.00	45.09	68.30	-23.21	55.77	41.50	13.20	65.38	-- -- Peak	<p>Date: 2024-12-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.21</td> <td>74.00</td> <td>-29.79</td> <td>58.38</td> <td>37.28</td> <td>11.49</td> <td>62.94</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>45.29</td> <td>68.30</td> <td>-23.01</td> <td>55.97</td> <td>41.50</td> <td>13.20</td> <td>65.38</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	11570.00	44.21	74.00	-29.79	58.38	37.28	11.49	62.94	-- -- Peak	2	17355.00	45.29	68.30	-23.01	55.97	41.50	13.20	65.38	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																						
1	11570.00	46.05	74.00	-27.95	60.22	37.28	11.49	62.94	-- -- Peak																																																																					
2	17355.00	45.09	68.30	-23.21	55.77	41.50	13.20	65.38	-- -- Peak																																																																					
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																						
1	11570.00	44.21	74.00	-29.79	58.38	37.28	11.49	62.94	-- -- Peak																																																																					
2	17355.00	45.29	68.30	-23.01	55.97	41.50	13.20	65.38	-- -- Peak																																																																					



33																																																																									
Mode	Band Edge																																																																								
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																								
ANT	STBC 0+1																																																																								
Pol.	Horizontal																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.13</td> <td>62.57</td> <td>119.63</td> <td>-57.06</td> <td>51.74</td> <td>34.83</td> <td>8.88</td> <td>32.88</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.88</td> <td>51.13</td> <td>105.51</td> <td>-54.38</td> <td>40.30</td> <td>34.87</td> <td>8.85</td> <td>32.89</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>47.84</td> <td>68.20</td> <td>-20.36</td> <td>37.01</td> <td>34.97</td> <td>8.79</td> <td>32.93</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.63</td> <td>50.74</td> <td>68.30</td> <td>-17.56</td> <td>39.91</td> <td>34.97</td> <td>8.79</td> <td>32.93</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5851.13	62.57	119.63	-57.06	51.74	34.83	8.88	32.88	100	186	PEAK	2	5873.88	51.13	105.51	-54.38	40.30	34.87	8.85	32.89	100	186	PEAK	3	5925.00	47.84	68.20	-20.36	37.01	34.97	8.79	32.93	100	186	PEAK	4	5925.63	50.74	68.30	-17.56	39.91	34.97	8.79	32.93	100	186	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5851.13	62.57	119.63	-57.06	51.74	34.83	8.88	32.88	100	186	PEAK																																																														
2	5873.88	51.13	105.51	-54.38	40.30	34.87	8.85	32.89	100	186	PEAK																																																														
3	5925.00	47.84	68.20	-20.36	37.01	34.97	8.79	32.93	100	186	PEAK																																																														
4	5925.63	50.74	68.30	-17.56	39.91	34.97	8.79	32.93	100	186	PEAK																																																														
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>104.85</td> <td>-----</td> <td>-----</td> <td>94.02</td> <td>34.78</td> <td>8.91</td> <td>32.86</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	104.85	-----	-----	94.02	34.78	8.91	32.86	100	186	PEAK																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5825.00	104.85	-----	-----	94.02	34.78	8.91	32.86	100	186	PEAK																																																														
Avg	Blank																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.39</td> <td>-----</td> <td>-----</td> <td>85.56</td> <td>34.78</td> <td>8.91</td> <td>32.86</td> <td>100</td> <td>186</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	96.39	-----	-----	85.56	34.78	8.91	32.86	100	186	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5825.00	96.39	-----	-----	85.56	34.78	8.91	32.86	100	186	AVERAGE																																																														



Mode	33																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																													
ANT	STBC 0+1																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.00</td> <td>56.69</td> <td>117.64</td> <td>-60.95</td> <td>45.86</td> <td>34.83</td> <td>8.88</td> <td>32.88</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.75</td> <td>49.15</td> <td>105.55</td> <td>-56.40</td> <td>38.32</td> <td>34.87</td> <td>8.85</td> <td>32.89</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>48.12</td> <td>68.94</td> <td>-20.82</td> <td>37.30</td> <td>34.96</td> <td>8.79</td> <td>32.93</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.00</td> <td>49.88</td> <td>68.30</td> <td>-18.42</td> <td>39.05</td> <td>34.97</td> <td>8.79</td> <td>32.93</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5852.00	56.69	117.64	-60.95	45.86	34.83	8.88	32.88	100	157	PEAK	2	5873.75	49.15	105.55	-56.40	38.32	34.87	8.85	32.89	100	157	PEAK	3	5924.00	48.12	68.94	-20.82	37.30	34.96	8.79	32.93	100	157	PEAK	4	5926.00	49.88	68.30	-18.42	39.05	34.97	8.79	32.93	100	157	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.25</td> <td>-----</td> <td>-----</td> <td>88.41</td> <td>34.77</td> <td>8.92</td> <td>32.85</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	99.25	-----	-----	88.41	34.77	8.92	32.85	100	157	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5852.00	56.69	117.64	-60.95	45.86	34.83	8.88	32.88	100	157	PEAK																																																																																																			
2	5873.75	49.15	105.55	-56.40	38.32	34.87	8.85	32.89	100	157	PEAK																																																																																																			
3	5924.00	48.12	68.94	-20.82	37.30	34.96	8.79	32.93	100	157	PEAK																																																																																																			
4	5926.00	49.88	68.30	-18.42	39.05	34.97	8.79	32.93	100	157	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	99.25	-----	-----	88.41	34.77	8.92	32.85	100	157	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>92.68</td> <td>-----</td> <td>-----</td> <td>81.84</td> <td>34.77</td> <td>8.92</td> <td>32.85</td> <td>100</td> <td>157</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	92.68	-----	-----	81.84	34.77	8.92	32.85	100	157	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	92.68	-----	-----	81.84	34.77	8.92	32.85	100	157	AVERAGE																																																																																																			



Mode	33																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																
ANT	STBC 0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-12-07</p>	<p>Date: 2024-12-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.11</td> <td>74.00</td> <td>-27.89</td> <td>60.06</td> <td>37.51</td> <td>11.53</td> <td>62.99</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>46.13</td> <td>68.30</td> <td>-22.17</td> <td>56.63</td> <td>41.74</td> <td>13.23</td> <td>65.47</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	46.11	74.00	-27.89	60.06	37.51	11.53	62.99	--	--	Peak	2	17475.00	46.13	68.30	-22.17	56.63	41.74	13.23	65.47	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.47</td> <td>74.00</td> <td>-26.53</td> <td>61.42</td> <td>37.51</td> <td>11.53</td> <td>62.99</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>45.48</td> <td>68.30</td> <td>-22.82</td> <td>55.98</td> <td>41.74</td> <td>13.23</td> <td>65.47</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.47	74.00	-26.53	61.42	37.51	11.53	62.99	--	--	Peak	2	17475.00	45.48	68.30	-22.82	55.98	41.74	13.23	65.47	--	--
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11650.00	46.11	74.00	-27.89	60.06	37.51	11.53	62.99	--	--	Peak																																																																																						
2	17475.00	46.13	68.30	-22.17	56.63	41.74	13.23	65.47	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11650.00	47.47	74.00	-26.53	61.42	37.51	11.53	62.99	--	--	Peak																																																																																						
2	17475.00	45.48	68.30	-22.82	55.98	41.74	13.23	65.47	--	--	Peak																																																																																						



34																																																																																																								
Mode	Band Edge - L																																																																																																							
U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																								
ANT	STBC 0+1																																																																																																							
Pol.	Horizontal																																																																																																							
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5602.33</td> <td>54.49</td> <td>68.30</td> <td>-13.81</td> <td>44.57</td> <td>34.38</td> <td>8.22</td> <td>32.68</td> <td>104</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>2 5651.31</td> <td>52.50</td> <td>69.27</td> <td>-16.77</td> <td>42.35</td> <td>34.47</td> <td>8.40</td> <td>32.72</td> <td>104</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>3 5710.21</td> <td>67.33</td> <td>108.06</td> <td>-40.73</td> <td>56.91</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>104</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>4 5720.44</td> <td>68.93</td> <td>111.79</td> <td>-42.86</td> <td>58.46</td> <td>34.59</td> <td>8.66</td> <td>32.78</td> <td>104</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5755.00</td> <td>102.35</td> <td>-----</td> <td>-----</td> <td>91.73</td> <td>34.65</td> <td>8.77</td> <td>32.80</td> <td>104</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5602.33	54.49	68.30	-13.81	44.57	34.38	8.22	32.68	104	184	PEAK	2 5651.31	52.50	69.27	-16.77	42.35	34.47	8.40	32.72	104	184	PEAK	3 5710.21	67.33	108.06	-40.73	56.91	34.57	8.62	32.77	104	184	PEAK	4 5720.44	68.93	111.79	-42.86	58.46	34.59	8.66	32.78	104	184	PEAK	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5755.00	102.35	-----	-----	91.73	34.65	8.77	32.80	104	184	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																	
1 5602.33	54.49	68.30	-13.81	44.57	34.38	8.22	32.68	104	184	PEAK																																																																																														
2 5651.31	52.50	69.27	-16.77	42.35	34.47	8.40	32.72	104	184	PEAK																																																																																														
3 5710.21	67.33	108.06	-40.73	56.91	34.57	8.62	32.77	104	184	PEAK																																																																																														
4 5720.44	68.93	111.79	-42.86	58.46	34.59	8.66	32.78	104	184	PEAK																																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																	
1 5755.00	102.35	-----	-----	91.73	34.65	8.77	32.80	104	184	PEAK																																																																																														
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%; text-align: center;"> <p>Blank</p> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5755.00</td> <td>94.95</td> <td>-----</td> <td>-----</td> <td>84.29</td> <td>34.66</td> <td>8.80</td> <td>32.80</td> <td>104</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5755.00	94.95	-----	-----	84.29	34.66	8.80	32.80	104	184	AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																	
1 5755.00	94.95	-----	-----	84.29	34.66	8.80	32.80	104	184	AVERAGE																																																																																														