



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB352XU
FCC ID : O57TB352XU
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Aug. 06, 2024 ~ Aug. 26, 2024

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc.(ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 8

 1.7 Test Software..... 8

 1.8 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode..... 11

 2.3 Connection Diagram of Test System..... 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example..... 13

3 TEST RESULT 14

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 19

 3.3 Power Spectral Density Measurement 21

 3.4 Unwanted Emissions Measurement 25

 3.5 AC Conducted Emission Measurement..... 30

 3.6 Antenna Requirements 32

4 LIST OF MEASURING EQUIPMENT 34

5 MEASUREMENT UNCERTAINTY 35

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.35 dB at 5135.24 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 7.54 dB at 13.99 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB352XU
FCC ID	O57TB352XU
IMEI Code	Conducted: 868752070004152 Conduction: 868752070005266 Radiation: 868752070009508
HW Version	TB352XU
SW Version	TB352XU_RF01_20240729
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 0+1> <5180 MHz ~ 5240 MHz> 802.11a : 19.91 dBm / 0.0979 W 802.11ax HE20: 20.24 dBm / 0.1057 W 802.11ax HE40: 19.07 dBm / 0.0807 W 802.11ax HE80: 17.57 dBm / 0.0571 W <5260 MHz ~ 5320 MHz> 802.11a : 19.83 dBm / 0.0962 W 802.11ax HE20: 20.15 dBm / 0.1035 W 802.11ax HE40: 19.44 dBm / 0.0879 W 802.11ax HE80: 17.29 dBm / 0.0536 W <5500 MHz ~ 5700 MHz > 802.11a : 20.30 dBm / 0.1072 W 802.11ax HE20: 20.70 dBm / 0.1175 W 802.11ax HE40: 19.53 dBm / 0.0897 W 802.11ax HE80: 16.68 dBm / 0.0466 W <5745 MHz ~ 5825 MHz> 802.11a : 19.57 dBm / 0.0906 W 802.11ax HE20: 19.69 dBm / 0.0931 W 802.11ax HE40: 18.93 dBm / 0.0782 W 802.11ax HE80: 18.71 dBm / 0.0743 W
99% Occupied Bandwidth	MIMO <Ant. 0/1> <5180 MHz ~ 5240 MHz> 802.11a : 17.11 MHz 802.11ax HE20: 19.11 MHz 802.11ax HE40: 37.71 MHz 802.11ax HE80: 77.19 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.18 MHz 802.11ax HE20: 19.10 MHz 802.11ax HE40: 37.71 MHz 802.11ax HE80: 77.19 MHz <5500 MHz ~ 5700 MHz> 802.11a : 17.21 MHz 802.11ax HE20: 19.15 MHz 802.11ax HE40: 37.76 MHz 802.11ax HE80: 77.10 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.29 MHz 802.11ax HE20: 19.14 MHz 802.11ax HE40: 37.83 MHz 802.11ax HE80: 77.26 MHz



Antenna Type / Gain	<p><5180 MHz ~ 5240 MHz> <Ant. 0> : IFA_FPC Antenna with gain -2 dBi <Ant. 1> : IFA_Metal Antenna with gain -1.5 dBi</p> <p><5260 MHz ~ 5320 MHz> <Ant. 0> : IFA_FPC Antenna with gain -2 dBi <Ant. 1> : IFA_Metal Antenna with gain -1.5 dBi</p> <p><5500 MHz ~ 5700 MHz> <Ant. 0> : IFA_FPC Antenna with gain -2 dBi <Ant. 1> : IFA_Metal Antenna with gain -1.5 dBi</p> <p><5745 MHz ~ 5825 MHz> <Ant. 0> : IFA_FPC Antenna with gain -2 dBi <Ant. 1> : IFA_Metal Antenna with gain -1.5 dBi</p>
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. WLAN_11a support MIMO CDD mode, and 11n/ac/ax support MIMO STBC mode.
2. WLAN operation in 5600 MHz ~ 5650 MHz is notched.
3. For 802.11n HT20/HT40 & 11ac VHT20/VHT40/VHT80 & 11ax HE20/HE40/HE80, the 11n/11ac power are setted less than 11ax power, thus the whole testing have assessed only 802.11ax HE20/HE40/HE80.
4. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power > partial RU, therefore the full RU perform full test to cover partial RU.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" are 40MHz bandwidth.
- 2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20 (cover 11n HT20 & 11ac VHT20)	MCS0
802.11ax HE40 (cover 11n HT40 & 11ac VHT40)	MCS0
802.11ax HE80 (cover 11ac VHT80)	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + BT Link + WLAN Link(5G) + Adaptor 1 + USB Cable 1 + Battery 1
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1	

RSE Co-location modes	
BLE 2Mbps_CH39_TX + 802.11ax HE80 CH42_TX	
BLE 2Mbps CH39_TX + 802.11ax HE80 CH42_TX + LTE Band 41 Link	


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

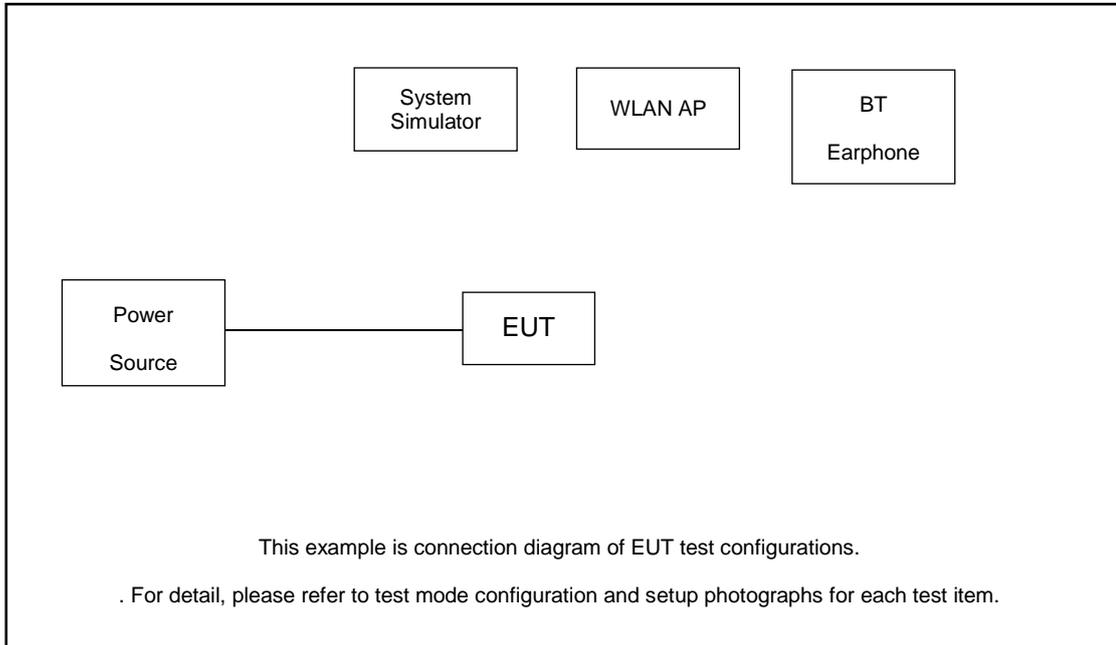

Radiated Emission:

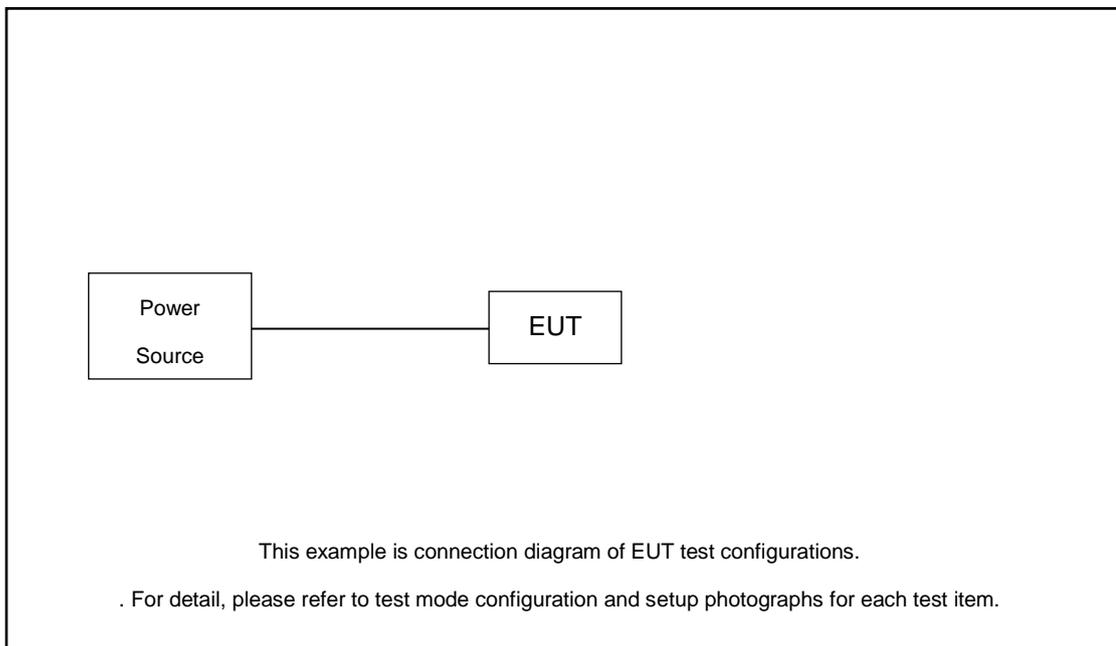



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	Earphone	apple	N/A	N/A	Unshielded,1.0m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 14.70 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 14.70 + 10 = 24.70 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.



3.1.2 Measuring Instruments



The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.

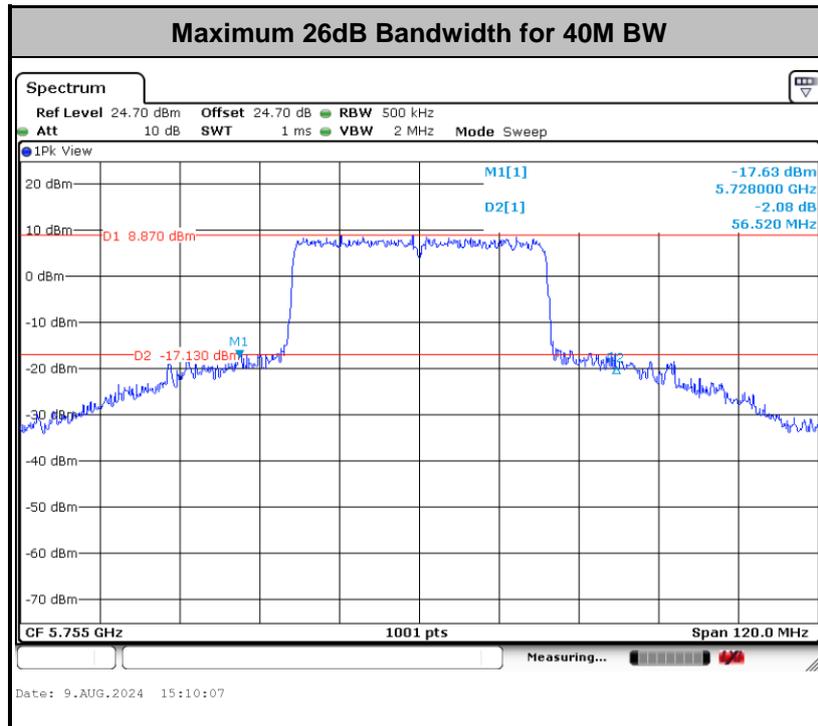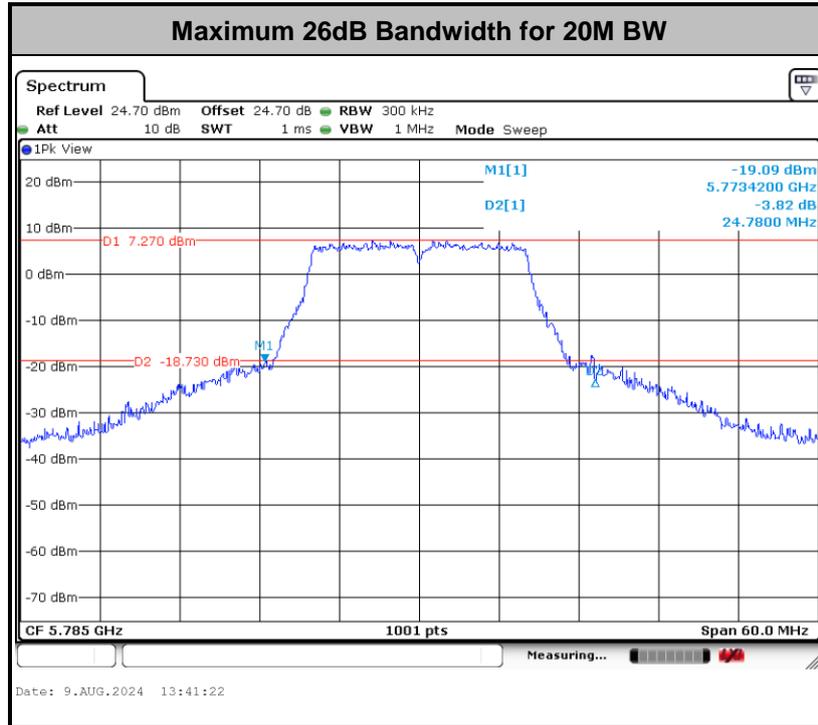

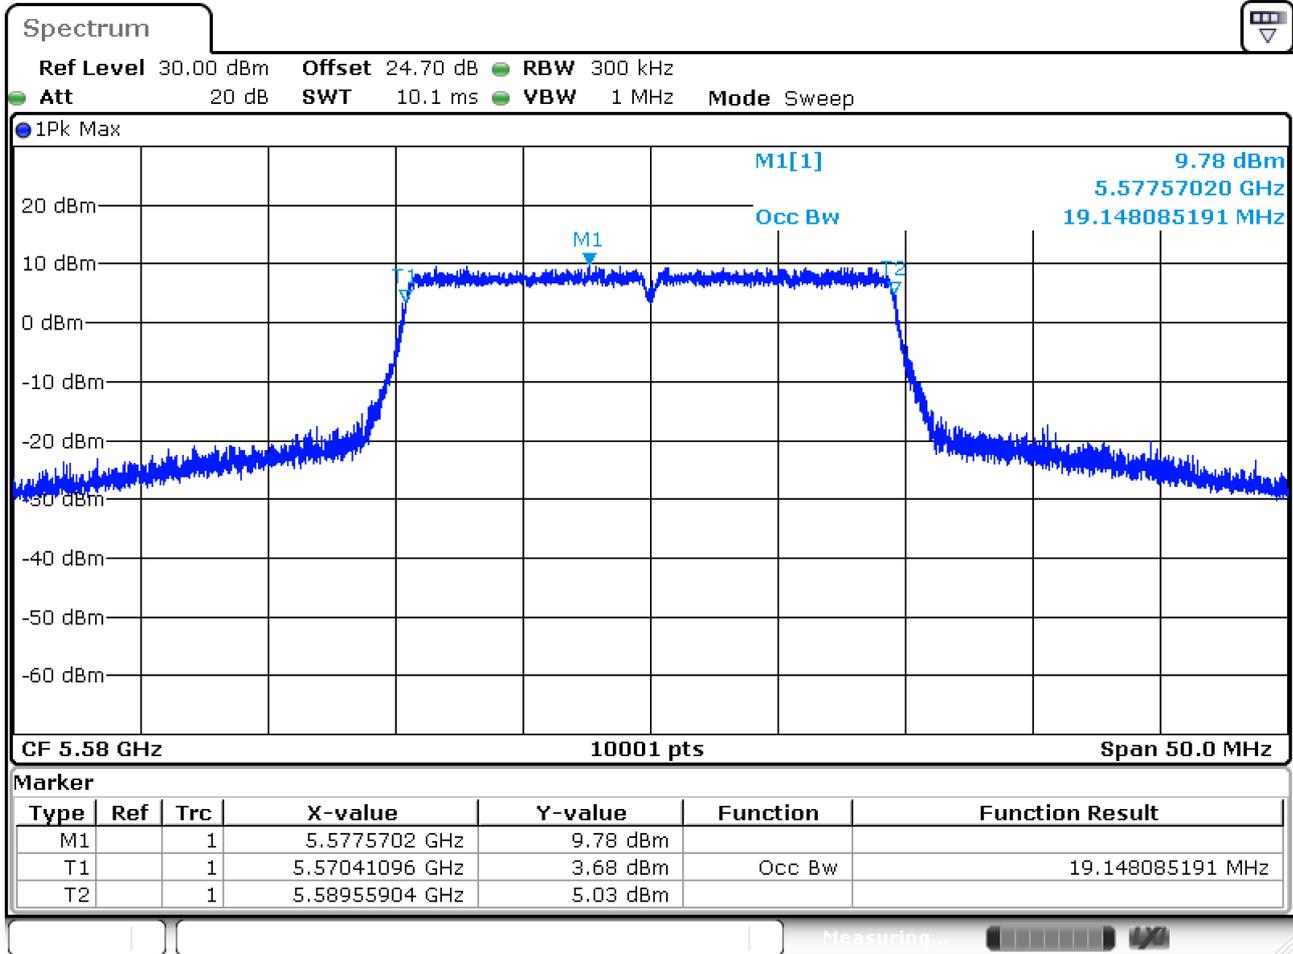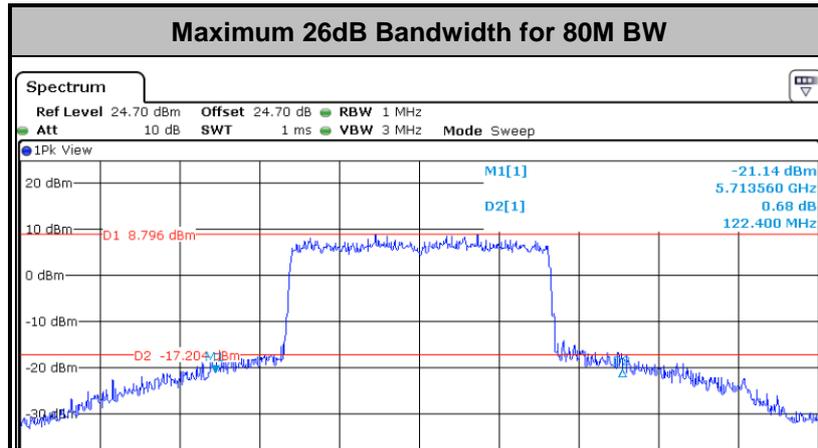

Date: 9.AUG.2024 13:09:57

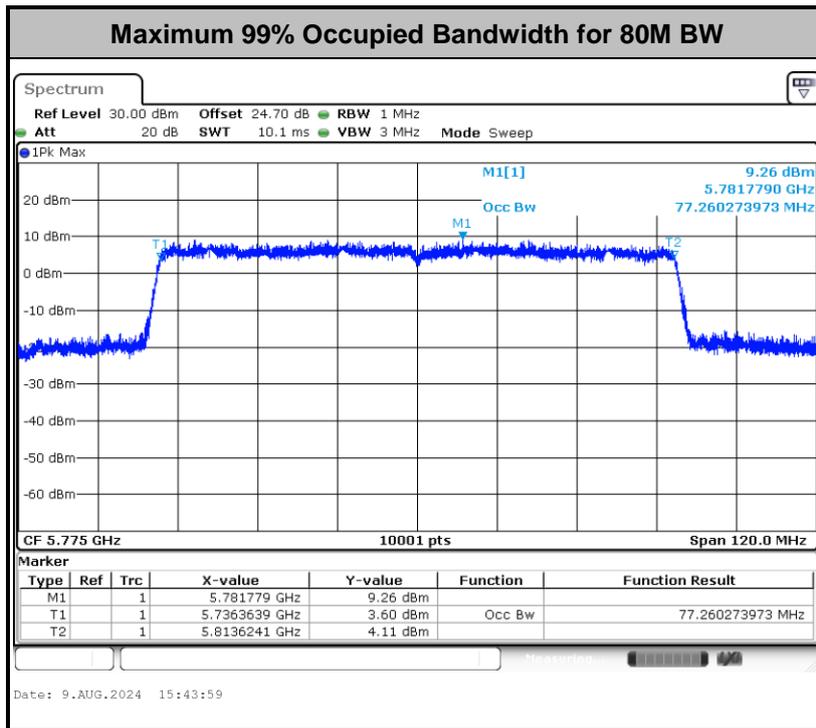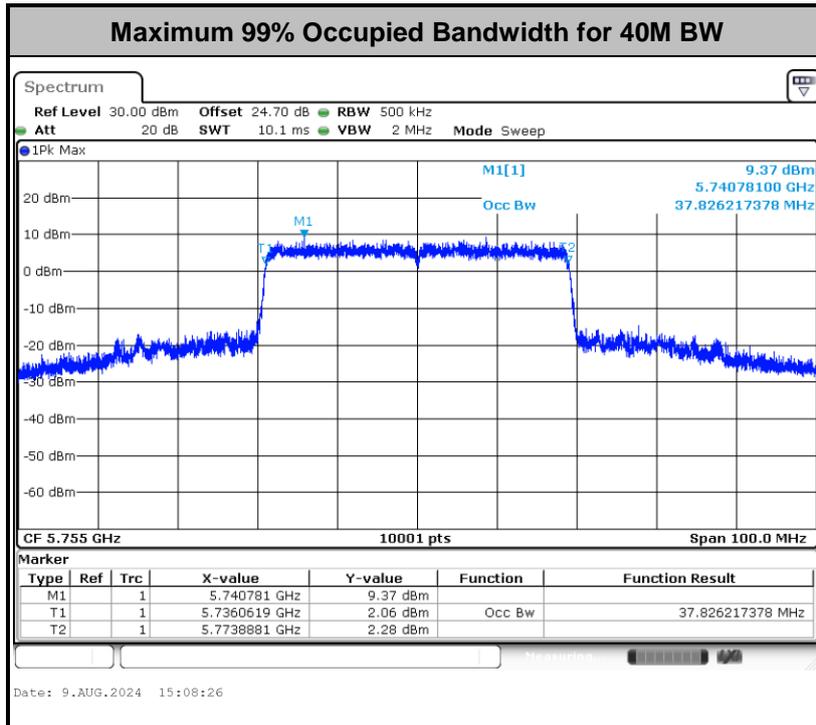

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

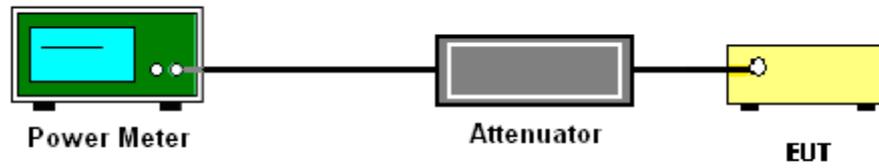

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


Method (a): Measure and sum the spectra across the outputs for UNII-1/2A/2C.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (c): Measure and add $10 \log(N_{ANT})$ dB for UNII-3.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

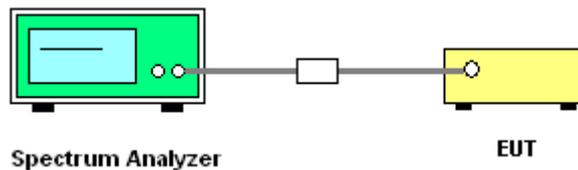


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




For UNII-1/2A/2C

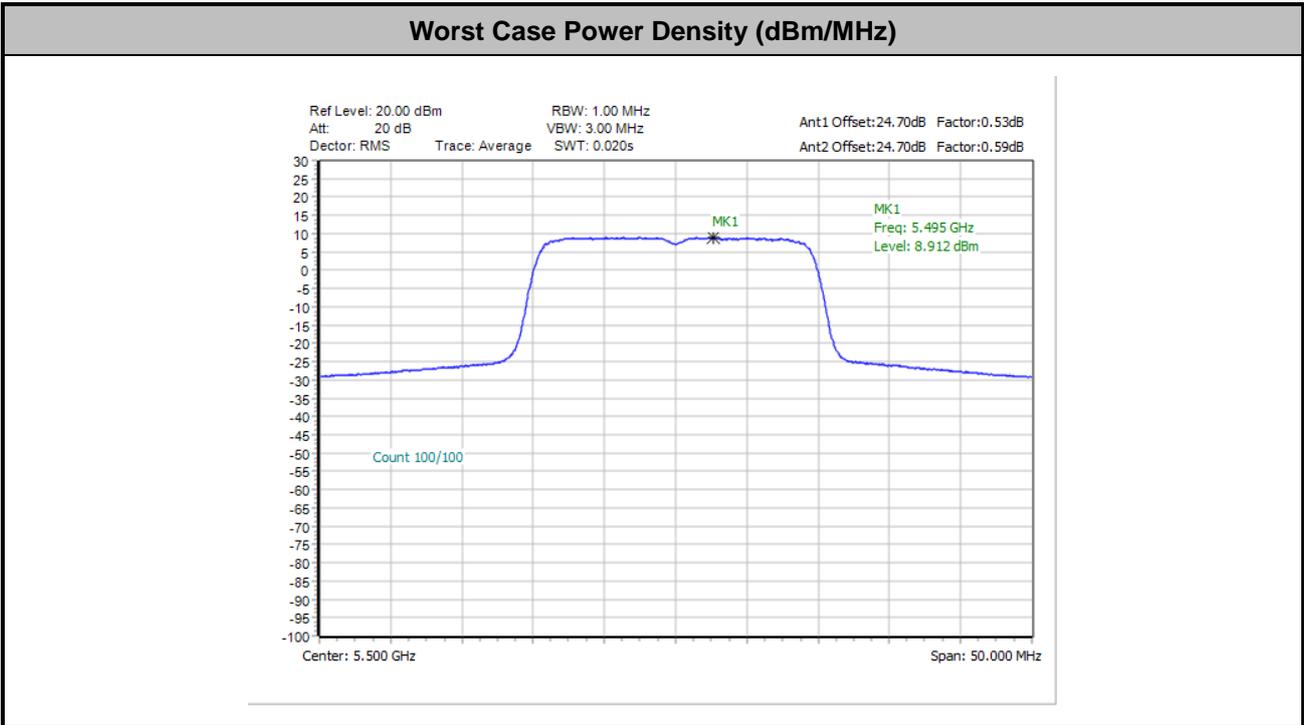

Note: Average Power Density (dB) = Measured value+ Duty Factor

For UNII-3

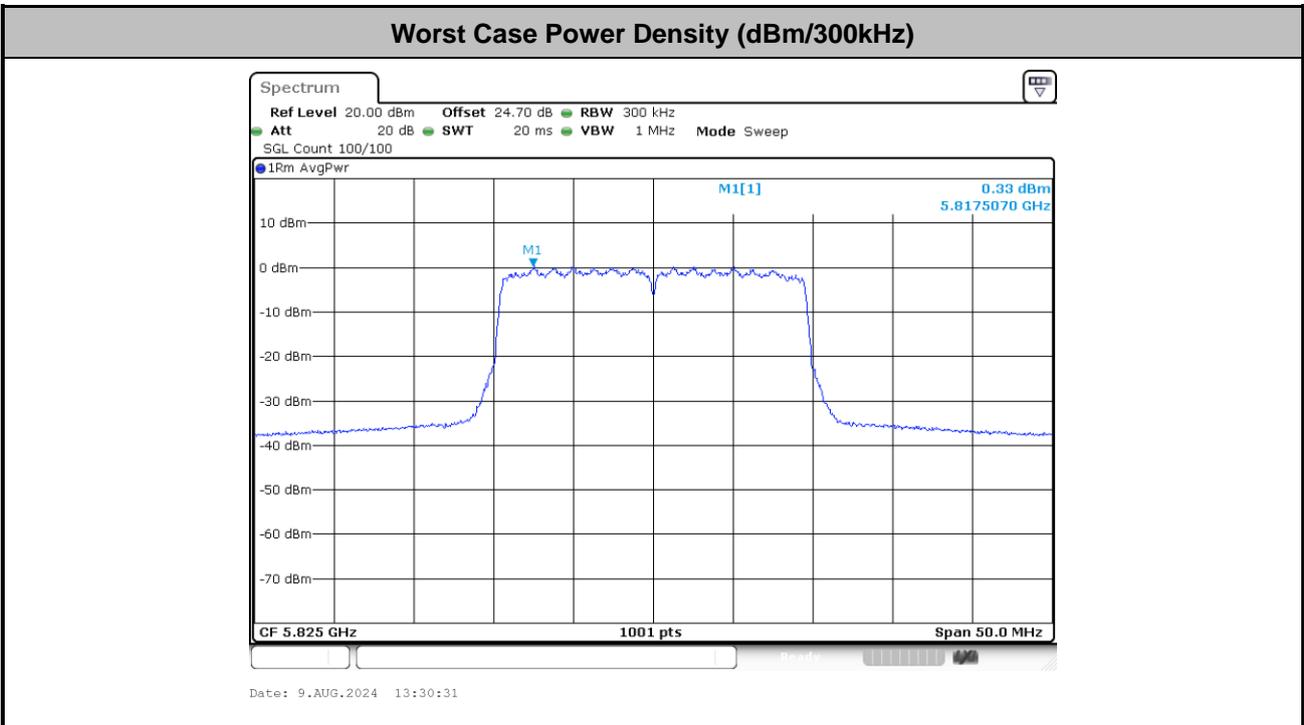

Note: Average Power Density (dB) = Measured value + Duty Factor + RBW Factor + 3.01.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

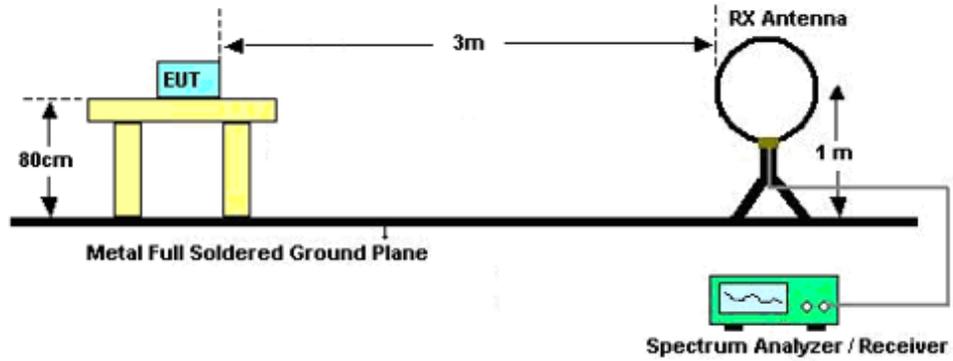

For radiated emissions from 30MHz to 1GHz

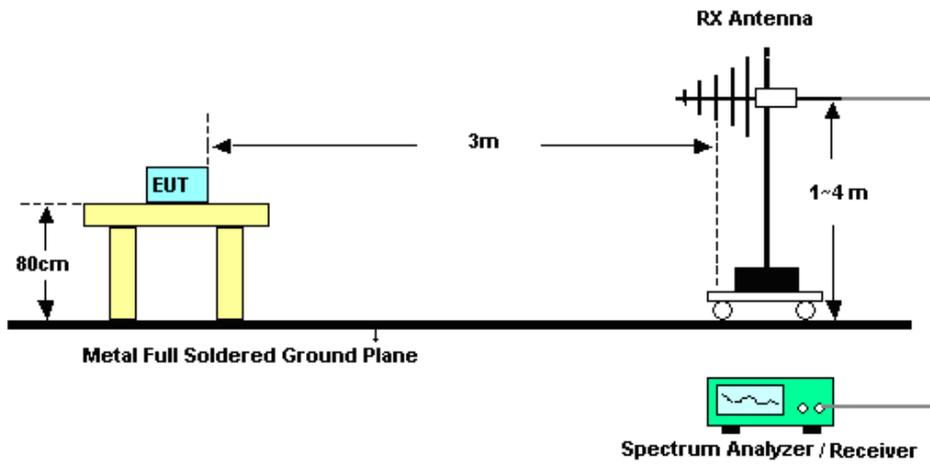

For radiated emissions above 1GHz

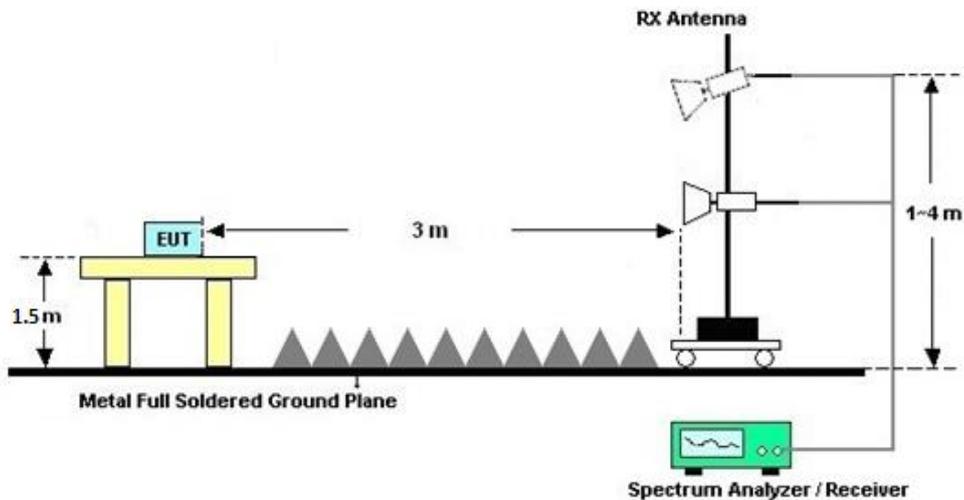



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

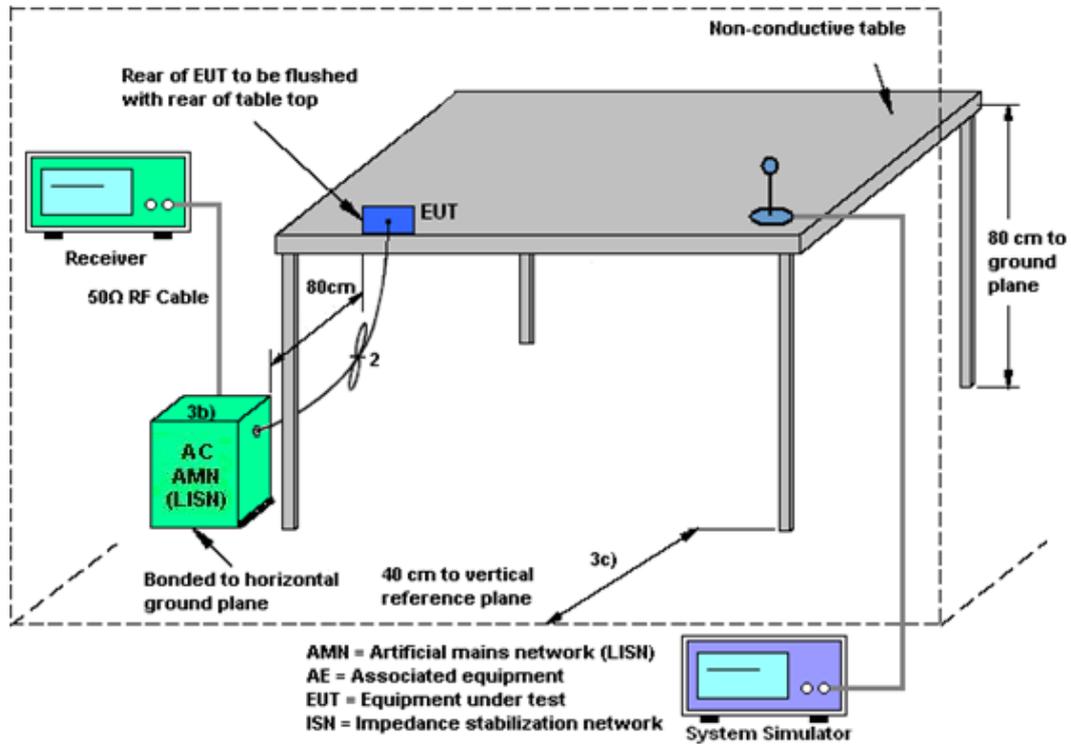

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 802 11a.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<CDD Modes>						
	Ant. 0	Ant. 1	DG	DG	Power	PSD
	(dBi)	(dBi)	for	for	Limit	Limit
			Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dB)	(dB)
UNII-1	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-2A	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-2C	-2.00	-1.50	-1.50	1.26	0.00	0.00
UNII-3	-2.00	-1.50	-1.50	1.26	0.00	0.00



<STBC Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports STBT mode.802 11n/ 802 11ac/802 11ax

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<STBC Modes>						
	Ant. 0	Ant. 1	DG	DG	Power	PSD
	(dBi)	(dBi)	for	for	Limit	Limit
			Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dB)	(dB)
UNII-1	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-2A	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-2C	-2.00	-1.50	-1.50	-1.50	0.00	0.00
UNII-3	-2.00	-1.50	-1.50	-1.50	0.00	0.00



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Aug. 06, 2024~ Aug. 26, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Aug. 06, 2024~ Aug. 26, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Aug. 06, 2024~ Aug. 26, 2024	Dec. 28, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Aug. 06, 2024~ Aug. 26, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Aug. 06, 2024~ Aug. 26, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Aug. 06, 2024~ Aug. 26, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Aug. 06, 2024~ Aug. 26, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Aug. 06, 2024~ Aug. 26, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5G Hz	Dec. 27, 2023	Aug. 06, 2024~ Aug. 26, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	Aug. 06, 2024~ Aug. 26, 2024	Jul.02, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	6160100027 29	N/A	Oct. 18, 2023	Aug. 06, 2024~ Aug. 26, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 06, 2024~ Aug. 26, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 06, 2024~ Aug. 26, 2024	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 04, 2024	Aug. 22, 2024	Jul. 03, 2025	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Jul. 04, 2024	Aug. 22, 2024	Jul. 03, 2025	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Aug. 22, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Aug. 14, 2024	Aug. 22, 2024	Aug. 13, 2025	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 09, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Aug. 09, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Aug. 09, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Aug. 09, 2024	Oct. 15, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/8/9	Relative Humidity:	51~54	%

Note: Ant.1 corresponding WIFI ANT0, Ant.2 corresponding to WIFI ANT1.

TEST RESULTS DATA
Average Power Table

FCC <5180 MHz ~ 5240 MHz>															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	Full	5180	0.44	0.49	16.83	16.97	19.91	24.00	-1.50		Pass	
11a	6Mbps	2	44	Full	5220	0.44	0.49	16.61	16.76	19.69	24.00	-1.50		Pass	
11a	6Mbps	2	48	Full	5240	0.44	0.49	16.50	16.64	19.58	24.00	-1.50		Pass	
HE20	MCS8	2	36	Full	5180	0.53	0.59	17.09	17.37	20.24	24.00	-1.50		Pass	
				26/0		0.53	0.59	8.69	8.83	11.77	24.00	-1.50		Pass	
				52/37		0.53	0.59	11.19	11.42	14.32	24.00	-1.50		Pass	
				106/53		0.53	0.59	14.04	14.18	17.12	24.00	-1.50		Pass	
			44	Full	5220	0.53	0.59	16.94	17.12	20.04	24.00	-1.50		Pass	
			48	Full	5240	0.53	0.59	16.80	16.98	19.90	24.00	-1.50		Pass	
				26/8		0.53	0.59	8.27	8.48	11.39	24.00	-1.50		Pass	
				52/40		0.53	0.59	10.94	11.25	14.11	24.00	-1.50		Pass	
				106/54		0.53	0.59	13.78	13.87	16.84	24.00	-1.50		Pass	
				HE40		MCS8	2	38	Full	5190	0.76	0.76	14.18	15.19	17.72
46	Full	5230		0.76		0.76	16.03	16.09	19.07	24.00	-1.50	Pass			
HE80	MCS8	2	42	Full	5210	0.95	0.95	14.53	14.59	17.57	24.00	-1.50	Pass		

TEST RESULTS DATA
Average Power Table

FCC<5260 MHz ~ 5320 MHz>																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	Full	5260	0.44	0.49	16.76	16.88	19.83	23.98		-1.50	26.99	Pass	
11a	6Mbps	2	60	Full	5300	0.44	0.49	16.66	16.84	19.76	23.98		-1.50	26.99	Pass	
11a	6Mbps	2	64	Full	5320	0.44	0.49	16.60	16.77	19.69	23.98		-1.50	26.99	Pass	
HE20	MCS8	2	52	Full	5260	0.53	0.59	17.05	17.23	20.15	23.98		-1.50	26.99	Pass	
				26/0		0.53	0.59	8.54	8.85	11.71	23.98		-1.50	26.99	Pass	
				52/37		0.53	0.59	11.25	11.34	14.31	23.98		-1.50	26.99	Pass	
				106/53		0.53	0.59	14.03	14.20	17.13	23.98		-1.50	26.99	Pass	
			60	Full	5300	0.53	0.59	16.92	17.12	20.03	23.98		-1.50	26.99	Pass	
			64	Full	5320	0.53	0.59	16.85	17.05	19.96	23.98		-1.50	26.99	Pass	
				26/8		0.53	0.59	8.89	9.15	12.03	23.98		-1.50	26.99	Pass	
				52/40		0.53	0.59	11.25	11.41	14.34	23.98		-1.50	26.99	Pass	
106/54	0.53	0.59		13.95		14.12	17.05	23.98		-1.50	26.99	Pass				
HE40	MCS8	2	54	Full	5270	0.76	0.76	16.40	16.46	19.44	23.98		-1.50	26.99	Pass	
			62	Full	5310	0.76	0.76	15.18	15.34	18.27	23.98		-1.50	26.99	Pass	
HE80	MCS8	2	58	Full	5290	0.95	0.95	14.37	14.19	17.29	23.98		-1.50	26.99	Pass	

TEST RESULTS DATA
Average Power Table

FCC <5500 MHz ~ 5700 MHz >																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	Full	5500	0.44	0.49	17.16	17.43	20.30	23.98		-1.50	26.99	Pass	
11a	6Mbps	2	116	Full	5580	0.44	0.49	16.85	17.02	19.94	23.98		-1.50	26.99	Pass	
11a	6Mbps	2	140	Full	5700	0.44	0.49	16.20	16.54	19.38	23.98		-1.50	26.99	Pass	
HE20	MCS8	2	100	Full	5500	0.53	0.59	17.54	17.83	20.70	23.98		-1.50	26.99	Pass	
				26/0		0.53	0.59	8.70	9.10	11.91	23.98		-1.50	26.99	Pass	
				52/37		0.53	0.59	11.47	11.96	14.73	23.98		-1.50	26.99	Pass	
				106/53		0.53	0.59	14.26	14.71	17.50	23.98		-1.50	26.99	Pass	
		2	116	Full	5580	0.53	0.59	17.19	17.43	20.32	23.98		-1.50	26.99	Pass	
		2	140	Full	5700	0.53	0.59	14.32	14.85	17.60	23.98		-1.50	26.99	Pass	
				26/8		0.53	0.59	7.79	8.19	11.00	23.98		-1.50	26.99	Pass	
				52/40		0.53	0.59	10.46	10.71	13.60	23.98		-1.50	26.99	Pass	
106/54	0.53			0.59		13.28	13.61	16.46	23.98		-1.50	26.99	Pass			
HE40	MCS8	2	102	Full	5510	0.76	0.76	16.10	16.20	19.16	23.98		-1.50	26.99	Pass	
			110	Full	5550	0.76	0.76	16.51	16.54	19.53	23.98		-1.50	26.99	Pass	
			134	Full	5670	0.76	0.76	15.74	16.08	18.92	23.98		-1.50	26.99	Pass	
HE80	MCS8	2	106	Full	5530	0.95	0.95	13.62	13.73	16.68	23.98		-1.50	26.99	Pass	

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz>															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	Full	5745	0.44	0.49	16.36	16.75	19.57	30.00		-1.50	Pass	
11a	6Mbps	2	157	Full	5785	0.44	0.49	16.38	16.61	19.50	30.00		-1.50	Pass	
11a	6Mbps	2	165	Full	5825	0.44	0.49	16.35	16.60	19.48	30.00		-1.50	Pass	
HE20	MCS8	2	149	Full	5745	0.53	0.59	16.52	16.84	19.69	30.00		-1.50	Pass	
HE20	MCS8	2	149	26/0	5745	0.53	0.59	8.16	8.04	11.11	30.00		-1.50	Pass	
HE20	MCS8	2	149	52/37	5745	0.53	0.59	11.19	11.37	14.29	30.00		-1.50	Pass	
HE20	MCS8	2	149	106/53	5745	0.53	0.59	13.89	14.21	17.06	30.00		-1.50	Pass	
HE20	MCS8	2	157	Full	5785	0.53	0.59	16.38	16.72	19.56	30.00		-1.50	Pass	
HE20	MCS8	2	165	Full	5825	0.53	0.59	16.46	16.71	19.55	30.00		-1.50	Pass	
HE20	MCS8	2	165	26/8	5825	0.53	0.59	8.19	7.92	11.07	30.00		-1.50	Pass	
HE20	MCS8	2	165	52/40	5825	0.53	0.59	10.80	10.49	13.66	30.00		-1.50	Pass	
HE20	MCS8	2	165	106/54	5825	0.53	0.59	13.64	13.58	16.62	30.00		-1.50	Pass	
HE40	MCS8	2	151	Full	5755	0.76	0.76	15.90	15.94	18.93	30.00		-1.50	Pass	
HE40	MCS8	2	159	Full	5795	0.76	0.76	15.60	16.07	18.85	30.00		-1.50	Pass	
HE80	MCS8	2	155	Full	5775	0.95	0.95	15.63	15.77	18.71	30.00		-1.50	Pass	

TEST RESULTS DATA
Power Spectral Density

<5180 MHz ~ 5240 MHz>															
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	Full	5180	0.44	0.49			8.29	11.00	1.26		Pass	
11a	6Mbps	2	44	Full	5220	0.44	0.49			8.00	11.00	1.26		Pass	
11a	6Mbps	2	48	Full	5240	0.44	0.49			7.84	11.00	1.26		Pass	
HE20	MCS8	2	36	Full	5180	0.53	0.59			8.08	11.00	-1.50		Pass	
				26/0		0.53	0.59			7.24	11.00	-1.50		Pass	
				52/37		0.53	0.59			7.55	11.00	-1.50		Pass	
				106/53		0.53	0.59			7.34	11.00	-1.50		Pass	
HE20	MCS8	2	44	Full	5220	0.53	0.59			7.91	11.00	-1.50		Pass	
HE20	MCS8	2	48	Full	5240	0.53	0.59			7.91	11.00	-1.50		Pass	
				26/8		0.53	0.59			7.51	11.00	-1.50		Pass	
				52/40		0.53	0.59			7.24	11.00	-1.50		Pass	
				106/54		0.53	0.59			6.98	11.00	-1.50		Pass	
HE40	MCS8	2	38	Full	5190	0.76	0.76			5.71	11.00	-1.50		Pass	
HE40	MCS8	2	46	Full	5230	0.76	0.76			5.48	11.00	-1.50		Pass	
HE80	MCS8	2	42	Full	5210	0.95	0.95			2.93	11.00	-1.50		Pass	

TEST RESULTS DATA
Power Spectral Density

<5260 MHz ~ 5320 MHz>															
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	Full	5260	0.44	0.49			8.15	11.00		1.26	Pass	
11a	6Mbps	2	60	Full	5300	0.44	0.49			8.13	11.00		1.26	Pass	
11a	6Mbps	2	64	Full	5320	0.44	0.49			8.10	11.00		1.26	Pass	
HE20	MCS8	2	52	Full	5260	0.10	0.03			8.26	11.00		-1.50	Pass	
				26/0		0.10	0.03			8.01	11.00		-1.50	Pass	
				52/37		0.10	0.03			7.47	11.00		-1.50	Pass	
				106/53		0.10	0.03			7.22	11.00		-1.50	Pass	
HE20	MCS8	2	60	Full	5300	0.10	0.03			8.21	11.00		-1.50	Pass	
HE20	MCS8	2	64	Full	5320	0.10	0.03			8.13	11.00		-1.50	Pass	
				26/8		0.10	0.03			7.78	11.00		-1.50	Pass	
				52/40		0.10	0.03			7.32	11.00		-1.50	Pass	
				106/54		0.10	0.03			7.14	11.00		-1.50	Pass	
HE40	MCS8	2	54	Full	5270	0.12	0.10			5.88	11.00		-1.50	Pass	
HE40	MCS8	2	62	Full	5310	0.12	0.10			5.88	11.00		-1.50	Pass	
HE80	MCS8	2	58	Full	5290	0.20	0.18			2.54	11.00		-1.50	Pass	

TEST RESULTS DATA
Power Spectral Density

<5500 MHz ~ 5700 MHz >															
Mod.	Data Rate	NTx	CH.		Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	Full	5500	0.44	0.49			8.87	11.00	1.26			Pass
11a	6Mbps	2	116	Full	5580	0.44	0.49			8.45	11.00	1.26			Pass
11a	6Mbps	2	140	Full	5700	0.44	0.49			7.49	11.00	1.26			Pass
HE20	MCS8	2	100	Full	5500	0.10	0.03			8.91	11.00	-1.50			Pass
				26/0		0.10	0.03			8.39	11.00	-1.50		Pass	
				52/37		0.10	0.03			8.15	11.00	-1.50		Pass	
				106/53		0.10	0.03			7.91	11.00	-1.50		Pass	
HE20	MCS8	2	116	Full	5580	0.10	0.03			8.49	11.00	-1.50			Pass
HE20	MCS8	2	140	Full	5700	0.10	0.03			7.35	11.00	-1.50			Pass
				26/8		0.10	0.03			6.55	11.00	-1.50		Pass	
				52/40		0.10	0.03			6.68	11.00	-1.50		Pass	
				106/54		0.10	0.03			6.59	11.00	-1.50		Pass	
HE40	MCS8	2	102	Full	5510	0.12	0.10			6.39	11.00	-1.50			Pass
HE40	MCS8	2	110	Full	5550	0.12	0.10			6.12	11.00	-1.50			Pass
HE40	MCS8	2	134	Full	5670	0.12	0.10			5.24	11.00	-1.50			Pass
HE80	MCS8	2	106	Full	5530	0.20	0.18			3.36	11.00	-1.50			Pass

TEST RESULTS DATA
Power Spectral Density

<5745 MHz ~ 5825 MHz>																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Worst+3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	Full	5745	0.44	0.49	2.22	1.88	2.31	5.32	30.00		1.26		Pass	
11a	6Mbps	2	157	Full	5785	0.44	0.49	2.22	1.70	2.36	5.37	30.00		1.26		Pass	
11a	6Mbps	2	165	Full	5825	0.44	0.49	2.22	1.63	2.37	5.38	30.00		1.26		Pass	
HE20	MCS8	2	149	Full	5745	0.53	0.59	2.22	2.10	2.78	5.79	30.00		-1.50		Pass	
HE20	MCS8	2	149	26/0	5745	0.53	0.59	2.22	1.59	1.44	4.60	30.00		-1.50		Pass	
HE20	MCS8	2	149	52/37	5745	0.53	0.59	2.22	1.33	2.08	5.09	30.00		-1.50		Pass	
HE20	MCS8	2	149	106/53	5745	0.53	0.59	2.22	1.54	1.88	4.89	30.00		-1.50		Pass	
HE20	MCS8	2	157	Full	5785	0.53	0.59	2.22	2.42	2.94	5.95	30.00		-1.50		Pass	
HE20	MCS8	2	165	Full	5825	0.53	0.59	2.22	2.18	3.14	6.15	30.00		-1.50		Pass	
HE20	MCS8	2	165	26/8	5825	0.53	0.59	2.22	2.02	1.64	5.03	30.00		-1.50		Pass	
HE20	MCS8	2	165	52/40	5825	0.53	0.59	2.22	1.76	1.29	4.77	30.00		-1.50		Pass	
HE20	MCS8	2	165	106/54	5825	0.53	0.59	2.22	1.56	1.54	4.57	30.00		-1.50		Pass	
HE40	MCS8	2	151	Full	5755	0.76	0.76	2.22	0.50	0.78	3.79	30.00		-1.50		Pass	
HE40	MCS8	2	159	Full	5795	0.76	0.76	2.22	0.42	1.10	4.11	30.00		-1.50		Pass	
HE80	MCS8	2	155	Full	5775	0.95	0.00	2.22	-2.32	-3.14	0.69	30.00		-1.50		Pass	

TEST RESULTS DATA
26dB and 99% OBW

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)			Note
					Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	17.11	16.95	21.66	21.60		
11a	6Mbps	2	44	5220	16.94	16.93	21.78	21.72		
11a	6Mbps	2	48	5240	17.11	16.93	21.78	21.66		
HE20	MCS8	2	36	5180	19.08	19.07	21.84	21.78		
HE20	MCS8	2	44	5220	19.10	19.06	21.96	21.78		
HE20	MCS8	2	48	5240	19.11	19.09	21.72	21.96		
HE40	MCS8	2	38	5190	37.71	37.66	40.44	40.56		
HE40	MCS8	2	46	5230	37.68	37.65	40.92	40.44		
HE80	MCS8	2	42	5210	77.18	77.19	82.08	82.32		

TEST RESULTS DATA
26dB and 99% OBW

<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	17.12	16.93	21.78	21.72	23.98		
11a	6Mbps	2	60	5300	17.07	16.94	21.90	21.66	23.98		
11a	6Mbps	2	64	5320	17.18	16.94	21.72	21.72	23.98		
HE20	MCS8	2	52	5260	19.08	19.08	22.02	21.90	23.98		
HE20	MCS8	2	60	5300	19.10	19.08	22.14	21.90	23.98		
HE20	MCS8	2	64	5320	19.09	19.10	22.02	21.90	23.98		
HE40	MCS8	2	54	5270	37.71	37.66	40.32	40.20	23.98		
HE40	MCS8	2	62	5310	37.69	37.63	40.20	40.32	23.98		
HE80	MCS8	2	58	5290	77.19	77.18	82.08	82.32	23.98		

TEST RESULTS DATA
26dB and 99% OBW

<5500 MHz ~ 5700 MHz >											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	17.18	16.94	22.02	21.66	23.98		
11a	6Mbps	2	116	5580	17.21	16.94	21.78	21.66	23.98		
11a	6Mbps	2	140	5700	17.18	16.93	21.54	21.78	23.98		
HE20	MCS8	2	100	5500	19.08	19.07	21.84	21.90	23.98		
HE20	chain0	2	116	5580	19.15	19.07	21.90	21.84	23.98		
HE20	MCS8	2	140	5700	19.13	19.09	22.44	22.02	23.98		
HE40	MCS8	2	102	5510	37.76	37.64	40.68	40.32	23.98		
HE40	MCS8	2	110	5550	37.69	37.63	41.76	40.20	23.98		
HE40	MCS8	2	134	5670	37.70	37.62	40.44	40.20	23.98		
HE80	MCS8	2	106	5530	77.09	77.10	81.84	82.56	23.98		


TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

<5745 MHz ~ 5825 MHz>													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	17.29	16.95	24.12	21.72	16.45	16.50	0.5		Pass
11a	6Mbps	2	157	5785	17.26	16.91	24.78	22.02	16.45	16.45	0.5		Pass
11a	6Mbps	2	165	5825	17.24	16.92	24.00	21.54	16.50	16.50	0.5		Pass
HE20	MCS8	2	149	5745	19.13	19.09	22.92	21.72	19.10	19.10	0.5		Pass
HE20	MCS8	2	157	5785	19.12	19.09	23.46	21.84	19.10	19.10	0.5		Pass
HE20	MCS8	2	165	5825	19.14	19.06	22.26	21.36	19.10	19.15	0.5		Pass
HE40	MCS8	2	151	5755	37.83	37.63	56.52	40.44	38.16	38.07	0.5		Pass
HE40	MCS8	2	159	5795	37.76	37.58	55.80	39.96	37.89	37.80	0.5		Pass
HE80	MCS8	2	155	5775	77.26	77.18	122.40	83.04	78.24	77.92	0.5		Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

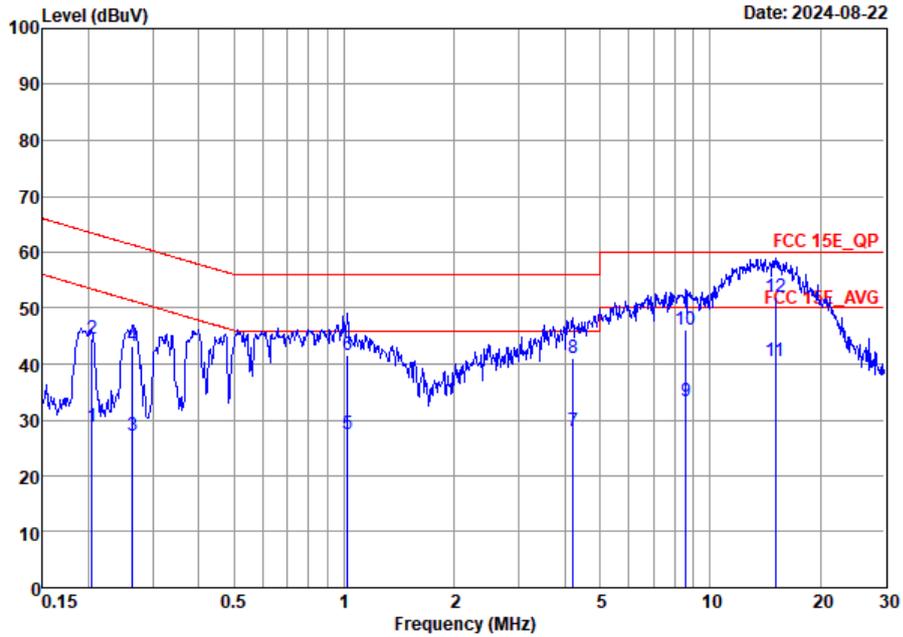


Site : CO01-SZ
 Condition: FCC 15E_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	28.84	-24.61	53.45	8.90	9.79	10.15	Average
2	0.20	44.44	-19.01	63.45	24.50	9.79	10.15	QP
3	0.26	27.21	-24.08	51.29	7.30	9.76	10.15	Average
4	0.26	43.11	-18.18	61.29	23.20	9.76	10.15	QP
5	1.02	27.38	-18.62	46.00	7.50	9.72	10.16	Average
6	1.02	41.48	-14.52	56.00	21.60	9.72	10.16	QP
7	4.22	27.88	-18.12	46.00	7.80	9.75	10.33	Average
8	4.22	41.18	-14.82	56.00	21.10	9.75	10.33	QP
9	8.59	33.31	-16.69	50.00	13.21	9.73	10.37	Average
10	8.59	46.11	-13.89	60.00	26.01	9.73	10.37	QP
11	15.07	40.66	-9.34	50.00	20.20	9.97	10.49	Average
12 *	15.07	51.96	-8.04	60.00	31.50	9.97	10.49	QP



Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

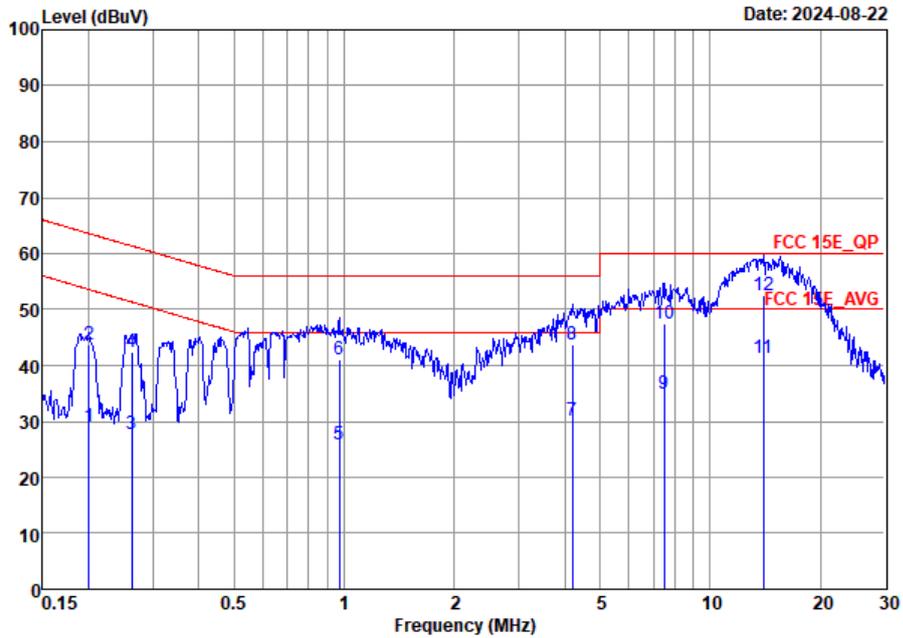

Site : C001-SZ
 Condition: FCC 15E QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	28.97	-24.61	53.58	9.10	9.72	10.15	Average
2	0.20	43.77	-19.81	63.58	23.90	9.72	10.15	QP
3	0.26	27.71	-23.63	51.34	7.80	9.76	10.15	Average
4	0.26	42.41	-18.93	61.34	22.50	9.76	10.15	QP
5	0.97	25.75	-20.25	46.00	5.90	9.69	10.16	Average
6	0.97	40.95	-15.05	56.00	21.10	9.69	10.16	QP
7	4.20	30.13	-15.87	46.00	10.10	9.70	10.33	Average
8	4.20	43.83	-12.17	56.00	23.80	9.70	10.33	QP
9	7.49	34.98	-15.02	50.00	14.90	9.71	10.37	Average
10	7.49	47.38	-12.62	60.00	27.30	9.71	10.37	QP
11	13.99	41.36	-8.64	50.00	21.10	9.79	10.47	Average
12 *	13.99	52.46	-7.54	60.00	32.20	9.79	10.47	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD0+1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD0+1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD0+1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 10	U-NII-2A	5.25-5.35	CDD0+1	802.11a	52	5260	6Mbps	-	-
Mode 11	U-NII-2A	5.25-5.35	CDD0+1	802.11a	60	5300	6Mbps	-	-
Mode 12	U-NII-2A	5.25-5.35	CDD0+1	802.11a	64	5320	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 19	U-NII-2C	5.47-5.725	CDD0+1	802.11a	100	5500	6Mbps	-	-
Mode 20	U-NII-2C	5.47-5.725	CDD0+1	802.11a	116	5580	6Mbps	-	-
Mode 21	U-NII-2C	5.47-5.725	CDD0+1	802.11a	140	5700	6Mbps	-	-
Mode 22	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 23	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 25	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 26	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 29	U-NII-3	5.725-5.85	CDD0+1	802.11a	149	5745	6Mbps	-	-
Mode 30	U-NII-3	5.725-5.85	CDD0+1	802.11a	157	5785	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	CDD0+1	802.11a	165	5825	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 33	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 34	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 35	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 36	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 37	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 38	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE20	36	5180	MCS0	Partial RU52-37	-



Mode 39	U-NII-2A	5.25-5.35	STBC0+1	802.11ax HE20	64	5320	MCS0	Partial RU26-8	-
Mode 40	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE20	100	5500	MCS0	Partial RU26-0	-
Mode 41	U-NII-2C	5.47-5.725	STBC0+1	802.11ax HE20	140	5700	MCS0	Partial RU26-8	-
Mode 42	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE20	149	5745	MCS0	Partial RU52-37	-
Mode 43	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE20	165	5825	MCS0	Partial RU26-8	-
Mode 44	U-NII-1	5.15-5.25	STBC0+1	802.11ax HE80	42	LF	MCS0	Full RU	LF
Mode 45	U-NII-3	5.725-5.85	STBC0+1	802.11ax HE80	155	LF	MCS0	Full RU	LF
Mode 46	Co-TX	2400-2483.5	0	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
		5.15-5.25	STBC0+1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 47	Co-TX	WWAN RSE	default	LTE B41		-	-	-	-
		2400-2483.5	0	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
		5.15-5.25	STBC0+1	802.11ax HE80	42	5210	MCS0	Full RU	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.94	44.84	54.00	-9.16	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	45.46	68.30	-22.84	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	44.60	68.30	-23.70	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	45.26	68.30	-23.04	V	Peak	Pass	Harmonic
4	802.11ax HE20	36	5149.76	49.56	54.00	-4.44	V	AVERAGE	Pass	Band Edge
4	802.11ax HE20	36	10360.00	45.19	68.30	-23.11	V	Peak	Pass	Harmonic
5	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
5	802.11ax HE20	44	10440.00	45.91	68.30	-22.39	V	Peak	Pass	Harmonic
6	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
6	802.11ax HE20	48	10480.00	44.88	68.30	-23.42	H	Peak	Pass	Harmonic
7	802.11ax HE40	38	5149.91	50.61	54.00	-3.39	V	AVERAGE	Pass	Band Edge
7	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
8	802.11ax HE40	46	5402.96	45.82	54.00	-8.18	V	AVERAGE	Pass	Band Edge
8	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
9	802.11ax HE80	42	5135.24	50.65	54.00	-3.35	V	AVERAGE	Pass	Band Edge
9	802.11ax HE80	42	10420.00	47.15	68.30	-21.15	H	Peak	Pass	Harmonic
10	802.11a	52	-	-	-	-	-	-	-	Band Edge
10	802.11a	52	10520.00	46.14	68.30	-22.16	V	Peak	Pass	Harmonic
11	802.11a	60	-	-	-	-	-	-	-	Band Edge
11	802.11a	60	15900.00	47.50	74.00	-26.50	H	Peak	Pass	Harmonic
12	802.11a	64	5350.10	43.53	54.00	-10.47	V	AVERAGE	Pass	Band Edge
12	802.11a	64	15960.00	47.34	74.00	-26.66	H	Peak	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	45.72	68.30	-22.58	V	Peak	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	15900.00	47.13	74.00	-26.87	H	Peak	Pass	Harmonic
15	802.11ax HE20	64	5351.36	48.46	54.00	-5.54	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	15960.00	47.80	74.00	-26.20	H	Peak	Pass	Harmonic
16	802.11ax HE40	54	5397.68	45.67	54.00	-8.33	V	AVERAGE	Pass	Band Edge
16	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
17	802.11ax HE40	62	5353.95	49.58	54.00	-4.42	V	AVERAGE	Pass	Band Edge
17	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
18	802.11ax HE80	58	5356.81	50.51	54.00	-3.49	V	AVERAGE	Pass	Band Edge
18	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
19	802.11a	100	5470.00	59.14	68.30	-9.16	V	PEAK	Pass	Band Edge
19	802.11a	100	16500.00	46.60	68.30	-21.70	H	Peak	Pass	Harmonic
20	802.11a	116	-	-	-	-	-	-	-	Band Edge
20	802.11a	116	16740.00	46.53	68.30	-21.77	H	Peak	Pass	Harmonic
21	802.11a	140	5725.61	63.02	68.30	-5.28	H	PEAK	Pass	Band Edge
21	802.11a	140	17100.00	47.71	68.30	-20.59	V	Peak	Pass	Harmonic
22	802.11ax HE20	100	5470.00	62.96	68.30	-5.34	H	PEAK	Pass	Band Edge
22	802.11ax HE20	100	16500.00	45.94	68.30	-22.36	H	Peak	Pass	Harmonic
23	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
23	802.11ax HE20	116	16740.00	45.99	68.30	-22.31	V	Peak	Pass	Harmonic
24	802.11ax HE20	140	5725.48	62.23	68.30	-6.07	H	PEAK	Pass	Band Edge
24	802.11ax HE20	140	17100.00	48.64	68.30	-19.66	V	Peak	Pass	Harmonic
25	802.11ax HE40	102	5459.44	50.62	54.00	-3.38	V	AVERAGE	Pass	Band Edge
25	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE40	134	5726.43	60.90	68.30	-7.40	H	PEAK	Pass	Band Edge
26	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE80	106	5457.82	50.21	54.00	-3.79	V	AVERAGE	Pass	Band Edge



27	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
29	802.11a	149	-	-	-	-	-	-	-	Band Edge
	802.11a	149	17235.00	47.48	68.30	-20.82	H	Peak	Pass	Harmonic
30	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	17355.00	48.48	68.30	-19.82	V	Peak	Pass	Harmonic
31	802.11a	165	5942.00	51.28	68.30	-17.02	H	PEAK	Pass	Band Edge
	802.11a	165	17475.00	50.03	68.30	-18.27	V	Peak	Pass	Harmonic
32	802.11ax HE20	149	5640.46	52.95	68.30	-15.35	V	PEAK	Pass	Band Edge
	802.11ax HE20	149	17235.00	48.31	68.30	-19.99	H	Peak	Pass	Harmonic
33	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	157	17355.00	49.35	68.30	-18.95	V	Peak	Pass	Harmonic
34	802.11ax HE20	165	5929.38	51.46	68.30	-16.84	H	PEAK	Pass	Band Edge
34	802.11ax HE20	165	17475.00	48.94	68.30	-19.36	H	Peak	Pass	Harmonic
35	802.11ax HE40	151	5605.43	54.75	68.30	-13.55	V	PEAK	Pass	Band Edge
35	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
36	802.11ax HE40	159	5939.00	51.77	68.30	-16.53	V	PEAK	Pass	Band Edge
36	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
37	802.11ax HE80	155	5933.20	55.99	68.30	-12.31	H	PEAK	Pass	Band Edge
37	802.11ax HE80	155	17325.00	47.98	68.30	-20.32	H	Peak	Pass	Harmonic
38	802.11ax HE20	36	5052.56	42.58	54.00	-11.42	V	AVERAGE	Pass	Band Edge
38	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
	802.11ax HE20	64	5430.88	41.96	54.00	-12.04	V	AVERAGE	Pass	Band Edge
39	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
	802.11ax HE20	100	5452.15	42.30	54.00	-11.70	V	AVERAGE	Pass	Band Edge
40	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
	802.11ax HE20	140	5755.19	50.74	68.30	-17.56	V	PEAK	Pass	Band Edge
41	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
	802.11ax HE20	149	5643.79	50.13	68.30	-18.17	V	PEAK	Pass	Band Edge
42	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
	802.11ax HE20	165	5941.75	50.82	68.30	-17.48	H	PEAK	Pass	Band Edge
43	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
	802.11ax HE80	42	948.59	31.41	46	-14.59	H	Peak	Pass	LF
45	802.11ax HE80	155	951.5	31.27	46	-14.73	V	Peak	Pass	LF
46	Co-TX	-	5136.76	50.18	54.00	-3.82	V	Average	Pass	Band Edge
		-	10420	45.12	68.3	-23.18	V	Peak	Pass	Harmonic
47	Co-TX	-	5134.94	50.04	54.00	-3.96	V	Average	Pass	Band Edge
		-	10420	47.29	68.3	-23.00	V	Peak	Pass	Harmonic



Mode	1																																																																											
	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																											
ANT	CDD0+1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.00</td> <td>51.79</td> <td>74.00</td> <td>-22.21</td> <td>41.90</td> <td>34.62</td> <td>7.91</td> <td>32.64</td> <td>200</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5144.00	51.79	74.00	-22.21	41.90	34.62	7.91	32.64	200	300	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.73</td> <td>-----</td> <td>-----</td> <td>89.77</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	99.73	-----	-----	89.77	34.65	7.94	32.63	200	300	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5144.00	51.79	74.00	-22.21	41.90	34.62	7.91	32.64	200	300	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	99.73	-----	-----	89.77	34.65	7.94	32.63	200	300	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>43.32</td> <td>54.00</td> <td>-10.68</td> <td>33.42</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>200</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	43.32	54.00	-10.68	33.42	34.62	7.92	32.64	200	300	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.26</td> <td>-----</td> <td>-----</td> <td>83.30</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	93.26	-----	-----	83.30	34.65	7.94	32.63	200	300	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.94	43.32	54.00	-10.68	33.42	34.62	7.92	32.64	200	300	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	93.26	-----	-----	83.30	34.65	7.94	32.63	200	300	AVERAGE																																																																	



Mode	1																																																																											
	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																											
ANT	CDD0+1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.78</td> <td>54.64</td> <td>74.00</td> <td>-19.36</td> <td>44.74</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>204</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.78	54.64	74.00	-19.36	44.74	34.62	7.92	32.64	204	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.78</td> <td>-----</td> <td>-----</td> <td>90.82</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>204</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	100.78	-----	-----	90.82	34.65	7.94	32.63	204	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5147.78	54.64	74.00	-19.36	44.74	34.62	7.92	32.64	204	0	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	100.78	-----	-----	90.82	34.65	7.94	32.63	204	0	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>44.84</td> <td>54.00</td> <td>-9.16</td> <td>34.94</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>204</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	44.84	54.00	-9.16	34.94	34.62	7.92	32.64	204	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.63</td> <td>-----</td> <td>-----</td> <td>84.67</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>204</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	94.63	-----	-----	84.67	34.65	7.94	32.63	204	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.94	44.84	54.00	-9.16	34.94	34.62	7.92	32.64	204	0	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	94.63	-----	-----	84.67	34.65	7.94	32.63	204	0	AVERAGE																																																																	



Mode	1																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2024-08-10</p>	<p style="text-align: right;">Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.45</td> <td>68.30</td> <td>-23.85</td> <td>60.98</td> <td>37.33</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.63</td> <td>74.00</td> <td>-27.37</td> <td>58.36</td> <td>38.93</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	44.45	68.30	-23.85	60.98	37.33	10.73	64.59	--	--	Peak	2	15540.00	46.63	74.00	-27.37	58.36	38.93	12.72	63.38	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.46</td> <td>68.30</td> <td>-22.84</td> <td>61.99</td> <td>37.33</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.62</td> <td>74.00</td> <td>-25.38</td> <td>60.35</td> <td>38.93</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.46	68.30	-22.84	61.99	37.33	10.73	64.59	--	--	Peak	2	15540.00	48.62	74.00	-25.38	60.35	38.93	12.72	63.38	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	44.45	68.30	-23.85	60.98	37.33	10.73	64.59	--	--	Peak																																																																																						
2	15540.00	46.63	74.00	-27.37	58.36	38.93	12.72	63.38	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	45.46	68.30	-22.84	61.99	37.33	10.73	64.59	--	--	Peak																																																																																						
2	15540.00	48.62	74.00	-25.38	60.35	38.93	12.72	63.38	--	--	Peak																																																																																						



Mode	2																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.58</td> <td>68.30</td> <td>-23.72</td> <td>61.12</td> <td>37.43</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.01</td> <td>74.00</td> <td>-25.99</td> <td>59.88</td> <td>39.03</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	44.58	68.30	-23.72	61.12	37.43	10.79	64.76	--	--	Peak	2	15660.00	48.01	74.00	-25.99	59.88	39.03	12.72	63.62	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.60</td> <td>68.30</td> <td>-23.70</td> <td>61.14</td> <td>37.43</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.21</td> <td>74.00</td> <td>-26.79</td> <td>59.08</td> <td>39.03</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	44.60	68.30	-23.70	61.14	37.43	10.79	64.76	--	--	Peak	2	15660.00	47.21	74.00	-26.79	59.08	39.03	12.72	63.62	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10440.00	44.58	68.30	-23.72	61.12	37.43	10.79	64.76	--	--	Peak																																																																																						
2	15660.00	48.01	74.00	-25.99	59.88	39.03	12.72	63.62	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10440.00	44.60	68.30	-23.70	61.14	37.43	10.79	64.76	--	--	Peak																																																																																						
2	15660.00	47.21	74.00	-26.79	59.08	39.03	12.72	63.62	--	--	Peak																																																																																						



Mode	3																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.38</td> <td>68.30</td> <td>-23.92</td> <td>60.94</td> <td>37.47</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>59.15</td> <td>39.08</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	44.38	68.30	-23.92	60.94	37.47	10.82	64.85	--	--	Peak	2	15720.00	47.20	74.00	-26.80	59.15	39.08	12.71	63.74	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.26</td> <td>68.30</td> <td>-23.04</td> <td>61.82</td> <td>37.47</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.42</td> <td>74.00</td> <td>-26.58</td> <td>59.37</td> <td>39.08</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	45.26	68.30	-23.04	61.82	37.47	10.82	64.85	--	--	Peak	2	15720.00	47.42	74.00	-26.58	59.37	39.08	12.71	63.74	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	44.38	68.30	-23.92	60.94	37.47	10.82	64.85	--	--	Peak																																																																																						
2	15720.00	47.20	74.00	-26.80	59.15	39.08	12.71	63.74	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	45.26	68.30	-23.04	61.82	37.47	10.82	64.85	--	--	Peak																																																																																						
2	15720.00	47.42	74.00	-26.58	59.37	39.08	12.71	63.74	--	--	Peak																																																																																						



Mode	4																																																																							
	Band Edge																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHZ																																																																							
ANT	STBC0+1																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.33</td> <td>-----</td> <td>91.36</td> <td>34.65</td> <td>7.94</td> <td>32.62</td> <td>207</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	101.33	-----	91.36	34.65	7.94	32.62	207	328	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.33</td> <td>-----</td> <td>91.36</td> <td>34.65</td> <td>7.94</td> <td>32.62</td> <td>207</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	101.33	-----	91.36	34.65	7.94	32.62	207	328	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1	5180.00	101.33	-----	91.36	34.65	7.94	32.62	207	328	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1	5180.00	101.33	-----	91.36	34.65	7.94	32.62	207	328	PEAK																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.41</td> <td>-----</td> <td>83.44</td> <td>34.65</td> <td>7.94</td> <td>32.62</td> <td>207</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	93.41	-----	83.44	34.65	7.94	32.62	207	328	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.41</td> <td>-----</td> <td>83.44</td> <td>34.65</td> <td>7.94</td> <td>32.62</td> <td>207</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	93.41	-----	83.44	34.65	7.94	32.62	207	328	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1	5180.00	93.41	-----	83.44	34.65	7.94	32.62	207	328	AVERAGE																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1	5180.00	93.41	-----	83.44	34.65	7.94	32.62	207	328	AVERAGE																																																														



Mode	4																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHZ																																																																									
ANT	STBC0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>56.41</td> <td>74.00</td> <td>-17.59</td> <td>46.51</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>200</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.40	56.41	74.00	-17.59	46.51	34.62	7.92	32.64	200	356	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.85</td> <td>-----</td> <td>-----</td> <td>92.90</td> <td>34.64</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	102.85	-----	-----	92.90	34.64	7.94	32.63	200	356	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.40	56.41	74.00	-17.59	46.51	34.62	7.92	32.64	200	356	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	102.85	-----	-----	92.90	34.64	7.94	32.63	200	356	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>49.56</td> <td>54.00</td> <td>-4.44</td> <td>39.66</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>200</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.76	49.56	54.00	-4.44	39.66	34.62	7.92	32.64	200	356	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.17</td> <td>-----</td> <td>-----</td> <td>85.22</td> <td>34.64</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	95.17	-----	-----	85.22	34.64	7.94	32.63	200	356	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.76	49.56	54.00	-4.44	39.66	34.62	7.92	32.64	200	356	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	95.17	-----	-----	85.22	34.64	7.94	32.63	200	356	AVERAGE																																																															



Mode	4																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHZ																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2024-08-10</p>	<p style="text-align: right;">Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.09</td> <td>68.30</td> <td>-23.21</td> <td>61.62</td> <td>37.33</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.10</td> <td>74.00</td> <td>-25.90</td> <td>59.83</td> <td>38.93</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.09	68.30	-23.21	61.62	37.33	10.73	64.59	--	--	Peak	2	15540.00	48.10	74.00	-25.90	59.83	38.93	12.72	63.38	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.19</td> <td>68.30</td> <td>-23.11</td> <td>61.72</td> <td>37.33</td> <td>10.73</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.01</td> <td>74.00</td> <td>-26.99</td> <td>58.74</td> <td>38.93</td> <td>12.72</td> <td>63.38</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.19	68.30	-23.11	61.72	37.33	10.73	64.59	--	--	Peak	2	15540.00	47.01	74.00	-26.99	58.74	38.93	12.72	63.38	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	45.09	68.30	-23.21	61.62	37.33	10.73	64.59	--	--	Peak																																																																																						
2	15540.00	48.10	74.00	-25.90	59.83	38.93	12.72	63.38	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	45.19	68.30	-23.11	61.72	37.33	10.73	64.59	--	--	Peak																																																																																						
2	15540.00	47.01	74.00	-26.99	58.74	38.93	12.72	63.38	--	--	Peak																																																																																						



Mode	5																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_5220MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.37</td> <td>68.30</td> <td>-23.93</td> <td>60.91</td> <td>37.43</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>49.08</td> <td>74.00</td> <td>-24.92</td> <td>60.95</td> <td>39.03</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	44.37	68.30	-23.93	60.91	37.43	10.79	64.76	--	--	Peak	2	15660.00	49.08	74.00	-24.92	60.95	39.03	12.72	63.62	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.91</td> <td>68.30</td> <td>-22.39</td> <td>62.45</td> <td>37.43</td> <td>10.79</td> <td>64.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>59.78</td> <td>39.03</td> <td>12.72</td> <td>63.62</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	45.91	68.30	-22.39	62.45	37.43	10.79	64.76	--	--	Peak	2	15660.00	47.91	74.00	-26.09	59.78	39.03	12.72	63.62	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10440.00	44.37	68.30	-23.93	60.91	37.43	10.79	64.76	--	--	Peak																																																																																						
2	15660.00	49.08	74.00	-24.92	60.95	39.03	12.72	63.62	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10440.00	45.91	68.30	-22.39	62.45	37.43	10.79	64.76	--	--	Peak																																																																																						
2	15660.00	47.91	74.00	-26.09	59.78	39.03	12.72	63.62	--	--	Peak																																																																																						



Mode	6																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.88</td> <td>68.30</td> <td>-23.42</td> <td>61.44</td> <td>37.47</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>48.61</td> <td>74.00</td> <td>-25.39</td> <td>60.56</td> <td>39.08</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	44.88	68.30	-23.42	61.44	37.47	10.82	64.85	--	--	Peak	2	15720.00	48.61	74.00	-25.39	60.56	39.08	12.71	63.74	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.78</td> <td>68.30</td> <td>-23.52</td> <td>61.34</td> <td>37.47</td> <td>10.82</td> <td>64.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.70</td> <td>74.00</td> <td>-26.30</td> <td>59.65</td> <td>39.08</td> <td>12.71</td> <td>63.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	44.78	68.30	-23.52	61.34	37.47	10.82	64.85	--	--	Peak	2	15720.00	47.70	74.00	-26.30	59.65	39.08	12.71	63.74	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	44.88	68.30	-23.42	61.44	37.47	10.82	64.85	--	--	Peak																																																																																						
2	15720.00	48.61	74.00	-25.39	60.56	39.08	12.71	63.74	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	44.78	68.30	-23.52	61.34	37.47	10.82	64.85	--	--	Peak																																																																																						
2	15720.00	47.70	74.00	-26.30	59.65	39.08	12.71	63.74	--	--	Peak																																																																																						



Mode	7																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																															
ANT	STBC0+1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.39</td> <td>53.94</td> <td>74.00</td> <td>-20.06</td> <td>44.04</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>200</td> <td>292 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.39	53.94	74.00	-20.06	44.04	34.62	7.92	32.64	200	292 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>96.02</td> <td>-----</td> <td>-----</td> <td>86.06</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>292 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	96.02	-----	-----	86.06	34.65	7.94	32.63	200	292 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5148.39	53.94	74.00	-20.06	44.04	34.62	7.92	32.64	200	292 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5190.00	96.02	-----	-----	86.06	34.65	7.94	32.63	200	292 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.72</td> <td>45.74</td> <td>54.00</td> <td>-8.26</td> <td>35.84</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>200</td> <td>292 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.72	45.74	54.00	-8.26	35.84	34.62	7.92	32.64	200	292 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>87.52</td> <td>-----</td> <td>-----</td> <td>77.56</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>200</td> <td>292 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	87.52	-----	-----	77.56	34.65	7.94	32.63	200	292 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5149.72	45.74	54.00	-8.26	35.84	34.62	7.92	32.64	200	292 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5190.00	87.52	-----	-----	77.56	34.65	7.94	32.63	200	292 AVERAGE																																																																						



	7																																								
Mode	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																								
ANT	STBC0+1																																								
Pol.	Horizontal	Fundamental																																							
Peak																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.91</td> <td>50.17</td> <td>74.00</td> <td>-23.83</td> <td>39.41</td> <td>34.85</td> <td>8.43</td> <td>32.52</td> <td>200</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5441.91	50.17	74.00	-23.83	39.41	34.85	8.43	32.52	200	292
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5441.91	50.17	74.00	-23.83	39.41	34.85	8.43	32.52	200	292	PEAK																														
Avg																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.24</td> <td>42.92</td> <td>54.00</td> <td>-11.08</td> <td>32.15</td> <td>34.85</td> <td>8.44</td> <td>32.52</td> <td>200</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5436.24	42.92	54.00	-11.08	32.15	34.85	8.44	32.52	200	292
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5436.24	42.92	54.00	-11.08	32.15	34.85	8.44	32.52	200	292	AVERAGE																														



Mode	7																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																															
ANT	STBC0+1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.63</td> <td>57.68</td> <td>74.00</td> <td>-16.32</td> <td>47.78</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>186</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.63	57.68	74.00	-16.32	47.78	34.62	7.92	32.64	186	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>96.72</td> <td>-----</td> <td>-----</td> <td>86.76</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>186</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	96.72	-----	-----	86.76	34.65	7.94	32.63	186	0 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5147.63	57.68	74.00	-16.32	47.78	34.62	7.92	32.64	186	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5190.00	96.72	-----	-----	86.76	34.65	7.94	32.63	186	0 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>50.61</td> <td>54.00</td> <td>-3.39</td> <td>40.71</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>186</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	50.61	54.00	-3.39	40.71	34.62	7.92	32.64	186	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>90.29</td> <td>-----</td> <td>-----</td> <td>80.34</td> <td>34.64</td> <td>7.94</td> <td>32.63</td> <td>186</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	90.29	-----	-----	80.34	34.64	7.94	32.63	186	0 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5149.91	50.61	54.00	-3.39	40.71	34.62	7.92	32.64	186	0 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5190.00	90.29	-----	-----	80.34	34.64	7.94	32.63	186	0 AVERAGE																																																																						



7																																					
Mode																																					
Band Edge - R																																					
U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																					
ANT																																					
STBC0+1																																					
Pol.	Vertical																																				
Peak	Fundamental																																				
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5403.57</td> <td>50.91</td> <td>74.00</td> <td>-23.09</td> <td>40.15</td> <td>34.82</td> <td>8.47</td> <td>32.53</td> <td>186</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5403.57	50.91	74.00	-23.09	40.15	34.82	8.47	32.53	186	0	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5403.57	50.91	74.00	-23.09	40.15	34.82	8.47	32.53	186	0	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5371.71</td> <td>43.27</td> <td>54.00</td> <td>-10.73</td> <td>32.63</td> <td>34.80</td> <td>8.39</td> <td>32.55</td> <td>186</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5371.71	43.27	54.00	-10.73	32.63	34.80	8.39	32.55	186	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5371.71	43.27	54.00	-10.73	32.63	34.80	8.39	32.55	186	0	AVERAGE																										
Avg	Blank																																				







Mode	8																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																	
ANT	STBC0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.05</td> <td>51.27</td> <td>74.00</td> <td>-22.73</td> <td>41.37</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>114</td> <td>328 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5146.05	51.27	74.00	-22.73	41.37	34.62	7.92	32.64	114	328 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>99.58</td> <td>-----</td> <td>-----</td> <td>89.50</td> <td>34.68</td> <td>8.01</td> <td>32.61</td> <td>114</td> <td>328 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5230.00	99.58	-----	-----	89.50	34.68	8.01	32.61	114	328 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5146.05	51.27	74.00	-22.73	41.37	34.62	7.92	32.64	114	328 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5230.00	99.58	-----	-----	89.50	34.68	8.01	32.61	114	328 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.96</td> <td>44.10</td> <td>54.00</td> <td>-9.90</td> <td>34.20</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>114</td> <td>328 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5149.96	44.10	54.00	-9.90	34.20	34.62	7.92	32.64	114	328 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>91.44</td> <td>-----</td> <td>-----</td> <td>81.31</td> <td>34.69</td> <td>8.04</td> <td>32.60</td> <td>114</td> <td>328 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5230.00	91.44	-----	-----	81.31	34.69	8.04	32.60	114	328 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5149.96	44.10	54.00	-9.90	34.20	34.62	7.92	32.64	114	328 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5230.00	91.44	-----	-----	81.31	34.69	8.04	32.60	114	328 AVERAGE																																																																								



Mode	8																																						
	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																						
ANT	STBC0+1																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.93</td> <td>51.07</td> <td>74.00</td> <td>-22.93</td> <td>40.46</td> <td>34.79</td> <td>8.37</td> <td>32.55</td> <td>114</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5365.93	51.07	74.00	-22.93	40.46	34.79	8.37	32.55	114	328	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5365.93	51.07	74.00	-22.93	40.46	34.79	8.37	32.55	114	328	PEAK																												
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5426.88</td> <td>43.45</td> <td>54.00</td> <td>-10.55</td> <td>32.69</td> <td>34.84</td> <td>8.45</td> <td>32.53</td> <td>114</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5426.88	43.45	54.00	-10.55	32.69	34.84	8.45	32.53	114	328	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5426.88	43.45	54.00	-10.55	32.69	34.84	8.45	32.53	114	328	AVERAGE																												

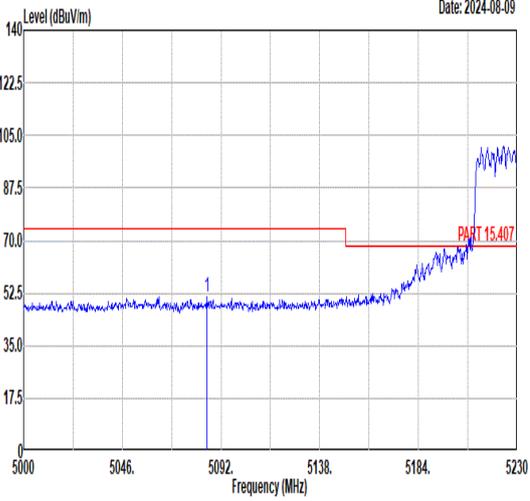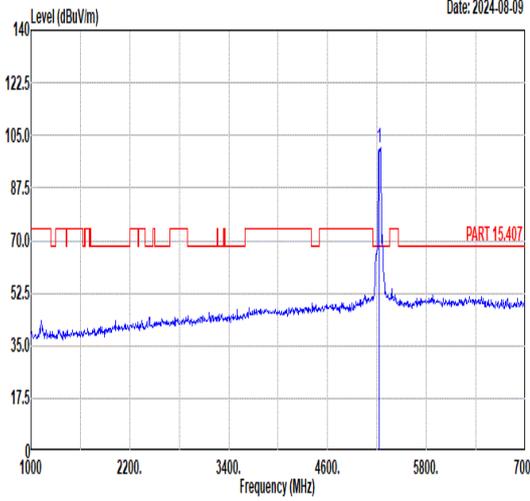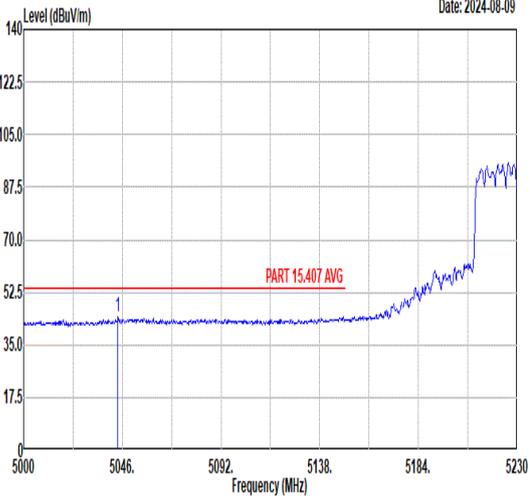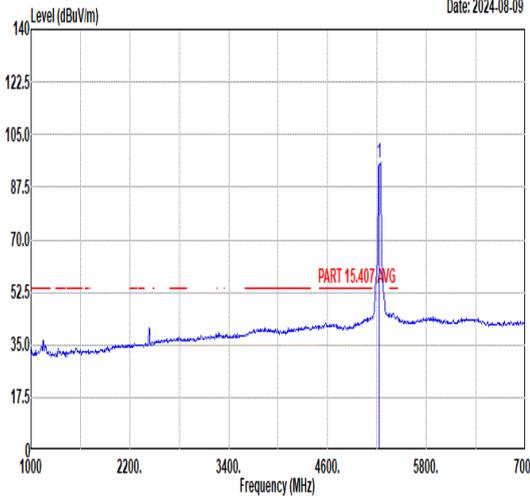

Mode	8																																																																																							
	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																							
ANT	STBC0+1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5085.56</td> <td>51.15</td> <td>74.00</td> <td>-22.85</td> <td>41.37</td> <td>34.57</td> <td>7.88</td> <td>32.67</td> <td>200</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5085.56	51.15	74.00	-22.85	41.37	34.57	7.88	32.67	200	332	PEAK	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>100.90</td> <td>-----</td> <td>-----</td> <td>90.77</td> <td>34.69</td> <td>8.04</td> <td>32.60</td> <td>200</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5230.00	100.90	-----	-----	90.77	34.69	8.04	32.60	200	332	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5085.56	51.15	74.00	-22.85	41.37	34.57	7.88	32.67	200	332	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5230.00	100.90	-----	-----	90.77	34.69	8.04	32.60	200	332	PEAK																																																																													
Avg	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5043.93</td> <td>44.62</td> <td>54.00</td> <td>-9.38</td> <td>34.91</td> <td>34.54</td> <td>7.85</td> <td>32.68</td> <td>200</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5043.93	44.62	54.00	-9.38	34.91	34.54	7.85	32.68	200	332	AVERAGE	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>95.45</td> <td>-----</td> <td>-----</td> <td>85.32</td> <td>34.69</td> <td>8.04</td> <td>32.60</td> <td>200</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5230.00	95.45	-----	-----	85.32	34.69	8.04	32.60	200	332	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5043.93	44.62	54.00	-9.38	34.91	34.54	7.85	32.68	200	332	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5230.00	95.45	-----	-----	85.32	34.69	8.04	32.60	200	332	AVERAGE																																																																													



Mode	8																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																					
ANT	STBC0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.44</td> <td>52.52</td> <td>74.00</td> <td>-21.48</td> <td>41.79</td> <td>34.82</td> <td>8.45</td> <td>32.54</td> <td>200</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5397.44	52.52	74.00	-21.48	41.79	34.82	8.45	32.54	200	332	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5397.44	52.52	74.00	-21.48	41.79	34.82	8.45	32.54	200	332	PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5402.96</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>35.07</td> <td>34.82</td> <td>8.47</td> <td>32.54</td> <td>200</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5402.96	45.82	54.00	-8.18	35.07	34.82	8.47	32.54	200	332	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5402.96	45.82	54.00	-8.18	35.07	34.82	8.47	32.54	200	332	AVERAGE																											







Mode	9																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHZ																																																																																	
ANT	STBC0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.55</td> <td>57.42</td> <td>74.00</td> <td>-16.58</td> <td>47.54</td> <td>34.61</td> <td>7.91</td> <td>32.64</td> <td>258</td> <td>321 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5137.55	57.42	74.00	-16.58	47.54	34.61	7.91	32.64	258	321 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>90.47</td> <td>-----</td> <td>-----</td> <td>80.48</td> <td>34.66</td> <td>7.95</td> <td>32.62</td> <td>258</td> <td>321 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5210.00	90.47	-----	-----	80.48	34.66	7.95	32.62	258	321 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5137.55	57.42	74.00	-16.58	47.54	34.61	7.91	32.64	258	321 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5210.00	90.47	-----	-----	80.48	34.66	7.95	32.62	258	321 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5136.71</td> <td>48.36</td> <td>54.00</td> <td>-5.64</td> <td>38.49</td> <td>34.61</td> <td>7.91</td> <td>32.65</td> <td>258</td> <td>321 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5136.71	48.36	54.00	-5.64	38.49	34.61	7.91	32.65	258	321 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>81.69</td> <td>-----</td> <td>-----</td> <td>71.73</td> <td>34.65</td> <td>7.94</td> <td>32.63</td> <td>258</td> <td>321 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5210.00	81.69	-----	-----	71.73	34.65	7.94	32.63	258	321 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5136.71	48.36	54.00	-5.64	38.49	34.61	7.91	32.65	258	321 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5210.00	81.69	-----	-----	71.73	34.65	7.94	32.63	258	321 AVERAGE																																																																								



	9																																						
Mode	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																						
ANT	STBC0+1																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5403.50</td> <td>50.28</td> <td>74.00</td> <td>-23.72</td> <td>39.52</td> <td>34.82</td> <td>8.47</td> <td>32.53</td> <td>258</td> <td>321</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5403.50	50.28	74.00	-23.72	39.52	34.82	8.47	32.53	258	321	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5403.50	50.28	74.00	-23.72	39.52	34.82	8.47	32.53	258	321	PEAK																												
Avg	<p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.75</td> <td>43.00</td> <td>54.00</td> <td>-11.00</td> <td>32.23</td> <td>34.85</td> <td>8.44</td> <td>32.52</td> <td>258</td> <td>321</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5436.75	43.00	54.00	-11.00	32.23	34.85	8.44	32.52	258	321	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5436.75	43.00	54.00	-11.00	32.23	34.85	8.44	32.52	258	321	AVERAGE																												

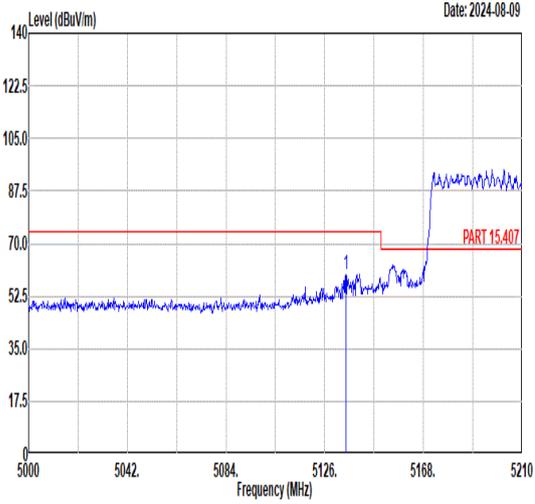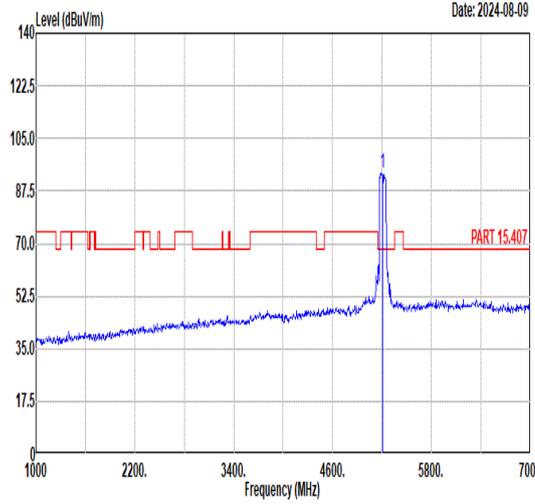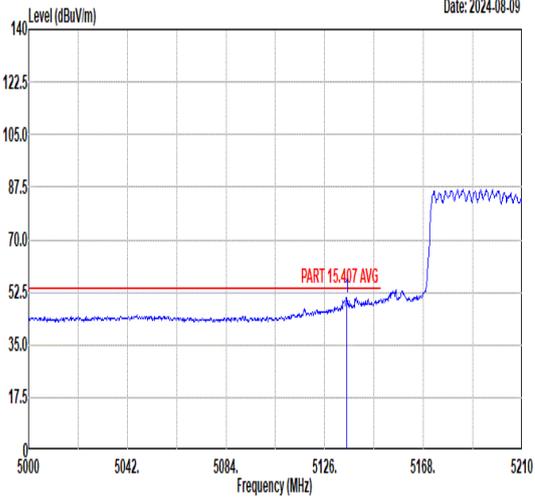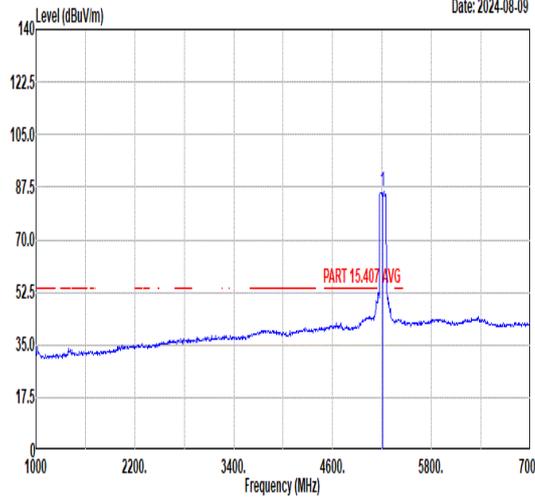

Mode	9																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHZ																																																																															
ANT	STBC0+1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.03</td> <td>59.95</td> <td>74.00</td> <td>-14.05</td> <td>50.08</td> <td>34.61</td> <td>7.91</td> <td>32.65</td> <td>202</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5135.03	59.95	74.00	-14.05	50.08	34.61	7.91	32.65	202	360	PEAK	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>93.43</td> <td>-----</td> <td>-----</td> <td>83.46</td> <td>34.65</td> <td>7.94</td> <td>32.62</td> <td>202</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5210.00	93.43	-----	-----	83.46	34.65	7.94	32.62	202	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																								
1	5135.03	59.95	74.00	-14.05	50.08	34.61	7.91	32.65	202	360	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																								
1	5210.00	93.43	-----	-----	83.46	34.65	7.94	32.62	202	360	PEAK																																																																					
Avg	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.24</td> <td>50.65</td> <td>54.00</td> <td>-3.35</td> <td>40.78</td> <td>34.61</td> <td>7.91</td> <td>32.65</td> <td>202</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5135.24	50.65	54.00	-3.35	40.78	34.61	7.91	32.65	202	360	AVERAGE	 <p style="text-align: right;">Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>85.99</td> <td>-----</td> <td>-----</td> <td>75.91</td> <td>34.68</td> <td>8.01</td> <td>32.61</td> <td>202</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5210.00	85.99	-----	-----	75.91	34.68	8.01	32.61	202	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																								
1	5135.24	50.65	54.00	-3.35	40.78	34.61	7.91	32.65	202	360	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																								
1	5210.00	85.99	-----	-----	75.91	34.68	8.01	32.61	202	360	AVERAGE																																																																					



Mode	9																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																					
ANT	STBC0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.25</td> <td>50.93</td> <td>74.00</td> <td>-23.07</td> <td>40.22</td> <td>34.81</td> <td>8.44</td> <td>32.54</td> <td>202</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5392.25	50.93	74.00	-23.07	40.22	34.81	8.44	32.54	202	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5392.25	50.93	74.00	-23.07	40.22	34.81	8.44	32.54	202	360	PEAK																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5390.00</td> <td>43.90</td> <td>54.00</td> <td>-10.10</td> <td>33.20</td> <td>34.81</td> <td>8.43</td> <td>32.54</td> <td>202</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5390.00	43.90	54.00	-10.10	33.20	34.81	8.43	32.54	202	360	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5390.00	43.90	54.00	-10.10	33.20	34.81	8.43	32.54	202	360	AVERAGE																											



Mode	9																																																																																					
	Harmonic																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																																																																					
ANT	STBC0+1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p style="text-align: right;">Date: 2024-08-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>47.15</td> <td>68.30</td> <td>-21.15</td> <td>63.70</td> <td>37.40</td> <td>10.77</td> <td>64.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>49.03</td> <td>74.00</td> <td>-24.97</td> <td>60.87</td> <td>39.00</td> <td>12.72</td> <td>63.56</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10420.00	47.15	68.30	-21.15	63.70	37.40	10.77	64.72	-- -- Peak	2 15630.00	49.03	74.00	-24.97	60.87	39.00	12.72	63.56	-- -- Peak	<p style="text-align: right;">Date: 2024-08-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>46.29</td> <td>68.30</td> <td>-22.01</td> <td>62.84</td> <td>37.40</td> <td>10.77</td> <td>64.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>48.29</td> <td>74.00</td> <td>-25.71</td> <td>60.13</td> <td>39.00</td> <td>12.72</td> <td>63.56</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10420.00	46.29	68.30	-22.01	62.84	37.40	10.77	64.72	-- -- Peak	2 15630.00	48.29	74.00	-25.71	60.13	39.00	12.72	63.56	-- -- Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1 10420.00	47.15	68.30	-21.15	63.70	37.40	10.77	64.72	-- -- Peak																																																																														
2 15630.00	49.03	74.00	-24.97	60.87	39.00	12.72	63.56	-- -- Peak																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1 10420.00	46.29	68.30	-22.01	62.84	37.40	10.77	64.72	-- -- Peak																																																																														
2 15630.00	48.29	74.00	-25.71	60.13	39.00	12.72	63.56	-- -- Peak																																																																														



Mode	10																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.66</td> <td>68.30</td> <td>-22.64</td> <td>62.15</td> <td>37.50</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>59.56</td> <td>39.13</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	45.66	68.30	-22.64	62.15	37.50	10.85	64.84	--	--	Peak	2	15780.00	47.53	74.00	-26.47	59.56	39.13	12.71	63.87	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.14</td> <td>68.30</td> <td>-22.16</td> <td>62.63</td> <td>37.50</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>58.49</td> <td>39.13</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	46.14	68.30	-22.16	62.63	37.50	10.85	64.84	--	--	Peak	2	15780.00	46.46	74.00	-27.54	58.49	39.13	12.71	63.87	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	45.66	68.30	-22.64	62.15	37.50	10.85	64.84	--	--	Peak																																																																																						
2	15780.00	47.53	74.00	-26.47	59.56	39.13	12.71	63.87	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	46.14	68.30	-22.16	62.63	37.50	10.85	64.84	--	--	Peak																																																																																						
2	15780.00	46.46	74.00	-27.54	58.49	39.13	12.71	63.87	--	--	Peak																																																																																						



Mode	11																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.01</td> <td>74.00</td> <td>-28.99</td> <td>61.15</td> <td>37.52</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.50</td> <td>74.00</td> <td>-26.50</td> <td>59.68</td> <td>39.22</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	45.01	74.00	-28.99	61.15	37.52	10.91	64.57	--	--	Peak	2	15900.00	47.50	74.00	-26.50	59.68	39.22	12.71	64.11	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.55</td> <td>74.00</td> <td>-29.45</td> <td>60.69</td> <td>37.52</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>59.47</td> <td>39.22</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	44.55	74.00	-29.45	60.69	37.52	10.91	64.57	--	--	Peak	2	15900.00	47.29	74.00	-26.71	59.47	39.22	12.71	64.11	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	45.01	74.00	-28.99	61.15	37.52	10.91	64.57	--	--	Peak																																																																																						
2	15900.00	47.50	74.00	-26.50	59.68	39.22	12.71	64.11	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	44.55	74.00	-29.45	60.69	37.52	10.91	64.57	--	--	Peak																																																																																						
2	15900.00	47.29	74.00	-26.71	59.47	39.22	12.71	64.11	--	--	Peak																																																																																						



Mode	12																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	CDD0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Date: 2024-08-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5395.74</td> <td>51.09</td> <td>74.00</td> <td>-22.91</td> <td>40.37</td> <td>34.81</td> <td>8.45</td> <td>32.54</td> <td>262</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5395.74	51.09	74.00	-22.91	40.37	34.81	8.45	32.54	262	298 PEAK	<p>Date: 2024-08-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.22</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>34.76</td> <td>8.26</td> <td>32.57</td> <td>262</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5320.00	98.22	-----	-----	87.77	34.76	8.26	32.57	262	298 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5395.74	51.09	74.00	-22.91	40.37	34.81	8.45	32.54	262	298 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5320.00	98.22	-----	-----	87.77	34.76	8.26	32.57	262	298 PEAK																																																																								
Avg	<p>Date: 2024-08-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>42.24</td> <td>54.00</td> <td>-11.76</td> <td>31.69</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>262</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5350.10	42.24	54.00	-11.76	31.69	34.78	8.33	32.56	262	298 AVERAGE	<p>Date: 2024-08-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>92.20</td> <td>-----</td> <td>-----</td> <td>81.75</td> <td>34.76</td> <td>8.26</td> <td>32.57</td> <td>262</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5320.00	92.20	-----	-----	81.75	34.76	8.26	32.57	262	298 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5350.10	42.24	54.00	-11.76	31.69	34.78	8.33	32.56	262	298 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5320.00	92.20	-----	-----	81.75	34.76	8.26	32.57	262	298 AVERAGE																																																																								



Mode	12																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	CDD0+1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.38</td> <td>53.81</td> <td>74.00</td> <td>-20.19</td> <td>43.26</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>205</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5350.38	53.81	74.00	-20.19	43.26	34.78	8.33	32.56	205	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>101.72</td> <td>-----</td> <td>-----</td> <td>91.29</td> <td>34.75</td> <td>8.25</td> <td>32.57</td> <td>205</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5320.00	101.72	-----	-----	91.29	34.75	8.25	32.57	205	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5350.38	53.81	74.00	-20.19	43.26	34.78	8.33	32.56	205	360	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	101.72	-----	-----	91.29	34.75	8.25	32.57	205	360	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>43.53</td> <td>54.00</td> <td>-10.47</td> <td>32.98</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>205</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5350.10	43.53	54.00	-10.47	32.98	34.78	8.33	32.56	205	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>95.66</td> <td>-----</td> <td>-----</td> <td>85.23</td> <td>34.75</td> <td>8.25</td> <td>32.57</td> <td>205</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5320.00	95.66	-----	-----	85.23	34.75	8.25	32.57	205	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5350.10	43.53	54.00	-10.47	32.98	34.78	8.33	32.56	205	360	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	95.66	-----	-----	85.23	34.75	8.25	32.57	205	360	AVERAGE																																																																								



Mode	12																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>61.14</td> <td>37.53</td> <td>10.94</td> <td>64.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.34</td> <td>74.00</td> <td>-26.66</td> <td>59.60</td> <td>39.27</td> <td>12.70</td> <td>64.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	45.18	74.00	-28.82	61.14	37.53	10.94	64.43	--	--	Peak	2	15960.00	47.34	74.00	-26.66	59.60	39.27	12.70	64.23	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.35</td> <td>74.00</td> <td>-28.65</td> <td>61.31</td> <td>37.53</td> <td>10.94</td> <td>64.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.88</td> <td>74.00</td> <td>-27.12</td> <td>59.14</td> <td>39.27</td> <td>12.70</td> <td>64.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	45.35	74.00	-28.65	61.31	37.53	10.94	64.43	--	--	Peak	2	15960.00	46.88	74.00	-27.12	59.14	39.27	12.70	64.23	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10640.00	45.18	74.00	-28.82	61.14	37.53	10.94	64.43	--	--	Peak																																																																																						
2	15960.00	47.34	74.00	-26.66	59.60	39.27	12.70	64.23	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10640.00	45.35	74.00	-28.65	61.31	37.53	10.94	64.43	--	--	Peak																																																																																						
2	15960.00	46.88	74.00	-27.12	59.14	39.27	12.70	64.23	--	--	Peak																																																																																						



Mode	13																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																																																																																	
ANT	STBC0+1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.62</td> <td>68.30</td> <td>-22.68</td> <td>62.11</td> <td>37.50</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.73</td> <td>74.00</td> <td>-26.27</td> <td>59.76</td> <td>39.13</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	45.62	68.30	-22.68	62.11	37.50	10.85	64.84	--	--	Peak	2	15780.00	47.73	74.00	-26.27	59.76	39.13	12.71	63.87	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.72</td> <td>68.30</td> <td>-22.58</td> <td>62.21</td> <td>37.50</td> <td>10.85</td> <td>64.84</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.80</td> <td>74.00</td> <td>-27.20</td> <td>58.83</td> <td>39.13</td> <td>12.71</td> <td>63.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	45.72	68.30	-22.58	62.21	37.50	10.85	64.84	--	--	Peak	2	15780.00	46.80	74.00	-27.20	58.83	39.13	12.71	63.87	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	45.62	68.30	-22.68	62.11	37.50	10.85	64.84	--	--	Peak																																																																																							
2	15780.00	47.73	74.00	-26.27	59.76	39.13	12.71	63.87	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	45.72	68.30	-22.58	62.21	37.50	10.85	64.84	--	--	Peak																																																																																							
2	15780.00	46.80	74.00	-27.20	58.83	39.13	12.71	63.87	--	--	Peak																																																																																							



Mode	14																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_5300MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.05</td> <td>74.00</td> <td>-28.95</td> <td>61.19</td> <td>37.52</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.13</td> <td>74.00</td> <td>-26.87</td> <td>59.31</td> <td>39.22</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	45.05	74.00	-28.95	61.19	37.52	10.91	64.57	--	--	Peak	2	15900.00	47.13	74.00	-26.87	59.31	39.22	12.71	64.11	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.69</td> <td>74.00</td> <td>-29.31</td> <td>60.83</td> <td>37.52</td> <td>10.91</td> <td>64.57</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>59.15</td> <td>39.22</td> <td>12.71</td> <td>64.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	44.69	74.00	-29.31	60.83	37.52	10.91	64.57	--	--	Peak	2	15900.00	46.97	74.00	-27.03	59.15	39.22	12.71	64.11	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	45.05	74.00	-28.95	61.19	37.52	10.91	64.57	--	--	Peak																																																																																						
2	15900.00	47.13	74.00	-26.87	59.31	39.22	12.71	64.11	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	44.69	74.00	-29.31	60.83	37.52	10.91	64.57	--	--	Peak																																																																																						
2	15900.00	46.97	74.00	-27.03	59.15	39.22	12.71	64.11	--	--	Peak																																																																																						



Mode	15																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																	
ANT	STBC0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.62</td> <td>55.14</td> <td>74.00</td> <td>-18.86</td> <td>44.59</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>179</td> <td>297 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5352.62	55.14	74.00	-18.86	44.59	34.78	8.33	32.56	179	297 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.93</td> <td>-----</td> <td>-----</td> <td>93.48</td> <td>34.76</td> <td>8.26</td> <td>32.57</td> <td>179</td> <td>297 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5320.00	103.93	-----	-----	93.48	34.76	8.26	32.57	179	297 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5352.62	55.14	74.00	-18.86	44.59	34.78	8.33	32.56	179	297 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	103.93	-----	-----	93.48	34.76	8.26	32.57	179	297 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>47.70</td> <td>54.00</td> <td>-6.30</td> <td>37.15</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>179</td> <td>297 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.38	47.70	54.00	-6.30	37.15	34.78	8.33	32.56	179	297 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.45</td> <td>-----</td> <td>-----</td> <td>86.00</td> <td>34.76</td> <td>8.26</td> <td>32.57</td> <td>179</td> <td>297 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5320.00	96.45	-----	-----	86.00	34.76	8.26	32.57	179	297 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.38	47.70	54.00	-6.30	37.15	34.78	8.33	32.56	179	297 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	96.45	-----	-----	86.00	34.76	8.26	32.57	179	297 AVERAGE																																																																								



Mode	15																																																																					
	Band Edge																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																					
ANT	STBC0+1																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.64</td> <td>104.25</td> <td>-----</td> <td>93.82</td> <td>34.75</td> <td>8.25</td> <td>32.57</td> <td>100</td> <td>349 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5351.64	104.25	-----	93.82	34.75	8.25	32.57	100	349 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.25</td> <td>-----</td> <td>93.82</td> <td>34.75</td> <td>8.25</td> <td>32.57</td> <td>100</td> <td>349 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	104.25	-----	93.82	34.75	8.25	32.57	100	349 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1	5351.64	104.25	-----	93.82	34.75	8.25	32.57	100	349 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1	5320.00	104.25	-----	93.82	34.75	8.25	32.57	100	349 PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.36</td> <td>48.46</td> <td>-5.54</td> <td>37.91</td> <td>34.78</td> <td>8.33</td> <td>32.56</td> <td>100</td> <td>349 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5351.36	48.46	-5.54	37.91	34.78	8.33	32.56	100	349 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.04</td> <td>-----</td> <td>85.63</td> <td>34.75</td> <td>8.23</td> <td>32.57</td> <td>100</td> <td>349 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	96.04	-----	85.63	34.75	8.23	32.57	100	349 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1	5351.36	48.46	-5.54	37.91	34.78	8.33	32.56	100	349 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1	5320.00	96.04	-----	85.63	34.75	8.23	32.57	100	349 AVERAGE																																																													



Mode	15																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.51</td> <td>74.00</td> <td>-28.49</td> <td>61.47</td> <td>37.53</td> <td>10.94</td> <td>64.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.80</td> <td>74.00</td> <td>-26.20</td> <td>60.06</td> <td>39.27</td> <td>12.70</td> <td>64.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	45.51	74.00	-28.49	61.47	37.53	10.94	64.43	--	--	Peak	2	15960.00	47.80	74.00	-26.20	60.06	39.27	12.70	64.23	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.53</td> <td>74.00</td> <td>-28.47</td> <td>61.49</td> <td>37.53</td> <td>10.94</td> <td>64.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.95</td> <td>74.00</td> <td>-27.05</td> <td>59.21</td> <td>39.27</td> <td>12.70</td> <td>64.23</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	45.53	74.00	-28.47	61.49	37.53	10.94	64.43	--	--	Peak	2	15960.00	46.95	74.00	-27.05	59.21	39.27	12.70	64.23	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10640.00	45.51	74.00	-28.49	61.47	37.53	10.94	64.43	--	--	Peak																																																																																						
2	15960.00	47.80	74.00	-26.20	60.06	39.27	12.70	64.23	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10640.00	45.53	74.00	-28.47	61.49	37.53	10.94	64.43	--	--	Peak																																																																																						
2	15960.00	46.95	74.00	-27.05	59.21	39.27	12.70	64.23	--	--	Peak																																																																																						







Mode	16																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																																	
ANT	STBC0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.07</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>41.84</td> <td>34.62</td> <td>7.92</td> <td>32.64</td> <td>300</td> <td>322 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5146.07	51.74	74.00	-22.26	41.84	34.62	7.92	32.64	300	322 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>96.39</td> <td>-----</td> <td>-----</td> <td>86.17</td> <td>34.71</td> <td>8.10</td> <td>32.59</td> <td>300</td> <td>322 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5270.00	96.39	-----	-----	86.17	34.71	8.10	32.59	300	322 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5146.07	51.74	74.00	-22.26	41.84	34.62	7.92	32.64	300	322 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5270.00	96.39	-----	-----	86.17	34.71	8.10	32.59	300	322 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5079.11</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>34.17</td> <td>34.57</td> <td>7.87</td> <td>32.67</td> <td>300</td> <td>322 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5079.11	43.94	54.00	-10.06	34.17	34.57	7.87	32.67	300	322 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>88.34</td> <td>-----</td> <td>-----</td> <td>78.13</td> <td>34.71</td> <td>8.09</td> <td>32.59</td> <td>300</td> <td>322 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5270.00	88.34	-----	-----	78.13	34.71	8.09	32.59	300	322 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5079.11	43.94	54.00	-10.06	34.17	34.57	7.87	32.67	300	322 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5270.00	88.34	-----	-----	78.13	34.71	8.09	32.59	300	322 AVERAGE																																																																								



Mode	16																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																					
ANT	STBC0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.30</td> <td>50.58</td> <td>74.00</td> <td>-23.42</td> <td>39.81</td> <td>34.83</td> <td>8.47</td> <td>32.53</td> <td>300</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5416.30	50.58	74.00	-23.42	39.81	34.83	8.47	32.53	300	322	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5416.30	50.58	74.00	-23.42	39.81	34.83	8.47	32.53	300	322	PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5418.96</td> <td>43.86</td> <td>54.00</td> <td>-10.14</td> <td>33.10</td> <td>34.83</td> <td>8.46</td> <td>32.53</td> <td>300</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5418.96	43.86	54.00	-10.14	33.10	34.83	8.46	32.53	300	322	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5418.96	43.86	54.00	-10.14	33.10	34.83	8.46	32.53	300	322	AVERAGE																											

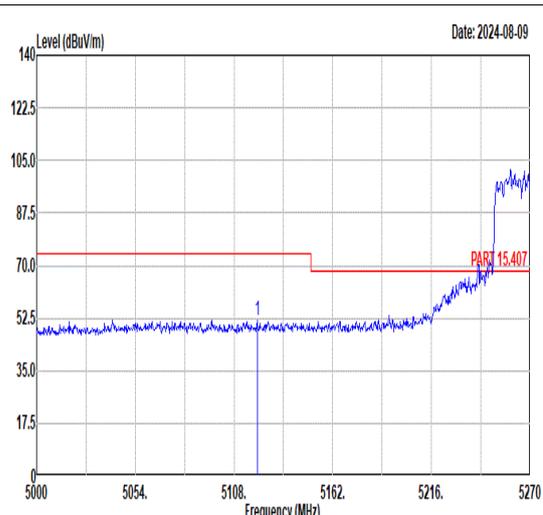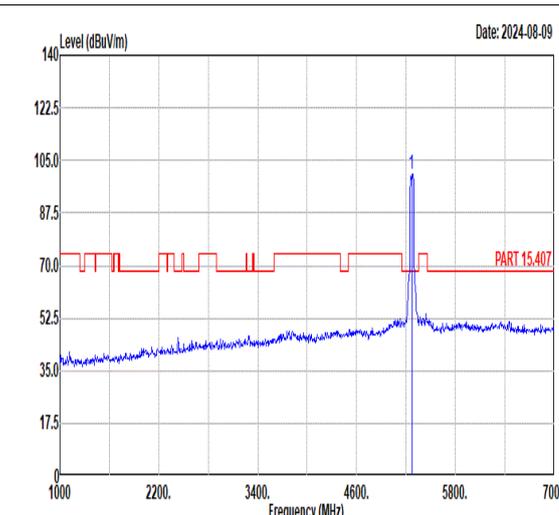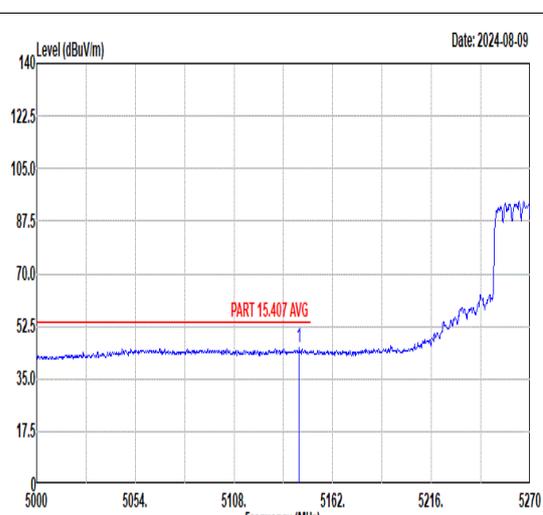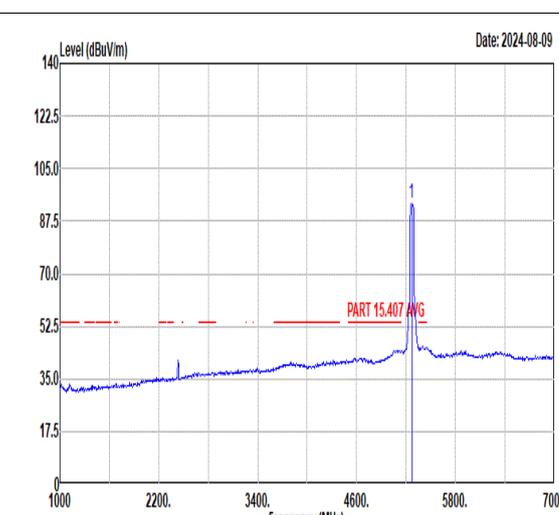

Mode	16																																																																			
	Band Edge - L																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																			
ANT	STBC0+1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5120.69</td> <td>51.98</td> <td>74.00</td> <td>-22.02</td> <td>42.13</td> <td>34.60</td> <td>7.90</td> <td>32.65</td> <td>200</td> <td>39</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	5120.69	51.98	74.00	-22.02	42.13	34.60	7.90	32.65	200	39	PEAK	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>100.55</td> <td>-----</td> <td>-----</td> <td>90.25</td> <td>34.73</td> <td>8.15</td> <td>32.58</td> <td>200</td> <td>39</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	5270.00	100.55	-----	-----	90.25	34.73	8.15	32.58	200	39	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	5120.69	51.98	74.00	-22.02	42.13	34.60	7.90	32.65	200	39	PEAK																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	5270.00	100.55	-----	-----	90.25	34.73	8.15	32.58	200	39	PEAK																																																									
Avg	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.64</td> <td>45.34</td> <td>54.00</td> <td>-8.66</td> <td>35.45</td> <td>34.62</td> <td>7.91</td> <td>32.64</td> <td>200</td> <td>39</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	5143.64	45.34	54.00	-8.66	35.45	34.62	7.91	32.64	200	39	AVERAGE	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>93.25</td> <td>-----</td> <td>-----</td> <td>83.03</td> <td>34.71</td> <td>8.10</td> <td>32.59</td> <td>200</td> <td>39</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	5270.00	93.25	-----	-----	83.03	34.71	8.10	32.59	200	39	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	5143.64	45.34	54.00	-8.66	35.45	34.62	7.91	32.64	200	39	AVERAGE																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																														
1	5270.00	93.25	-----	-----	83.03	34.71	8.10	32.59	200	39	AVERAGE																																																									



Mode	16																																		
	Band Edge - R																																		
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																		
ANT	STBC0+1																																		
Pol.	Vertical	Fundamental																																	
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5387.42</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>42.11</td> <td>34.81</td> <td>8.43</td> <td>32.54</td> <td>200 39 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5387.42	52.81	74.00	-21.19	42.11	34.81	8.43	32.54	200 39 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5387.42	52.81	74.00	-21.19	42.11	34.81	8.43	32.54	200 39 PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5397.68</td> <td>45.67</td> <td>54.00</td> <td>-8.33</td> <td>34.93</td> <td>34.82</td> <td>8.46</td> <td>32.54</td> <td>200 39 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5397.68	45.67	54.00	-8.33	34.93	34.82	8.46	32.54	200 39 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5397.68	45.67	54.00	-8.33	34.93	34.82	8.46	32.54	200 39 AVERAGE																											







Mode	17																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																									
ANT	STBC0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5073.78</td> <td>50.53</td> <td>74.00</td> <td>-23.47</td> <td>40.77</td> <td>34.56</td> <td>7.87</td> <td>32.67</td> <td>173</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5073.78	50.53	74.00	-23.47	40.77	34.56	7.87	32.67	173	299	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>98.16</td> <td>-----</td> <td>-----</td> <td>87.75</td> <td>34.75</td> <td>8.23</td> <td>32.57</td> <td>173</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	98.16	-----	-----	87.75	34.75	8.23	32.57	173	299	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5073.78	50.53	74.00	-23.47	40.77	34.56	7.87	32.67	173	299	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5310.00	98.16	-----	-----	87.75	34.75	8.23	32.57	173	299	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5067.89</td> <td>43.46</td> <td>54.00</td> <td>-10.54</td> <td>33.71</td> <td>34.56</td> <td>7.86</td> <td>32.67</td> <td>173</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5067.89	43.46	54.00	-10.54	33.71	34.56	7.86	32.67	173	299	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>90.89</td> <td>-----</td> <td>-----</td> <td>80.49</td> <td>34.75</td> <td>8.22</td> <td>32.57</td> <td>173</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	90.89	-----	-----	80.49	34.75	8.22	32.57	173	299	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5067.89	43.46	54.00	-10.54	33.71	34.56	7.86	32.67	173	299	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5310.00	90.89	-----	-----	80.49	34.75	8.22	32.57	173	299	AVERAGE																																																															



Mode	17																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																									
ANT	STBC0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5352.75</td> <td>56.88</td> <td>74.00</td> <td>-17.12</td> <td>46.32</td> <td>34.78</td> <td>8.34</td> <td>32.56</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>173</td> <td>299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5352.75	56.88	74.00	-17.12	46.32	34.78	8.34	32.56							173	299 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5352.75	56.88	74.00	-17.12	46.32	34.78	8.34	32.56																																			
						173	299 PEAK																																			
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5353.95</td> <td>47.98</td> <td>54.00</td> <td>-6.02</td> <td>37.42</td> <td>34.78</td> <td>8.34</td> <td>32.56</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>173</td> <td>299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5353.95	47.98	54.00	-6.02	37.42	34.78	8.34	32.56							173	299 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5353.95	47.98	54.00	-6.02	37.42	34.78	8.34	32.56																																			
						173	299 AVERAGE																																			

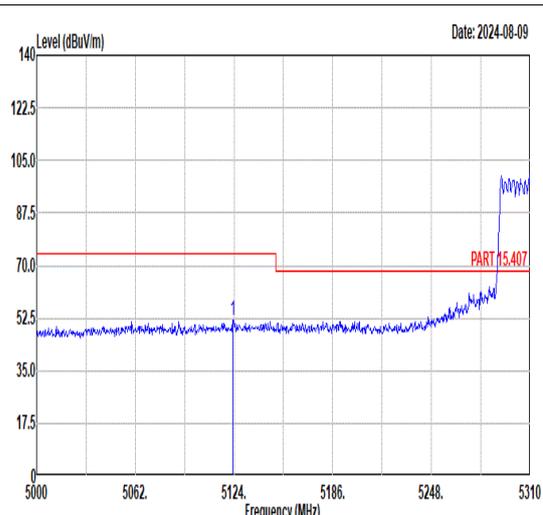
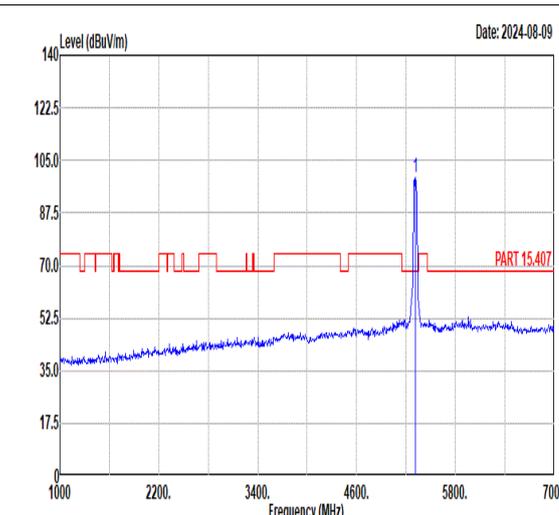
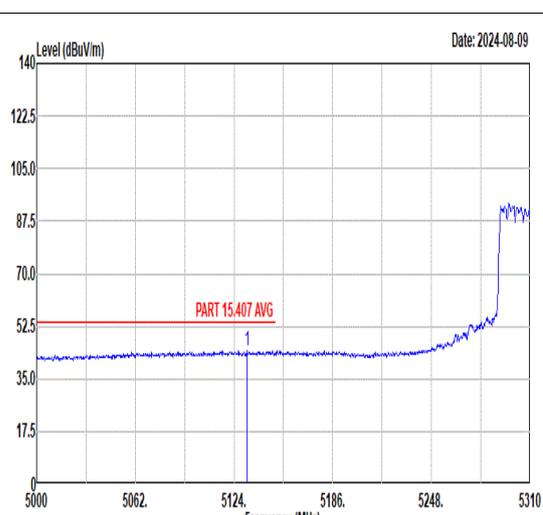
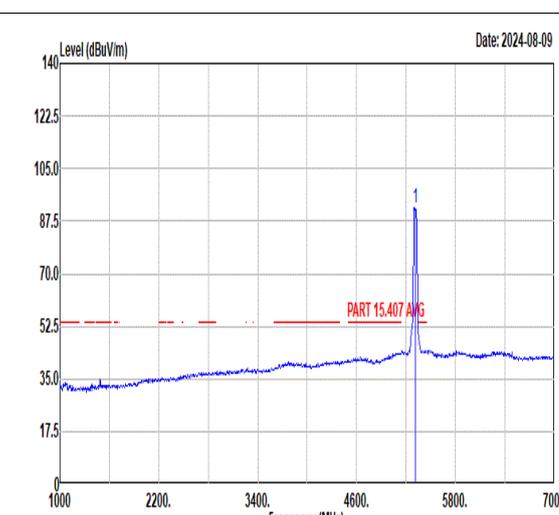


Mode	17																																																																																							
	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																																							
ANT	STBC0+1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5123.38</td> <td>51.87</td> <td>74.00</td> <td>-22.13</td> <td>42.02</td> <td>34.60</td> <td>7.90</td> <td>32.65</td> <td>200</td> <td>21</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5123.38	51.87	74.00	-22.13	42.02	34.60	7.90	32.65	200	21	PEAK	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>99.09</td> <td>-----</td> <td>-----</td> <td>88.68</td> <td>34.75</td> <td>8.23</td> <td>32.57</td> <td>200</td> <td>21</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5310.00	99.09	-----	-----	88.68	34.75	8.23	32.57	200	21	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5123.38	51.87	74.00	-22.13	42.02	34.60	7.90	32.65	200	21	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5310.00	99.09	-----	-----	88.68	34.75	8.23	32.57	200	21	PEAK																																																																													
Avg	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.06</td> <td>44.51</td> <td>54.00</td> <td>-9.49</td> <td>34.64</td> <td>34.61</td> <td>7.91</td> <td>32.65</td> <td>200</td> <td>21</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5132.06	44.51	54.00	-9.49	34.64	34.61	7.91	32.65	200	21	AVERAGE	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>92.02</td> <td>-----</td> <td>-----</td> <td>81.68</td> <td>34.74</td> <td>8.18</td> <td>32.58</td> <td>200</td> <td>21</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5310.00	92.02	-----	-----	81.68	34.74	8.18	32.58	200	21	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5132.06	44.51	54.00	-9.49	34.64	34.61	7.91	32.65	200	21	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5310.00	92.02	-----	-----	81.68	34.74	8.18	32.58	200	21	AVERAGE																																																																													



Mode	17																																			
	Band Edge - R																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																			
ANT	STBC0+1																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5354.55</td> <td>57.06</td> <td>74.00</td> <td>-16.94</td> <td>46.50</td> <td>34.78</td> <td>8.34</td> <td>32.56</td> <td>200</td> <td>21 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5354.55	57.06	74.00	-16.94	46.50	34.78	8.34	32.56	200	21 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5354.55	57.06	74.00	-16.94	46.50	34.78	8.34	32.56	200	21 PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5353.95</td> <td>49.58</td> <td>54.00</td> <td>-4.42</td> <td>39.02</td> <td>34.78</td> <td>8.34</td> <td>32.56</td> <td>200</td> <td>21 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5353.95	49.58	54.00	-4.42	39.02	34.78	8.34	32.56	200	21 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5353.95	49.58	54.00	-4.42	39.02	34.78	8.34	32.56	200	21 AVERAGE																											

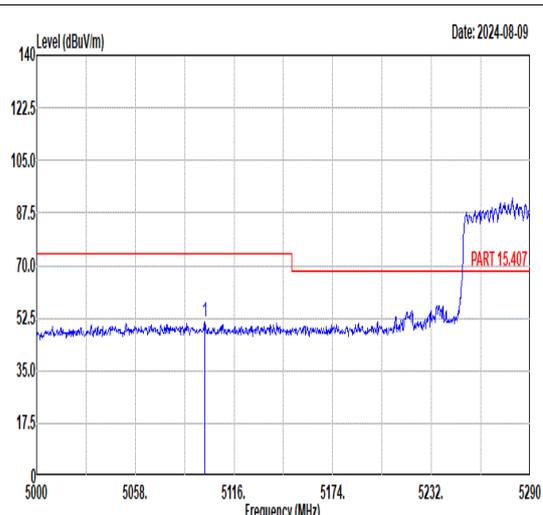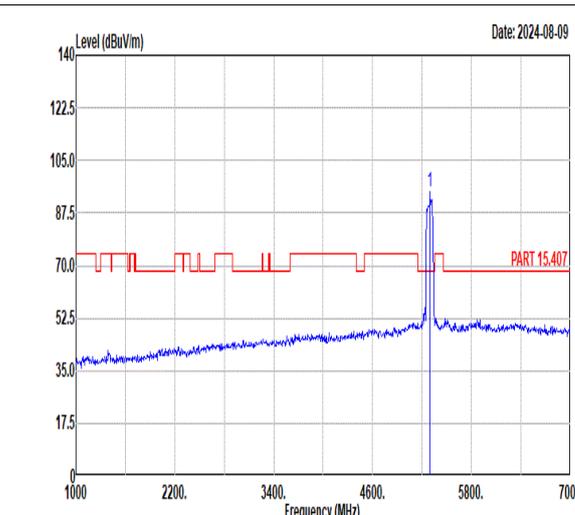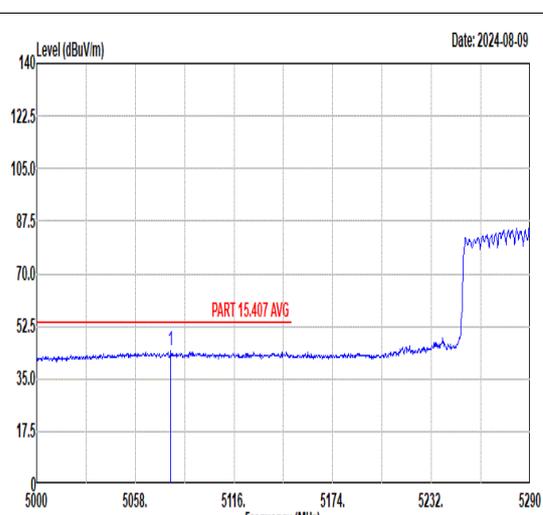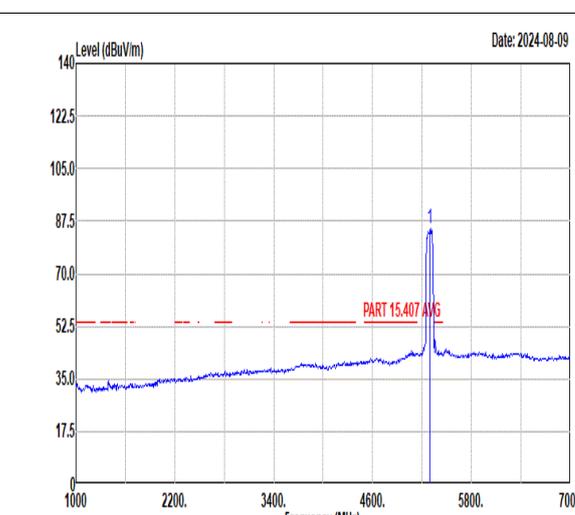

Mode	18																																													
	Band Edge - L																																													
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																													
ANT	STBC0+1																																													
Pol.	Horizontal	Fundamental																																												
Peak	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level MHz</th> <th>Line dBuV/m</th> <th>Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss dB</th> <th>Preamp dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5098.89</td> <td>51.19</td> <td>74.00</td> <td>-22.81</td> <td>41.39</td> <td>34.58</td> <td>7.88</td> <td>32.66</td> <td>200</td> <td>300 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark	1	5098.89	51.19	74.00	-22.81	41.39	34.58	7.88	32.66	200	300 PEAK	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level MHz</th> <th>Line dBuV/m</th> <th>Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss dB</th> <th>Preamp dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>94.33</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>34.74</td> <td>8.18</td> <td>32.58</td> <td>200</td> <td>300 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark	1	5290.00	94.33	-----	-----	83.99	34.74	8.18	32.58	200	300 PEAK
	Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark																																			
1	5098.89	51.19	74.00	-22.81	41.39	34.58	7.88	32.66	200	300 PEAK																																				
Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark																																				
1	5290.00	94.33	-----	-----	83.99	34.74	8.18	32.58	200	300 PEAK																																				
Avg	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level MHz</th> <th>Line dBuV/m</th> <th>Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss dB</th> <th>Preamp dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5078.88</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>34.60</td> <td>34.57</td> <td>7.87</td> <td>32.67</td> <td>200</td> <td>300 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark	1	5078.88	44.37	54.00	-9.63	34.60	34.57	7.87	32.67	200	300 AVERAGE	 <p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level MHz</th> <th>Line dBuV/m</th> <th>Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss dB</th> <th>Preamp dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>84.95</td> <td>-----</td> <td>-----</td> <td>74.59</td> <td>34.74</td> <td>8.20</td> <td>32.58</td> <td>200</td> <td>300 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark	1	5290.00	84.95	-----	-----	74.59	34.74	8.20	32.58	200	300 AVERAGE
Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark																																				
1	5078.88	44.37	54.00	-9.63	34.60	34.57	7.87	32.67	200	300 AVERAGE																																				
Limit Freq	Level MHz	Line dBuV/m	Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss dB	Preamp dB	APos cm	TPos deg	Remark																																				
1	5290.00	84.95	-----	-----	74.59	34.74	8.20	32.58	200	300 AVERAGE																																				



Mode	18																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																					
ANT	STBC0+1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.19</td> <td>58.66</td> <td>74.00</td> <td>-15.34</td> <td>48.07</td> <td>34.79</td> <td>8.35</td> <td>32.55</td> <td>200</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5359.19	58.66	74.00	-15.34	48.07	34.79	8.35	32.55	200	300	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5359.19	58.66	74.00	-15.34	48.07	34.79	8.35	32.55	200	300	PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.85</td> <td>48.09</td> <td>54.00</td> <td>-5.91</td> <td>37.50</td> <td>34.79</td> <td>8.35</td> <td>32.55</td> <td>200</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5358.85	48.09	54.00	-5.91	37.50	34.79	8.35	32.55	200	300	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5358.85	48.09	54.00	-5.91	37.50	34.79	8.35	32.55	200	300	AVERAGE																											



Mode	18																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																																																									
ANT	STBC0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5133.69</td> <td>52.67</td> <td>74.00</td> <td>-21.33</td> <td>42.80</td> <td>34.61</td> <td>7.91</td> <td>32.65</td> <td>205</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5133.69	52.67	74.00	-21.33	42.80	34.61	7.91	32.65	205	33	PEAK	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>95.30</td> <td>-----</td> <td>-----</td> <td>84.87</td> <td>34.75</td> <td>8.25</td> <td>32.57</td> <td>205</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	95.30	-----	-----	84.87	34.75	8.25	32.57	205	33	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5133.69	52.67	74.00	-21.33	42.80	34.61	7.91	32.65	205	33	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5290.00	95.30	-----	-----	84.87	34.75	8.25	32.57	205	33	PEAK																																																															
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5094.25</td> <td>45.37</td> <td>54.00</td> <td>-8.63</td> <td>35.57</td> <td>34.58</td> <td>7.88</td> <td>32.66</td> <td>205</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5094.25	45.37	54.00	-8.63	35.57	34.58	7.88	32.66	205	33	AVERAGE	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>87.12</td> <td>-----</td> <td>-----</td> <td>76.72</td> <td>34.75</td> <td>8.22</td> <td>32.57</td> <td>205</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	87.12	-----	-----	76.72	34.75	8.22	32.57	205	33	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5094.25	45.37	54.00	-8.63	35.57	34.58	7.88	32.66	205	33	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5290.00	87.12	-----	-----	76.72	34.75	8.22	32.57	205	33	AVERAGE																																																															



Mode	18																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																					
ANT	STBC0+1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.98</td> <td>60.06</td> <td>74.00</td> <td>-13.94</td> <td>49.48</td> <td>34.78</td> <td>8.35</td> <td>32.55</td> <td>205</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5356.98	60.06	74.00	-13.94	49.48	34.78	8.35	32.55	205	33	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5356.98	60.06	74.00	-13.94	49.48	34.78	8.35	32.55	205	33	PEAK																											
Avg	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.81</td> <td>50.51</td> <td>54.00</td> <td>-3.49</td> <td>39.93</td> <td>34.78</td> <td>8.35</td> <td>32.55</td> <td>205</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5356.81	50.51	54.00	-3.49	39.93	34.78	8.35	32.55	205	33	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5356.81	50.51	54.00	-3.49	39.93	34.78	8.35	32.55	205	33	AVERAGE																											



Mode	19																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																					
ANT	CDD0+1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.35</td> <td>53.70</td> <td>74.00</td> <td>-20.30</td> <td>42.94</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>201</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>58.61</td> <td>68.30</td> <td>-9.69</td> <td>47.85</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>201</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.35	53.70	74.00	-20.30	42.94	34.86	8.41	32.51	201	296	PEAK	2	5470.00	58.61	68.30	-9.69	47.85	34.87	8.40	32.51	201	296	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.07</td> <td>-----</td> <td>-----</td> <td>92.32</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>201</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	103.07	-----	-----	92.32	34.90	8.35	32.50	201	296	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.35	53.70	74.00	-20.30	42.94	34.86	8.41	32.51	201	296	PEAK																																																																											
2	5470.00	58.61	68.30	-9.69	47.85	34.87	8.40	32.51	201	296	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	103.07	-----	-----	92.32	34.90	8.35	32.50	201	296	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.95</td> <td>43.43</td> <td>54.00</td> <td>-10.57</td> <td>32.67</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>201</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5456.95	43.43	54.00	-10.57	32.67	34.86	8.41	32.51	201	296	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.16</td> <td>-----</td> <td>-----</td> <td>86.41</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>201</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	97.16	-----	-----	86.41	34.90	8.35	32.50	201	296	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5456.95	43.43	54.00	-10.57	32.67	34.86	8.41	32.51	201	296	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	97.16	-----	-----	86.41	34.90	8.35	32.50	201	296	AVERAGE																																																																											



Mode	19																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																					
ANT	CDD0+1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>54.09</td> <td>74.00</td> <td>-19.91</td> <td>43.33</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>100</td> <td>24</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>59.14</td> <td>68.30</td> <td>-9.16</td> <td>48.38</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>100</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.95	54.09	74.00	-19.91	43.33	34.86	8.41	32.51	100	24	PEAK	2	5470.00	59.14	68.30	-9.16	48.38	34.87	8.40	32.51	100	24	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.52</td> <td>-----</td> <td>-----</td> <td>92.77</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>100</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	103.52	-----	-----	92.77	34.90	8.35	32.50	100	24	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.95	54.09	74.00	-19.91	43.33	34.86	8.41	32.51	100	24	PEAK																																																																											
2	5470.00	59.14	68.30	-9.16	48.38	34.87	8.40	32.51	100	24	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	103.52	-----	-----	92.77	34.90	8.35	32.50	100	24	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>43.54</td> <td>54.00</td> <td>-10.46</td> <td>32.78</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>100</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.95	43.54	54.00	-10.46	32.78	34.86	8.41	32.51	100	24	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.37</td> <td>-----</td> <td>-----</td> <td>86.62</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>100</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	97.37	-----	-----	86.62	34.90	8.35	32.50	100	24	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.95	43.54	54.00	-10.46	32.78	34.86	8.41	32.51	100	24	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	97.37	-----	-----	86.62	34.90	8.35	32.50	100	24	AVERAGE																																																																											



Mode	19																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.59</td> <td>74.00</td> <td>-26.41</td> <td>61.98</td> <td>37.60</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.60</td> <td>68.30</td> <td>-21.70</td> <td>59.28</td> <td>39.50</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	47.59	74.00	-26.41	61.98	37.60	11.21	63.20	--	--	Peak	2	16500.00	46.60	68.30	-21.70	59.28	39.50	12.91	65.09	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>61.36</td> <td>37.60</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.56</td> <td>68.30</td> <td>-21.74</td> <td>59.24</td> <td>39.50</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	46.97	74.00	-27.03	61.36	37.60	11.21	63.20	--	--	Peak	2	16500.00	46.56	68.30	-21.74	59.24	39.50	12.91	65.09	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	47.59	74.00	-26.41	61.98	37.60	11.21	63.20	--	--	Peak																																																																																						
2	16500.00	46.60	68.30	-21.70	59.28	39.50	12.91	65.09	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	46.97	74.00	-27.03	61.36	37.60	11.21	63.20	--	--	Peak																																																																																						
2	16500.00	46.56	68.30	-21.74	59.24	39.50	12.91	65.09	--	--	Peak																																																																																						



Mode	20																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-15</p>	<p>Date: 2024-08-15</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.46</td> <td>74.00</td> <td>-25.54</td> <td>62.61</td> <td>37.66</td> <td>11.29</td> <td>63.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.53</td> <td>68.30</td> <td>-21.77</td> <td>58.93</td> <td>39.69</td> <td>13.01</td> <td>65.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	48.46	74.00	-25.54	62.61	37.66	11.29	63.10	--	--	Peak	2	16740.00	46.53	68.30	-21.77	58.93	39.69	13.01	65.10	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.84</td> <td>74.00</td> <td>-25.16</td> <td>62.99</td> <td>37.66</td> <td>11.29</td> <td>63.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.23</td> <td>68.30</td> <td>-22.07</td> <td>58.63</td> <td>39.69</td> <td>13.01</td> <td>65.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	48.84	74.00	-25.16	62.99	37.66	11.29	63.10	--	--	Peak	2	16740.00	46.23	68.30	-22.07	58.63	39.69	13.01	65.10	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11160.00	48.46	74.00	-25.54	62.61	37.66	11.29	63.10	--	--	Peak																																																																																						
2	16740.00	46.53	68.30	-21.77	58.93	39.69	13.01	65.10	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11160.00	48.84	74.00	-25.16	62.99	37.66	11.29	63.10	--	--	Peak																																																																																						
2	16740.00	46.23	68.30	-22.07	58.63	39.69	13.01	65.10	--	--	Peak																																																																																						



Mode	21																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	CDD0+1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.61</td> <td>63.02</td> <td>68.30</td> <td>-5.28</td> <td>51.81</td> <td>35.03</td> <td>8.68</td> <td>32.50</td> <td>282</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.61	63.02	68.30	-5.28	51.81	35.03	8.68	32.50	282	311	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>104.52</td> <td>-----</td> <td>-----</td> <td>93.40</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>282</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	104.52	-----	-----	93.40	35.02	8.60	32.50	282	311	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5725.61	63.02	68.30	-5.28	51.81	35.03	8.68	32.50	282	311	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	104.52	-----	-----	93.40	35.02	8.60	32.50	282	311	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.73</td> <td>-----</td> <td>-----</td> <td>86.61</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>282</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	97.73	-----	-----	86.61	35.02	8.60	32.50	282	311	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	97.73	-----	-----	86.61	35.02	8.60	32.50	282	311	AVERAGE																																																															



Mode	21																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	CDD0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.33</td> <td>60.32</td> <td>68.30</td> <td>-7.98</td> <td>49.11</td> <td>35.03</td> <td>8.68</td> <td>32.50</td> <td>100</td> <td>19</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5726.33	60.32	68.30	-7.98	49.11	35.03	8.68	32.50	100	19	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.82</td> <td>-----</td> <td>-----</td> <td>91.73</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>100</td> <td>19</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	102.82	-----	-----	91.73	35.02	8.57	32.50	100	19	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5726.33	60.32	68.30	-7.98	49.11	35.03	8.68	32.50	100	19	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	102.82	-----	-----	91.73	35.02	8.57	32.50	100	19	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.60</td> <td>-----</td> <td>-----</td> <td>85.51</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>100</td> <td>19</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	96.60	-----	-----	85.51	35.02	8.57	32.50	100	19	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	96.60	-----	-----	85.51	35.02	8.57	32.50	100	19	AVERAGE																																																															







Mode	21																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																
ANT	CDD0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.37</td> <td>74.00</td> <td>-27.63</td> <td>60.16</td> <td>37.76</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.89</td> <td>68.30</td> <td>-21.41</td> <td>58.87</td> <td>40.06</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	46.37	74.00	-27.63	60.16	37.76	11.41	62.96	--	--	Peak	2	17100.00	46.89	68.30	-21.41	58.87	40.06	13.14	65.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.52</td> <td>74.00</td> <td>-26.48</td> <td>61.31</td> <td>37.76</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.71</td> <td>68.30</td> <td>-20.59</td> <td>59.69</td> <td>40.06</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.52	74.00	-26.48	61.31	37.76	11.41	62.96	--	--	Peak	2	17100.00	47.71	68.30	-20.59	59.69	40.06	13.14	65.18	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	46.37	74.00	-27.63	60.16	37.76	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	46.89	68.30	-21.41	58.87	40.06	13.14	65.18	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	47.52	74.00	-26.48	61.31	37.76	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	47.71	68.30	-20.59	59.69	40.06	13.14	65.18	--	--	Peak																																																																																						



Mode	22																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHZ																																																																																					
ANT	STBC0+1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.90</td> <td>55.73</td> <td>74.00</td> <td>-18.27</td> <td>44.96</td> <td>34.86</td> <td>8.42</td> <td>32.51</td> <td>200</td> <td>298</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>62.96</td> <td>68.30</td> <td>-5.34</td> <td>52.20</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>200</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.90	55.73	74.00	-18.27	44.96	34.86	8.42	32.51	200	298	PEAK	2	5470.00	62.96	68.30	-5.34	52.20	34.87	8.40	32.51	200	298	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.34</td> <td>-----</td> <td>-----</td> <td>94.59</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>200</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	105.34	-----	-----	94.59	34.90	8.35	32.50	200	298	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5452.90	55.73	74.00	-18.27	44.96	34.86	8.42	32.51	200	298	PEAK																																																																											
2	5470.00	62.96	68.30	-5.34	52.20	34.87	8.40	32.51	200	298	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	105.34	-----	-----	94.59	34.90	8.35	32.50	200	298	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>48.33</td> <td>54.00</td> <td>-5.67</td> <td>37.57</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>200</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.95	48.33	54.00	-5.67	37.57	34.86	8.41	32.51	200	298	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.17</td> <td>-----</td> <td>-----</td> <td>87.42</td> <td>34.90</td> <td>8.35</td> <td>32.50</td> <td>200</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	98.17	-----	-----	87.42	34.90	8.35	32.50	200	298	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.95	48.33	54.00	-5.67	37.57	34.86	8.41	32.51	200	298	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	98.17	-----	-----	87.42	34.90	8.35	32.50	200	298	AVERAGE																																																																											

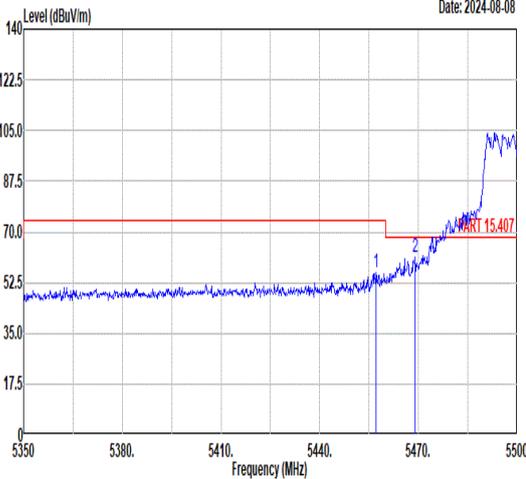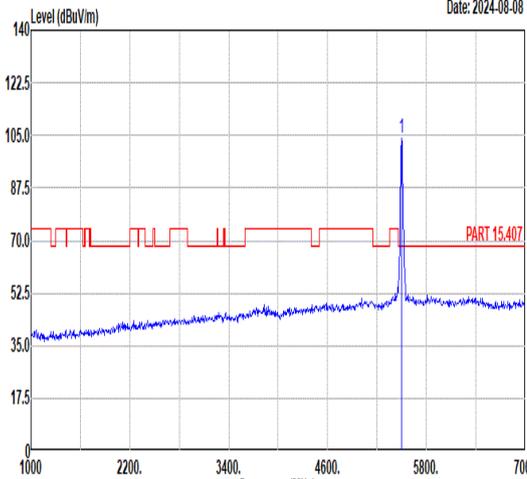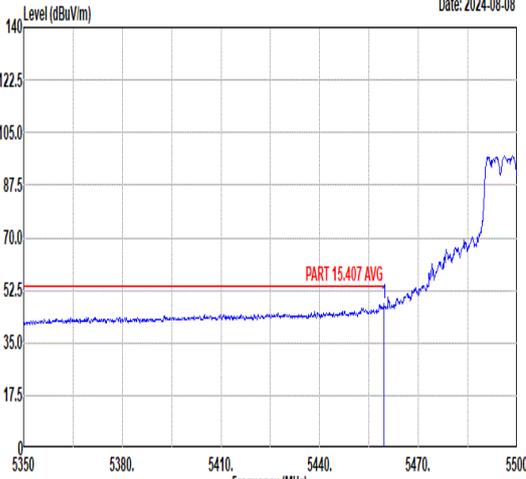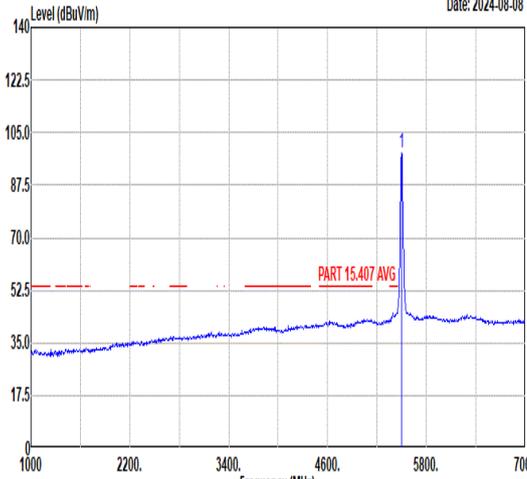

Mode	22																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHZ																																																																																					
ANT	STBC0+1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Date: 2024-08-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.10</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>45.17</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>200</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.10</td> <td>61.13</td> <td>68.30</td> <td>-7.17</td> <td>50.37</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>200</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.10	55.93	74.00	-18.07	45.17	34.86	8.41	32.51	200	29	PEAK	2	5469.10	61.13	68.30	-7.17	50.37	34.87	8.40	32.51	200	29	PEAK	 <p>Date: 2024-08-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.33</td> <td>-----</td> <td>-----</td> <td>93.57</td> <td>34.90</td> <td>8.36</td> <td>32.50</td> <td>200</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	104.33	-----	-----	93.57	34.90	8.36	32.50	200	29	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5457.10	55.93	74.00	-18.07	45.17	34.86	8.41	32.51	200	29	PEAK																																																																											
2	5469.10	61.13	68.30	-7.17	50.37	34.87	8.40	32.51	200	29	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	104.33	-----	-----	93.57	34.90	8.36	32.50	200	29	PEAK																																																																											
Avg	 <p>Date: 2024-08-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.65</td> <td>47.87</td> <td>54.00</td> <td>-6.13</td> <td>37.11</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>200</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.65	47.87	54.00	-6.13	37.11	34.86	8.41	32.51	200	29	AVERAGE	 <p>Date: 2024-08-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.23</td> <td>-----</td> <td>-----</td> <td>87.47</td> <td>34.90</td> <td>8.36</td> <td>32.50</td> <td>200</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	98.23	-----	-----	87.47	34.90	8.36	32.50	200	29	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.65	47.87	54.00	-6.13	37.11	34.86	8.41	32.51	200	29	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5500.00	98.23	-----	-----	87.47	34.90	8.36	32.50	200	29	AVERAGE																																																																											



Mode	22																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.15</td> <td>74.00</td> <td>-26.85</td> <td>61.54</td> <td>37.60</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.94</td> <td>68.30</td> <td>-22.36</td> <td>58.62</td> <td>39.50</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	47.15	74.00	-26.85	61.54	37.60	11.21	63.20	--	--	Peak	2	16500.00	45.94	68.30	-22.36	58.62	39.50	12.91	65.09	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.03</td> <td>74.00</td> <td>-25.97</td> <td>62.42</td> <td>37.60</td> <td>11.21</td> <td>63.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.70</td> <td>68.30</td> <td>-22.60</td> <td>58.38</td> <td>39.50</td> <td>12.91</td> <td>65.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	48.03	74.00	-25.97	62.42	37.60	11.21	63.20	--	--	Peak	2	16500.00	45.70	68.30	-22.60	58.38	39.50	12.91	65.09	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	47.15	74.00	-26.85	61.54	37.60	11.21	63.20	--	--	Peak																																																																																						
2	16500.00	45.94	68.30	-22.36	58.62	39.50	12.91	65.09	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	48.03	74.00	-25.97	62.42	37.60	11.21	63.20	--	--	Peak																																																																																						
2	16500.00	45.70	68.30	-22.60	58.38	39.50	12.91	65.09	--	--	Peak																																																																																						



Mode	23																																																																																												
	Harmonic																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz																																																																																												
ANT	STBC0+1																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>48.07</td> <td>74.00</td> <td>-25.93</td> <td>62.22</td> <td>37.66</td> <td>11.29</td> <td>63.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>45.73</td> <td>68.30</td> <td>-22.57</td> <td>58.13</td> <td>39.69</td> <td>13.01</td> <td>65.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11160.00	48.07	74.00	-25.93	62.22	37.66	11.29	63.10	--	--	Peak	2 16740.00	45.73	68.30	-22.57	58.13	39.69	13.01	65.10	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>61.77</td> <td>37.66</td> <td>11.29</td> <td>63.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>45.99</td> <td>68.30</td> <td>-22.31</td> <td>58.39</td> <td>39.69</td> <td>13.01</td> <td>65.10</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11160.00	47.62	74.00	-26.38	61.77	37.66	11.29	63.10	--	--	Peak	2 16740.00	45.99	68.30	-22.31	58.39	39.69	13.01	65.10	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																						
1 11160.00	48.07	74.00	-25.93	62.22	37.66	11.29	63.10	--	--	Peak																																																																																			
2 16740.00	45.73	68.30	-22.57	58.13	39.69	13.01	65.10	--	--	Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																						
1 11160.00	47.62	74.00	-26.38	61.77	37.66	11.29	63.10	--	--	Peak																																																																																			
2 16740.00	45.99	68.30	-22.31	58.39	39.69	13.01	65.10	--	--	Peak																																																																																			



Mode	24																																																																											
	Band Edge																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHZ																																																																											
ANT	STBC0+1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.48</td> <td>62.23</td> <td>68.30</td> <td>-6.07</td> <td>51.02</td> <td>35.03</td> <td>8.68</td> <td>32.50</td> <td>227</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5725.48	62.23	68.30	-6.07	51.02	35.03	8.68	32.50	227	314	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.19</td> <td>-----</td> <td>-----</td> <td>91.13</td> <td>35.01</td> <td>8.55</td> <td>32.50</td> <td>227</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	102.19	-----	-----	91.13	35.01	8.55	32.50	227	314	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5725.48	62.23	68.30	-6.07	51.02	35.03	8.68	32.50	227	314	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	102.19	-----	-----	91.13	35.01	8.55	32.50	227	314	PEAK																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.28</td> <td>-----</td> <td>-----</td> <td>85.19</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>227</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	96.28	-----	-----	85.19	35.02	8.57	32.50	227	314	AVERAGE																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	96.28	-----	-----	85.19	35.02	8.57	32.50	227	314	AVERAGE																																																																	



Mode	24																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHZ																																																																									
ANT	STBC0+1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.33</td> <td>59.49</td> <td>68.30</td> <td>-8.81</td> <td>48.28</td> <td>35.03</td> <td>8.68</td> <td>32.50</td> <td>186</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5726.33	59.49	68.30	-8.81	48.28	35.03	8.68	32.50	186	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.40</td> <td>-----</td> <td>-----</td> <td>89.34</td> <td>35.01</td> <td>8.55</td> <td>32.50</td> <td>186</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	100.40	-----	-----	89.34	35.01	8.55	32.50	186	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5726.33	59.49	68.30	-8.81	48.28	35.03	8.68	32.50	186	360	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	100.40	-----	-----	89.34	35.01	8.55	32.50	186	360	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>92.31</td> <td>-----</td> <td>-----</td> <td>81.22</td> <td>35.02</td> <td>8.57</td> <td>32.50</td> <td>186</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	92.31	-----	-----	81.22	35.02	8.57	32.50	186	360	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	92.31	-----	-----	81.22	35.02	8.57	32.50	186	360	AVERAGE																																																															



Mode	24																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																																
ANT	STBC0+1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-08-10</p>	<p>Date: 2024-08-10</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.52</td> <td>74.00</td> <td>-26.48</td> <td>61.31</td> <td>37.76</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.49</td> <td>68.30</td> <td>-20.81</td> <td>59.47</td> <td>40.06</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.52	74.00	-26.48	61.31	37.76	11.41	62.96	--	--	Peak	2	17100.00	47.49	68.30	-20.81	59.47	40.06	13.14	65.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.07</td> <td>74.00</td> <td>-26.93</td> <td>60.86</td> <td>37.76</td> <td>11.41</td> <td>62.96</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.64</td> <td>68.30</td> <td>-19.66</td> <td>60.62</td> <td>40.06</td> <td>13.14</td> <td>65.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.07	74.00	-26.93	60.86	37.76	11.41	62.96	--	--	Peak	2	17100.00	48.64	68.30	-19.66	60.62	40.06	13.14	65.18	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	47.52	74.00	-26.48	61.31	37.76	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	47.49	68.30	-20.81	59.47	40.06	13.14	65.18	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11400.00	47.07	74.00	-26.93	60.86	37.76	11.41	62.96	--	--	Peak																																																																																						
2	17100.00	48.64	68.30	-19.66	60.62	40.06	13.14	65.18	--	--	Peak																																																																																						



Mode	25																																																																																							
	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																																																																							
ANT	STBC0+1																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.32</td> <td>54.95</td> <td>74.00</td> <td>-19.05</td> <td>44.19</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>200</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.24</td> <td>60.91</td> <td>68.30</td> <td>-7.39</td> <td>50.15</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>200</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.32	54.95	74.00	-19.05	44.19	34.86	8.41	32.51	200	304	PEAK	2	5468.24	60.91	68.30	-7.39	50.15	34.87	8.40	32.51	200	304	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.18</td> <td>-----</td> <td>-----</td> <td>88.45</td> <td>34.91</td> <td>8.32</td> <td>32.50</td> <td>200</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	99.18	-----	-----	88.45	34.91	8.32	32.50	200	304	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5458.32	54.95	74.00	-19.05	44.19	34.86	8.41	32.51	200	304	PEAK																																																																													
2	5468.24	60.91	68.30	-7.39	50.15	34.87	8.40	32.51	200	304	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	99.18	-----	-----	88.45	34.91	8.32	32.50	200	304	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.40</td> <td>48.03</td> <td>54.00</td> <td>-5.97</td> <td>37.27</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>200</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.40	48.03	54.00	-5.97	37.27	34.86	8.41	32.51	200	304	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.85</td> <td>-----</td> <td>-----</td> <td>82.11</td> <td>34.91</td> <td>8.33</td> <td>32.50</td> <td>200</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	92.85	-----	-----	82.11	34.91	8.33	32.50	200	304	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5456.40	48.03	54.00	-5.97	37.27	34.86	8.41	32.51	200	304	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	92.85	-----	-----	82.11	34.91	8.33	32.50	200	304	AVERAGE																																																																													



Mode	25																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																									
ANT	STBC0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-08-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5754.29</td> <td>50.85</td> <td>68.30</td> <td>-17.45</td> <td>39.52</td> <td>35.05</td> <td>8.78</td> <td>32.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>304 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5754.29	50.85	68.30	-17.45	39.52	35.05	8.78	32.50							200	304 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5754.29	50.85	68.30	-17.45	39.52	35.05	8.78	32.50																																			
						200	304 PEAK																																			