



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB361ZU
FCC ID : O57TB361ZU
STANDARD : 47 CFR Part 27
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jun. 22, 2025 ~ Jul. 26, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.



Approved by: Fly Liang

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...6
1.5 Modification of EUT...6
1.6 Maximum EIRP and Emission Designator...7
1.7 Testing Location...9
1.8 Test Software...9
1.9 Applicable Standards...9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...10
2.1 Test Mode...10
2.2 Connection Diagram of Test System...12
2.3 Support Unit used in test configuration and system...12
2.4 Measurement Results Explanation Example...12
2.5 Frequency List of Low/Middle/High Channels...13
3 CONDUCTED TEST ITEMS...15
3.1 Measuring Instruments...15
3.2 Test Setup...15
3.3 Test Result of Conducted Test...15
3.4 Conducted Output Power and EIRP...16
3.5 Peak-to-Average Ratio...17
3.6 Occupied Bandwidth...18
3.7 Conducted Band Edge...19
3.8 Conducted Spurious Emission...20
3.9 Frequency Stability...21
4 RADIATED TEST ITEMS...22
4.1 Measuring Instruments...22
4.2 Test Setup...22
4.3 Test Result of Radiated Test...23
4.4 Radiated Spurious Emission...24
5 LIST OF MEASURING EQUIPMENT...25
6 MEASUREMENT UNCERTAINTY...26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 26.05 dB at 10044.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB361ZU
FCC ID	O57TB361ZU
IMEI Code	Conducted : 867009070008886 Radiation : 867009070017424
HW Version	TB361ZU
SW Version	Lenovo ZUI 17.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Bandwidth	n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 50MHz n38: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n41: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 45MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	15kHz for n7 30kHz for n38/n41
Antenna Gain	<Ant. 0> n7: -1.82 dBi n38/41: -1.66 dBi <Ant. 1> n7: -4.8 dBi n38: -5.48 dBi n41: -5.48 dBi <Ant. 3> n41: -1.66 dBi <Ant. 4> n41: -2.31 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP are shown in the report, 5G NR n7/n38/n41AA for Ant. 0 and 5G NR n41 for Ant. 3.
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. 5G NR support SA (n7/n38/n41) mode and NSA(n7/n41) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
4. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 MaximumEIRP and Emission Designator

5G NR n7		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1346	4M46G7D	0.1104	4M48W7D
10	2505.0 ~ 2565.0	0.1419	9M27G7D	0.1119	9M28W7D
15	2507.5 ~ 2562.5	0.1413	14M1G7D	0.1119	14M1W7D
20	2510.0 ~ 2560.0	0.1429	18M9G7D	0.1135	18M9W7D
25	2512.5 ~ 2557.5	0.1432	23M7G7D	0.1132	23M8W7D
30	2515.0 ~ 2555.0	0.1409	28M6G7D	0.1153	28M6W7D
35	2517.5 ~ 2552.5	0.1426	33M6G7D	0.1138	33M5W7D
40	2520.0 ~ 2550.0	0.1403	38M5G7D	0.1122	38M6W7D
50	2525.0 ~ 2545.0	0.1435	48M2G7D	0.1138	48M3W7D

5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.1413	8M58G7D	0.1146	8M59W7D
15	2577.5 ~ 2612.5	0.1429	13M6G7D	0.1151	13M6W7D
20	2580.0 ~ 2610.0	0.1439	18M2G7D	0.1159	18M2W7D
25	2582.5 ~ 2607.5	0.1435	23M2G7D	0.1146	23M3W7D
30	2585.0 ~ 2605.0	0.1462	27M8G7D	0.1148	27M9W7D
40	2590.0 ~ 2600.0	0.1466	37M9G7D	0.1132	37M8W7D



5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.01 ~ 2685.00	0.1012	8M56G7D	0.0807	8M58W7D
15	2503.50 ~ 2682.48	0.1005	13M6G7D	0.0807	13M6W7D
20	2506.02 ~ 2679.99	0.1019	18M2G7D	0.0822	18M2W7D
25	2508.51 ~ 2677.50	0.1023	23M2G7D	0.0843	23M2W7D
30	2511.00 ~ 2674.98	0.1026	27M9G7D	0.0836	27M9W7D
35	2513.52 ~ 2672.49	0.1030	32M8G7D	0.0822	32M9W7D
40	2516.01 ~ 2670.00	0.1040	37M8G7D	0.0830	37M9W7D
45	2518.5 ~ 2667.48	0.1035	42M4G7D	0.0832	42M4W7D
50	2521.02 ~ 2664.99	0.1014	47M4G7D	0.0811	47M6W7D
60	2526.00 ~ 2659.98	0.0979	57M9G7D	0.0805	57M8W7D
70	2531.01 ~ 2655.00	0.1026	67M5G7D	0.0818	67M6W7D
80	2536.02 ~ 2649.99	0.1030	77M5G7D	0.0828	77M5W7D
90	2541.00 ~ 2644.98	0.1026	87M5G7D	0.0826	87M5W7D
100	2546.01 ~ 2640.00	0.1040	97M3G7D	0.0839	97M6W7D

EN-DC_n41AA	PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz) (NR + LTE)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10MHz+20MHz	0.1543	28M1G7D	0.1240	28M2W7D
15MHz+20MHz	0.1496	33M1G7D	0.1193	33M1W7D
20MHz+20MHz	0.1528	37M9G7D	0.1221	37M9W7D
25MHz+20MHz	0.1561	42M7G7D	0.1207	42M9W7D
30MHz+20MHz	0.1534	47M6G7D	0.1222	47M6W7D
35MHz+20MHz	0.1545	52M7G7D	0.1251	52M8W7D
40MHz+20MHz	0.1559	57M6G7D	0.1239	57M7W7D
45MHz+20MHz	0.1565	62M3G7D	0.1235	62M4W7D
50MHz+20MHz	0.1549	67M3G7D	0.1257	67M5W7D
60MHz+20MHz	0.1524	77M1G7D	0.1220	77M2W7D
70MHz+20MHz	0.1560	87M3G7D	0.1237	87M4W7D
80MHz+20MHz	0.1570	97M2G7D	0.1268	97M3W7D
90MHz+20MHz	0.1592	107MG7D	0.1275	107MW7D
100MHz+20MHz	0.1596	118MG7D	0.1276	117MW7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH02-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01


Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 10MHz+20MHz, 15MHz+20MHz, 20MHz+20MHz, 25MHz+20MHz, 30MHz+20MHz, 35MHz+20MHz, 40MHz+20MHz, 45MHz+20MHz, 50MHz+20MHz, 60MHz+20MHz, 70MHz+20MHz, 80MHz+20MHz, 90MHz+20MHz, 100MHz+20MHz	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	n41AA	All supported Bandwidth	All Modulation	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	n41AA	All supported Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	n41AA	10+20M, 50+20M, 100+20M	PI/2 BPSK, QPSK	1RB, Full RB,	L, H
Conducted Spurious Emission	n41AA	10+20M, 50+20M, 100+20M	PI/2 BPSK, QPSK	1RB	L, M, H
E.I.R.P	n41AA	All supported Bandwidth	All Modulation	1RB, Full RB	L, M, H
Radiated Spurious Emission	n41AA	Worst case from maximum power			M
Note:					
1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.					
2. Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.50V. ; High Voltage =4.50V					

2.2 Connection Diagram of Test System

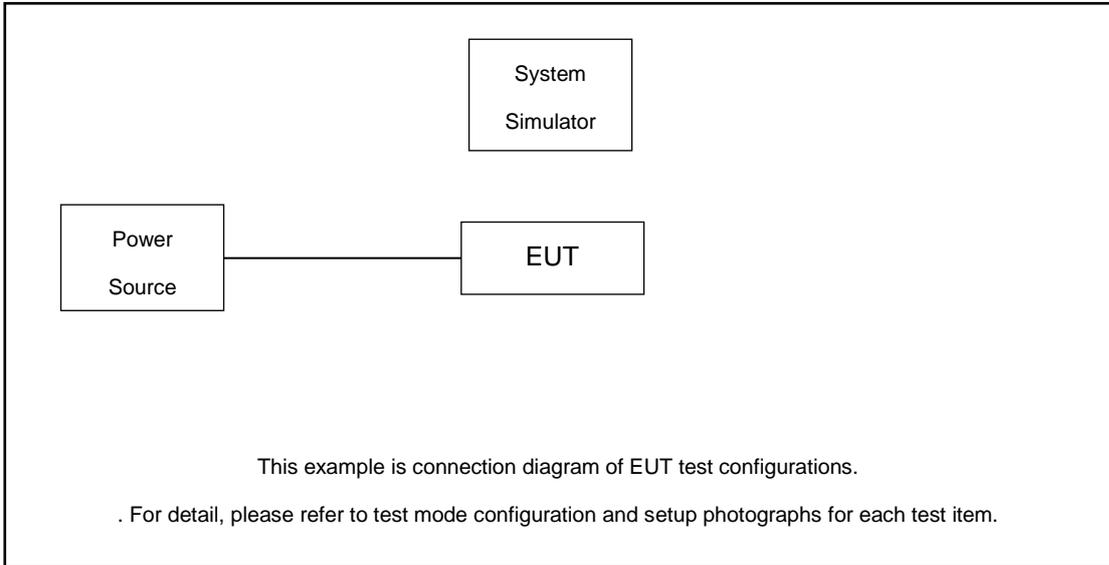

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss}$$

Following shows an offset computation example with cable loss 8.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.6 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
35	Channel	503500	507000	501500
	Frequency	2517.5	2535	2552.5
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
45	Channel	503700	518598	533496
	Frequency	2518.5	2592.99	2667.48
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
35	Channel	502704	518598	534498
	Frequency	2513.52	2592.99	2672.49
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
25	Channel	501702	518598	535500
	Frequency	2508.51	2592.99	2677.5
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

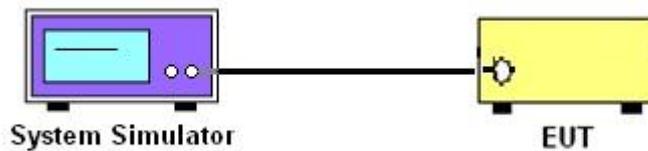

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

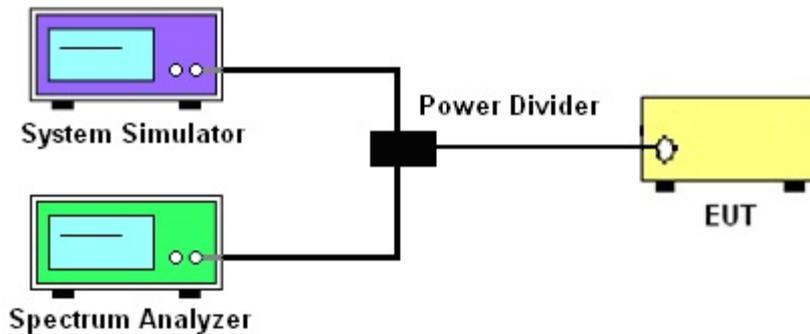

3.2.3 Frequency Stability

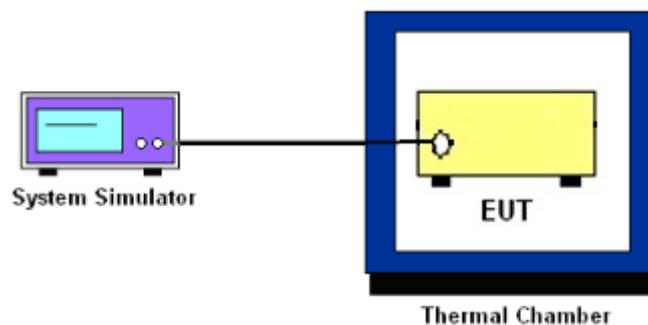

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

9. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

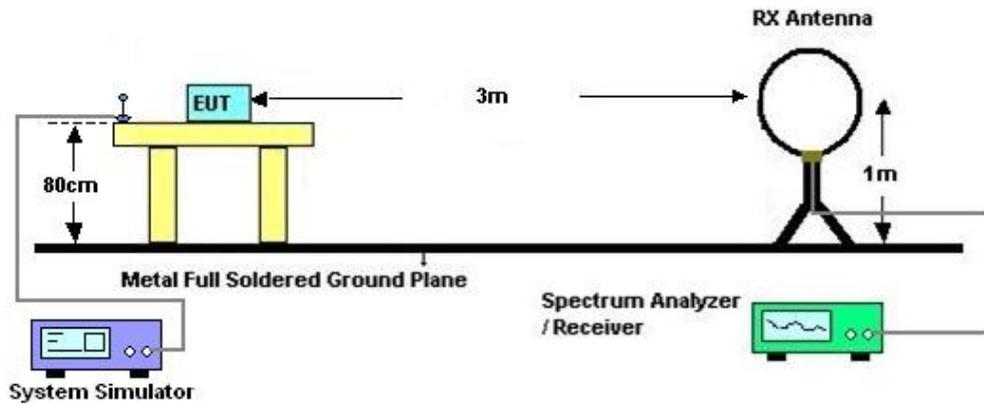

4.2.2 For radiated test from 30MHz to 1GHz

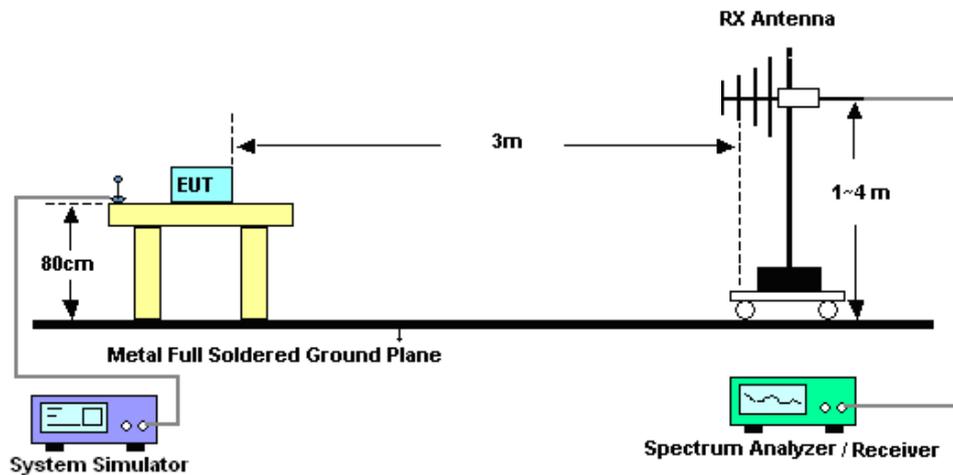

4.2.3 For radiated test above 1GHz

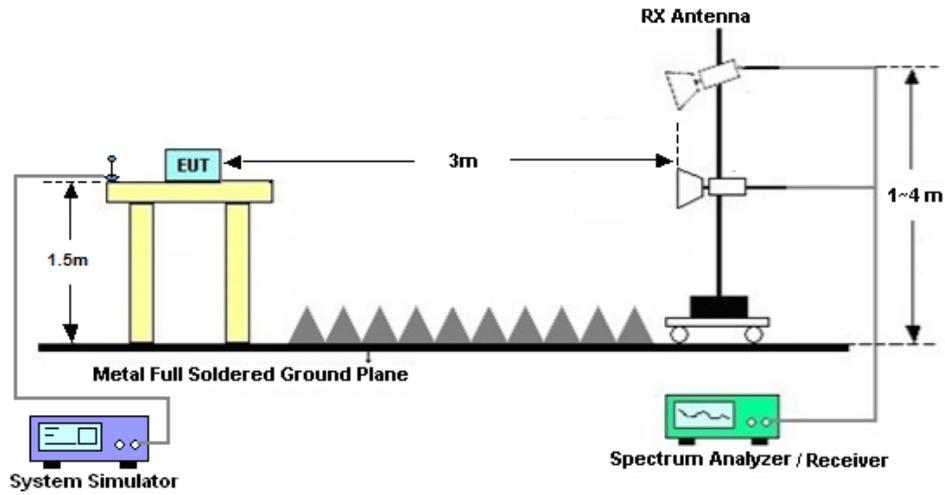

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jun. 22, 2025~ Jul. 26, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 24, 2024	Jun. 22, 2025~ Jul. 26, 2025	Dec. 23, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Jun. 22, 2025~ Jul. 26, 2025	Jul. 02, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 02, 2025		Jul. 01, 2026	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jul. 14, 2025	Jul. 02, 2026	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jul. 14, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jul. 14, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Jul. 14, 2025	Jul. 04, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jul. 14, 2025	Jul. 03, 2026	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Jul. 14, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Jul. 14, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Jul. 14, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	61601000304 3	N/A	Oct. 18, 2024	Jul. 14, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jul. 14, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jul. 14, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.47dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.72dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N7_ANT0

Transmitter Conducted Output Power And EIRP, (G_T - L_c)=-1.82dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	12@6	22.87	21.05	0.1274
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	22.88	21.06	0.1276
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@23	23.01	21.19	0.1315
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	12@6	21.79	19.97	0.0993
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	21.87	20.05	0.1012
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@23	21.98	20.16	0.1038
7	15	5	507000	2535	DFT-s-OFDM QPSK	12@6	23.03	21.21	0.1321
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	23.11	21.29	0.1346
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@23	23.11	21.29	0.1346
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	12@6	22.03	20.21	0.1050
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.25	20.43	0.1104
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@23	22.12	20.3	0.1072
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	12@6	22.85	21.03	0.1268
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	22.91	21.09	0.1285
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@23	23.02	21.2	0.1318
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	12@6	21.86	20.04	0.1009
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	21.9	20.08	0.1019
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@23	21.93	20.11	0.1026
7	15	10	501000	2505	DFT-s-OFDM QPSK	25@12	22.91	21.09	0.1285
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	22.97	21.15	0.1303
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@50	23.18	21.36	0.1368
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	25@12	21.93	20.11	0.1026
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	21.96	20.14	0.1033
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@50	22.24	20.42	0.1102
7	15	10	507000	2535	DFT-s-OFDM QPSK	25@12	23.03	21.21	0.1321
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	23.34	21.52	0.1419
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@50	23.04	21.22	0.1324
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	25@12	22.01	20.19	0.1045
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.31	20.49	0.1119
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@50	22.08	20.26	0.1062
7	15	10	513000	2565	DFT-s-OFDM QPSK	25@12	22.79	20.97	0.1250
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	22.95	21.13	0.1297
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@50	23.09	21.27	0.1340
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	25@12	21.79	19.97	0.0993
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	21.9	20.08	0.1019



7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@50	22	20.18	0.1042
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	36@18	23.04	21.22	0.1324
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	23	21.18	0.1312
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@77	23.14	21.32	0.1355
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	36@18	22.01	20.19	0.1045
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	21.96	20.14	0.1033
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@77	22.3	20.48	0.1117
7	15	15	507000	2535	DFT-s-OFDM QPSK	36@18	23.08	21.26	0.1337
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	23.32	21.5	0.1413
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@77	22.97	21.15	0.1303
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	36@18	22.06	20.24	0.1057
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.31	20.49	0.1119
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@77	22	20.18	0.1042
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	36@18	22.77	20.95	0.1245
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	22.9	21.08	0.1282
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@77	23.08	21.26	0.1337
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	36@18	21.76	19.94	0.0986
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	21.83	20.01	0.1002
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@77	21.95	20.13	0.1030
7	15	20	502000	2510	DFT-s-OFDM QPSK	50@25	23.15	21.33	0.1358
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	22.97	21.15	0.1303
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@104	23.28	21.46	0.1400
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	50@25	22.12	20.3	0.1072
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	21.99	20.17	0.1040
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@104	22.32	20.5	0.1122
7	15	20	507000	2535	DFT-s-OFDM QPSK	50@25	23.1	21.28	0.1343
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	23.37	21.55	0.1429
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@104	22.98	21.16	0.1306
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	50@25	22.08	20.26	0.1062
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.37	20.55	0.1135
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@104	21.95	20.13	0.1030
7	15	20	512000	2560	DFT-s-OFDM QPSK	50@25	22.78	20.96	0.1247
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	22.95	21.13	0.1297
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@104	23.03	21.21	0.1321
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	50@25	21.81	19.99	0.0998
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	21.92	20.1	0.1023
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@104	22	20.18	0.1042
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	64@32	23.2	21.38	0.1374
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@1	22.8	20.98	0.1253
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@131	23.32	21.5	0.1413
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	64@32	22.13	20.31	0.1074
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@1	21.89	20.07	0.1016



7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@131	22.32	20.5	0.1122
7	15	25	507000	2535	DFT-s-OFDM QPSK	64@32	23.1	21.28	0.1343
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@1	23.38	21.56	0.1432
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@131	22.94	21.12	0.1294
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	64@32	22.06	20.24	0.1057
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.36	20.54	0.1132
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@131	21.9	20.08	0.1019
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	64@32	22.77	20.95	0.1245
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@1	23.01	21.19	0.1315
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@131	23.07	21.25	0.1334
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	64@32	21.74	19.92	0.0982
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@1	22	20.18	0.1042
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@131	22	20.18	0.1042
7	15	30	503000	2515	DFT-s-OFDM QPSK	80@40	23.31	21.49	0.1409
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@1	22.88	21.06	0.1276
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@158	23.3	21.48	0.1406
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	80@40	22.25	20.43	0.1104
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@1	21.99	20.17	0.1040
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@158	22.29	20.47	0.1114
7	15	30	507000	2535	DFT-s-OFDM QPSK	80@40	23.14	21.32	0.1355
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@1	23.2	21.38	0.1374
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@158	22.85	21.03	0.1268
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	80@40	22.06	20.24	0.1057
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.44	20.62	0.1153
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@158	21.9	20.08	0.1019
7	15	30	511000	2555	DFT-s-OFDM QPSK	80@40	22.85	21.03	0.1268
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@1	23.11	21.29	0.1346
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@158	23.11	21.29	0.1346
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	80@40	21.79	19.97	0.0993
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@1	22.11	20.29	0.1069
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@158	22.01	20.19	0.1045
7	15	35	503500	2517.5	DFT-s-OFDM QPSK	90@45	23.28	21.46	0.1400
7	15	35	503500	2517.5	DFT-s-OFDM QPSK	1@1	22.98	21.16	0.1306
7	15	35	503500	2517.5	DFT-s-OFDM QPSK	1@186	23.2	21.38	0.1374
7	15	35	503500	2517.5	DFT-s-OFDM 16 QAM	90@45	22.28	20.46	0.1112
7	15	35	503500	2517.5	DFT-s-OFDM 16 QAM	1@1	21.95	20.13	0.1030
7	15	35	503500	2517.5	DFT-s-OFDM 16 QAM	1@186	22.19	20.37	0.1089
7	15	35	507000	2535	DFT-s-OFDM QPSK	90@45	23.1	21.28	0.1343
7	15	35	507000	2535	DFT-s-OFDM QPSK	1@1	23.36	21.54	0.1426
7	15	35	507000	2535	DFT-s-OFDM QPSK	1@186	22.88	21.06	0.1276
7	15	35	507000	2535	DFT-s-OFDM 16 QAM	90@45	22.12	20.3	0.1072
7	15	35	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.38	20.56	0.1138



7	15	35	507000	2535	DFT-s-OFDM 16 QAM	1@186	21.81	19.99	0.0998
7	15	35	501500	2552.5	DFT-s-OFDM QPSK	90@45	22.78	20.96	0.1247
7	15	35	501500	2552.5	DFT-s-OFDM QPSK	1@1	23.18	21.36	0.1368
7	15	35	501500	2552.5	DFT-s-OFDM QPSK	1@186	23.04	21.22	0.1324
7	15	35	501500	2552.5	DFT-s-OFDM 16 QAM	90@45	21.79	19.97	0.0993
7	15	35	501500	2552.5	DFT-s-OFDM 16 QAM	1@1	22.21	20.39	0.1094
7	15	35	501500	2552.5	DFT-s-OFDM 16 QAM	1@186	21.99	20.17	0.1040
7	15	40	504000	2520	DFT-s-OFDM QPSK	108@54	23.29	21.47	0.1403
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@1	22.95	21.13	0.1297
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@214	23.08	21.26	0.1337
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	108@54	22.28	20.46	0.1112
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@1	21.95	20.13	0.1030
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@214	22.03	20.21	0.1050
7	15	40	507000	2535	DFT-s-OFDM QPSK	108@54	23.09	21.27	0.1340
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@1	23.28	21.46	0.1400
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@214	22.9	21.08	0.1282
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	108@54	22.12	20.3	0.1072
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.32	20.5	0.1122
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@214	21.83	20.01	0.1002
7	15	40	510000	2550	DFT-s-OFDM QPSK	108@54	22.82	21	0.1259
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@1	23.24	21.42	0.1387
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@214	23.1	21.28	0.1343
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	108@54	21.81	19.99	0.0998
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@1	22.25	20.43	0.1104
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@214	21.98	20.16	0.1038
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	135@67	23.25	21.43	0.1390
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	1@1	22.7	20.88	0.1225
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	1@268	22.61	20.79	0.1199
7	15	50	505000	2525	DFT-s-OFDM QPSK	135@67	23.23	21.41	0.1384
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@1	22.94	21.12	0.1294
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@268	22.9	21.08	0.1282
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	135@67	22.21	20.39	0.1094
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@1	21.97	20.15	0.1035
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@268	21.8	19.98	0.0995
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	135@67	20.73	18.91	0.0778
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@1	20.11	18.29	0.0675
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@268	19.99	18.17	0.0656
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	135@67	18.71	16.89	0.0489
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@1	18.24	16.42	0.0439
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@268	18.07	16.25	0.0422
7	15	50	505000	2525	CP-OFDM QPSK	135@67	21.75	19.93	0.0984
7	15	50	505000	2525	CP-OFDM QPSK	1@1	21.35	19.53	0.0897



7	15	50	505000	2525	CP-OFDM QPSK	1@268	21.24	19.42	0.0875
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	135@67	23.07	21.25	0.1334
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.03	21.21	0.1321
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	1@268	22.6	20.78	0.1197
7	15	50	507000	2535	DFT-s-OFDM QPSK	135@67	23.09	21.27	0.1340
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@1	23.39	21.57	0.1435
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@268	22.85	21.03	0.1268
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	135@67	22.13	20.31	0.1074
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.23	20.41	0.1099
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@268	21.83	20.01	0.1002
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	135@67	20.6	18.78	0.0755
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@1	20.39	18.57	0.0719
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@268	20	18.18	0.0658
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	135@67	18.56	16.74	0.0472
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@1	18.49	16.67	0.0465
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@268	18.08	16.26	0.0423
7	15	50	507000	2535	CP-OFDM QPSK	135@67	21.61	19.79	0.0953
7	15	50	507000	2535	CP-OFDM QPSK	1@1	21.63	19.81	0.0957
7	15	50	507000	2535	CP-OFDM QPSK	1@268	21.21	19.39	0.0869
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	135@67	22.95	21.13	0.1297
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	1@1	23.07	21.25	0.1334
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	1@268	22.72	20.9	0.1230
7	15	50	509000	2545	DFT-s-OFDM QPSK	135@67	22.91	21.09	0.1285
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@1	23.37	21.55	0.1429
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@268	23.05	21.23	0.1327
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	135@67	21.97	20.15	0.1035
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@1	22.38	20.56	0.1138
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@268	21.93	20.11	0.1026
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	135@67	20.45	18.63	0.0729
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@1	20.52	18.7	0.0741
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@268	20.1	18.28	0.0673
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	135@67	18.42	16.6	0.0457
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@1	18.62	16.8	0.0479
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@268	18.17	16.35	0.0432
7	15	50	509000	2545	CP-OFDM QPSK	135@67	21.44	19.62	0.0916
7	15	50	509000	2545	CP-OFDM QPSK	1@1	21.78	19.96	0.0991
7	15	50	509000	2545	CP-OFDM QPSK	1@268	21.43	19.61	0.0914



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	18.6	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	15.2	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	15.6	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	17.3	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	13.8	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	15.4	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	19	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	16.6	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	18.6	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	10.6	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	11	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	10.7	PASS	50°C

|MAX(Δf)| =19.0 Hz

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - MAX(\Delta f) $	2500.489481	$\cong 2500$ MHz	PASS
$f_H + MAX(\Delta f) $	2568.391619	$\cong 2570$ MHz	



Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4597	4.809
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.473	4.834
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4842	4.798
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4658	4.81
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2719	9.742
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2629	9.752
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2725	9.723
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.2843	9.703
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.112	14.71
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.106	14.75
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.104	14.74
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.076	14.63
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.914	19.61
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.887	19.68
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.924	19.64
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.884	19.72
7	15	25	507000	2535.0	CP-OFDM QPSK	133@0	23.712	24.68
7	15	25	507000	2535.0	CP-OFDM 16 QAM	133@0	23.77	24.7
7	15	25	507000	2535.0	CP-OFDM 64 QAM	133@0	23.773	24.7
7	15	25	507000	2535.0	CP-OFDM 256 QAM	133@0	23.733	24.66
7	15	30	507000	2535.0	CP-OFDM QPSK	160@0	28.576	29.62
7	15	30	507000	2535.0	CP-OFDM 16 QAM	160@0	28.486	29.59
7	15	30	507000	2535.0	CP-OFDM 64 QAM	160@0	28.612	29.72
7	15	30	507000	2535.0	CP-OFDM 256 QAM	160@0	28.565	29.61
7	15	35	507000	2535.0	CP-OFDM QPSK	188@0	33.606	34.71
7	15	35	507000	2535.0	CP-OFDM 16 QAM	188@0	33.526	34.8
7	15	35	507000	2535.0	CP-OFDM 64 QAM	188@0	33.517	34.64
7	15	35	507000	2535.0	CP-OFDM 256 QAM	188@0	33.528	34.81
7	15	40	507000	2535.0	CP-OFDM QPSK	216@0	38.533	39.86
7	15	40	507000	2535.0	CP-OFDM 16 QAM	216@0	38.593	39.9
7	15	40	507000	2535.0	CP-OFDM 64 QAM	216@0	38.558	39.88
7	15	40	507000	2535.0	CP-OFDM 256 QAM	216@0	38.633	39.96
7	15	50	507000	2535.0	CP-OFDM QPSK	270@0	48.19	49.75
7	15	50	507000	2535.0	CP-OFDM 16 QAM	270@0	48.169	49.81
7	15	50	507000	2535.0	CP-OFDM 64 QAM	270@0	48.159	49.79
7	15	50	507000	2535.0	CP-OFDM 256 QAM	270@0	48.29	49.74




N7(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N7(5M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

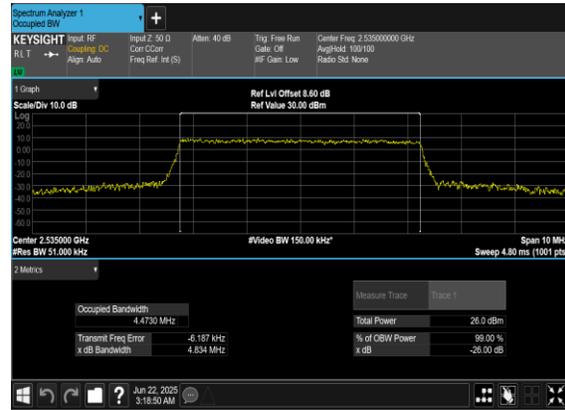

N7(5M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

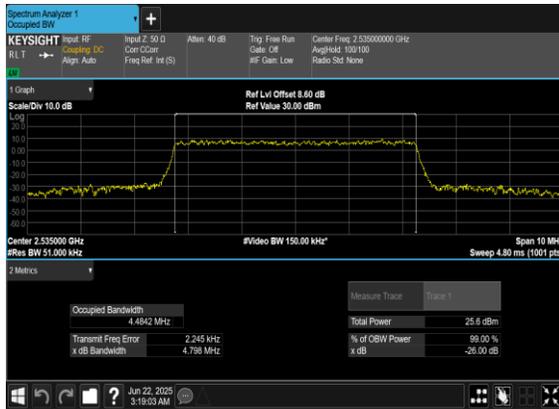

N7(5M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

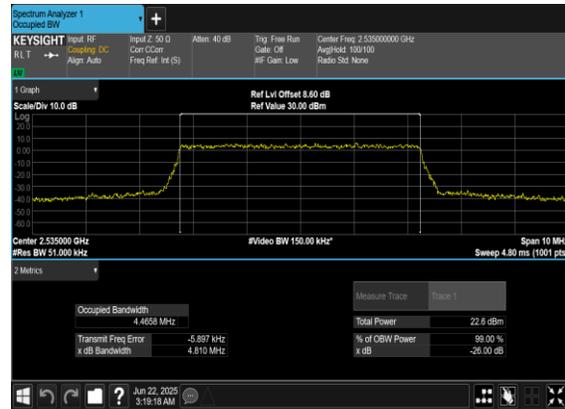





N7(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N7(10M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

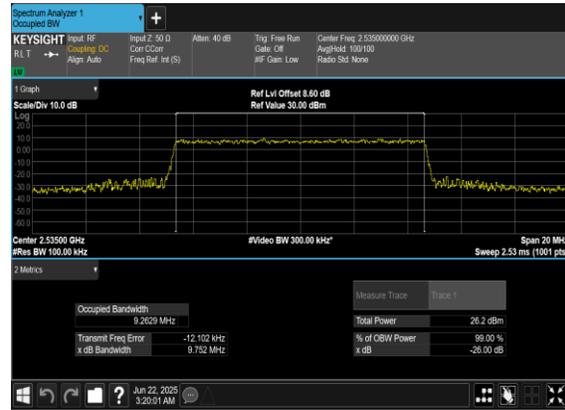

N7(10M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

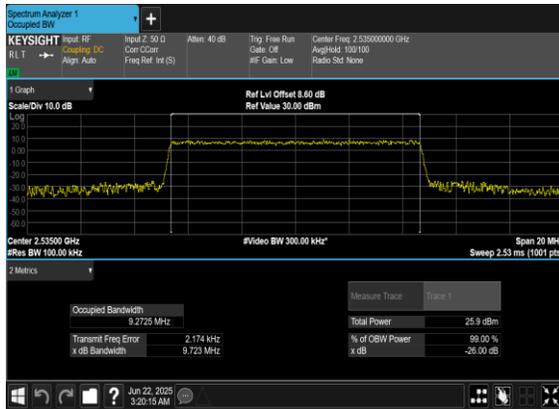


N7(10M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

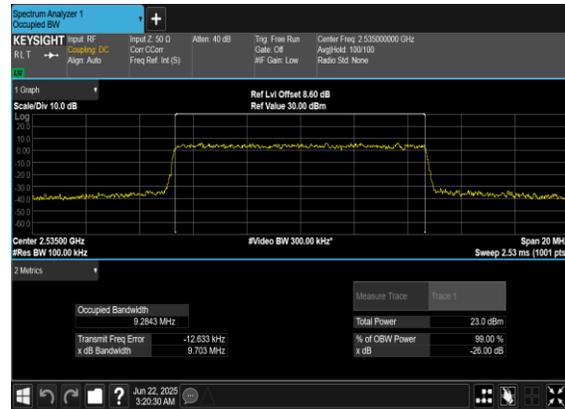





N7(15M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

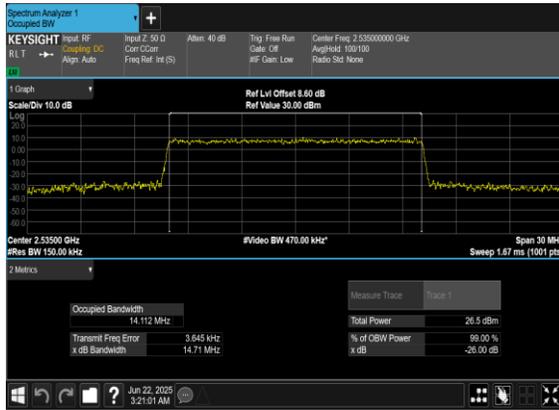


N7(15M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

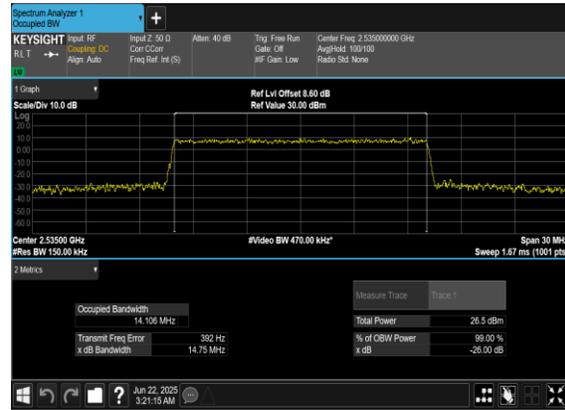

N7(15M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

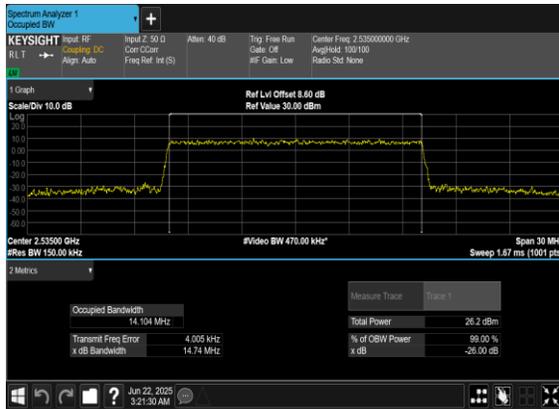

N7(15M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

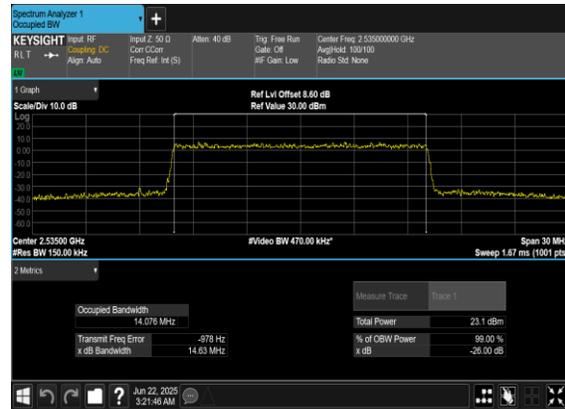





N7(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N7(20M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

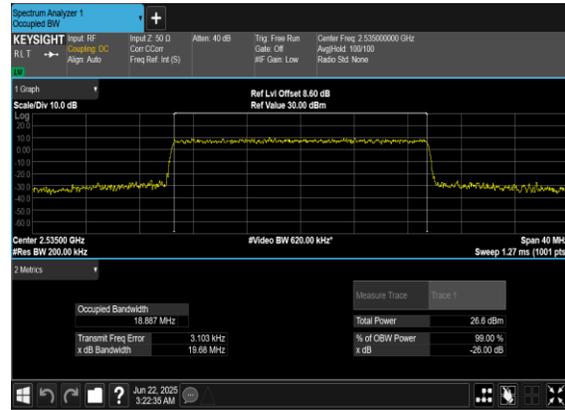

N7(20M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

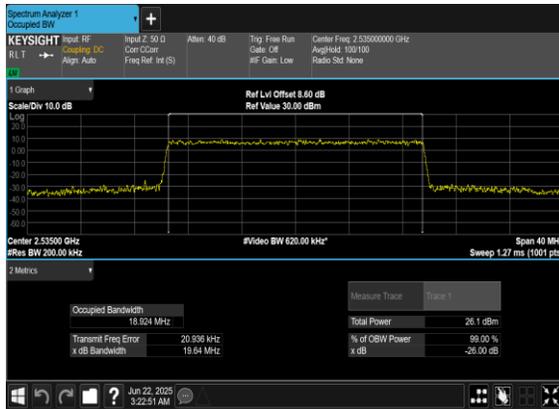


N7(20M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

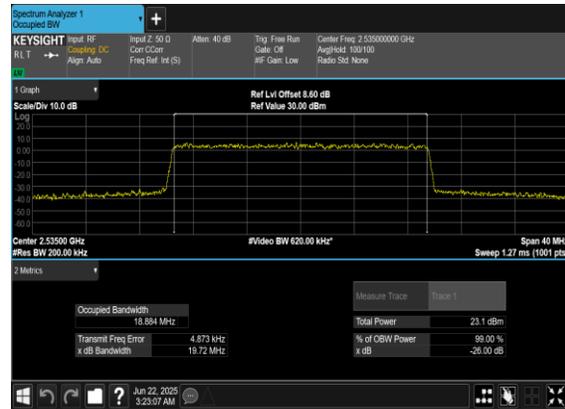




N7(25M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

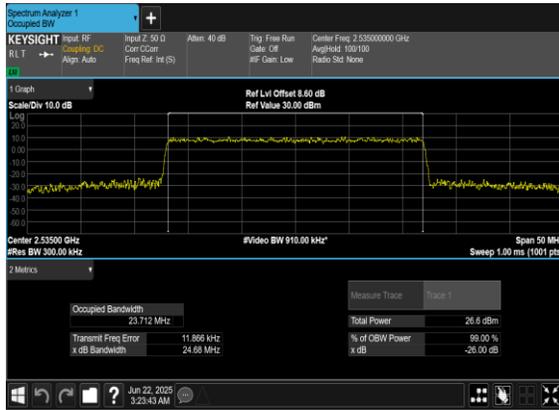

N7(25M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N7(25M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

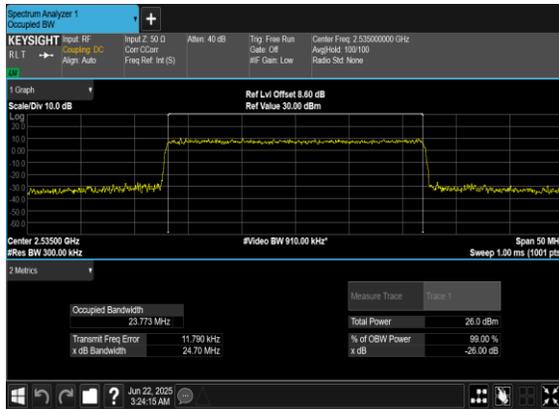


N7(25M)_CP-OFDM_256QAM_Outer_Full_Mid_CH







N7(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

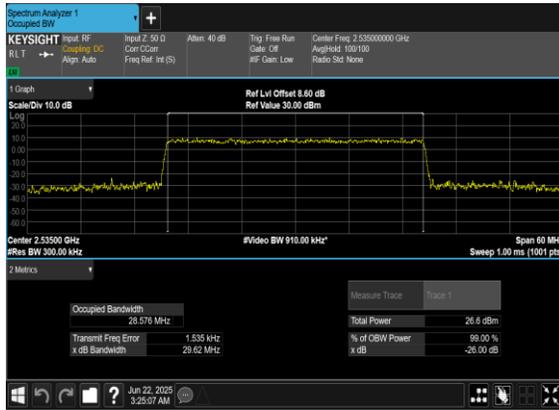


N7(30M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

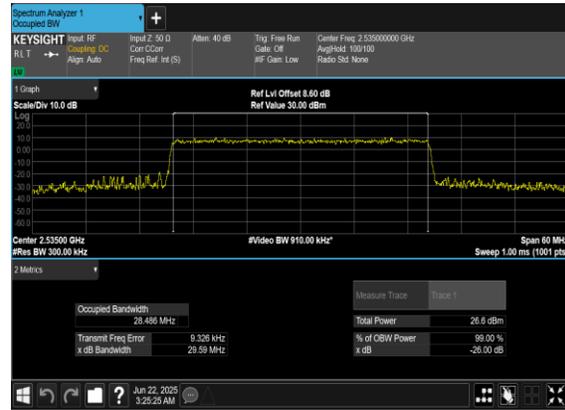

N7(30M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

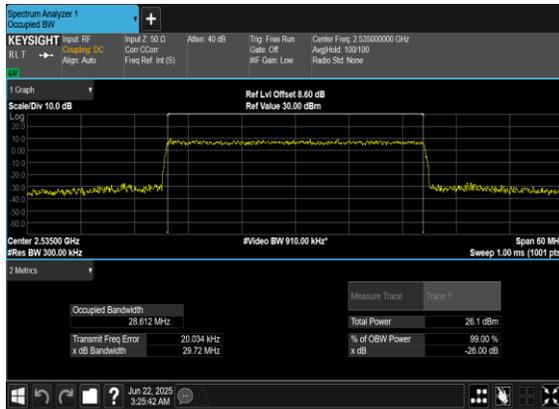


N7(30M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

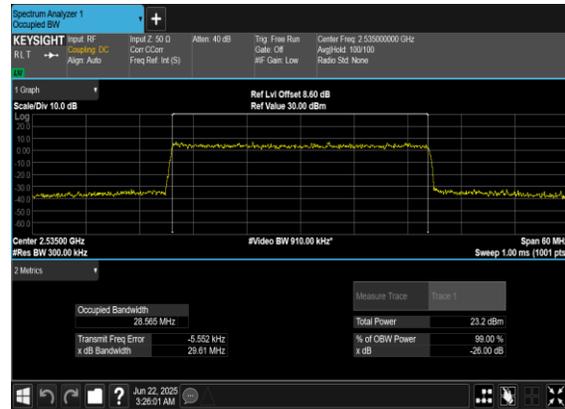




N7(35M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

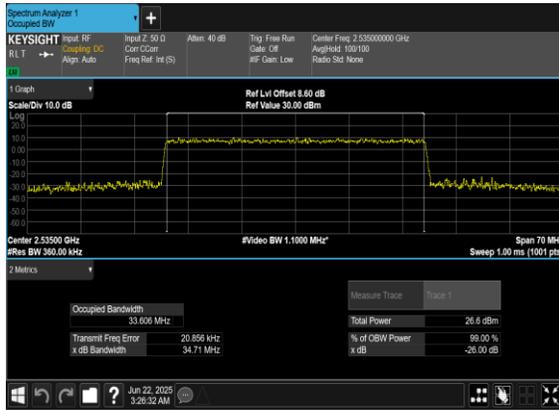


N7(35M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N7(35M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

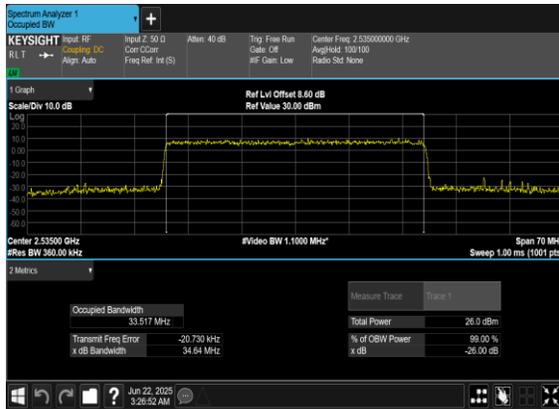


N7(35M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

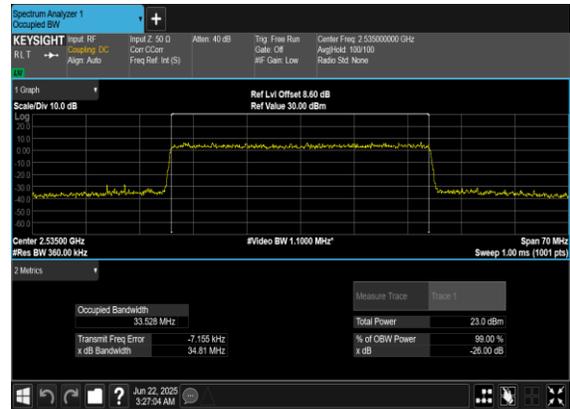



N7(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

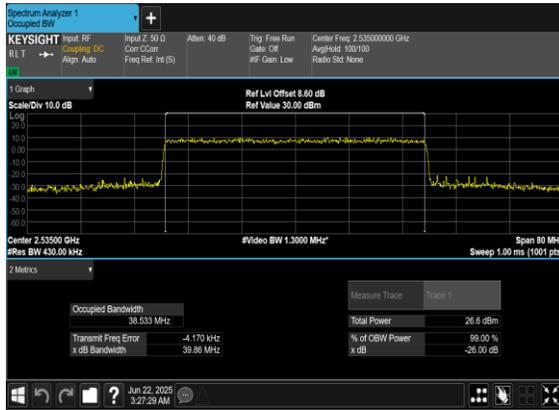


N7(40M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N7(40M)_CP-OFDM_64QAM_Outer_Full_Mid_CH




N7(40M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

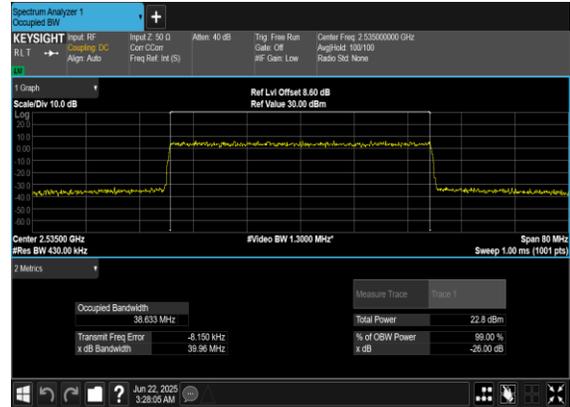





N7(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

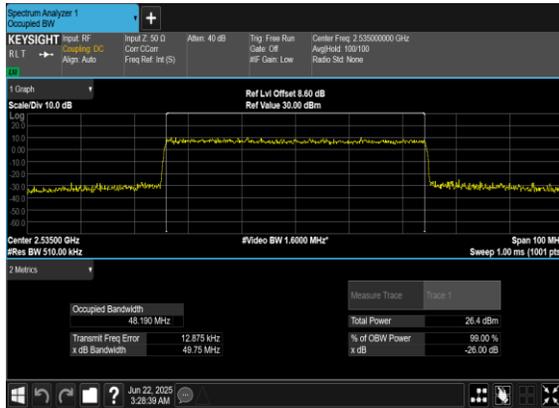


N7(50M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

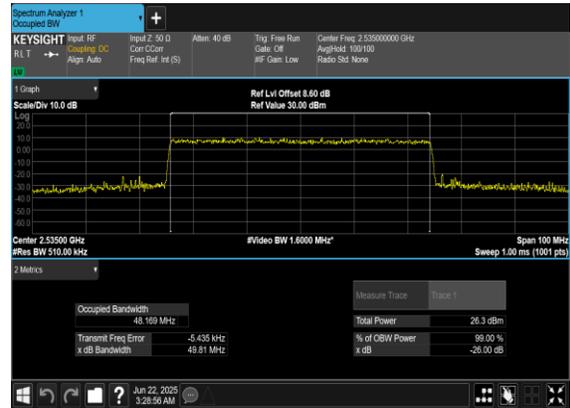

N7(50M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

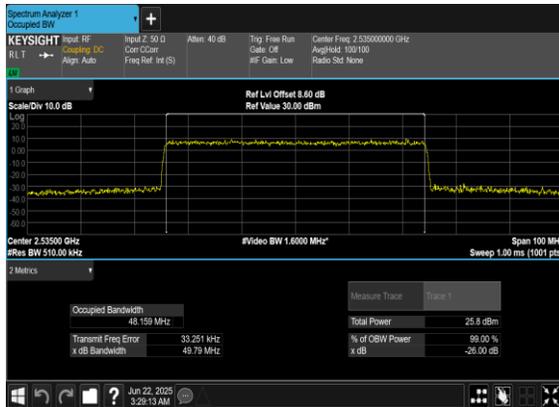

N7(50M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

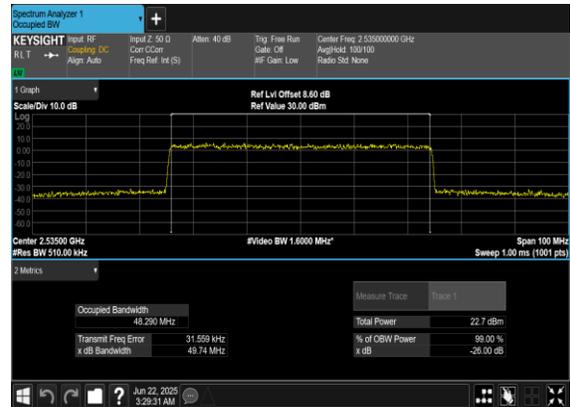



Conducted Spurious Emissions

Table with 9 columns: NR Band, SCS (kHz), Bandwidth (MHz), Arfcn, Freq (MHz), Modulation, RB, Result, Verdict. It contains 40 rows of test data with various parameters and outcomes like 'PASS' or '---'.




7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS



N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

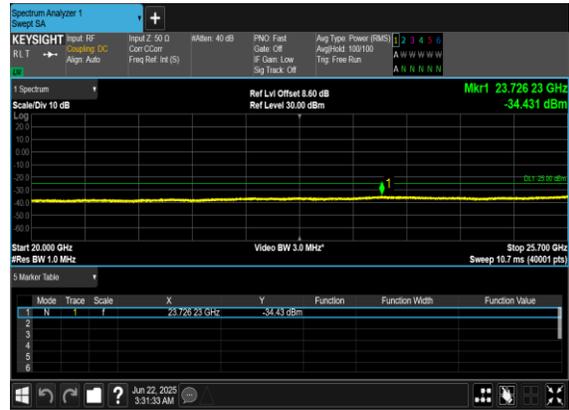

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

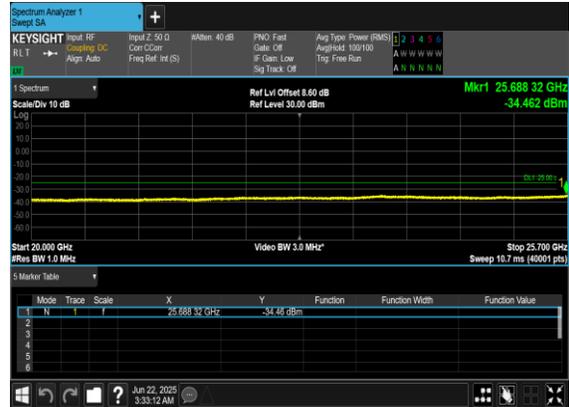




N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

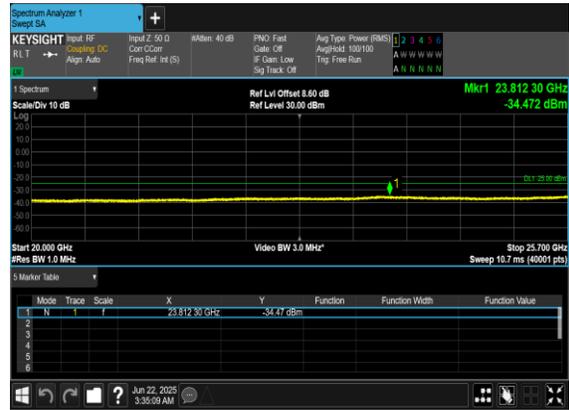

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

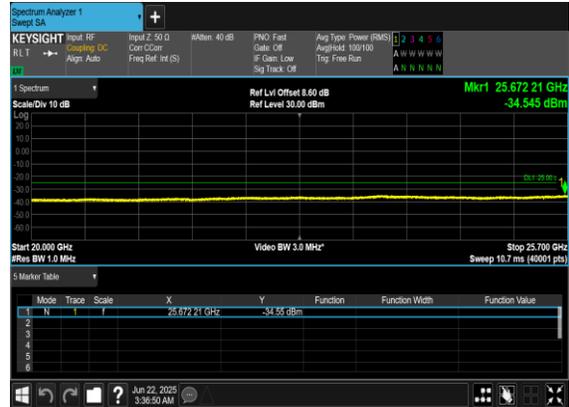





N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH



N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

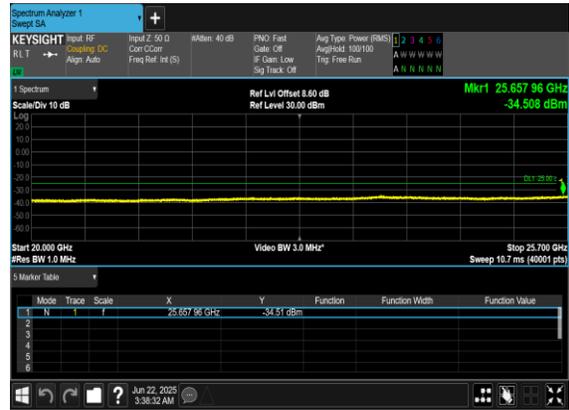

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

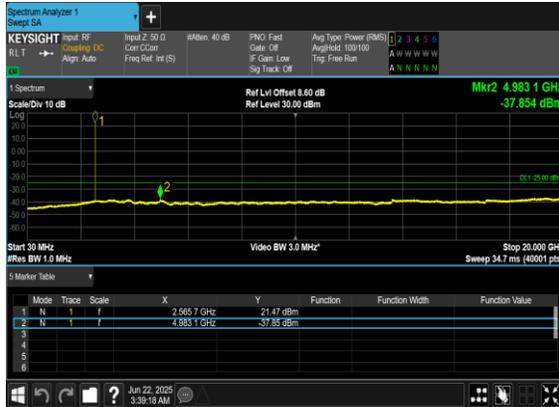

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH






N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH



N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

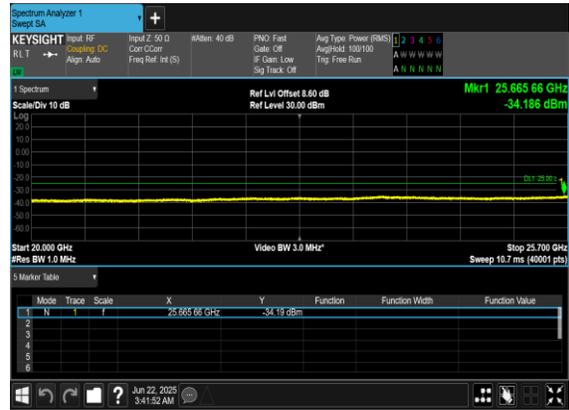

N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH





N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

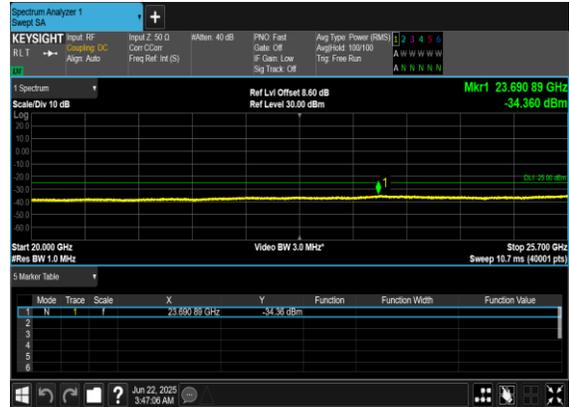



N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH




N7(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH



N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

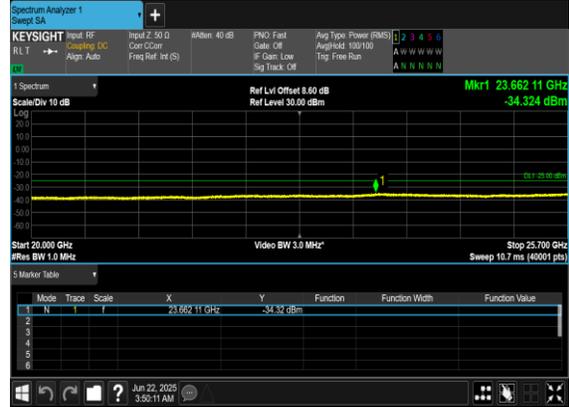



N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

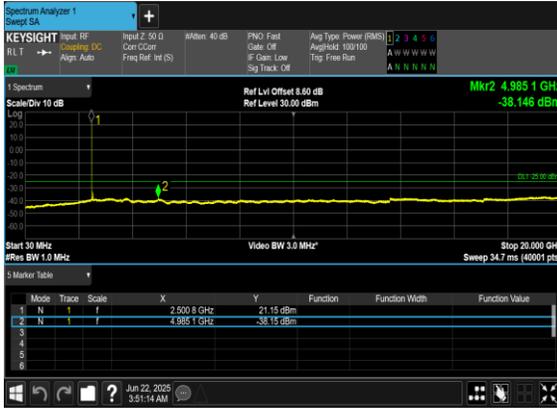


N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH



N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

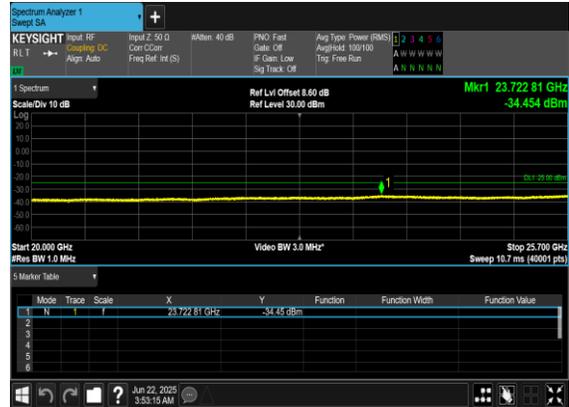




N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

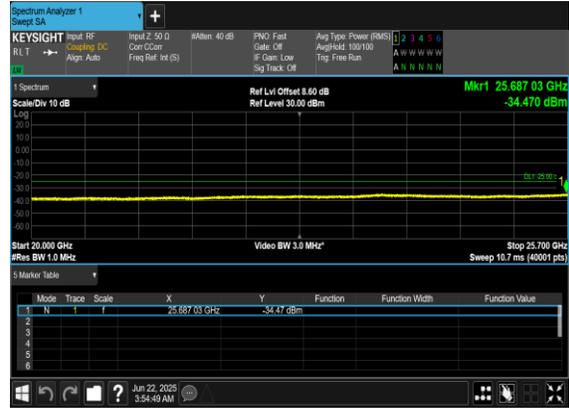

N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH






N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

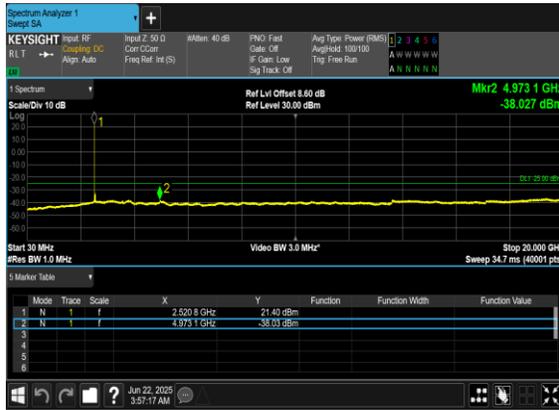

N7(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

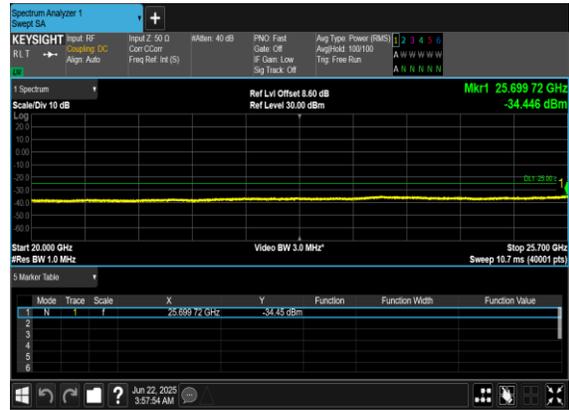

N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH





Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@132	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@269	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@269	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	270@0	see graph	PASS



N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

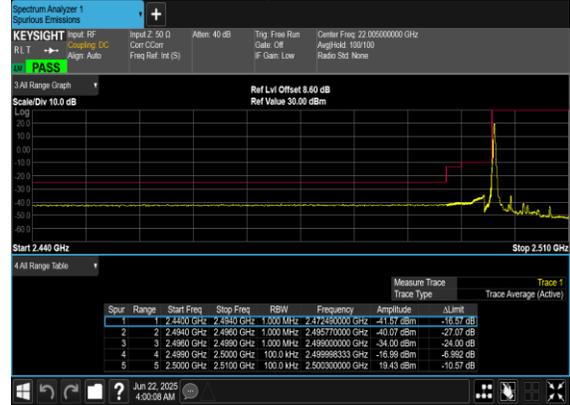

N7(5M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH




N7(5M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

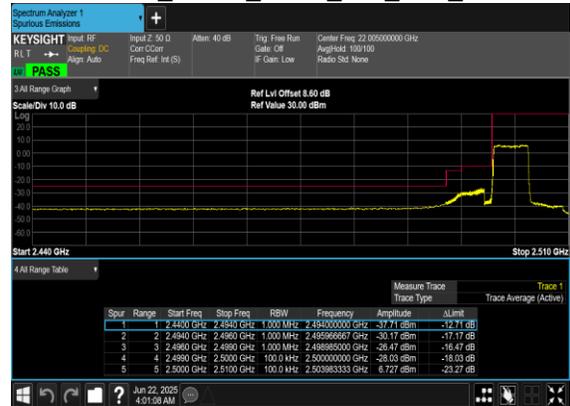





N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

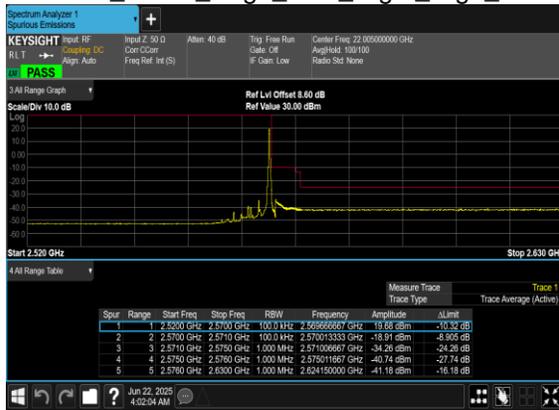

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

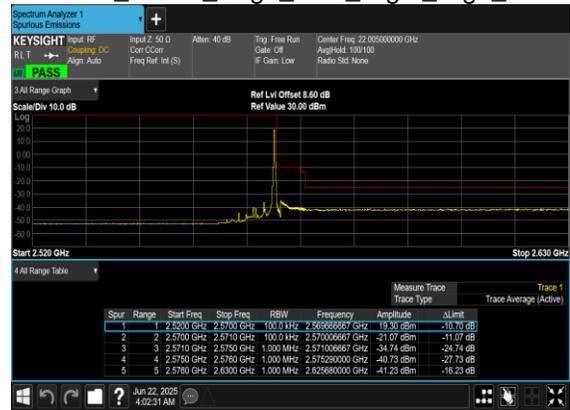

N7(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

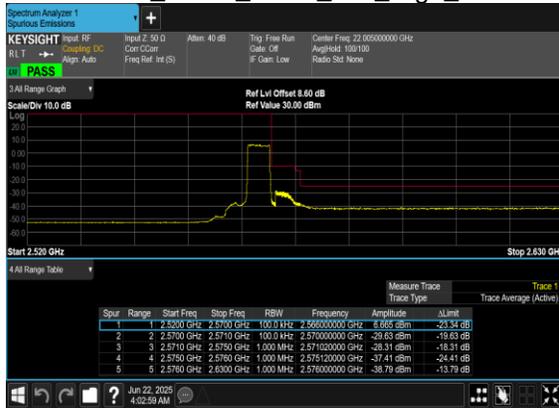

N7(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

