



FCC TEST REPORT

Test report
On Behalf of
Shenzhen Shibituo Technology Co., Ltd
For
Wireless Charger
Model No.: AM15CWC02
FCC ID: 2A5O4-AM15CWC02

Prepared for : Shenzhen Shibituo Technology Co., Ltd
7th Floor, Building 6, No. 41, Hongyin Road, Loucun Community, Xinhua Street,
Guangming District, Shenzhen, China

Prepared By : Shenzhen Tongzhou Testing Co., Ltd
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang
Street, Longhua, Shenzhen, China

Date of Test: 2022/3/11 ~ 2022/3/16

Date of Report: 2022/3/17

Report Number: TZ220303049-E1

The test report apply only to the specific sample(s) tested under stated test conditions
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Shibituo Technology Co., Ltd
Address : 7th Floor, Building 6, No. 41, Hongyin Road, Loucun Community,
Xinhu Street, Guangming District, Shenzhen, China
Manufacture's Name : Shenzhen Shibituo Technology Co., Ltd
Address : 7th Floor, Building 6, No. 41, Hongyin Road, Loucun Community,
Xinhu Street, Guangming District, Shenzhen, China
Product description
Trade Mark : AMONER
Product name : Wireless Charger
Model : AM15CWC02
Standards : FCC Rules and Regulations Part 15 Subpart C (Section 15.209),
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
Date (s) of performance of tests : 2022/3/11 ~ 2022/3/16
Date of Issue : 2022/3/17
Test Result : **Pass**

Testing Engineer : Nancy Li
(Nancy Li)

Technical Manager : Hugo Chen
(Hugo Chen)

Authorized Signatory : Andy Zhang
(Andy Zhang)



1. GENERAL INFORMATION

1.1 General Description of EUT

Equipment	Wireless Charger
Model Name	AM15CWC02
Model Difference	N/A
Test Model	AM15CWC02
Trade Mark	AMONER
FCC ID	2A5O4-AM15CWC02
Antenna Type	Coil Antenna
Antenna Gain	0dBi
Operation frequency	110– 205 kHz
Test Frequency	127 kHz
Modulation Type	ASK
Power Rating	Input: 5V $\overline{=}$ 2A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.67A, Output: 5W/7.5W/10W/15W(Wireless charger)
Test Sample ID	TZ220303049-1#

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.



2. SUMMARY OF TEST RESULTS

2.1 Test procedures according to the technical standards:

FCC KDB680106 D01 RF Exposure Wireless Charging Apps v03

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v03 (3)(3)	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	All emissions, radiated(<30M)(9KHz-30MHz)	$\pm 2.45\text{dB}$
2	Temperature	$\pm 0.5^\circ\text{C}$
3	Humidity	$\pm 2\%$



2.3 Test Instruments

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2021-08-08	2022-08-07
B-Field Probe	Narda	ELT-400	M-1154	2021-08-08	2022-08-07

NOTE: 1. The calibration interval of the above test instruments is 12 months.

2.4 Special Accessories

No.	Equipment	Manufacturer	Model
1	Wireless charger tester	YBZ	YBZ
2	AC adapter	Xiaomi	MDY-10-EH

2.5 Operation of EUT during testing

Test Modes:		
Mode 1	AC/DC Adapter (12V/1.5A) + EUT + Wireless charger tester (Load 15W)	Record
Mode 2	AC/DC Adapter (12V/1.5A) + EUT + Wireless charger tester (Load 10W)	Pre-test
Mode 3	AC/DC Adapter (12V/1.5A) + EUT + Wireless charger tester (Load 7.5W)	Pre-test
Mode 4	AC/DC Adapter (12V/1.5A) + EUT + Wireless charger tester (Load 5W)	Pre-test
Mode 5	AC/DC Adapter (9V/2A) + EUT + Wireless charger tester (Load 15W)	Pre-test
Mode 6	AC/DC Adapter (9V/2A) + EUT + Wireless charger tester (Load 10W)	Pre-test
Mode 7	AC/DC Adapter (9V/2A) + EUT + Wireless charger tester (Load 7.5W)	Pre-test
Mode 8	AC/DC Adapter (9V/2A) + EUT + Wireless charger tester (Load 5W)	Pre-test
Mode 9	AC/DC Adapter (5V/2A) + EUT + Wireless charger tester (Load 15W)	Pre-test
Mode 10	AC/DC Adapter (5V/2A) + EUT + Wireless charger tester (Load 10W)	Pre-test
Mode 11	AC/DC Adapter (5V/2A) + EUT + Wireless charger tester (Load 7.5W)	Pre-test
Mode 12	AC/DC Adapter (5V/2A) + EUT + Wireless charger tester (Load 5W)	Pre-test
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		



3. MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6
Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density


Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

4. TEST PROCEDURE

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device.

4.1 TEST SETUP

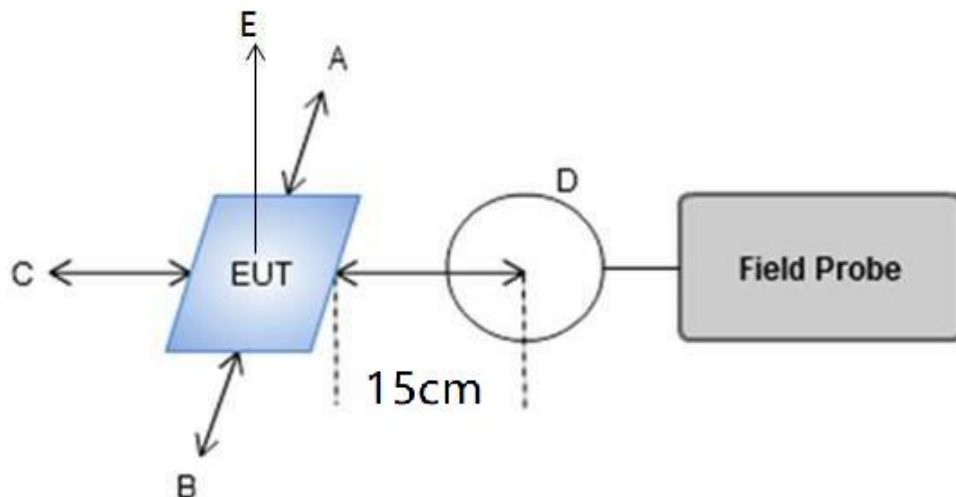

4.2 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE

Temperature	22.8°C	Humidity	55%
Test Engineer	Tony Luo	Configurations	Mode 1 - 4

E-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Test Mode	Power Load	Unit	Frequency Range(MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits(V/m)	FCC E-Field Strength Limits(V/m)
				Test	Test	Test	Test	Test		
				Position A	Position B	Position C	Position D	Position E		
1	15W	v/m	0.127	61.2248	72.3840	45.8432	39.5096	163.1656	307	614
2	10W	v/m	0.127	56.7008	66.6536	42.5256	38.9064	149.5936	307	614
3	7.5W	v/m	0.127	57.6056	54.8912	44.0336	38.9064	152.6096	307	614
4	5W	v/m	0.127	57.0024	53.9864	42.8272	35.8904	142.3552	307	614

Note: V/m= A/m *377



H-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Test Mode	Power Load	Unit	Frequency Range (MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits(V/m)	FCC E-Field Strength Limits(V/m)
				Test	Test	Test	Test	Test		
				Position A	Position B	Position C	Position D	Position E		
1	15W	uT	0.127	0.2030	0.2400	0.1520	0.1310	0.5410	--	--
	15W	A/m	0.127	0.1624	0.1920	0.1216	0.1048	0.4328	0.815	1.63
2	10W	uT	0.127	0.1880	0.2210	0.1410	0.1290	0.4960	--	--
	10W	A/m	0.127	0.1504	0.1768	0.1128	0.1032	0.3968	0.815	1.63
3	7.5W	uT	0.127	0.1910	0.1820	0.1460	0.1290	0.5060	--	--
	7.5W	A/m	0.127	0.1528	0.1456	0.1168	0.1032	0.4048	0.815	1.63
4	5W	uT	0.127	0.1890	0.1790	0.1420	0.1190	0.4720	--	--
	5W	A/m	0.127	0.1512	0.1432	0.1136	0.0952	0.3776	0.815	1.63

H-Field Strength at 20cm from the top surface of the EUT

Test Mode	Power Load	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
				Test Position E		
1	15W	uT	0.127	0.2400	--	--
	15W	A/m	0.127	0.1920	0.815	1.63
2	10W	uT	0.127	0.2230	--	--
	10W	A/m	0.127	0.1784	0.815	1.63
3	7.5W	uT	0.127	0.2190	--	--
	7.5W	A/m	0.127	0.1752	0.815	1.63
4	5W	uT	0.127	0.2240	--	--
	5W	A/m	0.127	0.1792	0.815	1.63

Note: A/m=uT/1.25



4.3 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110KHz~205KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power for each primary coil is 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes one primary coils and are able to detect and allow coupling only between individual pairs of coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

4.4 Conclusion

The detected emissions with a distance of 15cm surrounding the device and 20 cm above the top surface of the device are below the FCC E-Field Strength & H-Field Strength limits; and comply with the requirements of FCC KDB 680106 D01.

PHOTOGRAPH OF TEST



※※※※※THE END※※※※※