



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : TB571FU  
**FCC ID** : O57TB571FU  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : 15E 6 GHz Low Power Indoor Client (6XD)  
**TEST DATE(S)** : Jan. 01, 2025 ~ Feb. 23, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# Table of Contents

- 1 General Description ..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test ..... 5
  - 1.4 Product Specification of Equipment Under Test ..... 6
  - 1.5 Modification of EUT ..... 6
  - 1.6 Testing Location ..... 7
  - 1.7 Test Software ..... 7
  - 1.8 Applicable Standards ..... 7
- 2 Test Configuration of Equipment Under Test ..... 8**
  - 2.1 Carrier Frequency and Channel ..... 8
  - 2.2 Test Mode ..... 10
  - 2.3 Connection Diagram of Test System ..... 11
  - 2.4 Support Unit used in test configuration and system ..... 12
  - 2.5 EUT Operation Test Setup ..... 12
  - 2.6 Measurement Results Explanation Example ..... 13
- 3 Test Result ..... 14**
  - 3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14
  - 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement ..... 15
  - 3.3 Fundamental Power Spectral Density Measurement ..... 16
  - 3.4 In-Band Emissions (Channel Mask) ..... 18
  - 3.5 Contention Based Protocol ..... 20
  - 3.6 Unwanted Emissions Measurement ..... 29
  - 3.7 AC Conducted Emission Measurement ..... 33
  - 3.8 Antenna Requirements ..... 35
- 4 List of Measuring Equipment ..... 36**
- 5 Measurement Uncertainty ..... 37**
- Appendix A. Conducted Test Results**
- Appendix B. AC Conducted Emission Test Result**
- Appendix C. Radiated Spurious Emission**
- Appendix D. Duty Cycle Plots**
- Appendix E. Setup Photographs**





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(7)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(7)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(7)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 7.64 dB at 2483.500 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 3.73 dB at 13.197 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB571FU
FCC ID	O57TB571FU
SN Code	Conducted: HA25GXJ4 Conduction: HA24V60L Radiation: HA24VCE6 CBP: HA25GVEN
HW Version	TB571FU
SW Version	Lenovo ZUI 17.0
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
<b>Maximum EIRP</b>	<MIMO Ant.1+2> <5925 MHz ~ 7125 MHz > 802.11ax HE20 : 11.14 dBm / 0.0130 W 802.11ax HE40 : 14.13 dBm / 0.0259 W 802.11ax HE80 : 16.77 dBm / 0.0475 W
<b>99% Occupied Bandwidth</b>	802.11ax HE20 : 19.371 MHz 802.11ax HE40 : 37.905 MHz 802.11ax HE80 : 77.638 MHz
<b>Type of Modulation</b>	802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Frequency Band	Ant. Type	Maximum Single Antenna gain (dBi)		STBC DG (dBi)	
		ANT1	ANT2	For Power	For PSD
UNII-5	PIFA	-0.8	-1.9	-0.8	-0.8
UNII-6	PIFA	-0.1	-1.7	-0.1	-0.1
UNII-7	PIFA	-0.1	-1.6	-0.1	-0.1
UNII-8	PIFA	-0.3	-1.9	-0.3	-0.3

**Remark:**

1. WLAN 11ax only support MIMO STBC mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal conducted power.
3. The EUT does not support channel puncturing mode
4. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
5. The device does not support UNII-8 CH233 (BW=20M, Center Frequency = 7115MHz).
6. The device does not support UNII-5 CH2 (BW=20M, Center Frequency = 5935MHz).
7. CBP test with antenna path of minimum gain (Minimum gain= -1.9 dBi) refer to Antenna report.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS TH01-KS DFS01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	-	1	5	9	13	17	21	25	29	
	Freq. (MHz)	-	5955	5975	5995	6015	6035	6055	6075	6095	
BW 40M	Channel	3			11		19		27		
	Freq. (MHz)	5965			6005		6045		6085		
BW 80M	Channel	7					23				
	Freq. (MHz)	5985					6065				

BW 20M	Channel	33	37	41	45	49	53	57	61	
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255	
BW 40M	Channel	35		43		51		59		
	Freq. (MHz)	6125		6165		6205		6245		
BW 80M	Channel	39				55				
	Freq. (MHz)	6145				6225				

BW 20M	Channel	65	69	73	77	81	85	89	93	
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415	
BW 40M	Channel	67		75		83		91		
	Freq. (MHz)	6285		6325		6365		6405		
BW 80M	Channel	71				87				
	Freq. (MHz)	6305				6385				



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 20M	Channel	225		229		-			
	Freq. (MHz)	7075		7095		-			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : BT Link+ WLAN Link(6E)+ USB Cable(Charging from Adapter)
<b>Remark:</b> For Radiated Test Cases, the tests were performed with Adapter, Earphone and USB Cable.	

RSE Co-location
Bluetooth-LE_GSKF CH39 2480 2Mbps + 802.11ax HE20 CH229 7095MHz

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185


Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	-	183


**Remark:** For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

### 2.3 Connection Diagram of Test System

AC Conducted Emission:

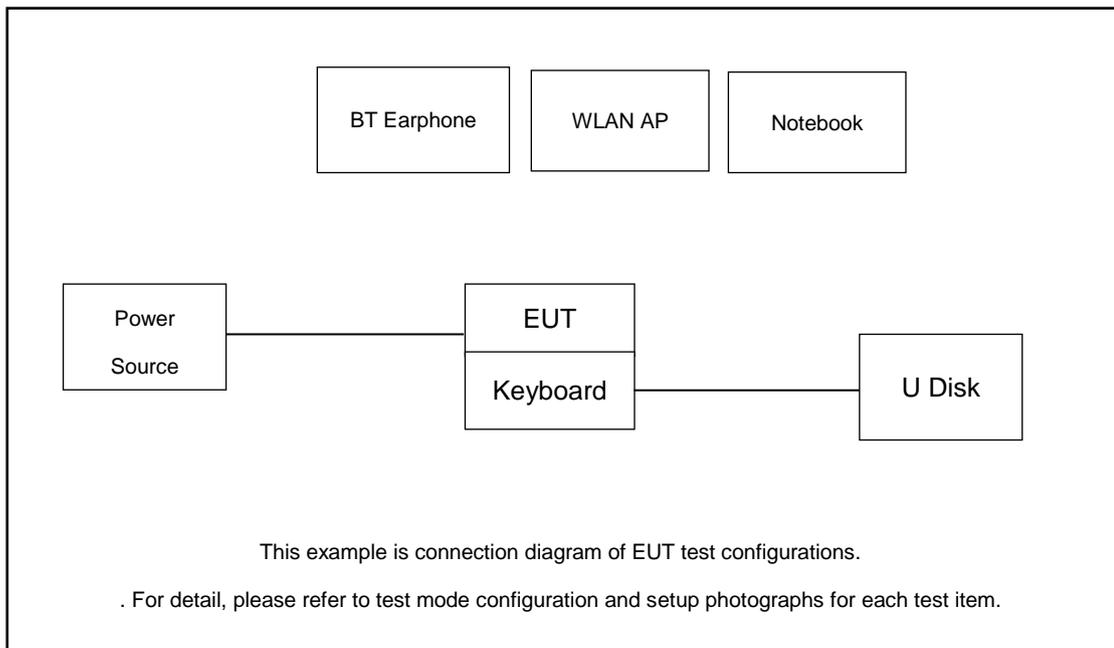

Radiated Emission:

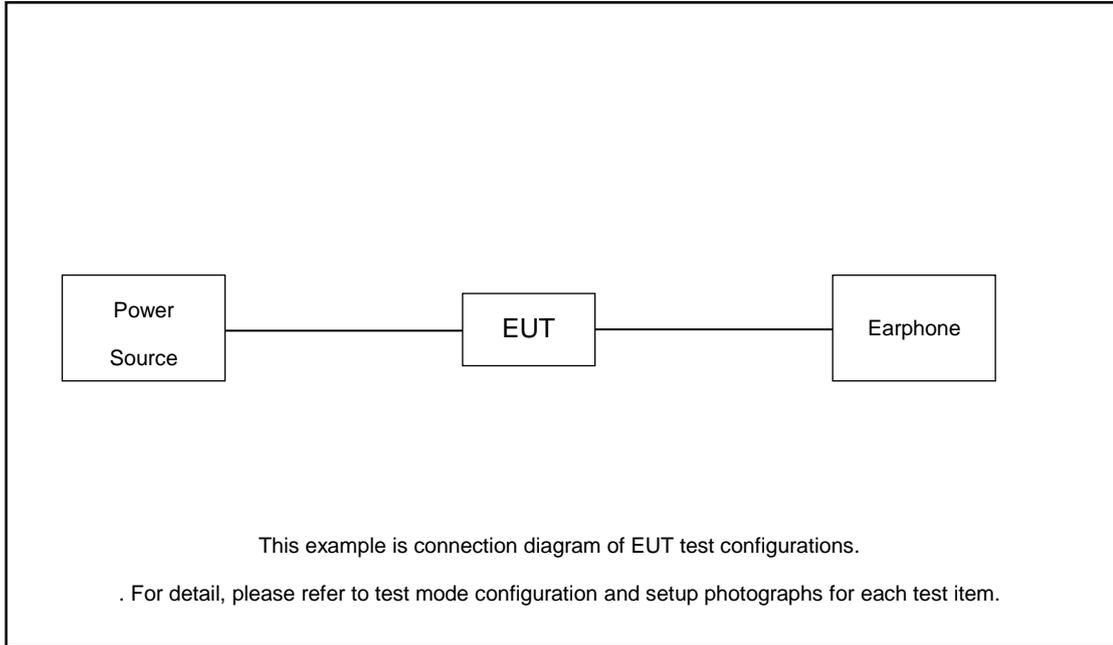

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Router	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Earphone	N/A	N/A	N/A	N/A	N/A
5.	U disk	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.59 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.59 + 20 = 25.59 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

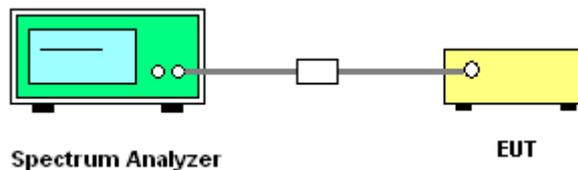

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

### 3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

### 3.2.4 Test Setup

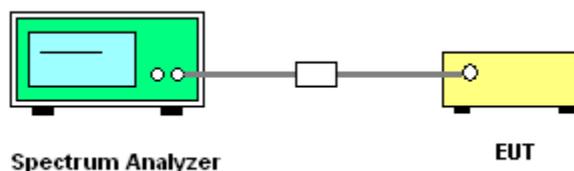

### 3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



### 3.3 Fundamental Power Spectral Density Measurement

#### 3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed  $-1$  dBm e.i.r.p. in any 1-megahertz band.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

### 3.3.4 Test Setup

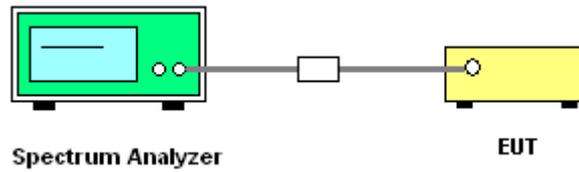

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



## 3.4 In-Band Emissions (Channel Mask)

### 3.4.1 Limit of Unwanted Emissions

#### <FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### 3.4.4 Test Setup

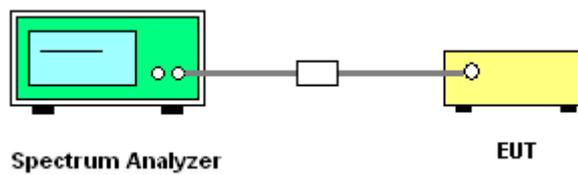

### 3.4.5 Test Result

Please refer to Appendix A.



### 3.5 Contention Based Protocol

#### 3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

**Table 1. Criteria to determine number of times detection threshold test may be performed**

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ( $f_{c1} = f_{c2}$ )
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within $BW_{EUT}$
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within $BW_{EUT}$	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

$BW_{EUT}$ : Transmission bandwidth of EUT signal

$BW_{Inc}$ : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

$f_{c1}$ : Center frequency of EUT transmission

$f_{c2}$ : Center frequency of simulated incumbent signal

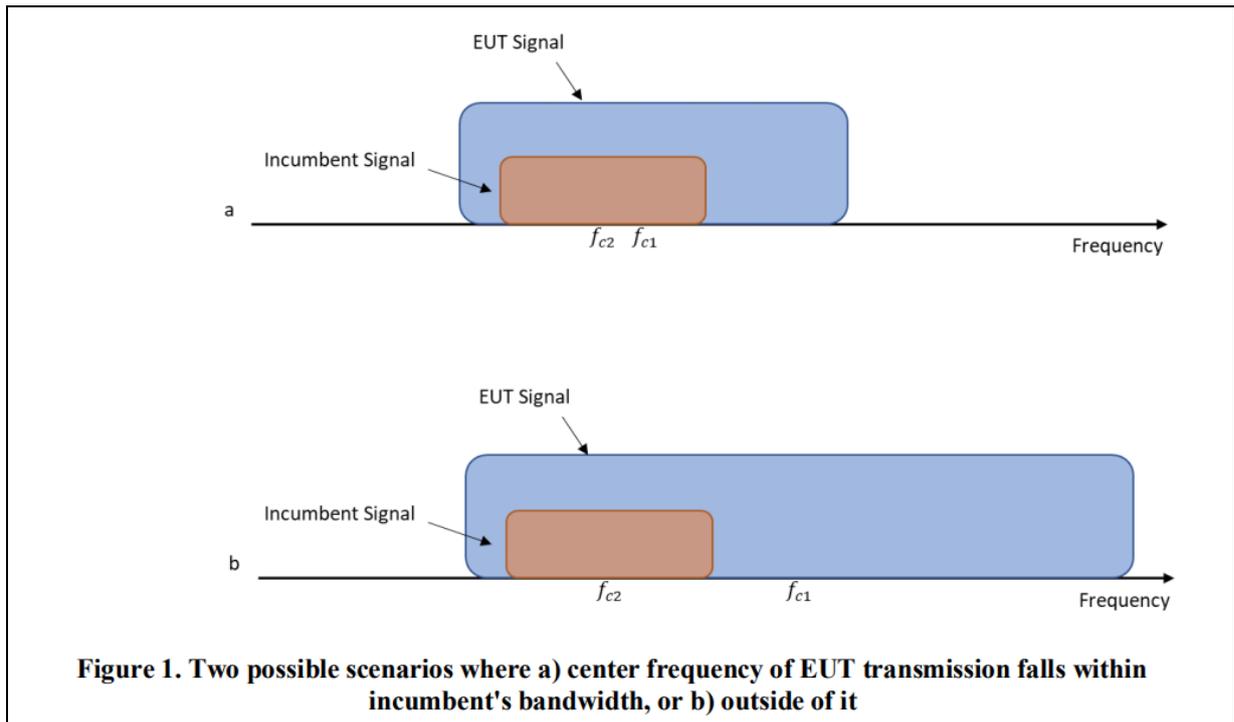

### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency  $f_{c2}$ ) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

### 3.5.4 Test Setup

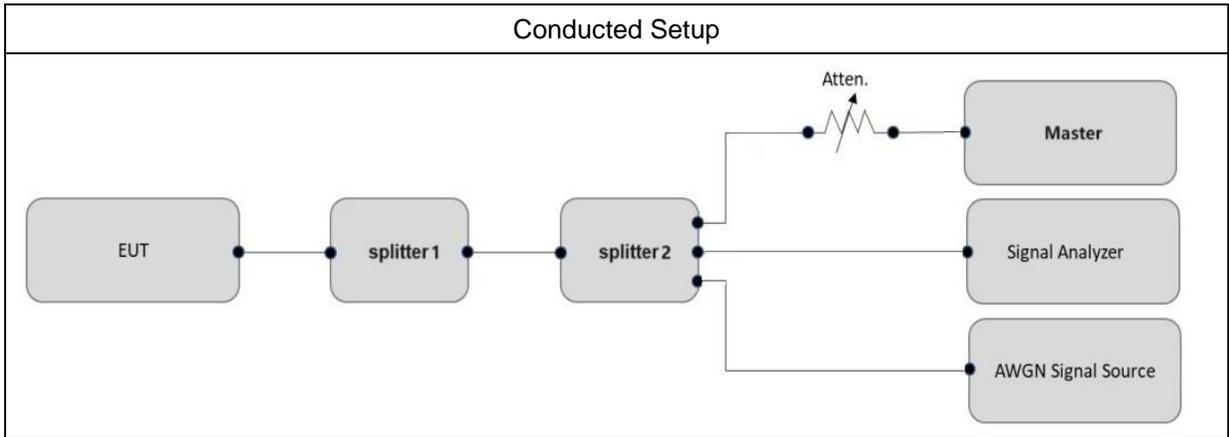

### 3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5182B/5182BX07	9KHz~7.2GHz
Spectrum Analyzer	R&S	FSV40	10kHz~40GHz
Terminal (NB Server)	DELL	P78G	LAN
Combiner (splitter1)	Tojoin	N/A	2G~8GHz
Combiner (splitter2)	MTJ Cooperation	MTJ7144-M	0.5GHz~18GHz
Attenuator	Keysight	8494B	0-110dBm
WLAN AP	ASUS	GT-AXE11000	Dual Band AP



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 5	6135	20	6135	-66.53	100	-62	-64.63	2.63		
				Result: Stop Transmission						
				-67.53	< 90	-62	-65.63	3.63		
				Result: Minimal Operation						
				-68.07	0	-62	-66.17	4.17		
				Result: Normal Operation						
	6145	80	6110	-65.02	100	-62	-63.12	1.12		
				Result: Stop Transmission						
				-66.02	< 90	-62	-64.12	2.12		
				Result: Minimal Operation						
				-66.49	0	-62	-64.59	2.59		
				Result: Normal Operation						
			6145	80	6145	-65.82	100	-62	-63.92	1.92
						Result: Stop Transmission				
						-66.82	< 90	-62	-64.92	2.92
						Result: Minimal Operation				
						-67.33	0	-62	-65.43	3.43
						Result: Normal Operation				
6180	80	6180	-64.94 <b>(worst)</b>	100	-62	-63.04	1.04			
			Result: Stop Transmission							
			-65.94	< 90	-62	-64.04	2.04			
			Result: Minimal Operation							
-					0	-62	-65.58	3.58		
-					Result: Normal Operation					

**Note 1:** Adjusted Power = Injected AWGN Level - minimum antenna gain (gain = -1.9dBi)

**Note 2:** Path Loss between antenna and RF connector is negligible. (0 dB)

**Note 3:** Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 6	6455	20	6455	-69.18	100	-62	-67.28	5.28		
				Result: Stop Transmission						
				-70.18	< 90	-62	-68.28	6.28		
				Result: Minimal Operation						
				-70.23	0	-62	-68.33	6.33		
				Result: Normal Operation						
	6465	80	6430	-65.57	100	-62	-63.67	1.67		
				Result: Stop Transmission						
				-66.57	< 90	-62	-64.67	2.67		
				Result: Minimal Operation						
				-67.61	0	-62	-65.71	3.71		
				Result: Normal Operation						
			6465	80	6465	-65.38	100	-62	-63.48	1.48
						Result: Stop Transmission				
						-66.38	< 90	-62	-64.48	2.48
						Result: Minimal Operation				
						-68.95	0	-62	-67.05	5.05
						Result: Normal Operation				
	6500	80	6500	-65.06	100	-62	-63.16	1.16		
				Result: Stop Transmission						
				-66.06	< 90	-62	-64.16	2.16		
				Result: Minimal Operation						
				-66.20	0	-62	-64.3	2.3		
				Result: Normal Operation						

**Note 1:** Adjusted Power = Injected AWGN Level - minimum antenna gain (gain = -1.9dBi)

**Note 2:** Path Loss between antenna and RF connector is negligible. (0 dB)

**Note 3:** Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 7	6695	20	6695	-65.52	100	-62	-63.62	1.62		
				Result: Stop Transmission						
				-66.52	< 90	-62	-64.62	2.62		
				Result: Minimal Operation						
				-67.54	0	-62	-65.64	3.64		
				Result: Normal Operation						
	6705	80	6670	-65.13	100	-62	-63.23	1.23		
				Result: Stop Transmission						
				-66.13	< 90	-62	-64.23	2.23		
				Result: Minimal Operation						
				-67.16	0	-62	-65.26	3.26		
				Result: Normal Operation						
			6705	80	6705	-64.98	100	-62	-63.08	1.08
						Result: Stop Transmission				
						-65.98	< 90	-62	-64.08	2.08
						Result: Minimal Operation				
						-66.94	0	-62	-65.04	3.04
						Result: Normal Operation				
	6740	80	6740	-65.67	100	-62	-63.77	1.77		
				Result: Stop Transmission						
				-66.67	< 90	-62	-64.77	2.77		
				Result: Minimal Operation						
				-67.69	0	-62	-65.79	3.79		
				Result: Normal Operation						

**Note 1:** Adjusted Power = Injected AWGN Level - minimum antenna gain (gain = -1.9dBi)

**Note 2:** Path Loss between antenna and RF connector is negligible. (0 dB)

**Note 3:** Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 8	7015	20	7015	-66.80	100	-62	-64.9	2.9		
				Result: Stop Transmission						
				-67.80	< 90	-62	-65.9	3.9		
				Result: Minimal Operation						
				-68.85	0	-62	-66.95	4.95		
				Result: Normal Operation						
	7025	80	6990	7025	-65.29	100	-62	-63.39	1.39	
					Result: Stop Transmission					
					-66.29	< 90	-62	-64.39	2.39	
					Result: Minimal Operation					
					-66.82	0	-62	-64.92	2.92	
					Result: Normal Operation					
			7060	7025	7060	-65.18	100	-62	-63.28	1.28
						Result: Stop Transmission				
						-66.18	< 90	-62	-64.28	2.28
						Result: Minimal Operation				
						-67.67	0	-62	-65.77	3.77
						Result: Normal Operation				
			7060	7060	7060	-65.05	100	-62	-63.15	1.15
						Result: Stop Transmission				
						-66.05	< 90	-62	-64.15	2.15
						Result: Minimal Operation				
						-67.09	0	-62	-65.19	3.19
						Result: Normal Operation				

**Note 1:** Adjusted Power = Injected AWGN Level - minimum antenna gain (gain = -1.9dBi)

**Note 2:** Path Loss between antenna and RF connector is negligible. (0 dB)

**Note 3:** Margin = Regulated Threshold level - Adjusted Power




3.5.7 Worst Case Plots of Contention Based Protocol

Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE80) / 6180MHz (Upper edge)  
Threshold Level (TL) = -64.94 dBm


802.11ax (HE80) / CH39 (Upper edge)

Test result is pass due to no transmission occur.

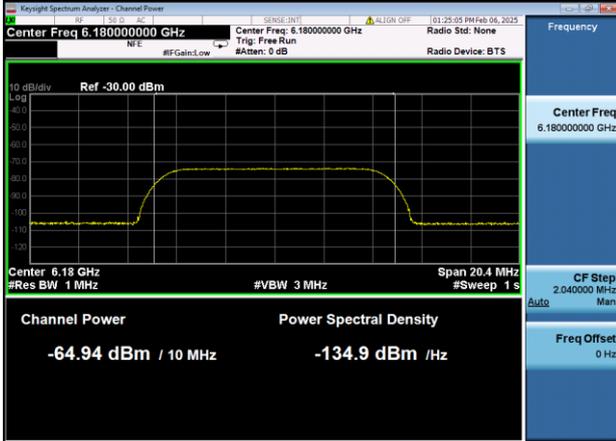

802.11ax (HE80) / CH39 (Upper edge)

Transmit when the interferer is 1dB lower.

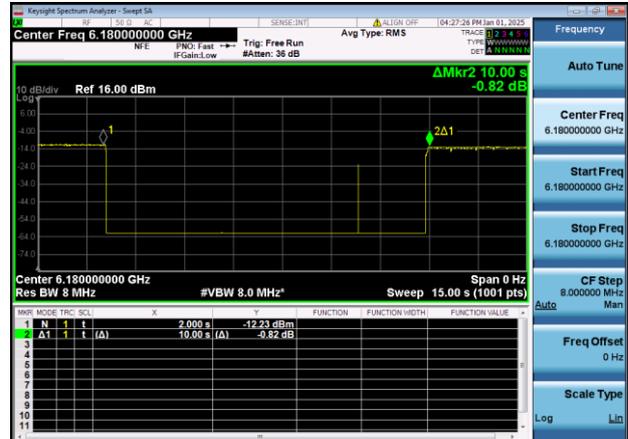




### 3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 20MHz;
2. When Incumbent Signal inject at middle frequency, the whole 80MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 40MHz;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

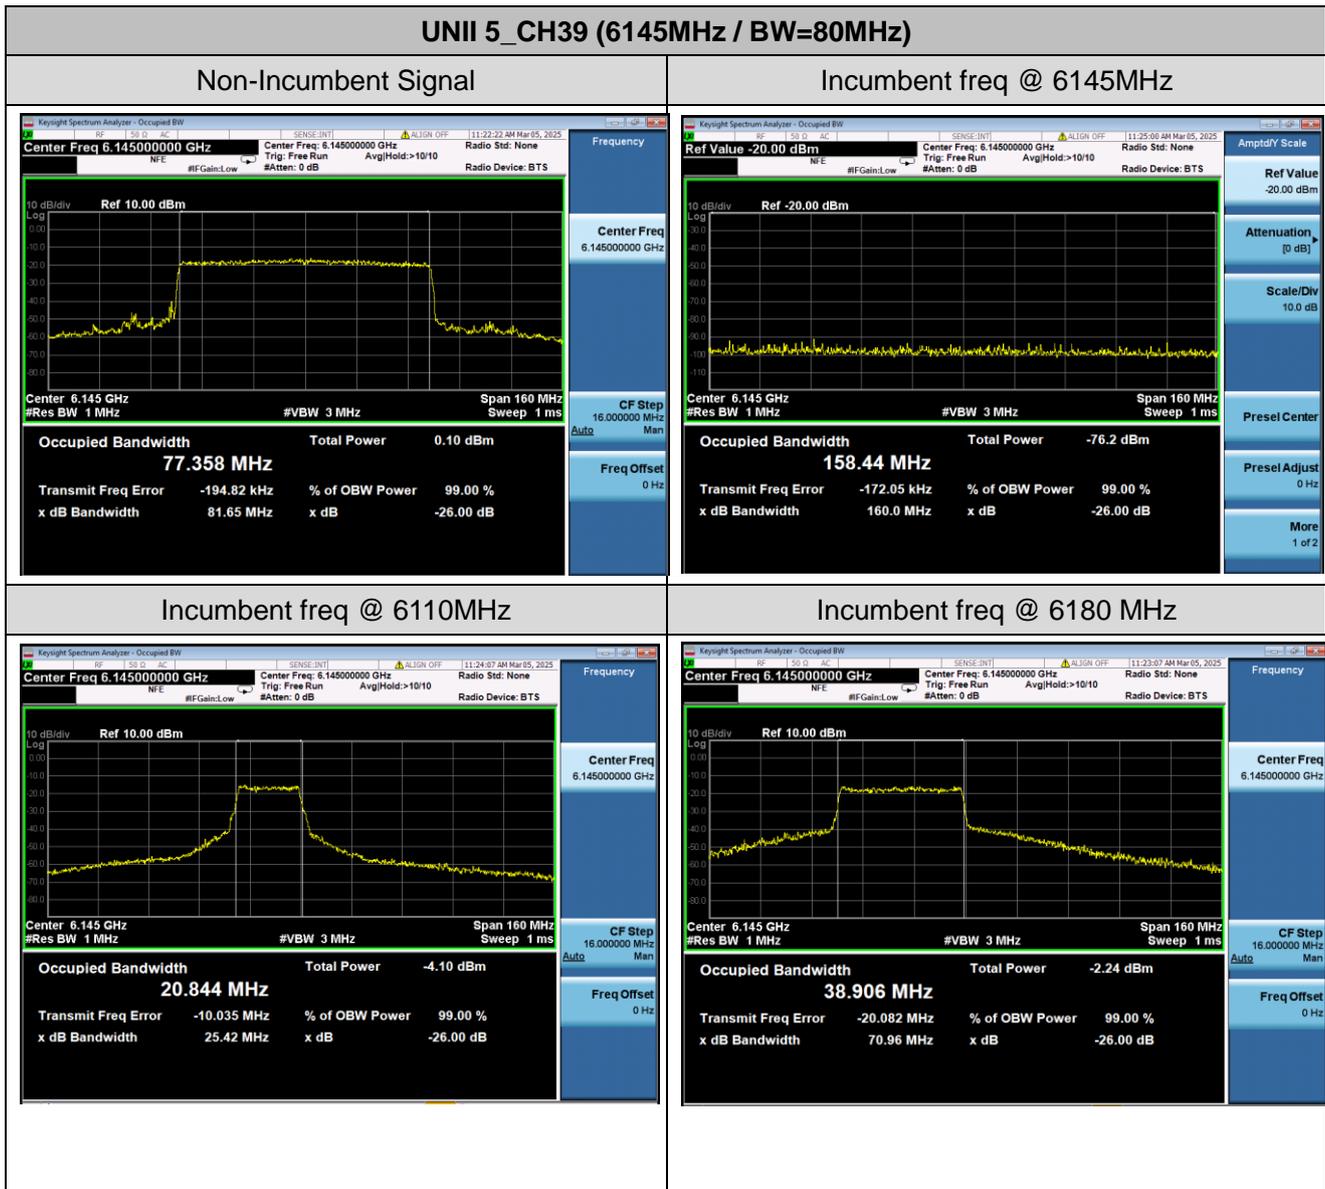



### 3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

#### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.




### 3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.6.4 Test Setup


For radiated emissions below 30MHz

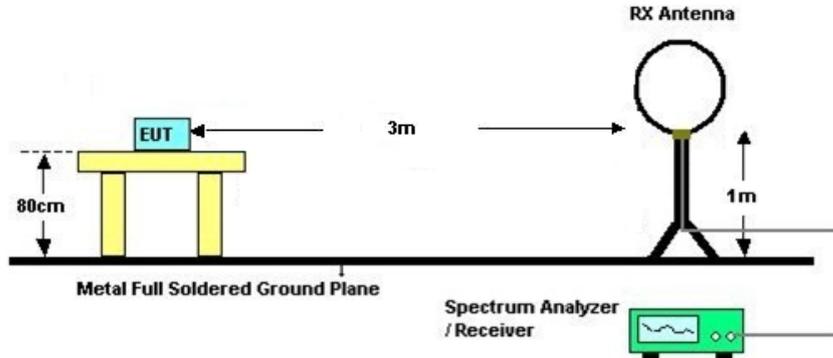

For radiated emissions from 30MHz to 1GHz

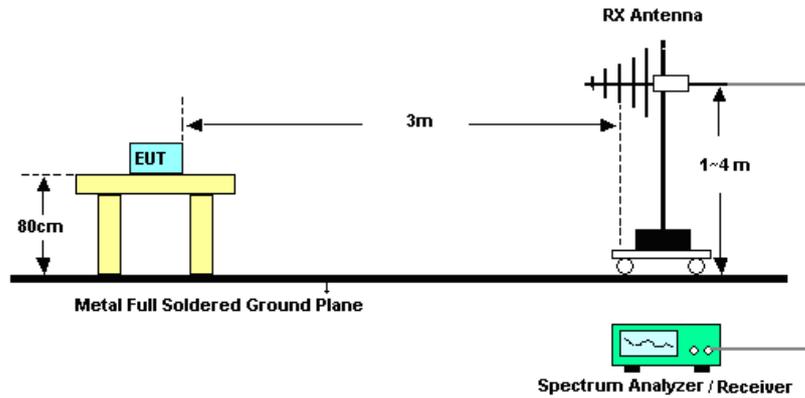

For radiated emissions above 1GHz

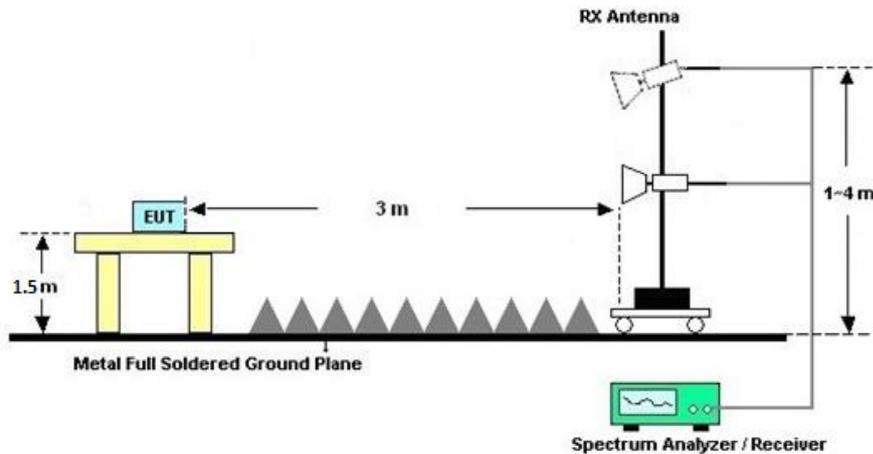



### **3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### **3.6.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C

### **3.6.7 Duty Cycle**

Please refer to Appendix D.

### **3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.



### 3.7 AC Conducted Emission Measurement

#### 3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.7.4 Test Setup

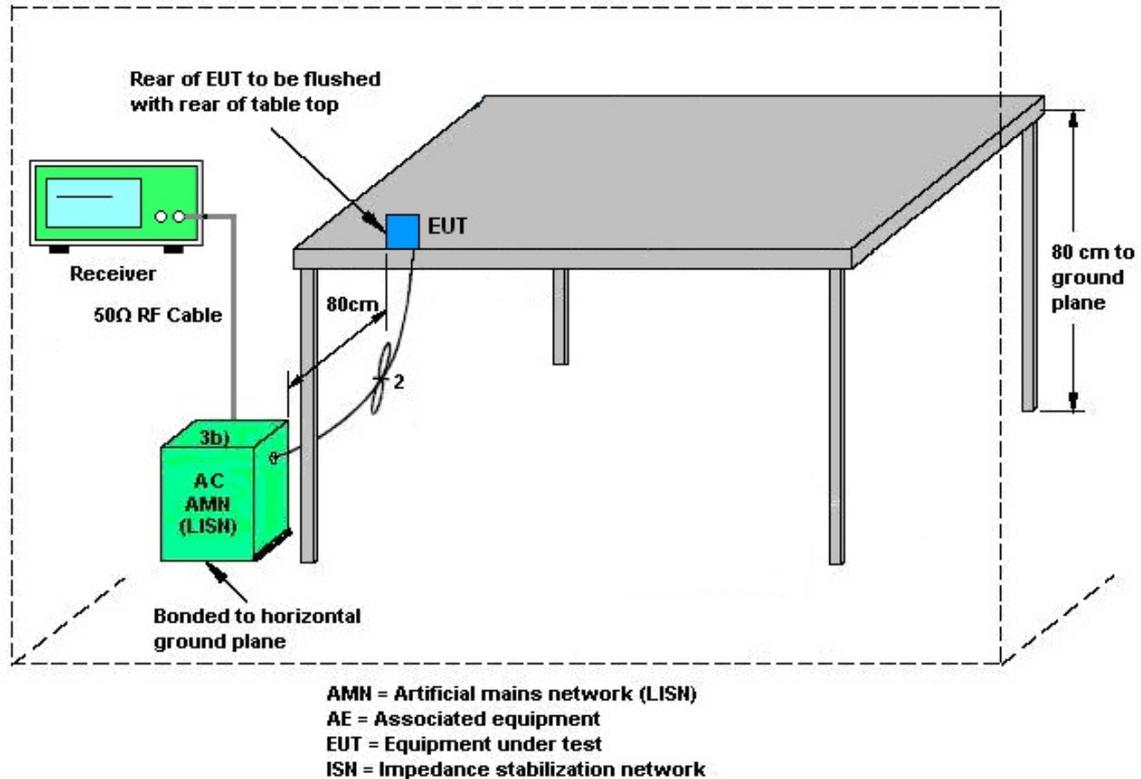

### 3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

#### 3.8.3 Antenna Gain

<STBC Modes>

For completely uncorrelated transmissions, directional gain is calculated as,

Directional gain =  $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots)$ , as following table

<STBC Modes>				
			DG	DG
			for	for
	Ant. 1	Ant. 2	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
U-NII-5	-0.80	-1.90	-0.80	-0.80
U-NII-6	-0.10	-1.70	-0.10	-0.10
U-NII-7	-0.10	-1.60	-0.10	-0.10
U-NII-8	-0.30	-1.90	-0.30	-0.30

This device supports STBC mode, not support CDD (Cyclic Delay Diversity) mode which controlled by software.

Space time block coding (STBC) transmits multiple copies of one data flow in wireless communication. STBC uses two antennas (Ant 1 and Ant 2) to produce multiple receive versions of data, improving data transmission reliability. Among these data copies, optimal copies are combined to provide most reliable data. This redundancy increases the chance of using one or more copies of received data to correctly decode the received data. STBC combines all the copies of received signals to produce the useful data.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Jan. 02, 2025~Jan. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Jan. 02, 2025~Jan. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Jan. 02, 2025~Jan. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max x 30dBm	Jul. 04, 2024	Feb. 23, 2025	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2024	Feb. 23, 2025	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 23, 2025	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	Apr. 18, 2024	Feb. 23, 2025	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 11, 2024	Feb. 23, 2025	Apr. 10, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Feb. 23, 2025	Oct. 21, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 03, 2024	Feb. 23, 2025	Jul. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Feb. 23, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz-18Ghz	Jan. 02, 2025	Feb. 23, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz-18Ghz	Jan. 02, 2025	Feb. 23, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 23, 2025	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 23, 2025	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 23, 2025	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Feb. 18, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Feb. 18, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Feb. 18, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Feb. 18, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 03, 2024	Jan. 01, 2025~Feb. 06, 2025	Jan. 02, 2025	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2025		Jan. 01, 2026	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Jan. 01, 2025~Feb. 06, 2025	Apr. 16, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Jan. 01, 2025~Feb. 06, 2025	NCR	CBP (DFS01-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.02 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.34 dB
---	---------

----- THE END -----



## Appendix A. Conducted Test Results

## A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2025.01.02~2025.1.11	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**EIRP Power Table**

Band V MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2				SUM	Ant 1
HE20	MCS0	2	001	5955	Full	0.26	0.28	8.59	8.55	11.58	-0.80	-0.80	10.78	24.00	Pass	36	
HE20	MCS0	2	001	5955	26/0	0.11	0.11	-0.44	-1.96	1.88	-0.80	-0.80	1.08	24.00	Pass	0	
HE20	MCS0	2	001	5955	52/37	0.27	0.27	2.79	1.02	5.00	-0.80	-0.80	4.20	24.00	Pass	10	
HE20	MCS0	2	001	5955	106/53	0.49	0.49	4.96	4.78	7.88	-0.80	-0.80	7.08	24.00	Pass	20	
HE20	MCS0	2	045	6175	Full	0.26	0.28	8.68	8.61	11.66	-0.80	-0.80	10.86	24.00	Pass	33	
HE20	MCS0	2	045	6175	26/0	0.11	0.11	0.37	-1.06	2.73	-0.80	-0.80	1.93	24.00	Pass	-3	
HE20	MCS0	2	045	6175	52/37	0.27	0.27	3.03	0.88	5.09	-0.80	-0.80	4.29	24.00	Pass	7	
HE20	MCS0	2	045	6175	106/53	0.49	0.49	5.44	4.37	7.95	-0.80	-0.80	7.15	24.00	Pass	18	
HE20	MCS0	2	093	6415	Full	0.26	0.28	8.64	8.21	11.44	-0.80	-0.80	10.64	24.00	Pass	36	
HE20	MCS0	2	093	6415	26/8	0.11	0.11	-0.38	-2.05	1.88	-0.80	-0.80	1.08	24.00	Pass	0	
HE20	MCS0	2	093	6415	52/40	0.27	0.27	3.29	1.60	5.53	-0.80	-0.80	4.73	24.00	Pass	13	
HE20	MCS0	2	093	6415	106/54	0.49	0.49	5.05	4.23	7.67	-0.80	-0.80	6.87	24.00	Pass	21	
HE40	MCS0	2	003	5965	Full	0.49	0.49	10.57	11.28	13.95	-0.80	-0.80	13.15	24.00	Pass	43	
HE40	MCS0	2	043	6165	Full	0.49	0.49	11.08	11.92	14.53	-0.80	-0.80	13.73	24.00	Pass	43	
HE40	MCS0	2	091	6405	Full	0.49	0.49	11.10	11.11	14.12	-0.80	-0.80	13.32	24.00	Pass	46	
HE80	MCS0	2	007	5985	Full	0.67	0.67	13.98	14.52	17.27	-0.80	-0.80	16.47	24.00	Pass	56	
HE80	MCS0	2	039	6145	Full	0.67	0.67	13.66	14.45	17.09	-0.80	-0.80	16.29	24.00	Pass	54	
HE80	MCS0	2	087	6385	Full	0.67	0.67	13.62	13.83	16.74	-0.80	-0.80	15.94	24.00	Pass	56	

**TEST RESULTS DATA**  
**EIRP Power Table**

Band VI MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2				SUM	Ant 1
HE20	MCS0	2	097	6435	Full	0.26	0.28	8.33	7.77	11.07	-0.10	-0.10	10.97	24.00	Pass	33	
HE20	MCS0	2	097	6435	26/0	0.11	0.11	-0.88	-3.07	1.17	-0.10	-0.10	1.07	24.00	Pass	-3	
HE20	MCS0	2	097	6435	52/37	0.27	0.27	2.08	-0.01	4.17	-0.10	-0.10	4.07	24.00	Pass	9	
HE20	MCS0	2	097	6435	106/53	0.49	0.49	4.97	2.16	6.80	-0.10	-0.10	6.70	24.00	Pass	19	
HE20	MCS0	2	105	6475	Full	0.26	0.28	8.13	7.73	10.95	-0.10	-0.10	10.85	24.00	Pass	33	
HE20	MCS0	2	105	6475	26/0	0.11	0.11	-1.17	-3.10	0.98	-0.10	-0.10	0.88	24.00	Pass	-3	
HE20	MCS0	2	105	6475	52/37	0.27	0.27	2.05	0.61	4.40	-0.10	-0.10	4.30	24.00	Pass	10	
HE20	MCS0	2	105	6475	106/53	0.49	0.49	4.67	2.06	6.57	-0.10	-0.10	6.47	24.00	Pass	19	
HE20	MCS0	2	113	6515	Full	0.26	0.28	8.29	8.17	11.24	-0.10	-0.10	11.14	24.00	Pass	34	
HE20	MCS0	2	113	6515	26/8	0.11	0.11	-0.26	-2.47	1.79	-0.10	-0.10	1.69	24.00	Pass	-1	
HE20	MCS0	2	113	6515	52/40	0.27	0.27	1.99	0.65	4.38	-0.10	-0.10	4.28	24.00	Pass	10	
HE20	MCS0	2	113	6515	106/54	0.49	0.49	4.91	3.94	7.46	-0.10	-0.10	7.36	24.00	Pass	20	
HE40	MCS0	2	099	6445	Full	0.49	0.49	10.83	10.51	13.69	-0.10	-0.10	13.59	24.00	Pass	42	
HE40	MCS0	2	107	6485	Full	0.49	0.49	10.66	10.57	13.63	-0.10	-0.10	13.53	24.00	Pass	42	
HE40	MCS0	2	115	6525	Full	0.49	0.49	10.81	10.90	13.87	-0.10	-0.10	13.77	24.00	Pass	43	
HE80	MCS0	2	103	6465	Full	0.67	0.67	13.51	13.70	16.62	-0.10	-0.10	16.52	24.00	Pass	54	
HE80	MCS0	2	119	6545	Full	0.67	0.67	13.71	13.74	16.74	-0.10	-0.10	16.64	24.00	Pass	55	

**TEST RESULTS DATA**  
**EIRP Power Table**

Band VII MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2				SUM	Ant 1
HE20	MCS0	2	117	6535	Full	0.26	0.28	8.37	7.55	10.99	-0.10	-0.10	10.89	24.00	Pass	34	
HE20	MCS0	2	117	6535	26/0	0.11	0.11	-0.07	-3.02	1.71	-0.10	-0.10	1.61	24.00	Pass	1	
HE20	MCS0	2	117	6535	52/37	0.27	0.27	2.18	-1.80	3.64	-0.10	-0.10	3.54	24.00	Pass	13	
HE20	MCS0	2	117	6535	106/53	0.49	0.49	5.12	2.53	7.02	-0.10	-0.10	6.92	24.00	Pass	21	
HE20	MCS0	2	149	6695	Full	0.26	0.28	8.51	7.59	11.08	-0.10	-0.10	10.98	24.00	Pass	36	
HE20	MCS0	2	149	6695	26/0	0.11	0.11	-0.25	-2.34	1.84	-0.10	-0.10	1.74	24.00	Pass	1	
HE20	MCS0	2	149	6695	52/37	0.27	0.27	2.85	-1.64	4.17	-0.10	-0.10	4.07	24.00	Pass	13	
HE20	MCS0	2	149	6695	106/53	0.49	0.49	5.28	3.31	7.41	-0.10	-0.10	7.31	24.00	Pass	22	
HE20	MCS0	2	181	6855	Full	0.26	0.28	8.30	8.16	11.24	-0.10	-0.10	11.14	24.00	Pass	34	
HE20	MCS0	2	181	6855	26/8	0.11	0.11	-0.21	-1.60	2.16	-0.10	-0.10	2.06	24.00	Pass	1	
HE20	MCS0	2	181	6855	52/40	0.27	0.27	2.49	1.02	4.82	-0.10	-0.10	4.72	24.00	Pass	11	
HE20	MCS0	2	181	6855	106/54	0.49	0.49	4.98	4.76	7.88	-0.10	-0.10	7.78	24.00	Pass	21	
HE20	MCS0	2	185	6875	Full	0.26	0.28	8.17	8.05	11.12	-0.10	-0.10	11.02	24.00	Pass	34	
HE20	MCS0	2	185	6875	26/8	0.11	0.11	0.28	-1.51	2.49	-0.10	-0.10	2.39	24.00	Pass	2	
HE20	MCS0	2	185	6875	52/40	0.27	0.27	2.50	1.23	4.92	-0.10	-0.10	4.82	24.00	Pass	11	
HE20	MCS0	2	185	6875	106/54	0.49	0.49	5.07	5.01	8.05	-0.10	-0.10	7.95	24.00	Pass	22	
HE40	MCS0	2	123	6565	Full	0.49	0.49	11.02	10.87	13.96	-0.10	-0.10	13.86	24.00	Pass	44	
HE40	MCS0	2	147	6685	Full	0.49	0.49	10.60	10.58	13.60	-0.10	-0.10	13.50	24.00	Pass	44	
HE40	MCS0	2	179	6845	Full	0.49	0.49	11.03	11.40	14.23	-0.10	-0.10	14.13	24.00	Pass	44	
HE40	MCS0	2	187	6885	Full	0.49	0.49	10.88	11.30	14.11	-0.10	-0.10	14.01	24.00	Pass	44	
HE80	MCS0	2	135	6625	Full	0.67	0.67	13.66	13.59	16.64	-0.10	-0.10	16.54	24.00	Pass	55	
HE80	MCS0	2	151	6705	Full	0.67	0.67	13.61	13.63	16.64	-0.10	-0.10	16.54	24.00	Pass	56	
HE80	MCS0	2	167	6785	Full	0.00	0.00	13.65	14.06	16.87	-0.10	-0.10	16.77	24.00	Pass	55	
HE80	MCS0	2	183	6865	Full	0.67	0.67	13.59	14.08	16.86	-0.10	-0.10	16.76	24.00	Pass	55	

**TEST RESULTS DATA**  
**EIRP Power Table**

Band VIII MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
HE20	MCS0	2	189	6895	Full	0.26	0.28	8.54	7.94	11.26	-0.30	10.96	24.00	Pass	29
HE20	MCS0	2	189	6895	26/0	0.11	0.11	0.23	-0.88	2.72	-0.30	2.42	24.00	Pass	-3
HE20	MCS0	2	189	6895	52/37	0.27	0.27	2.88	1.80	5.38	-0.30	5.08	24.00	Pass	7
HE20	MCS0	2	189	6895	106/53	0.49	0.49	5.73	4.57	8.20	-0.30	7.90	24.00	Pass	19
HE20	MCS0	2	209	6995	Full	0.26	0.28	7.55	7.01	10.30	-0.30	10.00	24.00	Pass	27
HE20	MCS0	2	209	6995	26/0	0.11	0.11	0.19	-1.15	2.58	-0.30	2.28	24.00	Pass	-1
HE20	MCS0	2	209	6995	52/37	0.27	0.27	2.86	1.52	5.25	-0.30	4.95	24.00	Pass	10
HE20	MCS0	2	209	6995	106/53	0.49	0.49	4.96	4.33	7.66	-0.30	7.36	24.00	Pass	19
HE20	MCS0	2	229	7095	Full	0.26	0.28	7.91	7.10	10.53	-0.30	10.23	24.00	Pass	30
HE20	MCS0	2	229	7095	26/8	0.11	0.11	-0.34	-1.68	2.05	-0.30	1.75	24.00	Pass	-1
HE20	MCS0	2	229	7095	52/40	0.27	0.27	2.81	0.91	4.97	-0.30	4.67	24.00	Pass	10
HE20	MCS0	2	229	7095	106/54	0.49	0.49	4.74	3.78	7.29	-0.30	6.99	24.00	Pass	19
HE20	MCS0	2	195	6925	Full	0.00	0.00	10.86	11.14	14.02	-0.30	13.72	24.00	Pass	39
HE40	MCS0	2	203	6965	Full	0.49	0.49	10.98	11.33	14.17	-0.30	13.87	24.00	Pass	40
HE40	MCS0	2	227	7085	Full	0.49	0.49	10.80	10.94	13.88	-0.30	13.58	24.00	Pass	41
HE80	MCS0	2	199	6945	Full	0.67	0.67	13.60	14.15	16.90	-0.30	16.60	24.00	Pass	51
HE80	MCS0	2	215	7025	Full	0.67	0.67	12.74	13.30	16.04	-0.30	15.74	24.00	Pass	49



### Emission Bandwidth

#### Test Result



TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	5955	21.44	5944.30	5965.74	320	PASS
	Ant2	5955	21.58	5944.30	5965.89	320	PASS
	Ant1	6175	21.44	6164.30	6185.74	320	PASS
	Ant2	6175	21.44	6164.30	6185.74	320	PASS
	Ant1	6415	21.49	6404.30	6425.79	320	PASS
	Ant2	6415	21.34	6404.30	6425.65	320	PASS
	Ant1	6435	21.68	6424.16	6445.84	320	PASS
	Ant2	6435	21.39	6424.26	6445.65	320	PASS
	Ant1	6475	21.49	6464.30	6485.79	320	PASS
	Ant2	6475	21.34	6464.30	6485.65	320	PASS
	Ant1	6515	21.63	6504.21	6525.84	320	PASS
	Ant2	6515	21.53	6504.21	6525.74	320	PASS
	Ant1	6535	21.68	6524.16	6545.84	320	PASS
	Ant2	6535	21.39	6524.26	6545.65	320	PASS
	Ant1	6695	21.49	6684.21	6705.70	320	PASS
	Ant2	6695	21.25	6684.35	6705.60	320	PASS
	Ant1	6855	21.68	6844.21	6865.89	320	PASS
	Ant2	6855	21.53	6844.21	6865.74	320	PASS
	Ant1	6875	21.53	6864.30	6885.84	320	PASS
	Ant2	6875	21.63	6864.21	6885.84	320	PASS
	Ant1	6895	21.44	6884.30	6905.74	320	PASS
	Ant2	6895	21.30	6884.35	6905.65	320	PASS
	Ant1	6995	21.49	6984.35	7005.84	320	PASS
	Ant2	6995	21.30	6984.45	7005.74	320	PASS
Ant1	7095	21.49	7084.21	7105.70	320	PASS	
Ant2	7095	21.34	7084.26	7105.60	320	PASS	
11AX40MIMO	Ant1	5965	40.02	5944.94	5984.96	320	PASS
	Ant2	5965	40.30	5944.94	5985.25	320	PASS
	Ant1	6165	40.11	6144.94	6185.06	320	PASS
	Ant2	6165	40.02	6144.94	6184.96	320	PASS
	Ant1	6405	40.02	6384.94	6424.96	320	PASS
	Ant2	6405	40.02	6385.13	6425.15	320	PASS
	Ant1	6445	40.11	6424.94	6465.06	320	PASS
	Ant2	6445	40.21	6424.94	6465.15	320	PASS
	Ant1	6485	40.30	6464.85	6505.15	320	PASS
	Ant2	6485	40.11	6464.94	6505.06	320	PASS
	Ant1	6525	40.02	6504.94	6544.96	320	PASS



	Ant2	6525	40.02	6504.94	6544.96	320	PASS
	Ant1	6565	40.21	6544.94	6585.15	320	PASS
	Ant2	6565	40.21	6545.04	6585.25	320	PASS
	Ant1	6685	40.11	6664.94	6705.06	320	PASS
	Ant2	6685	40.21	6664.94	6705.15	320	PASS
	Ant1	6845	40.40	6824.75	6865.15	320	PASS
	Ant2	6845	40.11	6825.04	6865.15	320	PASS
	Ant1	6885	40.40	6864.75	6905.15	320	PASS
	Ant2	6885	40.02	6865.04	6905.06	320	PASS
	Ant1	6925	40.11	6904.94	6945.06	320	PASS
	Ant2	6925	40.50	6904.85	6945.34	320	PASS
	Ant1	6965	40.02	6945.04	6985.06	320	PASS
	Ant2	6965	40.11	6944.75	6984.87	320	PASS
	Ant1	7085	40.21	7064.94	7105.15	320	PASS
	Ant2	7085	39.83	7065.13	7104.96	320	PASS
11AX80MIMO	Ant1	5985	81.94	5943.93	6025.88	320	PASS
	Ant2	5985	81.75	5944.12	6025.88	320	PASS
	Ant1	6145	81.75	6103.93	6185.69	320	PASS
	Ant2	6145	81.56	6104.12	6185.69	320	PASS
	Ant1	6385	81.56	6344.31	6425.88	320	PASS
	Ant2	6385	81.75	6344.12	6425.88	320	PASS
	Ant1	6465	81.94	6424.12	6506.07	320	PASS
	Ant2	6465	81.75	6424.12	6505.88	320	PASS
	Ant1	6545	81.56	6504.12	6585.69	320	PASS
	Ant2	6545	81.56	6504.31	6585.88	320	PASS
	Ant1	6625	81.75	6584.12	6665.88	320	PASS
	Ant2	6625	81.56	6584.12	6665.69	320	PASS
	Ant1	6705	81.56	6664.12	6745.69	320	PASS
	Ant2	6705	81.56	6664.12	6745.69	320	PASS
	Ant1	6785	81.75	6743.93	6825.69	320	PASS
	Ant2	6785	81.75	6744.31	6826.07	320	PASS
	Ant1	6865	81.37	6824.31	6905.69	320	PASS
	Ant2	6865	81.37	6824.31	6905.69	320	PASS
	Ant1	6945	81.75	6903.74	6985.50	320	PASS
	Ant2	6945	81.18	6904.31	6985.50	320	PASS
Ant1	7025	81.75	6984.12	7065.88	320	PASS	
Ant2	7025	81.18	6984.31	7065.50	320	PASS	




Test Graphs

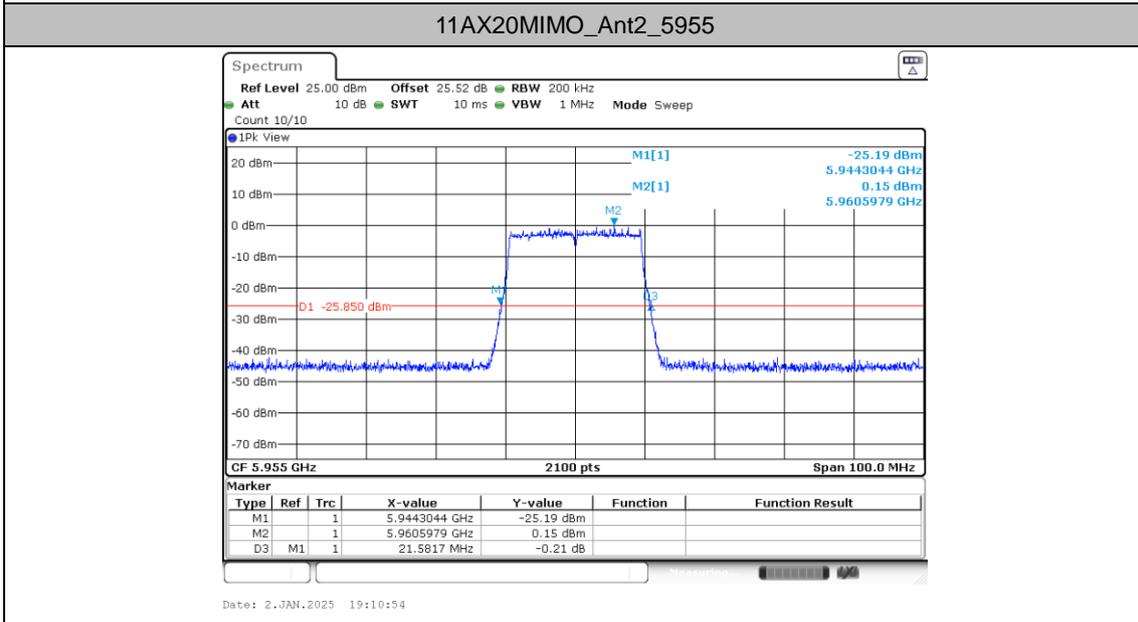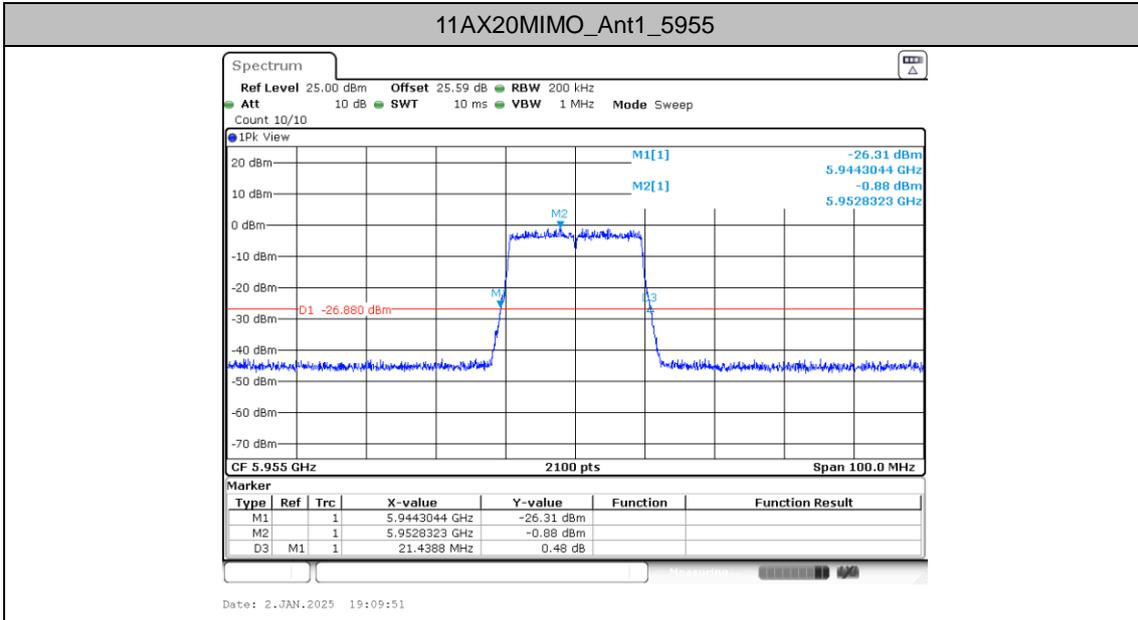




11AX20MIMO\_Ant1\_6175

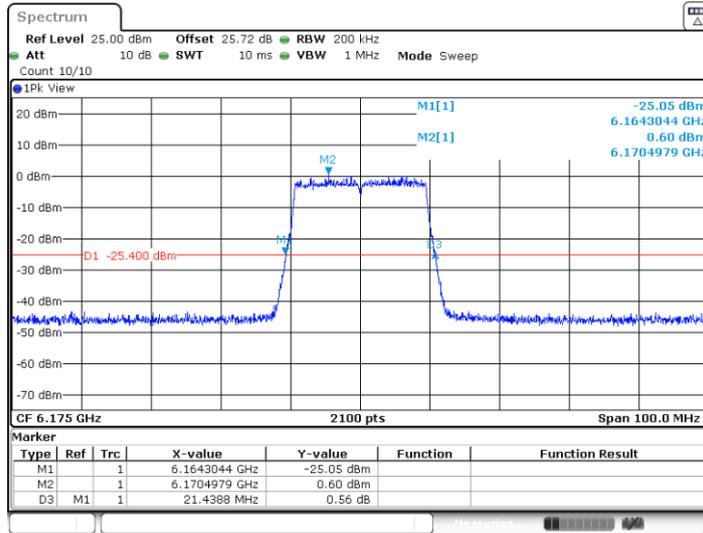

Date: 2.JAN.2025 19:17:58


11AX20MIMO\_Ant2\_6175

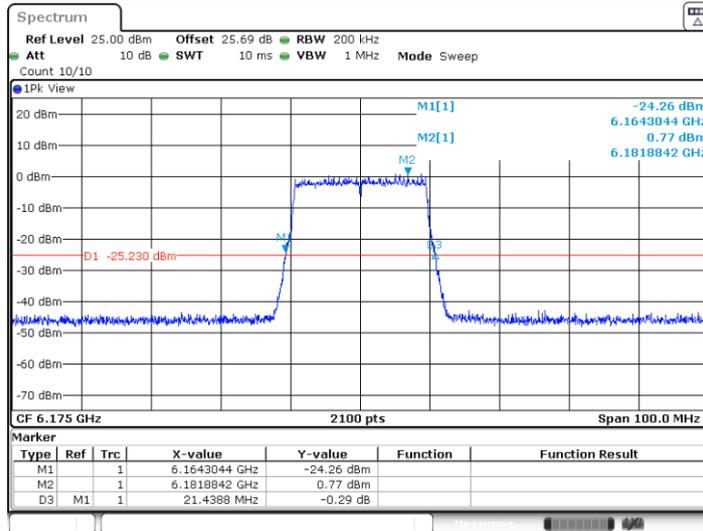

Date: 2.JAN.2025 19:19:05




11AX20MIMO\_Ant1\_6415

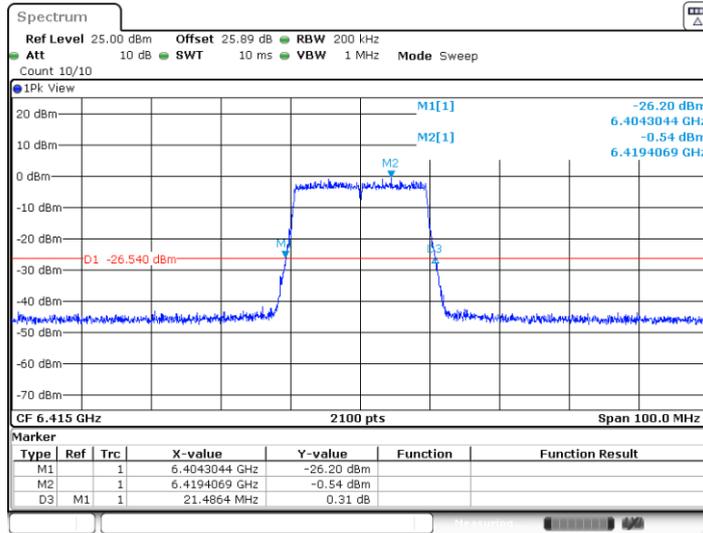

Date: 2.JAN.2025 19:21:40


11AX20MIMO\_Ant2\_6415

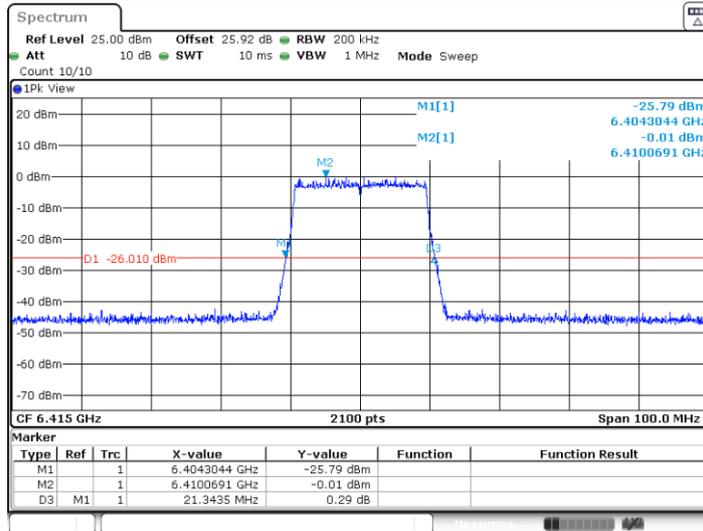


Date: 2.JAN.2025 19:22:47



11AX20MIMO\_Ant1\_6435

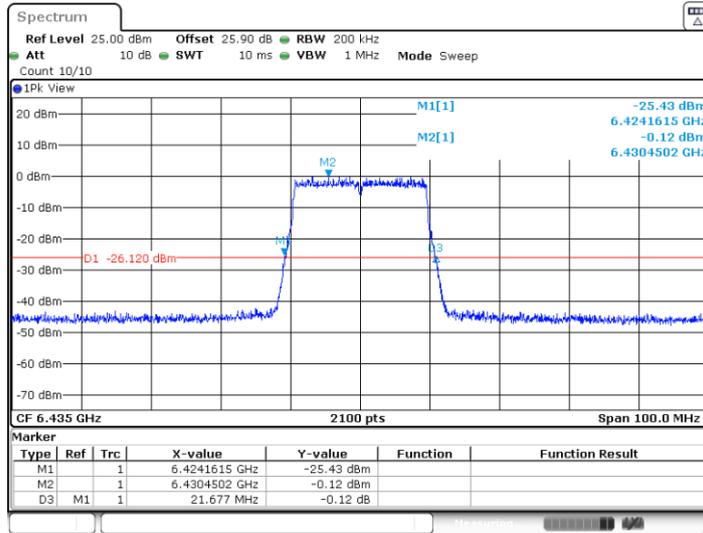


11AX20MIMO\_Ant2\_6435

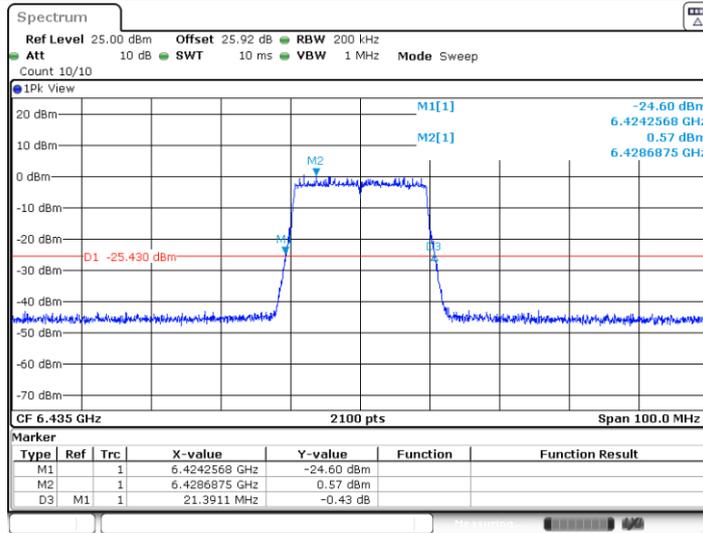




11AX20MIMO\_Ant1\_6475

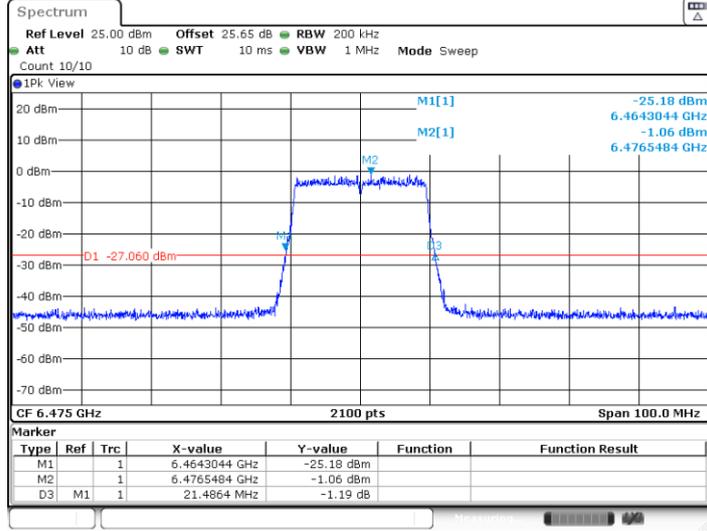

Date: 2.JAN.2025 19:31:14


11AX20MIMO\_Ant2\_6475

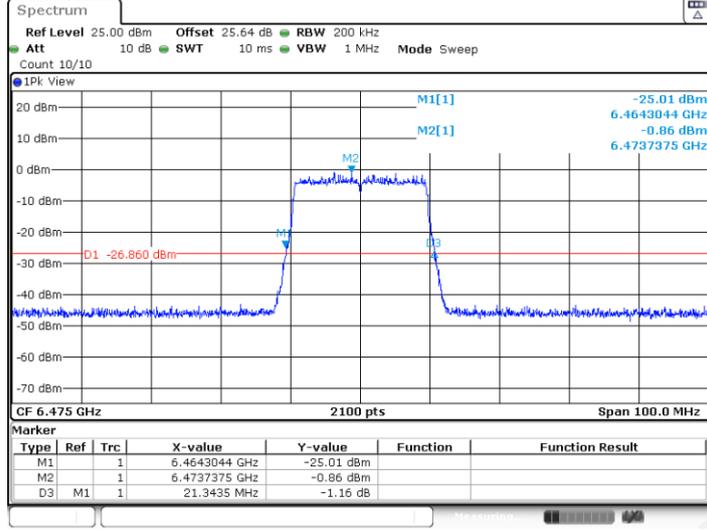

Date: 2.JAN.2025 19:32:21




11AX20MIMO\_Ant1\_6515

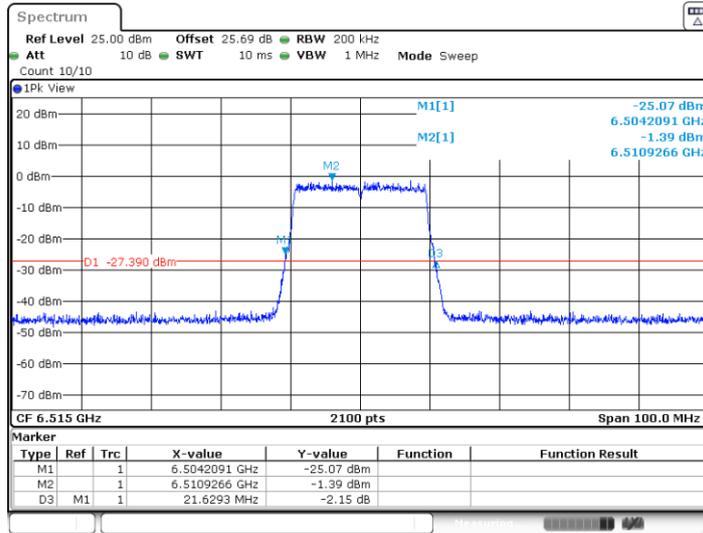

Date: 2.JAN.2025 19:35:30


11AX20MIMO\_Ant2\_6515

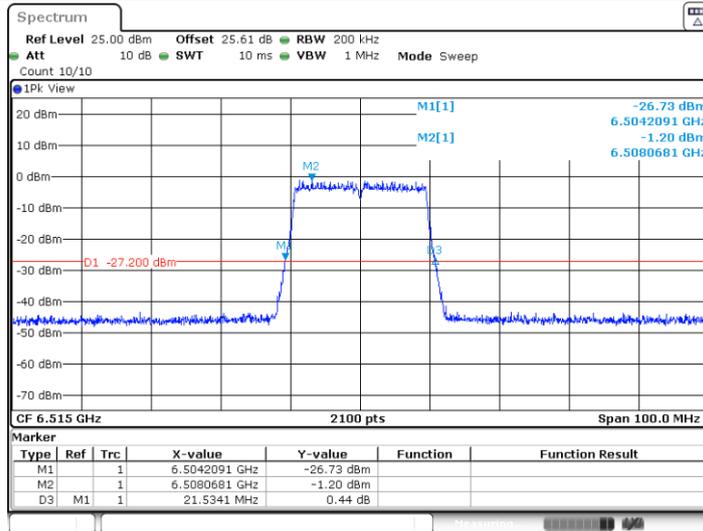

Date: 2.JAN.2025 19:36:34




11AX20MIMO\_Ant1\_6535

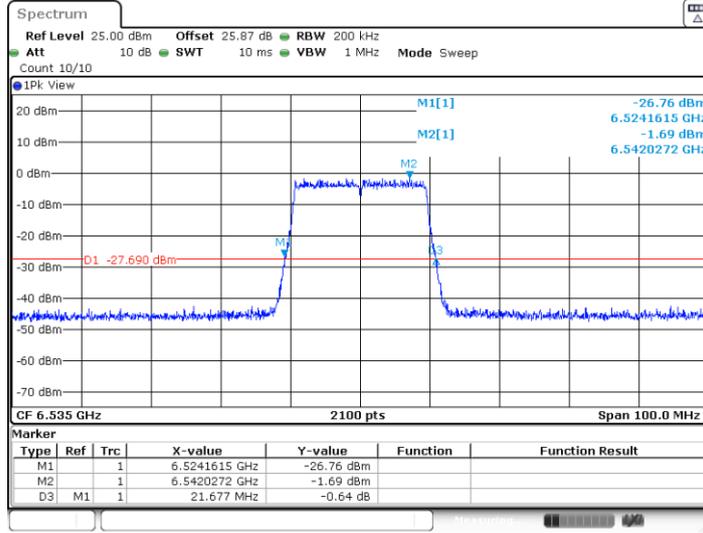

Date: 2.JAN.2025 19:37:58


11AX20MIMO\_Ant2\_6535

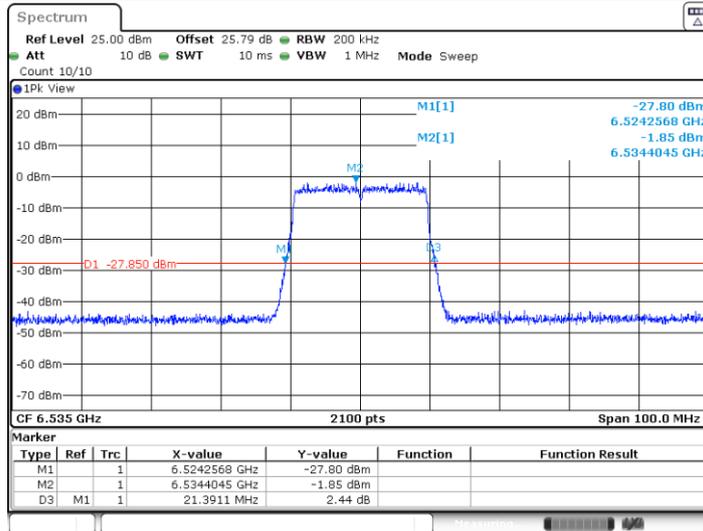

Date: 2.JAN.2025 19:39:04




11AX20MIMO\_Ant1\_6695

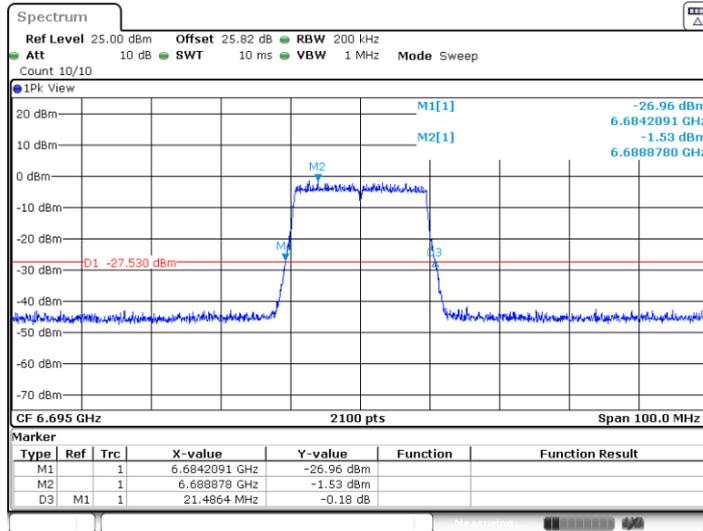

Date: 2.JAN.2025 19:40:57


11AX20MIMO\_Ant2\_6695

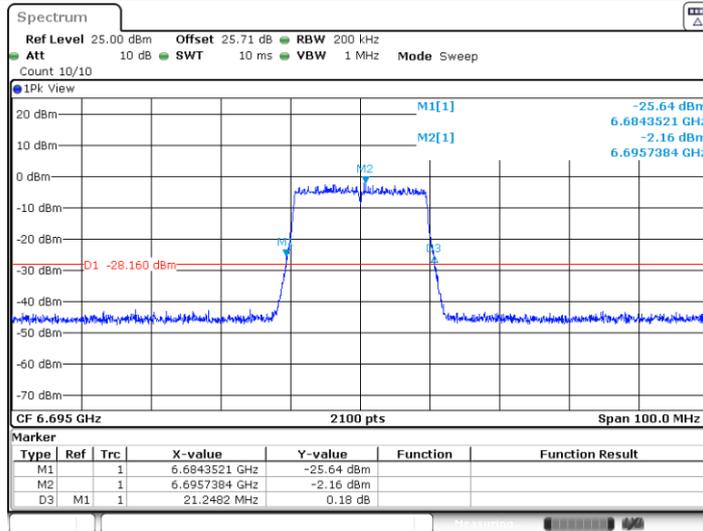

Date: 2.JAN.2025 19:42:03




11AX20MIMO\_Ant1\_6855

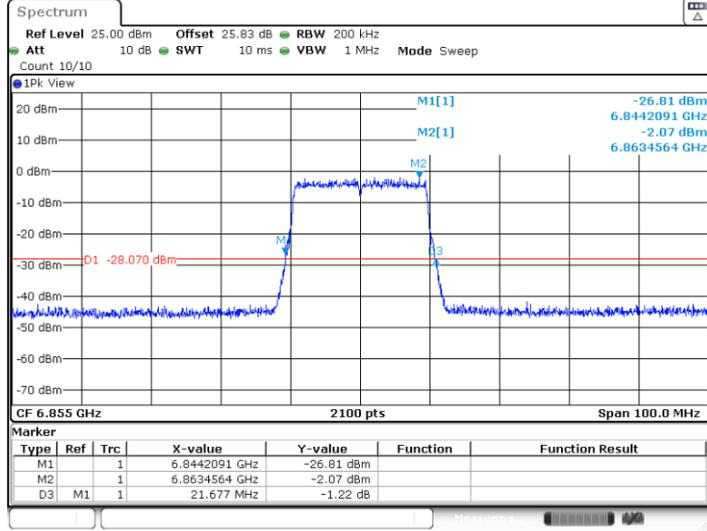

Date: 2.JAN.2025 19:44:09


11AX20MIMO\_Ant2\_6855

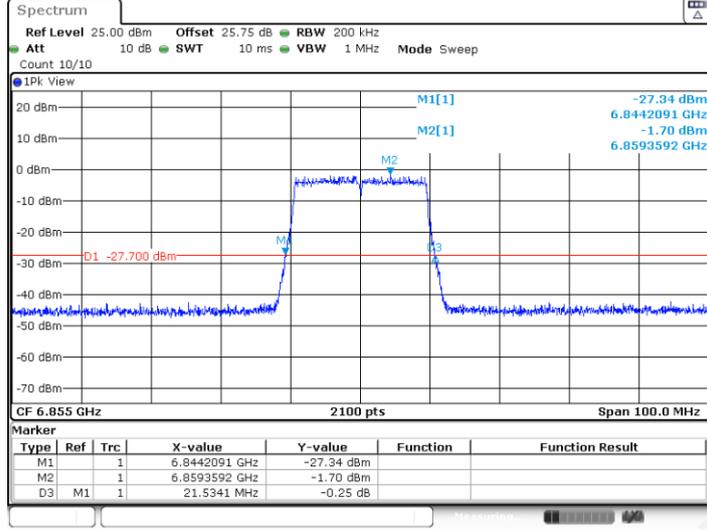

Date: 2.JAN.2025 19:45:15




11AX20MIMO\_Ant1\_6875

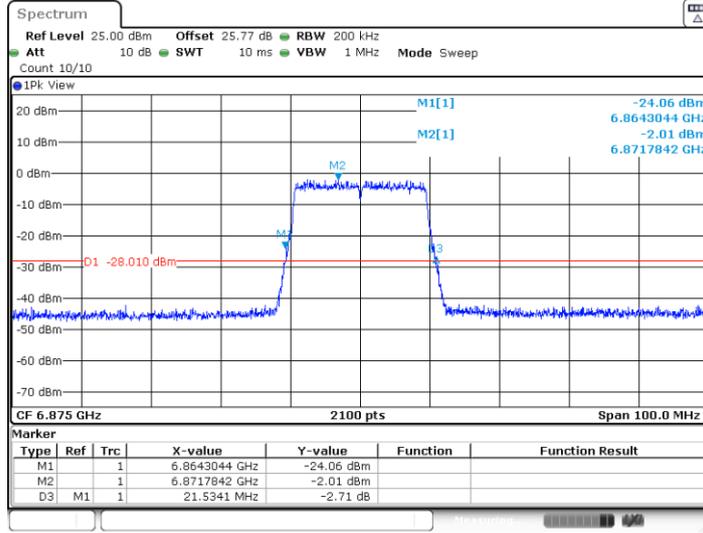

Date: 2.JAN.2025 19:47:25


11AX20MIMO\_Ant2\_6875

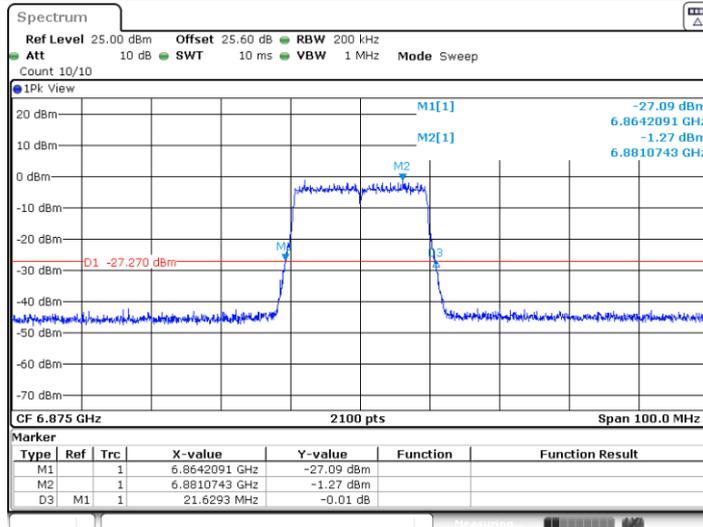

Date: 2.JAN.2025 19:48:31




11AX20MIMO\_Ant1\_6895

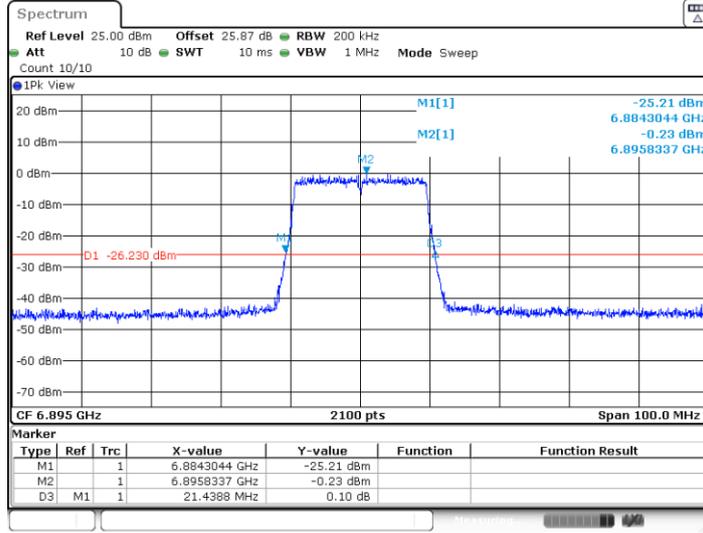

Date: 2.JAN.2025 19:49:56


11AX20MIMO\_Ant2\_6895

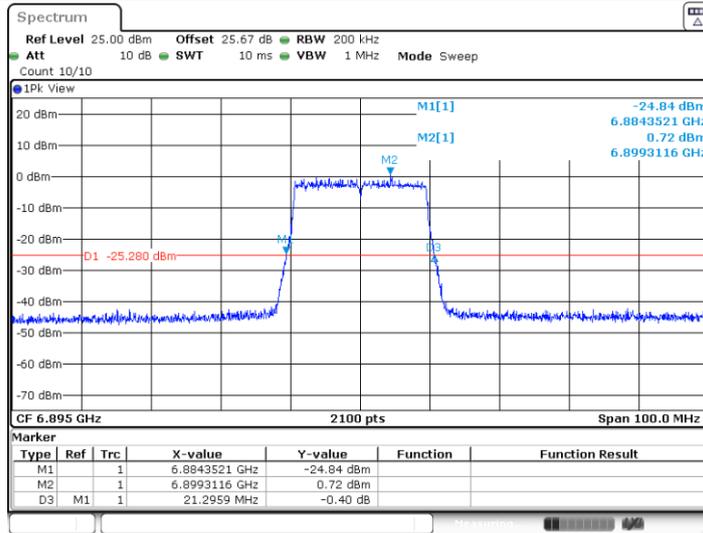


Date: 2.JAN.2025 19:51:02




11AX20MIMO\_Ant1\_6995

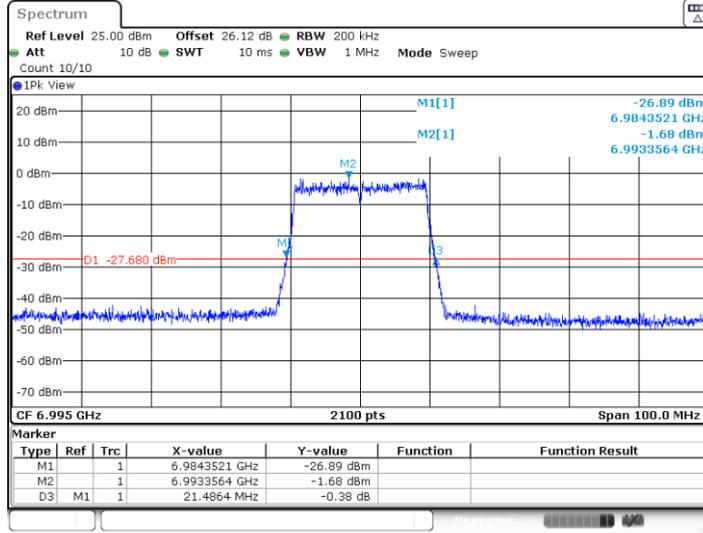


11AX20MIMO\_Ant2\_6995

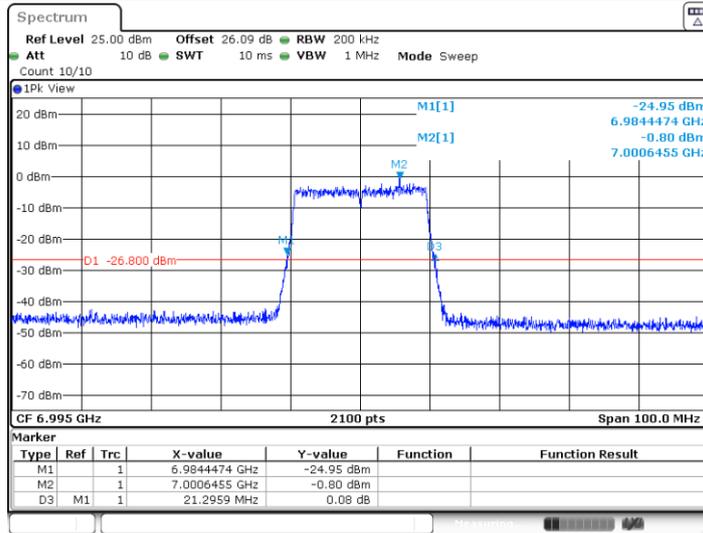

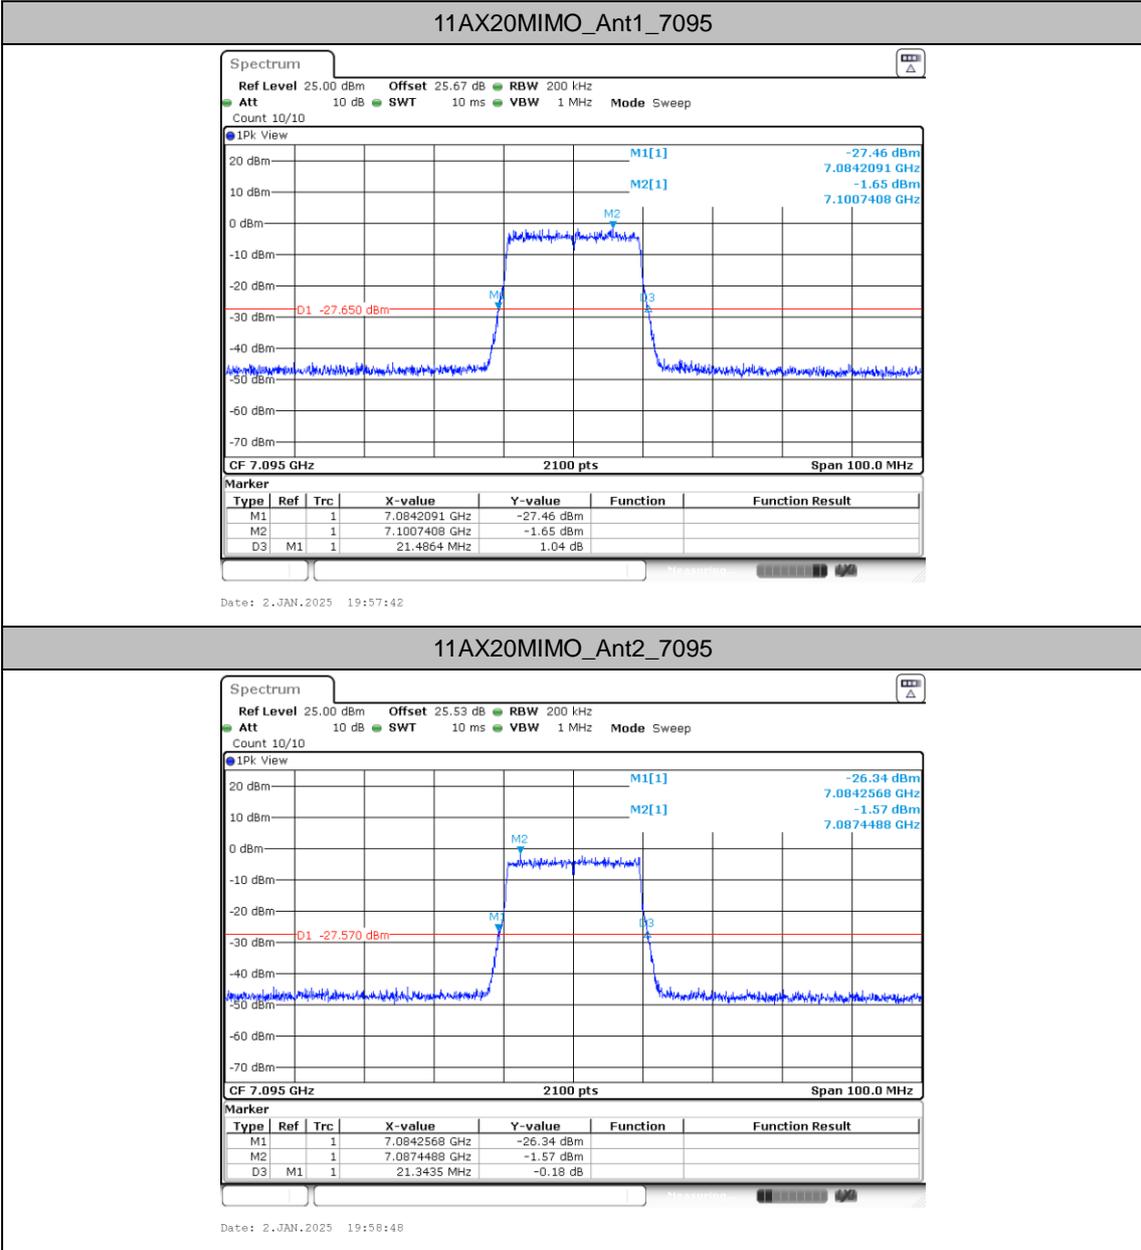




11AX40MIMO\_Ant1\_5965

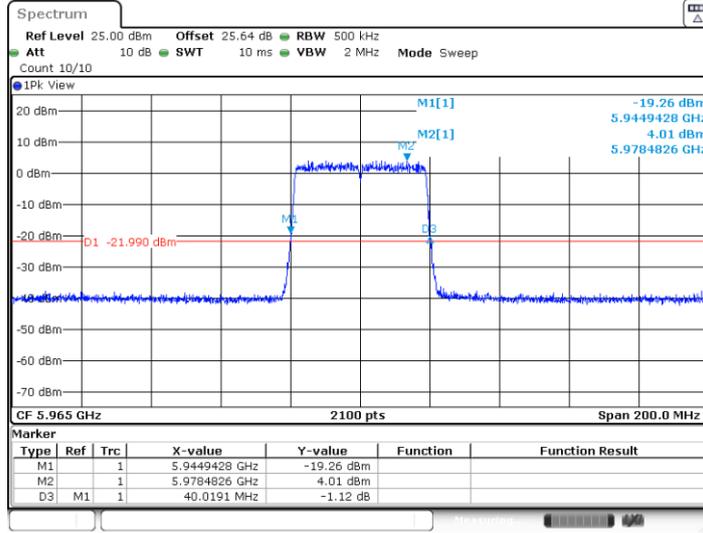

Date: 2.JAN.2025 20:05:30


11AX40MIMO\_Ant2\_5965

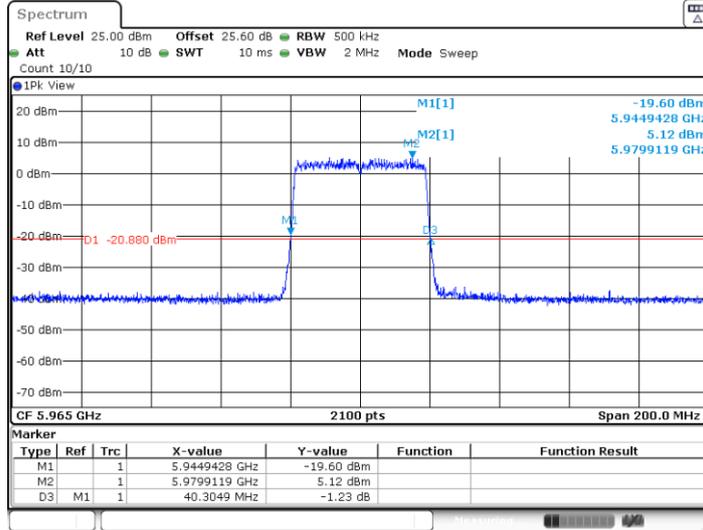

Date: 2.JAN.2025 20:06:36




11AX40MIMO\_Ant1\_6165

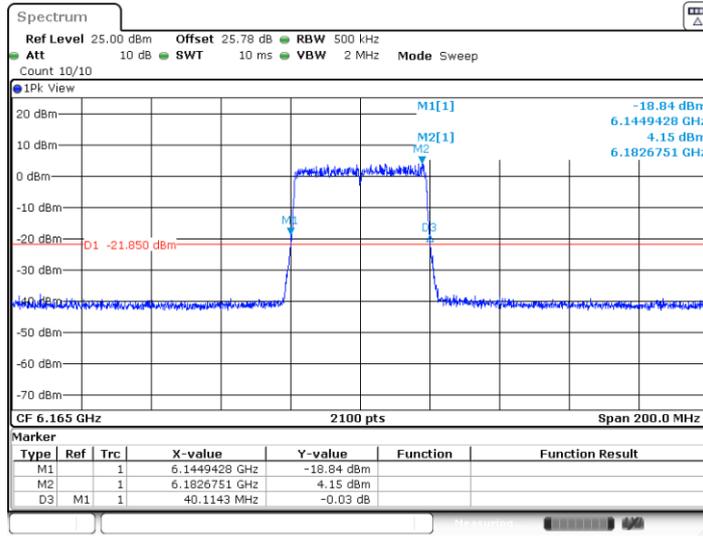

Date: 2.JAN.2025 20:10:56


11AX40MIMO\_Ant2\_6165

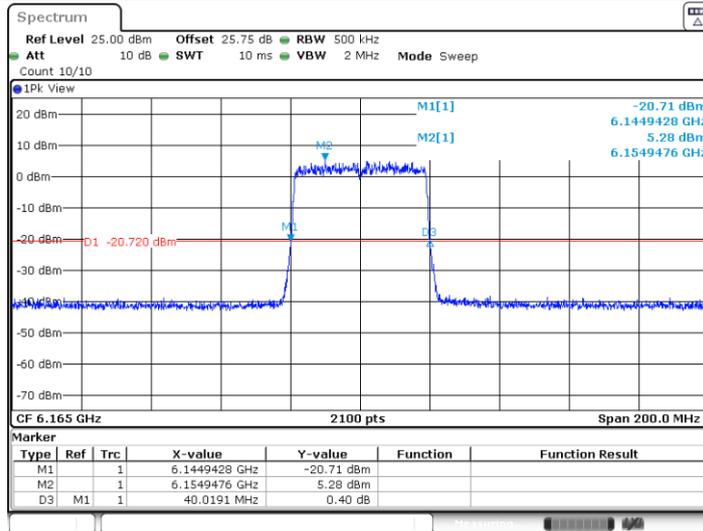

Date: 2.JAN.2025 20:12:03




11AX40MIMO\_Ant1\_6405

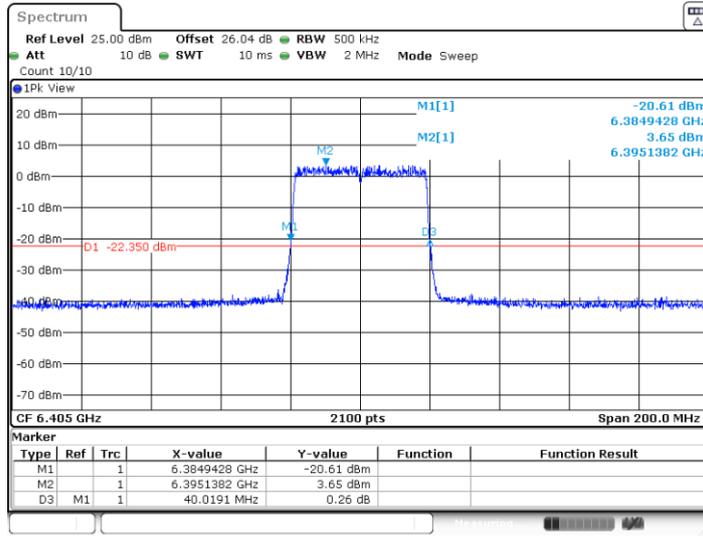

Date: 2.JAN.2025 20:15:35


11AX40MIMO\_Ant2\_6405

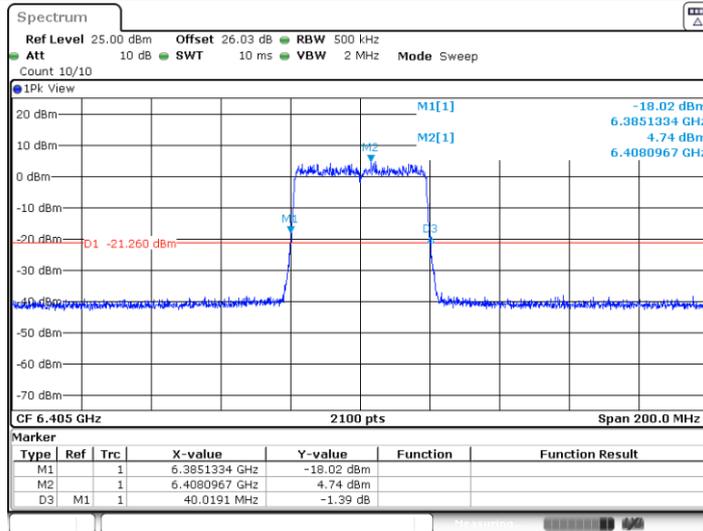

Date: 2.JAN.2025 20:16:41




11AX40MIMO\_Ant1\_6445

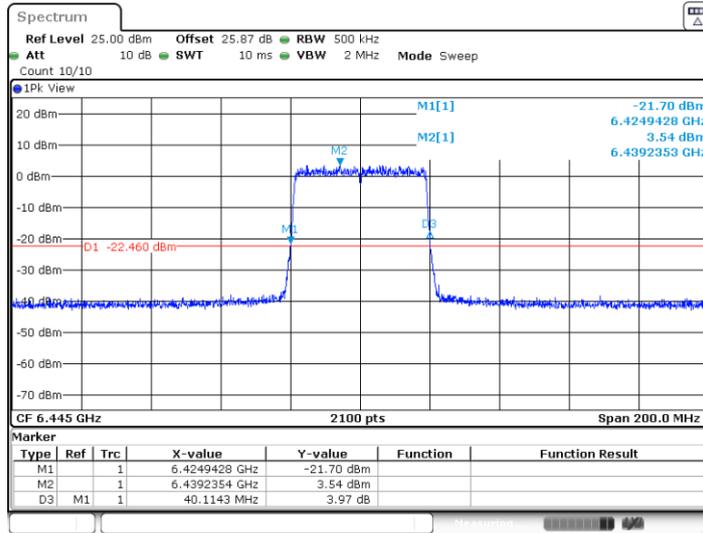

Date: 2.JAN.2025 20:22:49


11AX40MIMO\_Ant2\_6445

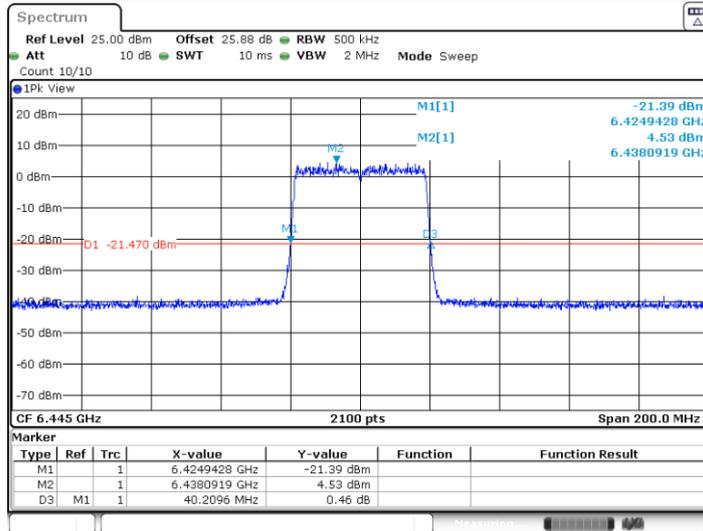

Date: 2.JAN.2025 20:23:55




11AX40MIMO\_Ant1\_6485

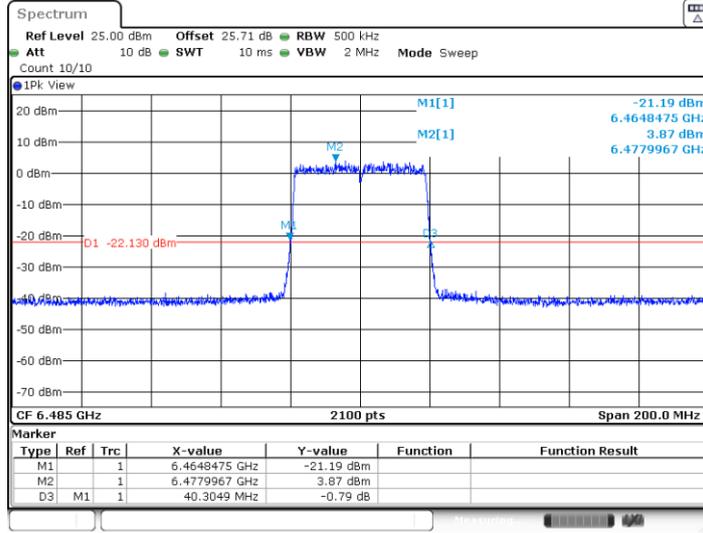


Date: 2.JAN.2025 20:27:35

11AX40MIMO\_Ant2\_6485

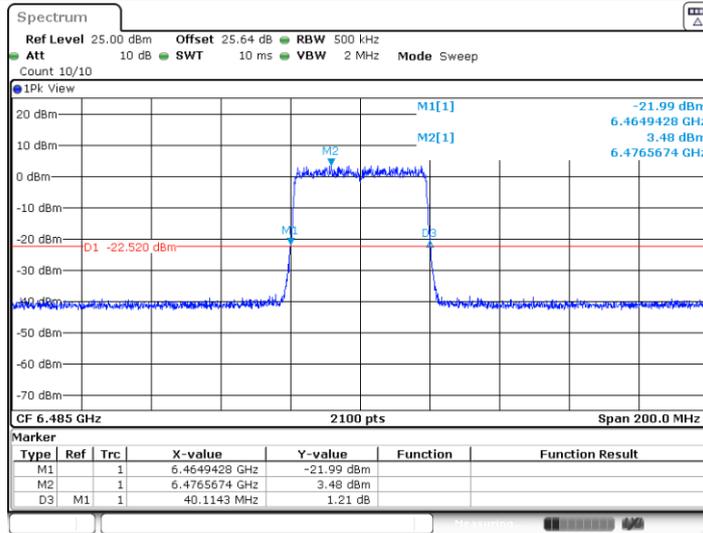


Date: 2.JAN.2025 20:28:42

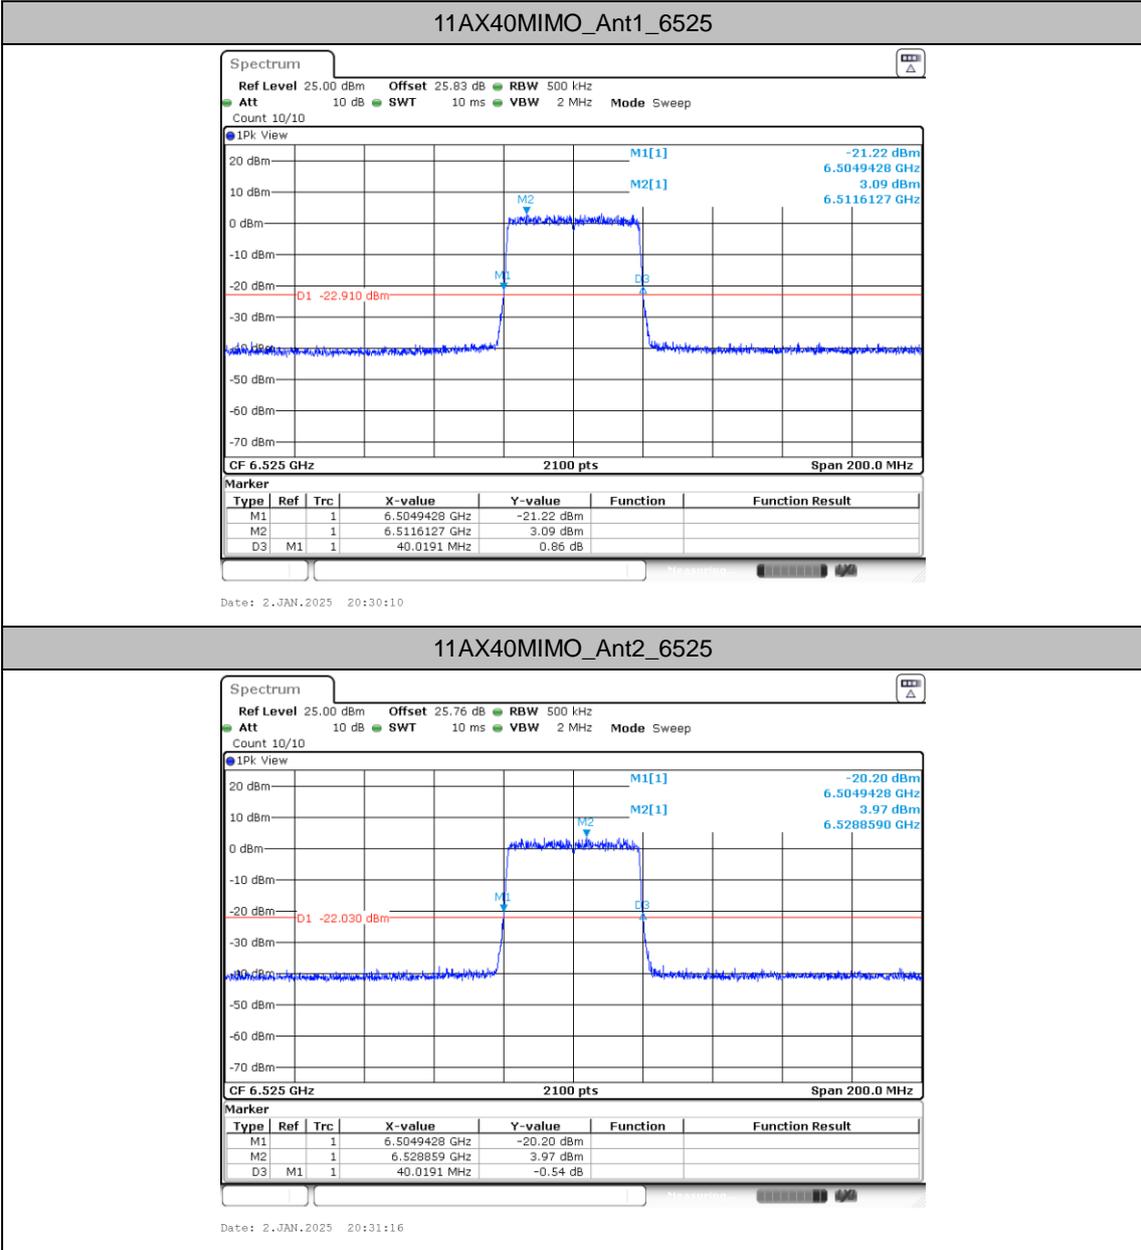




11AX40MIMO\_Ant1\_6565

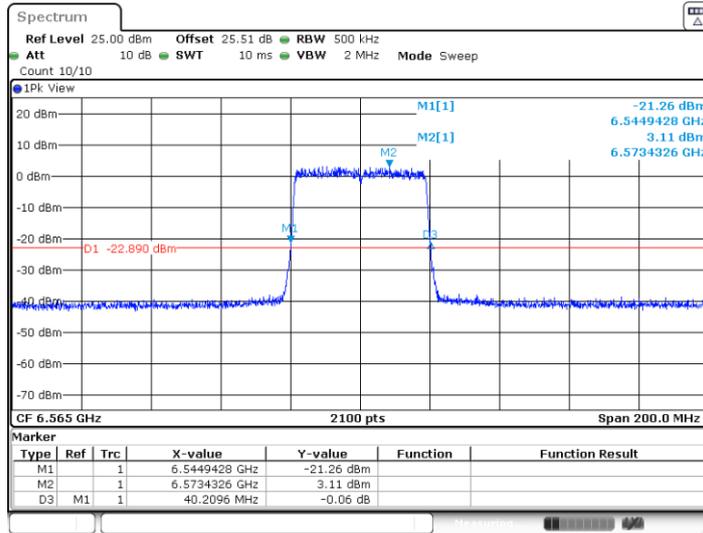

Date: 2.JAN.2025 20:33:53


11AX40MIMO\_Ant2\_6565

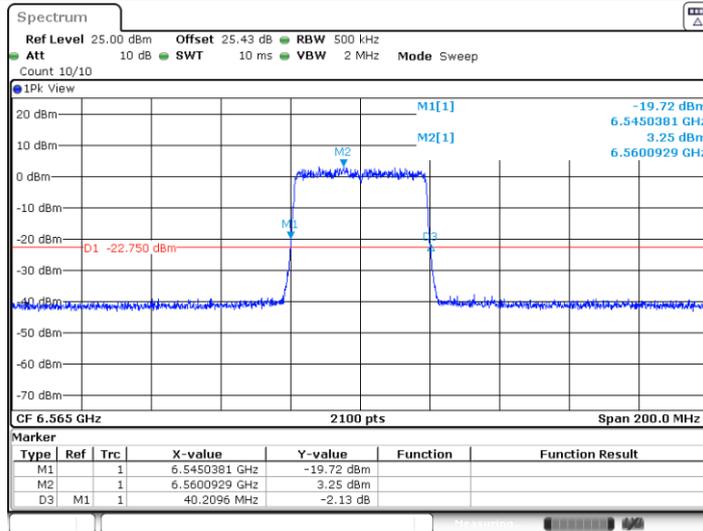

Date: 2.JAN.2025 20:34:59




11AX40MIMO\_Ant1\_6685

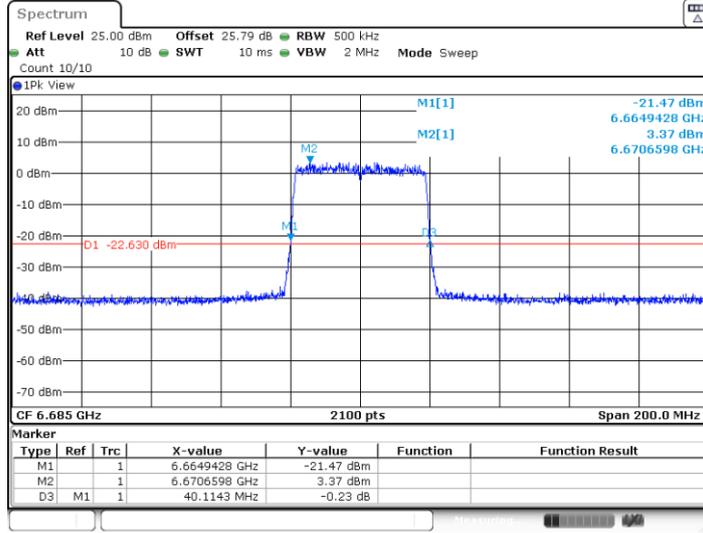

Date: 2.JAN.2025 20:37:10


11AX40MIMO\_Ant2\_6685

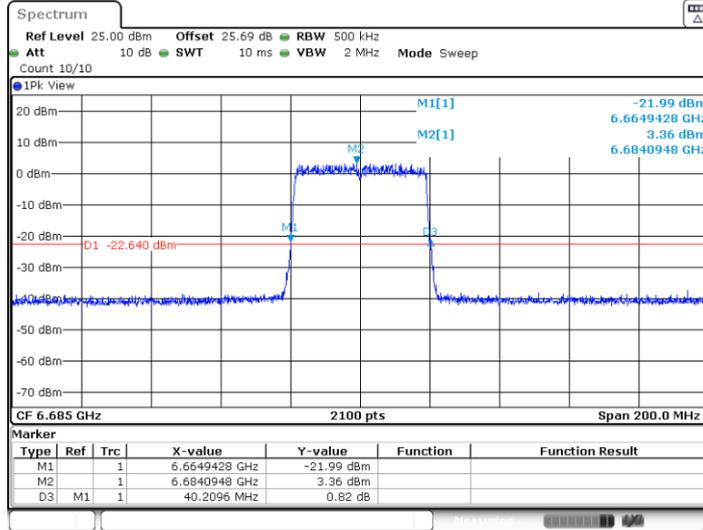

Date: 2.JAN.2025 20:38:16




11AX40MIMO\_Ant1\_6845

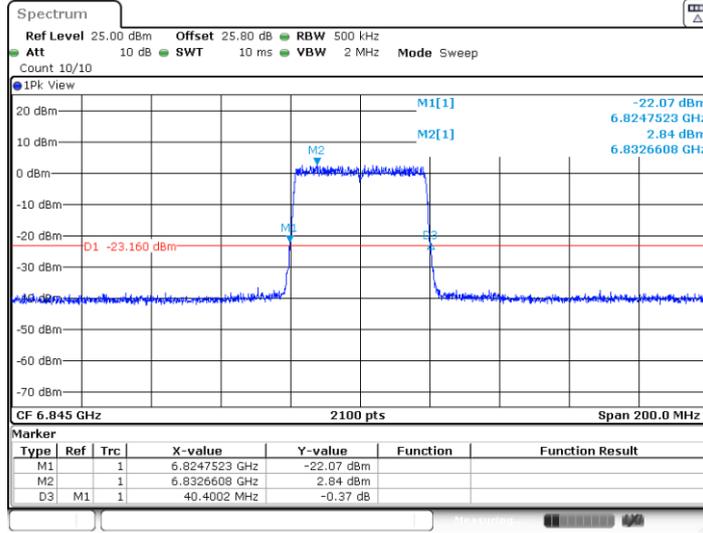

Date: 2.JAN.2025 20:40:19


11AX40MIMO\_Ant2\_6845

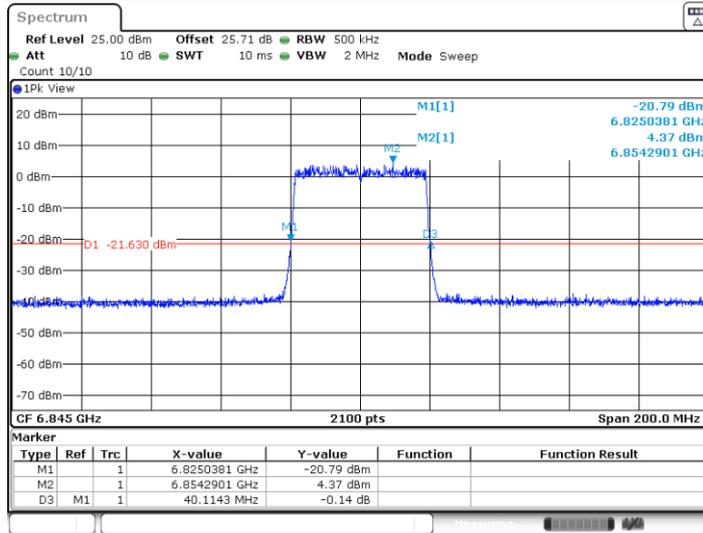

Date: 2.JAN.2025 20:41:26




11AX40MIMO\_Ant1\_6885

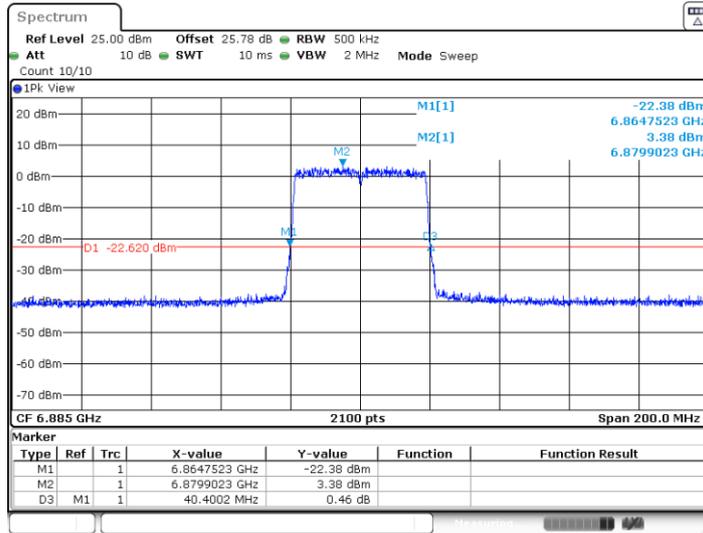

Date: 2.JAN.2025 20:45:55


11AX40MIMO\_Ant2\_6885

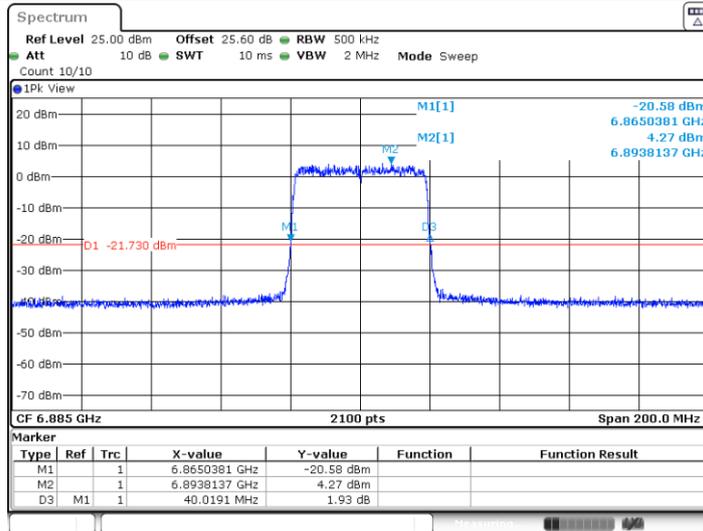

Date: 2.JAN.2025 20:47:01




11AX40MIMO\_Ant1\_6925

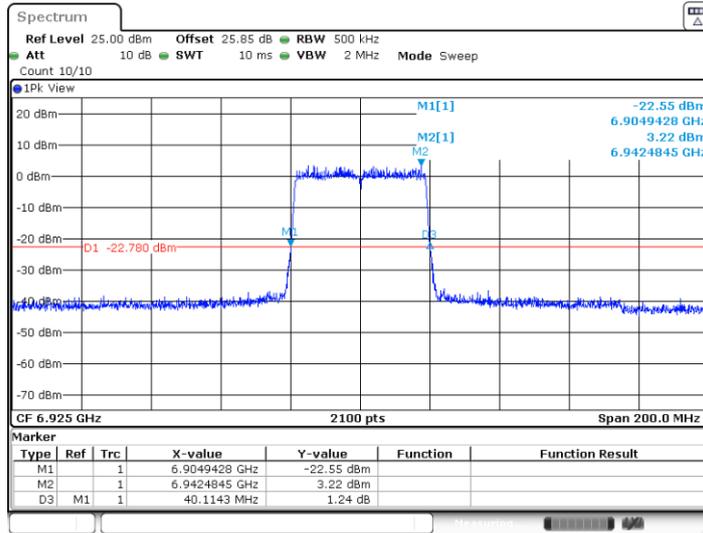

Date: 2.JAN.2025 20:48:50


11AX40MIMO\_Ant2\_6925

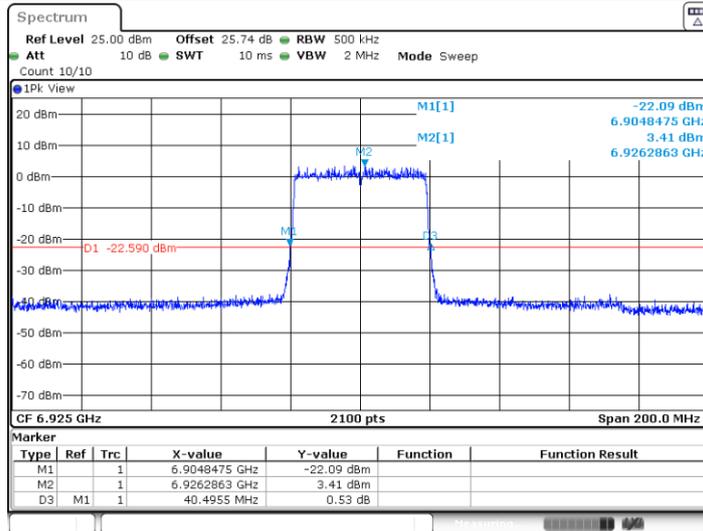

Date: 2.JAN.2025 20:49:57




11AX40MIMO\_Ant1\_6965

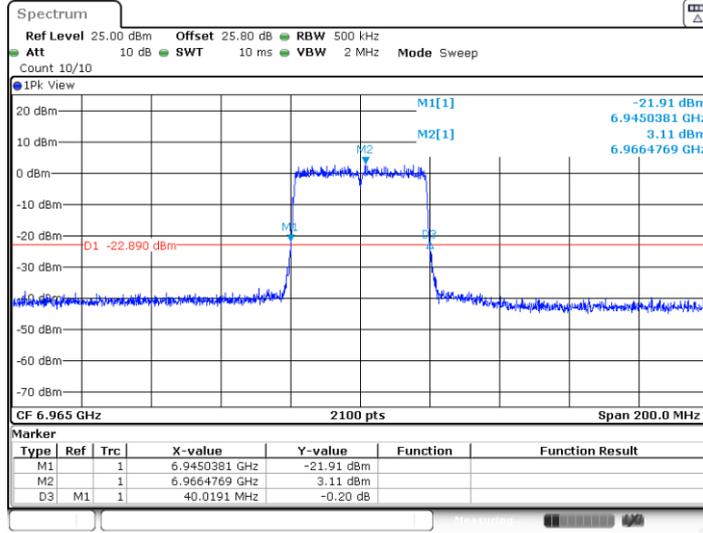

Date: 2.JAN.2025 20:51:28


11AX40MIMO\_Ant2\_6965

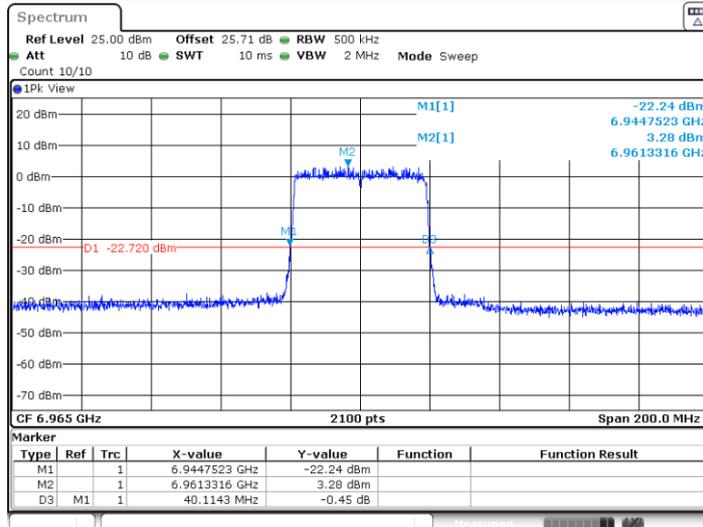

Date: 2.JAN.2025 20:52:34




11AX40MIMO\_Ant1\_7085

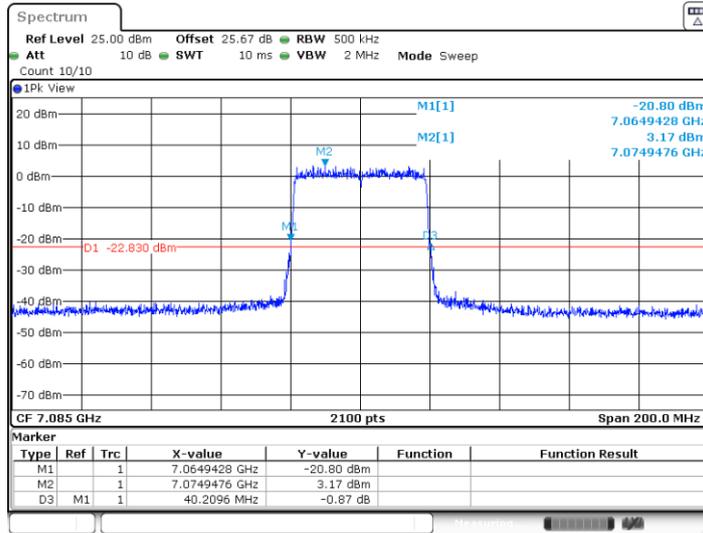



Date: 2.JAN.2025 20:54:37


11AX40MIMO\_Ant2\_7085

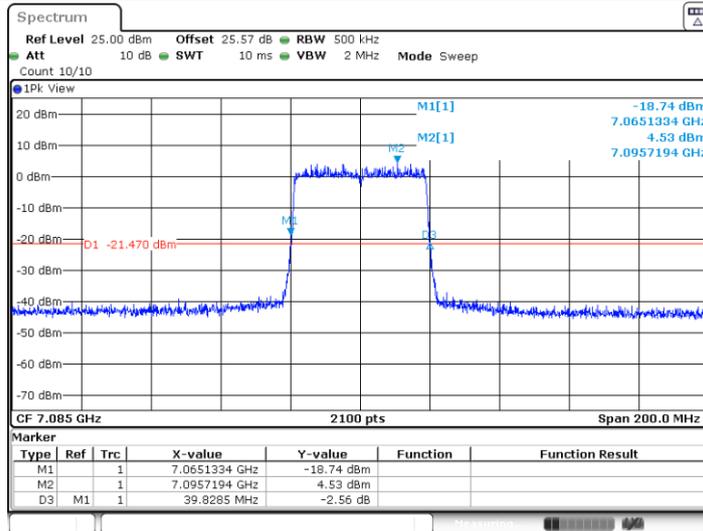

Date: 2.JAN.2025 20:55:43

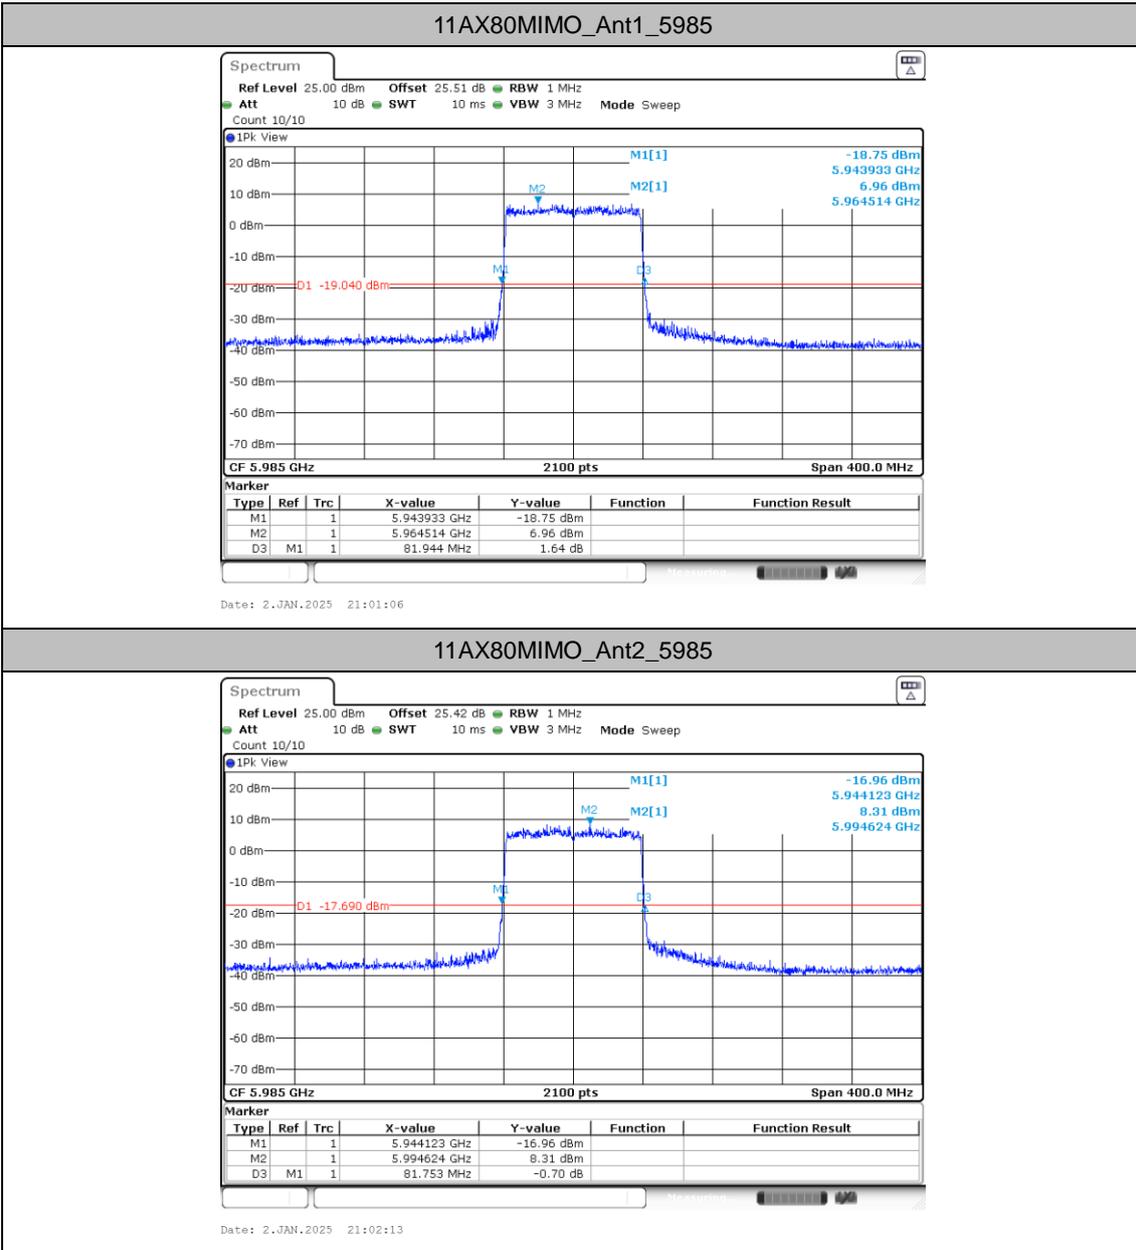


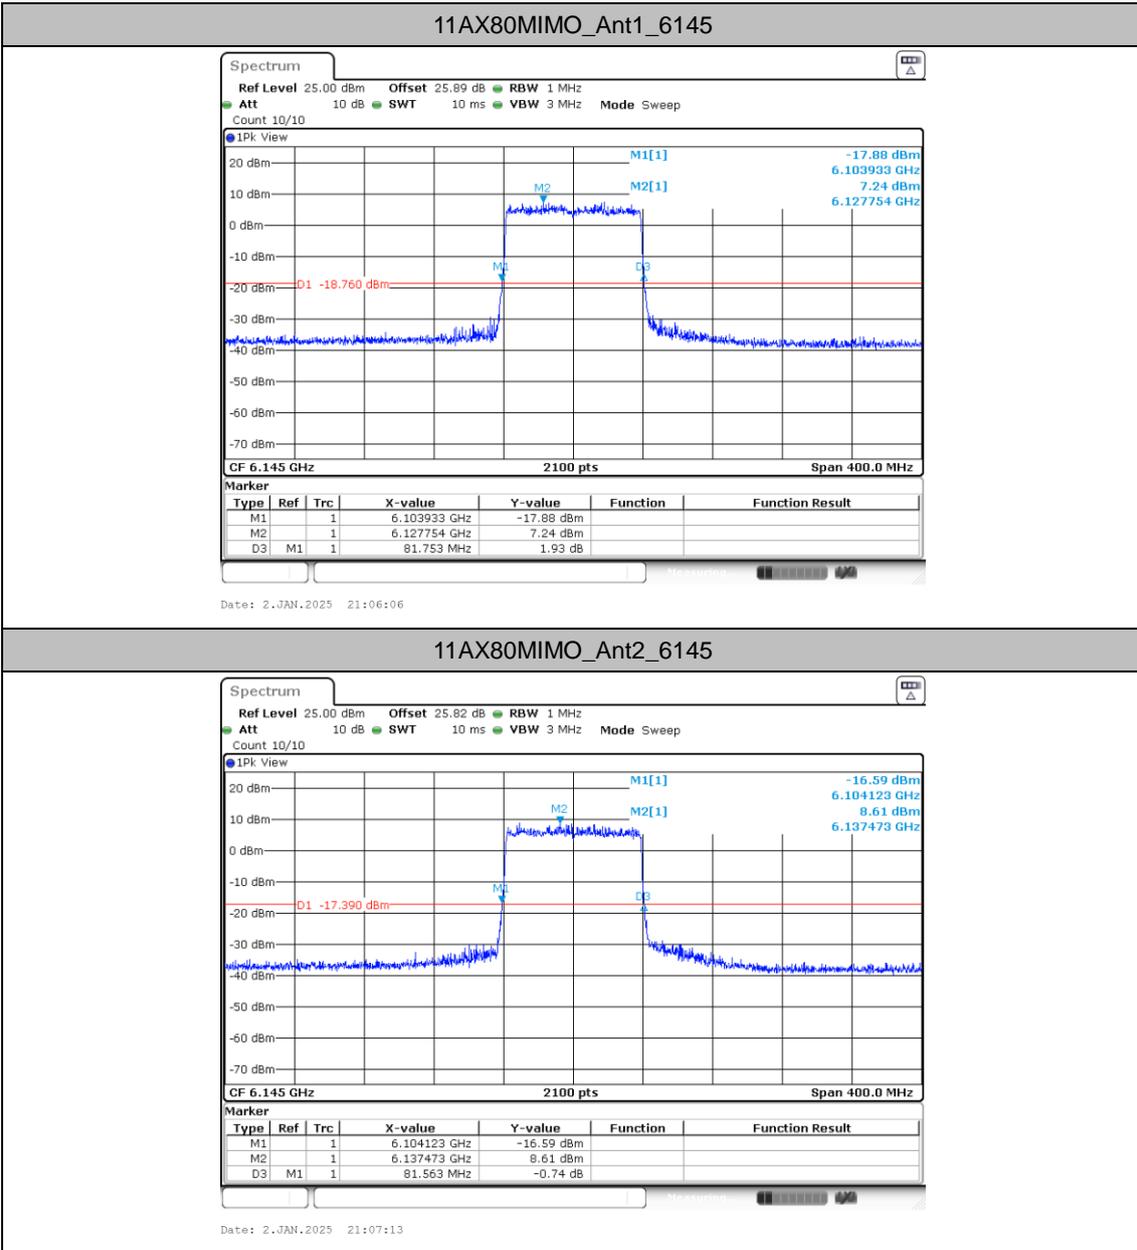

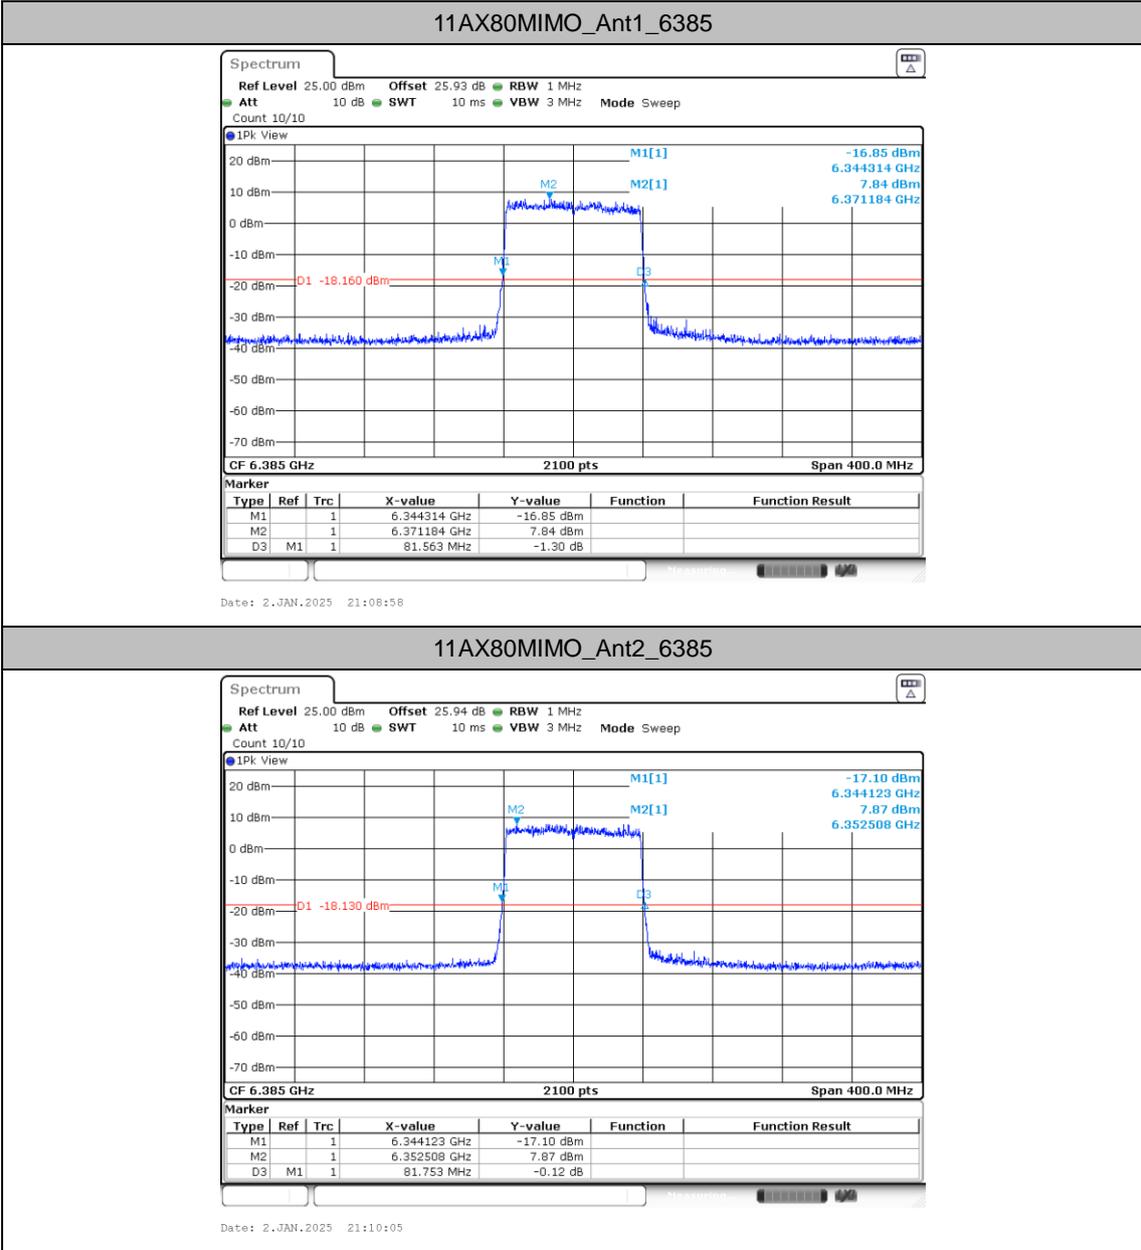




11AX80MIMO\_Ant1\_6465

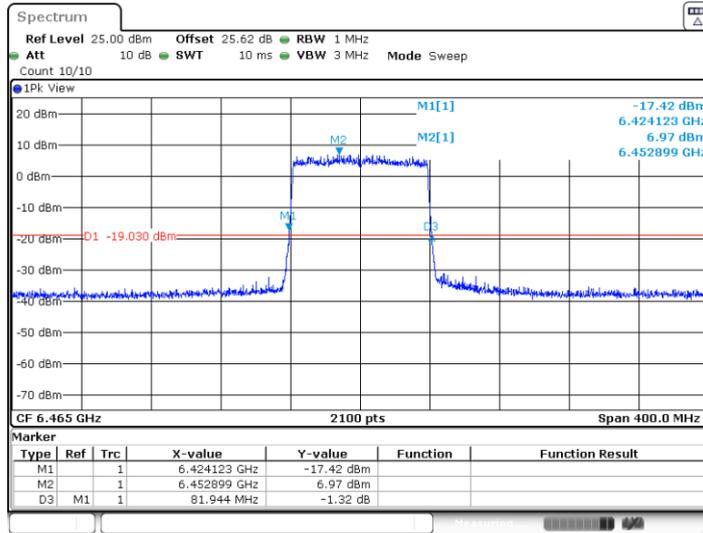

Date: 2.JAN.2025 21:13:22

11AX80MIMO\_Ant2\_6465

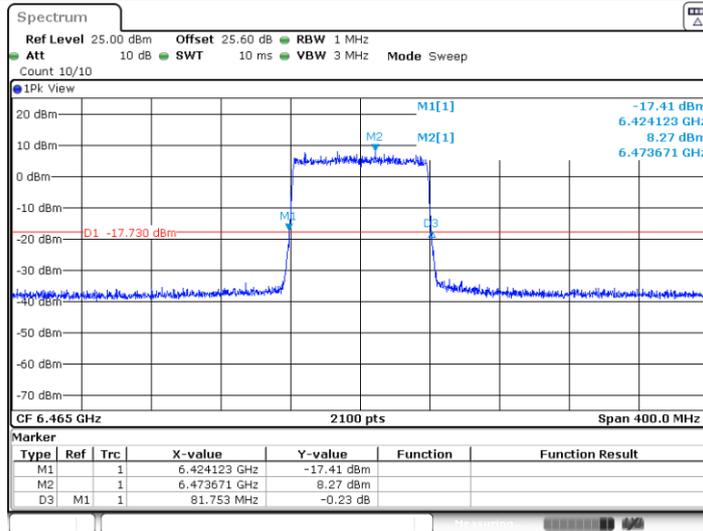

Date: 2.JAN.2025 21:14:28