



Test Report No.: RF170330W002-4



# FCC TEST REPORT

## (PART 24)

**Product:** Portable Tablet Computer

**Model Name:** TB-8704V

**FCC ID:** O57TB8704V

**Applicant:** Lenovo(Shanghai) Electronics Technology Co., Ltd.

**Address:** NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

**Manufacturer:** Lenovo PC HK Limited

**Address:** 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

**TEL:** +86 769 8593 5656

**FAX:** +86 769 8593 1080

**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Report No.:** RF170330W002-4

**Received Date:** Mar. 30, 2017

**Test Date:** Apr. 11, 2017 ~ May 10, 2017

**Issued Date:** May 11, 2017

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 CERTIFICATION ..... 5**

**2 SUMMARY OF TEST RESULTS ..... 6**

2.1 MEASUREMENT UNCERTAINTY ..... 6

2.2 TEST SITE AND INSTRUMENTS ..... 7

**3 GENERAL INFORMATION ..... 8**

3.1 GENERAL DESCRIPTION OF EUT ..... 8

3.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 11

3.3 DESCRIPTION OF SUPPORT UNITS ..... 12

3.4 TEST ITEM AND TEST CONFIGURATION ..... 12

3.5 EUT OPERATING CONDITIONS ..... 16

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 16

**4 TEST TYPES AND RESULTS ..... 17**

4.1 OUTPUT POWER MEASUREMENT ..... 17

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 17

4.1.2 TEST PROCEDURES ..... 17

4.1.3 TEST SETUP ..... 18

4.1.4 TEST RESULTS ..... 19

4.2 FREQUENCY STABILITY MEASUREMENT ..... 28

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 28

4.2.2 TEST PROCEDURE ..... 28

4.2.3 TEST SETUP ..... 28

4.2.4 TEST RESULTS ..... 29

4.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 36

4.3.1 TEST PROCEDURES ..... 36

4.3.2 TEST SETUP ..... 36

4.3.3 TEST RESULTS ..... 37

4.4 BAND EDGE MEASUREMENT ..... 44

4.4.1 LIMITS OF BAND EDGE MEASUREMENT ..... 44

4.4.2 TEST SETUP ..... 44

4.4.3 TEST PROCEDURES ..... 44

4.4.4 TEST RESULTS ..... 46

4.5 CONDUCTED SPURIOUS EMISSIONS ..... 53

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 53

4.5.2 TEST PROCEDURE ..... 53

4.5.3 TEST SETUP ..... 53

4.5.4 TEST RESULTS ..... 54

4.6 RADIATED EMISSION MEASUREMENT ..... 61

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 61

4.6.2 TEST PROCEDURES ..... 61

4.6.3 DEVIATION FROM TEST STANDARD ..... 61

4.6.4 TEST SETUP ..... 62

4.6.5 TEST RESULTS ..... 63

4.7 PEAK TO AVERAGE RATIO ..... 87

4.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 87

4.7.2 TEST SETUP ..... 87



**BUREAU  
VERITAS**

**Test Report No.: RF170330W002-4**

4.7.3	TEST PROCEDURES .....	87
4.7.4	TEST RESULTS .....	88
<b>5</b>	<b>INFORMATION ON THE TESTING LABORATORIES.....</b>	<b>92</b>
<b>6</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>93</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF170330W002-4

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF170330W002-4	Original release	May 11, 2017

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



# 1 CERTIFICATION

**PRODUCT:** Portable Tablet Computer  
**BRAND NAME:** Lenovo  
**MODEL NAME:** TB-8704V  
**APPLICANT:** Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**TESTED:** Apr. 11, 2017 ~ May 10, 2017  
**TEST SAMPLE:** Production Unit  
**STANDARDS:** **FCC Part 24, Subpart E**  
ANSI/TIA/EIA-603-D

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Harry, **DATE:** May 11, 2017  
(Harry Li/ Engineer)

**APPROVED BY :** [Signature], **DATE:** May 11, 2017  
( Sam Tung / Manager)



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent Isotropic Radiated Power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.232(d)	Peak to average ratio	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -12.94dB at 30.97MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GHz	4.06dB
	1GHz ~ 18GHz	4.58dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 05,17	Mar. 04,18
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Mar. 05,17	Mar. 04,18
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jul. 14, 16	Jul. 13, 17
Loop antenna	Daze	ZN30900A	0708	Nov. 28, 16	Nov. 27, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062557	May 18,16	May 17,17
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Mar. 12,16	Mar. 11,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 27, 16	Jul. 26, 17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Mar. 02,17	Mar. 01,18
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 02,17	Mar. 01,18
Amplifier	Burgeon	BPA-530	100220	Mar. 05,17	Mar. 04,18
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Feb. 10,17	Feb. 09,18
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 16,17	Apr. 15,18
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,16	Nov. 03,17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 10m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 502831.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Portable Tablet Computer	
<b>BRAND NAME</b>	Lenovo	
<b>MODEL NAME</b>	TB-8704V	
<b>POWER SUPPLY</b>	5.2Vdc (adapter or host equipment) 3.85Vdc (Li-Polymer, battery)	
<b>MODULATION TYPE</b>	<b>WCDMA</b> : BPSK <b>LTE Band 2</b> : QPSK, 16QAM	
<b>FREQUENCY RANGE</b>	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
<b>MAX. EIRP POWER</b>	<b>WCDMA</b>	260mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 1.4MHz</b>	618mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 3MHz</b>	610mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 5MHz</b>	617mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 10MHz</b>	625mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 15MHz</b>	615mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 20MHz</b>	555mW
<b>EMISSION DESIGNATOR</b>	<b>WCDMA</b>	4M12F9W
	<b>LTE Band 2</b> <b>Channel Bandwidth: 1.4MHz</b>	QPSK: 1M09G7D
		16QAM: 1M09W7D
	<b>LTE Band 2</b> <b>Channel Bandwidth: 3MHz</b>	QPSK: 2M68G7D
16QAM: 2M68W7D		



	<b>LTE Band 2</b>	QPSK: 4M48G7D
	<b>Channel Bandwidth: 5MHz</b>	16QAM: 4M46W7D
	<b>LTE Band 2</b>	QPSK: 8M93G7D
	<b>Channel Bandwidth: 10MHz</b>	16QAM: 8M93W7D
	<b>LTE Band 2</b>	QPSK: 13M4G7D
	<b>Channel Bandwidth: 15MHz</b>	16QAM: 13M4W7D
	<b>LTE Band 2</b>	QPSK: 17M9G7D
	<b>Channel Bandwidth: 20MHz</b>	16QAM: 17M8W7D
<b>ANTENNA TYPE</b>	Fixed Internal antenna with -4dBi gain	
<b>HW VERSION</b>	Lenovo Tablet TB-8704V	
<b>SW VERSION</b>	TB-8704V_RF01_170504	
<b>I/O PORTS</b>	Refer to user's manual	
<b>CABLE SUPPLIED</b>	USB cable: non-shielded, detachable, 1.0m	

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- There were Sample A and B for this project, the difference is as below:

SAMPLE	EUT CONFIGURATION INFORMATION
<b>A</b>	(LCD+TP)1+ Battery1 + eMMC 1(16G+2G)+Front Camera1+Back Camera1+ USB Cable1 + Adapter 1
<b>B</b>	(LCD+TP)2+ Battery2 + eMMC 1 (16G+2G)+Front Camera2+Back Camera2 + USB Cable2+ Adapter 2

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.




**List of Accessories:**

Accessories	Brand	Model	Manufacturer	Specification
AC Adapter 1	Acbel	C-P35	AcBel	I/P:100-240Vac, 300mA O/P: 5.2Vdc, 2000mA
AC Adapter 2	Huntkey	C-P35	Huntkey	I/P:100-240Vac, 500mA O/P: 5.2Vdc, 2000mA
Battery 1	Sunwoda	L16D1P34	Sunwoda	Rating: 3.85Vdc, 4850mAh
Battery 2	SCUD	L16D1P34	SCUD	Rating: 3.85Vdc, 4850mAh
USB Cable 1	Deren	-	Deren	1.0m non-shielded cable w/o core
USB Cable 2	Saibao	-	Saibao	1.0m non-shielded cable w/o core
LCD+TP Panel 1	o-FILM&INX	MTF-080-2711-04IKA	o-FILM&INX	8"
LCD+TP Panel 2	GIS&BOE	TC080GFL06V.C	GIS&BOE	8"
eMMC 1	Samsung	KMQE10013M-B318	Samsung	16G+2G
eMMC 2	Hynix	H9TQ17ABJTBCUR-KUM	Hynix	16G+2G
Front Camera1	Qtech	F5695AK	Qtech	5M
Front Camera2	AVC	CCBFL05006	AVC	5M
Back Camera1	Qtech	FX219BH	Qtech	8M
Back Camera2	o-FILM	OV8856	o-FILM	8M




### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

#### FOR RADIATION EMISSION TEST

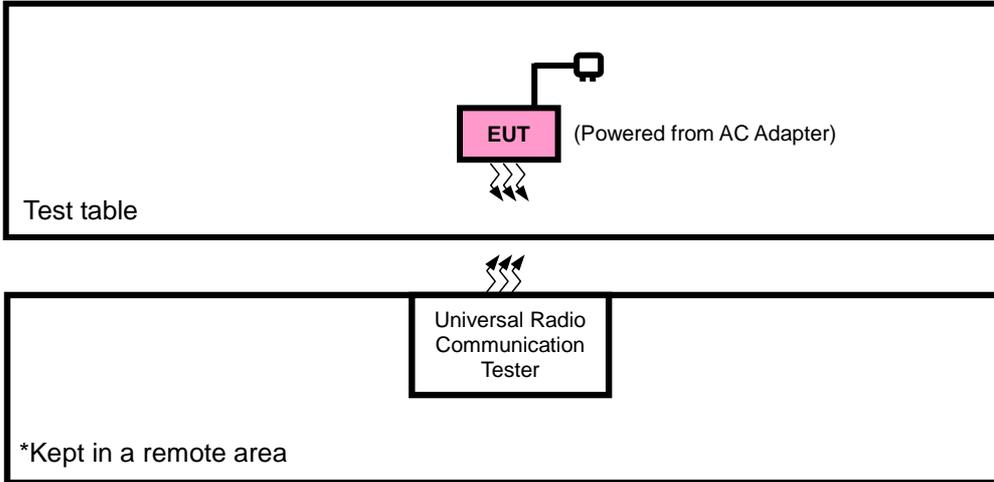

#### FOR CONDUCTED & E.I.R.P. TEST

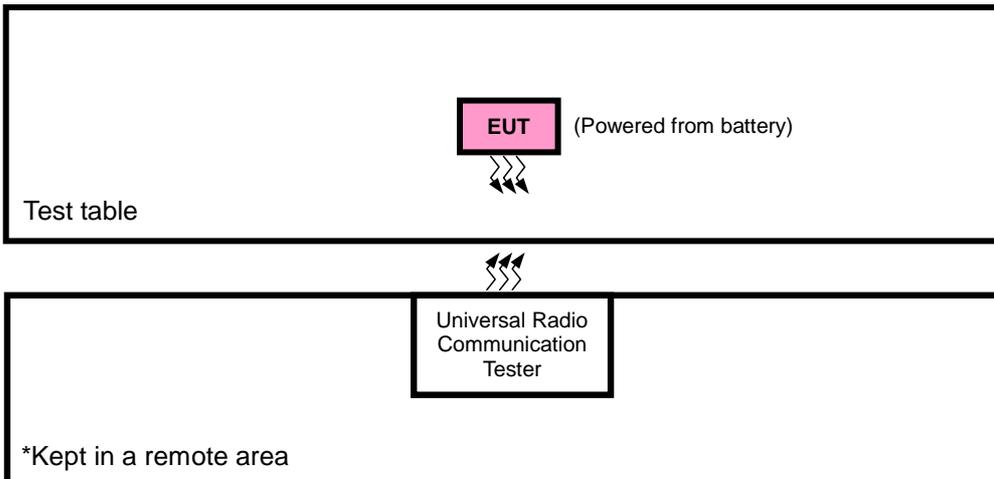



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).

### 3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case in EIRP and radiated emission was found when positioned on X-plane for WCDMA and X-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with WCDMA or LTE link
B	EUT + Battery with WCDMA or LTE link



**WCDMA MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9400	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUETED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

**LTE BAND 2**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK	1 RB / 5 RB Offset		
			19185	3MHz	QPSK	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK	1 RB / 0 RB Offset		
			19175	5MHz	QPSK	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK	1 RB / 14 RB Offset		
			19150	10MHz	QPSK	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK	1 RB / 0 RB Offset		
			19125	15MHz	QPSK	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK	1 RB / 24 RB Offset		
			19100	20MHz	QPSK	25 RB / 0 RB Offset		
		B	CONDCUDETED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	50 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 49 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	50 RB / 0 RB Offset
18675 to 19125	18675, 18900, 19125			15MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		



**BUREAU  
VERITAS**

**Test Report No.: RF170330W002-4**

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	3.85Vdc from Battery	Wenliang Wu
FREQUENCY STABILITY	23deg. C, 61%RH	3.85Vdc from Battery	Wenliang Wu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	3.85Vdc from Battery	Wenliang Wu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	3.85Vdc from Battery	Moon Xiong
BAND EDGE	23deg. C, 61%RH	3.85Vdc from Battery	Moon Xiong
CONDCUDED EMISSION	23deg. C, 61%RH	3.85Vdc from Battery	Moon Xiong
RADIATED EMISSION	23deg. C, 66%RH	5.2Vdc from adapter	Tony Zou

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



### 3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-D**

**NOTE:** All test items have been performed and recorded as per the above standards.



## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 4.1.2 TEST PROCEDURES

##### EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5MHz for WCDMA mode and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

##### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

### 4.1.3 TEST SETUP

#### EIRP MEASUREMENT:

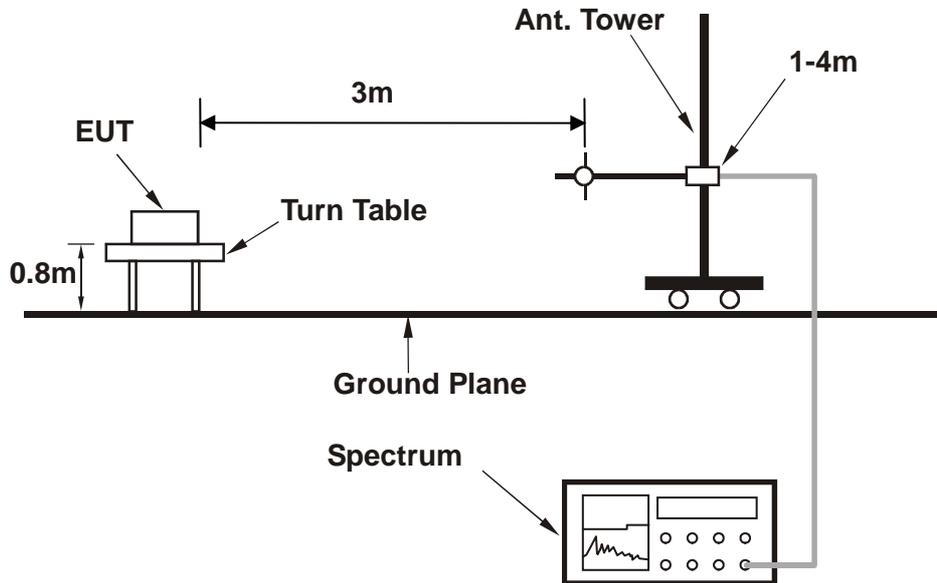

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.1.4 TEST RESULTS

##### CONDUCTED OUTPUT POWER (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.94	<b>23.99</b>	23.93
HSPA			
HSDPA Subtest-1	22.52	22.57	22.51
HSDPA Subtest-2	22.48	22.53	22.47
HSDPA Subtest-3	21.96	22.01	21.95
HSDPA Subtest-4	21.92	21.97	21.91
HSUPA Subtest-1	22.61	22.66	22.60
HSUPA Subtest-2	20.66	20.71	20.65
HSUPA Subtest-3	21.63	21.68	21.62
HSUPA Subtest-4	20.68	20.73	20.67
HSUPA Subtest-5	22.70	22.75	22.69



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	3GPP MPR (dB)
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
1.4MHz	QPSK	1	0	23.65	23.68	23.56	0
		1	2	23.60	23.63	23.51	0
		1	5	23.53	23.56	23.44	0
		3	0	23.64	23.67	23.55	0
		3	1	23.59	23.62	23.50	0
		3	3	23.52	23.55	23.43	0
		6	0	22.65	22.68	22.56	1
	16QAM	1	0	22.65	22.68	22.56	1
		1	2	22.60	22.63	22.51	1
		1	5	22.57	22.60	22.48	1
		3	0	22.63	22.66	22.54	1
		3	1	22.58	22.61	22.49	1
		3	3	22.55	22.58	22.46	1
		6	0	21.66	21.69	21.57	2
BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	3GPP MPR (dB)
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
3 MHz	QPSK	1	0	23.68	23.71	23.59	0
		1	7	23.63	23.66	23.54	0
		1	14	23.56	23.59	23.47	0
		8	0	22.67	22.70	22.58	1
		8	3	22.61	22.64	22.52	1
		8	7	22.57	22.60	22.48	1
		15	0	22.68	22.71	22.59	1
	16QAM	1	0	22.68	22.71	22.59	1
		1	7	22.63	22.66	22.54	1
		1	14	22.60	22.63	22.51	1
		8	0	21.68	21.71	21.59	2
		8	3	21.65	21.68	21.56	2
		8	7	21.60	21.63	21.51	2
		15	0	21.69	21.72	21.60	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	3GPP MPR (dB)
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
5 MHz	QPSK	1	0	23.71	23.74	23.62	0
		1	12	23.66	23.69	23.57	0
		1	24	23.59	23.62	23.50	0
		12	0	22.70	22.73	22.61	1
		12	6	22.64	22.67	22.55	1
		12	13	22.60	22.63	22.51	1
		25	0	22.71	22.74	22.62	1
	16QAM	1	0	22.71	22.74	22.62	1
		1	12	22.66	22.69	22.57	1
		1	24	22.63	22.66	22.54	1
		12	0	21.71	21.74	21.62	2
		12	6	21.68	21.71	21.59	2
		12	13	21.63	21.66	21.54	2
		25	0	21.72	21.75	21.63	2
BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	3GPP MPR (dB)
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
10 MHz	QPSK	1	0	23.73	23.76	23.64	0
		1	24	23.68	23.71	23.59	0
		1	49	23.61	23.64	23.52	0
		25	0	22.72	22.75	22.63	1
		25	12	22.66	22.69	22.57	1
		25	25	22.62	22.65	22.53	1
		50	0	22.73	22.76	22.64	1
	16QAM	1	0	22.73	22.76	22.64	1
		1	24	22.68	22.71	22.59	1
		1	49	22.65	22.68	22.56	1
		25	0	21.73	21.76	21.64	2
		25	12	21.70	21.73	21.61	2
		25	25	21.65	21.68	21.56	2
		50	0	21.74	21.77	21.65	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	3GPP MPR (dB)
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
15 MHz	QPSK	1	0	23.76	23.79	23.67	0
		1	37	23.71	23.74	23.62	0
		1	74	23.64	23.67	23.55	0
		36	0	22.75	22.78	22.66	1
		36	19	22.69	22.72	22.60	1
		36	39	22.65	22.68	22.56	1
		75	0	22.76	22.79	22.67	1
	16QAM	1	0	22.76	22.79	22.67	1
		1	37	22.71	22.74	22.62	1
		1	74	22.68	22.71	22.59	1
		36	0	21.76	21.79	21.67	2
		36	19	21.73	21.76	21.64	2
		36	39	21.68	21.71	21.59	2
		75	0	21.77	21.80	21.68	2
BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	3GPP MPR (dB)
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
20MHz	QPSK	1	0	23.81	<b>23.84</b>	23.72	0
		1	50	23.76	23.79	23.67	0
		1	99	23.69	23.72	23.60	0
		50	0	22.80	22.83	22.71	1
		50	25	22.74	22.77	22.65	1
		50	50	22.70	22.73	22.61	1
		100	0	22.81	22.84	22.72	1
	16QAM	1	0	22.81	22.84	22.72	1
		1	50	22.76	22.79	22.67	1
		1	99	22.73	22.76	22.64	1
		50	0	21.81	21.84	21.72	2
		50	25	21.78	21.81	21.69	2
		50	50	21.73	21.76	21.64	2
		100	0	21.82	21.85	21.73	2



**EIRP POWER (dBm)**

**WCDMA**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
9262	1852.4	-24.99	43.83	18.84	76.56	H
9400	1880.0	-25.04	43.57	18.53	71.29	H
9538	1907.6	-25.86	44.57	18.71	74.30	H
9262	1852.4	-23.86	46.39	22.53	179.06	V
9400	1880.0	-22.95	47.10	24.15	<b>259.90</b>	V
9538	1907.6	-23.44	45.98	22.54	179.31	V

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-22.28	43.83	21.55	143.02	H	2
18900	1880.0	-21.45	43.57	22.12	162.93	H	2
19193	1909.3	-22.21	44.32	22.11	162.52	H	2
18607	1850.7	-19.80	46.41	26.61	458.25	V	2
18900	1880.0	-19.16	47.07	27.91	<b>618.02</b>	V	2
19193	1909.3	-19.99	45.88	25.89	388.51	V	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-23.15	43.83	20.68	117.06	H	2
18900	1880.0	-22.38	43.57	21.19	131.52	H	2
19193	1909.3	-23.17	44.32	21.15	130.29	H	2
18607	1850.7	-20.67	46.41	25.74	375.06	V	2
18900	1880.0	-20.09	47.07	26.98	498.88	V	2
19193	1909.3	-20.95	45.88	24.93	311.46	V	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-22.26	43.82	21.56	143.28	H	2
18900	1880.0	-21.51	43.57	22.06	160.69	H	2
19185	1908.5	-22.16	44.38	22.22	166.57	H	2
18615	1851.5	-19.78	46.45	26.67	464.62	V	2
18900	1880.0	-19.22	47.07	27.85	<b>609.54</b>	V	2
19185	1908.5	-19.94	45.88	25.94	392.64	V	2



**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-23.33	43.82	20.49	112.00	H	2
18900	1880.0	-22.40	43.57	21.17	130.92	H	2
19185	1908.5	-23.15	44.38	21.23	132.62	H	2
18615	1851.5	-20.85	46.45	25.60	363.16	V	2
18900	1880.0	-20.11	47.07	26.96	496.59	V	2
19185	1908.5	-20.93	45.88	24.95	312.61	V	2

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-22.32	43.83	21.51	141.51	H	2
18900	1880.0	-21.46	43.57	22.11	162.55	H	2
19175	1907.5	-22.11	44.19	22.08	161.36	H	2
18625	1852.5	-19.84	46.46	26.62	459.52	V	2
18900	1880.0	-19.17	47.07	27.90	<b>616.60</b>	V	2
19175	1907.5	-19.89	45.89	26.00	398.20	V	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-23.15	43.83	20.68	116.90	H	2
18900	1880.0	-22.48	43.57	21.09	128.53	H	2
19175	1907.5	-23.21	44.19	20.98	125.26	H	2
18625	1852.5	-20.67	46.46	25.79	379.58	V	2
18900	1880.0	-20.19	47.07	26.88	487.53	V	2
19175	1907.5	-20.99	45.89	24.90	309.10	V	2



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-22.13	43.86	21.73	148.97	H	2
18900	1880.0	-21.40	43.57	22.17	164.82	H	2
19150	1905.0	-21.98	43.99	22.01	159.00	H	2
18650	1855.0	-19.65	46.28	26.63	460.04	V	2
18900	1880.0	-19.11	47.07	27.96	<b>625.17</b>	V	2
19150	1905.0	-19.76	45.92	26.16	413.24	V	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-23.28	43.86	20.58	114.31	H	2
18900	1880.0	-22.50	43.57	21.07	127.94	H	2
19150	1905.0	-23.14	43.99	20.85	121.73	H	2
18650	1855.0	-20.80	46.28	25.48	353.02	V	2
18900	1880.0	-20.21	47.07	26.86	485.29	V	2
19150	1905.0	-20.92	45.92	25.00	316.37	V	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-22.14	43.99	21.85	153.18	H	2
18900	1880.0	-21.47	43.57	22.10	162.18	H	2
19125	1902.5	-22.05	43.66	21.61	144.71	H	2
18675	1857.5	-19.66	45.93	26.27	423.35	V	2
18900	1880.0	-19.18	47.07	27.89	<b>615.18</b>	V	2
19125	1902.5	-19.83	46.20	26.37	433.71	V	2



CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-23.00	43.99	20.99	125.66	H	2
18900	1880.0	-22.34	43.57	21.23	132.74	H	2
19125	1902.5	-22.90	43.66	20.76	118.99	H	2
18675	1857.5	-20.52	45.93	25.41	347.30	V	2
18900	1880.0	-20.05	47.07	27.02	503.50	V	2
19125	1902.5	-20.68	46.20	25.52	356.62	V	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-22.72	43.50	20.78	119.65	H	2
18900	1880.0	-21.92	43.57	21.65	146.22	H	2
19100	1900.0	-22.63	43.62	20.99	125.49	H	2
18700	1860.0	-20.24	45.57	25.33	341.19	V	2
18900	1880.0	-19.63	47.07	27.44	<b>554.63</b>	V	2
19100	1900.0	-20.41	46.26	25.85	384.68	V	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-23.65	43.50	19.85	96.58	H	2
18900	1880.0	-22.99	43.57	20.58	114.29	H	2
19100	1900.0	-23.46	43.62	20.16	103.66	H	2
18700	1860.0	-21.17	45.57	24.40	275.42	V	2
18900	1880.0	-20.70	47.07	26.37	433.51	V	2
19100	1900.0	-21.24	46.26	25.02	317.76	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

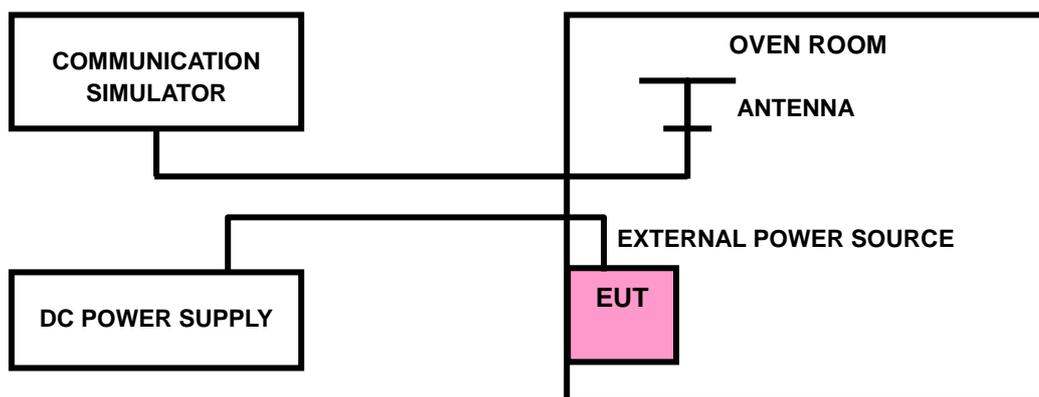



#### 4.2.4 TEST RESULTS

#### WCDMA BAND II

#### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
3.85	0.0011	0.0012	2.5
3.4	-0.0013	-0.0014	2.5
4.4	0.0010	0.0011	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

#### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0057	-0.0055	2.5
-20	-0.0051	-0.0049	2.5
-10	-0.0046	-0.0043	2.5
0	-0.0040	-0.0037	2.5
10	-0.0033	-0.0032	2.5
20	-0.0027	-0.0025	2.5
30	-0.0021	-0.0019	2.5
40	-0.0014	-0.0013	2.5
50	-0.0008	-0.0007	2.5
60	-0.0002	-0.0001	2.5



**LTE BAND 2**

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0009	0.0007	2.5
3.4	-0.0011	-0.0010	2.5
4.4	0.0011	0.0010	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0056	-0.0054	2.5
-20	-0.0052	-0.0048	2.5
-10	-0.0046	-0.0041	2.5
0	-0.0039	-0.0036	2.5
10	-0.0033	-0.0029	2.5
20	-0.0026	-0.0023	2.5
30	-0.0020	-0.0017	2.5
40	-0.0014	-0.0011	2.5
50	-0.0008	-0.0006	2.5
60	-0.0001	0.0000	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0010	0.0011	2.5
3.4	-0.0013	-0.0013	2.5
4.4	-0.0011	0.0012	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0057	-0.0056	2.5
-20	-0.0051	-0.0050	2.5
-10	-0.0044	-0.0044	2.5
0	-0.0038	-0.0038	2.5
10	-0.0032	-0.0032	2.5
20	-0.0025	-0.0026	2.5
30	-0.0018	-0.0020	2.5
40	-0.0011	-0.0013	2.5
50	-0.0005	-0.0008	2.5
60	0.0001	-0.0001	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0011	0.0012	2.5
3.4	-0.0014	-0.0012	2.5
4.4	0.0012	0.0011	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0053	-0.0054	2.5
-20	-0.0047	-0.0048	2.5
-10	-0.0040	-0.0041	2.5
0	-0.0034	-0.0034	2.5
10	-0.0029	-0.0028	2.5
20	-0.0023	-0.0023	2.5
30	-0.0017	-0.0017	2.5
40	-0.0011	-0.0010	2.5
50	-0.0004	-0.0004	2.5
60	0.0002	0.0002	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0008	0.0009	2.5
3.4	-0.0011	-0.0011	2.5
4.4	0.0009	0.0010	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0054	0.0051	2.5
-20	-0.0047	-0.0044	2.5
-10	-0.0040	-0.0037	2.5
0	-0.0034	-0.0033	2.5
10	-0.0028	-0.0028	2.5
20	-0.0022	-0.0022	2.5
30	-0.0016	-0.0017	2.5
40	-0.0009	-0.0011	2.5
50	-0.0003	-0.0005	2.5
60	0.0003	0.0001	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0007	0.0008	2.5
3.4	-0.0009	-0.0010	2.5
4.4	0.0008	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0054	2.5
-20	-0.0049	-0.0048	2.5
-10	-0.0042	-0.0042	2.5
0	-0.0035	-0.0035	2.5
10	-0.0029	-0.0029	2.5
20	-0.0023	-0.0023	2.5
30	-0.0017	-0.0017	2.5
40	-0.0012	-0.0011	2.5
50	-0.0006	-0.0006	2.5
60	0.0001	-0.0001	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0007	0.0008	2.5
3.4	-0.0008	-0.0010	2.5
4.4	0.0007	0.0008	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.4Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0053	2.5
-20	-0.0045	-0.0047	2.5
-10	-0.0039	-0.0040	2.5
0	-0.0033	-0.0034	2.5
10	-0.0027	-0.0029	2.5
20	-0.0021	-0.0022	2.5
30	-0.0014	-0.0016	2.5
40	-0.0008	-0.0010	2.5
50	-0.0002	-0.0004	2.5
60	0.0005	0.0001	2.5




### 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 4.3.2 TEST SETUP

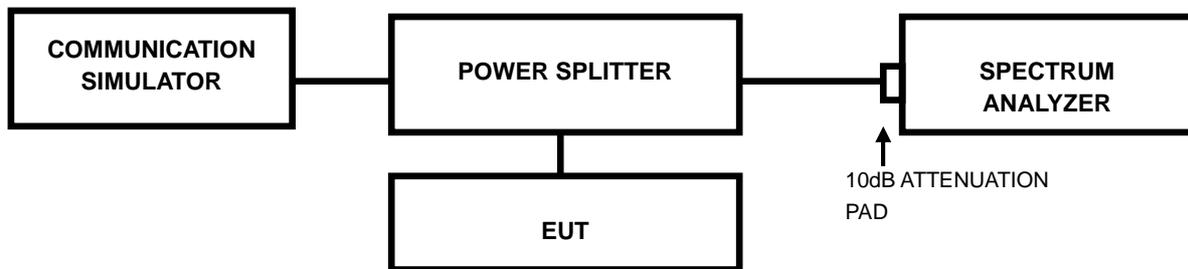




BUREAU VERITAS

Test Report No.: RF170330W002-4

### 4.3.3 TEST RESULTS

CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	CHANNEL	Frequency (MHz)	26dB Bandwidth (MHz)
		WCDMA			WCDMA
9262	1852.4	4.12	9262	1852.4	4.70
9400	1880.0	4.12	9400	1880.0	4.71
9538	1907.6	4.11	9538	1907.6	4.69

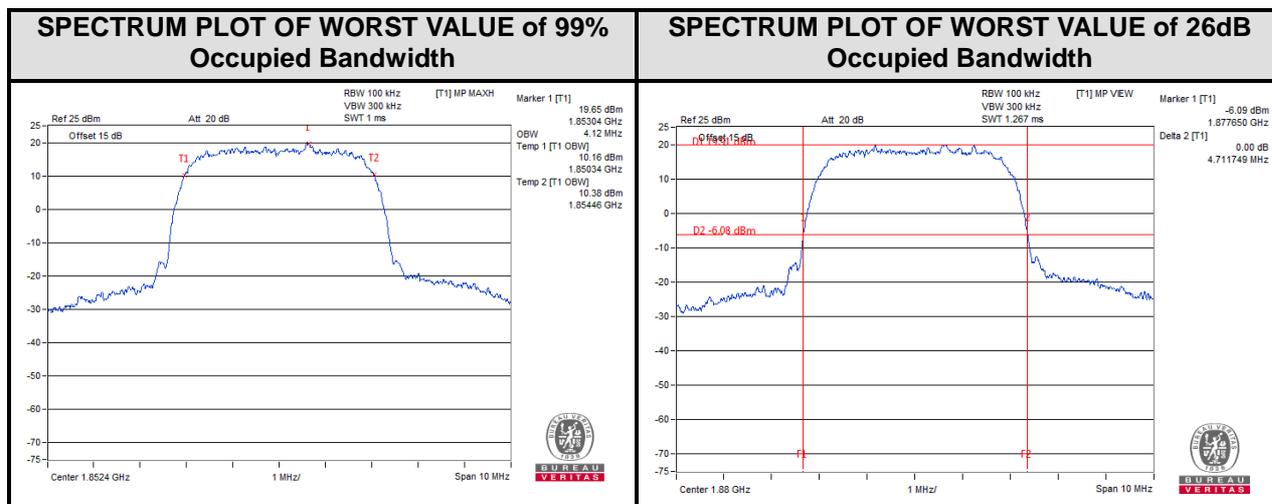

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

LTE band 2							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.08	1.08	18607	1850.7	1.27	1.28
18900	1880	1.08	1.08	18900	1880	1.25	1.28
19193	1909.3	1.09	1.09	19193	1909.3	1.27	1.29

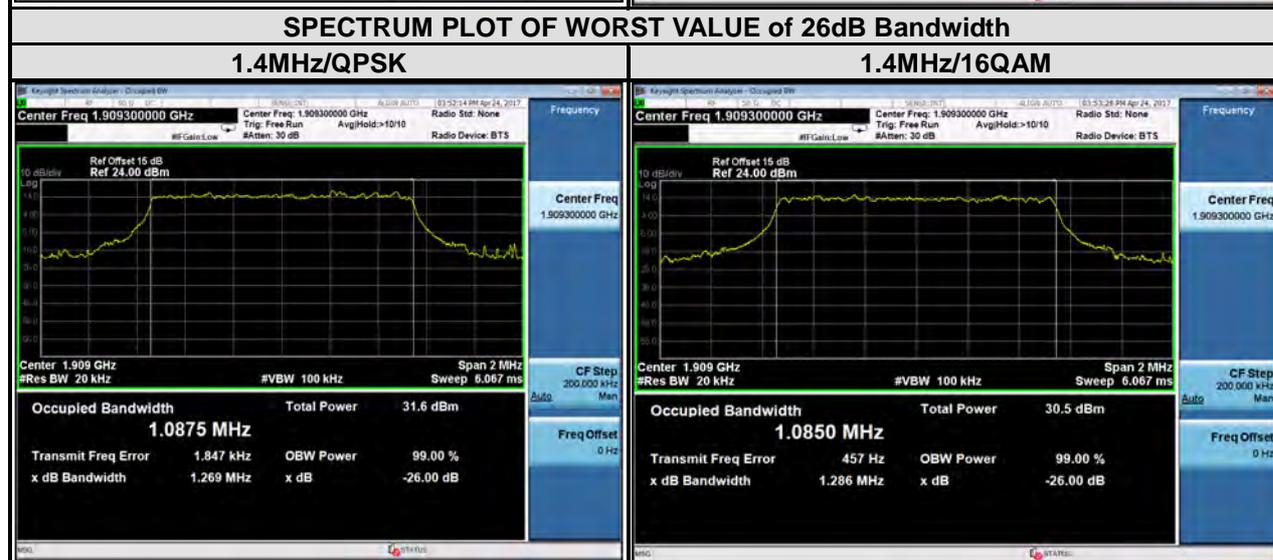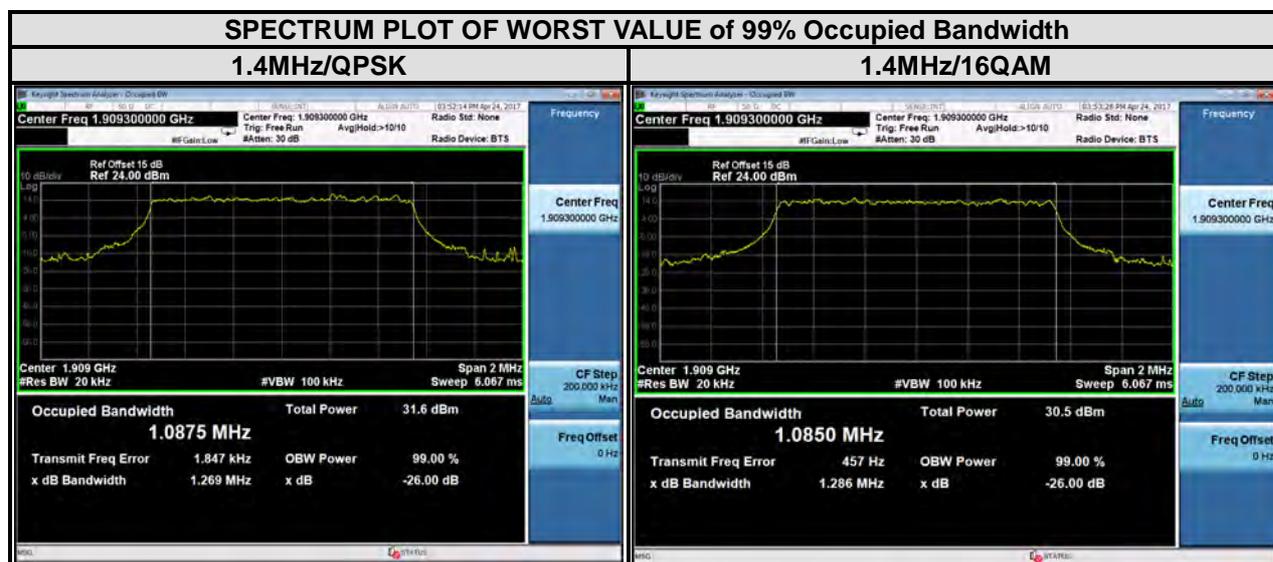



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)





LTE band 2							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18615	1851.5	2.68	2.68	18615	1851.5	2.95	2.94
18900	1880	2.68	2.68	18900	1880	2.93	2.92
19185	1908.5	2.68	2.68	19185	1908.5	2.95	2.93

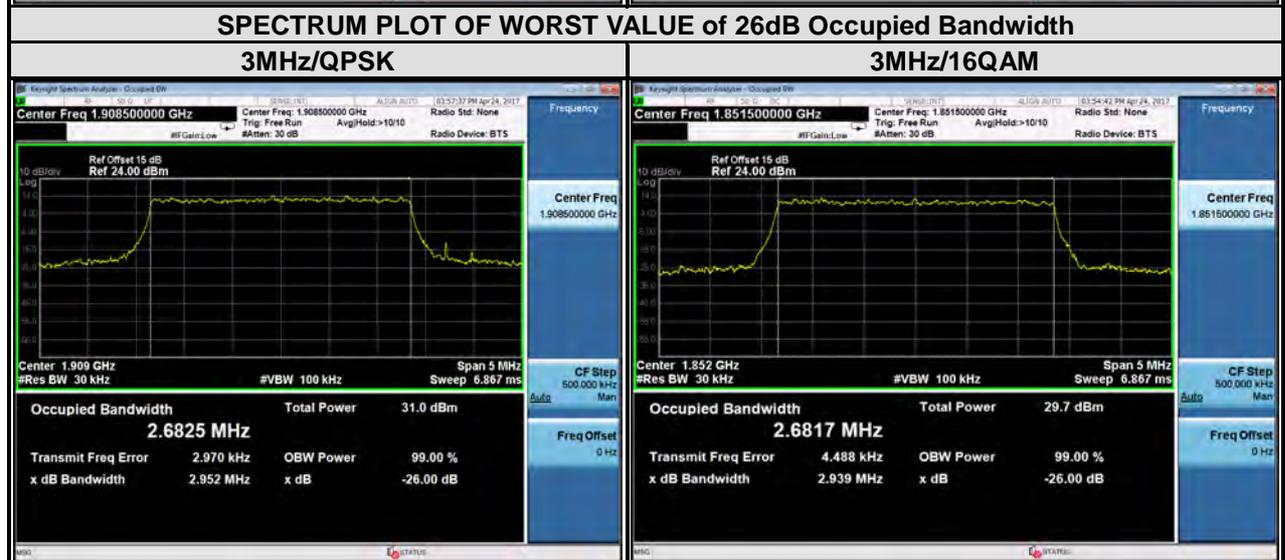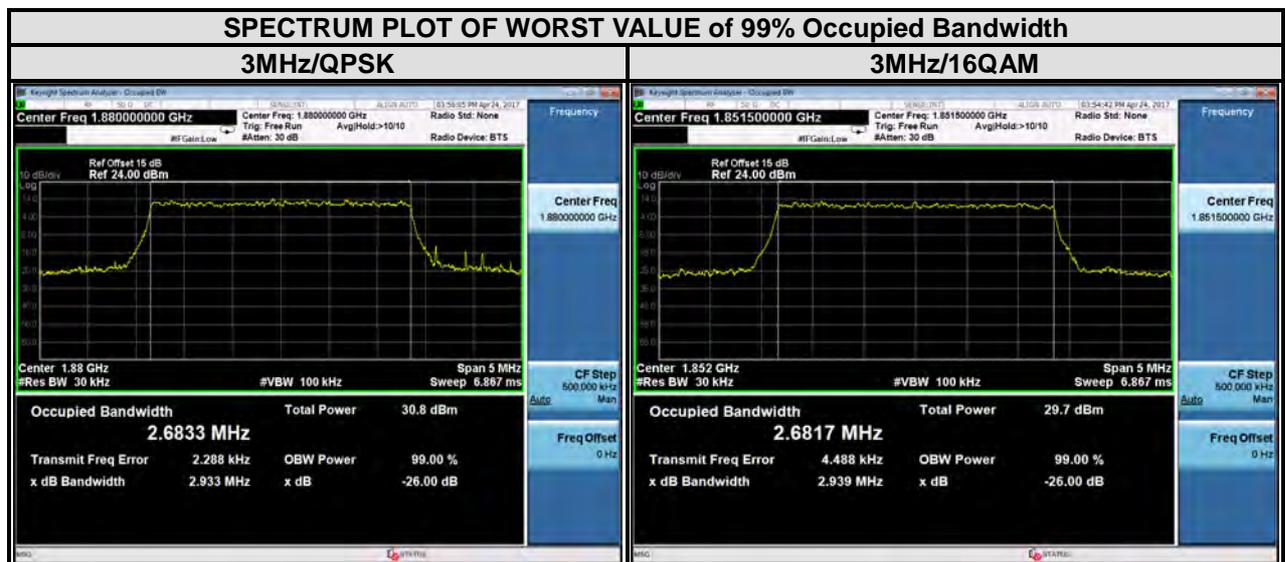





LTE band 2							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.48	4.46	18625	1852.5	4.90	4.88
18900	1880	4.47	4.46	18900	1880	4.89	4.87
19175	1907.5	4.47	4.46	19175	1907.5	4.90	4.86

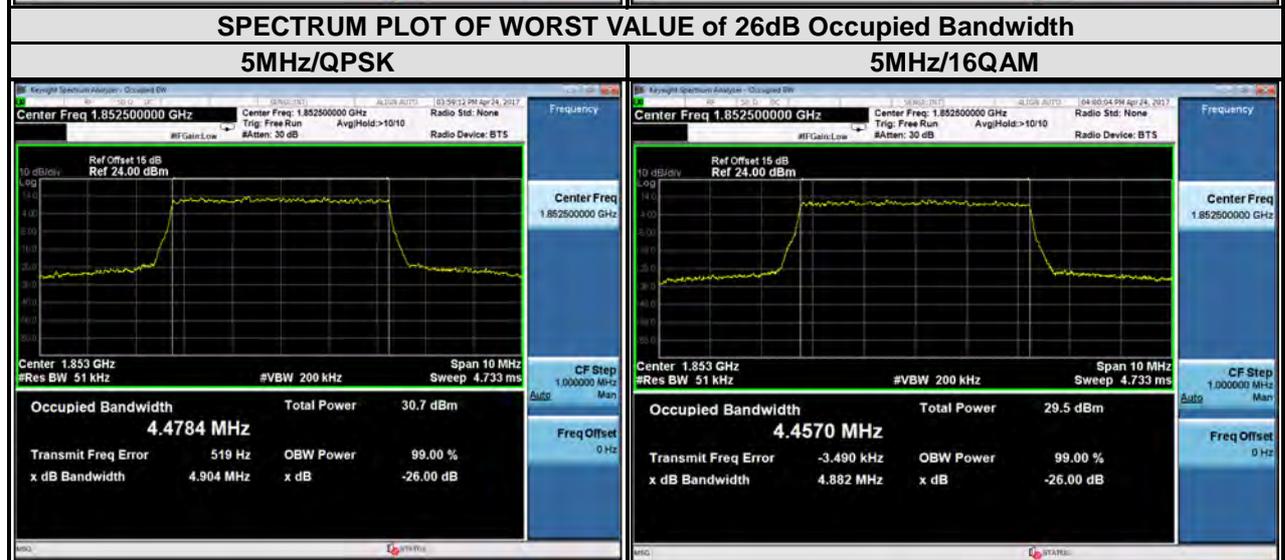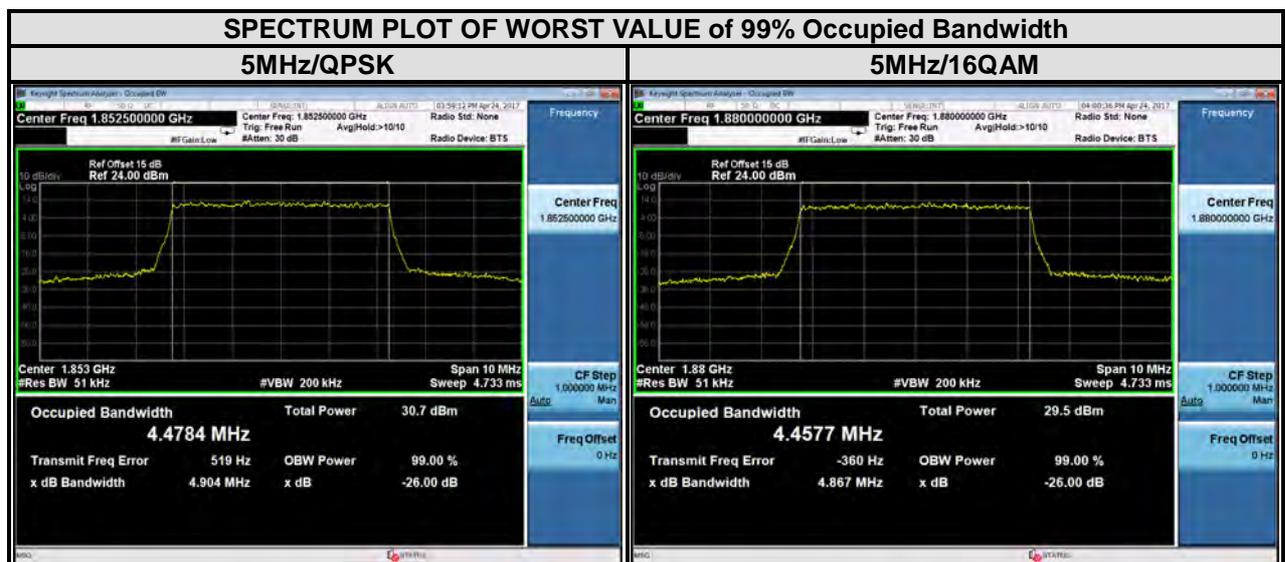





LTE band 2							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18650	1855	8.92	8.89	18650	1855	9.70	9.66
18900	1880	8.92	8.92	18900	1880	9.64	9.72
19150	1905	8.93	8.93	19150	1905	9.71	9.74

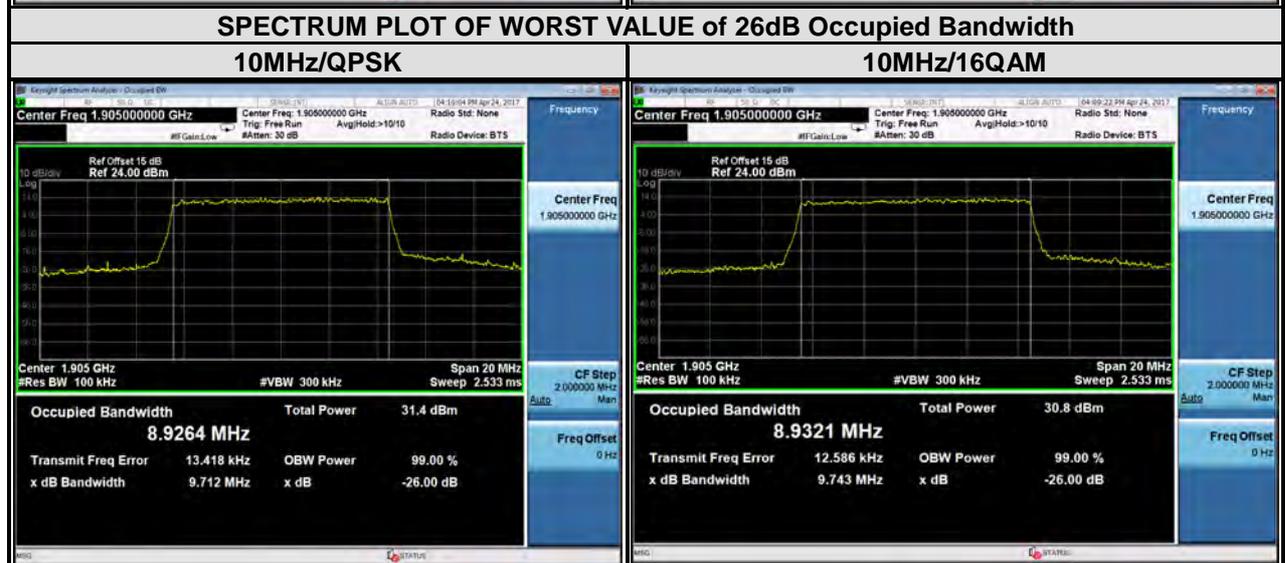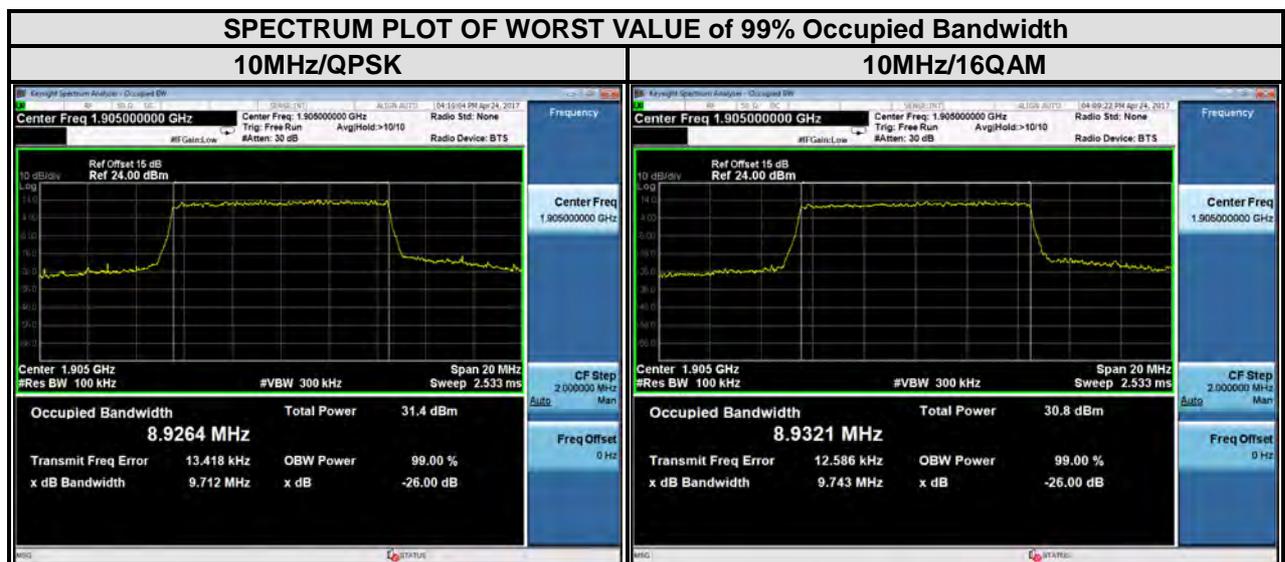





LTE band 2							
Channel Bandwidth : 15 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.38	13.38	18675	1857.5	14.28	14.28
18900	1880	13.34	13.34	18900	1880	14.34	14.40
19125	1902.5	13.38	13.38	19125	1902.5	14.38	14.43

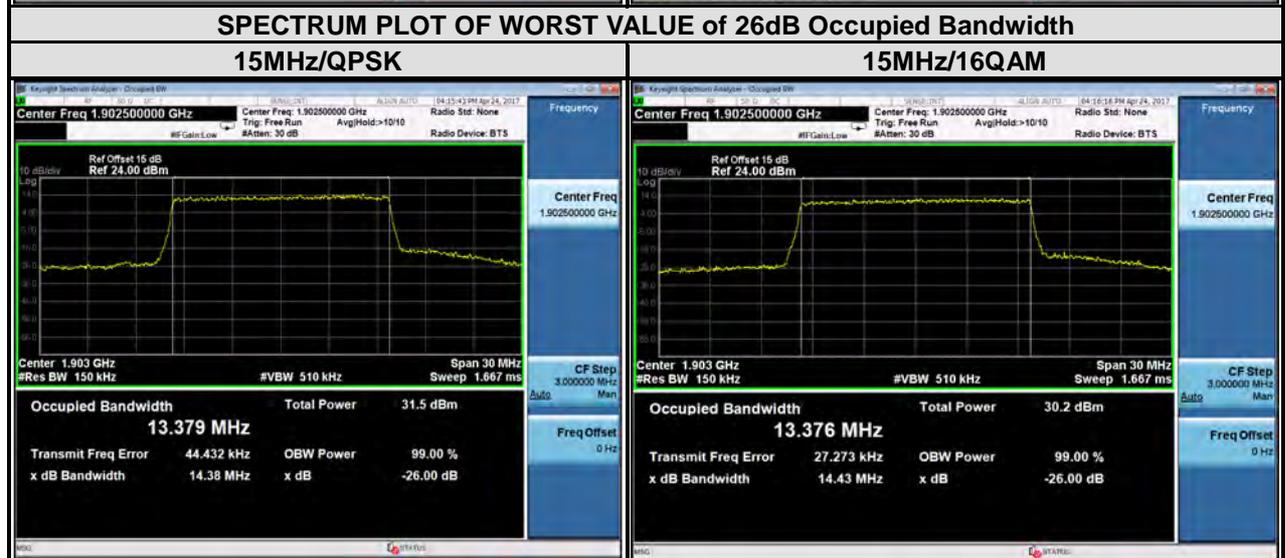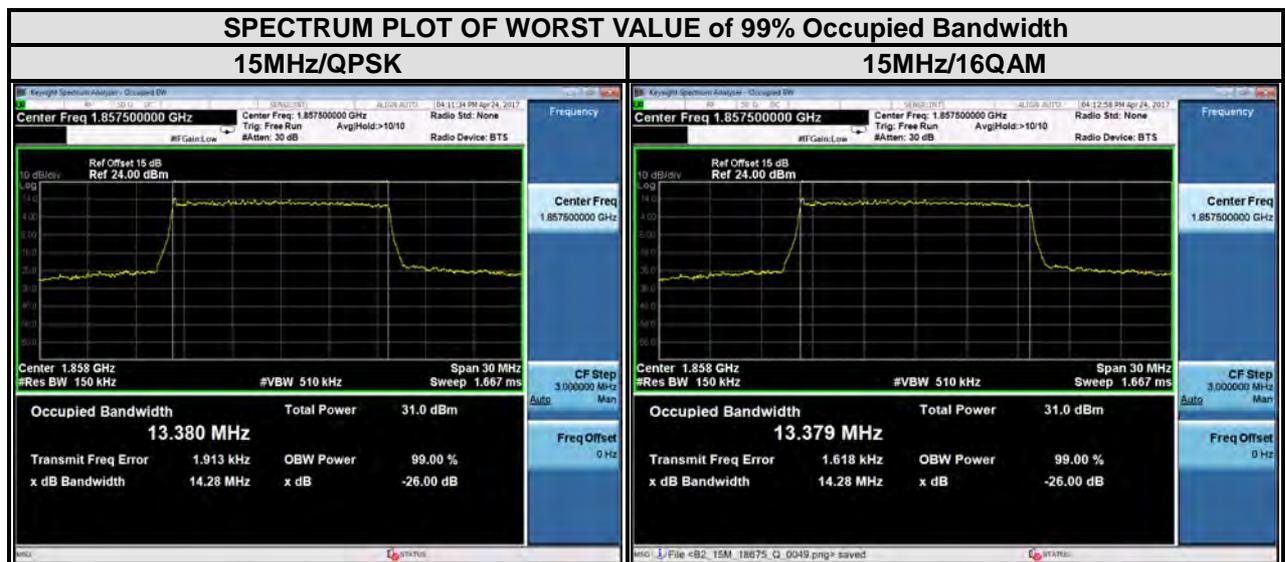



LTE band 2							
Channel Bandwidth : 20 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18700	1860	17.88	17.83	18700	1860	19.18	19.20
18900	1880	17.85	17.75	18900	1880	19.00	18.95
19100	1900	17.93	17.84	19100	1900	19.33	19.09

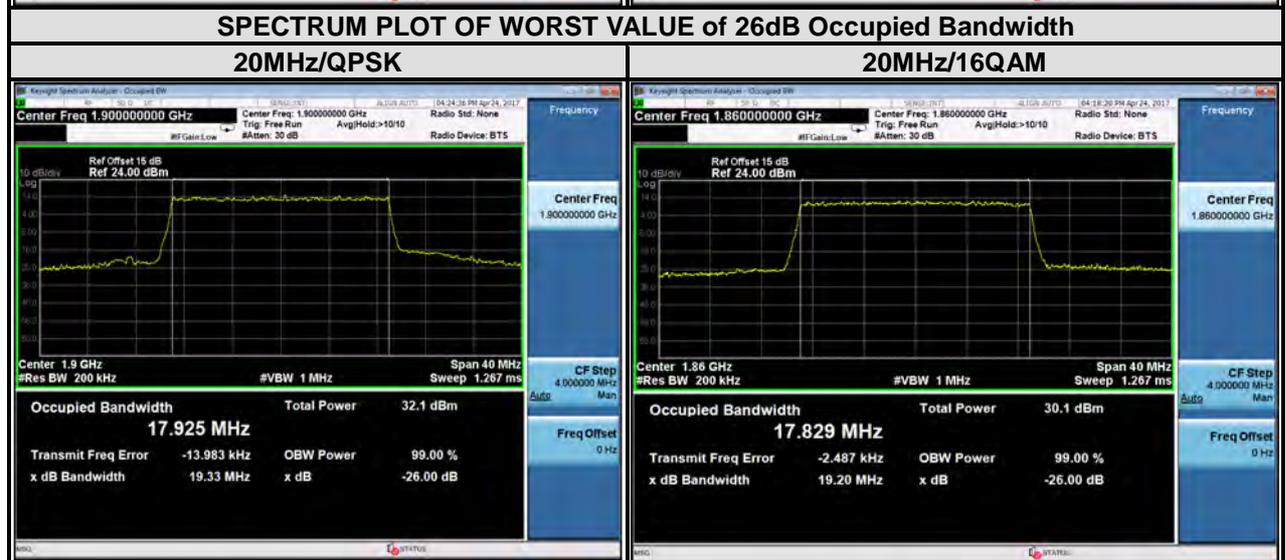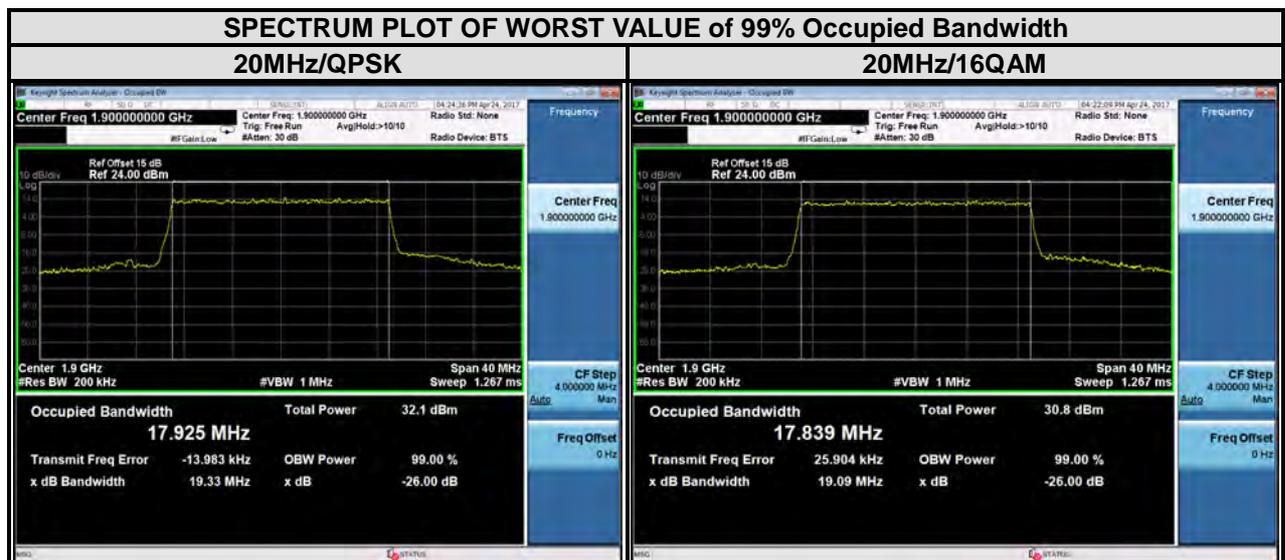




## 4.4 BAND EDGE MEASUREMENT

### 4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.4.2 TEST SETUP

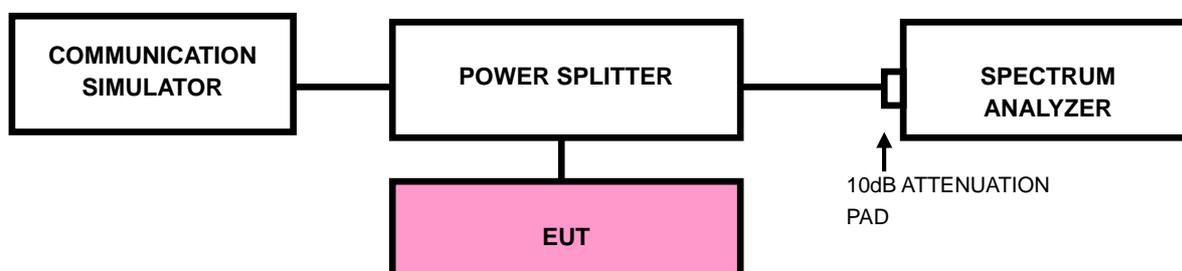

### 4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)




- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- i. Record the max trace plot into the test report.



BUREAU  
VERITAS

Test Report No.: RF170330W002-4

#### 4.4.4. TEST RESULTS

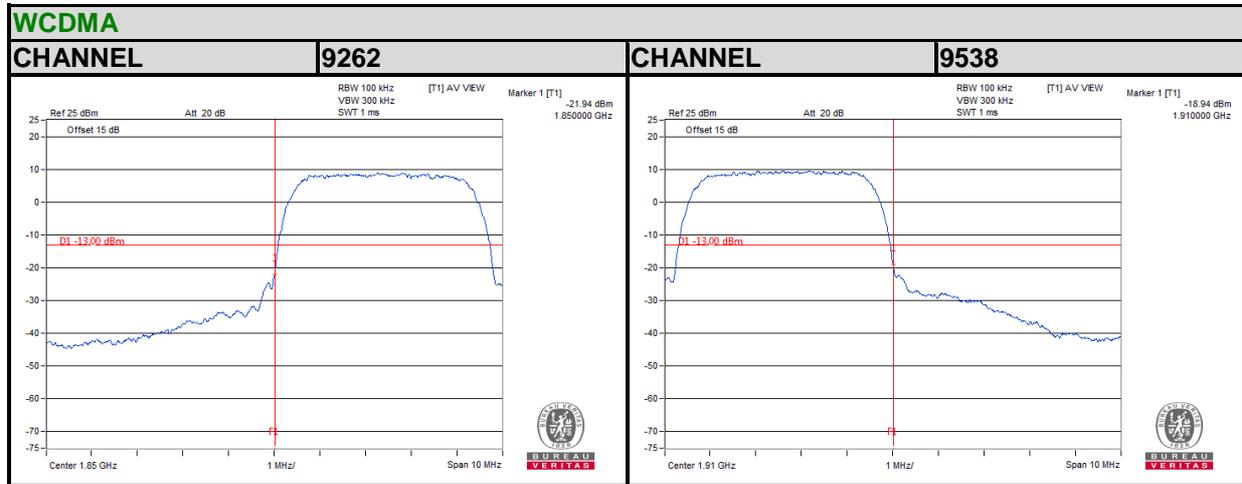

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656

Fax: +86 769 8593 1080

Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

### LTE BAND 2



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**LTE BAND 2**



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

LTE BAND 2

Channel Bandwidth: 5MHz



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

LTE BAND 2

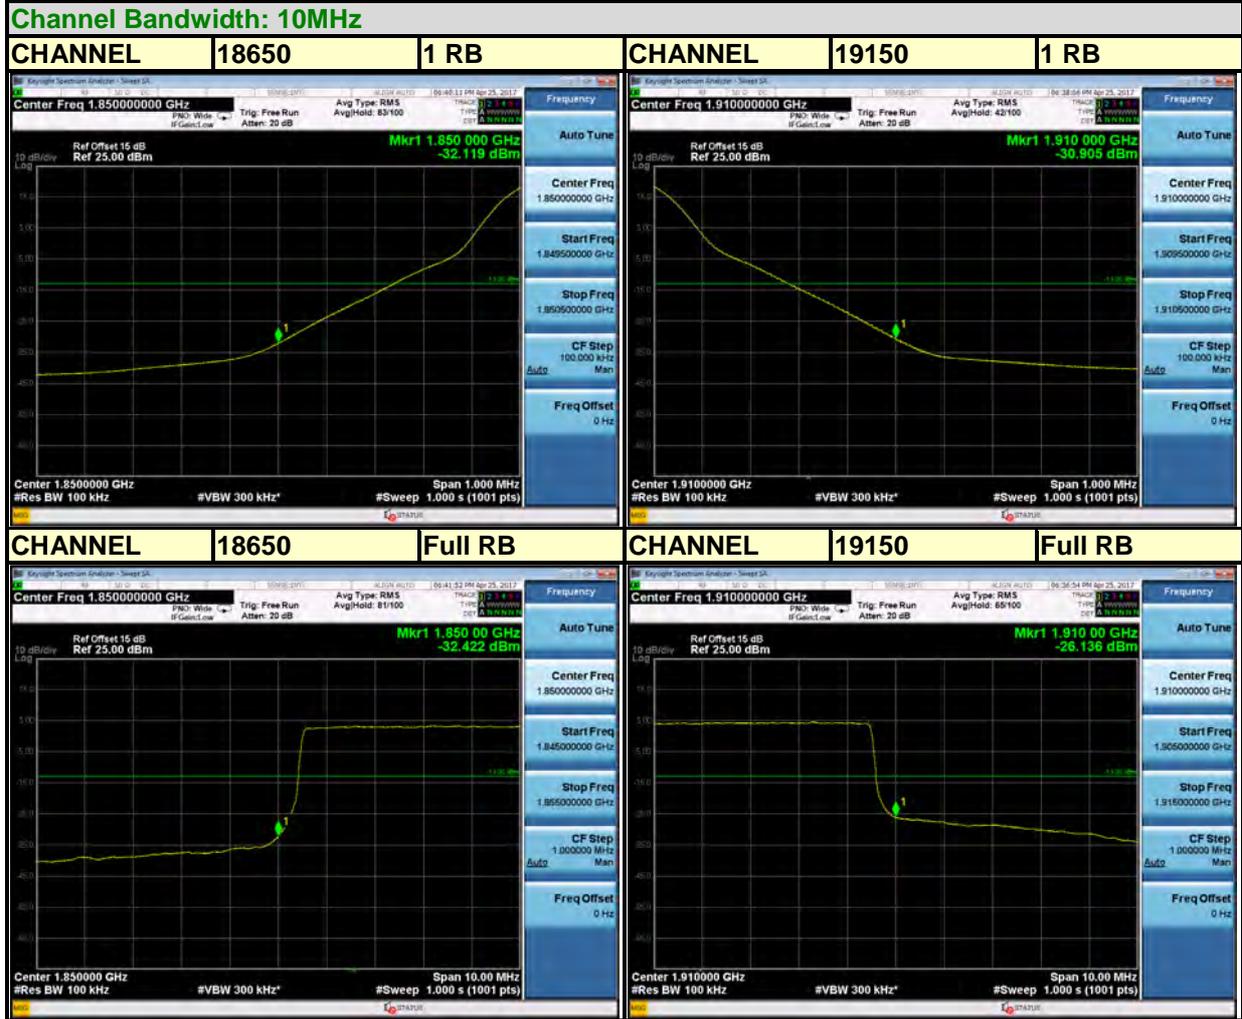

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

LTE BAND 2

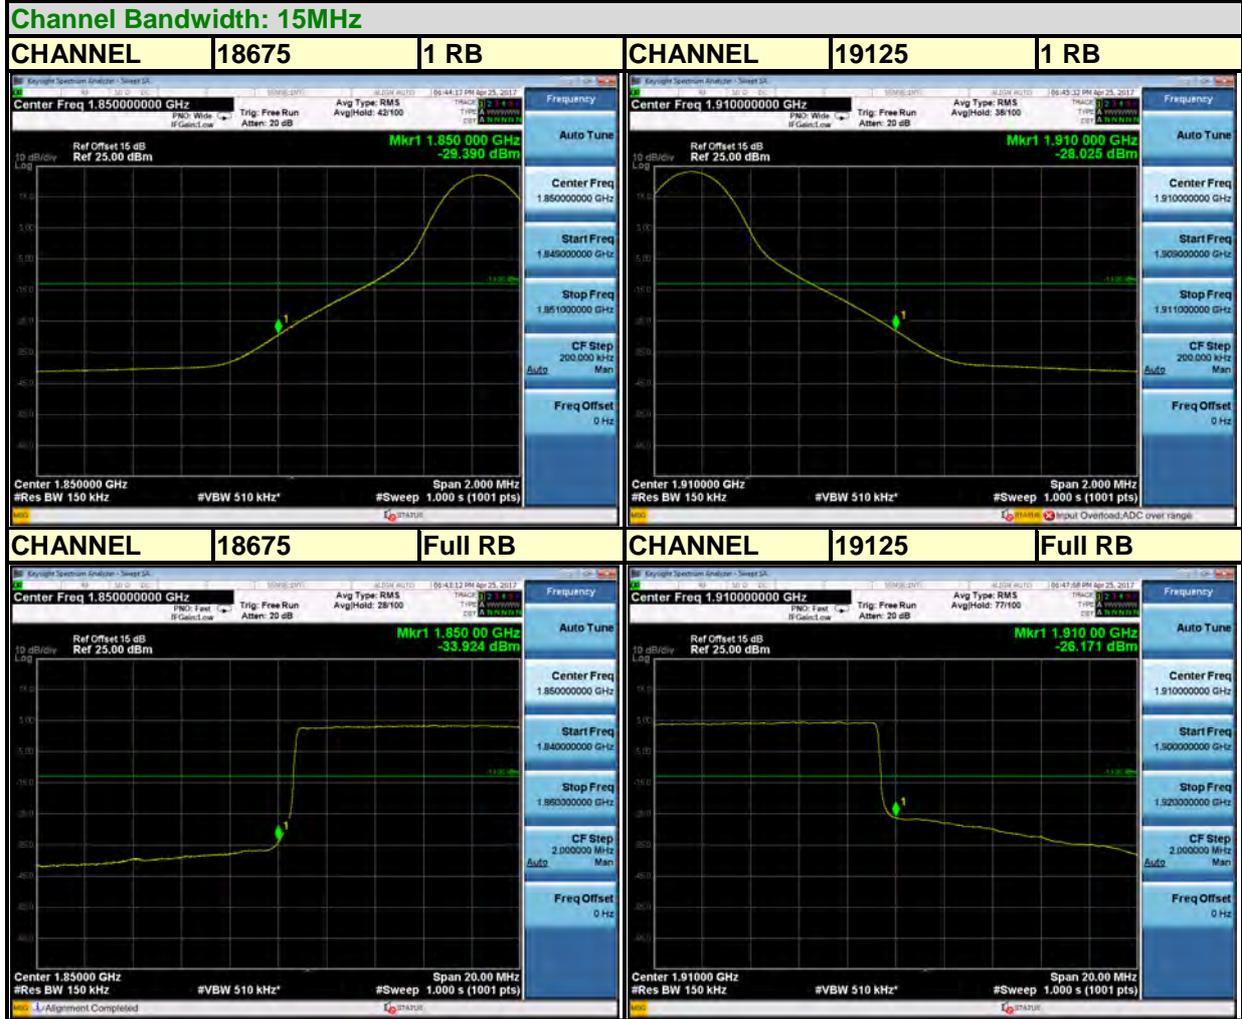

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

LTE BAND 2

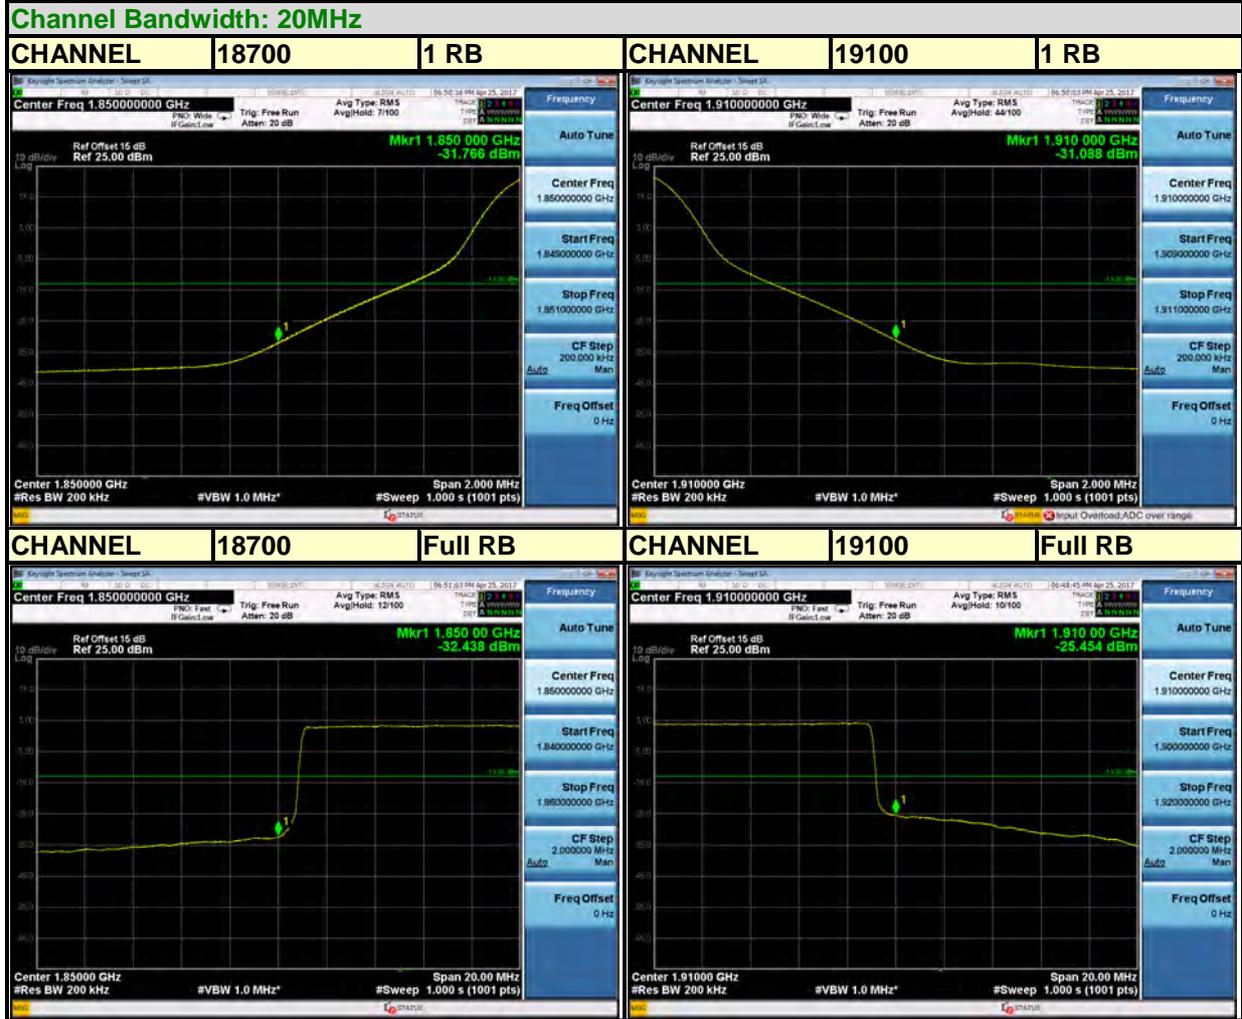

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



## 4.5 CONDUCTED SPURIOUS EMISSIONS


### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.5.2 TEST PROCEDURE


- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

### 4.5.3 TEST SETUP

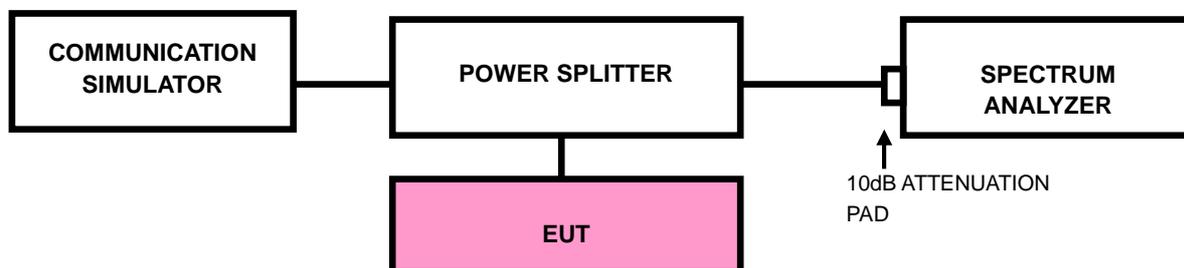




4.5.4 TEST RESULTS

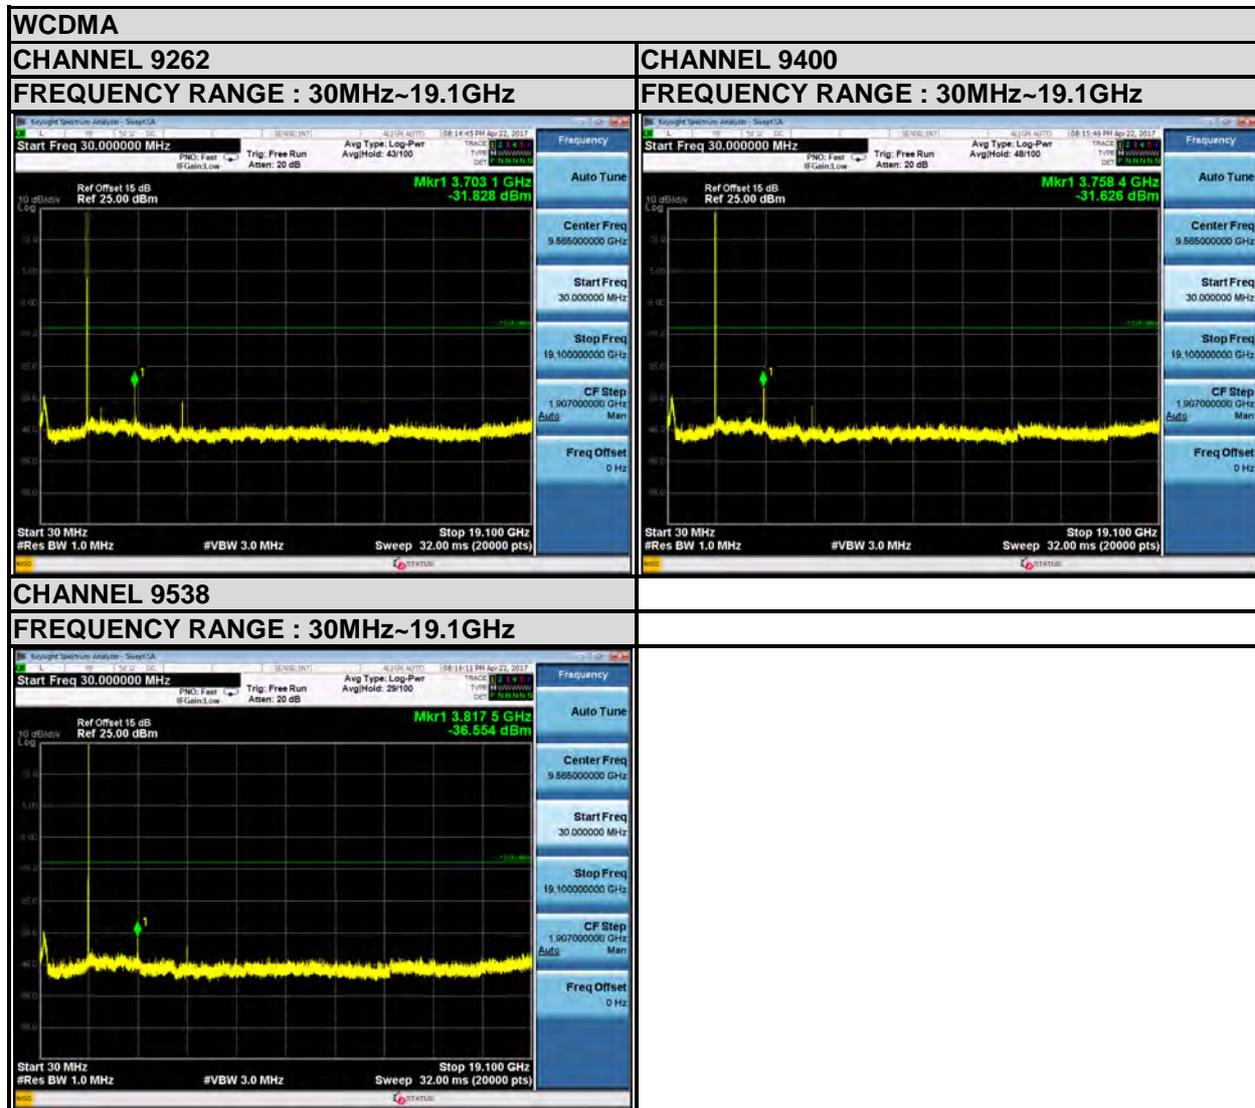




**LTE BAND 2**

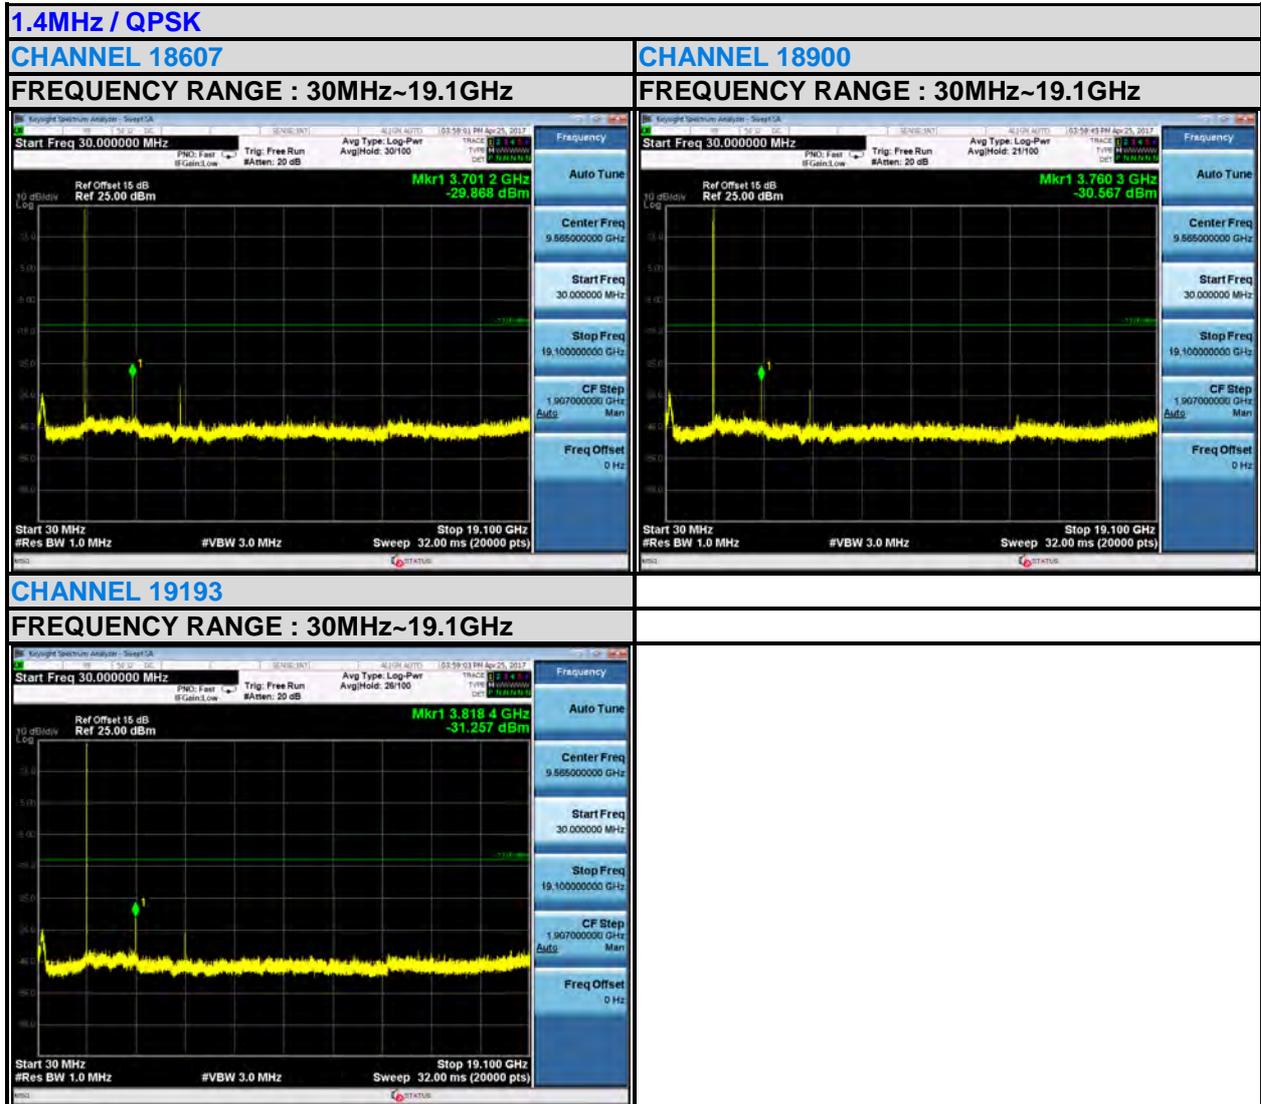



BUREAU VERITAS

Test Report No.: RF170330W002-4

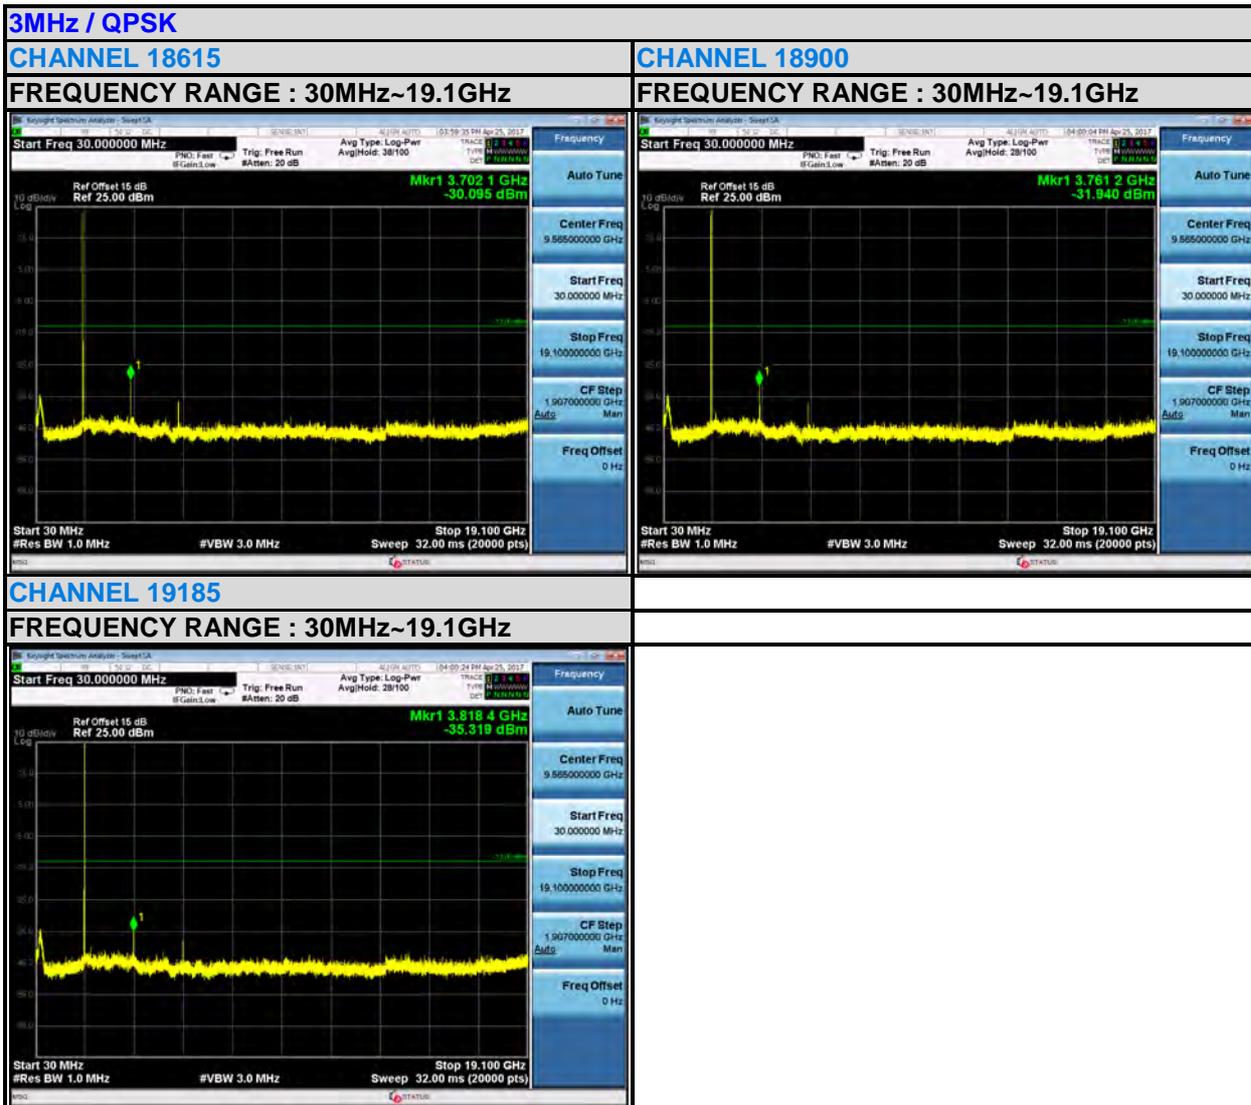

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

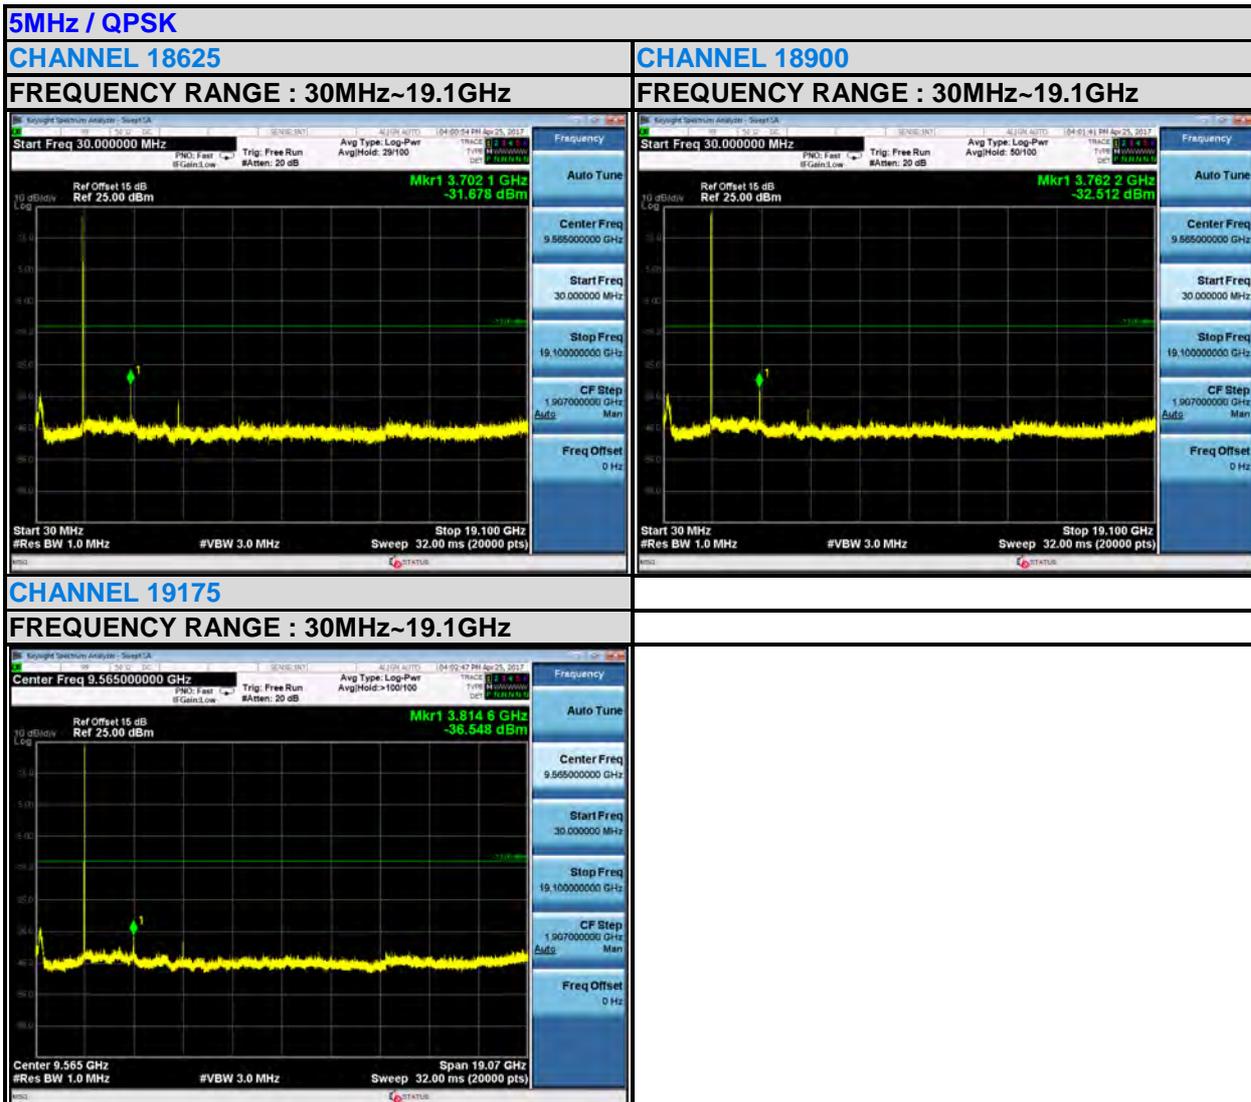

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

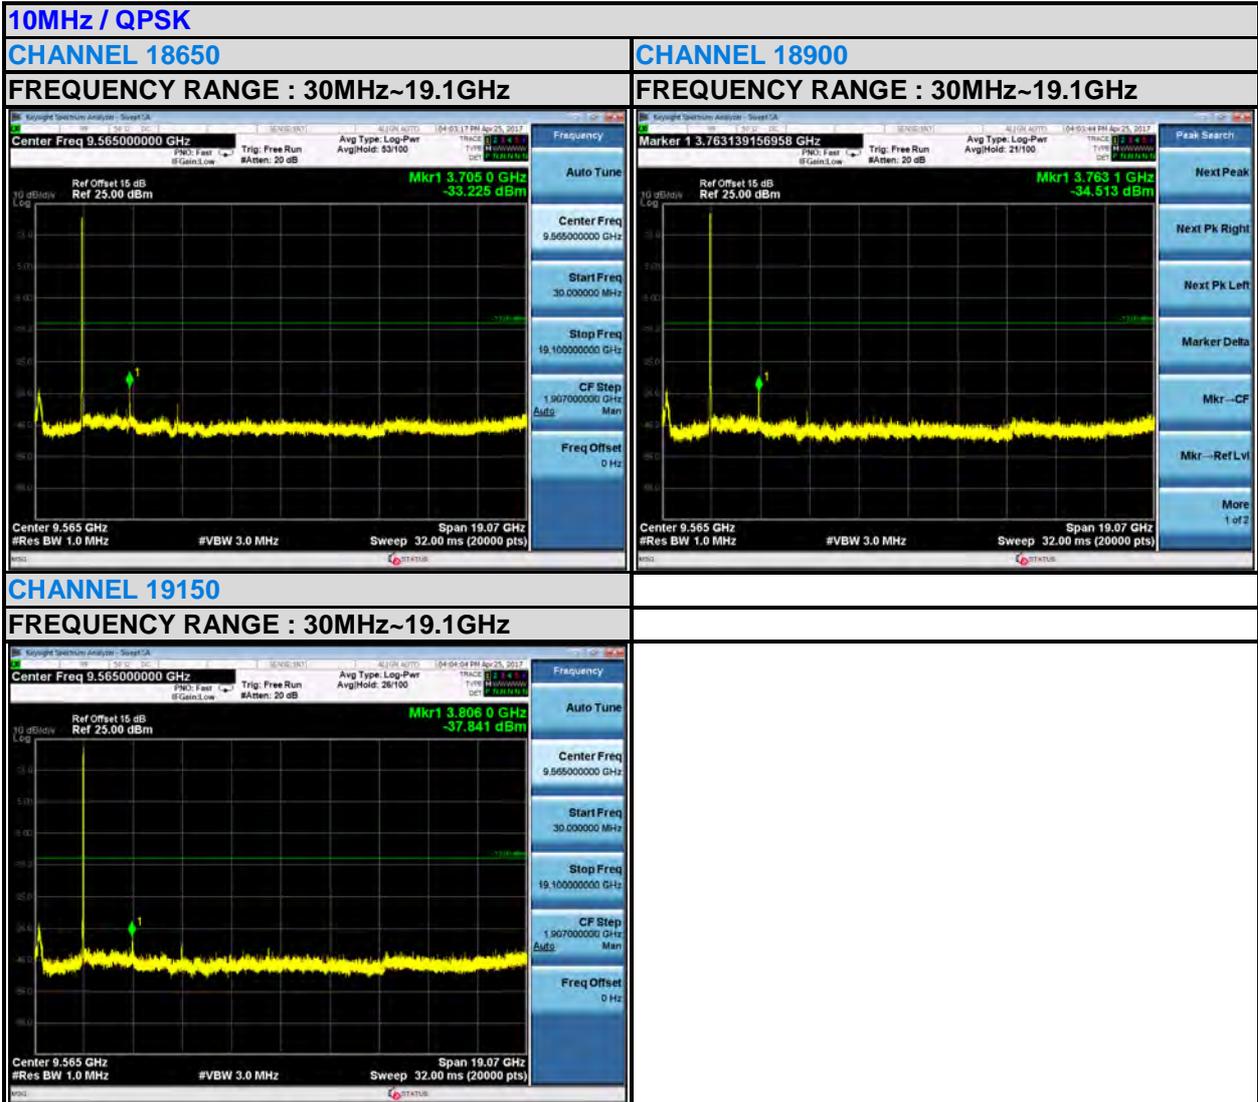

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

15MHz / QPSK


CHANNEL 18675

FREQUENCY RANGE : 30MHz~19.1GHz

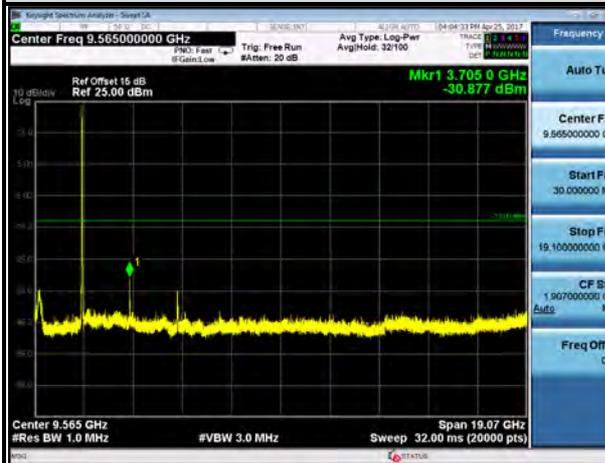


CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

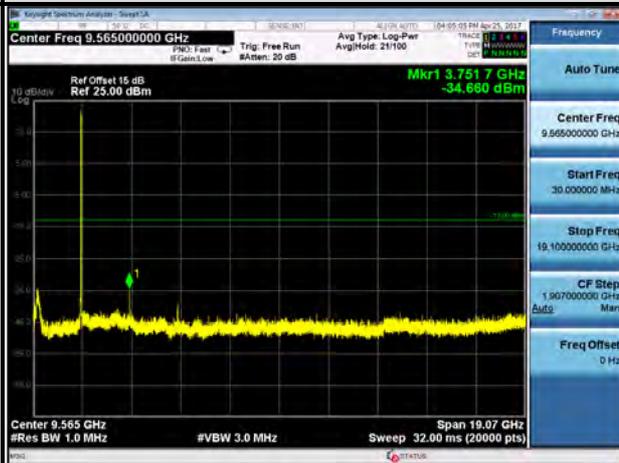

CHANNEL 19125

FREQUENCY RANGE : 30MHz~19.1GHz

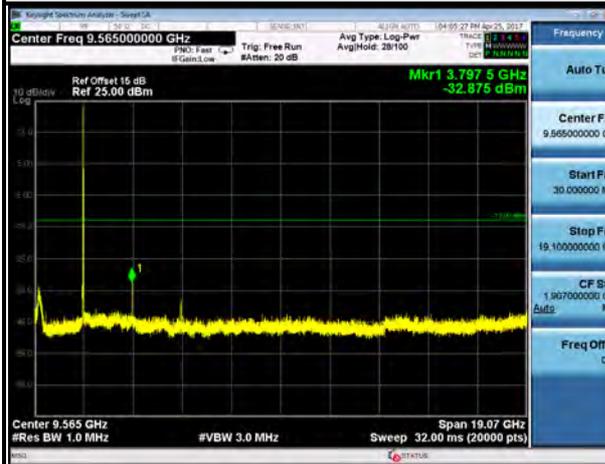

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF170330W002-4

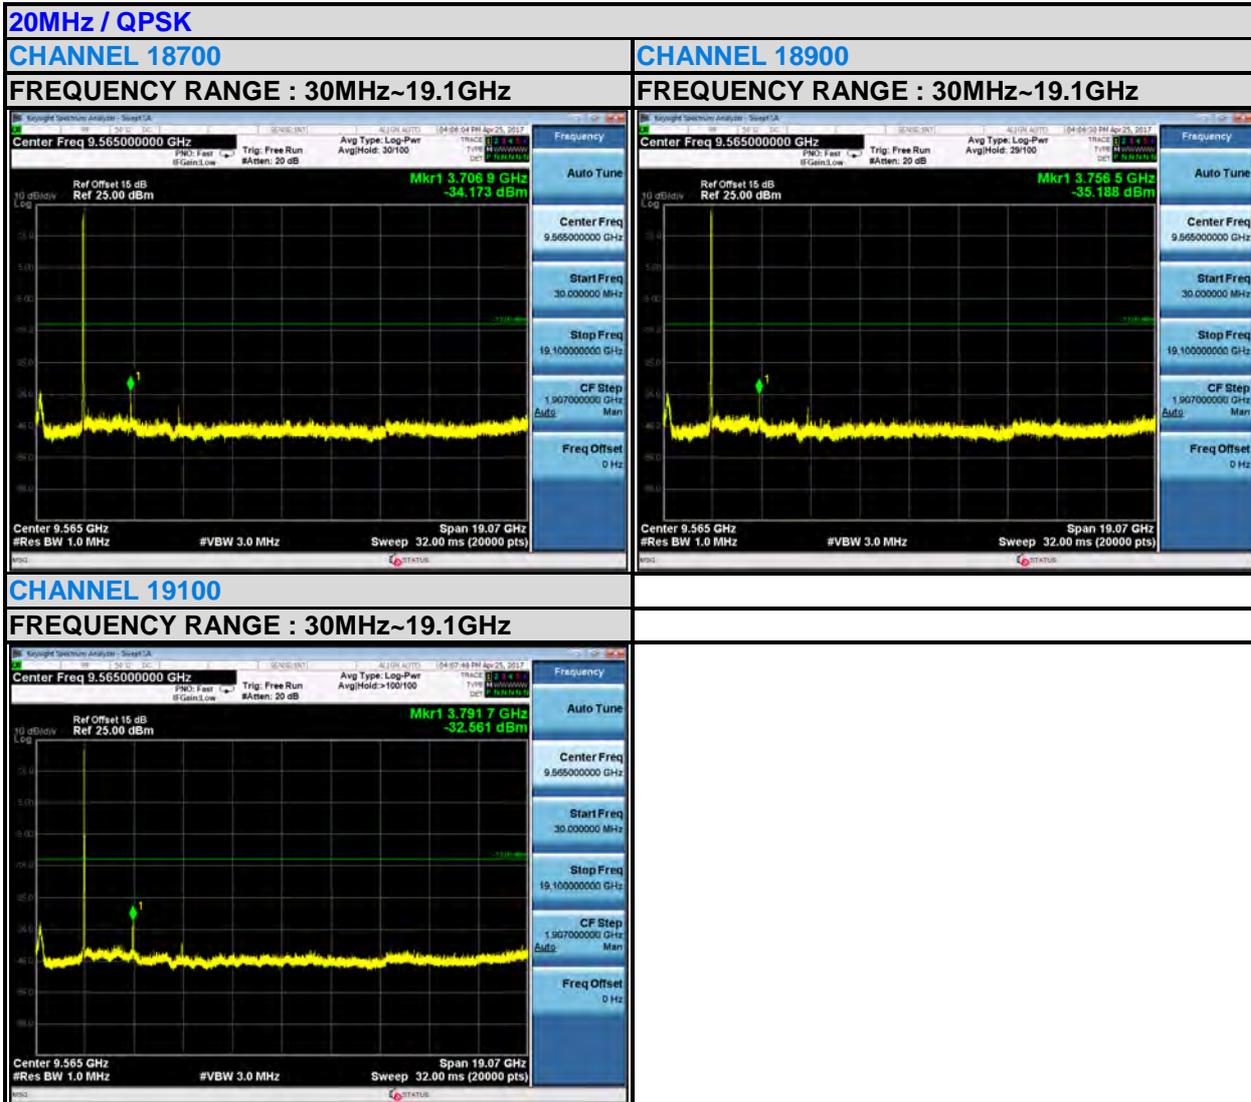

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



## 4.6 RADIATED EMISSION MEASUREMENT

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


### 4.6.3 DEVIATION FROM TEST STANDARD

No deviation




### 4.6.4 TEST SETUP

#### <Below 30MHz>

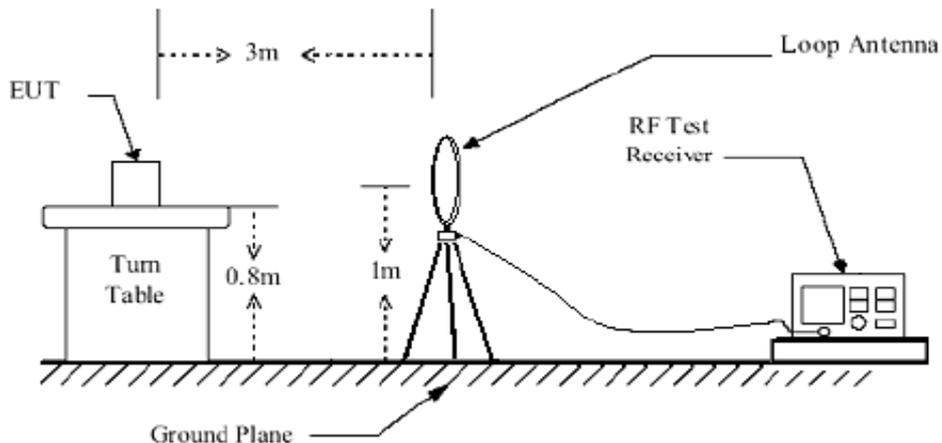

#### <Above 30MHz>

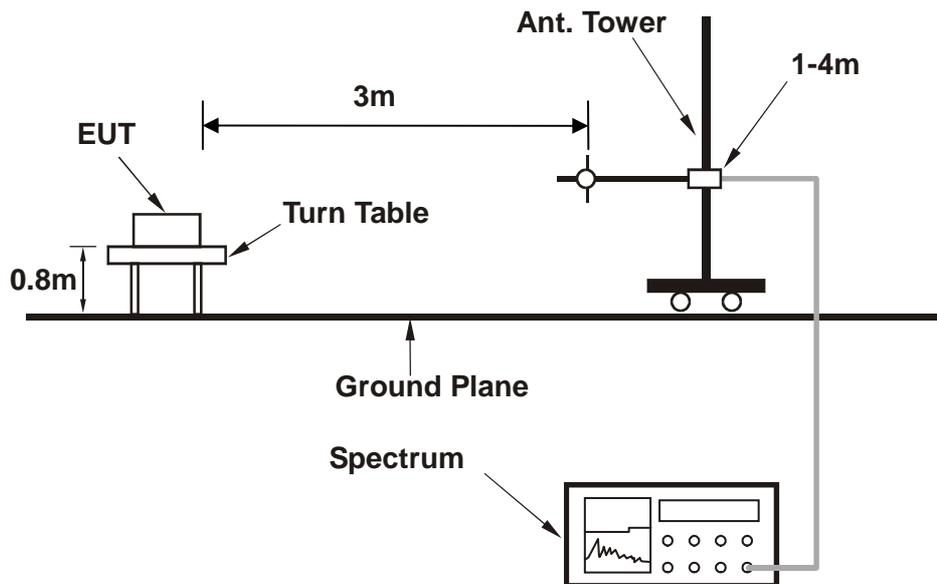

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 4.6.5 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA


**9 KHz – 30 KHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**

**LTE Band 2:**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	30.970	-25.94	-43.95	-13.00	-12.94	18.01	Peak	Horizontal
2		43.580	-36.38	-45.32	-13.00	-23.38	8.94	Peak	Horizontal
3		54.250	-49.03	-47.77	-13.00	-36.03	-1.26	Peak	Horizontal
4		83.350	-62.55	-54.44	-13.00	-49.55	-8.11	Peak	Horizontal
5		132.820	-62.03	-44.91	-13.00	-49.03	-17.12	Peak	Horizontal
6		192.960	-69.37	-51.95	-13.00	-56.37	-17.42	Peak	Horizontal

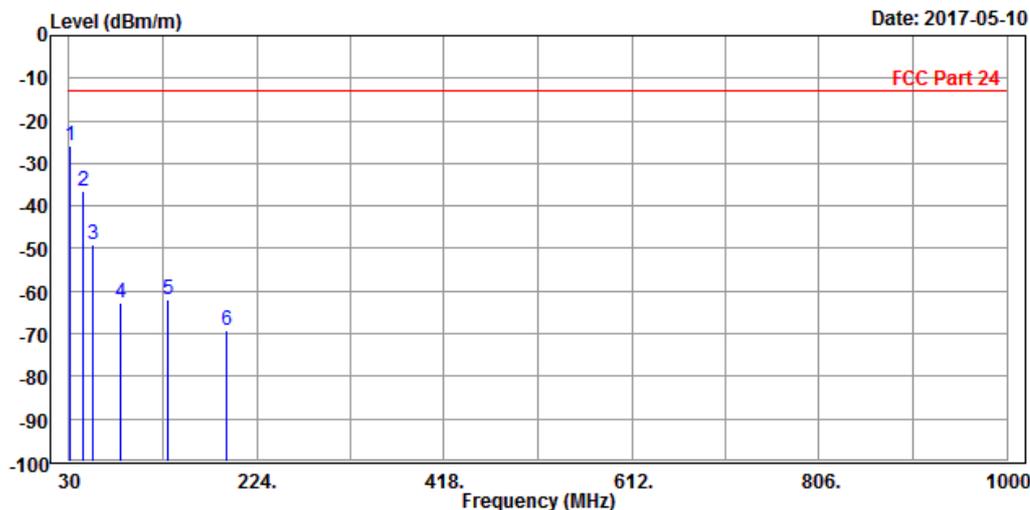




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18900	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	31.940	-38.31	-41.06	-13.00	-25.31	2.75	Peak	Vertical
2 PP	43.580	-34.53	-31.89	-13.00	-21.53	-2.64	Peak	Vertical
3	79.470	-54.78	-44.25	-13.00	-41.78	-10.53	Peak	Vertical
4	133.790	-56.63	-43.67	-13.00	-43.63	-12.96	Peak	Vertical
5	187.140	-67.23	-54.97	-13.00	-54.23	-12.26	Peak	Vertical
6	244.370	-71.29	-59.87	-13.00	-58.29	-11.42	Peak	Vertical

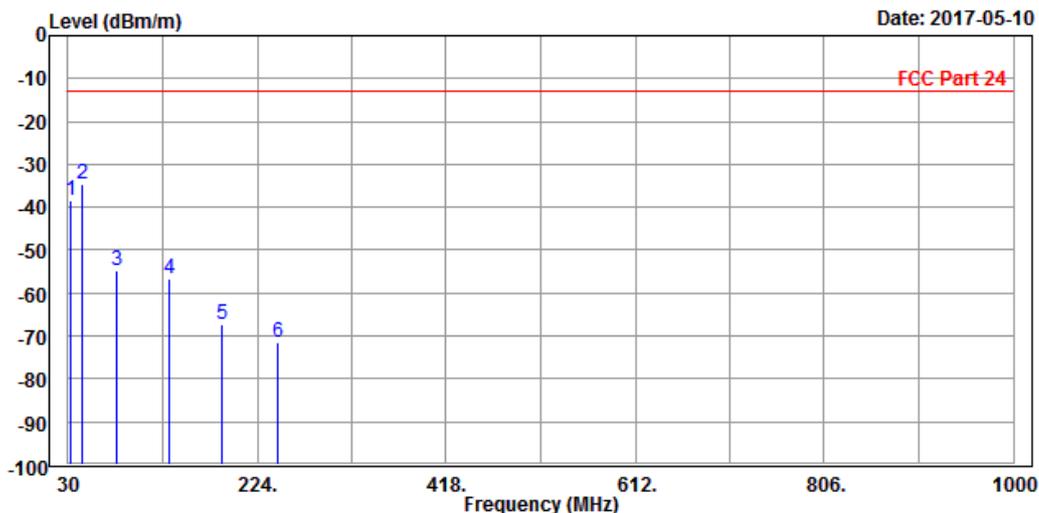

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**ABOVE 1GHz DATA**


**Note:** For higher frequency, the emission is too low to be detected.

**WCDMA Band II**

**CH 9262**

<b>MODE</b>	TX channel 9262	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-48.38	-51.49	-13.00	-35.38	3.11	Peak	Horizontal
2 PP	5560.000	-37.00	-46.03	-13.00	-24.00	9.03	Peak	Horizontal

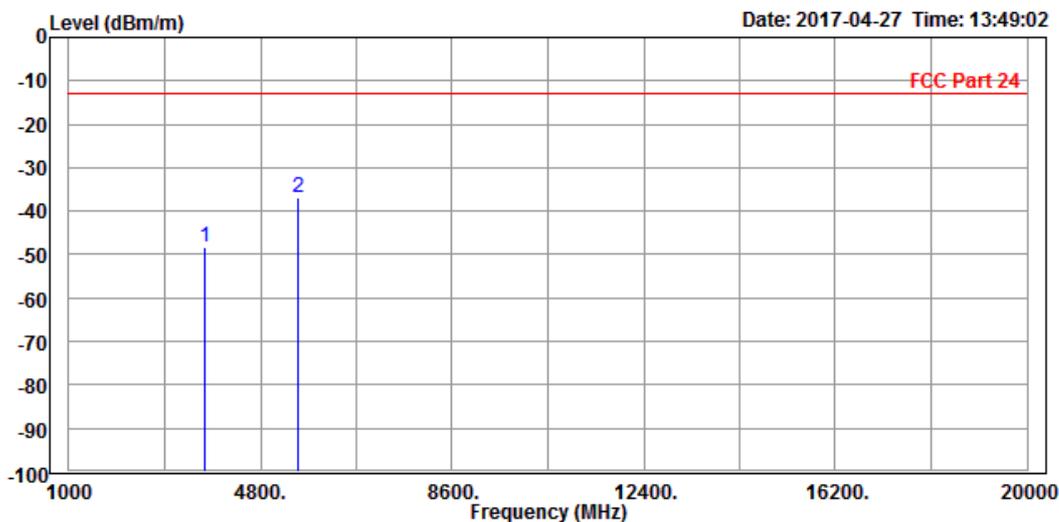




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-48.61	-52.18	-13.00	-35.61	3.57	Peak	Vertical
2 PP	5560.000	-41.80	-49.89	-13.00	-28.80	8.09	Peak	Vertical

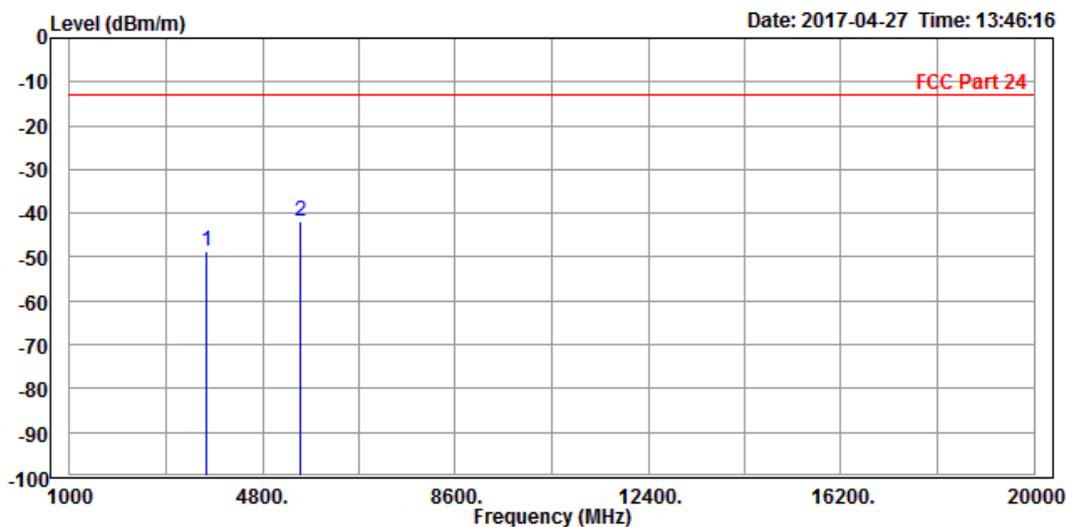

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

CH 9400

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.77	-53.16	-13.00	-36.77	3.39	Peak	Horizontal
2 PP	5640.000	-41.00	-50.12	-13.00	-28.00	9.12	Peak	Horizontal

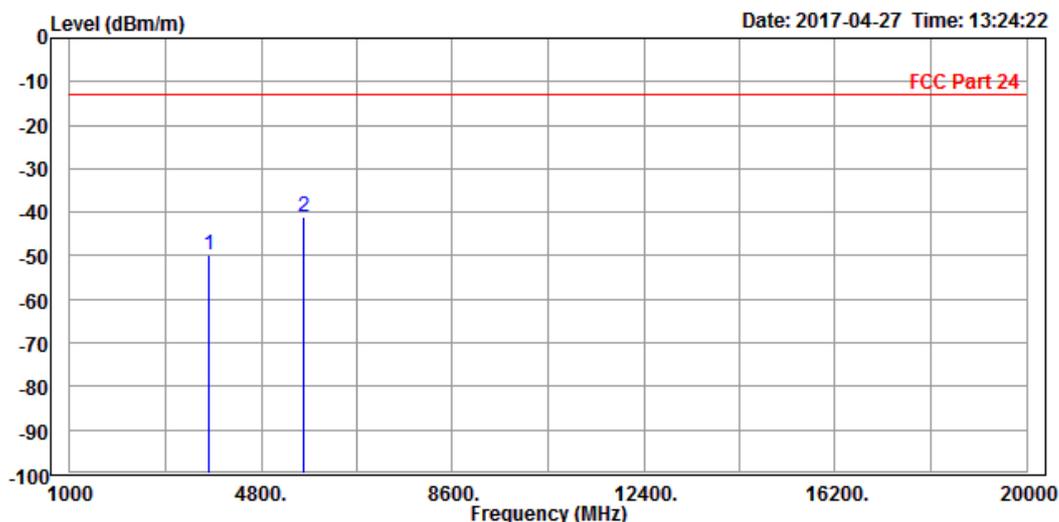




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.35	-52.20	-13.00	-35.35	3.85	Peak	Vertical
2 PP	5640.000	-45.22	-53.48	-13.00	-32.22	8.26	Peak	Vertical

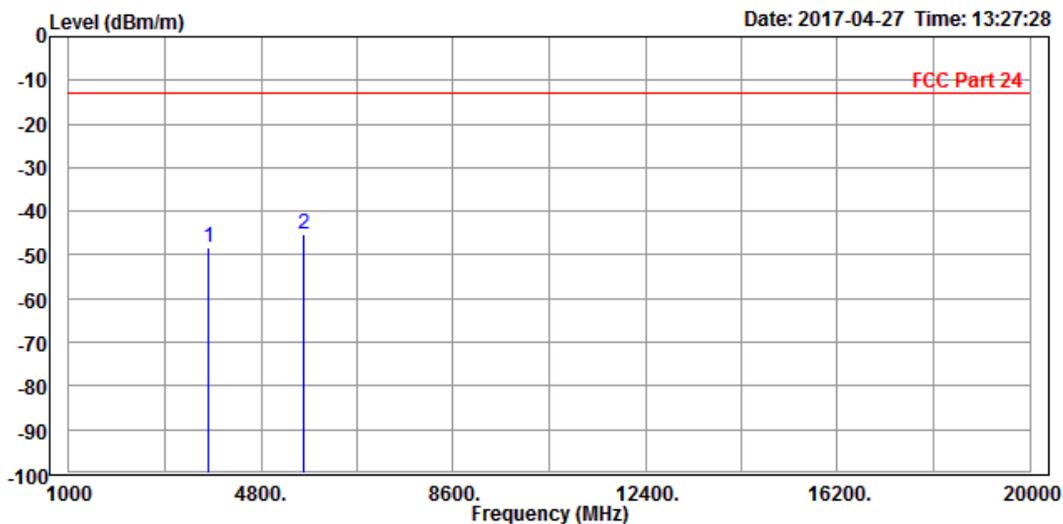

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

CH 9538

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.91	-52.57	-13.00	-35.91	3.66	Peak	Horizontal
2 PP	5731.000	-42.93	-52.15	-13.00	-29.93	9.22	Peak	Horizontal

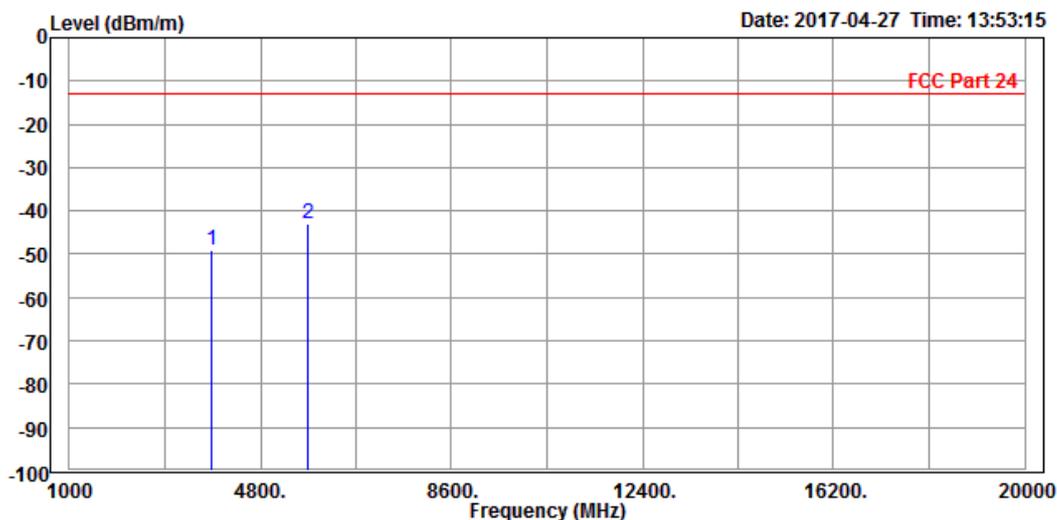

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-49.99	-54.13	-13.00	-36.99	4.14	Peak	Vertical
2 PP	5731.000	-44.62	-53.06	-13.00	-31.62	8.44	Peak	Vertical

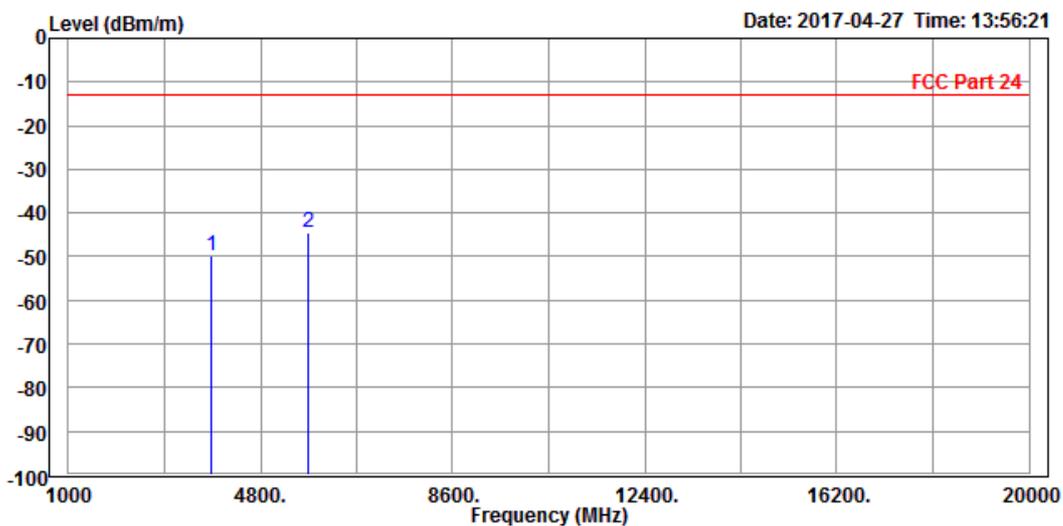

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**BUREAU VERITAS** Test Report No.: RF170330W002-4

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.47	-54.86	-13.00	-38.47	3.39	Peak	Horizontal
2 PP	5640.000	-45.46	-54.58	-13.00	-32.46	9.12	Peak	Horizontal

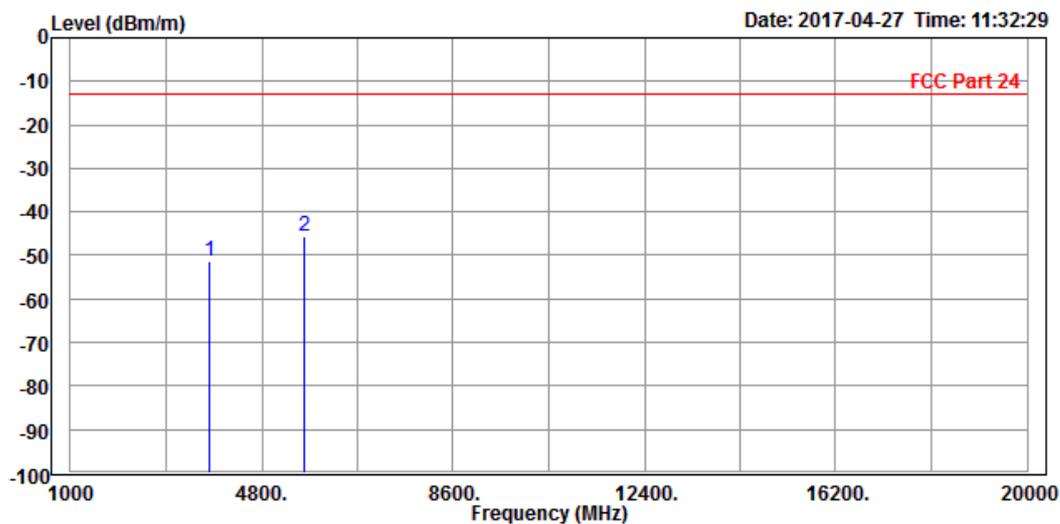

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.59	-54.44	-13.00	-37.59	3.85	Peak	Vertical
2 PP	5640.000	-45.37	-53.63	-13.00	-32.37	8.26	Peak	Vertical

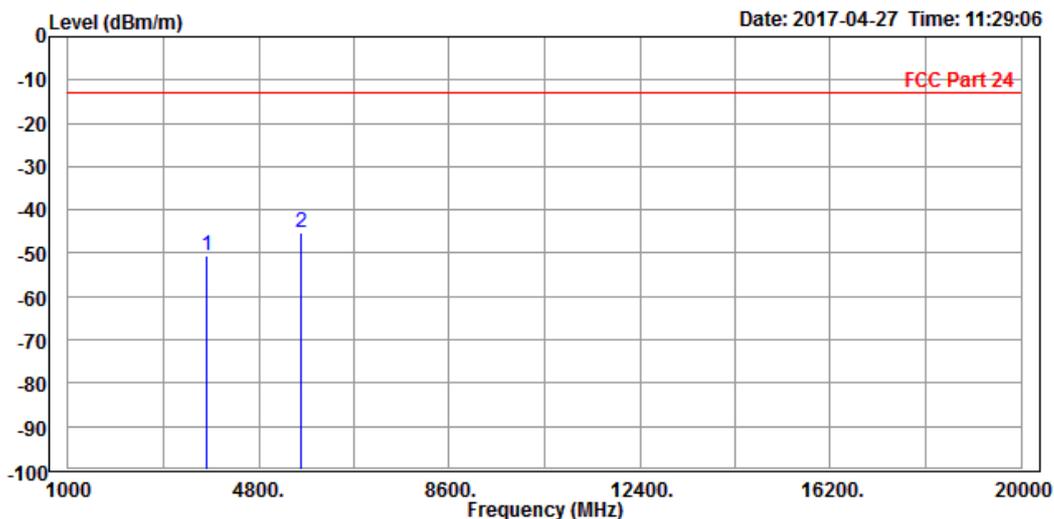

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.37	-51.76	-13.00	-35.37	3.39	Peak	Horizontal
2	PP 5640.000	-43.06	-52.18	-13.00	-30.06	9.12	Peak	Horizontal

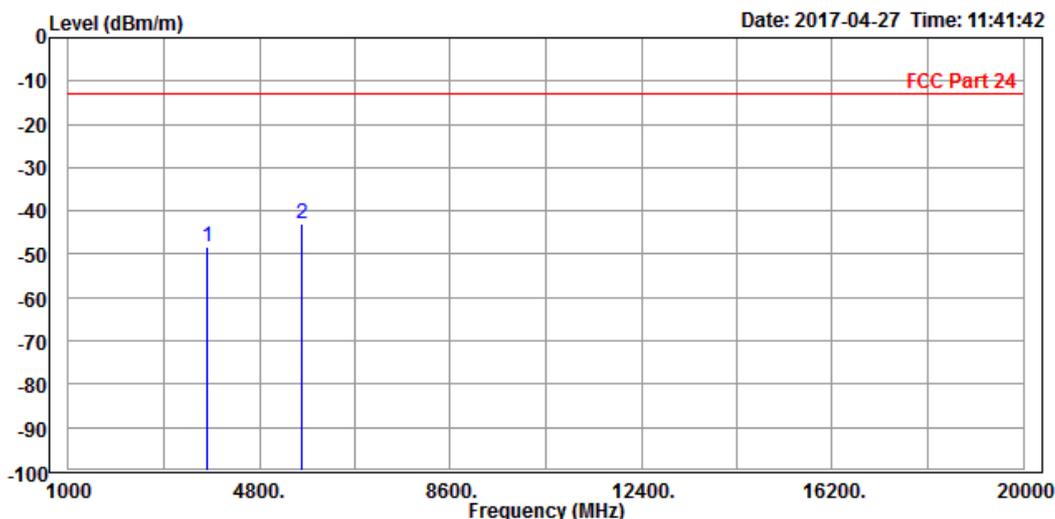




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.62	-54.47	-13.00	-37.62	3.85	Peak	Vertical
2 PP	5640.000	-45.73	-53.99	-13.00	-32.73	8.26	Peak	Vertical

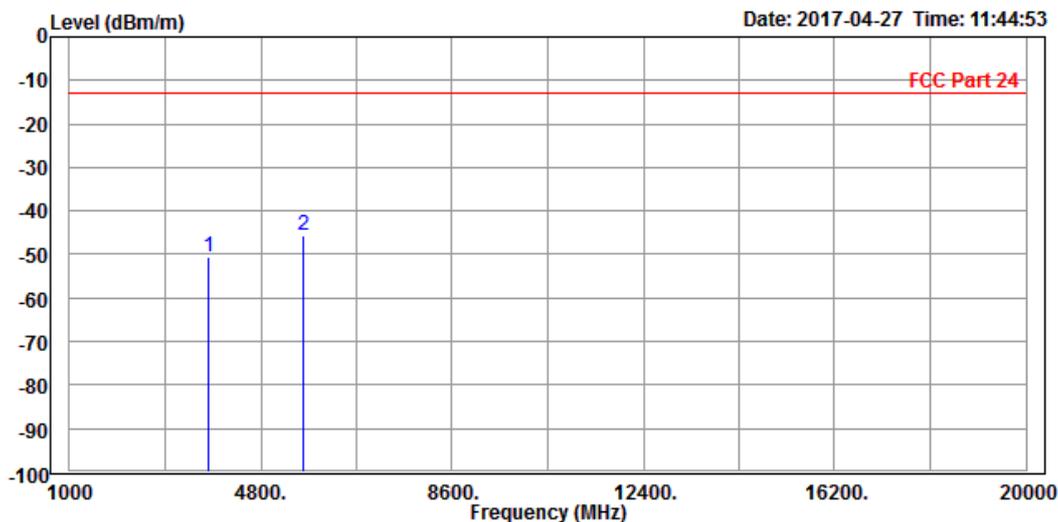

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**CHANNEL BANDWIDTH: 5MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.17	-52.56	-13.00	-36.17	3.39	Peak	Horizontal
2 PP	5640.000	-38.36	-47.48	-13.00	-25.36	9.12	Peak	Horizontal

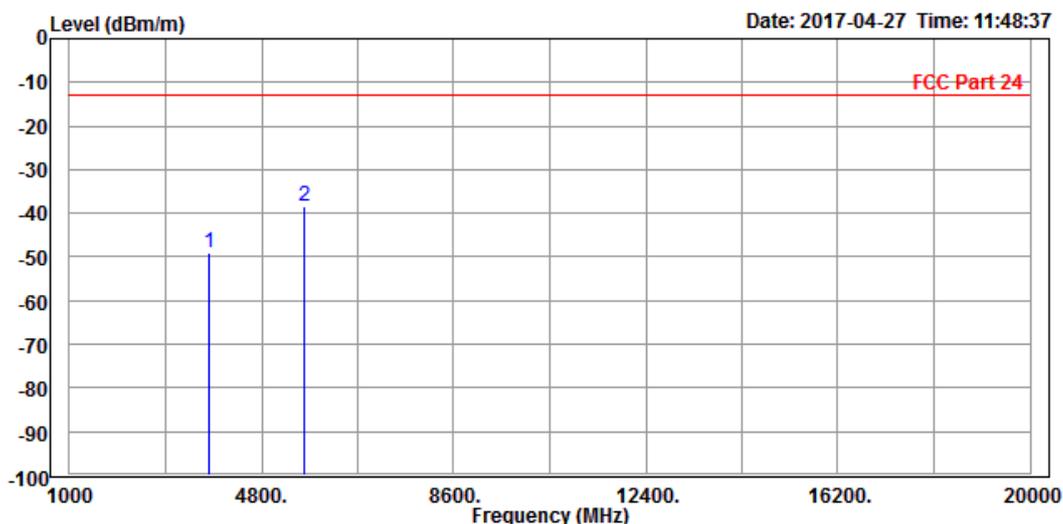




**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.00	-52.85	-13.00	-36.00	3.85	Peak	Vertical
2	PP 5640.000	-43.41	-51.67	-13.00	-30.41	8.26	Peak	Vertical

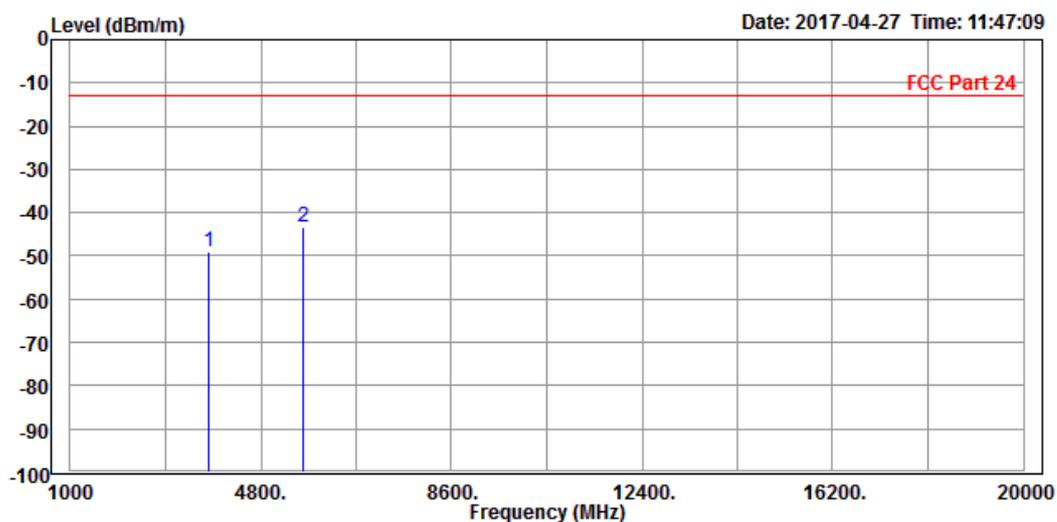

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**


Test Report No.: RF170330W002-4

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 18650

<b>MODE</b>	TX channel 18650	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-48.47	-51.58	-13.00	-35.47	3.11	Peak	Horizontal
2 PP	5560.000	-33.04	-42.07	-13.00	-20.04	9.03	Peak	Horizontal

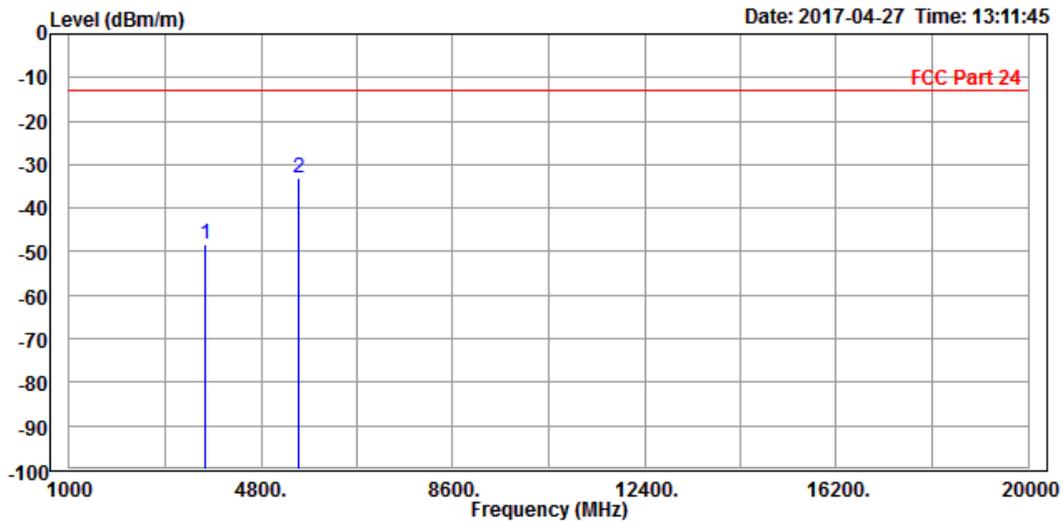

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-47.65	-51.22	-13.00	-34.65	3.57	Peak	Vertical
2 PP	5560.000	-36.15	-44.24	-13.00	-23.15	8.09	Peak	Vertical

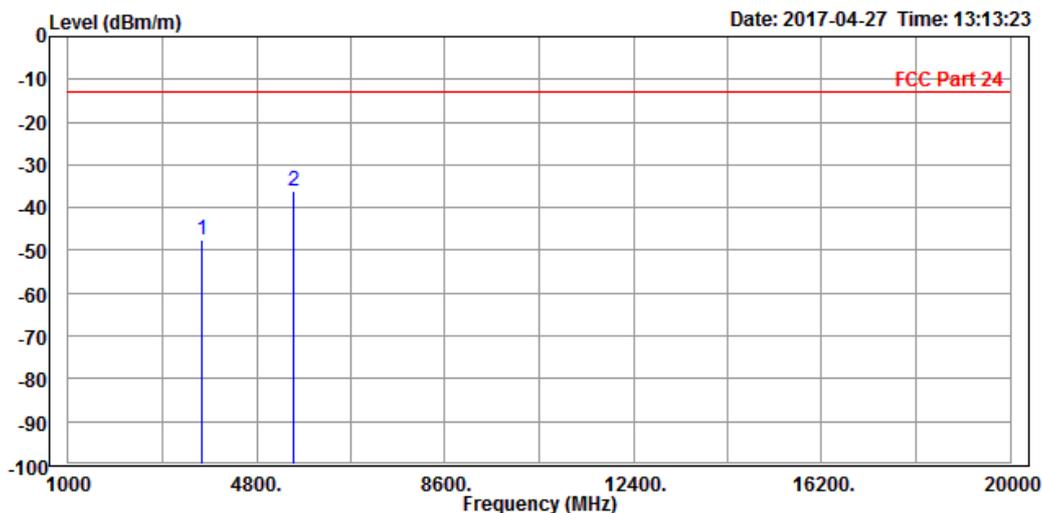

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

CH 18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-46.01	-49.40	-13.00	-33.01	3.39	Peak	Horizontal
2 PP	5640.000	-42.08	-51.20	-13.00	-29.08	9.12	Peak	Horizontal

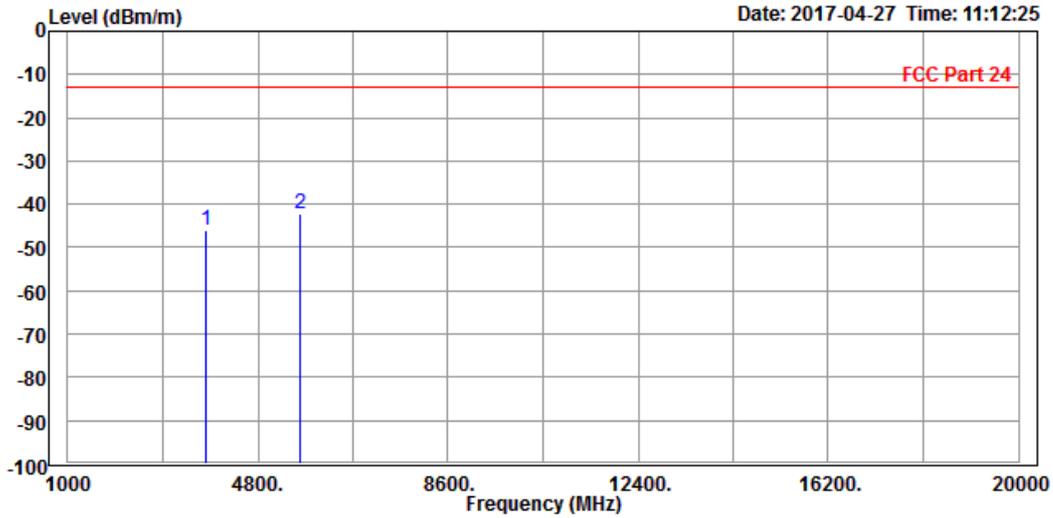

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-46.33	-50.18	-13.00	-33.33	3.85	Peak	Vertical
2 PP	5640.000	-45.90	-54.16	-13.00	-32.90	8.26	Peak	Vertical

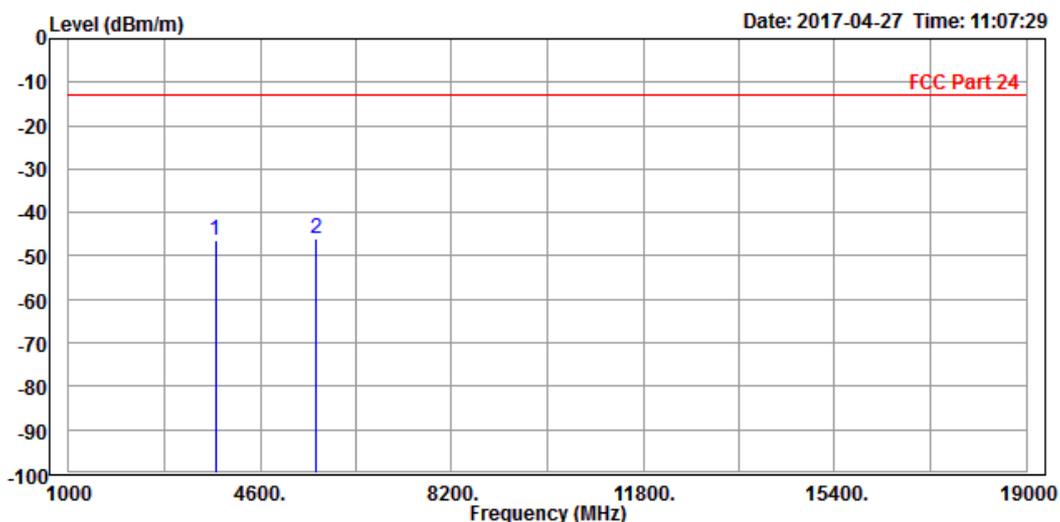

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF170330W002-4

CH 19150

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Read Level	Limit Level	Over Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-46.51	-50.17	-13.00	-33.51	3.66	Peak	Horizontal
2	PP 5731.000	-37.48	-46.70	-13.00	-24.48	9.22	Peak	Horizontal

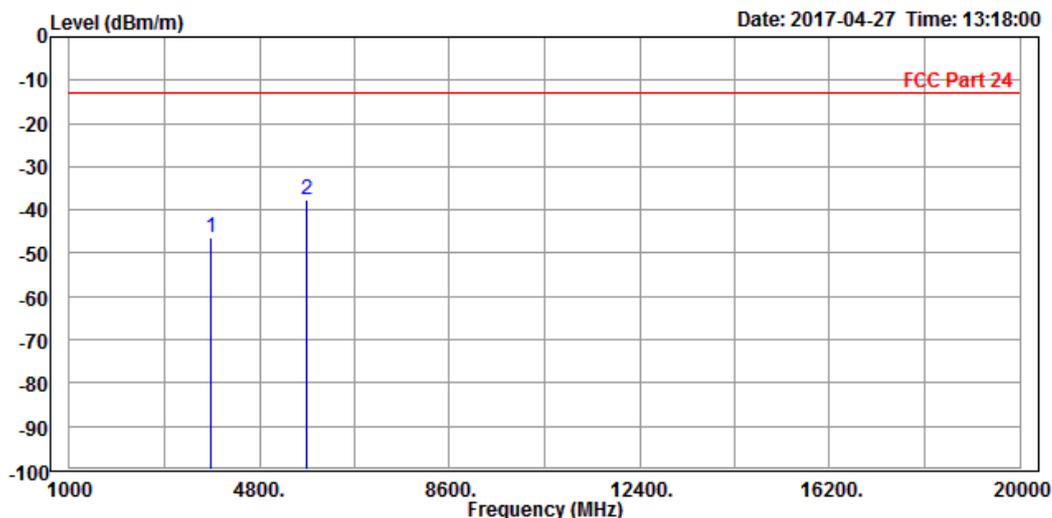




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-50.25	-54.39	-13.00	-37.25	4.14	Peak	Vertical
2 PP	5731.000	-43.87	-52.31	-13.00	-30.87	8.44	Peak	Vertical

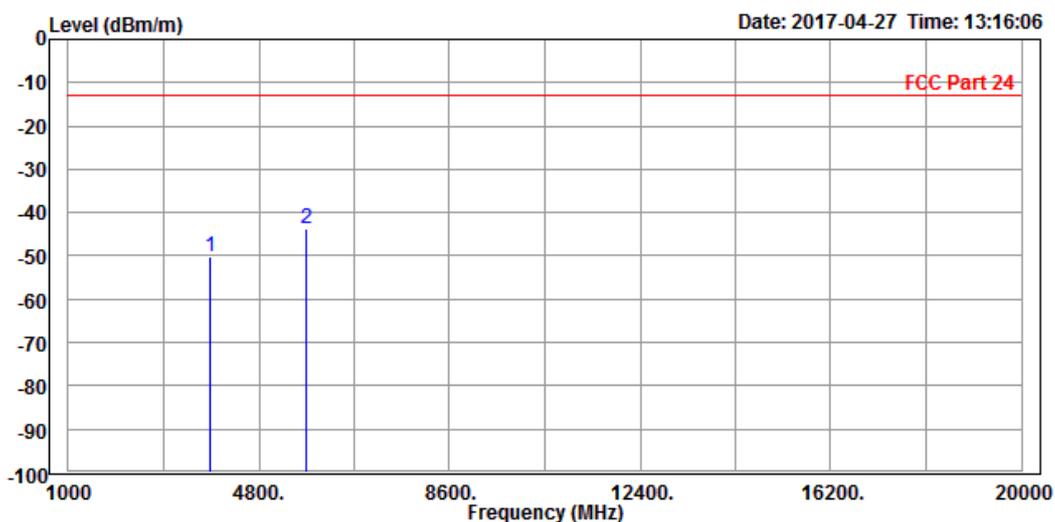

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.56	-52.95	-13.00	-36.56	3.39	Peak	Horizontal
2 PP	5640.000	-38.67	-47.79	-13.00	-25.67	9.12	Peak	Horizontal

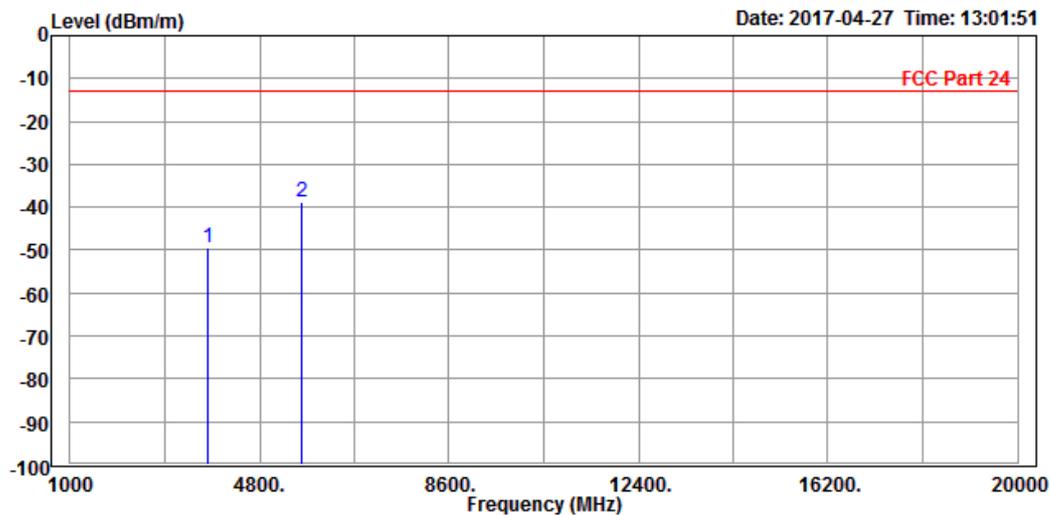




**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 66%RH	<b>INPUT POWER</b>	DC 5.2V from adapter
<b>TESTED BY</b>	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.14	-53.99	-13.00	-37.14	3.85	Peak	Vertical
2	PP 5640.000	-43.11	-51.37	-13.00	-30.11	8.26	Peak	Vertical

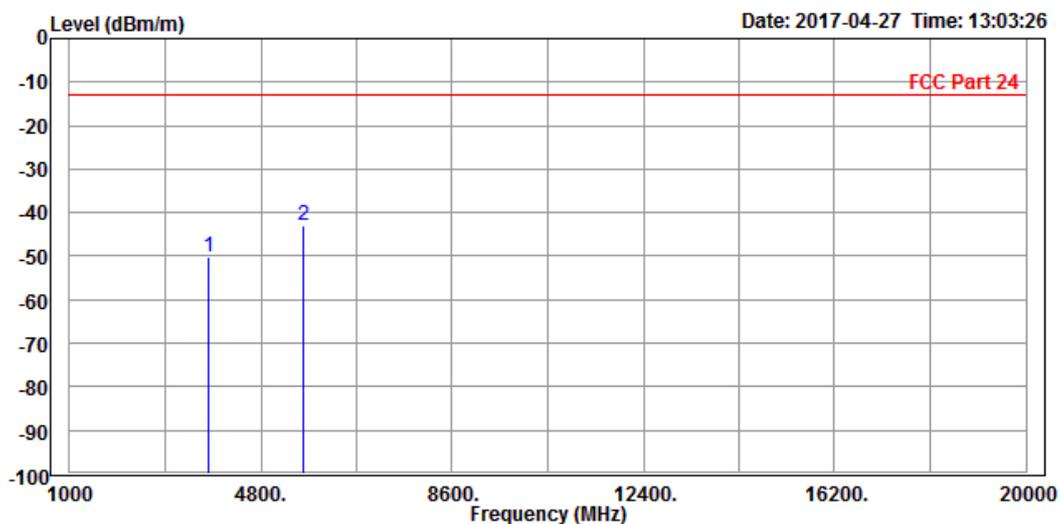




BUREAU VERITAS

Test Report No.: RF170330W002-4

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.30	-54.69	-13.00	-38.30	3.39	Peak	Horizontal
2 PP	5640.000	-44.72	-53.84	-13.00	-31.72	9.12	Peak	Horizontal

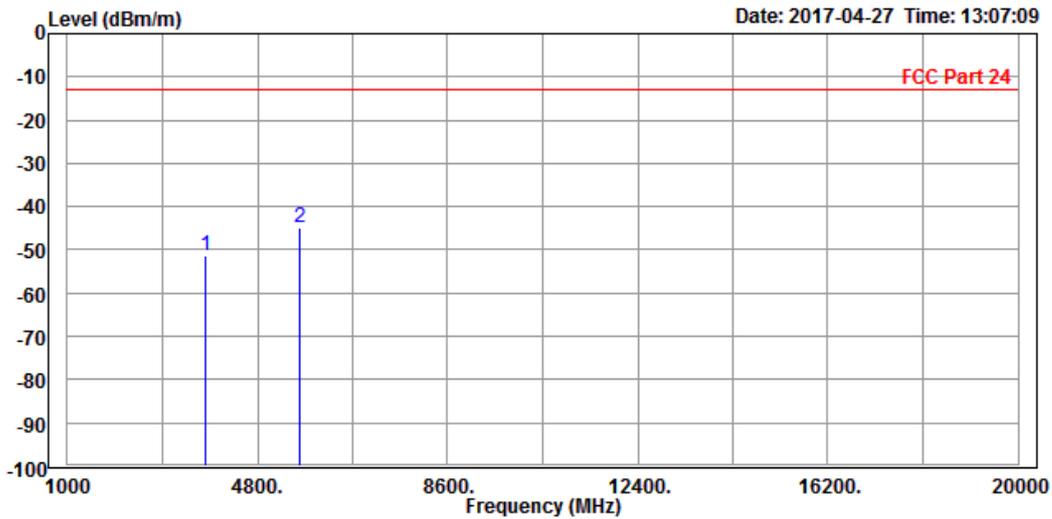




BUREAU VERITAS

Test Report No.: RF170330W002-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 66%RH	INPUT POWER	DC 5.2V from adapter
TESTED BY	Tony Zou		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Read Freq	Level	Limit	Over	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	3755.000	-50.87	-54.72	-13.00	-37.87	3.85 Peak	Vertical
2 PP	5640.000	-45.21	-53.47	-13.00	-32.21	8.26 Peak	Vertical

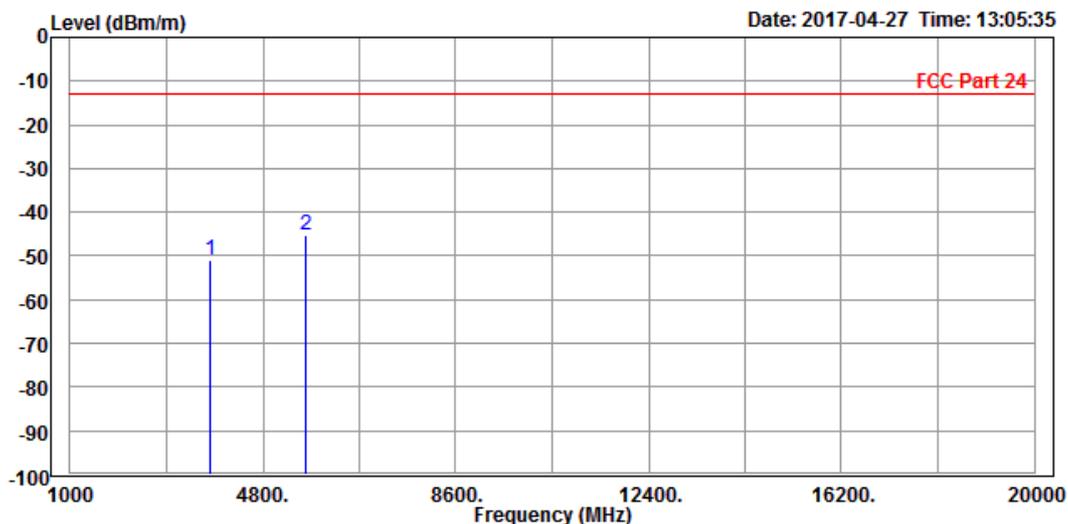

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




## 4.7 PEAK TO AVERAGE RATIO

### 4.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.7.2 TEST SETUP

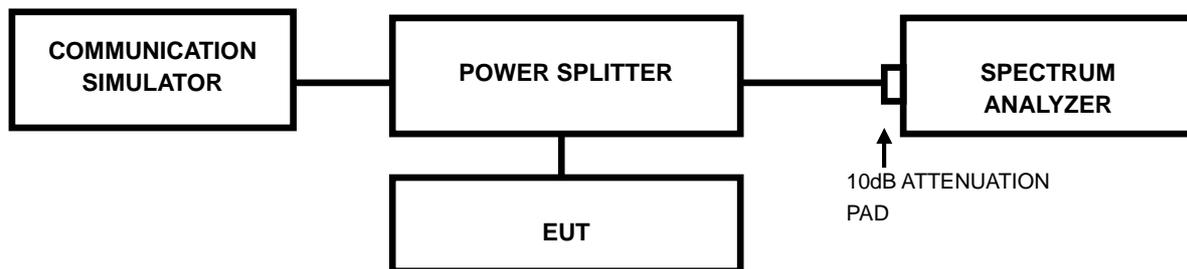

### 4.7.3 TEST PROCEDURES


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



### 4.7.4 TEST RESULTS

#### WCDMA

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9400	1880	3.15

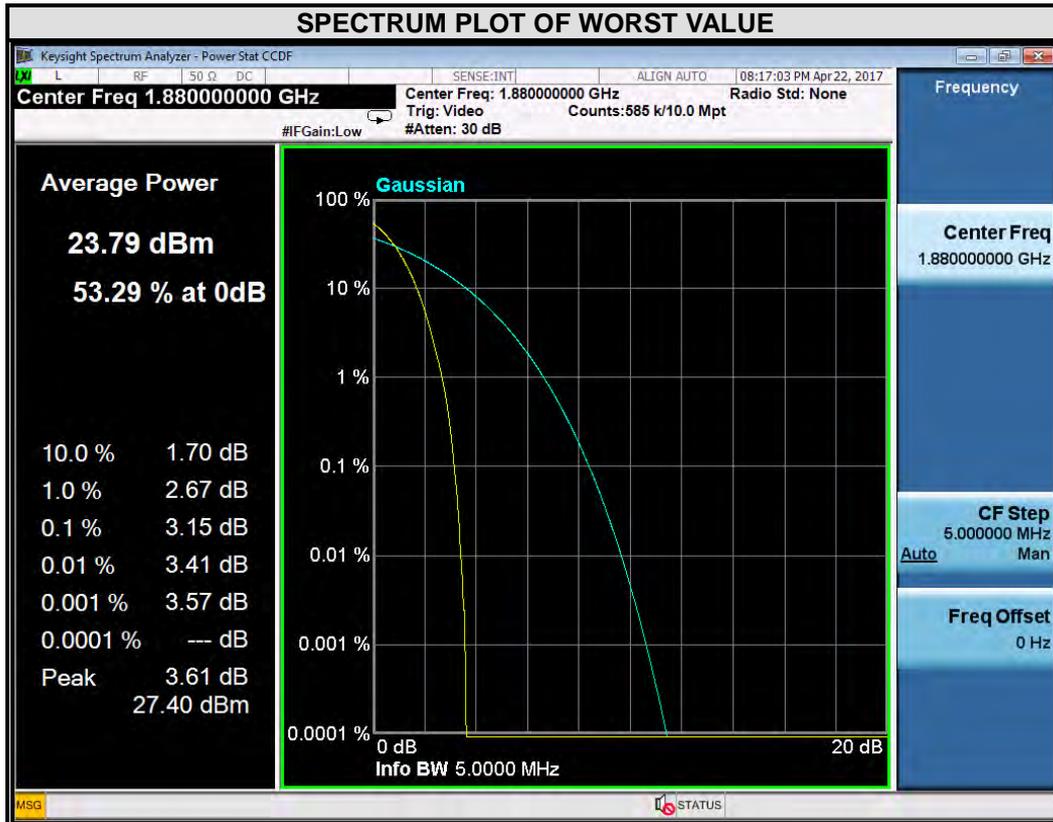




**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

**LTE BAND 2**

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	4.97	5.85	18615	1851.5	5.13	5.96
18900	1880	5.22	6.16	18900	1880	5.39	6.21
19193	1909.3	4.81	5.74	19185	1908.5	5.09	5.97

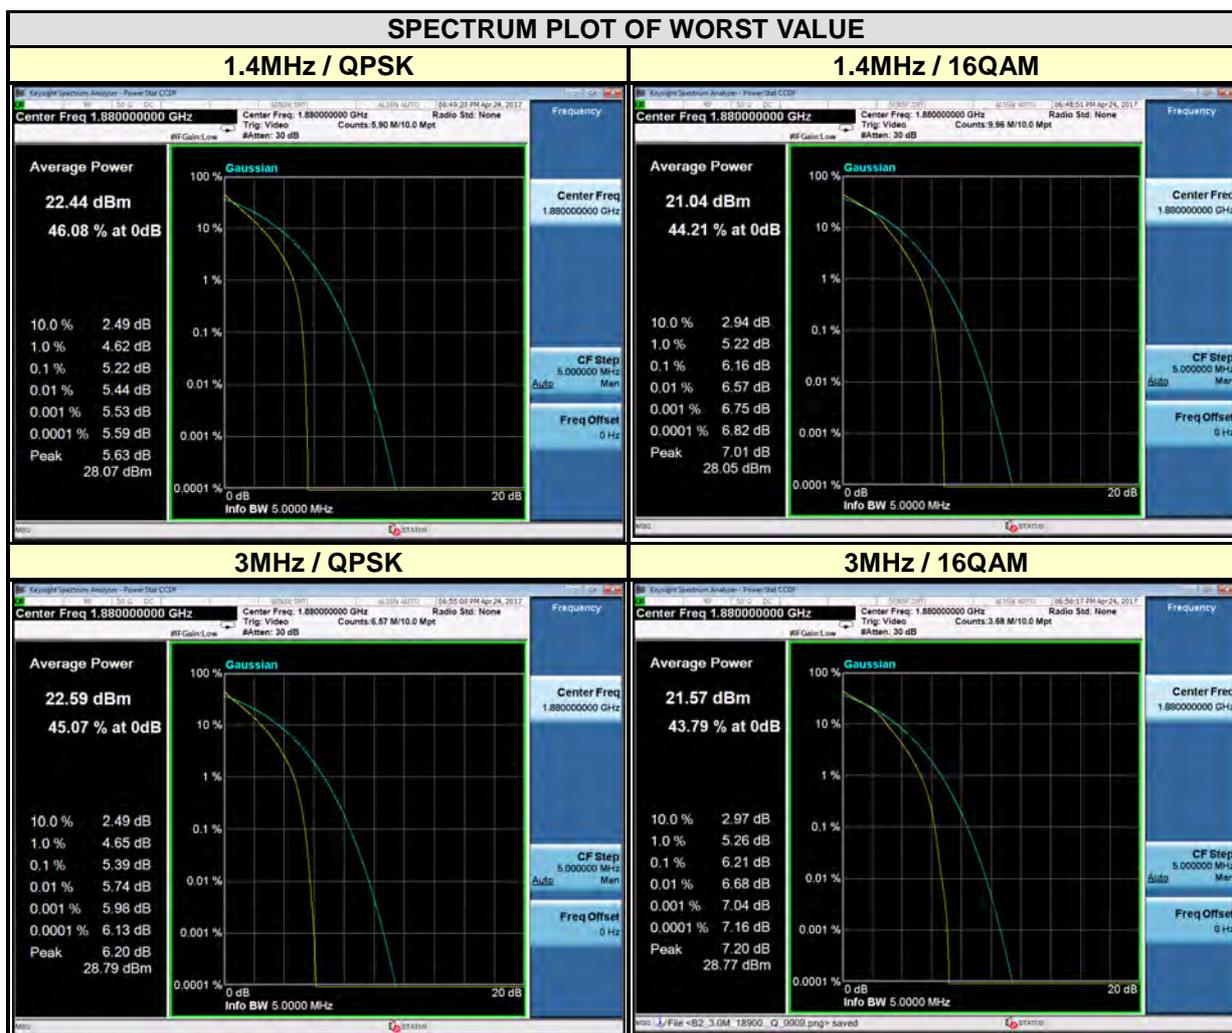

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	5.14	5.94	18650	1855	5.18	5.98
18900	1880	5.61	6.12	18900	1880	5.36	6.15
19175	1907.5	5.16	6.05	19150	1905	5.16	6.05

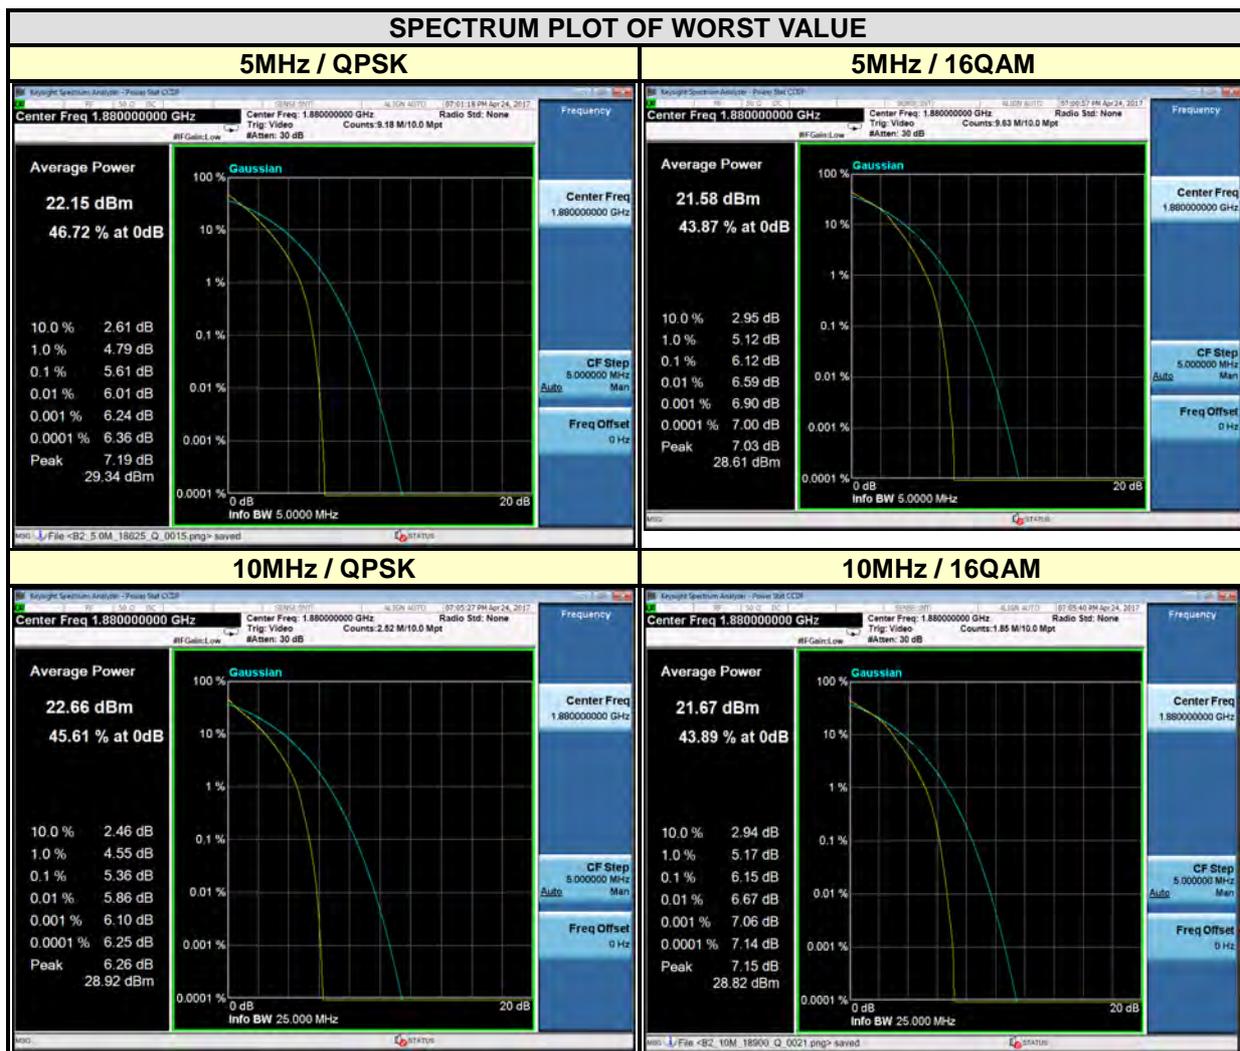

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	5.17	6.04	18700	1860	5.27	6.08
18900	1880	5.22	6.07	18900	1880	5.21	6.08
19125	1902.5	5.17	6.10	19100	1900	5.32	6.14

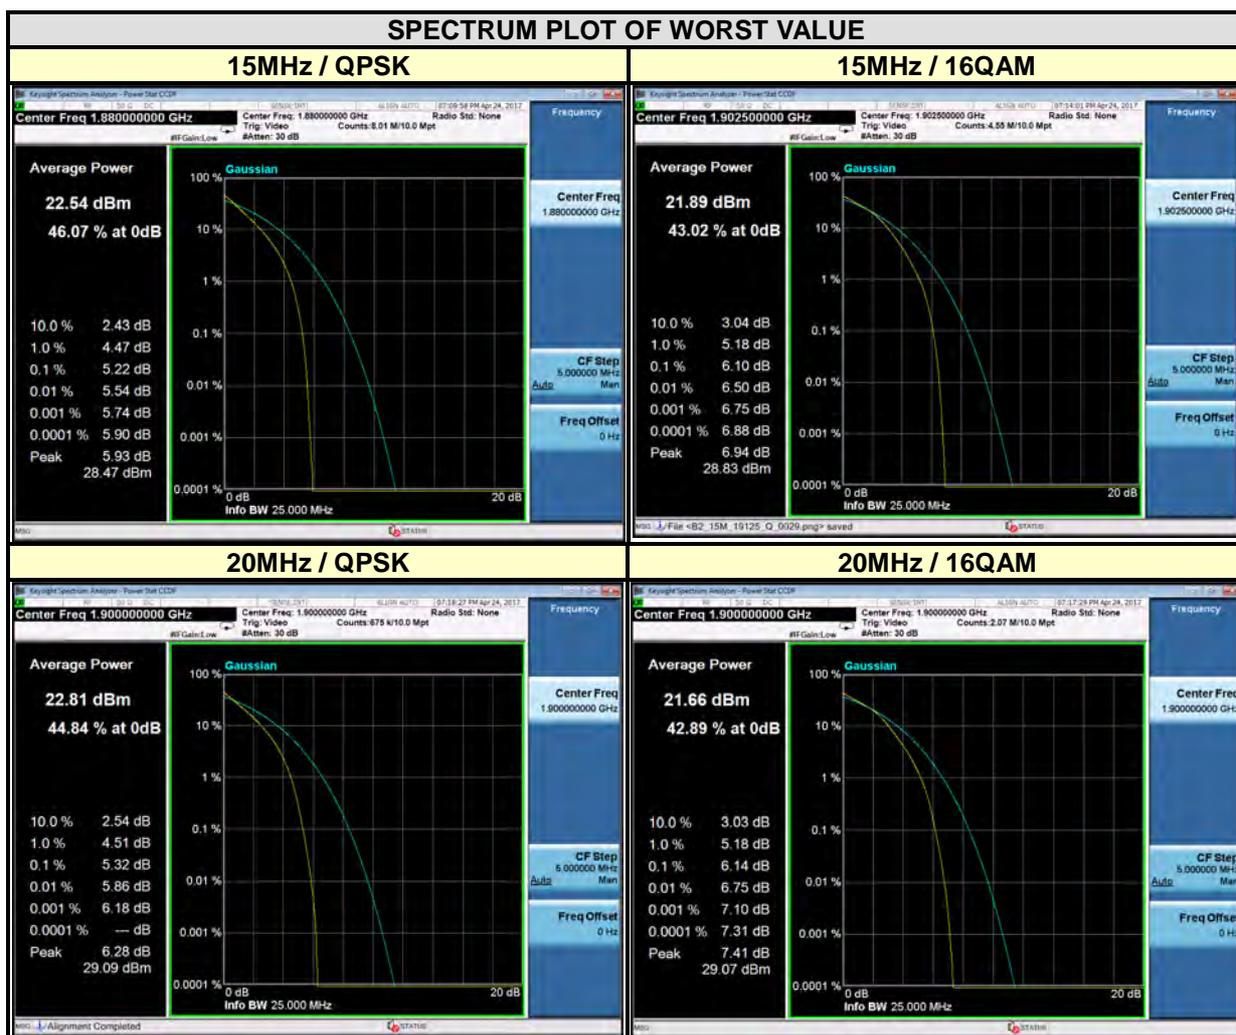

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Dongguan EMC/RF Lab:**

Tel: +86-769-85935656

Fax: +86-769-85931080

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



**BUREAU  
VERITAS**

Test Report No.: RF170330W002-4

## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**