

TEST REPORT

Applicant: Shantou Yile Technology Co., Ltd.

Address of Applicant: No.5 Yongxiang Road,Lingting, Chenghai Area, Shantou, China

Manufacturer: Shantou Yile Technology Co., Ltd.

Address of Manufacturer: No.5 Yongxiang Road,Lingting, Chenghai Area, Shantou, China

Equipment Under Test (EUT)

Product Name: R/C DRONE

Model No.: S160, S181, S119, S159, S116, S806, S807, S812, S810, S811, S817, S815, S816, S818, S819, S911, S912, S913, S915, S917, S918, S910, S777, S710, S717, S718, S719, S716, S715, S881, S901, S902, S919

FCC ID: 2A5OM-S160

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: January 02, 2025

Date of Test: January 03-16, 2025

Date of report issued: January 16, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:


Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	January 16, 2025	Original

Prepared By:




Date:

January 16, 2025

Project Engineer

Check By:



Date:

January 16, 2025

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD	14
7.3.1 Field Strength of The Fundamental Signal	16
7.3.2 Spurious emissions.....	17
7.3.3 Bandedge emissions.....	22
7.4 20dB OCCUPY BANDWIDTH	23
8 TEST SETUP PHOTO.....	25
9 EUT CONSTRUCTIONAL DETAILS	25

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	R/C DRONE
Model No.:	S160, S181, S119, S159, S116, S806, S807, S812, S810, S811, S817, S815, S816, S818, S819, S911, S912, S913, S915, S917, S918, S910, S777, S710, S717, S718, S719, S716, S715, S881, S901, S902, S919
Test Model No.:	S160
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	N/A
Test sample(s) ID:	GTS2025010026-1
Sample(s) Status	Engineered sample
Operation Frequency:	2417MHz~2473MHz
Channel Numbers:	56
Modulation Type:	GFSK
Antenna Type:	Wire Antenna
Antenna gain:	0.17dBi(declare by applicant)
Power supply:	DC 3.7V, 500mAh, 1.85Wh for Li-ion battery The battery is charged via USB DC5V

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2417	15	2431	29	2445	43	2459
2	2418	16	2432	30	2446	44	2460
3	2418	17	2433	31	2447	45	2461
4	2420	18	2434	32	2448	46	2462
5	2421	19	2435	33	2449	47	2463
6	2422	20	2436	34	2450	48	2464
7	2423	21	2437	35	2451	49	2465
8	2424	22	2438	36	2452	50	2467
9	2425	23	2439	37	2453	51	2468
10	2426	24	2440	38	2454	52	2469
11	2427	25	2441	39	2455	53	2470
12	2428	26	2442	40	2456	54	2471
13	2429	27	2443	41	2457	55	2472
14	2430	28	2444	42	2458	56	2473

The test frequencies are below:

Channel	Frequency
The lowest channel	2417MHz
The middle channel	2445MHz
The Highest channel	2473MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: New battery is used during all test.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	90.41	91.60	89.29

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
XIAOMI	USB Charger	MDY-10-EH	N/A
HUAWEI	Mobile Phone	MATE 30	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Jun. 22, 2024	Jun. 21, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 11, 2024	Apr. 10, 2025
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Mar. 19, 2023	Mar. 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 17, 2023	Apr. 16, 2025
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Apr. 11, 2024	Apr. 10, 2025
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.12, 2024	Nov.11, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2024	Apr. 10, 2025
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2024	Apr. 10, 2025
10	Horn Antenna (15GH-40GHz)	SCHWARZBECK	01296	GTS691	Mar. 07, 2024	Mar. 06, 2025
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 12, 2024	Mar. 11, 2025
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2024	Apr. 10, 2025
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 07, 2024	Nov. 06, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2024	Apr. 10, 2025
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 18, 2024	Apr. 17, 2025
16	RE cable 1	GTS	N/A	GTS675	Jul. 02, 2024	Jul. 01, 2025
17	RE cable 2	GTS	N/A	GTS676	Jul. 02, 2024	Jul. 01, 2025
18	RE cable 3	GTS	N/A	GTS677	Jul. 02, 2024	Jul. 01, 2025
19	RE cable 4	GTS	N/A	GTS678	Jul. 02, 2024	Jul. 01, 2025
20	RE cable 5	GTS	N/A	GTS679	Jul. 02, 2024	Jul. 01, 2025
21	RE cable 6	GTS	N/A	GTS680	Jul. 02, 2024	Jul. 01, 2025
22	RE cable 7	GTS	N/A	GTS681	Jul. 05, 2024	Jul. 04, 2025
23	RE cable 8	GTS	N/A	GTS682	Jul. 05, 2024	Jul. 04, 2025
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2024	Apr. 10, 2025
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2024	Apr. 10, 2025
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 18, 2024	Apr. 17, 2025
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 11, 2024	Apr. 10, 2025
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2024	Apr. 10, 2025
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2024	Apr. 10, 2025
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2024	Apr. 10, 2025
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 13, 2024	Apr. 12, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 13, 2024	Apr. 12, 2025
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 13, 2024	Apr. 12, 2025
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 13, 2024	Apr. 12, 2025
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 13, 2024	Apr. 12, 2025
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 13, 2024	Apr. 12, 2025
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 13, 2024	Apr. 12, 2025
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 13, 2024	Apr. 12, 2025
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 18, 2024	Apr. 17, 2025


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Apr. 18, 2024	Apr. 17, 2025

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is wire antenna, reference to the appendix II for details.	


7.2 Conducted Emissions

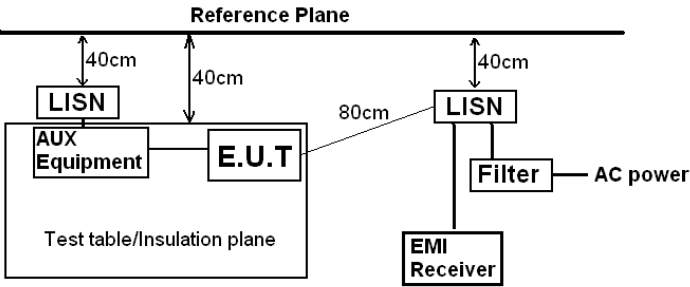Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	 <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC120V 60Hz					
Test results:	Pass					

Measurement data


Pre-scan all test modes, found worst case at 2417MHz, and so only show the test result of it.

Line:

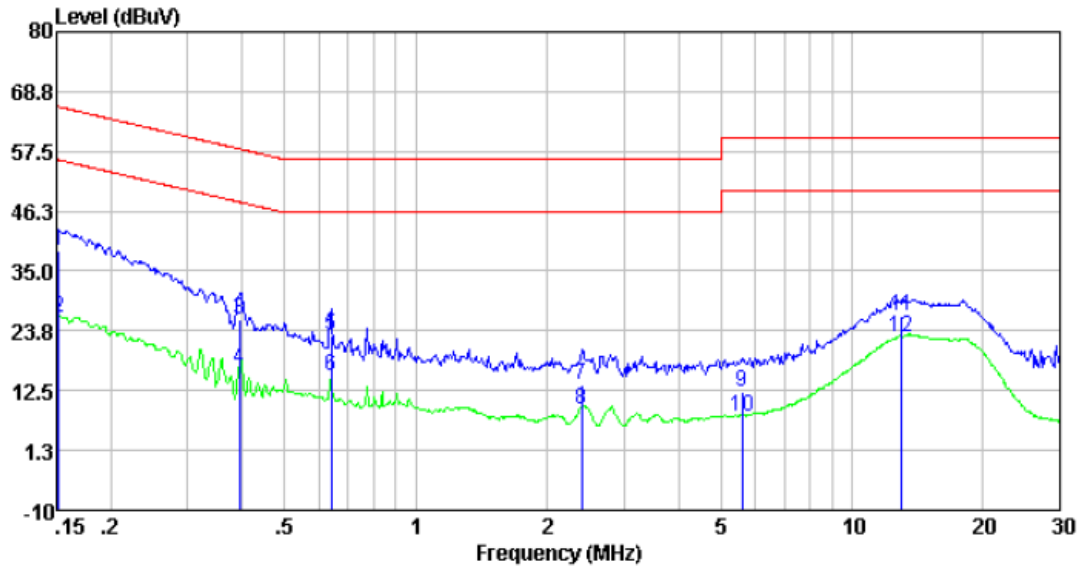

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.15	28.80	10.04	0.01	38.85	65.91	-27.06	QP
0.15	16.28	10.04	0.01	26.33	55.91	-29.58	Average
0.39	16.08	9.62	0.01	25.71	57.99	-32.28	QP
0.39	6.89	9.62	0.01	16.52	47.99	-31.47	Average
0.64	13.22	9.66	0.02	22.90	56.00	-33.10	QP
0.64	5.69	9.66	0.02	15.37	46.00	-30.63	Average
2.40	3.68	9.69	0.05	13.42	56.00	-42.58	QP
2.40	-0.75	9.69	0.05	8.99	46.00	-37.01	Average
5.59	2.42	9.77	0.07	12.26	60.00	-47.74	QP
5.59	-2.09	9.77	0.07	7.75	50.00	-42.25	Average
12.99	16.59	9.68	0.14	26.41	60.00	-33.59	QP
12.99	12.85	9.68	0.14	22.67	50.00	-27.33	Average

Neutral:

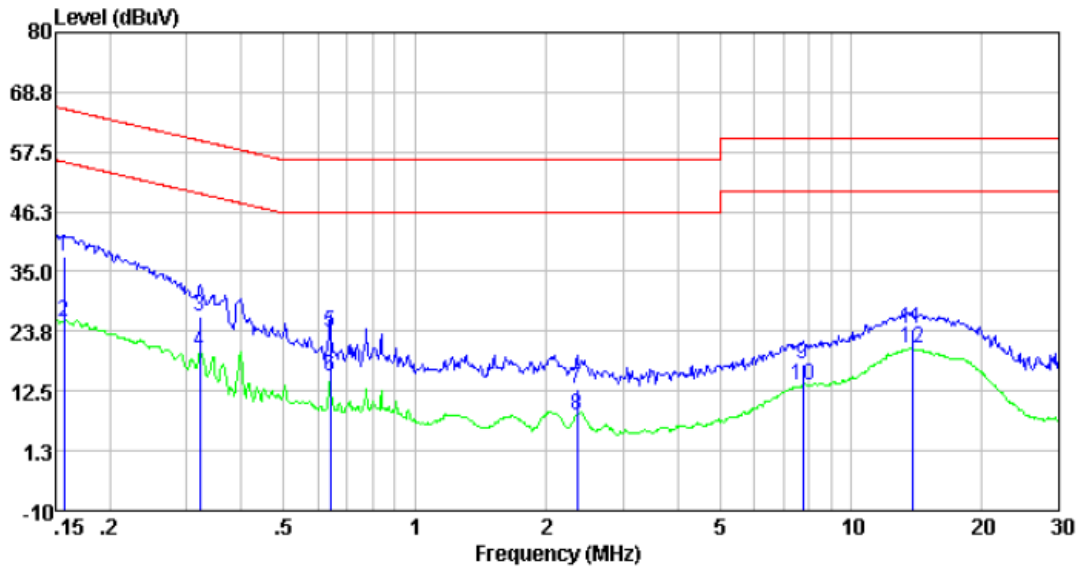




Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	28.00	9.89	0.01	37.90	65.65	-27.75	QP
0.16	15.67	9.89	0.01	25.57	55.65	-30.08	Average
0.32	16.70	9.80	0.01	26.51	59.66	-33.15	QP
0.32	10.10	9.80	0.01	19.91	49.66	-29.75	Average
0.64	13.65	9.86	0.02	23.53	56.00	-32.47	QP
0.64	5.48	9.86	0.02	15.36	46.00	-30.64	Average
2.36	3.23	9.65	0.05	12.93	56.00	-43.07	QP
2.36	-1.66	9.65	0.05	8.04	46.00	-37.96	Average
7.77	7.88	9.63	0.09	17.60	60.00	-42.40	QP
7.77	3.90	9.63	0.09	13.62	50.00	-36.38	Average
13.84	13.95	9.98	0.15	24.08	60.00	-35.92	QP
13.84	10.27	9.98	0.15	20.40	50.00	-29.60	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

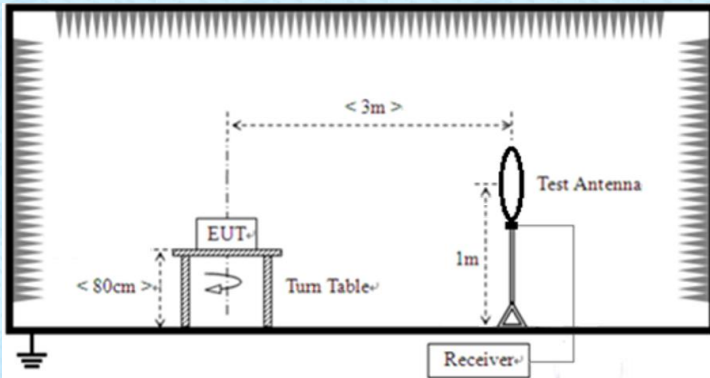Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

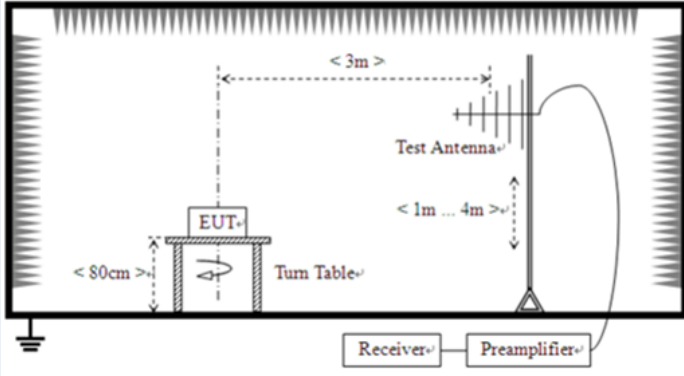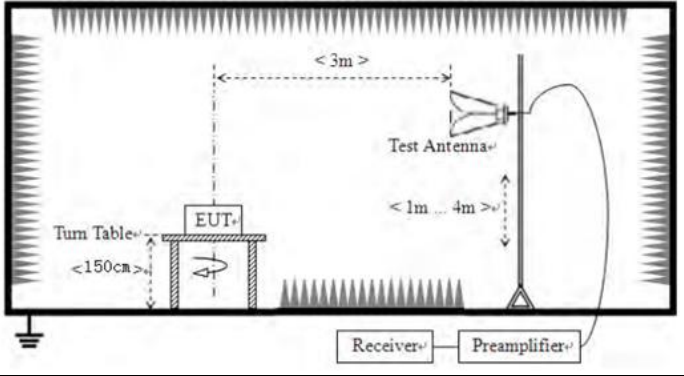	 For radiated emissions above 1GHz 
Test Procedure:	

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2417.00	88.89	27.14	4.16	39.40	80.79	114.00	-33.21	Vertical
2417.00	97.82	27.14	4.16	39.40	89.72	114.00	-24.28	Horizontal
2445.00	89.37	27.18	4.13	39.46	81.22	114.00	-32.78	Vertical
2445.00	99.75	27.18	4.13	39.46	91.60	114.00	-22.40	Horizontal
2473.00	87.84	27.22	4.11	39.51	79.66	114.00	-34.34	Vertical
2473.00	97.80	27.22	4.11	39.51	89.62	114.00	-24.38	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2417.00	77.52	27.14	4.16	39.40	69.42	94.00	-24.58	Vertical
2417.00	86.52	27.14	4.16	39.40	78.42	94.00	-15.58	Horizontal
2445.00	78.07	27.18	4.13	39.46	69.92	94.00	-24.08	Vertical
2445.00	88.43	27.18	4.13	39.46	80.28	94.00	-13.72	Horizontal
2473.00	76.60	27.22	4.11	39.51	68.42	94.00	-25.58	Vertical
2473.00	86.55	27.22	4.11	39.51	78.37	94.00	-15.63	Horizontal

Note: For fundamental frequency , RBW>20dB BW, VBW>=RBW, PK detector for PK value, RMS detector for AV value


7.3.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Pre-scan all test modes, found worst case at 2417MHz, and so only show the test result of it
Horizontal

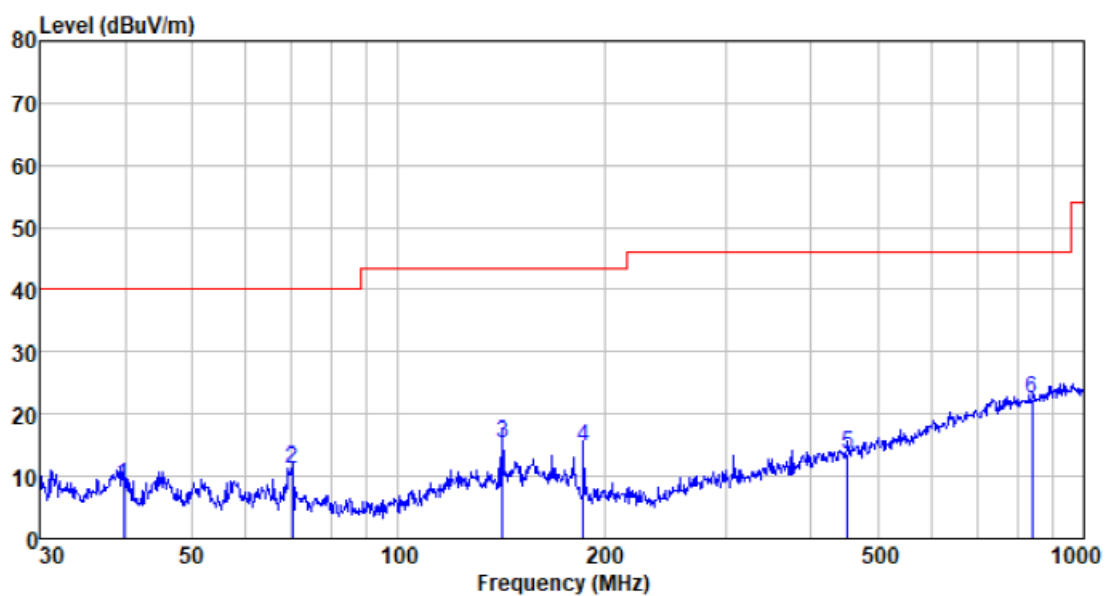

Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBUV/m	Limit level dBUV/m	Over limit dB	Remark
39.715	25.27	14.34	1.26	32.30	8.57	40.00	-31.43	QP
70.090	31.30	10.79	1.65	32.38	11.36	40.00	-28.64	QP
141.826	31.54	13.88	2.39	32.46	15.35	40.00	-24.65	QP
186.441	33.46	10.96	2.76	32.41	14.77	40.00	-25.23	QP
452.720	25.71	16.05	4.05	32.22	13.59	47.00	-33.41	QP
839.182	25.49	22.48	5.58	31.10	22.45	47.00	-24.55	QP

Vertical

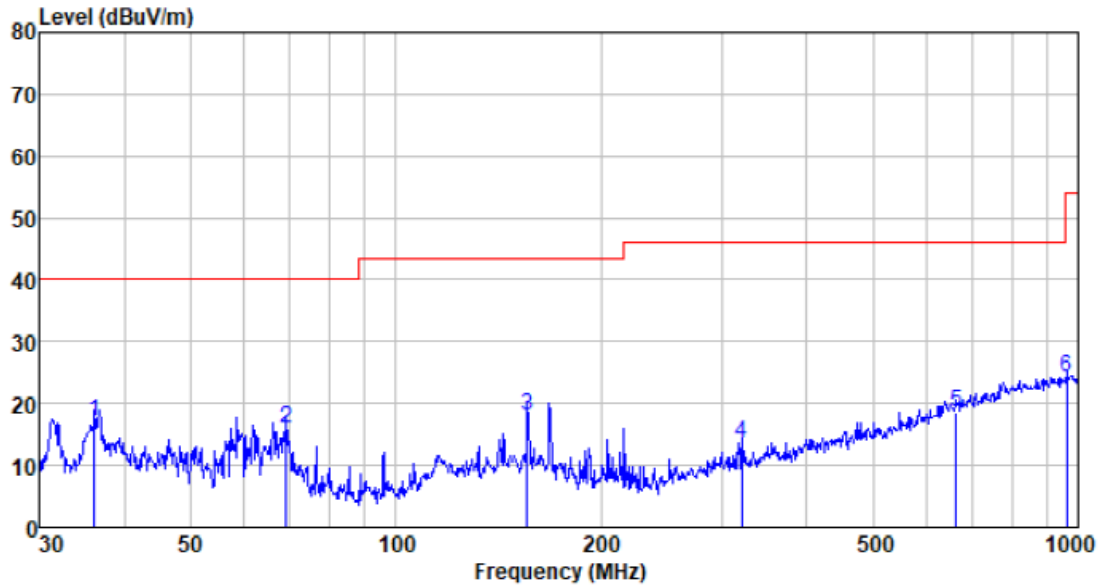

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.127	34.75	13.33	1.20	32.30	16.98	40.00	-23.02	QP
69.114	35.89	10.89	1.64	32.38	16.04	40.00	-23.96	QP
155.910	33.11	14.80	2.52	32.44	17.99	43.50	-25.51	QP
321.061	29.36	12.92	3.53	32.29	13.52	46.00	-32.48	QP
663.473	25.23	20.07	4.92	31.60	18.62	46.00	-27.38	QP
962.162	25.77	23.70	5.91	31.10	24.28	54.00	-29.72	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4834.00	34.64	31.09	7.29	38.36	34.66	74.00	-39.34	Vertical
7251.00	30.06	35.84	9.43	38.97	36.36	74.00	-37.64	Vertical
9668.00	29.90	38.26	10.03	39.69	38.50	74.00	-35.50	Vertical
4834.00	38.38	31.09	7.29	38.36	38.40	74.00	-35.60	Horizontal
7251.00	31.58	35.84	9.43	38.97	37.88	74.00	-36.12	Horizontal
9668.00	29.07	38.26	10.03	39.69	37.67	74.00	-36.33	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4834.00	23.96	31.09	7.29	38.36	23.98	54.00	-30.02	Vertical
7251.00	19.05	35.84	9.43	38.97	25.35	54.00	-28.65	Vertical
9668.00	18.29	38.26	10.03	39.69	26.89	54.00	-27.11	Vertical
4834.00	27.89	31.09	7.29	38.36	27.91	54.00	-26.09	Horizontal
7251.00	21.05	35.84	9.43	38.97	27.35	54.00	-26.65	Horizontal
9668.00	17.80	38.26	10.03	39.69	26.40	54.00	-27.60	Horizontal

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	34.85	32.04	7.04	38.38	35.55	74.00	-38.45	Vertical
7335.00	30.20	36.10	9.18	39.00	36.48	74.00	-37.52	Vertical
9780.00	30.02	38.30	10.27	39.73	38.86	74.00	-35.14	Vertical
4890.00	38.63	32.04	7.04	38.38	39.33	74.00	-34.67	Horizontal
7335.00	31.74	36.10	9.18	39.00	38.02	74.00	-35.98	Horizontal
9780.00	29.21	38.30	10.27	39.73	38.05	74.00	-35.95	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	24.13	32.04	7.04	38.38	24.83	54.00	-29.17	Vertical
7335.00	19.17	36.10	9.18	39.00	25.45	54.00	-28.55	Vertical
9780.00	18.40	38.30	10.27	39.73	27.24	54.00	-26.76	Vertical
4890.00	28.08	32.04	7.04	38.38	28.78	54.00	-25.22	Horizontal
7335.00	21.18	36.10	9.18	39.00	27.46	54.00	-26.54	Horizontal
9780.00	17.92	38.30	10.27	39.73	26.76	54.00	-27.24	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4946.00	34.78	32.19	6.75	38.39	35.33	74.00	-38.67	Vertical
7419.00	30.16	36.39	9.00	39.03	36.52	74.00	-37.48	Vertical
9892.00	29.98	38.36	10.12	39.77	38.69	74.00	-35.31	Vertical
4946.00	38.55	32.19	6.75	38.39	39.10	74.00	-34.90	Horizontal
7419.00	31.69	36.39	9.00	39.03	38.05	74.00	-35.95	Horizontal
9892.00	29.16	38.36	10.12	39.77	37.87	74.00	-36.13	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4946.00	24.08	32.19	6.75	38.39	24.63	54.00	-29.37	Vertical
7419.00	19.13	36.39	9.00	39.03	25.49	54.00	-28.51	Vertical
9892.00	18.37	38.36	10.12	39.77	27.08	54.00	-26.92	Vertical
4946.00	28.03	32.19	6.75	38.39	28.58	54.00	-25.42	Horizontal
7419.00	21.14	36.39	9.00	39.03	27.50	54.00	-26.50	Horizontal
9892.00	17.89	38.36	10.12	39.77	26.60	54.00	-27.40	Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. For above 18GHz, no emission found.
4. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	54.63	27.00	4.13	39.14	46.62	74.00	-27.38	Horizontal
2390.00	57.64	27.08	4.17	39.34	49.55	74.00	-24.45	Horizontal
2400.00	55.62	27.10	4.18	39.36	47.54	74.00	-26.46	Horizontal
2310.00	58.55	27.00	4.13	39.14	50.54	74.00	-23.46	Vertical
2390.00	55.09	27.08	4.17	39.34	47.00	74.00	-27.00	Vertical
2400.00	58.34	27.10	4.18	39.36	50.26	74.00	-23.74	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	44.05	27.00	4.13	39.14	36.04	54.00	-17.96	Horizontal
2390.00	46.97	27.08	4.17	39.34	38.88	54.00	-15.12	Horizontal
2400.00	45.14	27.10	4.18	39.36	37.06	54.00	-16.94	Horizontal
2310.00	47.95	27.00	4.13	39.14	39.94	54.00	-14.06	Vertical
2390.00	44.41	27.08	4.17	39.34	36.32	54.00	-17.68	Vertical
2400.00	47.52	27.10	4.18	39.36	39.44	54.00	-14.56	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	56.91	27.27	4.08	39.56	48.70	74.00	-25.30	Horizontal
2500.00	55.68	27.30	4.06	39.60	47.44	74.00	-26.56	Horizontal
2483.50	57.97	27.27	4.08	39.56	49.76	74.00	-24.24	Vertical
2500.00	56.79	27.30	4.06	39.60	48.55	74.00	-25.45	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.21	27.27	4.08	39.56	38.00	54.00	-16.00	Horizontal
2500.00	45.04	27.30	4.06	39.60	36.80	54.00	-17.20	Horizontal
2483.50	46.78	27.27	4.08	39.56	38.57	54.00	-15.43	Vertical
2500.00	46.14	27.30	4.06	39.60	37.90	54.00	-16.10	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. For above 18GHz, no emission found


7.4 20dB Occupy Bandwidth

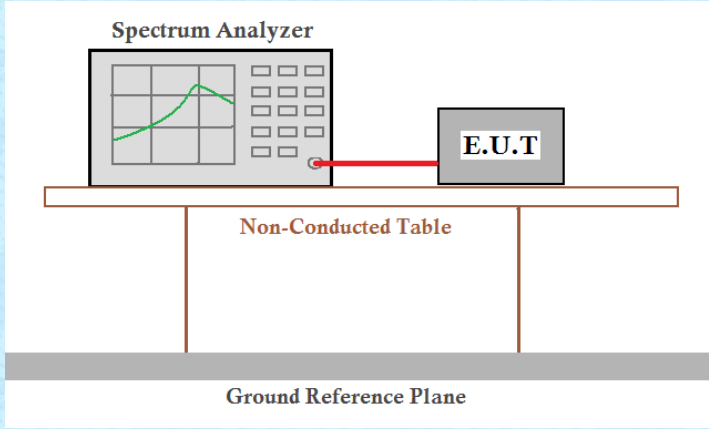Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.771	Pass
Middle	1.840	Pass
Highest	1.682	Pass


Test plot as follows:

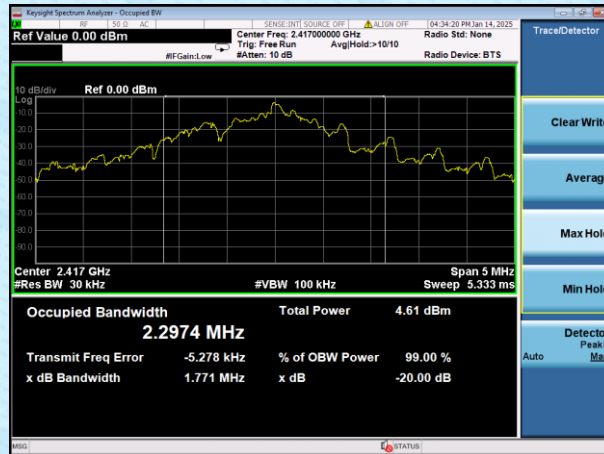

Lowest channel

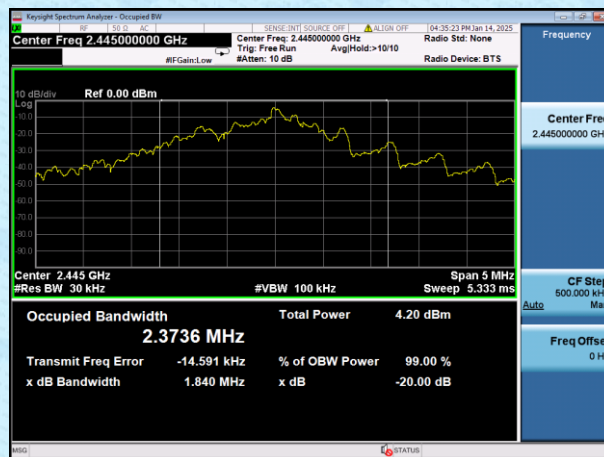

Middle channel

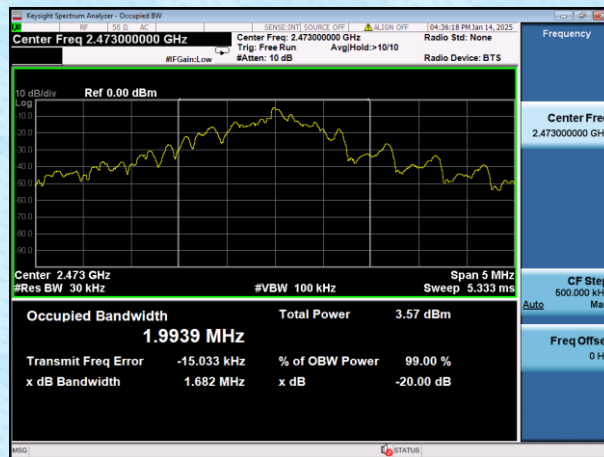

Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----