


VibroBand

User Manual

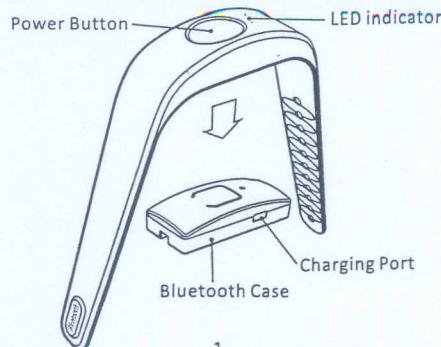

Charging

1. For charging, you need to take out the Bluetooth case away from the band
2. Plug USB end to charging port of VibroBand and connect the other end to your computer to start charging
3. LED of VibroBand is steadily on during charging
4. LED goes off when VibroBand is fully charged

Note

※ Low battery warning : VibroBand vibrates 4 times every 30 seconds when battery is low

※ VibroBand does not function during charging

2

Power On/Off

- On: Press and hold Power button for 3 seconds to turn on VibroBand, LED blinks 3 times
- Off: Press and hold Power button for 4 seconds to turn off VibroBand, LED blinks 4 times

Pairing

It is necessary to pair VibroBand with your cellular phone devices before it can properly work

1. Make sure power is turned off.
2. Press and hold power button for 6 seconds until LED is on steadily

3

3. Activate Bluetooth function of cellular phone to search for VibroBand
4. Select and confirm VibroBand when it is located
5. Enter pin code "0000" on cellular phone if required (some cellular phones connect to VibroBand with no pin code required)
6. VibroBand vibrates for 1.5 seconds when pairing is successful

4

※ When VibroBand is out of connection range more than 5 minutes, the power will turn off automatically, press power button for 3 seconds to turn on and back to connected mode.

LED indicator

- Power on: Blinks 3 times
- Power off: Blinks 4 times
- Pairing: Blinks steadily
- Connectable mode: Blinks once every 5 seconds
- Connected mode: Blinks twice every 5 seconds
- Charging: LED is on steadily
- Charging complete: LED is off

5

Specifications

Profile	HSP 1.0, HFP 1.5
Carrier Frequency	2402~2480 MHz
Modulation	GFSK
Bluetooth Class	Class 2
Hopping	1600 hops/sec, 1MHz Channel Space
Transmit Power	-6~+4 dBm
Coverage Range	10 Meters
Receiver Sensitivity	-75 dBm
Standby Time	80 Hours
Dimension	250 x 22 x 11 mm
Charging Voltage	DC 5.0 ~ 5.2 V
Battery	Lithium Polymer 3.7V 50mAH

6

Special Note

The VibroBand is especially designed for Bluetooth device, however, due to the variety design of those devices, we cannot guarantee that VibroBand is compatible to all Bluetooth devices. Also, the maximum connection range is 10 meters around but could be less due to a

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.