

TABLE OF CONTENTS LIST

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS AND OCCUPIED BANDWIDTH
PAGE 4.....METHOD OF MEASURING OCCUPIED BANDWIDTH
PAGE 5.....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 6.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 7.....FREQUENCY STABILITY
PAGE 8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 3A.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 3B.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT 3C.....INTERNAL PHOTO - SOLDER SIDE
EXHIBIT 3D.....INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT 4.....BLOCK DIAGRAM
EXHIBIT 5A-5C.....SCHEMATIC
EXHIBIT 6A-6P.....USER'S MANUAL
EXHIBIT 7A-7B.....CIRCUIT DESCRIPTION
EXHIBIT 8A-8B.....TUNING PROCEDURE
EXHIBIT 9.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT 10A.....MODULATION LIMITING PLOT - 300 Hz
EXHIBIT 10B.....MODULATION LIMITING PLOT - 1000 Hz
EXHIBIT 10C.....MODULATION LIMITING PLOT - 3000 Hz
EXHIBIT 11.....AUDIO LOW PASS FILTER GRAPH
EXHIBIT 12A.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT 12B.....OCCUPIED BANDWIDTH PLOT
EXHIBIT 13.....TEST SETUP PHOTOGRAPH

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1RPT.doc

PAGE: TABLE OF CONTENTS

GENERAL_INFORMATION_REQUIRED
FOR_TYPE_ACCEPTANCE

2.1033(c)(1)(2)VICTORY CONCEPT IND. LTD.will manufacture the
FCCID: OJ7968FRS0401 FAMILY RADIO SERVICES 14 CHANNEL
TRANSCEIVER in quantity, for use under FCC RULES
PART 95. The UUT is a PTT Radio with a maximum duty
cycle of 50%.

VICTORY CONCEPT IND. LTD.
RM. 1314-1315, KWONG SANG HONG CENTRE
151-153 HOI BUN ROAD, KWUN TONG
KOWLOON HONG KONG

2.1033 (c) TECHNICAL_DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 6A-6P.

2.1033(c) (4) Type of Emission: 10K6F3E
95.631

Bn = 2M + 2DK
M = 3000
D = 2.0K
Bn = 2(3.0)+2(2.3) = 10.6K

Authorized Bandwidth 12.5KHz

2.1033(c)(5) Frequency Range: 1. 462.5625 8. 467.5625
95.627 2. 462.5875 9. 467.5875
3. 462.6125 10. 467.6125
4. 462.6375 11. 467.6375
5. 462.6625 12. 467.6625
6. 462.6875 13. 467.6875
7. 462.7125 14. 467.7125 MHz

2.1033(c)(6)(7) Power Output shall not exceed 0.500Watts effective
95.639 radiated power. There can be no provisions for
95.649 increasing the power or varing the power. The Maximum
Output Power Measured from this device is: .025 Watts
effective radiated power.

95.647 The antenna is an intergral part to the unit, it cannot
be removed without rendering the unit inoperative. In
order to remove the antenna the case must unscrewed,
then the PCB assemblies must be removed then the
antenna can be removed.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY
Vce = 6.0 Volts DC Ice = 0.25A.
Pin = 1.5 Watts

APPLICANT: VICTORY CONCEPT IND. LTD.
FCC ID: OJ7968FRS0401
REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1.RPT
PAGE #: 1

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included in as EXHIBIT 8A-8B.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5A-5C of this report. The block diagram is included as EXHIBIT 4 of this report.

2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1. and No. 2.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields - See EXHIBIT 3A-3D.


2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046(a) RF power output.

95.639 RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The ERP shall not exceed 0.500 Watts.

MEASURED POWER OUTPUT = .25 Watts ERP

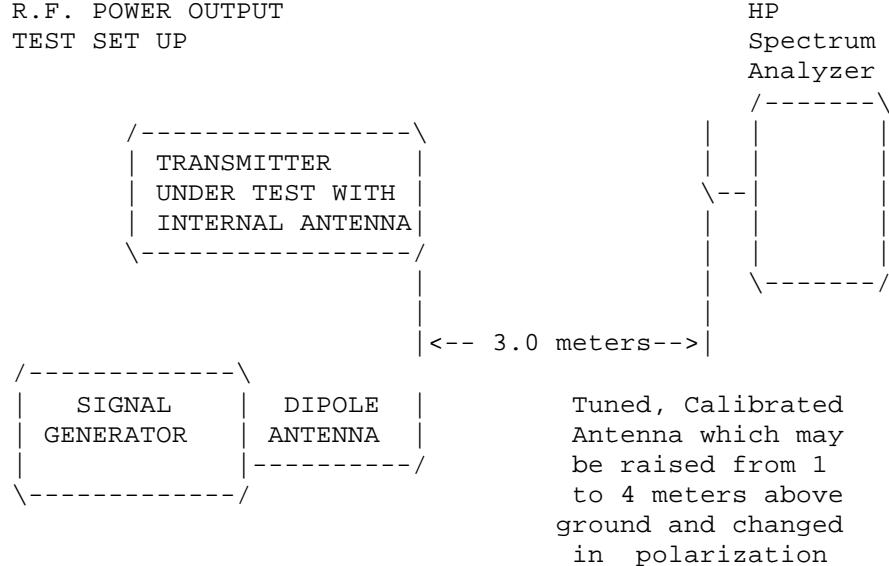

Equipment placed 80cm above ground on a rotatable platform.

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1.RPT

PAGE #: 2

2.1047(a)(b) Modulation characteristics:

AUDIO_FREQUENCY_RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown in exhibit 9. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

2.1047(b) Audio_input_versus_modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown in exhibits 10A - 10C. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

95.637(b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See the plot; exhibit 11.

2.989(c) EMISSION BANDWIDTH:
95.633(c)


Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43+\log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram follows. See the occupied bandwidth plots; exhibits 12A-12B.

APPLICANT: VICTORY CONCEPT IND. LTD.
FCC ID: OJ7968FRS0401
REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1RPT.doc
PAGE #: 3

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

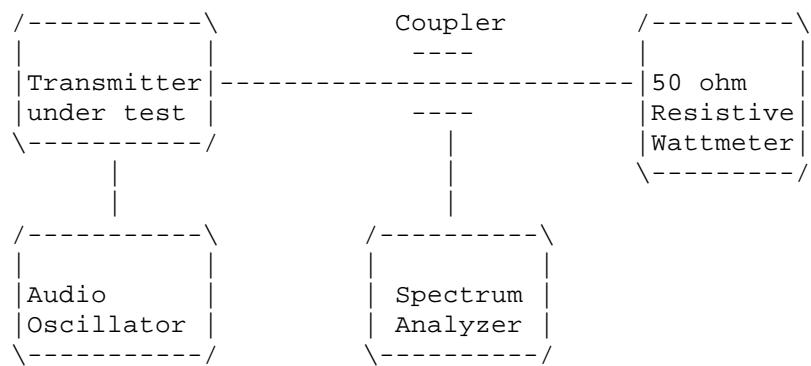

APPLICANT: VICTORY CONCEPT IND. LTD.
FCC ID: OJ7968FRS0401
REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1RPT.doc
PAGE #: 4

2.1051 Not Applicable, no antenna terminal allowed.

2.1053
95.635(b)(4) UNWANTED_RADIATION:

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$43 + 10\log(\text{TP}) = 43 + 10\log(0.25) = 36.99 \text{ dB}$$

TEST DATA:

EMISSION FREQ. MHz.	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATT. dBuV/m	MARGIN Db	ANT.
462.70	101.00	1.60	18.44	121.04	0.00	0.00	V
925.30	37.70	2.90	24.10	64.70	56.34	19.36	H
1388.00	38.10	1.00	25.55	64.65	56.39	19.41	V
1850.70	36.40	1.01	27.40	64.81	56.23	19.25	V
2313.40	14.60	1.08	28.78	44.46	76.58	39.60	V
2776.10	5.40	1.15	29.94	36.49	84.56	47.57	V
3238.80	4.20	1.22	31.10	36.51	84.53	47.55	V
3701.50	3.50	1.29	32.25	37.04	84.00	47.02	H
4164.20	4.40	1.35	33.18	38.94	82.10	45.12	V
4627.00	10.70	1.42	33.71	45.83	75.21	38.23	V

MARGIN = (Field strength of Fund - 36.99 dB) - FS OF EMISSION

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for intentional radiators. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, and an appropriate antenna - see test equipment list. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.


APPLICANT: VICTORY CONCEPT IND. LTD.
FCC ID: OJ7968FRS0401
REPORT #: V\VICTORY\435AH1\435AH1RPT.doc
PAGE #: 5

2.1053
95.635

UNWANTED_RADIATION:

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566B

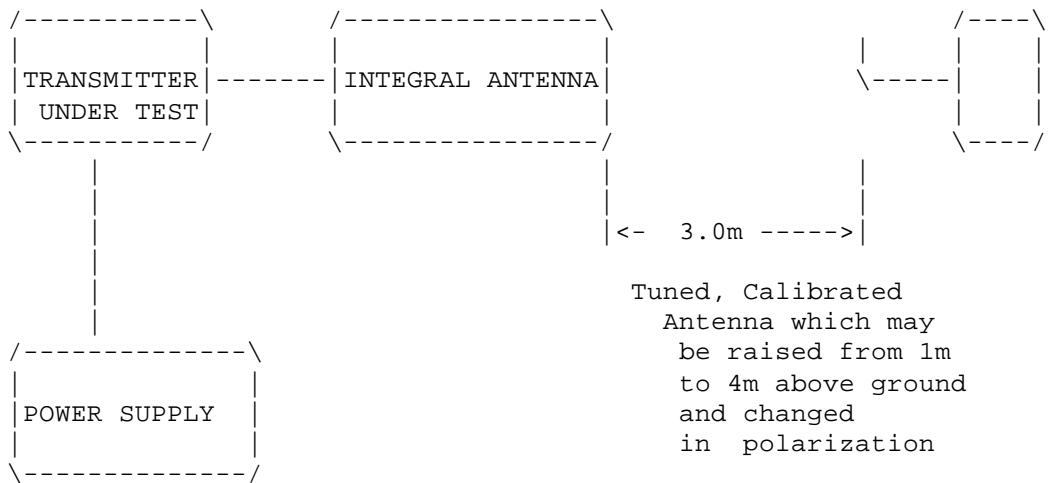

Equipment placed 80cm above ground
on a rotatable platform.

APPLICANT: VICTORY CONCEPT IND. LTD.
FCC ID: OJ7968FRS0401
REPORT #: T:CUS\V\VICTORY\435AH1\435AH1RPT.doc
PAGE #: 6

Frequency_stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -20 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 6 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.662 500

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	462.662 500	00.00
-20_____	462.661 490	-2.19
-10_____	462.662 243	-0.56
0_____	462.661 770	-1.58
+10_____	462.661 999	-1.08
+20_____	462.662 281	-0.47
+30_____	462.662 222	-0.60
+40_____	462.662 193	-0.66
+50_____	462.662 506	0.01
BATT. End-Point 5.1V/dc	462.662 291	-0.45
BATT. End-Point 6.9V/dc	462.662 292	-0.45

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.19 to +0.01 ppm. The maximum frequency variation with voltage was -0.45 ppm.

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1RPT.doc

PAGE #: 7

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 1/19/01
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057, Cal 3/15/00
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
Cal. 3/16/01
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
Cal. 3/15/00
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
Cal. 3/15/00
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
Cal. 1/21/01
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 11/20/00
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545, Cal. 1/26/01
13. Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 11/21/00
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/00
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 2/1/01
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 11/16/00
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 2/1/01

APPLICANT: VICTORY CONCEPT IND. LTD.

FCC ID: OJ7968FRS0401

REPORT #: T:\CUS\V\VICTORY\435AH1\435AH1RPT.doc

PAGE #: 8