

# MOTHER NATURE'S MONITOR™


## Parts Included

- A. Sound Monitor
- B. Hanging Hook
- C. Bracket
- D. Flat Head Screw

## Features

- E. ON/OFF Button
- F. LED Light
- G. Light Sensor
- H. Sensor Button
- I. Antenna
- J. Microphone
- K. Channel Selector
- L. Battery Compartment


## Features

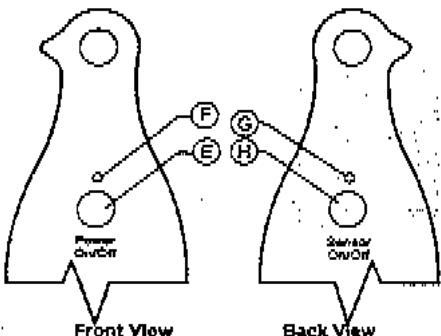


## Parts Not Included

Receiver - any FM radio (manual tuning recommended)

Batteries - four "C" required (alkaline batteries are strongly recommended)

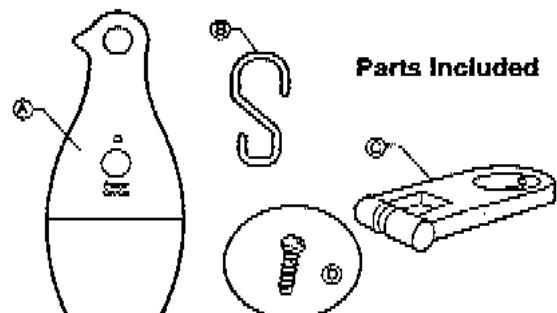

## Inside View

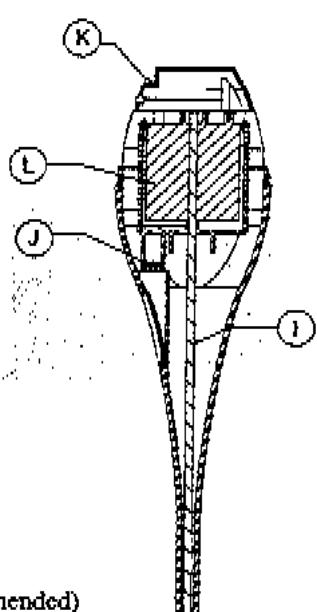

## Battery Installation

1. While holding the bottom of Mother Nature's Monitor™, turn top cover counterclockwise to align marks on top and bottom of unit. Lift off top cover to expose battery compartment (See Figure 1).
2. Press and slide the battery covers downward from each side (See Figure 2).
3. Install four "C" size batteries (alkaline batteries are strongly recommended) as indicated on battery compartment.
4. Replace battery covers. Reassemble unit by aligning marks on top and bottom and turning top cover clockwise.

**Note:** Remove batteries when monitor is not in use for an extended period of time.

## For Best Reception Place Mother Nature's Monitor™ On or Near:

- \* Bird houses      \* Bird feeders
- \* Bird's nest      \* Trees
- \* Fences      \* Fountains
- \* Gardens

**\*S** Hook is provided for hanging on or near locations listed above.

## Bracket Mounting (See Figure 3)

1. Slide bracket over any 1.2 inch diameter post (not included) and secure to post by tightening screw (included).
2. Using hook provided, hang monitor from bracket.

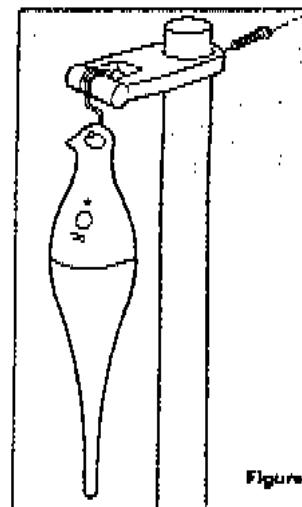
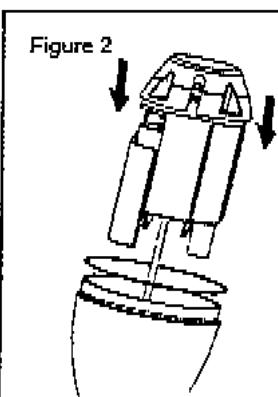
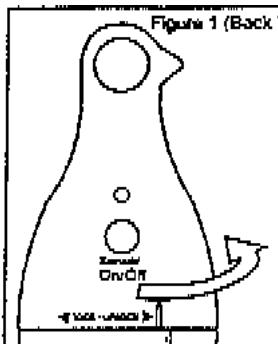


Figure 3

## To Activate the Unit (See Figure 4)

ON/OFF Button is located on the front of the Monitor

- \* Press once to activate monitor
- \* Press again to turn off



## Light Sensor (see Figure 5)

Light Sensor automatically activates when the unit is turned on. When in Sensor mode Mother Nature's Monitor™ automatically turns on in the day and off at night (See Figure 5). When first purchased, the unit will default to Light Sensor mode. The red LED light (just above the ON/OFF button) turns on when Light Sensor (on back of the sound monitor) detects sunlight. Using the Sensor feature conserves battery life.

To operate the unit at night, deactivate the light sensor by pressing the Sensor Button. (LED Light on front of unit will turn from red to green.)

## LED Light

- \* When both the Sensor Button and ON/OFF Button are ON, the LED light will be red. When unit does not detect light, the LED light will turn off. (For daytime use)
- \* When the Sensor Button is OFF and the ON/OFF Button is ON, the LED light will be green. (For 24 hour operation.)
- \* When the ON/OFF Button is OFF, the entire unit is off, therefore the LED light will not be on.

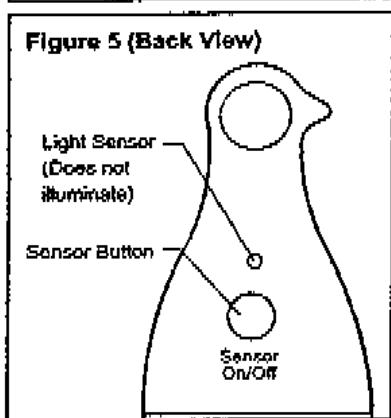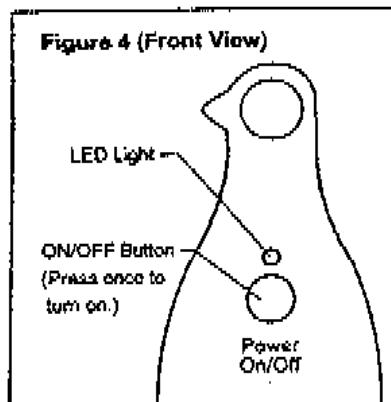

## Channel Selector (Channel Selector is located inside Mother Nature's Monitor™)

Mother Nature's Monitor™ has four channels (See Figure 6) to prevent interference from other appliances such as baby monitors, cordless phones, walkie-talkies, competing radio broadcasts, etc. Each channel has its own FM frequency (See Table 1).

For sound reception, your FM radio (receiver) must be tuned to match the frequency selected on Mother Nature's Monitor™. For example, if you select Channel 1 on the Monitor, you should adjust your FM radio frequency to FM104 MHz (See Figure 6).

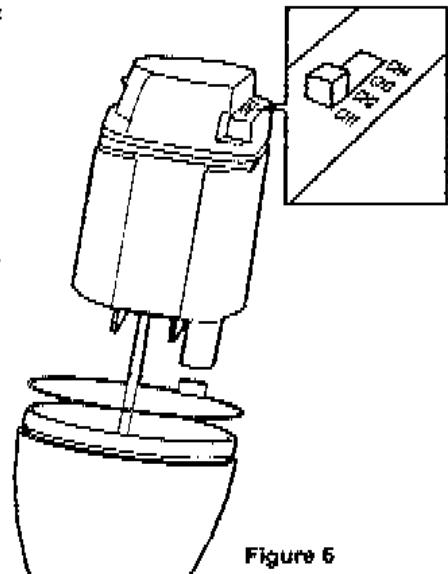


Figure 6

Table 1

Monitor Channel	FM Station
Channel 1	FM 104 MHz
Channel 2	FM 105 MHz
Channel 3	FM 106 MHz
Channel 4	FM 107 MHz

Note: Some fine-tuning may be required.

## Set Up and Installation

1. Turn on Mother Nature's Monitor™ and select a channel.
2. Tune your FM radio to the corresponding frequency as identified in Table 1.
3. Speak into the Monitor and keep tuning your FM station until you hear your own voice clearly through the receiver.
4. Mark the spot on your FM radio for future reference.
5. If you cannot hear your voice clearly, select another channel on the Monitor and tune your FM radio to the new frequency (See Table 1).
6. Place Mother Nature's Monitor™ at desired location within 75 feet of FM radio.
7. For best reception test receiver in different locations.

Note: For best results test all four channels.  
Range of operation up to 75 feet.