

Remote control manual

Basic operation instructions:

1.Code matching and grouping: The remote control can only be used after code matching operation with the driver. The methods are as follows:

2.After the normal connection between the drive and the load lamp (light source) and the power is completed, turn ON the power. At the moment of turning ON the power (within 3 seconds after seeing the light/light source (ON)), press the ON button and the light (light source) will flash "slowly for three times", that is, the code and grouping are successful. A) Note: a remote control can match countless drives, but a drive can only accept at most 4 remote controls simultaneously.

3.Code cleaning method is as follows: select the lamp that needs code cleaning, turn ON the power again after cutting off the power, and within 3 seconds after switching ON the power light, press the main ON button for 5 times continuously, that is, the light/light source will "flash six times", and confirm the success of code cleaning. After the code is cleared successfully, the operation process of rematching the code is exactly the same as the operation of the first "matching code".


4.Night Light Function: Find the night light key on the remote control and press it. No matter what state the light is in, the light will return to the night light mode.

5.Timing function: find the timing key ON the remote control. The first flash of the light means half an hour, and the second flash means one hour.

6. The wall switch section: the power supply adopts advanced automatic synchronization technology, lamp light open after three seconds, the power supply will automatically enter the memory function, the electric breaking with wall switch, and then to electricity, the light is memory state before the last time to turn off the lights, and then the electric breaking again with wall switch, then into a state power supply section, repeat switch, can be used to switch out: white, warm white, neutral light.

7.Remote control section function: press the color temperature key on the remote control to quickly select positive white light, warm white light and neutral light.

8.Situational light function: Find the S.Light on the remote control. After pressing it, the sidelight will turn on or the auxiliary light will turn on.

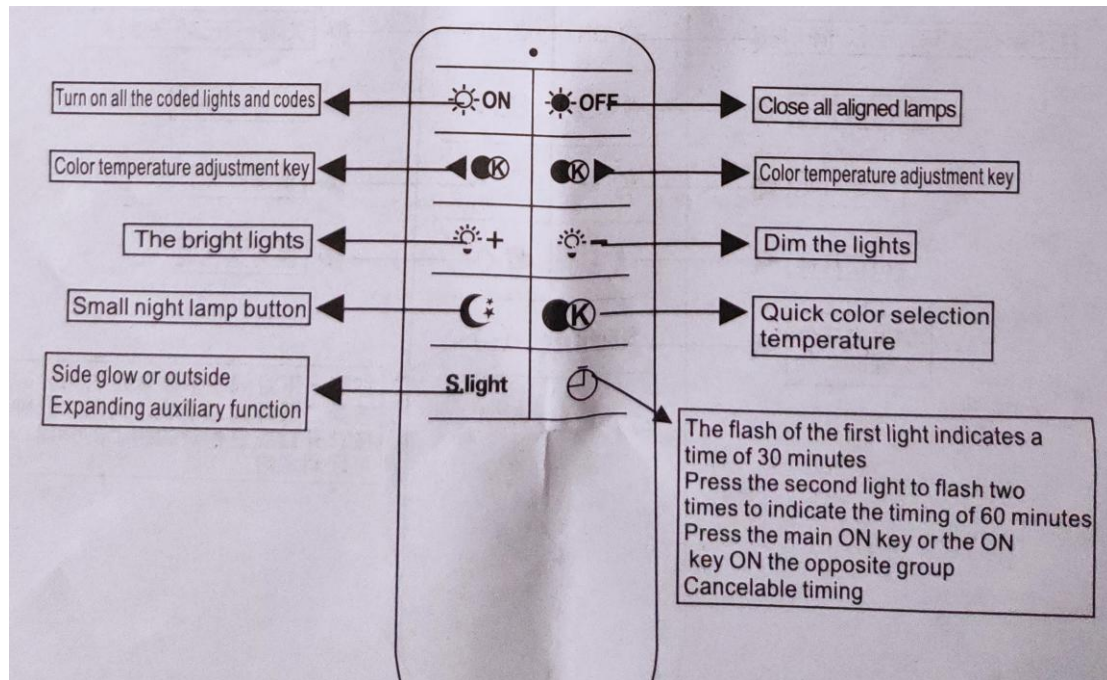

FCC warning:

1. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.